

# **FCC RADIO TEST REPORT**

## **FCC ID:2AEB5M691**

**Product :** Tablet PC

**Trade Name :** AOC

**Model Number :** M691

**Serial Model :** N/A

**Report No. :** ISOT15031102R3

### **Prepared for**

AOC

8F-3, No. 166, Jian 1st Rd., Zhonghe Dist., New Taipei City 23511, Taiwan

### **Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street  
Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599

Website:www.ntek.org.cn

### TEST RESULT CERTIFICATION

**Applicant's name** ..... AOC

Address ..... 8F-3, No. 166, Jian 1st Rd., Zhonghe Dist., New Taipei City 23511, Taiwan

**Manufacture's Name**... AOC

Address ..... 8F-3, No. 166, Jian 1st Rd., Zhonghe Dist., New Taipei City 23511, Taiwan

**Product description**

Product name ..... Tablet PC

Model and/or type reference ..... M691

Serial Model ..... N/A

**Standards** ..... FCC Part15.247 01 Oct. 2014

Test procedure ..... ANSI C63.4-2009 and KDB 558074 : June 5, 2014

This device described above has been tested by Shenzhen ISOTek, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen ISOTek, this document may be altered or revised by Shenzhen ISOTek, personal only, and shall be noted in the revision of the document.


**Date of Test** .....

Date (s) of performance of tests .....: 03 Mar. 2015 ~14 Mar. 2015

Date of Issue.....: 14 Mar. 2015


Test Result.....: **Pass**

Compiled by:

  
\_\_\_\_\_

Lisa Huang/ Project Engineer

Approved by:

  
\_\_\_\_\_

Richard Chen/ Manager

## Table of Contents

	Page
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2 . GENERAL INFORMATION</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
<b>3 . EMC EMISSION TEST</b>	<b>13</b>
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS	17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS	20
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	21
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	22
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	24
<b>4 . POWER SPECTRAL DENSITY TEST</b>	<b>25</b>
4.1 APPLIED PROCEDURES / LIMIT	25
4.1.1 TEST PROCEDURE	25
4.1.2 DEVIATION FROM STANDARD	25
4.1.3 TEST SETUP	25
4.1.4 EUT OPERATION CONDITIONS	25
4.1.5 TEST RESULTS	26
<b>5 . BANDWIDTH TEST</b>	<b>28</b>
5.1 APPLIED PROCEDURES / LIMIT	28
5.1.1 TEST PROCEDURE	28

**Table of Contents**

	<b>Page</b>
<b>TEST SETUP</b>	<b>28</b>
<b>5.1.2 EUT OPERATION CONDITIONS</b>	<b>28</b>
<b>5.1.3 TEST RESULTS</b>	<b>29</b>
<b>6 . PEAK OUTPUT POWER TEST</b>	<b>31</b>
<b>6.1 APPLIED PROCEDURES / LIMIT</b>	<b>31</b>
<b>6.1.1 TEST PROCEDURE</b>	<b>31</b>
<b>6.1.2 DEVIATION FROM STANDARD</b>	<b>31</b>
<b>6.1.3 TEST SETUP</b>	<b>31</b>
<b>6.1.4 EUT OPERATION CONDITIONS</b>	<b>31</b>
<b>6.1.5 TEST RESULTS</b>	<b>32</b>
<b>7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE</b>	<b>34</b>
<b>7.1 DEVIATION FROM STANDARD</b>	<b>34</b>
<b>7.2 TEST SETUP</b>	<b>34</b>
<b>7.3 EUT OPERATION CONDITIONS</b>	<b>34</b>
<b>7.4 TEST RESULTS</b>	<b>35</b>
<b>8 . ANTENNA REQUIREMENT</b>	<b>37</b>
<b>8.1 STANDARD REQUIREMENT</b>	<b>37</b>
<b>8.2 EUT ANTENNA</b>	<b>37</b>

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

<b>FCC Part15 (15.247) , Subpart C</b>			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

**NOTE:**

(1) "N/A" denotes test is not applicable in this Test Report

## 1.1 TEST FACILITY

All the tests were performed at:

Shenzhen Huance Wei Testing Lab at 10th Floor West Logistics Information Center Build, Shenzhen, China

Shenzhen Huance Wei Testing Lab, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration **369037** , Nov 07, 2016.

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$  , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$  , providing a level of confidence of approximately **95 %** .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Tablet PC	
Trade Name	AOC	
Model Name	M691	
Serial Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a Tablet PC	
	Operation Frequency:	2402~2480MHz
	Modulation Type:	GFSK
	Number Of Channel	40CH
	Antenna Designation:	Please see Note 3.
	Antenna Gain (dBi)	1.0dBi
Channel List	Please refer to the Note 2.	
Adapter	Model:XHY050150UUCH, Input: 100-240V~,50/60Hz Output: 5.0V---, 1.5A	
Battery	DC3.7V, 2800mAh	
Connecting I/O Port(s)	Please refer to the User's Manual	
Software version :	Android 4.2.2	
Hardware version :	MOLY.WR8.W1315.MD.WG.MP.V35.P2	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel	Frequency (MHz)
00	2402
01	2404
.....	.....
.....	.....
...	...
.....	.....
38	2478
39	2480

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	FPCB Antenna	N/A	1.0	BT Antenna



## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39
Mode 4	keeping TX mode

For Conducted Emission	
Final Test Mode	Description
Mode 4	keeping TX mode


For Radiated Emission	
Final Test Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39
Mode 4	keeping TX mode

Note:


(1) The measurements are performed at the highest, middle, lowest available channels.

**2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**

## Conducted Emission Test

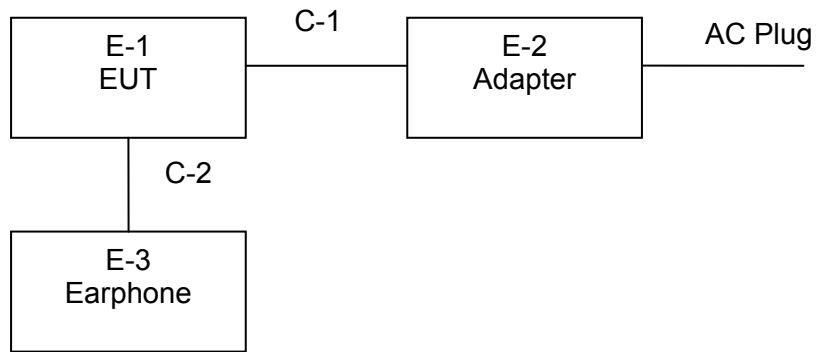

## Radiated Spurious Emission Test



## 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Tablet PC	N/A	M691	N/A	EUT
E-2	Adapter	N/A	XHY050150UUCH	N/A	
E-3	Earphone	N/A	2678	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.2m	
C-2	NO	NO	1.0m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

**2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS**

## Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Aglient	E4446A	US44300451	2014.07.06	2015.07.05	1 year
2	EMI Test Receiver	R&S	ESCI	101165	2014.06.07	2015.06.06	1 year
3	Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168 - 438	2014.07.06	2015.07.05	1 year
4	Horn Antenna	Schwarzbeck	BBHA 9170	9170-182	2014.07.06	2015.07.05	1 year
5	Amplifier	Schwarzbeck	BBV9743	9743 - 019	2014.07.06	2015.07.05	1 year
6	Loop Antenna	ARA	PLA-1030/B	1029	2014.06.08	2015.06.07	1 year

## Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	LISN	messtec	AN3019	NO.1	Jul. 06, 2014	Jul. 05, 2015	1 year
2	LISN	SCHWARZBECK	NNLK 8129	8126466	Jul. 06, 2014	Jul. 05, 2015	1 year
3	Pulse Limiter	SCHWARZBECK	VTSD9596F	9618	Jul. 06, 2014	Jul. 05, 2015	1 year
4	EMI Test Receiver	R&S	ESCI	100843	Jul. 06, 2014	Jul. 05, 2015	1 year
5	Switch	Schwarzbeck	CX - 210	100196	Jul. 06, 2014	Jul. 05, 2015	1 year

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


### 3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

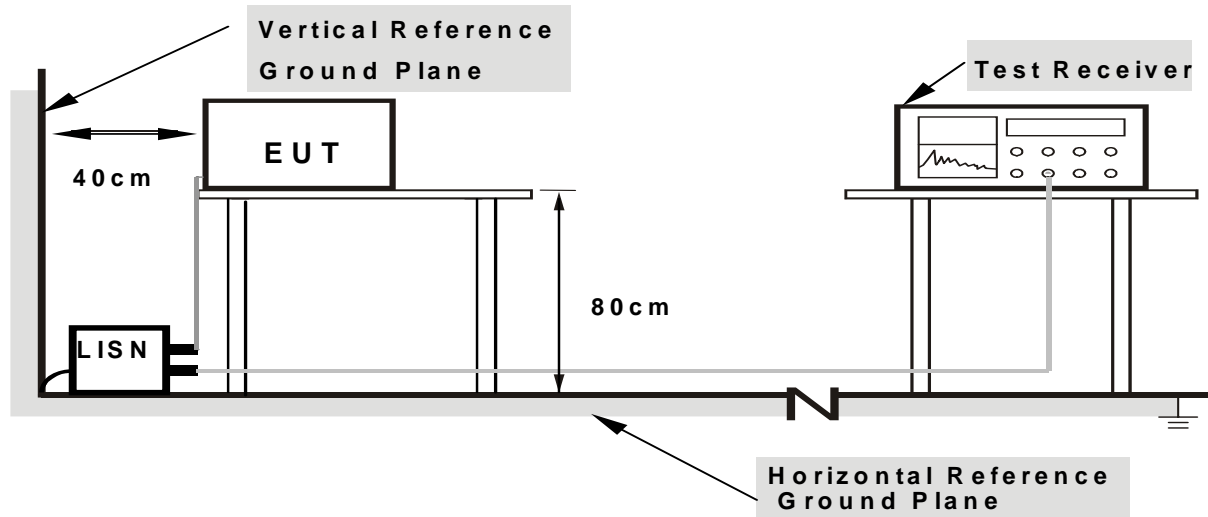

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

### 3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

**3.1.6 TEST RESULTS**

EUT :	Tablet PC	Model Name. :	M691
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V form Adapter AC 120V/60Hz	Test Mode :	Mode 4

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1860	45.85	10.39	56.24	64.21	-7.97	QP
0.1860	29.71	10.39	40.10	54.21	-14.11	AVG
0.2540	36.92	10.43	47.35	61.62	-14.27	QP
0.2540	23.70	10.43	34.13	51.62	-17.49	AVG
0.9980	28.82	10.45	39.27	56.00	-16.73	QP
0.9980	15.84	10.45	26.29	46.00	-19.71	AVG
2.2780	25.92	10.44	36.36	56.00	-19.64	QP
2.2780	18.89	10.44	29.33	46.00	-16.67	AVG
7.3579	30.05	10.68	40.73	60.00	-19.27	QP
7.3579	19.66	10.68	30.34	50.00	-19.66	AVG
22.5300	24.72	10.76	35.48	60.00	-24.52	QP
22.5300	21.77	10.76	32.53	50.00	-17.47	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.




EUT :	Tablet PC	Model Name. :	M691
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V form Adapter AC 120V/60Hz	Test Mode :	Mode 4

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
0.1780	48.44	10.44	58.88	64.57	-5.69	QP
0.1780	35.14	10.44	45.58	54.57	-8.99	AVG
0.2380	37.33	10.43	47.76	62.16	-14.40	QP
0.2380	24.21	10.43	34.64	52.16	-17.52	AVG
0.6100	27.39	10.41	37.80	56.00	-18.20	QP
0.6100	18.21	10.41	28.62	46.00	-17.38	AVG
2.3380	26.42	10.42	36.84	56.00	-19.16	QP
2.3380	21.05	10.42	31.47	46.00	-14.53	AVG
7.3819	29.97	10.68	40.65	60.00	-19.35	QP
7.3819	20.60	10.68	31.28	50.00	-18.72	AVG
22.938	28.23	10.73	38.96	60.00	-21.04	QP
22.938	20.38	10.73	31.11	50.00	-18.89	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

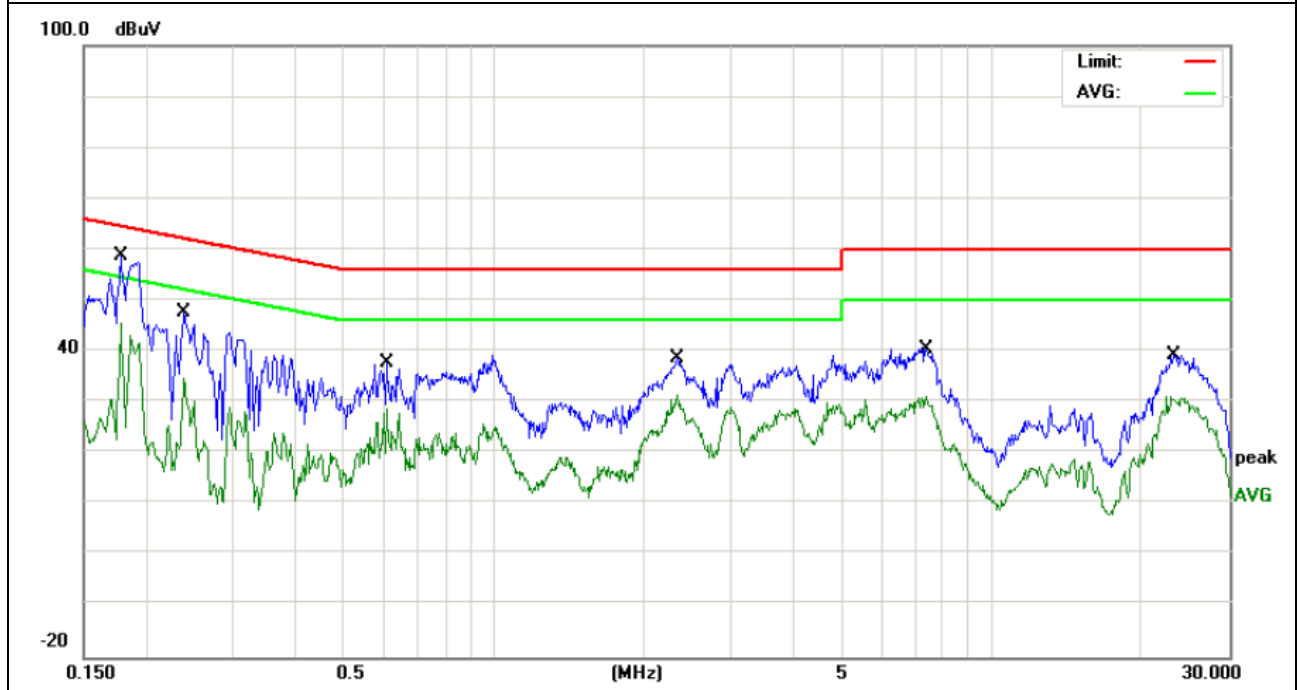



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**Note:**

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Detector	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Peak	1 MHz	10 Hz


### 3.2.3 DEVIATION FROM TEST STANDARD

No deviation


**3.2.4 TEST SETUP**

(A) Radiated Emission Test-Up Frequency Below 30MHz


For radiated emissions below 30MHz

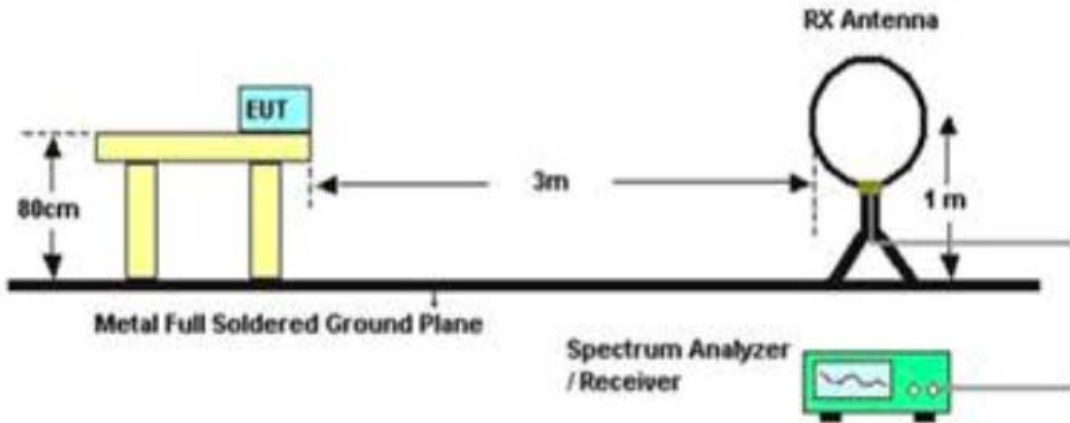

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

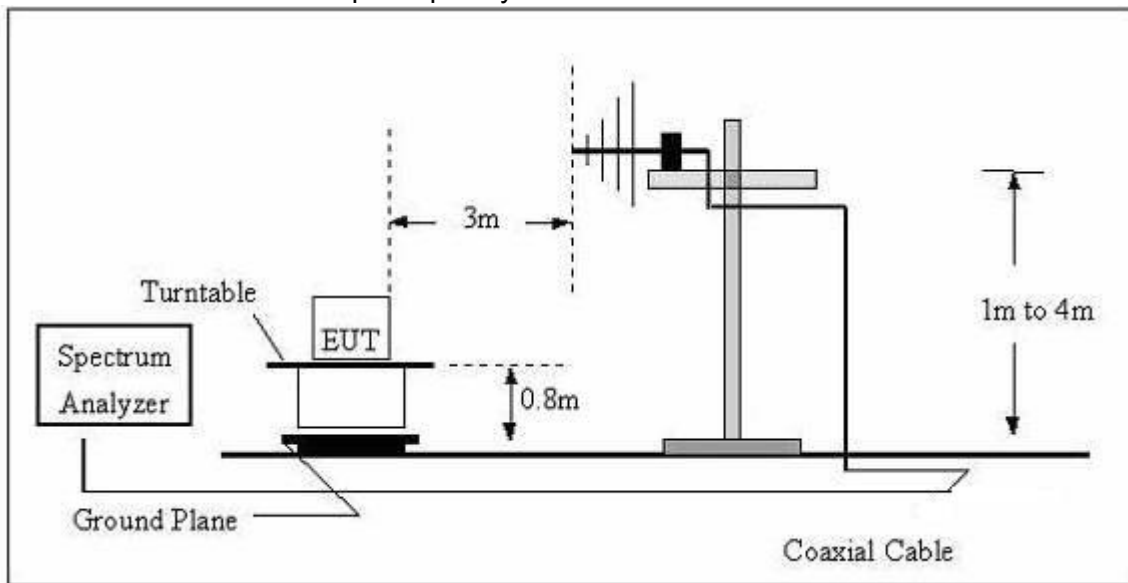

## (C) Radiated Emission Test-Up Frequency Above 1GHz

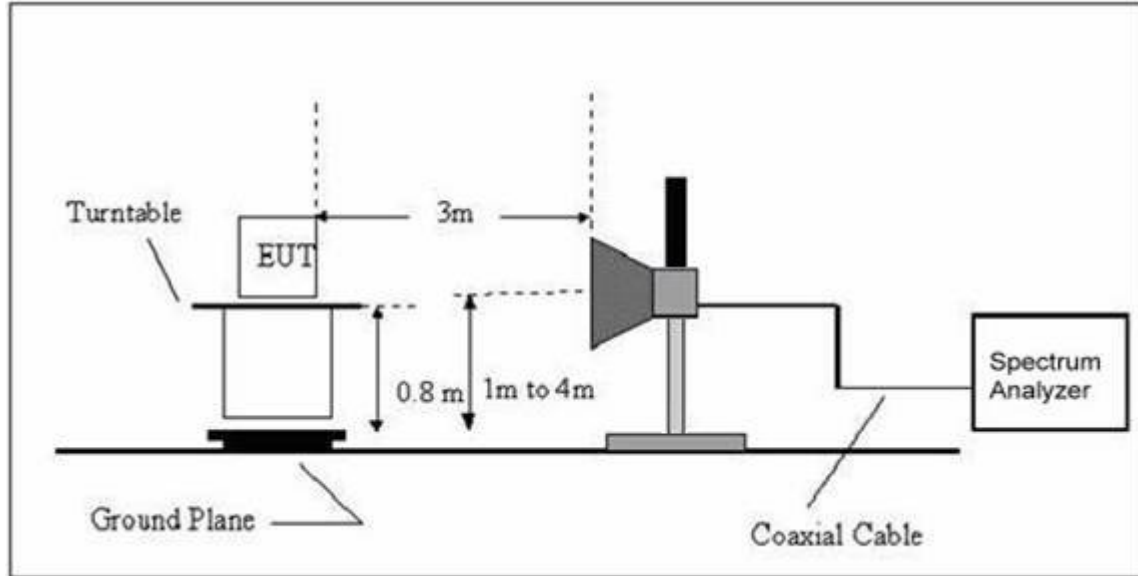**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

EUT:	Tablet PC	Model Name. :	M691
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	N/A
--	--	--	--	N/A

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


**3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

EUT :	Tablet PC	Model Name :	M691
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	36.8952	18.80	15.50	34.30	40.00	-5.70	QP
V	44.2751	20.24	12.16	32.40	40.00	-7.60	QP
V	150.0107	17.17	10.41	27.58	43.50	-15.92	QP
V	276.1235	22.75	13.88	36.63	46.00	-9.37	QP
V	550.9479	18.15	21.36	39.51	46.00	-6.49	QP
V	815.9678	10.09	27.36	37.45	46.00	-8.55	QP

**Remark:**


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

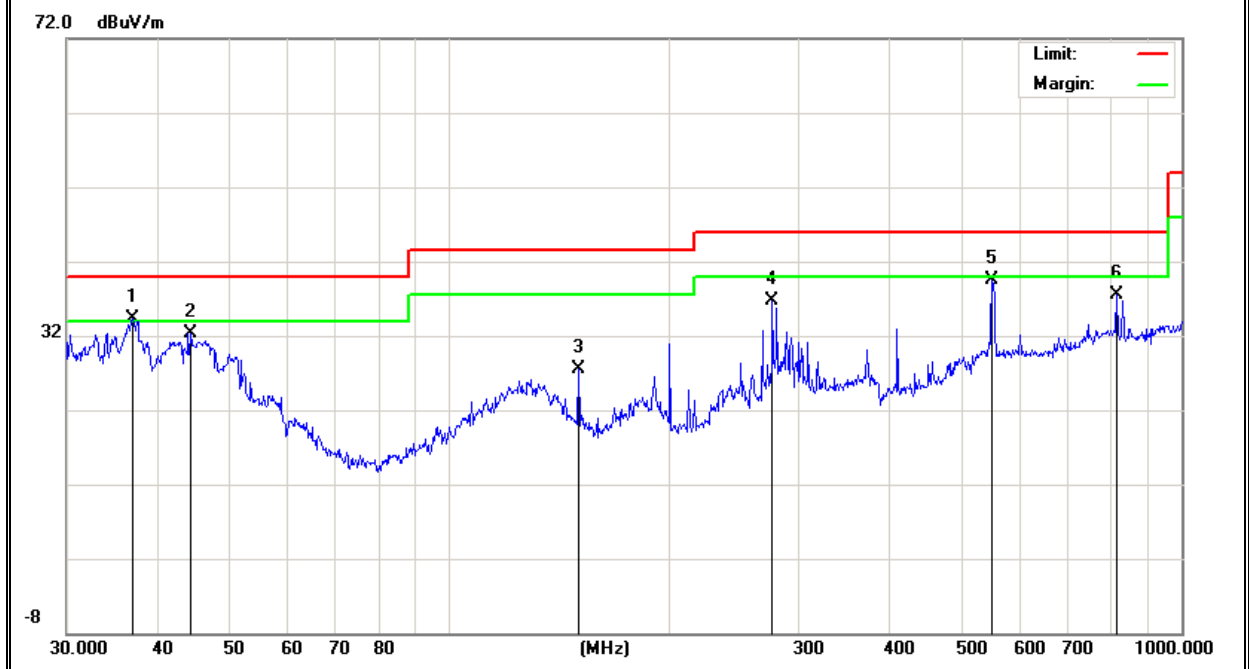

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	96.0986	17.56	8.57	26.13	43.50	-17.37	QP
H	150.0107	17.88	10.41	28.29	43.50	-15.21	QP
H	276.1235	24.82	13.88	38.70	46.00	-7.30	QP
H	408.9460	18.87	18.49	37.36	46.00	-8.64	QP
H	552.8831	18.40	21.40	39.80	46.00	-6.20	QP
H	830.4002	12.10	27.30	39.40	46.00	-6.60	QP

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

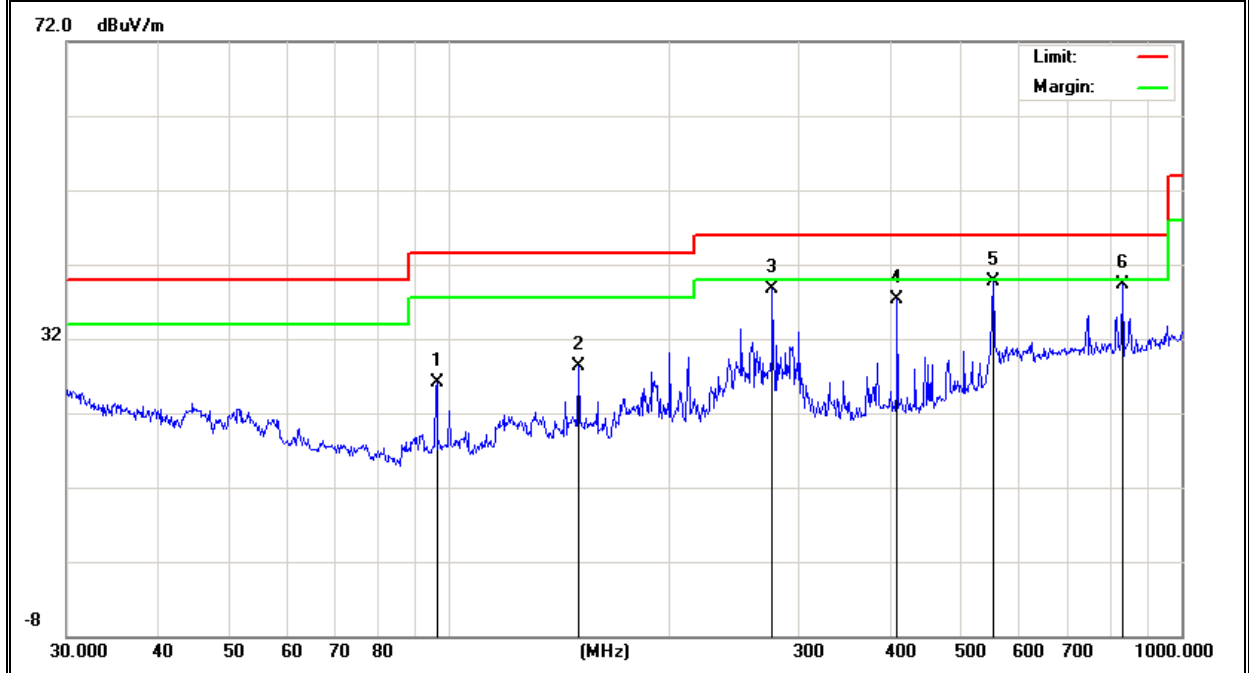

**3.2.8 TEST RESULTS (ABOVE 1000 MHZ)**

EUT :	Tablet PC	Model Name :	M691
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX		

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark	Polar (H/V)
Low Channel (2402 MHz)-Above 1G							
4804.000	60.79	-3.64	57.15	74	-16.85	Pk	Vertical
4804.000	47.83	-3.64	44.19	54	-9.81	AV	Vertical
7206.000	58.52	-0.95	57.57	74	-16.43	Pk	Vertical
7206.000	46.61	-0.95	45.66	54	-8.34	AV	Vertical
4804.000	65.05	-3.64	61.41	74	-12.59	Pk	Horizontal
4804.000	51.52	-3.64	47.88	54	-6.12	AV	Horizontal
7206.000	57.72	-0.95	56.77	74	-17.23	Pk	Horizontal
7206.000	47.46	-0.95	46.51	54	-7.49	AV	Horizontal
Mid Channel (2440 MHz)-Above 1G							
4880.000	62.67	-3.67	59	74	-15	Pk	Vertical
4880.000	48.13	-3.67	44.46	54	-9.54	AV	Vertical
7320.000	54.71	-0.82	53.89	74	-20.11	Pk	Vertical
7320.000	42.13	-0.82	41.31	54	-12.69	AV	Vertical
4880.000	65.12	-3.67	61.45	74	-12.55	Pk	Horizontal
4880.000	45.52	-3.67	41.85	54	-12.15	AV	Horizontal
7320.000	58.13	-0.82	57.31	74	-16.69	Pk	Horizontal
7320.000	47.46	-0.82	46.64	54	-7.36	AV	Horizontal
High Channel (2480MHz)- Above 1G							
4960.000	58.33	-3.59	54.74	74	-19.26	Pk	Vertical
4960.000	46.14	-3.59	42.55	54	-11.45	AV	Vertical
7440.000	55.42	-0.68	54.74	74	-19.26	Pk	Vertical
7440.000	44.41	-0.68	43.73	54	-10.27	AV	Vertical
4960.000	62.41	-3.59	58.82	74	-15.18	Pk	Horizontal
4960.000	47.23	-3.59	43.64	54	-10.36	AV	Horizontal
7440.000	58.13	-0.68	57.45	74	-16.55	Pk	Horizontal
7440.000	45.45	-0.68	44.77	54	-9.23	AV	Horizontal

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit



## 4. POWER SPECTRAL DENSITY TEST

### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


#### 4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. 3 kHz  $\leq$ Set the RBW $\leq$ 100 kHz.
4. Set the VBW  $\geq$  3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### 4.1.2 DEVIATION FROM STANDARD

No deviation.

#### 4.1.3 TEST SETUP

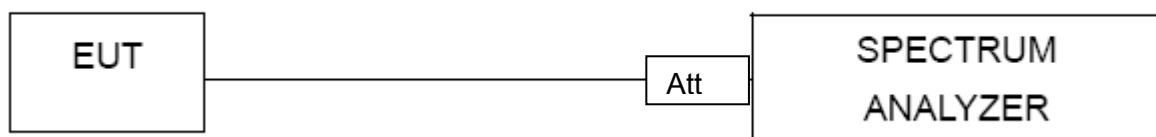


#### 4.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.1.5 TEST RESULTS

EUT :	Tablet PC	Model Name :	M691
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode /CH00, CH19, CH39		

Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2402 MHz	-18.78	8	PASS
2440 MHz	-18.57	8	PASS
2480 MHz	-18.63	8	PASS

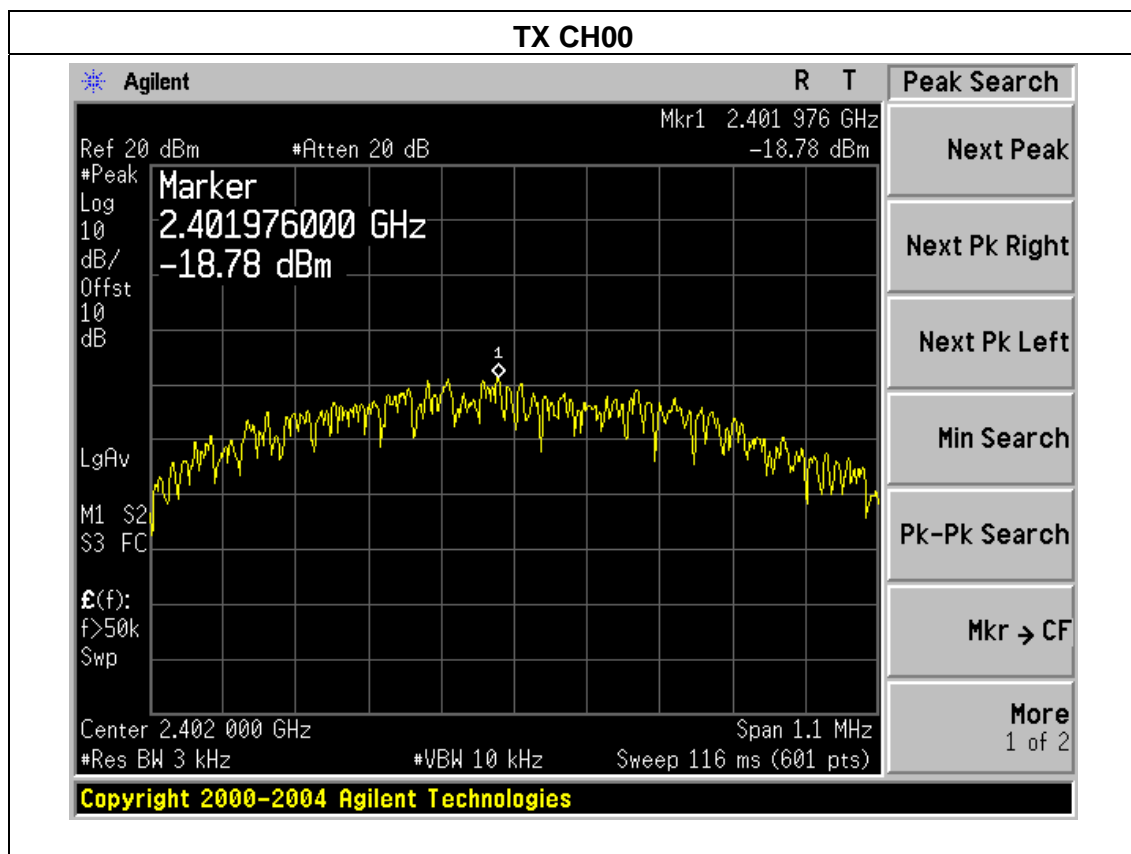

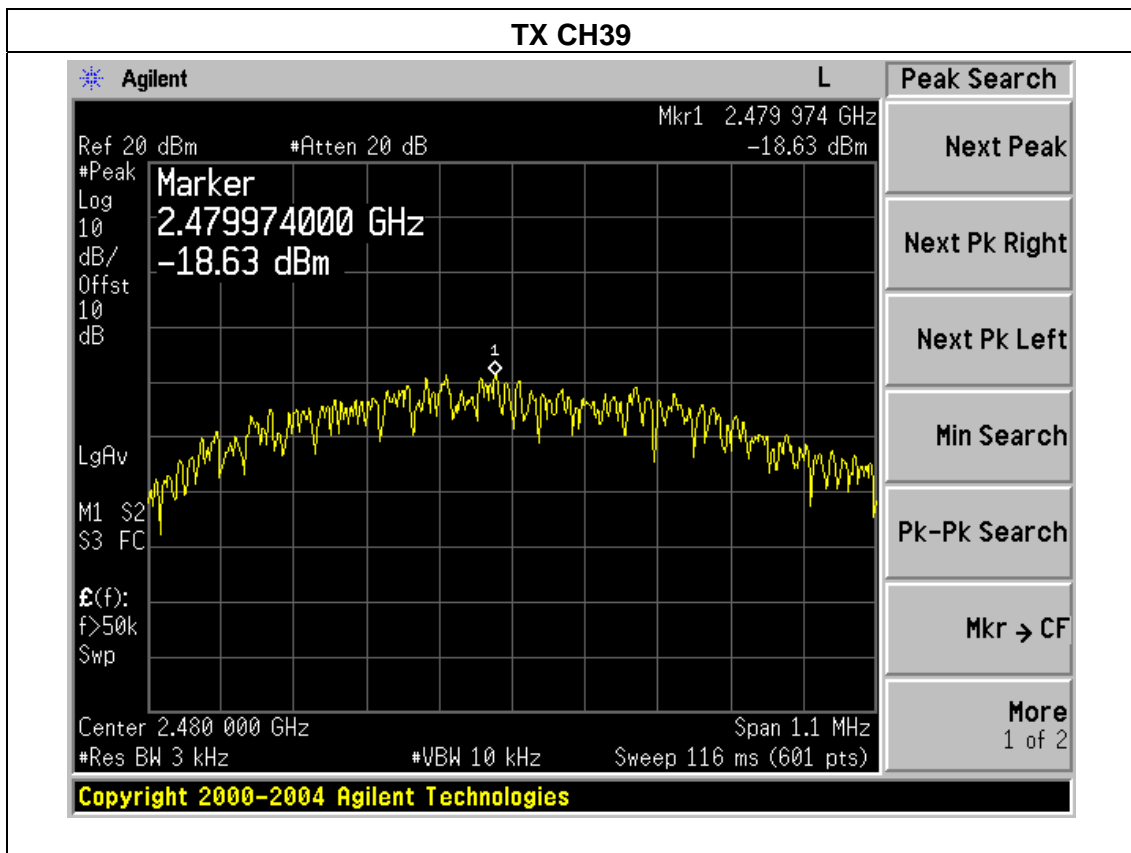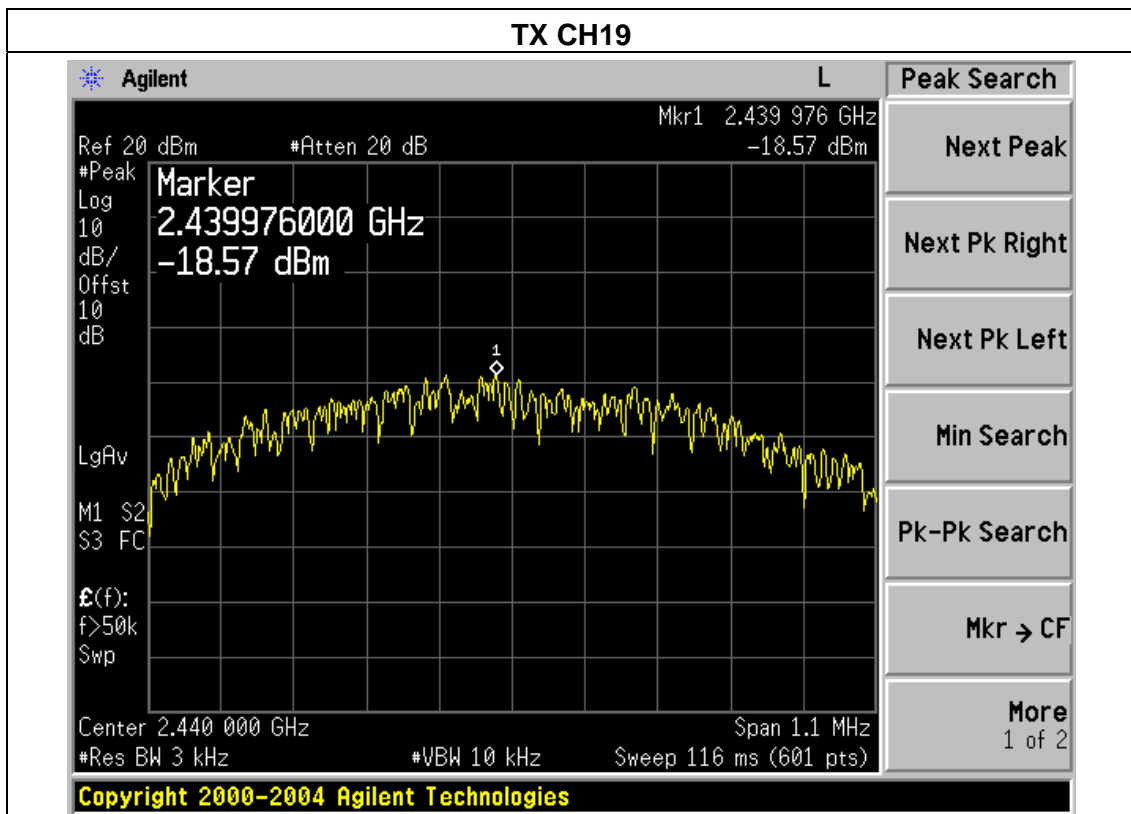

## 5. BANDWIDTH TEST


### 5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

#### 5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### TEST SETUP

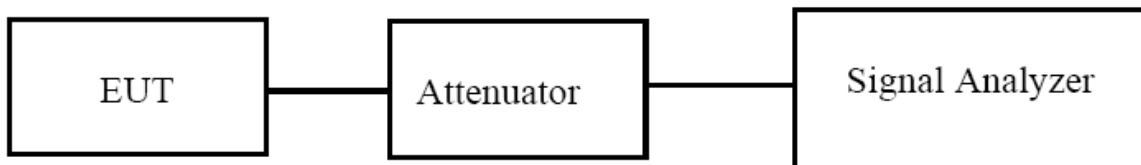


#### 5.1.2 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 5.1.3 TEST RESULTS

EUT :	Tablet PC	Model Name :	M691
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode /CH00, CH19, CH39		

Channel	Frequency (MHz)	6dB bandwidth (kHz)	Limit (kHz)	Result
Low	2402	700.085	500	Pass
Middle	2440	698.005	500	Pass
High	2480	694.852	500	Pass

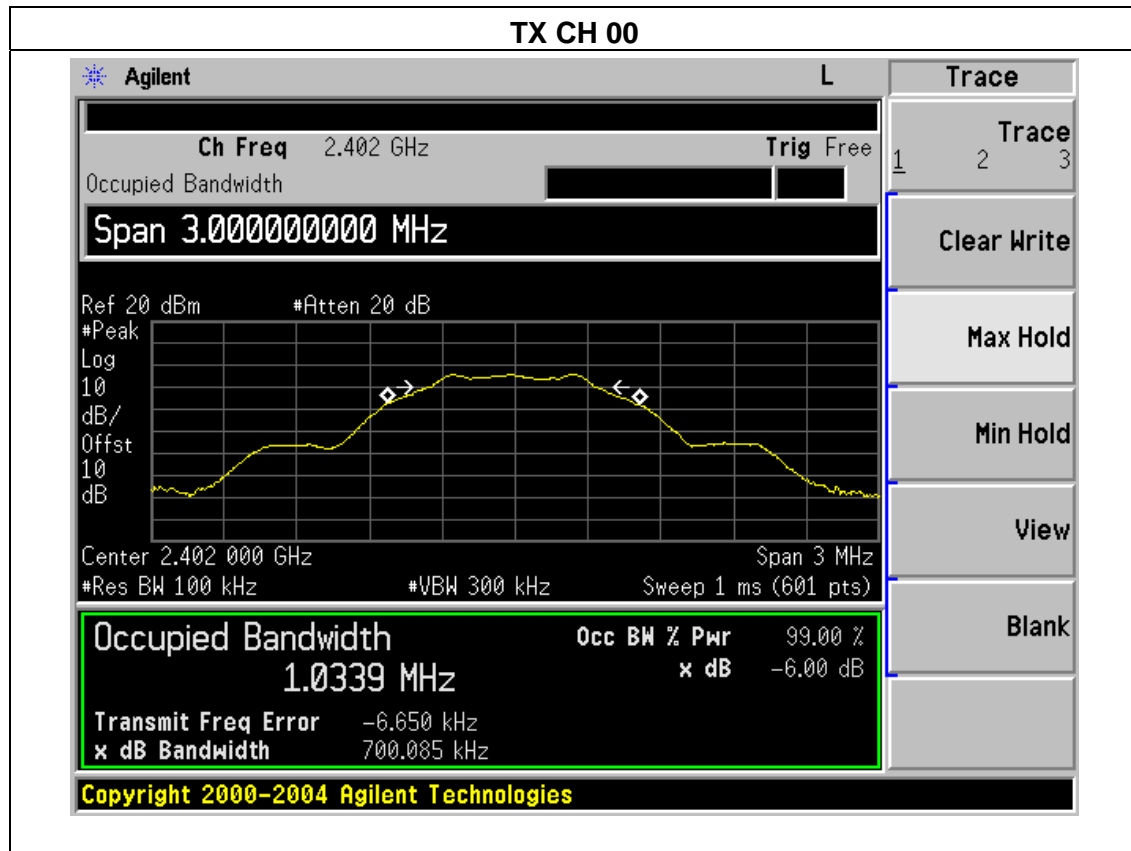

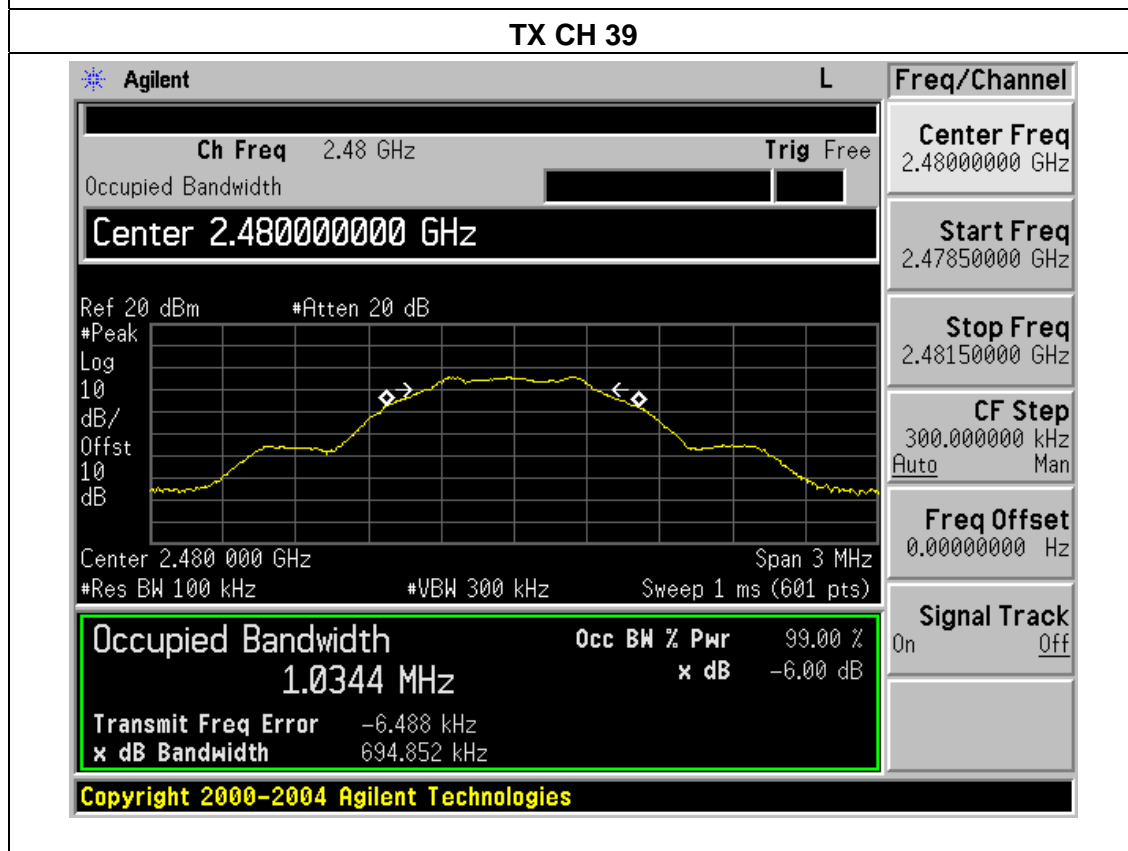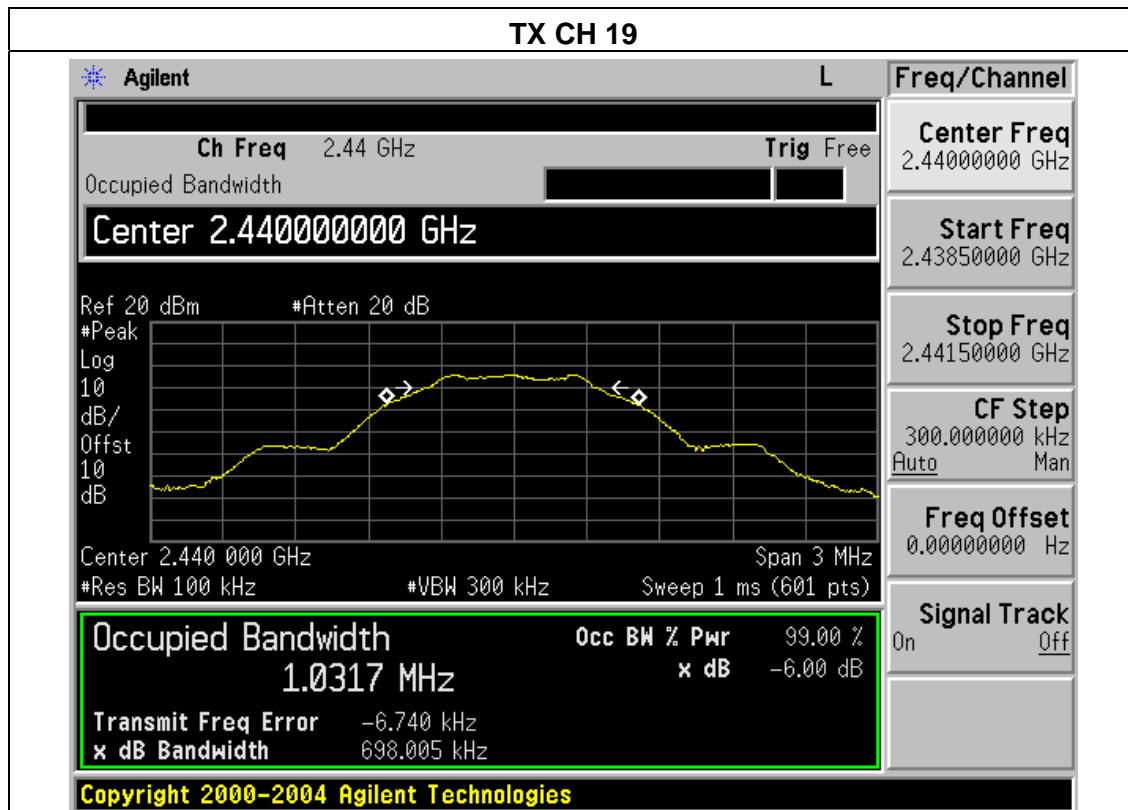

## 6. PEAK OUTPUT POWER TEST

### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS


#### 6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW > the 6 dB bandwidth of the emission being measured
  - Span = approximately 5 times the 6 dB bandwidth, centered on a hopping channel
  - VBW  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP

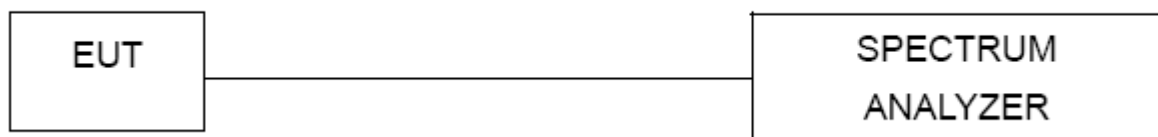


#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



**6.1.5 TEST RESULTS**

EUT :	Tablet PC	Model Name :	M691
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode		

Test Channe	Frequency	Maximum Conducted Output Power	LIMIT
	(MHz)	(dBm)	dBm
CH00	2402	-3.47	30
CH19	2440	-3.28	30
CH39	2480	-3.37	30

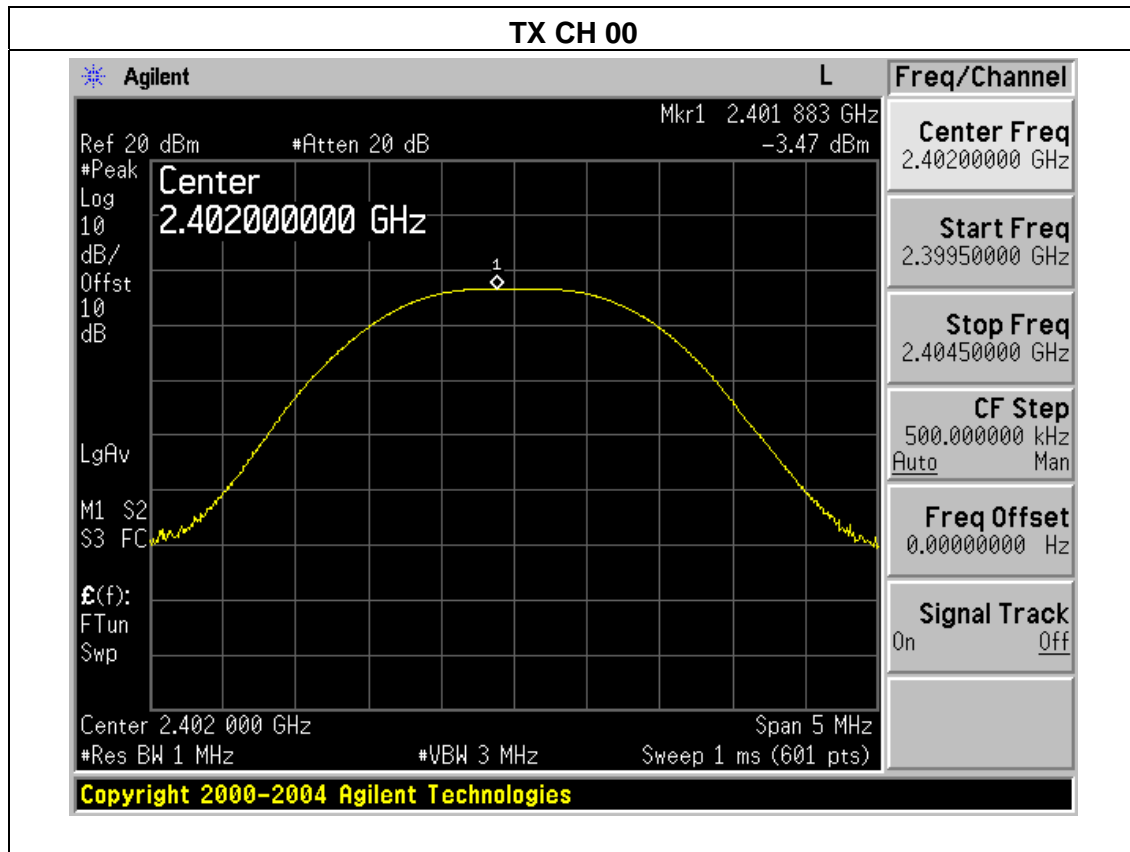



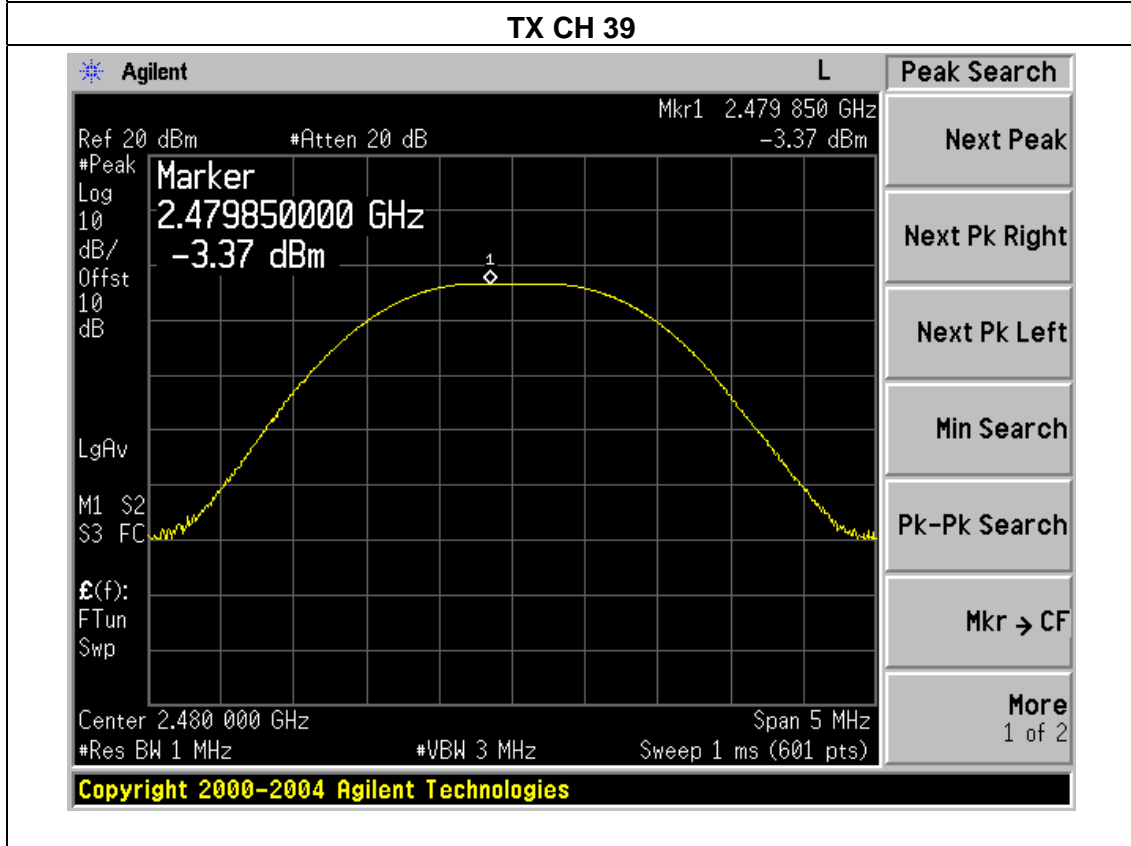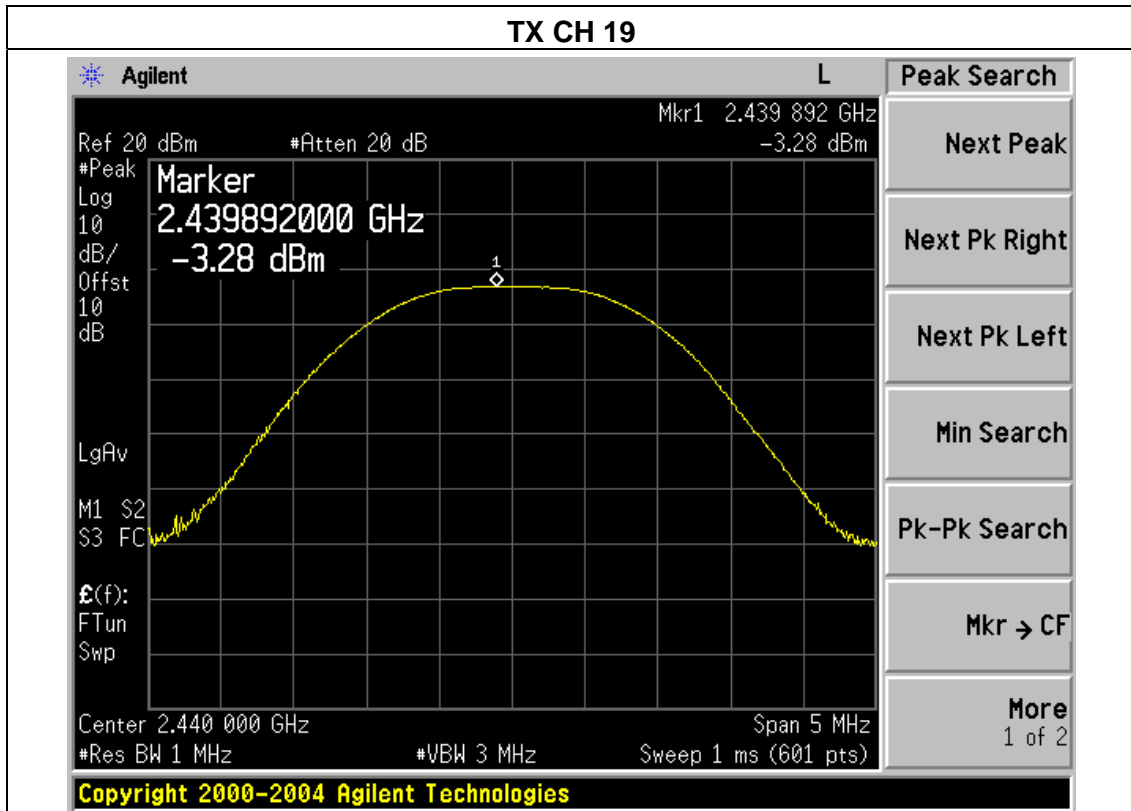

## 7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

### APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


### TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

### 7.1 DEVIATION FROM STANDARD

No deviation.

### 7.2 TEST SETUP

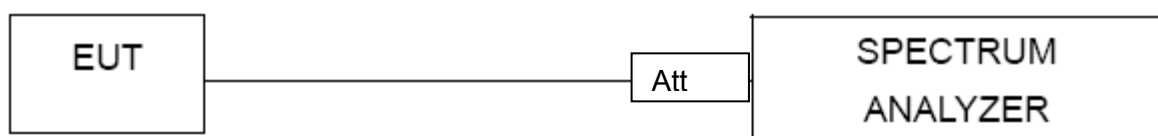

### 7.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**7.4 TEST RESULTS**

EUT :	Tablet PC	Model Name :	M691
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V


Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
Left-band	55.73	20	Pass
Right-band	56.40	20	Pass

## Radiated band edge:


Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type	Comment
2390	48.57	-13.06	35.51	74	-38.49	peak	Vertical
2390	46.42	-13.06	33.36	74	-40.64	peak	Horizontal
2483.5	47.39	-12.78	34.61	74	-39.39	peak	Vertical
2483.5	48.78	-12.78	36.00	74	-38.00	peak	Horizontal

Note: Test method to see chapter 3.2 . When PK value is lower than the Average value limit, average not record.

Left Side

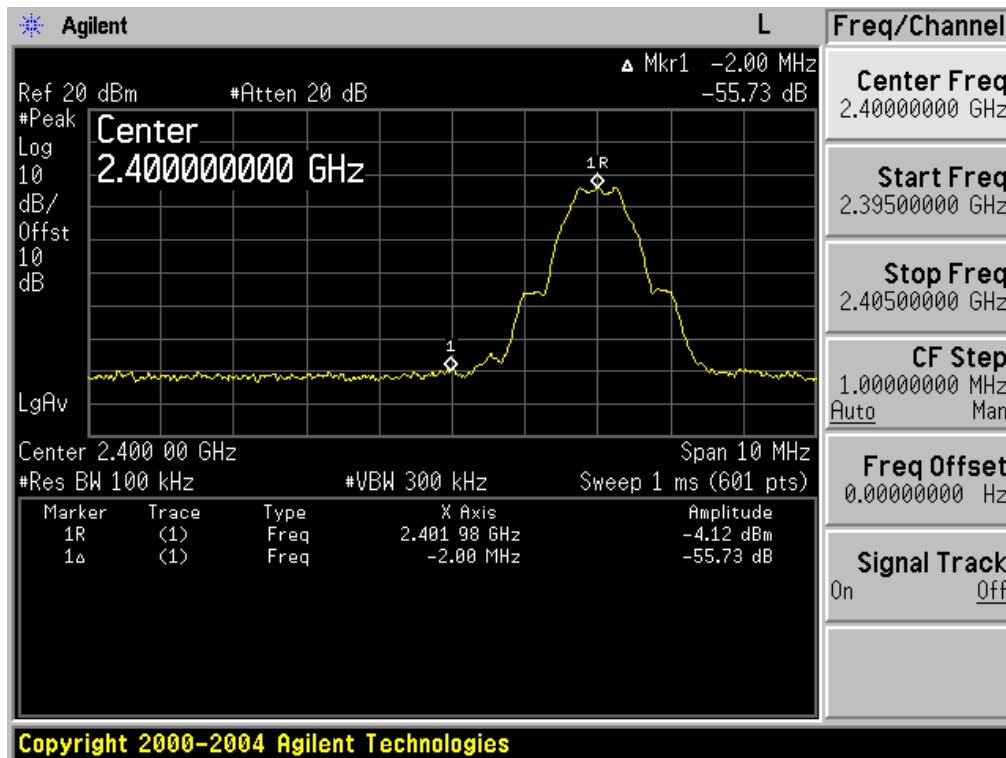

Right Side

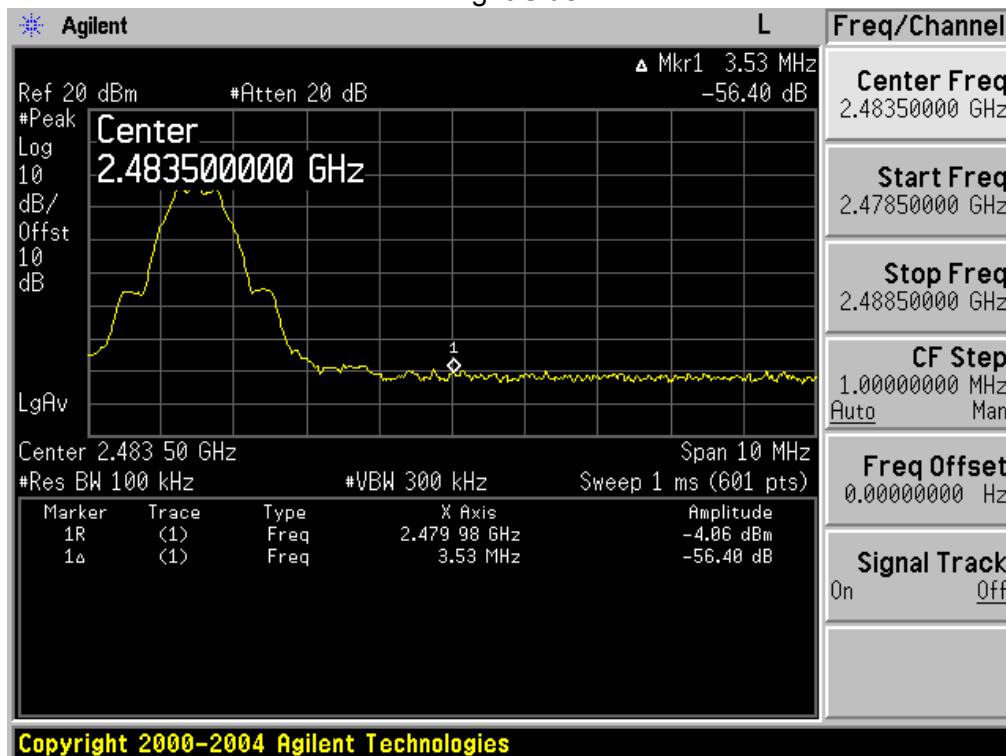

## **8. ANTENNA REQUIREMENT**

### **8.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **8.2 EUT ANTENNA**

The EUT antenna is permanent attached antenna. It comply with the standard requirement.

**----END OF REPORT----**