

# TEST REPORT

**Reference No.** ..... : WTS15S0628457-2E  
**FCC ID**..... : 2AEE8LAVASTARPLUS  
**Applicant** ..... : LAVA INTERNATIONAL (H.K) LIMITED  
**Address** ..... : UNIT L 1/F MAU LAM COMM BLDG 16-18 MAU LAM ST, JORDAN  
KL, HK  
**Manufacturer** ..... : The same as above  
**Address** ..... : The same as above  
**Product Name** ..... : mobile phone  
**Model No.** ..... : Star Plus  
**Brand.** ..... : LAVA  
**Standards**..... : FCC CFR47 Part 15 Section 15.247:2014  
**Date of Receipt sample**..... : Jun. 24, 2015  
**Date of Test**..... : Jun. 24 – Jul. 17, 2015  
**Date of Issue** ..... : Jul.21, 2015  
**Test Result** ..... : **Pass**

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,  
Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:



Zero Zhou / Project Engineer

Approved by:



Philo Zhong / Manager

## 2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

### 3 Contents

	<b>Page</b>
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 GENERAL INFORMATION.....</b>	<b>4</b>
4.1 GENERAL DESCRIPTION OF E.U.T. ....	4
4.2 DETAILS OF E.U.T. ....	4
4.3 CHANNEL LIST .....	4
4.4 TEST MODE .....	6
4.5 TEST FACILITY .....	7
<b>5 EQUIPMENT USED DURING TEST .....</b>	<b>8</b>
5.1 EQUIPMENTS LIST .....	8
5.2 DESCRIPTION OF SUPPORT UNITS .....	9
5.3 MEASUREMENT UNCERTAINTY .....	9
5.4 TEST EQUIPMENT CALIBRATION .....	9
<b>6 CONDUCTED EMISSION .....</b>	<b>10</b>
6.1 E.U.T. OPERATION .....	10
6.2 EUT SETUP .....	10
6.3 MEASUREMENT DESCRIPTION .....	10
6.4 CONDUCTED EMISSION TEST RESULT .....	11
<b>7 RADIATED EMISSIONS.....</b>	<b>13</b>
7.1 EUT OPERATION.....	13
7.2 TEST SETUP .....	14
7.3 SPECTRUM ANALYZER SETUP .....	15
7.4 TEST PROCEDURE .....	16
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	16
7.6 SUMMARY OF TEST RESULTS .....	17
<b>8 CONDUCTED SPURIOUS EMISSIONS.....</b>	<b>31</b>
2.1 TEST PROCEDURE .....	31
2.2 TEST RESULT .....	32
<b>9 BAND EDGE MEASUREMENT .....</b>	<b>40</b>
9.1 TEST PROCEDURE.....	40
9.2 TEST RESULT .....	41
<b>10 6 DB BANDWIDTH MEASUREMENT .....</b>	<b>46</b>
10.1 TEST PROCEDURE:.....	46
10.2 TEST RESULT: .....	46
<b>11 MAXIMUM PEAK OUTPUT POWER .....</b>	<b>55</b>
11.1 TEST PROCEDURE:.....	55
11.2 TEST RESULT: .....	56
<b>12 POWER SPECTRAL DENSITY .....</b>	<b>65</b>
12.1 TEST PROCEDURE:.....	65
12.2 TEST RESULT: .....	65
<b>13 ANTENNA REQUIREMENT .....</b>	<b>74</b>
<b>14 RF EXPOSURE.....</b>	<b>75</b>

## 4 General Information

### 4.1 General Description of E.U.T.

Product Name	: mobile phone
Model No.	: Star Plus
Model Description	: N/A
GSM Band(s)	: GSM 850/900/1800/1900MHz
GPRS/EGPRS Class	: 12
WCDMA Band(s)	: FDD Band I/II/V
LTE Band(s)	: LTE Band 2/4/7
Wi-Fi Specification	: 802.11b/g/n HT20/n HT40
Bluetooth Version	: Bluetooth v4.0 with BLE
GPS	: Support
NFC	: N/A
Hardware Version	: V2.0
Software Version	: S101

### 4.2 Details of E.U.T.

Operation Frequency	: GSM/GPRS/EGPRS 850: 824~849MHz PCS/GPRS/EGPRS1900: 1850~1910MHz WCDMA Band II: 1850-1910MHz WCDMA Band V: 824~849MHz LTE Band 2: 1850~1910MHz LTE Band 4: 1710~1755MHz LTE Band 7: 2500~2570MHz WiFi: 802.11b/g/n HT20: 2412-2462MHz 802.11n HT40: 2422-2452MHz Bluetooth: 2402-2480MHz
Max. RF output power	: GSM 850: 32.67dBm EGPRS 850: 25.96dBm PCS1900:29.66dBm EGPRS 1900:25.78dBm WCDMA Band II: 22.73dBm WCDMA Band V: 22.42dBm LTE Band 2: 23.69dBm LTE Band 4: 23.99dBm LTE Band 7: 23.87dBm WiFi: 9.44dBm Bluetooth: 2.75dBm

Type of Modulation	: GSM,GPRS: GMSK EGPRS: GMSK, 8PSK WCDMA: BPSK LTE: QPSK, 16QAM WiFi: CCK, OFDM Bluetooth: GFSK, Pi/4 DQPSK,8DPSK
Antenna installation	: GSM/WCDMA/LTE: internal permanent antenna WiFi/Bluetooth: internal permanent antenna
Antenna Gain	: GSM 850: 1.0dBi PCS1900: 1.0dBi WCDMA Band II: 1.0dBi WCDMA Band V: 1.0dBi LTE Band 2: 1.0dBi LTE Band 4: 1.0dBi LTE Band 7: 1.0dBi WiFi: 0dBi Bluetooth: 0dBi
Technical Data	:Battery DC 3.8V, 2500mAh DC 5V,1A, Charging form adapter Adapter Input:100-300V~50/60Hz, 0.15A
Adapter	:Manufacture: LAVA Model No.: CLV-14

### 4.3 Channel List

#### WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

#### BT BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

#### 4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX
6dB Bandwidth	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX
Band Edge	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX

Table 2 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	0/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	0/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	0/19/39	TX
Band Edge	BT BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	0/19/39	TX

**Note** :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

Table 3 Tests Carried Out Under FCC part 15.207 &amp; FCC part 15.209

Test Item	Test Mode
Conduction Emission, 0.15MHz to 30MHz	Communication(Wifi & BT BLE)

#### 4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, July 12, 2012.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

## 5 Equipment Used during Test

### 5.1 Equipments List

<b>Conducted Emissions at Mains Terminals Disturbance Voltage</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.15,2014	Sep.14,2015
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.15,2014	Sep.14,2015
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.15,2014	Sep.14,2015
4.	Cable	LARGE	RF300	-	Sep.15,2014	Sep.14,2015
<b>3m Semi-anechoic Chamber for Radiation</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2014	Sep.14,2015
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2014	Sep.14,2015
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.18,2015	Apr.17,2016
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.15,2014	Sep.14,2015
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.18,2015	Apr.17,2016
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	669	Apr.18,2015	Apr.17,2016
7	Broadband Preamp	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2015	Mar.16,2016
8	Coaxial Cable (above 1GHz)	Top	1000MHz-25GHz	EW02014-7	Apr.10,2014	Apr.09,2015
9	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Sep.15,2014	Sep.14,2015
10	Universal Radio Communication Tester	R&S	CMU 200	112461	Apr.10,2015	Apr.09,2016
11	Signal Generator	R&S	SMR20	100046	Sep.15,2014	Sep.14,2015
<b>RF Conducted Testing</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Aug. 15,2014	Aug.14,2015
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Aug. 15,2014	Aug.14,2015
3.	Humidity Chamber	GF	GTH-225-40-1P	IAA061213	Aug. 15,2014	Aug.14,2015

## 5.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

## 5.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Radiated Spurious Emissions test	$\pm 5.03$ dB (30M~1000MHz)
	$\pm 5.47$ dB (1000M~25000MHz)
Conducted Spurious Emissions test	$\pm 3.64$ dB (AC mains 150KHz~30MHz)

## 5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2009
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB $\mu$ V between 0.15MHz & 0.5MHz 56 dB $\mu$ V between 0.5MHz & 5MHz 60 dB $\mu$ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

### 6.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in WIFI link mode(Wifi /BT BLE), the worst data were shown in the report.

### 6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4.

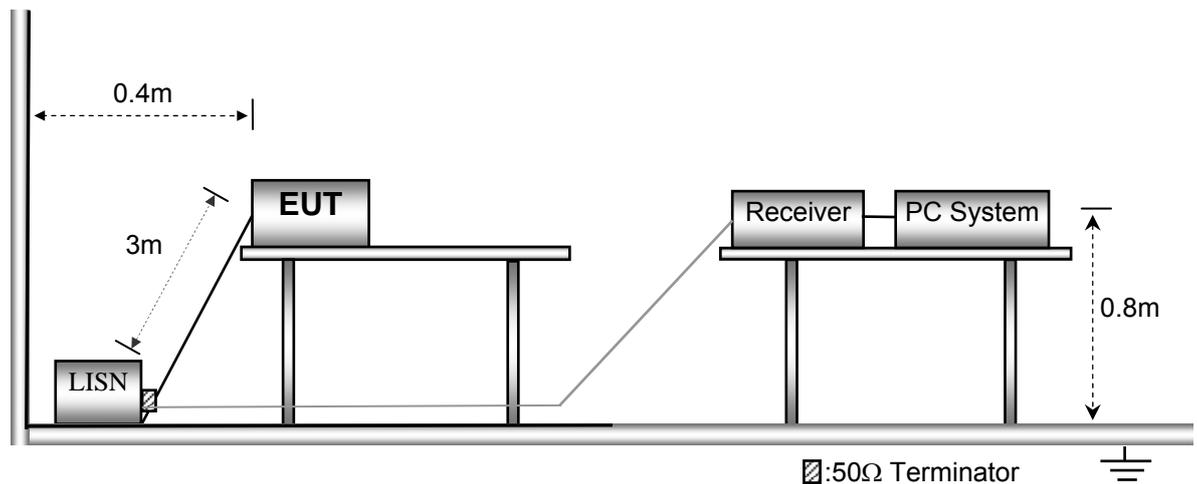

### 6.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 6.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Worst Mode: BT+WIFI mode (Wifi)

Live line:

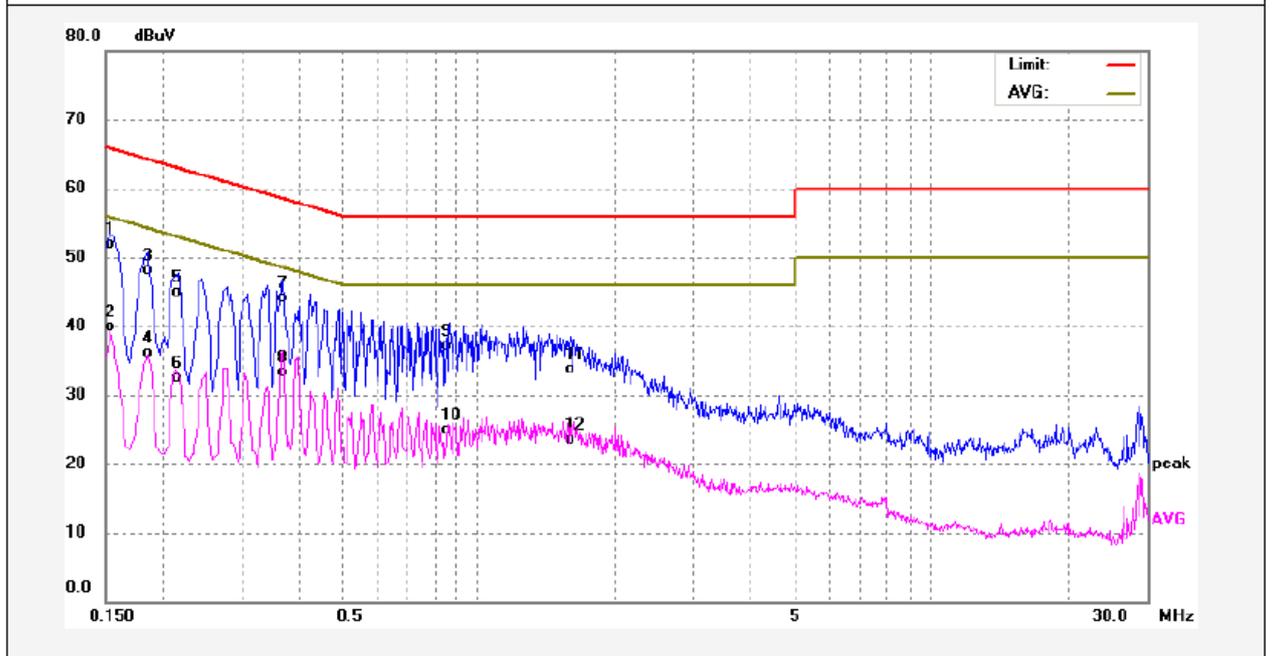

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	41.87	10.10	51.97	65.78	-13.81	QP	
2	0.1539	29.82	10.10	39.92	55.78	-15.86	AVG	
3	0.1860	38.10	10.10	48.20	64.21	-16.01	QP	
4	0.1860	26.06	10.10	36.16	54.21	-18.05	AVG	
5	0.2180	34.71	10.10	44.81	62.89	-18.08	QP	
6	0.2180	22.33	10.10	32.43	52.89	-20.46	AVG	
7	0.3700	34.09	10.11	44.20	58.50	-14.30	QP	
8	0.3700	23.25	10.11	33.36	48.50	-15.14	AVG	
9	0.8620	26.94	10.19	37.13	56.00	-18.87	QP	
10	0.8620	14.79	10.19	24.98	46.00	-21.02	AVG	
11	1.5940	23.48	10.20	33.68	56.00	-22.32	QP	
12	1.5940	13.24	10.20	23.44	46.00	-22.56	AVG	

Neutral line:

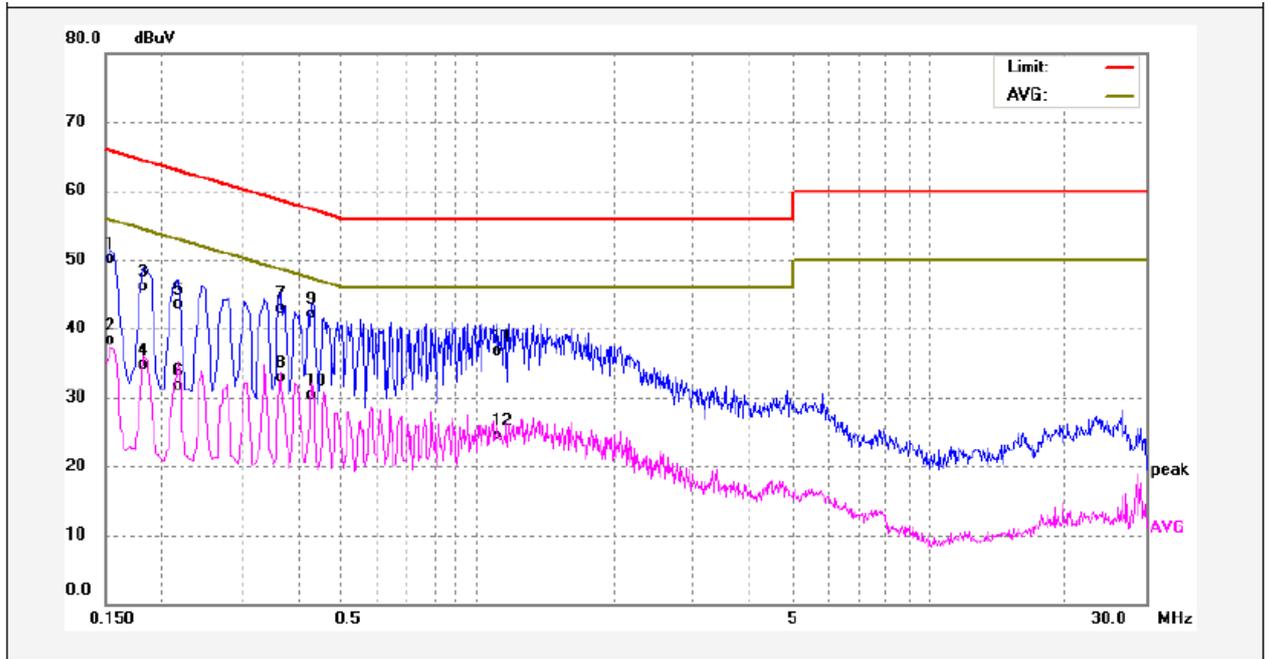

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	40.02	10.10	50.12	65.78	-15.66	QP	
2	0.1539	28.12	10.10	38.22	55.78	-17.56	AVG	
3	0.1819	36.10	10.10	46.20	64.39	-18.19	QP	
4	0.1819	24.68	10.10	34.78	54.39	-19.61	AVG	
5	0.2180	33.49	10.10	43.59	62.89	-19.30	QP	
6	0.2180	21.61	10.10	31.71	52.89	-21.18	AVG	
7	0.3660	32.79	10.11	42.90	58.59	-15.69	QP	
8	0.3660	22.85	10.11	32.96	48.59	-15.63	AVG	
9	0.4300	31.91	10.12	42.03	57.25	-15.22	QP	
10	0.4300	20.11	10.12	30.23	47.25	-17.02	AVG	
11	1.1100	26.59	10.21	36.80	56.00	-19.20	QP	
12	1.1100	14.28	10.21	24.49	46.00	-21.51	AVG	

## 7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.4:2009

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in WIFI link mode(Wifi /BT BLE), the test data were shown in the report.


## 7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4.


The test setup for emission measurement below 30MHz.

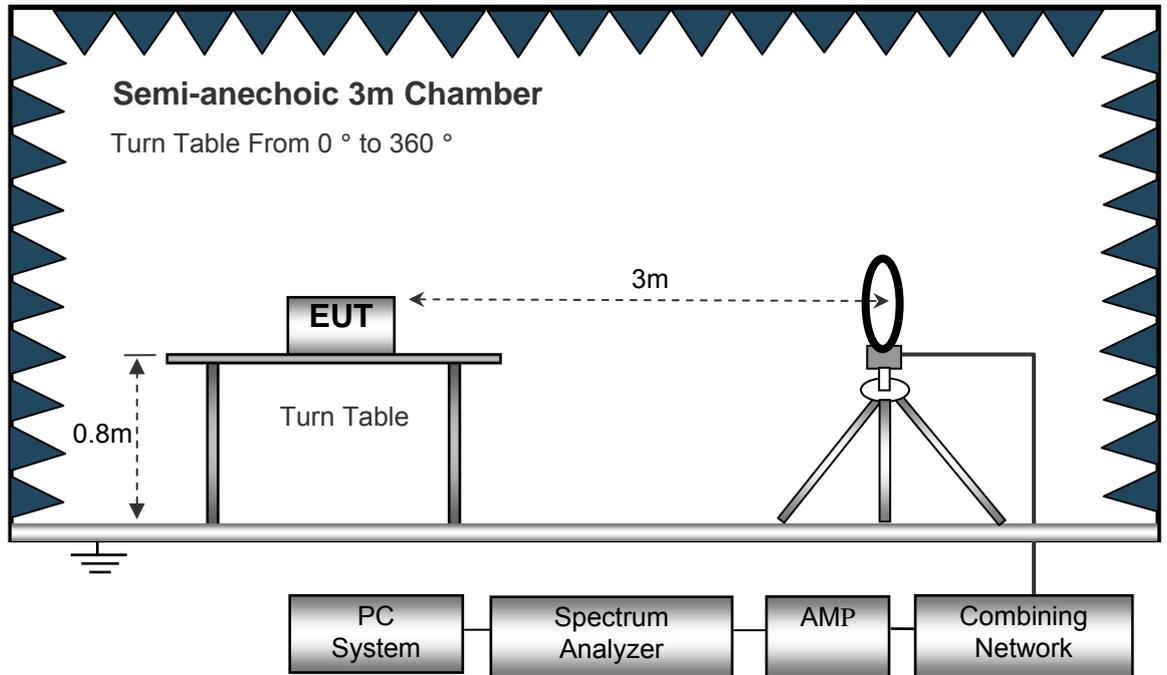

The test setup for emission measurement from 30 MHz to 1 GHz.

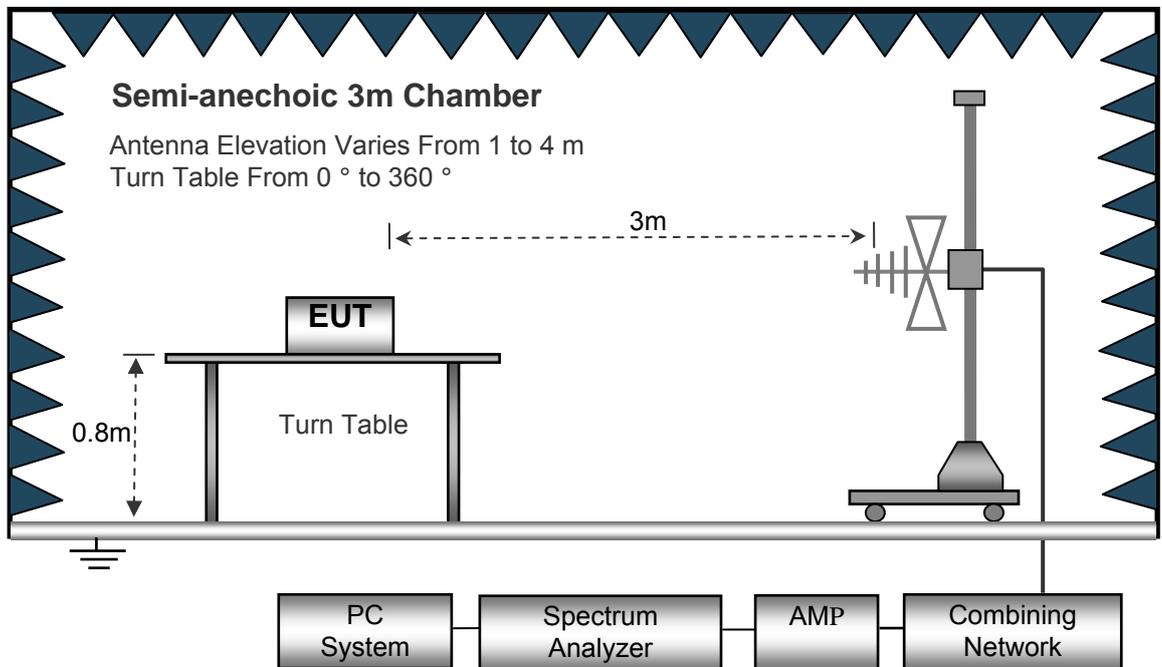

The test setup for emission measurement above 1 GHz.

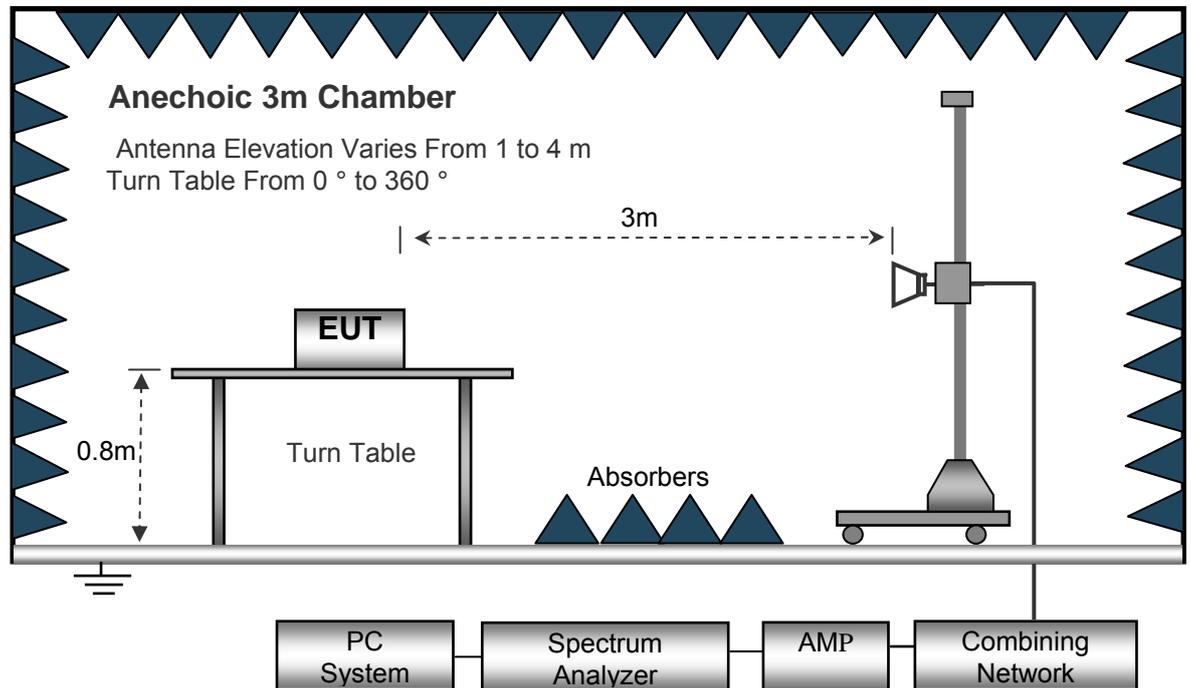

### 7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 10Hz

## 7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

## 7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 7.6 Summary of Test Results

**Wifi:**

**Test Frequency : 26MHz ~ 30MHz**

The measurements were more than 20 dB below the limit and not reported.

**Test Frequency : 30MHz ~ 18GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Low Channel 2412MHz									
203.45	41.05	QP	211	1.1	H	-11.62	29.43	43.50	-14.07
203.45	36.26	QP	277	1.7	V	-11.62	24.64	43.50	-18.86
4824.00	50.44	PK	359	1.4	V	-1.06	49.38	74.00	-24.62
4824.00	46.32	Ave	359	1.4	V	-1.06	45.26	54.00	-8.74
7236.00	41.08	PK	339	1.6	H	1.33	42.41	74.00	-31.59
7236.00	41.96	Ave	339	1.6	H	1.33	43.29	54.00	-10.71
2334.71	46.32	PK	185	1.8	V	-13.19	33.13	74.00	-40.87
2334.71	38.52	Ave	185	1.8	V	-13.19	25.33	54.00	-28.67
2369.36	44.49	PK	228	1.2	H	-13.14	31.35	74.00	-42.65
2369.36	37.11	Ave	228	1.2	H	-13.14	23.97	54.00	-30.03
2493.45	43.63	PK	46	1.7	V	-13.08	30.55	74.00	-43.45
2493.45	37.99	Ave	46	1.7	V	-13.08	24.91	54.00	-29.09

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Middle Channel 2437MHz									
203.45	40.72	QP	136	1.1	H	-11.62	29.10	43.50	-14.40
203.45	37.03	QP	126	1.7	V	-11.62	25.41	43.50	-18.09
4874.00	49.26	PK	199	1.6	V	-0.62	48.64	74.00	-25.36
4874.00	47.57	Ave	199	1.6	V	-0.62	46.95	54.00	-7.05
7311.00	41.61	PK	196	1.2	H	2.21	43.82	74.00	-30.18
7311.00	40.98	Ave	196	1.2	H	2.21	43.19	54.00	-10.81
2319.90	45.26	PK	155	1.2	V	-13.19	32.07	74.00	-41.93
2319.90	39.01	Ave	155	1.2	V	-13.19	25.82	54.00	-28.18
2379.51	42.06	PK	286	1.4	H	-13.14	28.92	74.00	-45.08
2379.51	36.58	Ave	286	1.4	H	-13.14	23.44	54.00	-30.56
2488.10	42.15	PK	14	1.3	V	-13.08	29.07	74.00	-44.93
2488.10	36.07	Ave	14	1.3	V	-13.08	22.99	54.00	-31.01

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: High Channel 2462MHz									
203.45	39.68	QP	12	1.8	H	-11.62	28.06	43.50	-15.44
203.45	36.93	QP	356	1.3	V	-11.62	25.31	43.50	-18.19
4924.00	49.23	PK	115	1.9	V	-0.24	48.99	74.00	-25.01
4924.00	46.72	Ave	115	1.9	V	-0.24	46.48	54.00	-7.52
7386.00	41.58	PK	288	1.5	H	2.84	44.42	74.00	-29.58
7386.00	41.38	Ave	288	1.5	H	2.84	44.22	54.00	-9.78
2333.08	46.28	PK	206	1.1	V	-13.19	33.09	74.00	-40.91
2333.08	37.55	Ave	206	1.1	V	-13.19	24.36	54.00	-29.64
2369.33	43.63	PK	11	1.7	H	-13.14	30.49	74.00	-43.51
2369.33	38.99	Ave	11	1.7	H	-13.14	25.85	54.00	-28.15
2495.98	43.58	PK	114	1.5	V	-13.08	30.50	74.00	-43.50
2495.98	37.71	Ave	114	1.5	V	-13.08	24.63	54.00	-29.37

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Low Channel 2412MHz									
203.45	40.18	QP	353	1.5	H	-11.62	28.56	43.50	-14.94
203.45	38.05	QP	59	1.2	V	-11.62	26.43	43.50	-17.07
4824.00	48.85	PK	289	1.5	V	-1.06	47.79	74.00	-26.21
4824.00	46.78	Ave	289	1.5	V	-1.06	45.72	54.00	-8.28
7236.00	41.96	PK	349	1.8	H	1.33	43.29	74.00	-30.71
7236.00	42.49	Ave	349	1.8	H	1.33	43.82	54.00	-10.18
2343.57	46.36	PK	128	1.8	V	-13.19	33.17	74.00	-40.83
2343.57	37.32	Ave	128	1.8	V	-13.19	24.13	54.00	-29.87
2386.63	42.42	PK	267	1.4	H	-13.14	29.28	74.00	-44.72
2386.63	38.42	Ave	267	1.4	H	-13.14	25.28	54.00	-28.72
2495.26	43.85	PK	172	1.4	V	-13.08	30.77	74.00	-43.23
2495.26	38.28	Ave	172	1.4	V	-13.08	25.20	54.00	-28.80

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: Middle Channel 2437MHz									
203.45	39.53	QP	312	1.3	H	-11.62	27.91	43.50	-15.59
203.45	39.21	QP	296	1.2	V	-11.62	27.59	43.50	-15.91
4874.00	49.61	PK	189	1.7	V	-0.62	48.99	74.00	-25.01
4874.00	47.30	Ave	189	1.7	V	-0.62	46.68	54.00	-7.32
7311.00	42.95	PK	28	1.5	H	2.21	45.16	74.00	-28.84
7311.00	42.09	Ave	28	1.5	H	2.21	44.30	54.00	-9.70
2341.35	46.22	PK	159	1.9	V	-13.19	33.03	74.00	-40.97
2341.35	37.35	Ave	159	1.9	V	-13.19	24.16	54.00	-29.84
2389.96	42.47	PK	176	1.5	H	-13.14	29.33	74.00	-44.67
2389.96	38.49	Ave	176	1.5	H	-13.14	25.35	54.00	-28.65
2488.92	44.19	PK	197	1.6	V	-13.08	31.11	74.00	-42.89
2488.92	37.22	Ave	197	1.6	V	-13.08	24.14	54.00	-29.86

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: High Channel 2462MHz									
203.45	39.92	QP	299	1.4	H	-11.62	28.30	43.50	-15.20
203.45	38.34	QP	139	1.2	V	-11.62	26.72	43.50	-16.78
4924.00	50.51	PK	125	1.2	V	-0.24	50.27	74.00	-23.73
4924.00	46.69	Ave	125	1.2	V	-0.24	46.45	54.00	-7.55
7386.00	43.93	PK	328	1.9	H	2.84	46.77	74.00	-27.23
7386.00	43.00	Ave	328	1.9	H	2.84	45.84	54.00	-8.16
2314.87	46.73	PK	304	1.2	V	-13.19	33.54	74.00	-40.46
2314.87	38.65	Ave	304	1.2	V	-13.19	25.46	54.00	-28.54
2362.37	42.62	PK	18	1.2	H	-13.14	29.48	74.00	-44.52
2362.37	37.35	Ave	18	1.2	H	-13.14	24.21	54.00	-29.79
2488.66	44.56	PK	22	1.3	V	-13.08	31.48	74.00	-42.52
2488.66	36.46	Ave	22	1.3	V	-13.08	23.38	54.00	-30.62

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
n20: Low Channel 2412MHz									
203.45	41.04	QP	41	1.6	H	-11.62	29.42	43.50	-14.08
203.45	39.82	QP	207	1.6	V	-11.62	28.20	43.50	-15.30
4824.00	50.64	PK	154	1.5	V	-1.06	49.58	74.00	-24.42
4824.00	45.97	Ave	154	1.5	V	-1.06	44.91	54.00	-9.09
7236.00	44.25	PK	321	1.8	H	1.33	45.58	74.00	-28.42
7236.00	42.53	Ave	321	1.8	H	1.33	43.86	54.00	-10.14
2342.21	46.69	PK	105	1.2	V	-13.19	33.50	74.00	-40.50
2342.21	37.42	Ave	105	1.2	V	-13.19	24.23	54.00	-29.77
2365.85	42.04	PK	225	1.6	H	-13.14	28.90	74.00	-45.10
2365.85	36.31	Ave	225	1.6	H	-13.14	23.17	54.00	-30.83
2486.86	43.69	PK	34	1.5	V	-13.08	30.61	74.00	-43.39
2486.86	36.04	Ave	34	1.5	V	-13.08	22.96	54.00	-31.04

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
n20: Middle Channel 2437MHz									
203.45	41.09	QP	10	1.0	H	-11.62	29.47	43.50	-14.03
203.45	39.75	QP	279	1.7	V	-11.62	28.13	43.50	-15.37
4874.00	52.09	PK	235	1.2	V	-0.62	51.47	74.00	-22.53
4874.00	44.50	Ave	235	1.2	V	-0.62	43.88	54.00	-10.12
7311.00	42.97	PK	224	1.5	H	2.21	45.18	74.00	-28.82
7311.00	41.14	Ave	224	1.5	H	2.21	43.35	54.00	-10.65
2346.64	46.51	PK	24	1.1	V	-13.19	33.32	74.00	-40.68
2346.64	38.86	Ave	24	1.1	V	-13.19	25.67	54.00	-28.33
2352.49	42.47	PK	312	1.9	H	-13.14	29.33	74.00	-44.67
2352.49	37.72	Ave	312	1.9	H	-13.14	24.58	54.00	-29.42
2498.97	43.80	PK	172	1.5	V	-13.08	30.72	74.00	-43.28
2498.97	38.84	Ave	172	1.5	V	-13.08	25.76	54.00	-28.24

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: High Channel 2462MHz									
203.45	41.81	QP	9	1.1	H	-11.62	30.19	43.50	-13.31
203.45	38.60	QP	125	1.9	V	-11.62	26.98	43.50	-16.52
4924.00	53.53	PK	170	1.2	V	-0.24	53.29	74.00	-20.71
4924.00	43.07	Ave	170	1.2	V	-0.24	42.83	54.00	-11.17
7386.00	41.79	PK	135	1.2	H	2.84	44.63	74.00	-29.37
7386.00	40.89	Ave	135	1.2	H	2.84	43.73	54.00	-10.27
2338.63	46.00	PK	135	1.9	V	-13.19	32.81	74.00	-41.19
2338.63	37.33	Ave	135	1.9	V	-13.19	24.14	54.00	-29.86
2380.25	42.93	PK	69	1.6	H	-13.14	29.79	74.00	-44.21
2380.25	38.23	Ave	69	1.6	H	-13.14	25.09	54.00	-28.91
2487.20	42.44	PK	349	1.4	V	-13.08	29.36	74.00	-44.64
2487.20	37.82	Ave	349	1.4	V	-13.08	24.74	54.00	-29.26

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
n40: Low Channel 2422MHz									
203.45	40.69	QP	244	1.9	H	-11.62	29.07	43.50	-14.43
203.45	38.44	QP	209	1.1	V	-11.62	26.82	43.50	-16.68
4844.00	51.22	PK	20	1.9	V	-1.06	50.16	74.00	-23.84
4844.00	41.97	Ave	20	1.9	V	-1.06	40.91	54.00	-13.09
7266.00	39.47	PK	266	2.0	H	1.33	40.80	74.00	-33.20
7266.00	38.32	Ave	266	2.0	H	1.33	39.65	54.00	-14.35
2320.20	46.33	PK	236	1.1	V	-13.19	33.14	74.00	-40.86
2320.20	37.52	Ave	236	1.1	V	-13.19	24.33	54.00	-29.67
2370.72	42.15	PK	255	1.7	H	-13.14	29.01	74.00	-44.99
2370.72	37.24	Ave	255	1.7	H	-13.14	24.10	54.00	-29.90
2491.02	43.76	PK	124	1.9	V	-13.08	30.68	74.00	-43.32
2491.02	37.90	Ave	124	1.9	V	-13.08	24.82	54.00	-29.18

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n40: Middle Channel 2437MHz									
203.45	40.88	QP	35	1.4	H	-11.62	29.26	43.50	-14.24
203.45	38.96	QP	51	1.8	V	-11.62	27.34	43.50	-16.16
4874.00	51.50	PK	324	1.5	V	-0.62	50.88	74.00	-23.12
4874.00	41.86	Ave	324	1.5	V	-0.62	41.24	54.00	-12.76
7311.00	39.06	PK	10	1.1	H	2.21	41.27	74.00	-32.73
7311.00	37.89	Ave	10	1.1	H	2.21	40.10	54.00	-13.90
2334.99	46.52	PK	251	1.1	V	-13.19	33.33	74.00	-40.67
2334.99	39.58	Ave	251	1.1	V	-13.19	26.39	54.00	-27.61
2353.54	42.26	PK	259	1.2	H	-13.14	29.12	74.00	-44.88
2353.54	36.72	Ave	259	1.2	H	-13.14	23.58	54.00	-30.42
2496.12	43.66	PK	51	1.2	V	-13.08	30.58	74.00	-43.42
2496.12	38.00	Ave	51	1.2	V	-13.08	24.92	54.00	-29.08

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n40: High Channel 2452MHz									
203.45	40.28	QP	64	1.8	H	-11.62	28.66	43.50	-14.84
203.45	37.97	QP	258	1.8	V	-11.62	26.35	43.50	-17.15
4904.00	51.40	PK	138	1.7	V	-0.24	51.16	74.00	-22.84
4904.00	41.05	Ave	138	1.7	V	-0.24	40.81	54.00	-13.19
7356.00	38.92	PK	87	1.9	H	2.84	41.76	74.00	-32.24
7356.00	37.92	Ave	87	1.9	H	2.84	40.76	54.00	-13.24
2323.75	45.92	PK	257	1.0	V	-13.19	32.73	74.00	-41.27
2323.75	38.95	Ave	257	1.0	V	-13.19	25.76	54.00	-28.24
2388.61	42.99	PK	143	1.9	H	-13.14	29.85	74.00	-44.15
2388.61	38.87	Ave	143	1.9	H	-13.14	25.73	54.00	-28.27
2485.68	44.57	PK	65	1.1	V	-13.08	31.49	74.00	-42.51
2485.68	37.09	Ave	65	1.1	V	-13.08	24.01	54.00	-29.99

**Test Frequency: 18GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

**BT BLE:****Test Frequency : 26MHz ~ 30MHz**

The measurements were more than 20 dB below the limit and not reported.

**Test Frequency : 30MHz ~ 18GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
Low Channel 2402MHz									
253.36	38.23	QP	129	1.7	H	-13.35	24.88	46.00	-21.12
253.36	42.36	QP	343	1.7	V	-13.35	29.01	46.00	-16.99
4804.00	44.21	PK	329	1.2	V	-1.06	43.15	74.00	-30.85
4804.00	40.06	Ave	329	1.2	V	-1.06	39.00	54.00	-15.00
7206.00	43.75	PK	72	1.1	H	1.33	45.08	74.00	-28.92
7206.00	36.84	Ave	72	1.1	H	1.33	38.17	54.00	-15.83
2342.37	46.84	PK	233	2.0	V	-13.19	33.65	74.00	-40.35
2342.37	39.92	Ave	233	2.0	V	-13.19	26.73	54.00	-27.27
2366.55	43.34	PK	65	1.9	H	-13.14	30.20	74.00	-43.80
2366.55	36.72	Ave	65	1.9	H	-13.14	23.58	54.00	-30.42
2497.76	42.66	PK	325	1.9	V	-13.08	29.58	74.00	-44.42
2497.76	36.38	Ave	325	1.9	V	-13.08	23.30	54.00	-30.70

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
Middle Channel 2440MHz									
253.36	37.60	QP	227	1.2	H	-13.35	24.25	46.00	-21.75
253.36	43.19	QP	49	1.9	V	-13.35	29.84	46.00	-16.16
4880.00	43.10	PK	329	1.3	V	-0.62	42.48	74.00	-31.52
4880.00	38.61	Ave	329	1.3	V	-0.62	37.99	54.00	-16.01

7320.00	43.34	PK	39	1.2	H	2.21	45.55	74.00	-28.45
7320.00	35.80	Ave	39	1.2	H	2.21	38.01	54.00	-15.99
2342.68	46.26	PK	312	1.3	V	-13.19	33.07	74.00	-40.93
2342.68	38.93	Ave	312	1.3	V	-13.19	25.74	54.00	-28.26
2383.20	43.48	PK	335	1.7	H	-13.14	30.34	74.00	-43.66
2383.20	38.86	Ave	335	1.7	H	-13.14	25.72	54.00	-28.28
2496.97	43.81	PK	338	1.7	V	-13.08	30.73	74.00	-43.27
2496.97	38.50	Ave	338	1.7	V	-13.08	25.42	54.00	-28.58

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
High Channel 2480MHz									
253.36	38.79	QP	203	2.0	H	-13.35	25.44	46.00	-20.56
253.36	43.11	QP	133	1.5	V	-13.35	29.76	46.00	-16.24
4960.00	43.33	PK	249	1.8	V	-0.24	43.09	74.00	-30.91
4960.00	39.79	Ave	249	1.8	V	-0.24	39.55	54.00	-14.45
7440.00	43.98	PK	12	1.2	H	2.84	46.82	74.00	-27.18
7440.00	36.36	Ave	12	1.2	H	2.84	39.20	54.00	-14.80
2315.70	45.70	PK	8	1.8	V	-13.19	32.51	74.00	-41.49
2315.70	37.59	Ave	8	1.8	V	-13.19	24.40	54.00	-29.60
2358.11	43.17	PK	127	1.0	H	-13.14	30.03	74.00	-43.97
2358.11	36.95	Ave	127	1.0	H	-13.14	23.81	54.00	-30.19
2494.93	44.73	PK	107	1.3	V	-13.08	31.65	74.00	-42.35
2494.93	38.43	Ave	107	1.3	V	-13.08	25.35	54.00	-28.65

**Test Frequency: 18GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported

## 8 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 2.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:  
RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold

## 2.2 Test Result

802.11b

Low Channel

Fundamental



Middle Channel

Fundamental



High Channel

Fundamental



802.11g

Low Channel

Fundamental



Middle Channel

Fundamental



High Channel

Fundamental



802.11n HT20

Low Channel

Fundamental



Middle Channel

Fundamental



High Channel

Fundamental



802.11n HT40

Low Channel

Fundamental



Middle Channel

Fundamental



High Channel

Fundamental



BEL GFSK

Low Channel

Fundamental



Middle Channel

Fundamental



High Channel

Fundamental



## 9 Band Edge Measurement



Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	KDB 558074 D01 DTS Meas Guidance v03r03 06/09/2015
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

### 9.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

## 9.2 Test Result


Test result plots shown as follows:

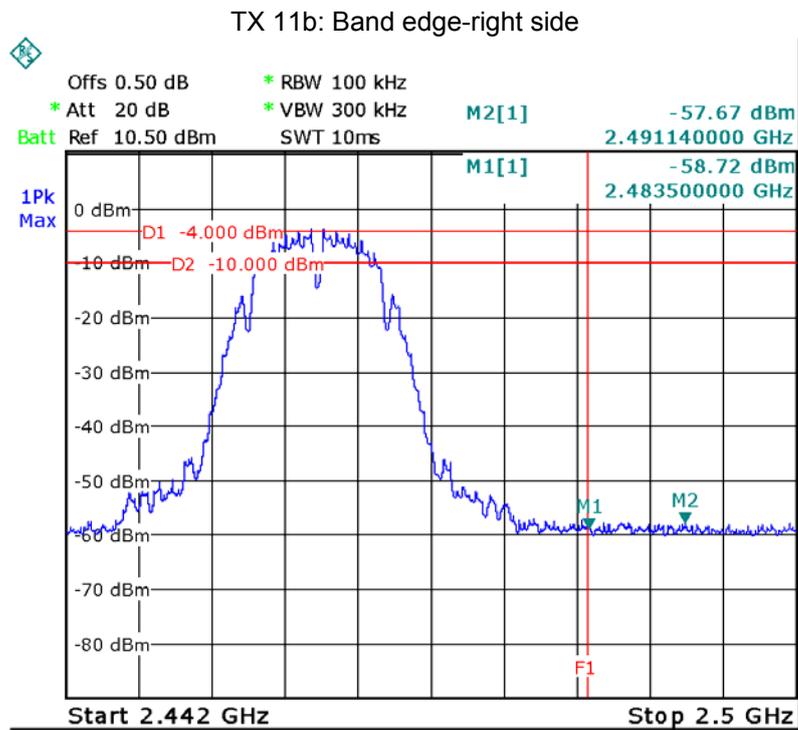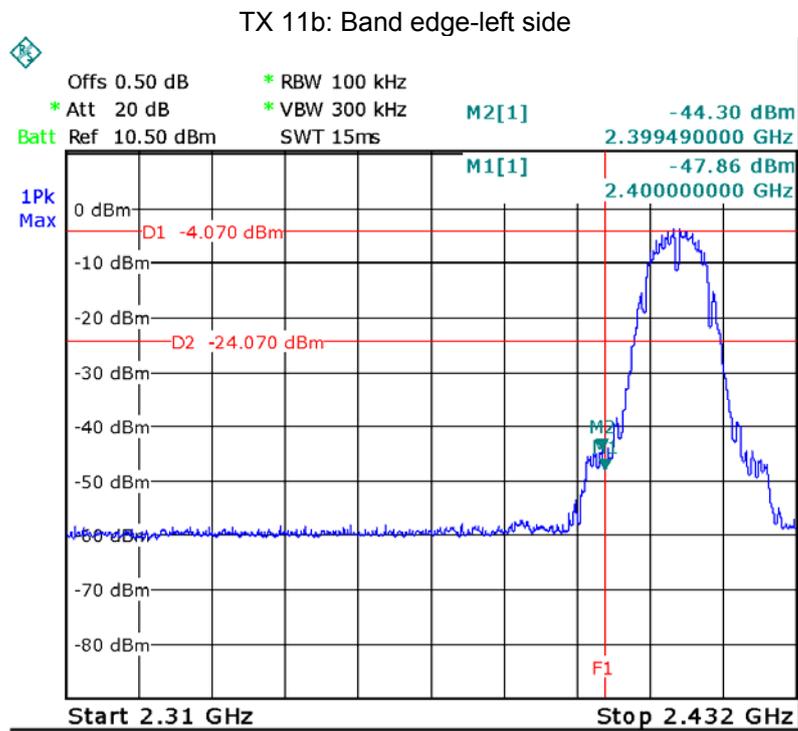


TX 11g: Band edge-left side

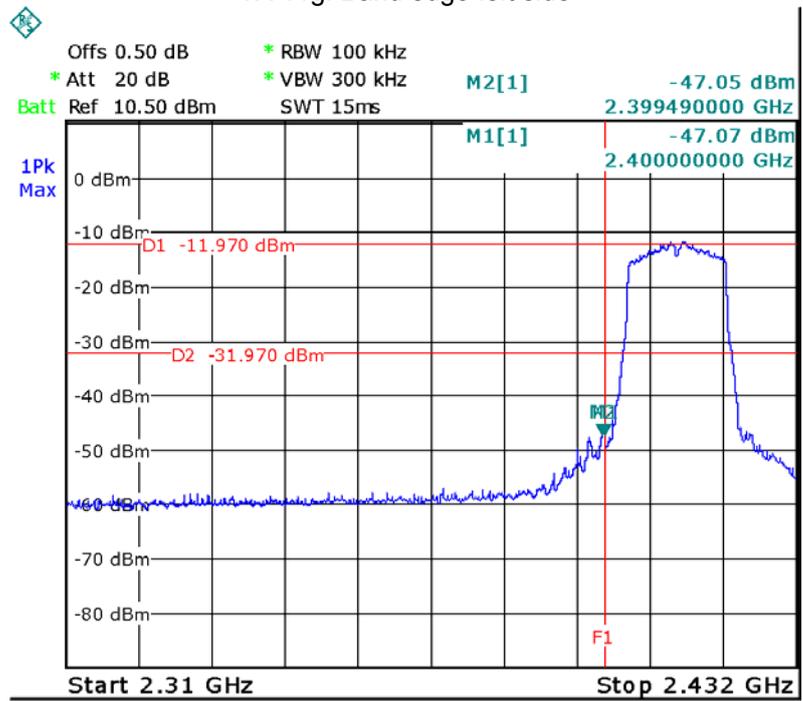


TX 11g: Band edge-right side

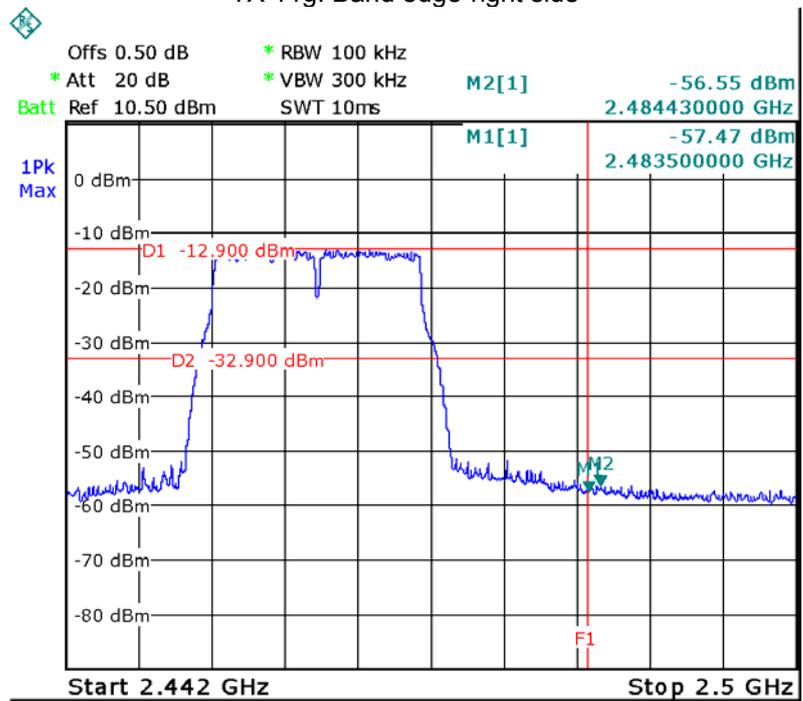


TX 11n HT20: Band edge-left side

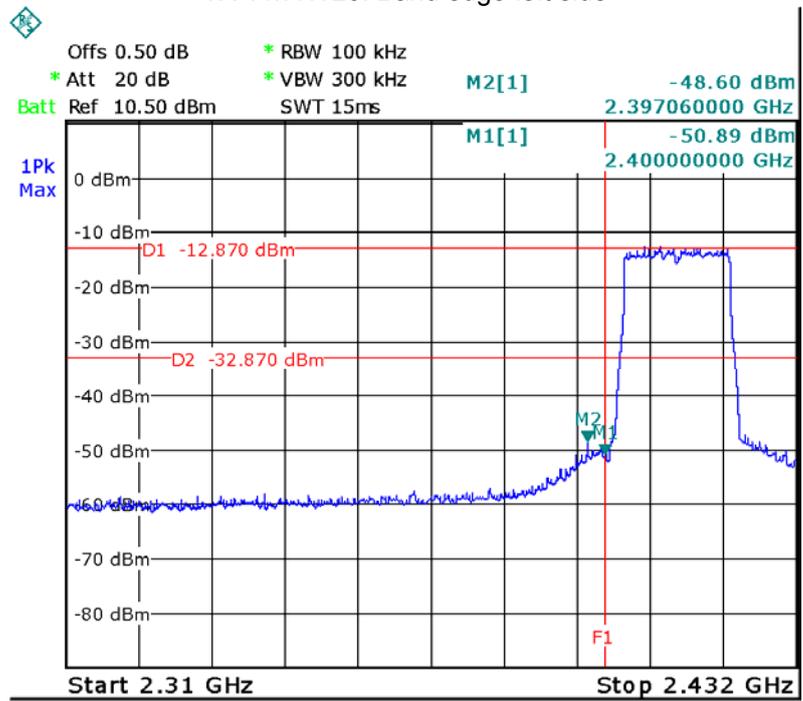


TX 11n HT20: Band edge-right side

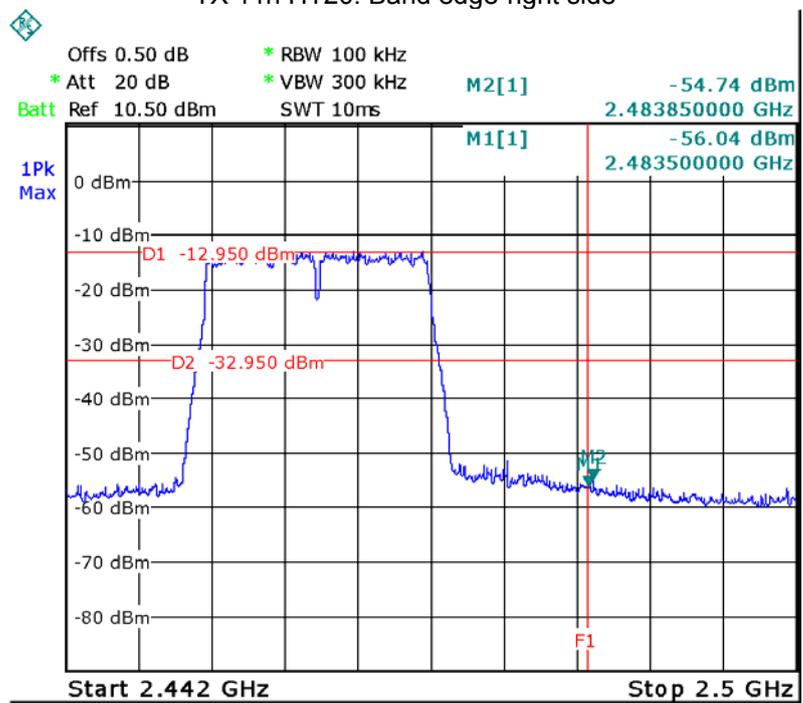


TX 11n HT40: Band edge-left side

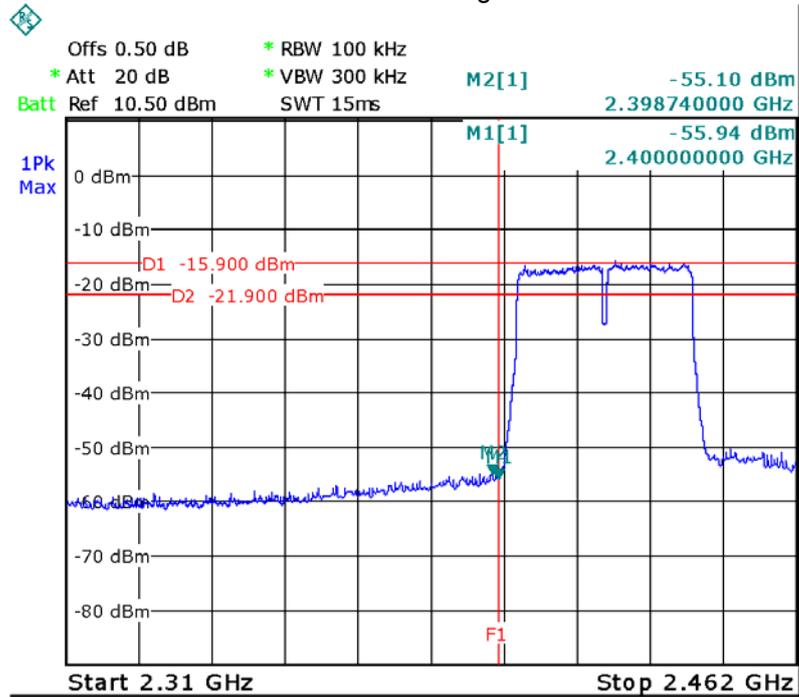


TX 11n HT40: Band edge-right side

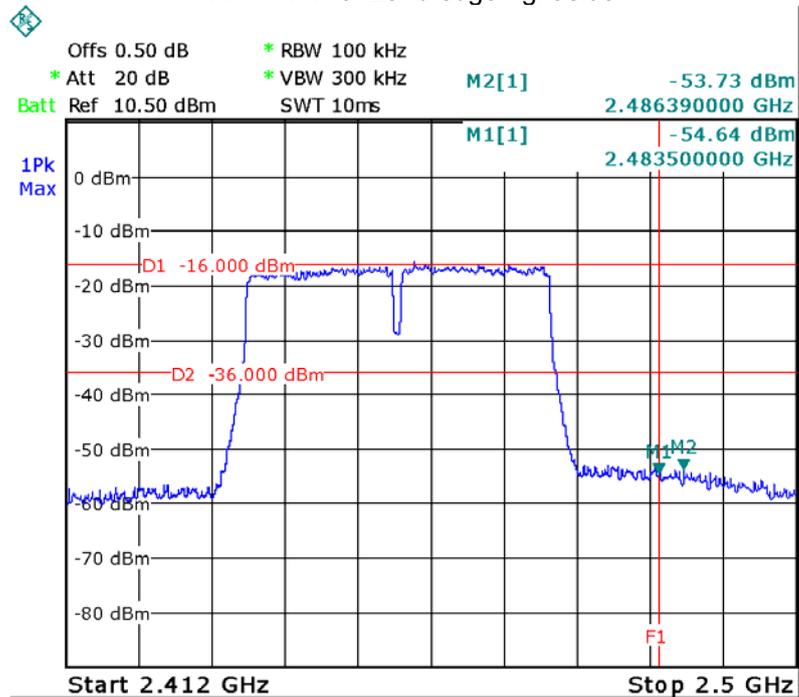

### TX BLE: Band edge-left side

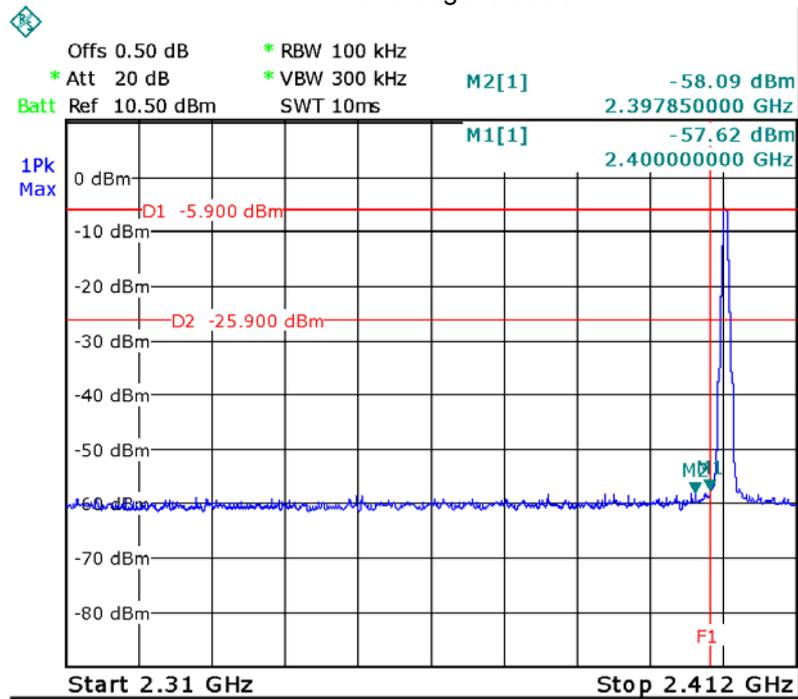

### TX BLE: Band edge-right side

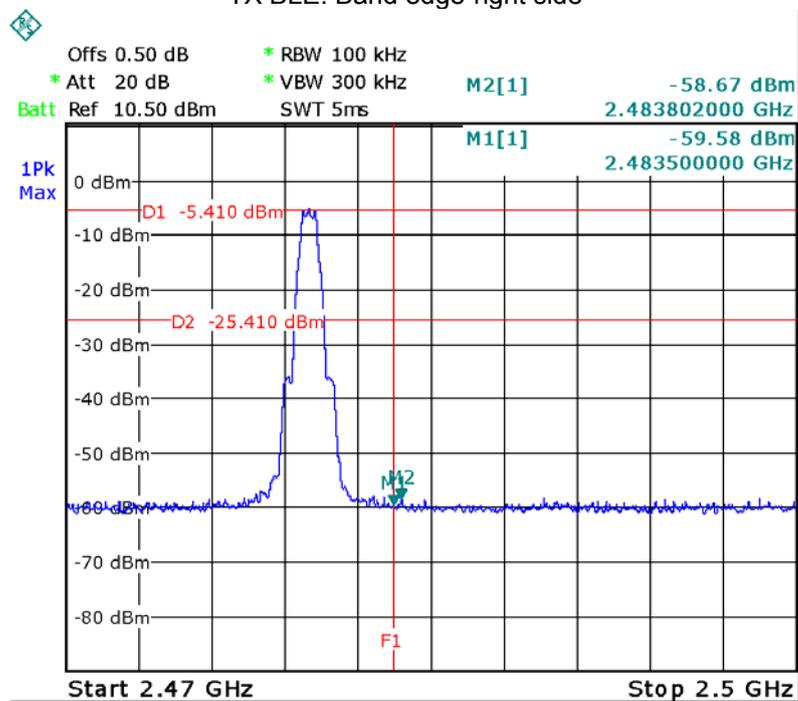

## 10 6 dB Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB 558074 D01 DTS Meas Guidance v03r03 06/09/2015



### 10.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz



### 10.2 Test Result:



Operation mode	Bandwidth (MHz)		
	Channel 1	Channel 6	Channel 11
TX 11b	Channel 1	Channel 6	Channel 11
	9.517	9.517	9.517
TX 11g	Channel 1	Channel 6	Channel 11
	16.467	16.567	16.567
TX 11n HT20	Channel 1	Channel 6	Channel 11
	17.784	17.784	17.784
TX 11n HT40	Channel 3	Channel 6	Channel 9
	36.560	36.560	36.560
BT BLE	Channel 0	Channel 19	Channel 39
	0.659	0.659	0.659



Test result plot as follows:

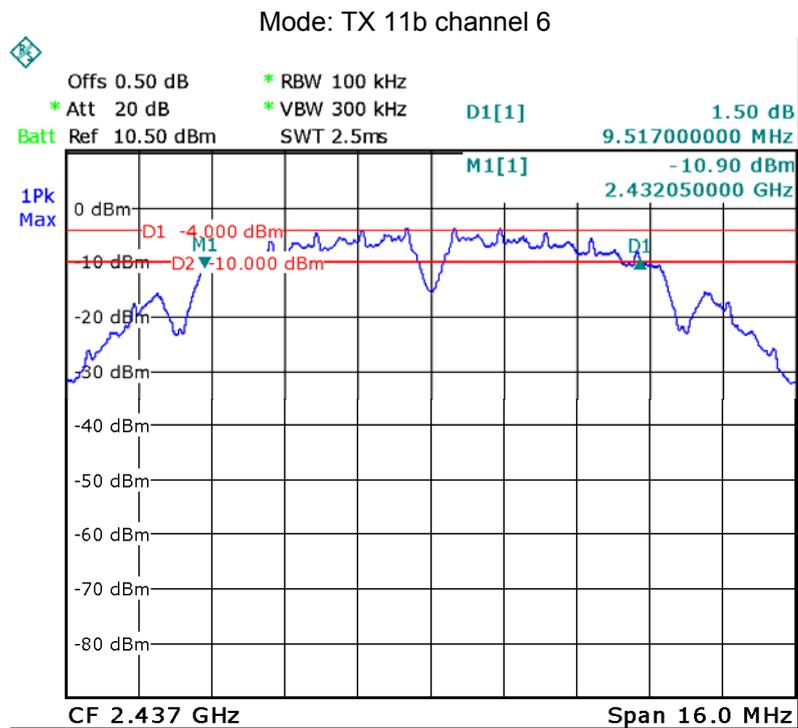
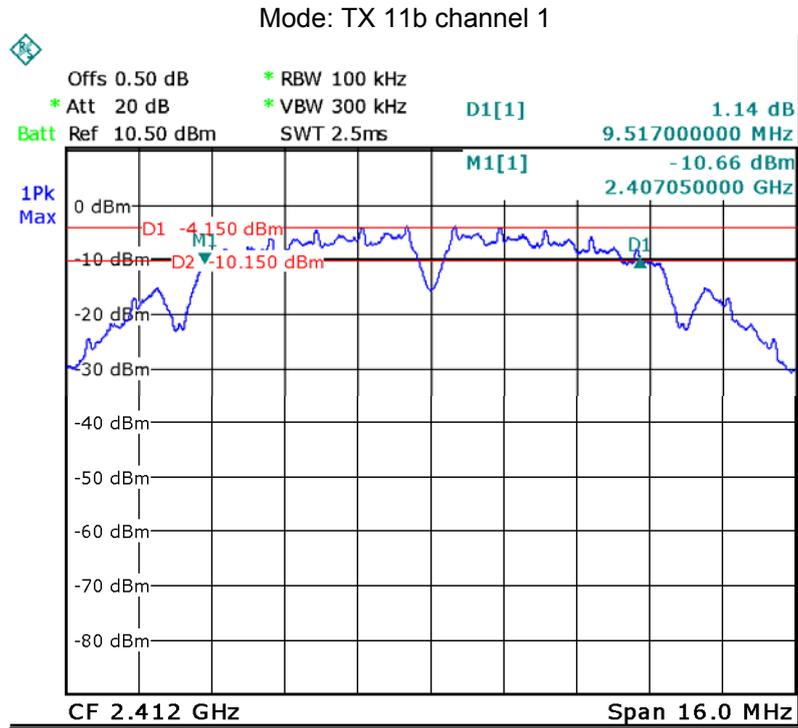


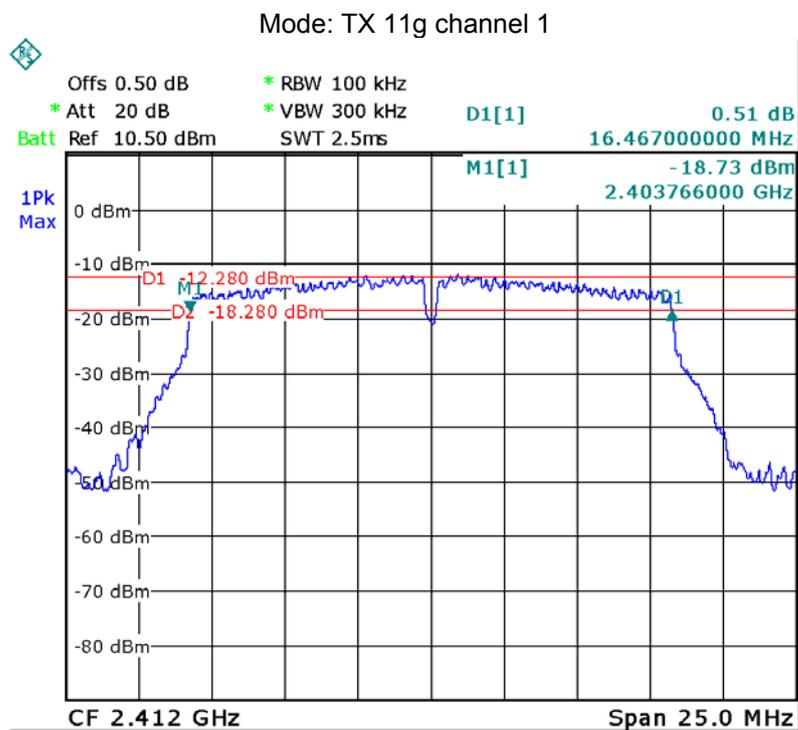
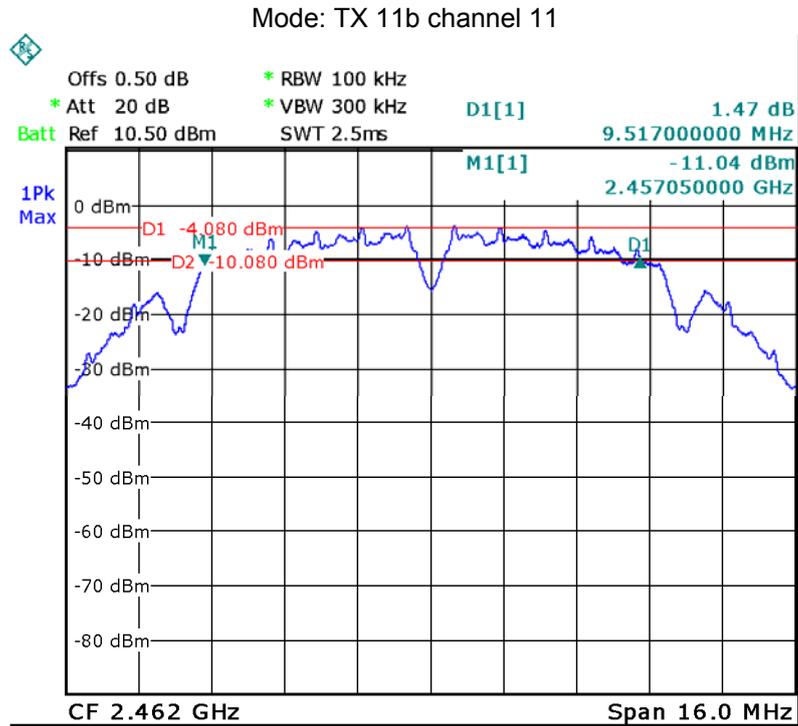


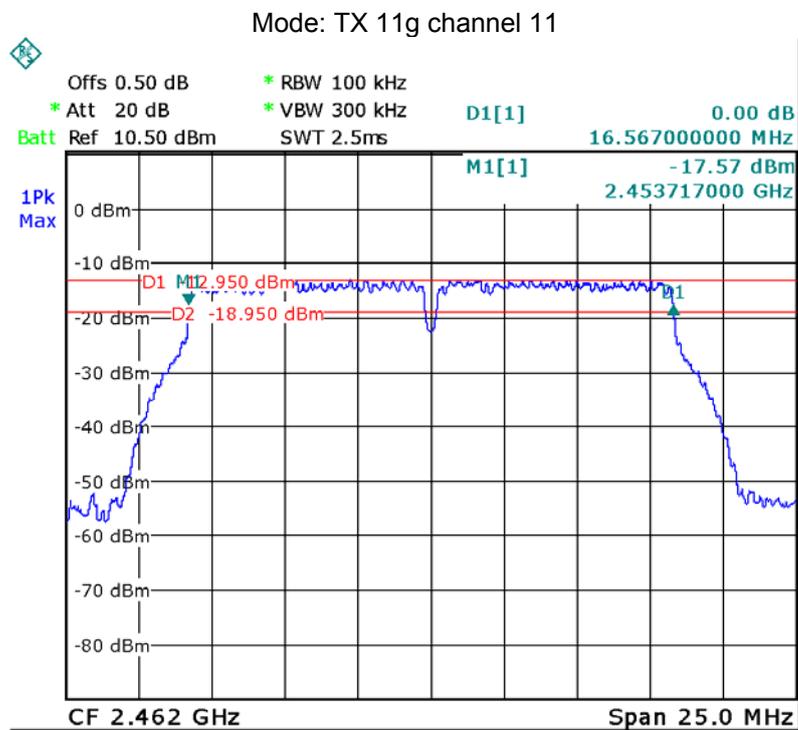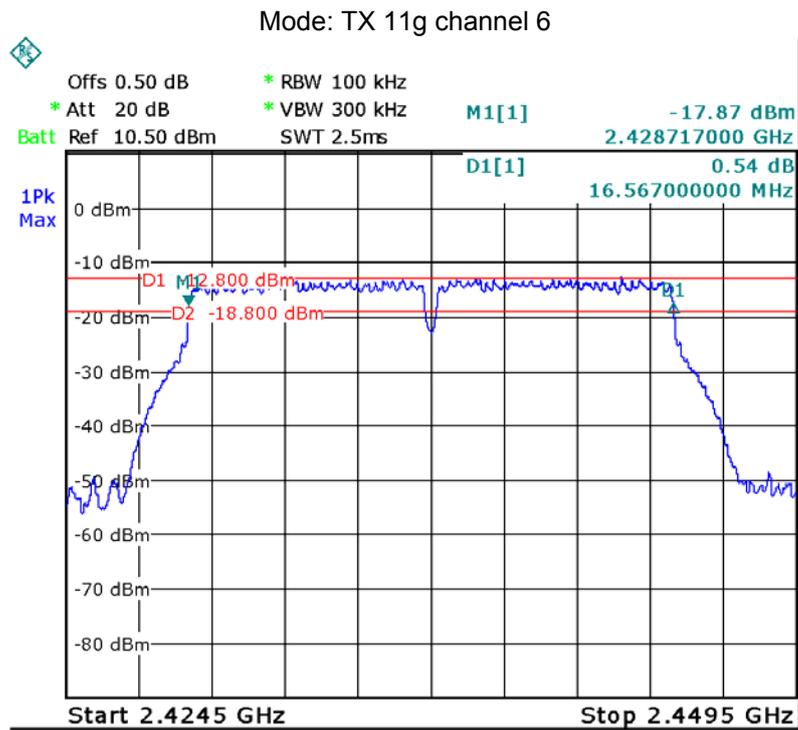


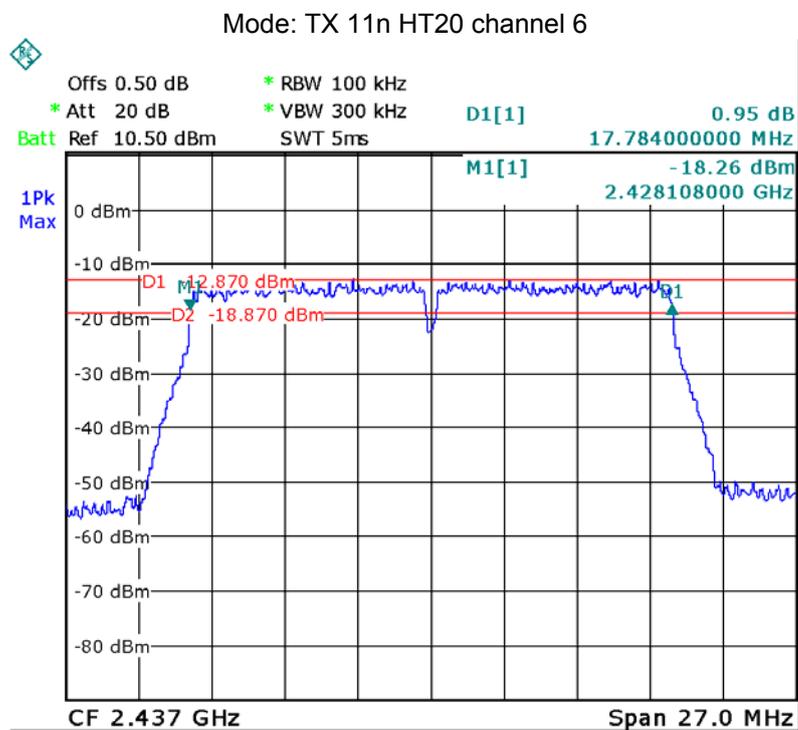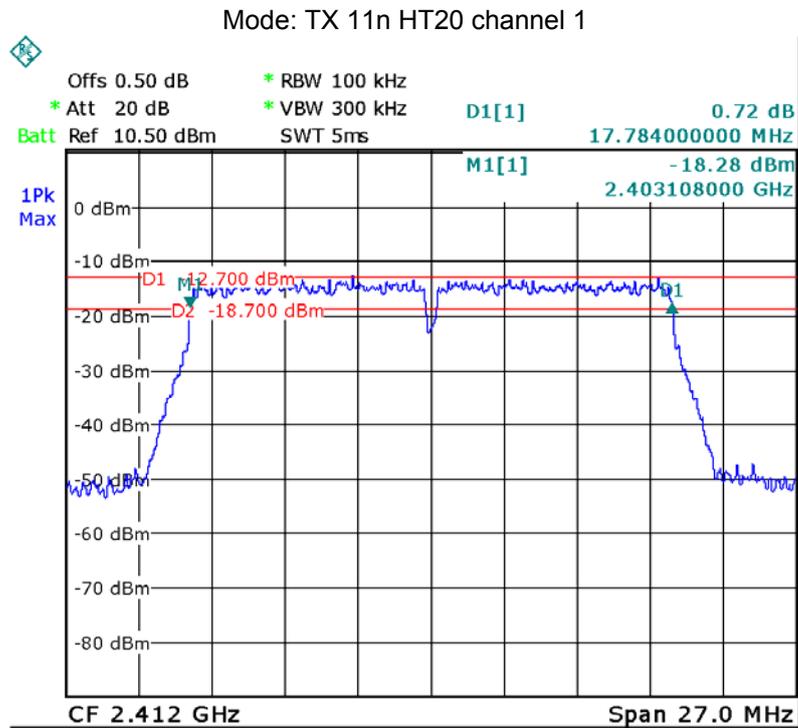

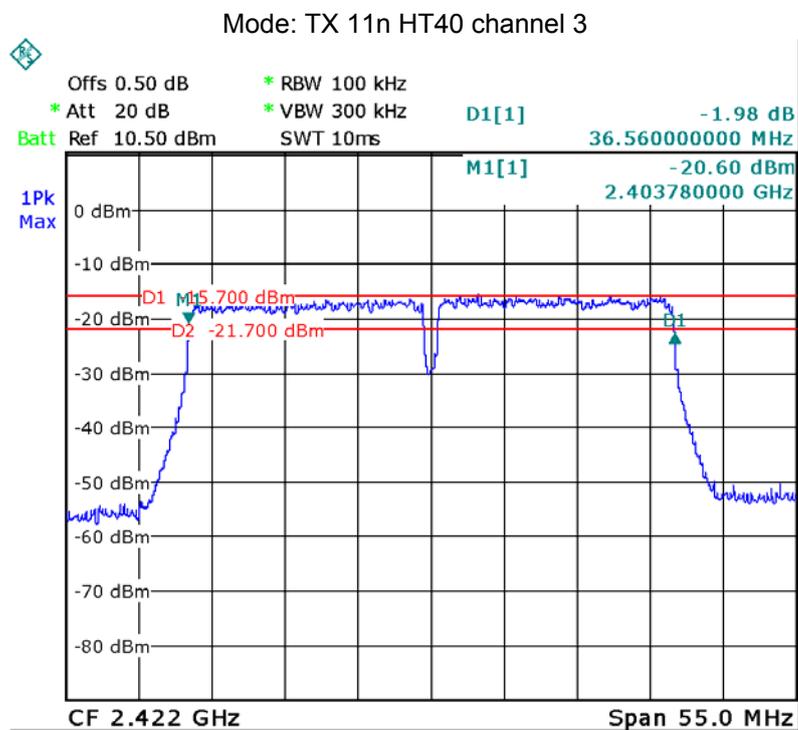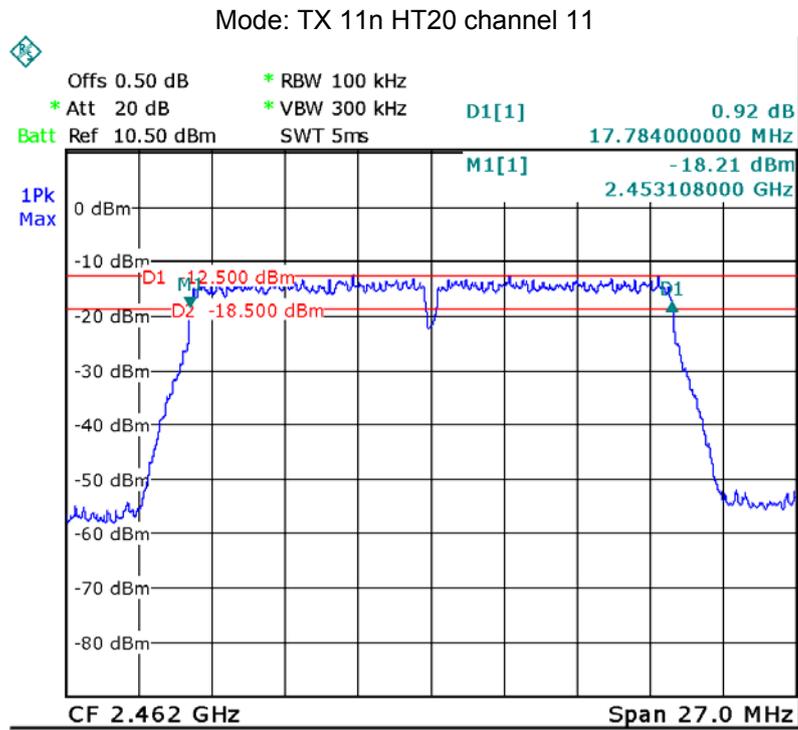

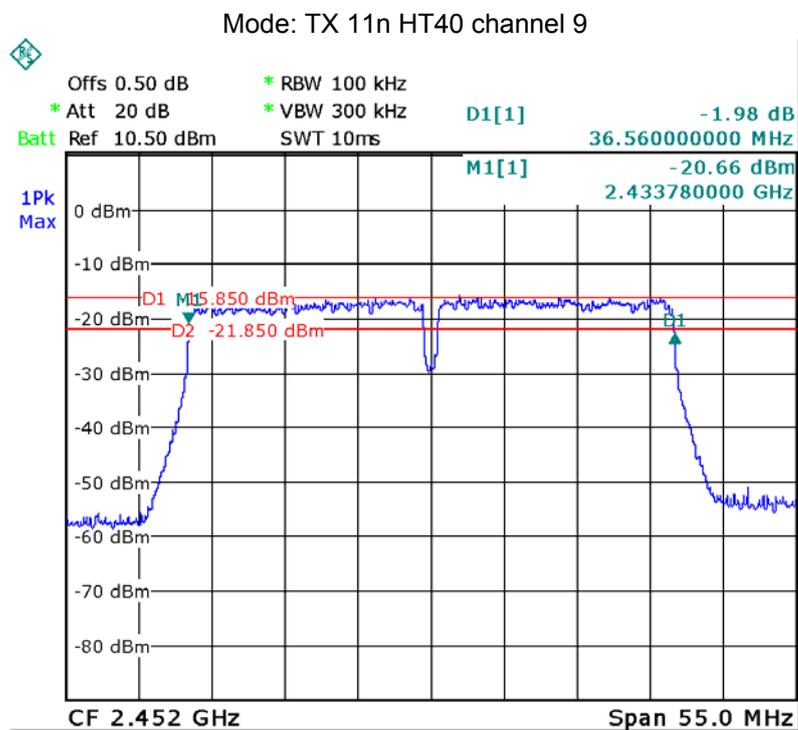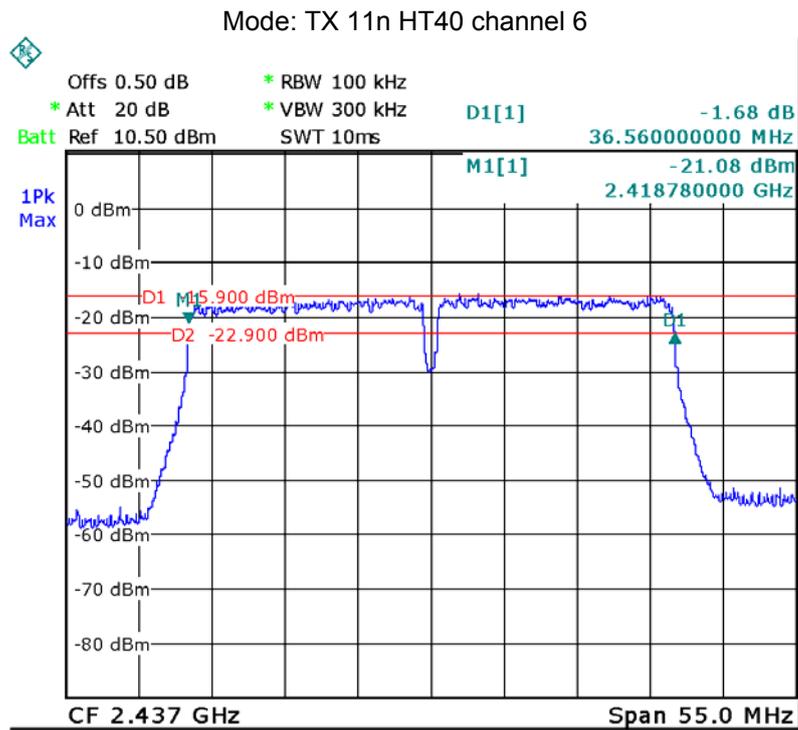

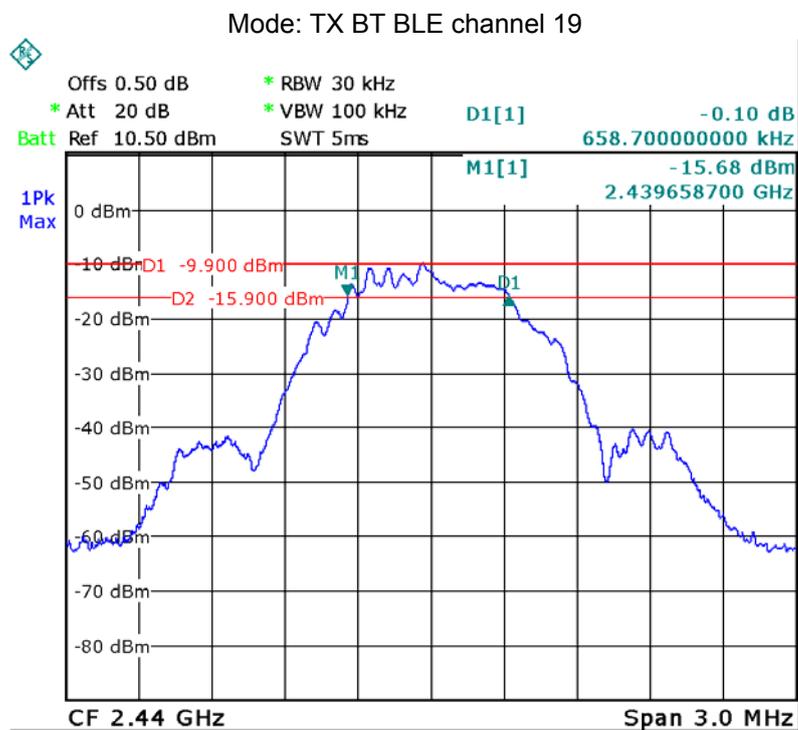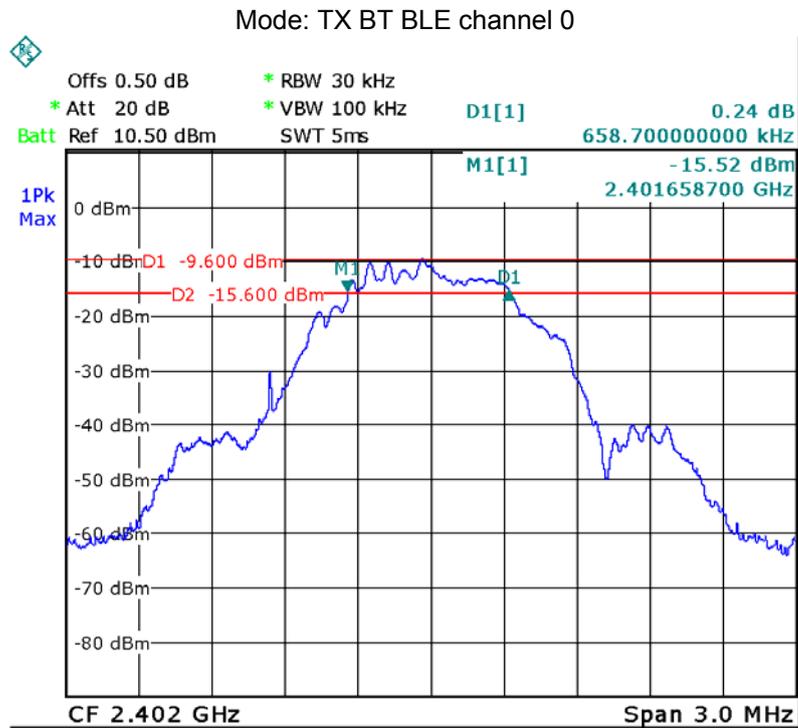

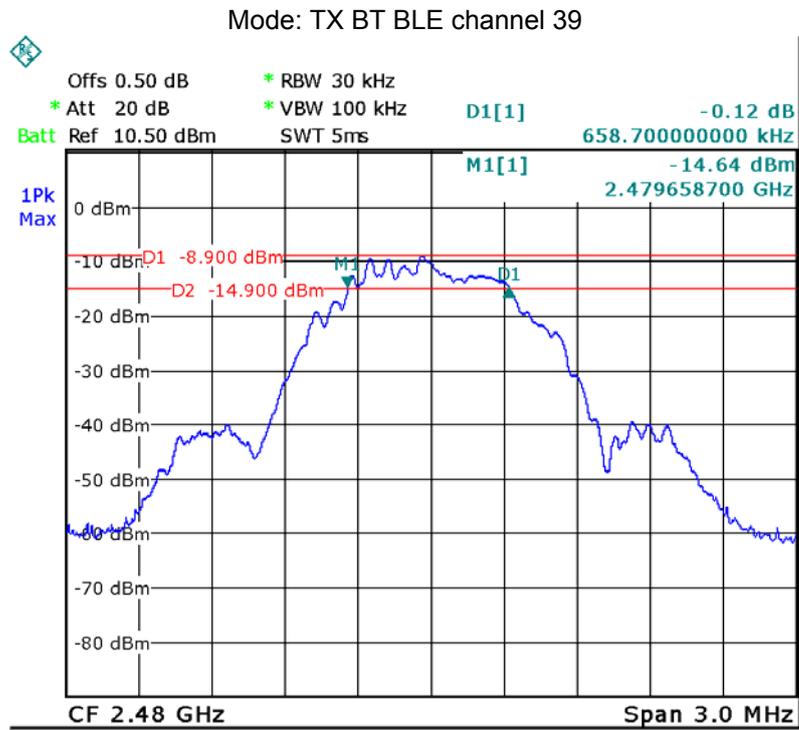

## 11 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB 558074 D01 DTS Meas Guidance v03r03 06/09/2015

### 11.1 Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r03 06/09/2015

section 9.1.1

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW = DTS bandwidth.
- b) Set VBW = 3 × RBW.
- c) Set span = 3 × RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 9.1.2

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- a) Set the RBW = 1 MHz.
- b) Set the VBW = 3 × RBW
- c) Set the span = 1.5 × DTS bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

**11.2 Test Result:**

Test mode :TX 11b		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.06	9.44	9.07
Limit: 1W/30dBm		
1W/30dBm		


Test mode :TX 11g		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.18	9.33	9.37
Limit		
1W/30dBm		

Test mode :TX 11n HT20		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.13	9.34	9.35
Limit		
1W/30dBm		


Test mode : TX 11n HT40		
10 Maximum Peak Output Power (dBm)		
2422MHz	2437MHz	2452MHz
9.10	9.29	9.27
Limit		
1W/30dBm		

Test mode : TX BT BLE		
10 Maximum Peak Output Power (dBm)		
2402MHz	2440MHz	2480MHz
-5.03	-5.57	-4.51
Limit		
1W/30dBm		


Mode: TX 11b channel 1

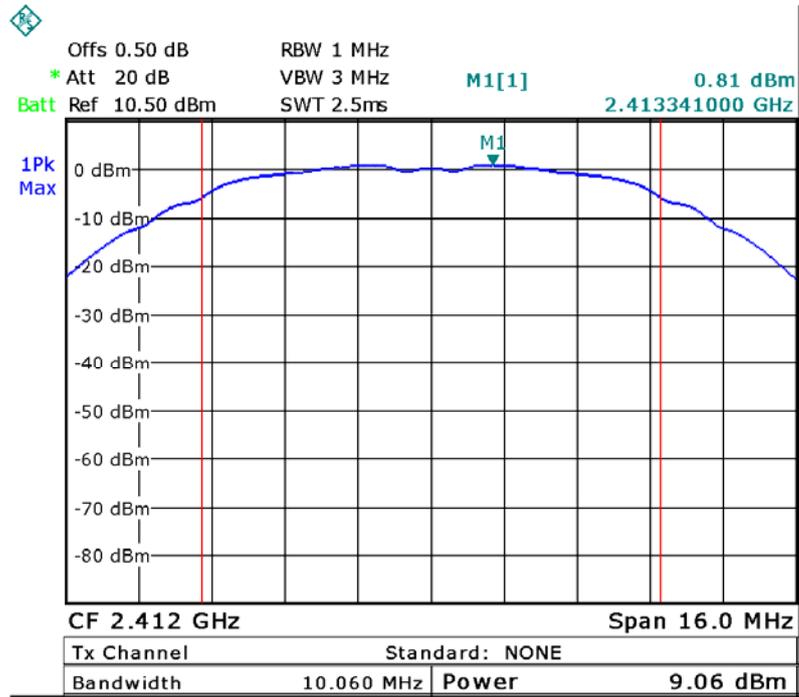


Mode: TX 11b channel 6


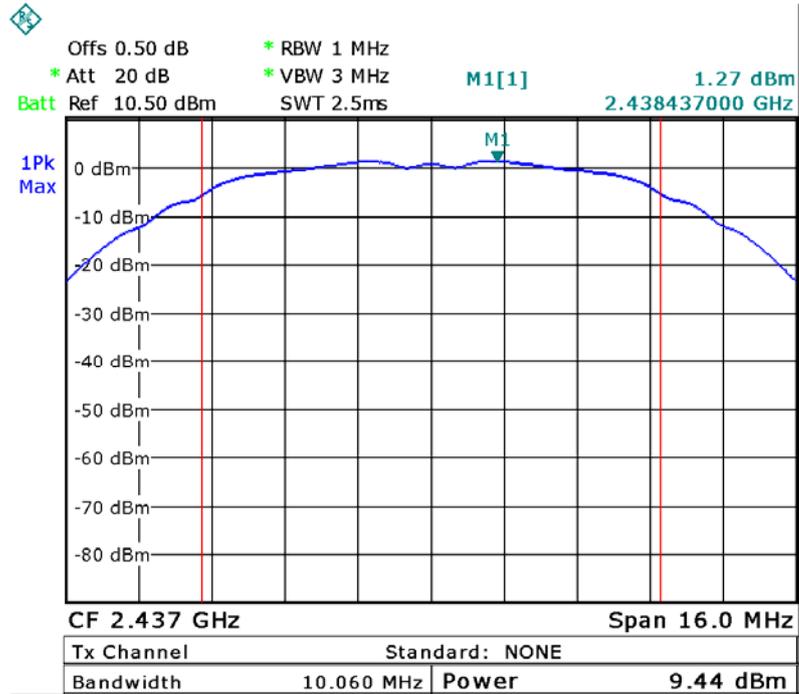


Mode: TX 11b channel 11

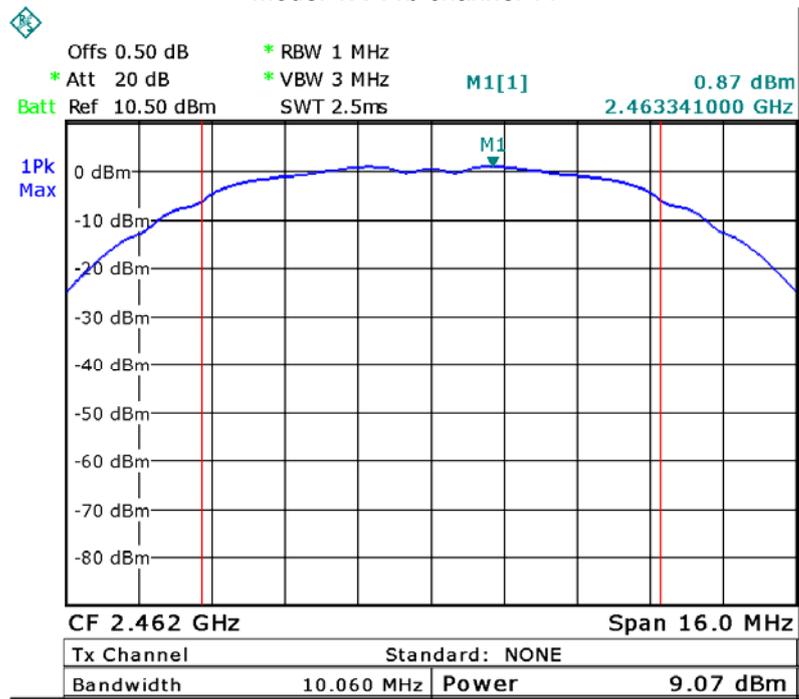


Mode :TX 11g channel 1

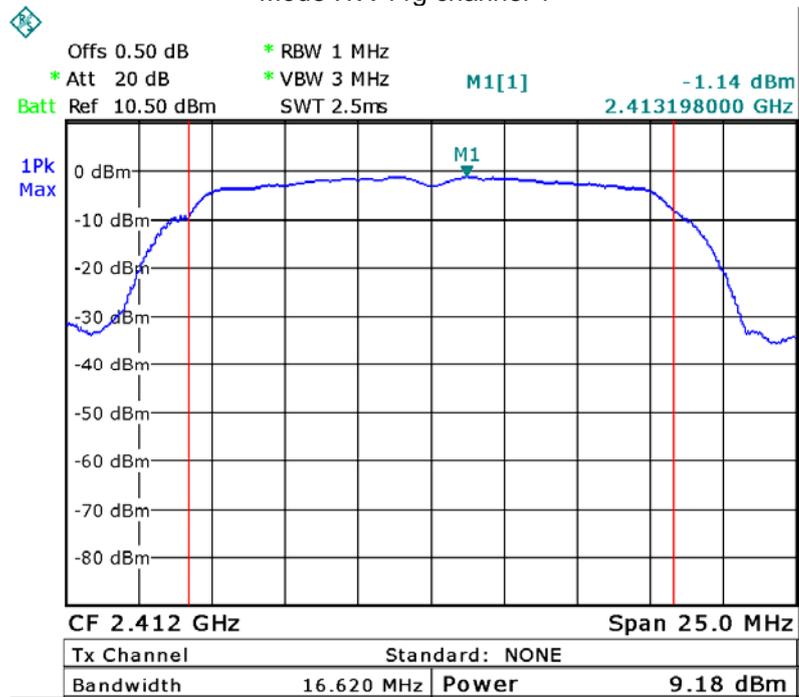


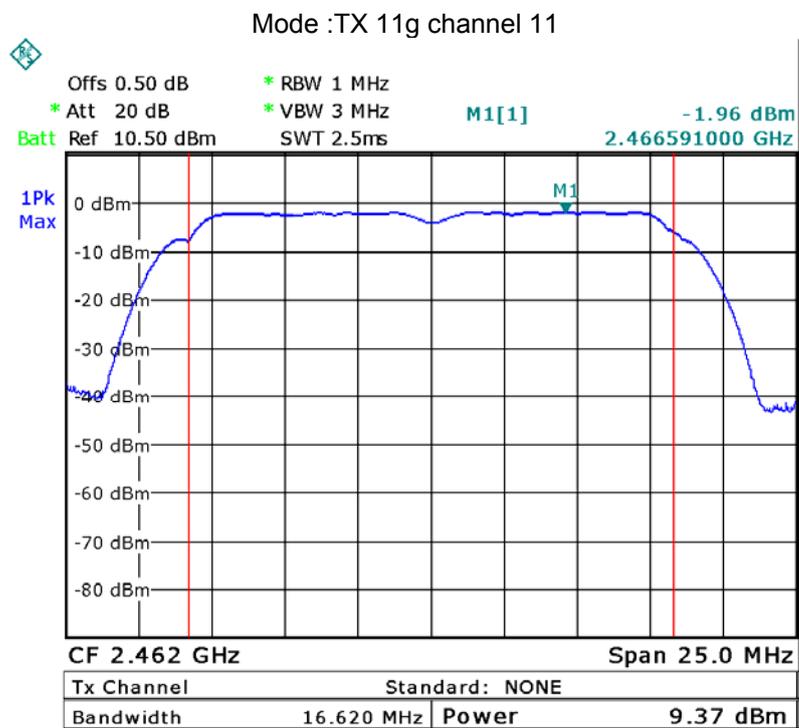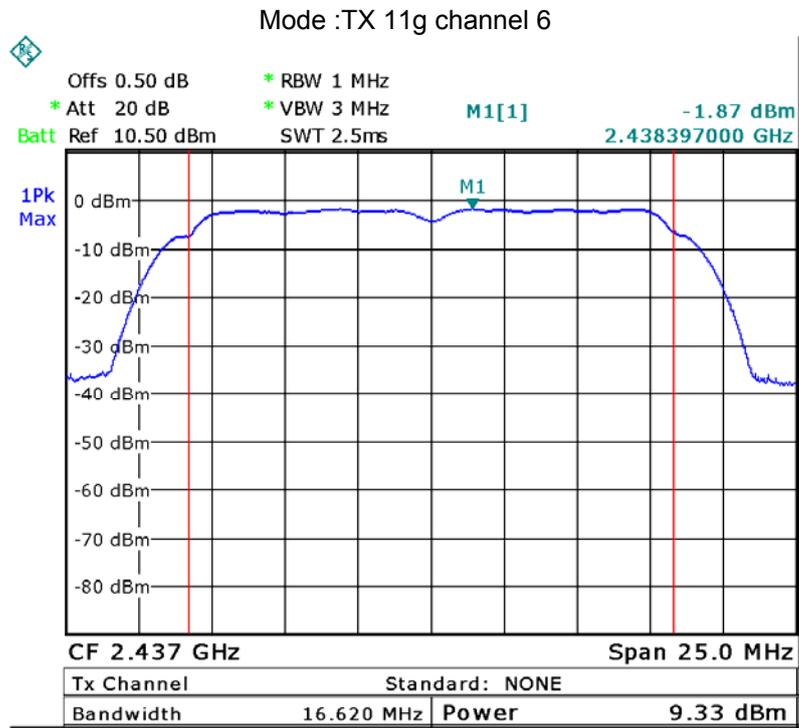


Mode: TX 11n HT20 channel 1

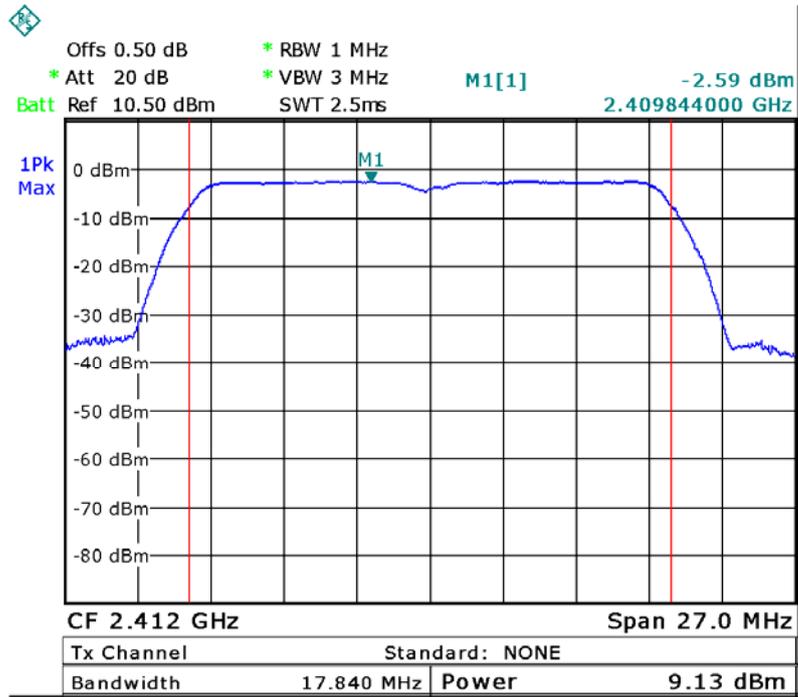


Mode: TX 11n HT20 channel 6

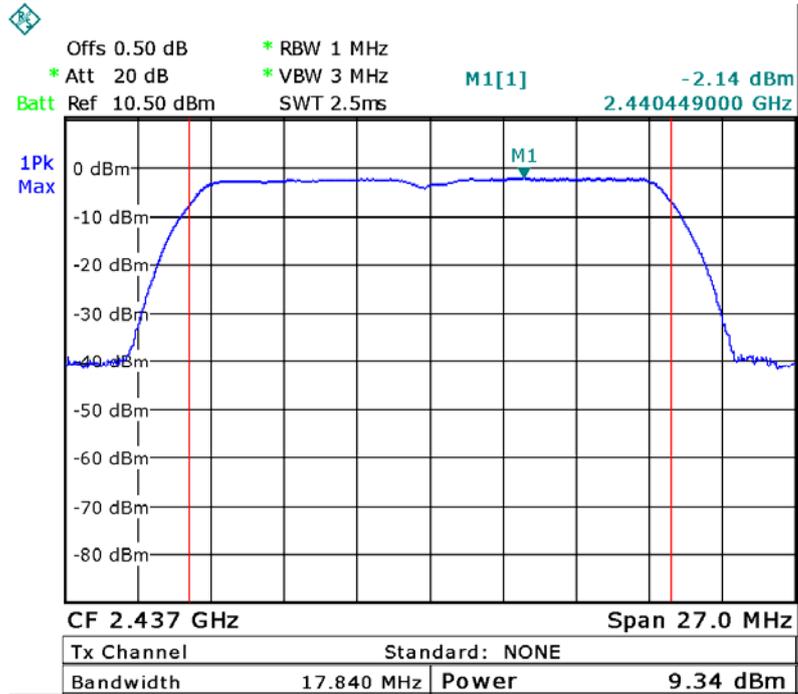


Mode: TX 11n HT20 channel 11

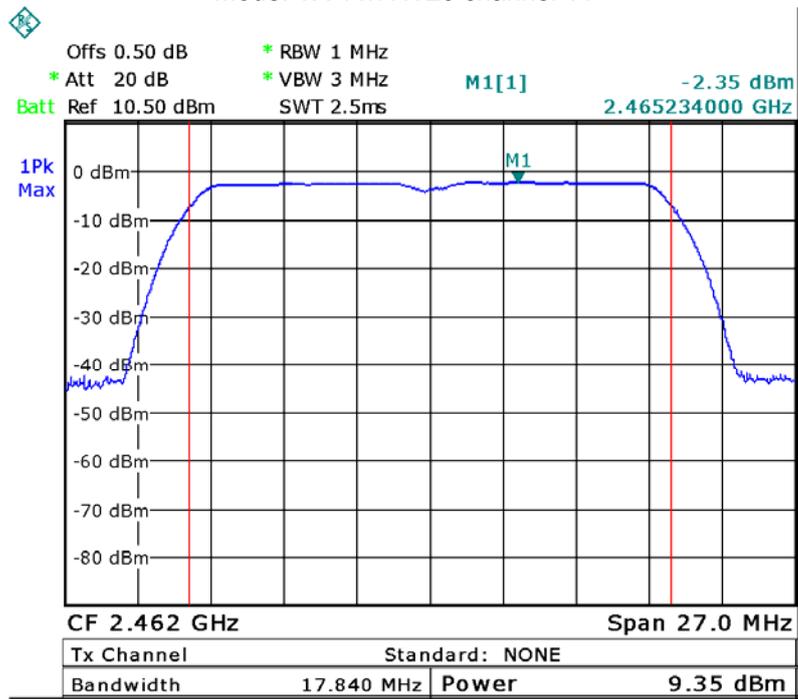


Mode: TX 11n HT40 channel 3


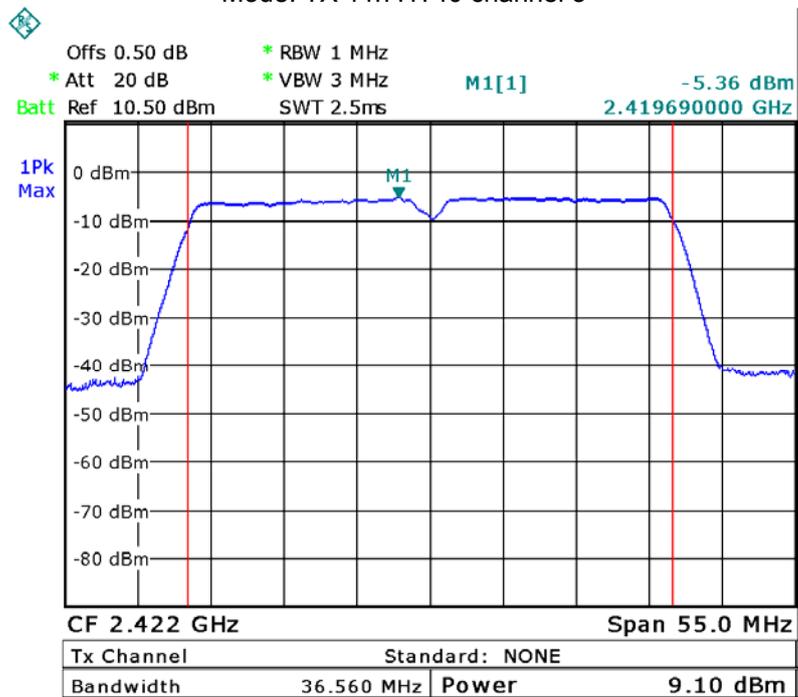



Mode: TX 11n HT40 channel 6

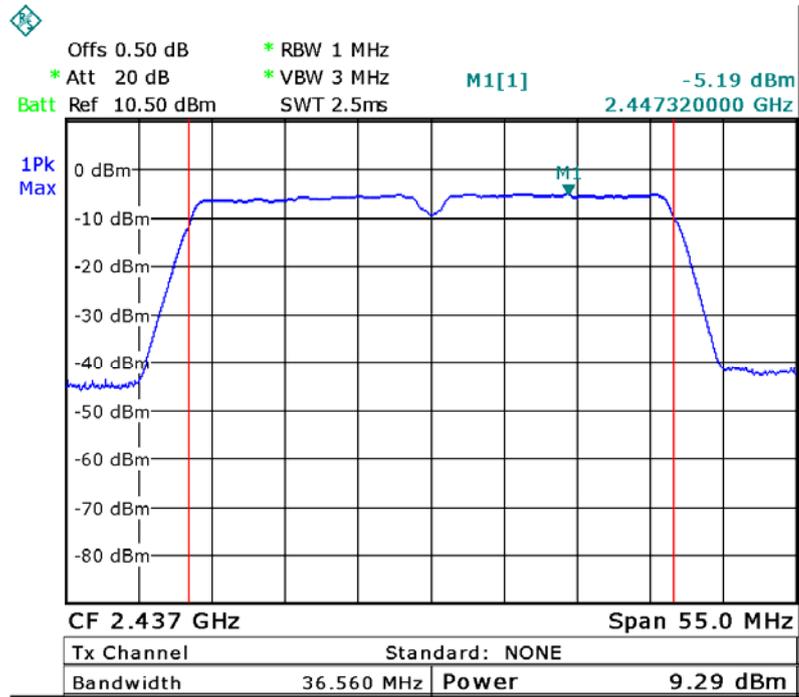

Mode: TX 11n HT40 channel 9

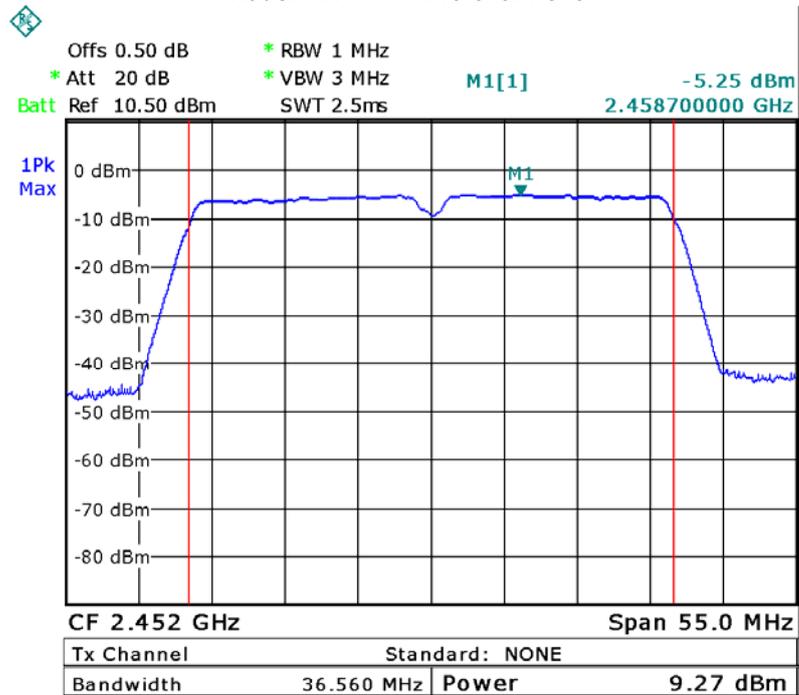

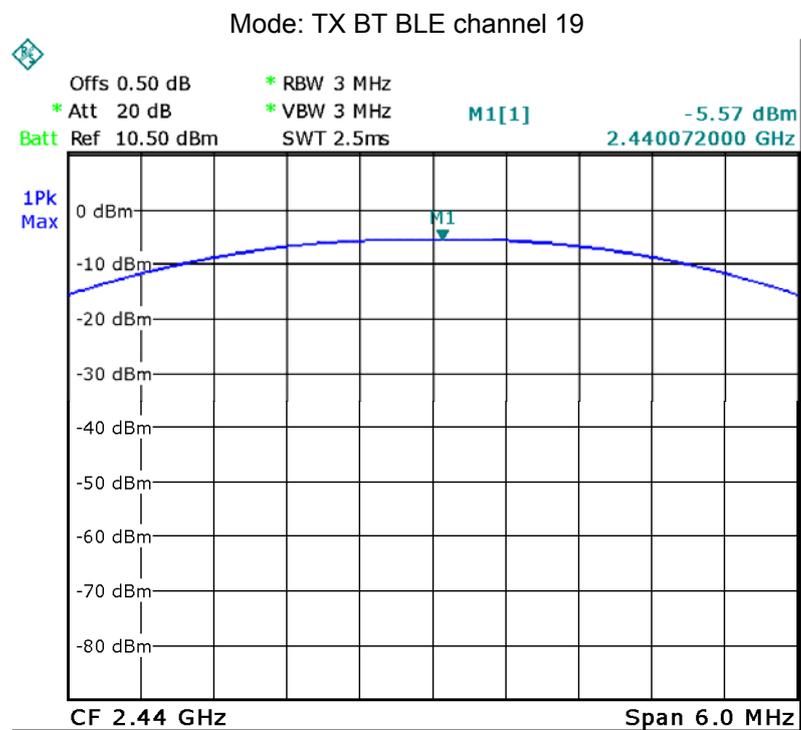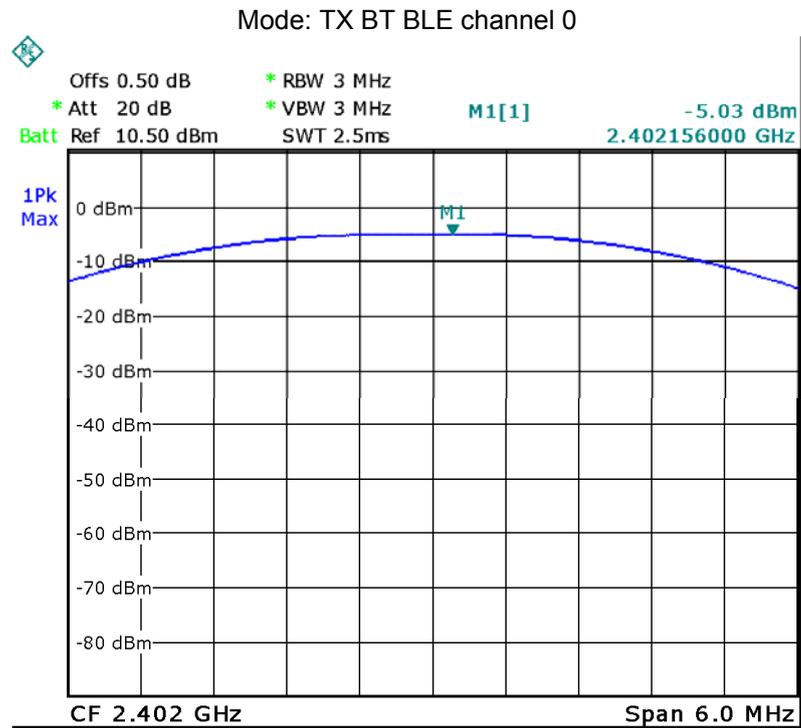

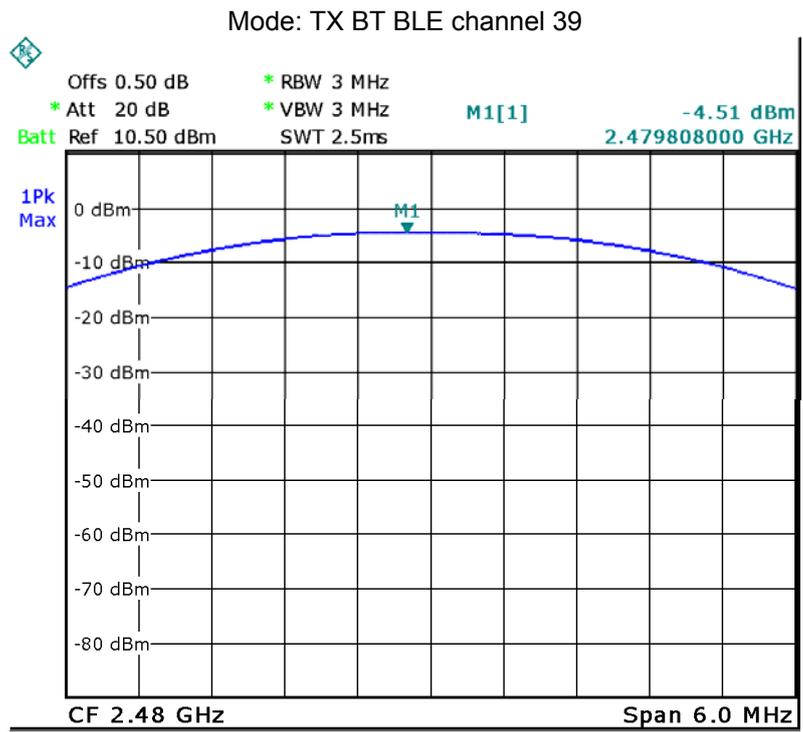

## 12 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v03r03 06/09/2015

### 12.1 Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r03 06/09/2015 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section  
Submit this plot.

### 12.2 Test Result:


Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-22.32	-22.07	-22.27
Limit: 1W/30dBm		
8dBm per 3kHz		



Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-25.75	-27.11	-27.33
Limit		
8dBm per 3kHz		



Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-26.64	-26.86	-26.07
Limit		
8dBm per 3kHz		

Test mode : TX 11n HT40		
Power Spectral (dBm per 3kHz)		
2422MHz	2437MHz	2452MHz
-28.91	-27.86	-28.30
Limit		
8dBm per 3kHz		


Test mode : TX BT BLE		
Power Spectral (dBm per 3kHz)		
2402MHz	2440MHz	2480MHz
-20.64	-21.09	-20.08
Limit		
8dBm per 3kHz		

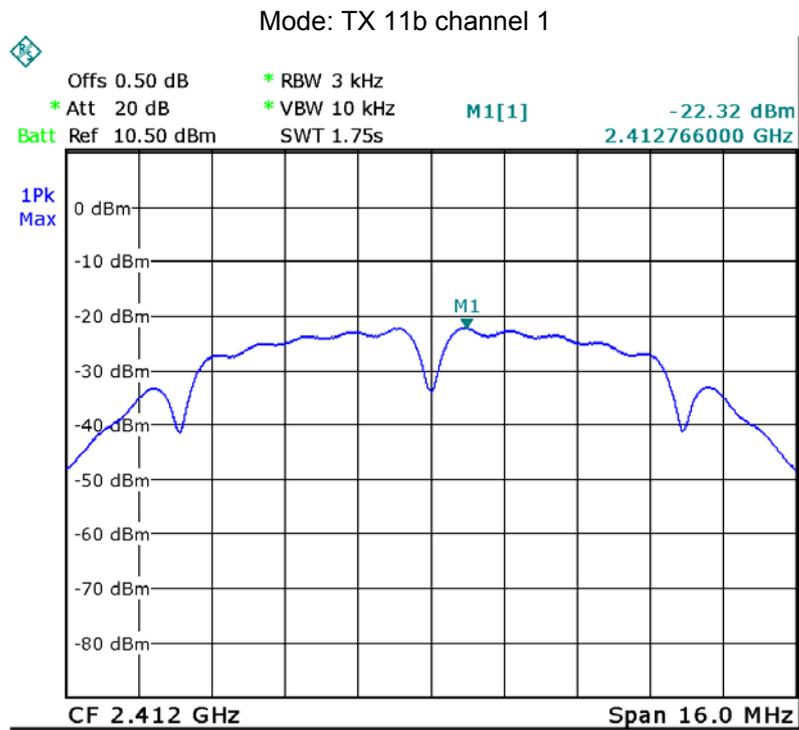

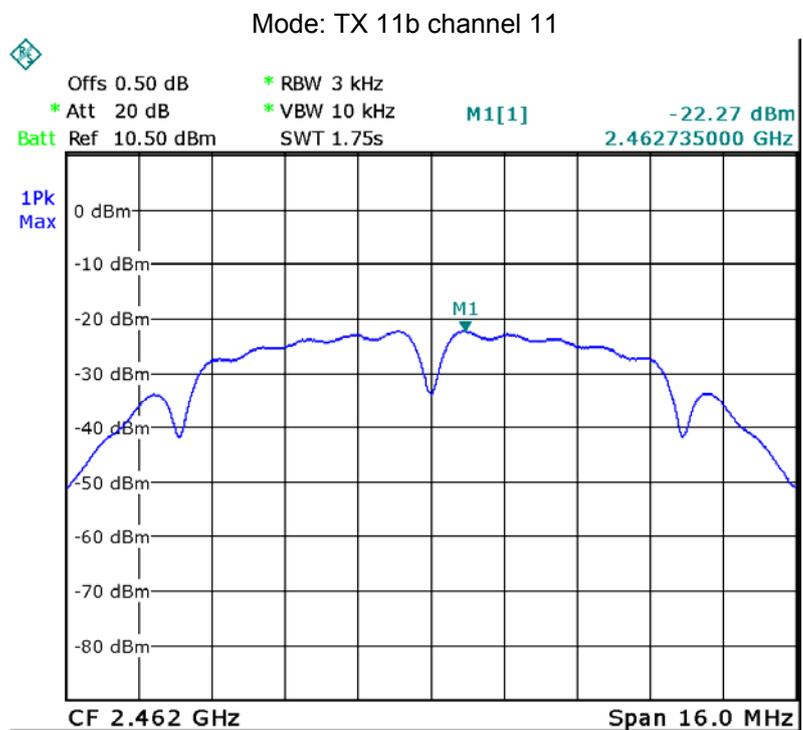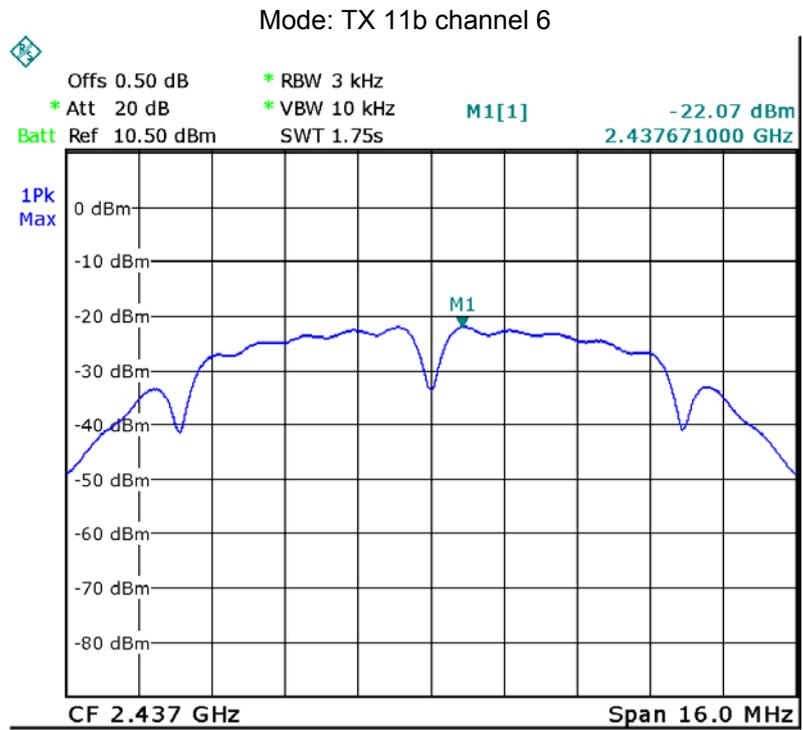


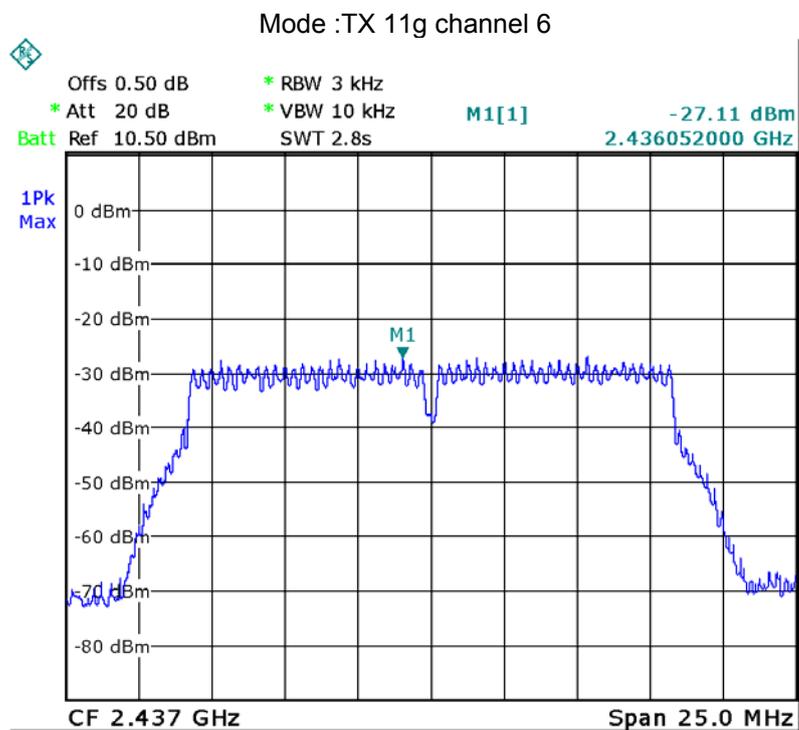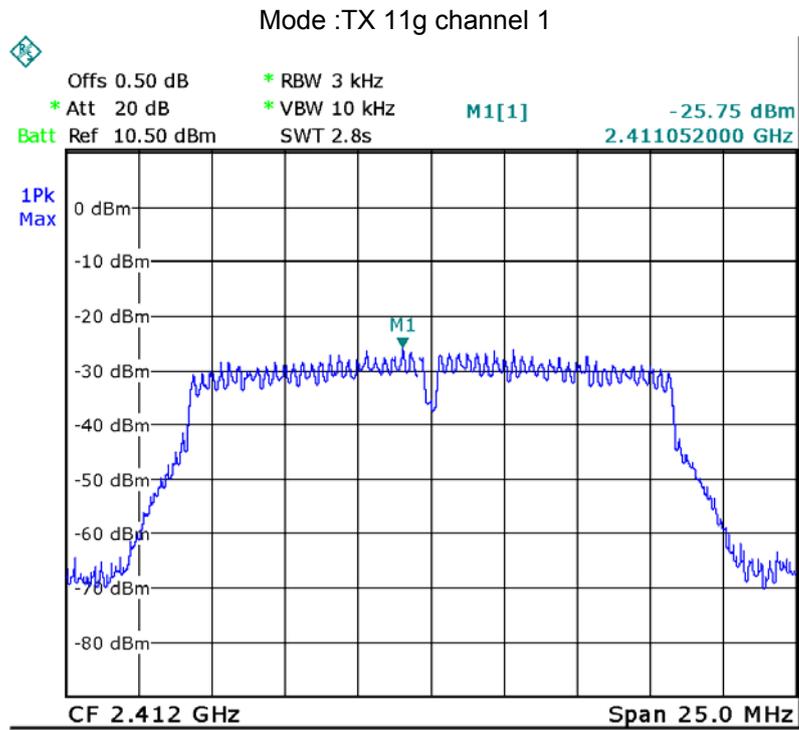


Mode :TX 11g channel 11

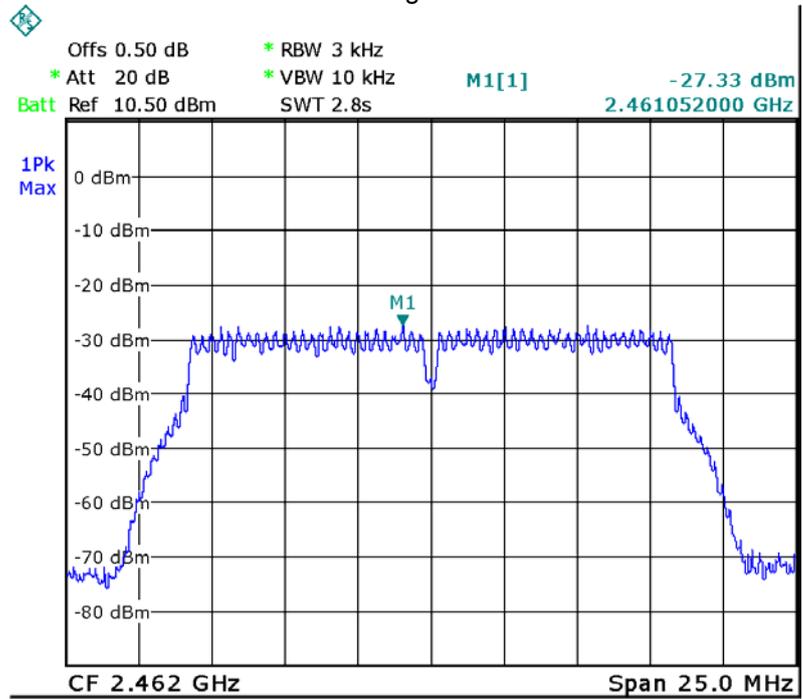


Mode: TX 11n HT20 channel 1

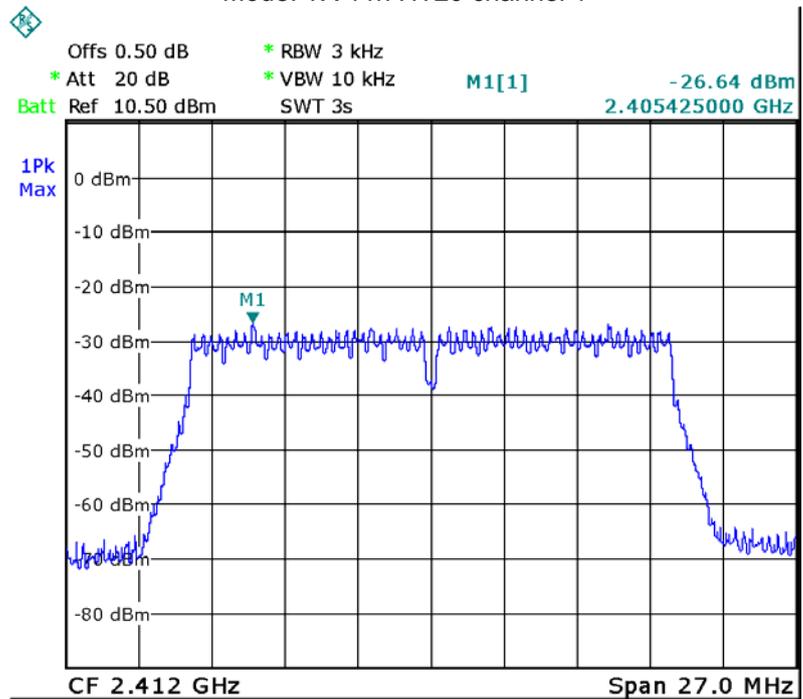


Mode: TX 11n HT20 channel 6

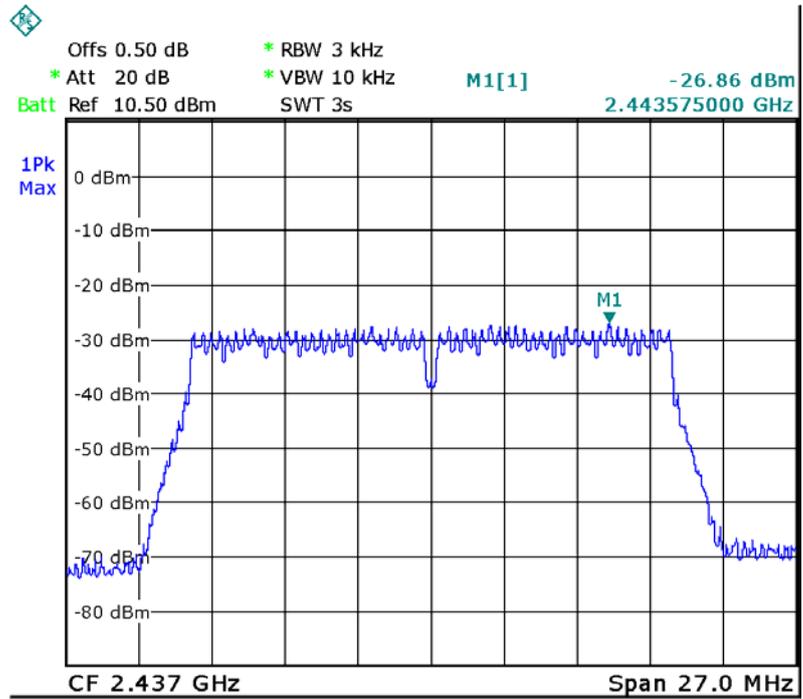


Mode: TX 11n HT20 channel 11


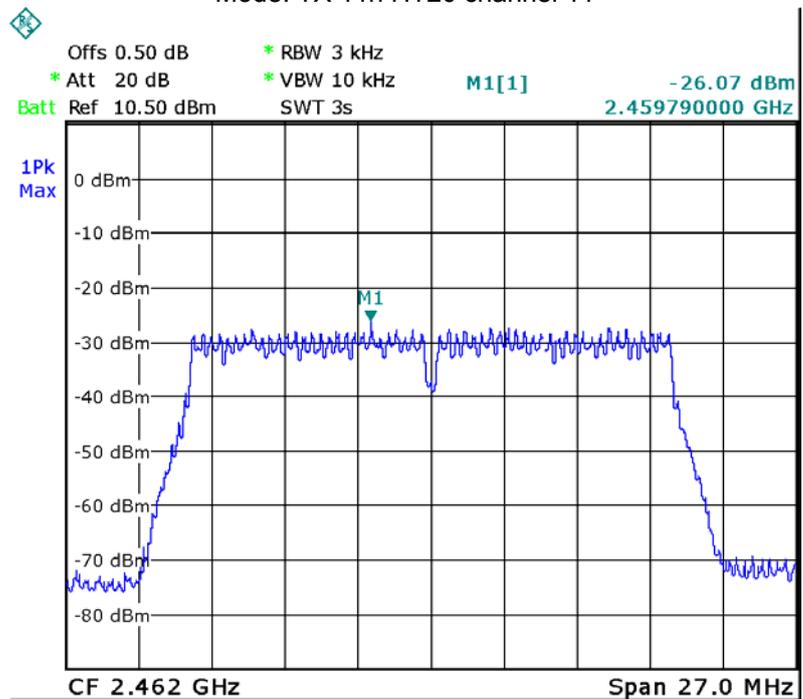


Mode: TX 11n HT40 channel 3

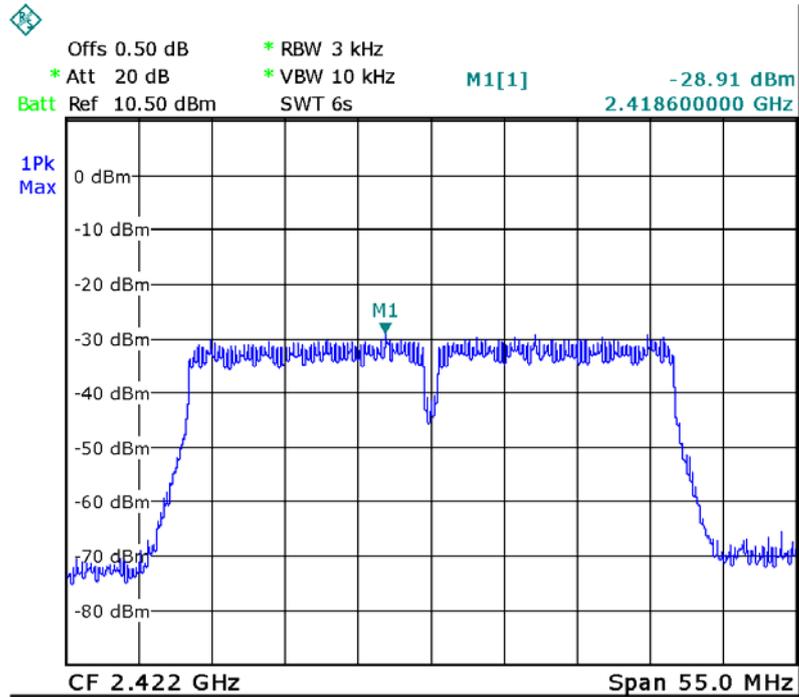


Mode: TX 11n HT40 channel 6

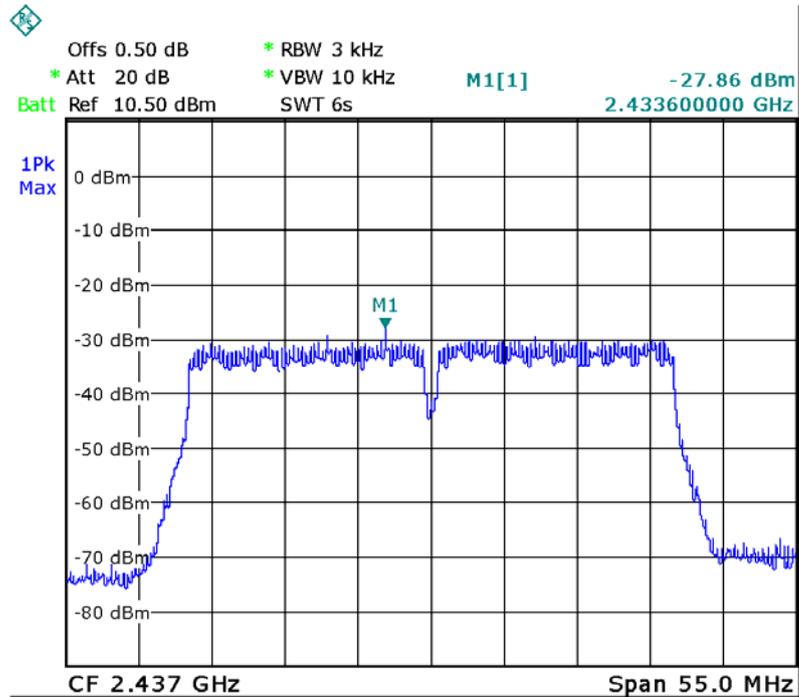


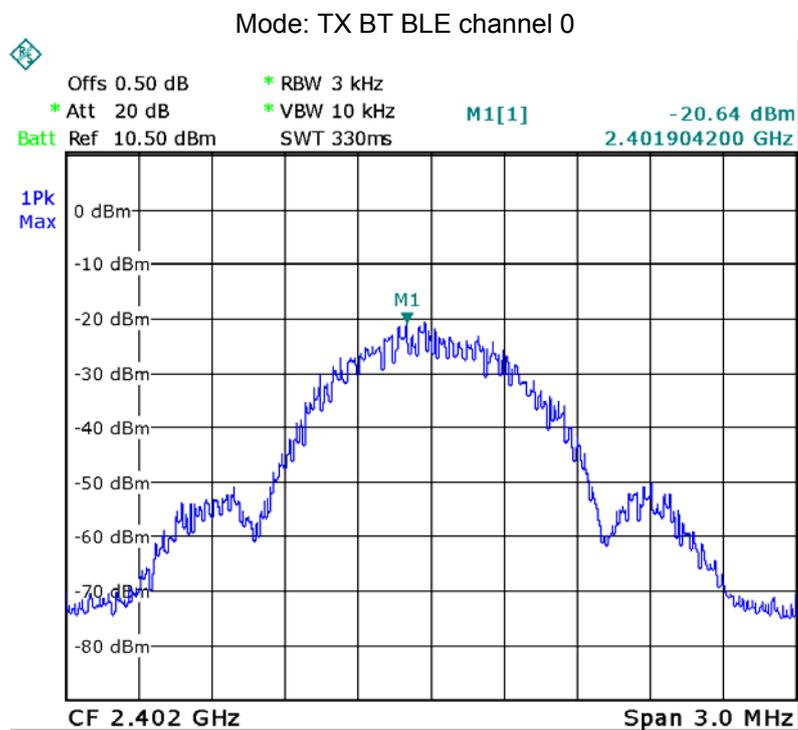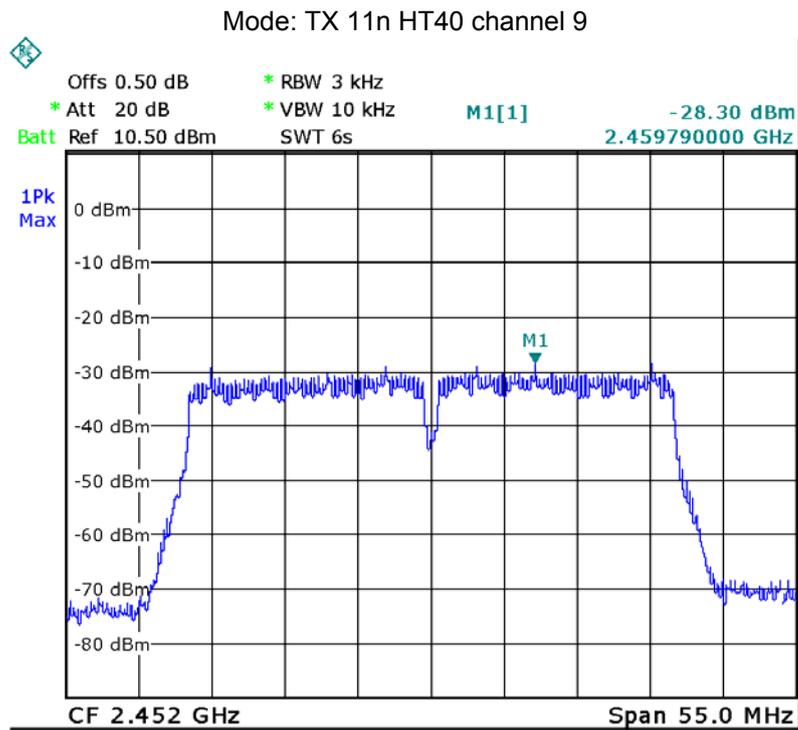

Mode: TX BT BLE channel 19

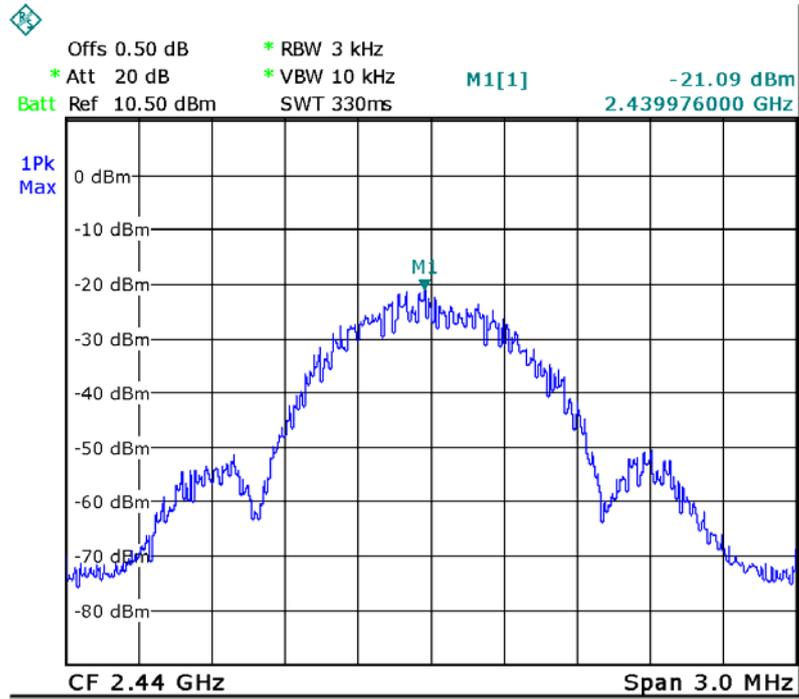

Mode: TX BT BLE channel 39

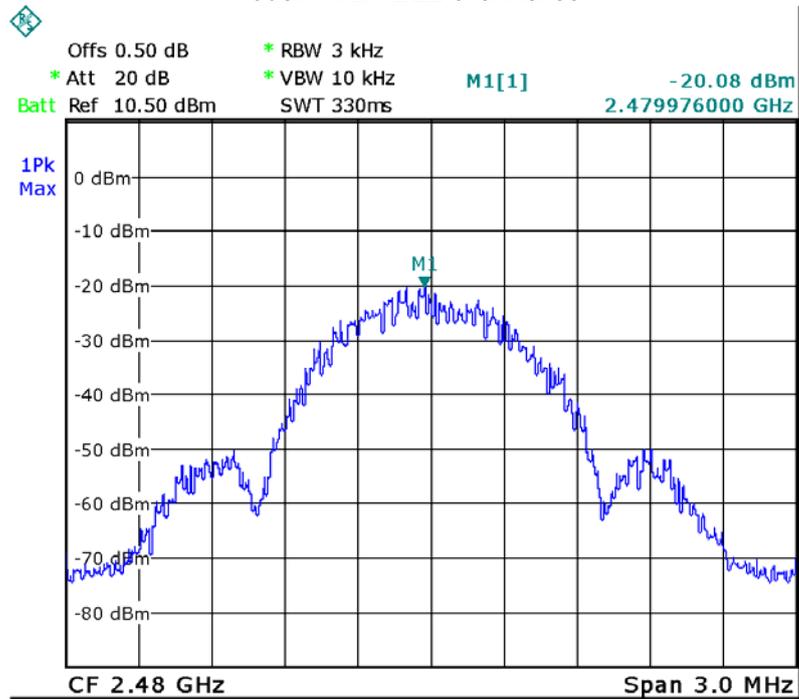

### **13 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

