

## FCC TEST REPORT

For

MEM-CE, LLC

MID

Model No.: MTAB-07530A

Additional Model No.: Please refer to page 5.

Prepared for

: MEM-CE, LLC

Address

: 11485 Valley View Road, Eden Prairie, MN 55344, USA

Prepared by

: Shenzhen LCS Compliance Testing Laboratory Ltd.

Address

: 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel

: (+86)755-82591330

Fax

: (+86)755-82591332

Web

: www.LCS-cert.com

Mail

: webmaster@LCS-cert.com

Date of receipt of test sample : September 08, 2015

Number of tested samples : 1

Serial number : /

Date of Test : September 08, 2015 - September 21, 2015

Date of Report : September 21, 2015

**FCC TEST REPORT**  
**FCC CFR 47 PART 15 C(15.247): 2014**

**Report Reference No.** ..... : **LCS1509221198E**

Date of Issue..... : September 21, 2015

**Testing Laboratory Name** ..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure ..... : Full application of Harmonised standards  Partial application of Harmonised standards   
Other standard testing method

**Applicant's Name** ..... : **MEM-CE, LLC**

Address..... : 11485 Valley View Road, Eden Prairie, MN 55344, USA

**Test Specification**

Standard..... : FCC CFR 47 PART 15 C(15.247): 2014

**Test Report Form No.** ..... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF ..... : Dated 2011-03

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description** ..... : **MID**

Trade Mark..... : memorex

Model/ Type reference ..... : MTAB-07530A

Ratings..... : AC Input100-240V,50/ 60Hz  
DC 3.7V by battery(2800mAh)

Result ..... : **Positive**

**Compiled by:**




Kyle Yin/ File administrators

**Supervised by:**



Glin Lu / Technique principal

**Approved by:**



Gavin Liang/ Manager

# FCC -- TEST REPORT

**Test Report No. : LCS1509221198E**September 21, 2015

Date of issue

Type / Model.....	: MTAB-07530A
EUT.....	: MID
<b>Applicant.....</b>	<b>: MEM-CE, LLC</b>
Address.....	: 11485 Valley View Road, Eden Prairie, MN 55344, USA
Telephone.....	: /
Fax.....	: /
<b>Manufacturer.....</b>	<b>: Jiangxi Wei Heng Digital Company Limited</b>
Address.....	: High-tech industrial Development Zone Xinyu City, Jiangxi Province, China
Telephone.....	: /
Fax.....	: /
<b>Factory.....</b>	<b>: Jiangxi Wei Heng Digital Company Limited</b>
Address.....	: High-tech industrial Development Zone Xinyu City, Jiangxi Province, China
Telephone.....	: /
Fax.....	: /

**Test Result****Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## TABLE OF CONTENTS

Description.....	Page
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. DESCRIPTION OF DEVICE (EUT) .....	5
1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS .....	5
1.3. EXTERNAL I/O .....	5
1.4. DESCRIPTION OF TEST FACILITY .....	6
1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	7
1.6. MEASUREMENT UNCERTAINTY .....	7
1.7. DESCRIPTION OF TEST MODES .....	7
<b>2. TEST METHODOLOGY .....</b>	<b>8</b>
2.1. EUT CONFIGURATION .....	8
2.2. EUT EXERCISE .....	8
2.3. GENERAL TEST PROCEDURES .....	8
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>9</b>
3.1. JUSTIFICATION .....	9
3.2. EUT EXERCISE SOFTWARE .....	9
3.3. SPECIAL ACCESSORIES .....	9
3.4. BLOCK DIAGRAM/SCHEMATICS .....	9
3.5. EQUIPMENT MODIFICATIONS .....	9
3.6. TEST SETUP .....	9
<b>4. SUMMARY OF TEST RESULTS.....</b>	<b>10</b>
<b>5. SUMMARY OF TEST EQUIPMENT .....</b>	<b>11</b>
<b>6. TEST RESULT .....</b>	<b>12</b>
6.1. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT .....	12
6.2. POWER SPECTRAL DENSITY MEASUREMENT .....	13
6.3. 6 dB SPECTRUM BANDWIDTH MEASUREMENT .....	16
6.4. RADIATED EMISSIONS MEASUREMENT .....	19
6.5. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST.....	29
6.6. POWER LINE CONDUCTED EMISSIONS .....	33
6.7. ANTENNA REQUIREMENTS .....	35

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT	: MID
Model Number	: MTAB-07530A
Power Supply	: AC Input100-240V,50/ 60Hz DC 3.7V by battery(2800mAh)
Software version	: --
Hardware version	: --
Frequency Range	: 2402.00-2480.00MHz, (Channel Number: 40, Channel Frequency=2402+2(K-1), K=1, 2, 3 .....40)
Modulation Technology	: GFSK
Module Channel	: 40 channels for Bluetooth V4.0 (DTS)
Channel Spacing	: 2MHz for Bluetooth V4.0 (DTS)
Bluetooth Version	: BT V4.0
Antenna Gain	: Integral antenna, 1.5dBi(Max.)

#### Additional models No.

--	--	--	--
----	----	----	----

*Remark: PCB board, structure and internal of these model(s) are the same, So no additional models were tested.*

### 1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
--	AC ADAPTOR	PGAE0500150U1 UL	--	VOC

### 1.3. External I/O

I/O Port Description	Quantity	Cable
USB	1	0.1m
TF Card	1	N/A
AUX	1	N/A

## 1.4. Description of Test Facility

Site Description	
EMC Lab.	: CNAS Registration Number. is L4595. FCC Registration Number. is 899208. Industry Canada Registration Number. is 9642A-1. VCCI Registration Number. is C-4260 and R-3804. ESMD Registration Number. is ARCB0108. UL Registration Number. is 100571-492. TUV SUD Registration Number. is SCN1081. TUV RH Registration Number. is UA 50296516-001
Name of Firm	: Shenzhen LCS Compliance Testing Laboratory Ltd.
Site Location	: 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

## 1.5. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty :	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty :	150kHz~30MHz	1.63dB	(1)
Power disturbance :	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7. Description Of Test Modes

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. The following operating modes were applied for the related test items.

This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position. During test, the EUT is set to transmit in 100% duty cycle. And its related average correction factor is 0.

All test modes were tested, only the result of the worst case was recorded in the report.

Mode of Operations	Frequency Range (MHz)	Data Rate (Mbps)
GFSK	2402	1
	2440	1
	2480	1
For Conducted Emission		
Test Mode	TX Mode	
For Radiated Emission		
Test Mode	TX Mode	

\*\*\*Note: Using a temporary antenna connector for the EUT when the conducted measurements are performed.

## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C

### 2.3. General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements of ANSI C63.10:2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table, The EUT was placed on the top of the turntable 0.8 meter above ground below 1GHz and 1.5 meter above 1GHz test.. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements of ANSI C63.10-2013.

### 3. SYSTEM TEST CONFIGURATION

#### 3.1. Justification

The system was configured for testing in a continuous transmit condition. The EUT was programmed to control Bluetooth to make it continuously transmit

#### 3.2. EUT Exercise Software

N/A

#### 3.3. Special Accessories

N/A

#### 3.4. Block Diagram/Schematics

Please refer to the related document

#### 3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6. Test Setup

Please refer to the test setup photo.

## 4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
§15.247(b)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.247(a)	Occupied Bandwidth	Compliant
§15.209, §15.247(d)	Radiated and Conducted Spurious Emissions	Compliant
§15.205	Emissions at Restricted Band	Compliant
§15.207(a)	Line Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant

## 5. SUMMARY OF TEST EQUIPMENT

Instrument	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	June 18, 2015	June 17, 2016
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	July 16, 2015	July 15, 2016
LISN	MESS Tec	NNB-2/16Z	99079	June 18, 2015	June 17, 2016
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	June 18, 2015	June 17, 2016
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	June 18, 2015	June 17, 2016
ISN	SCHAFFNER	ISN ST08	21653	June 18, 2015	June 17, 2016
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	June 18, 2015	June 17, 2016
Amplifier	SCHAFFNER	COA9231A	18667	June 18, 2015	June 17, 2016
Amplifier	Agilent	8449B	3008A02120	July 16, 2015	July 15, 2016
Amplifier	MITEQ	AMF-6F-260400	9121372	July 16, 2015	July 15, 2016
Spectrum	Agilent	E4407B	MY41440292	July 16, 2015	July 15, 2016
Loop Antenna	R&S	HFH2-Z2	860004/001	June 18, 2015	June 17, 2016
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	June 10, 2015	June 09, 2016
Horn Antenna	EMCO	3115	6741	June 10, 2015	June 09, 2016
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	June 10, 2015	June 09, 2016
RF Cable-R03m	Jye Bao	RG142	CB021	June 18, 2015	June 17, 2016
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	June 18, 2015	June 17, 2016
Spectrum Meter	R&S	FSP 30	100023	July 16, 2015	July 15, 2016
Power Meter	R&S	NRVS	100444	June 18, 2015	June 17, 2016
Power Sensor	R&S	NRV-Z51	100458	June 18, 2015	June 17, 2016
Power Sensor	R&S	NRV-Z32	10057	June 18, 2015	June 17, 2016
AC Power Source	HPC	HPA-500E	HPA-9100024	June 18, 2015	June 17, 2016
DC power Soure	GW	GPC-6030D	C671845	June 18, 2015	June 17, 2016
Temp. and Humidig	Giant Force	GTH-225-20-S	MAB0103-00	June 18, 2015	June 17, 2016
RF CABLE-1m	JYE Bao	RG142	CB034-1m	June 18, 2015	June 17, 2016
RF CABLE-2m	JYE Bao	RG142	CB)35-2m	June 18, 2015	June 17, 2016
Vector signal Generator	R&S	SMU200A	102098	June 18, 2015	June 17, 2016
Signal Generator	R&S	SMR40	10016	July 16, 2015	July 15, 2016
Universal Radio Communication	R&S	CMU200	112012	July 18, 2015	July 17, 2016
MXA Signal Analyzer	Agilent	N9020A	MY50510140	October 27, 2014	October 26, 2015
temporary antenna connector	LCS	LCS-RF-2015041 3	N/A	N/A	N/A

## 6. TEST RESULT

### 6.1. Maximum Conducted Output Power Measurement

#### 6.1.1. Standard Applicable

According to §15.247(b) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.


#### 6.1.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

#### 6.1.3. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

#### 6.1.4. Test Setup Layout

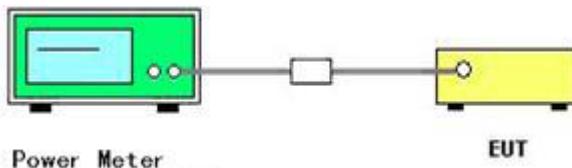

#### 6.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 6.1.6. Test Result of Maximum Conducted Output Power(Peak)

Modulation	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Limit (mW)	Result
GFSK	2402	6.231	4.20	1000	Pass
	2440	5.861	3.86	1000	Pass
	2480	5.985	3.97	1000	Pass

## 6.2. Power Spectral Density Measurement

### 6.2.1. Standard Applicable

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


### 6.2.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

### 6.2.3. Test Procedures

1. The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 3 kHz.
4. Set the VBW  $\geq$  3\*RBW.
5. Set the span to 1.5 times the DTS channel bandwidth.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.

### 6.2.4. Test Setup Layout

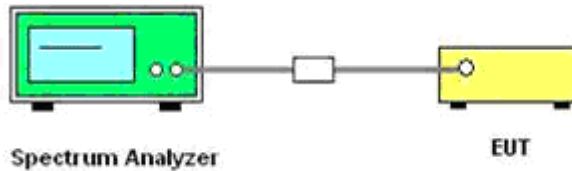

### 6.2.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 6.2.6. Test Result of Power Spectral Density


Modulation	Frequency (MHz)	Reading Level (dBm/3KHz)	Max. Limit (dBm/3KHz)	Result
GFSK	2402	-11.88	8	Pass
	2440	-11.44	8	Pass
	2480	-11.74	8	Pass

The test data refer to the following page.


Low Channel, 2402MHz

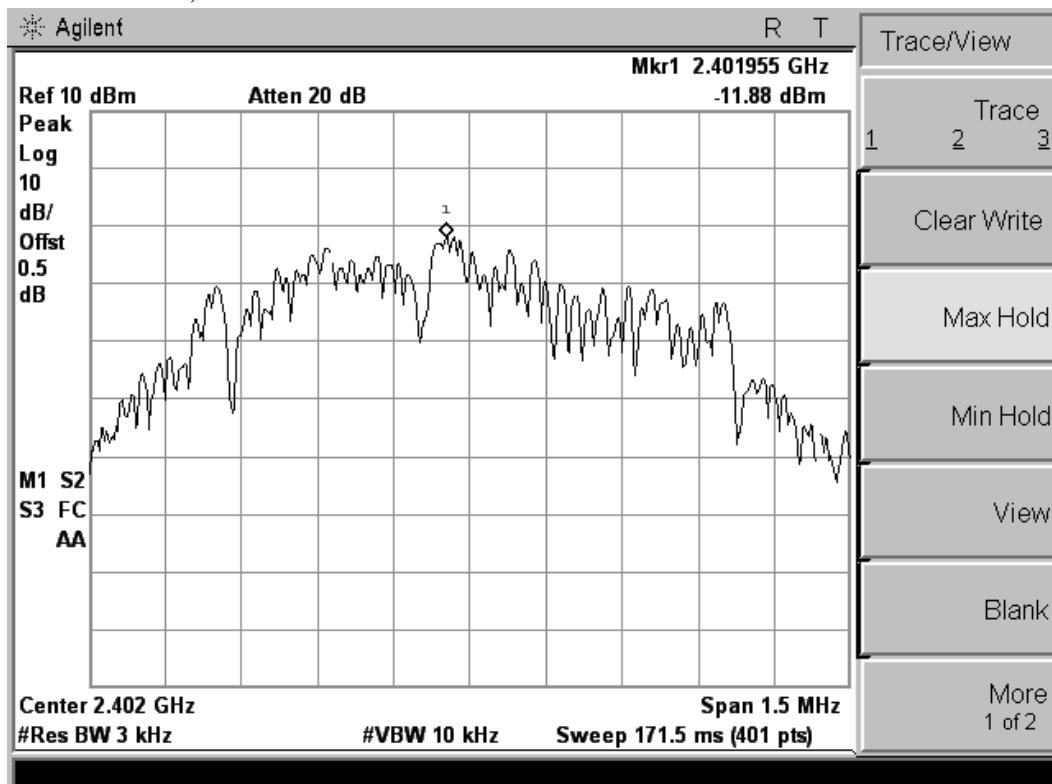

## Middle Channel, 2440MHz

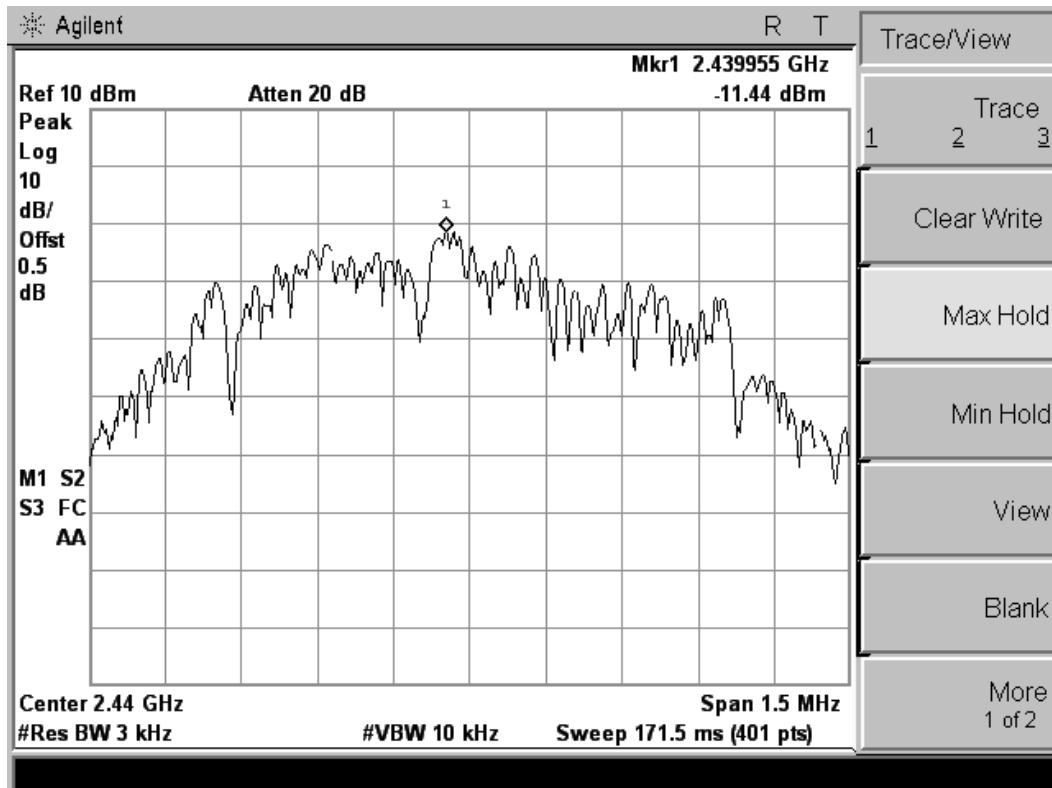

## High Channel, 2480MHz

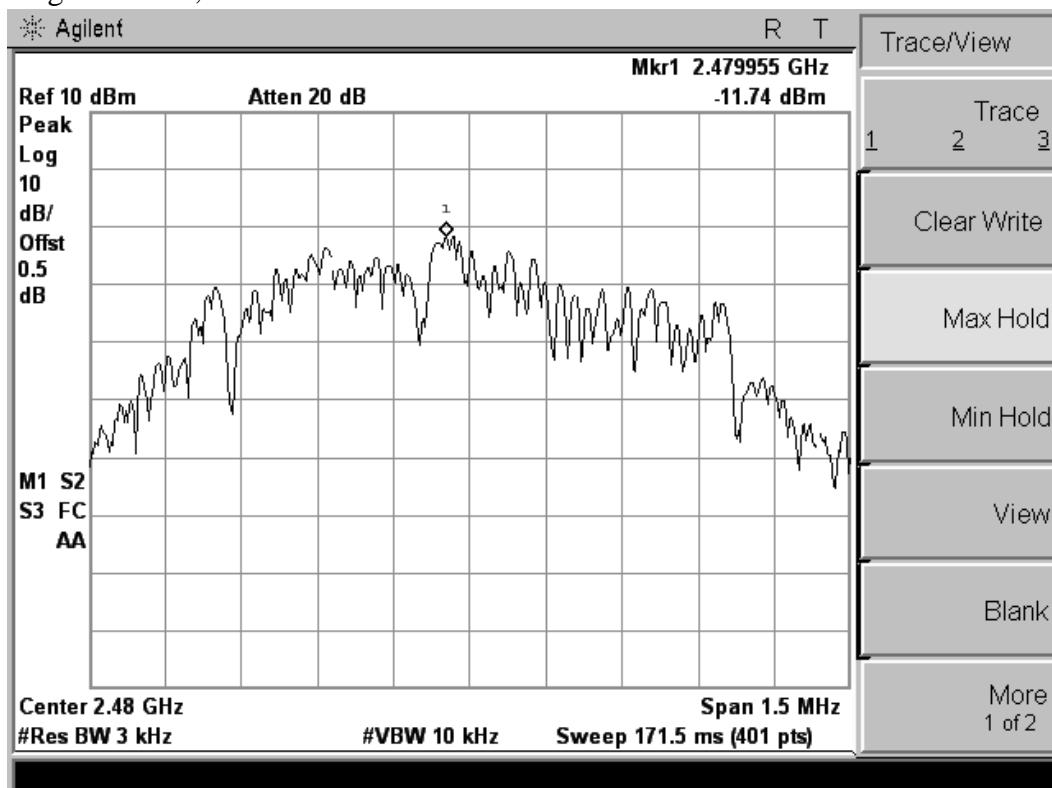

### 6.3. 6 dB Spectrum Bandwidth Measurement

#### 6.3.1. Standard Applicable

According to §15.247(a)(2) For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### 6.3.2. Measuring Instruments and Setting


Please refer to section 6 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	100ms

#### 6.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth and the video bandwidth were set according to ANSI C63.10:2013 bandwidth measurement method .  
RBW=1%-5% OBW, VBW $\geq$ 3RBW
3. Measured the spectrum width with power higher than 6dB below carrier.

#### 6.3.4. Test Setup Layout

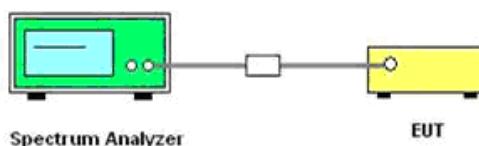

#### 6.3.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 6.3.6. Test Result of 6dB Spectrum Bandwidth


Modulation	Frequency (MHz)	6dB Bandwidth (KHz)	Min. Limit (KHz)	Result
GFSK	2402	620.016	500	Complies
	2440	618.615	500	Complies
	2480	612.263	500	Complies

*The test data refer to the following page.*


## Low Channel, 2402MHz

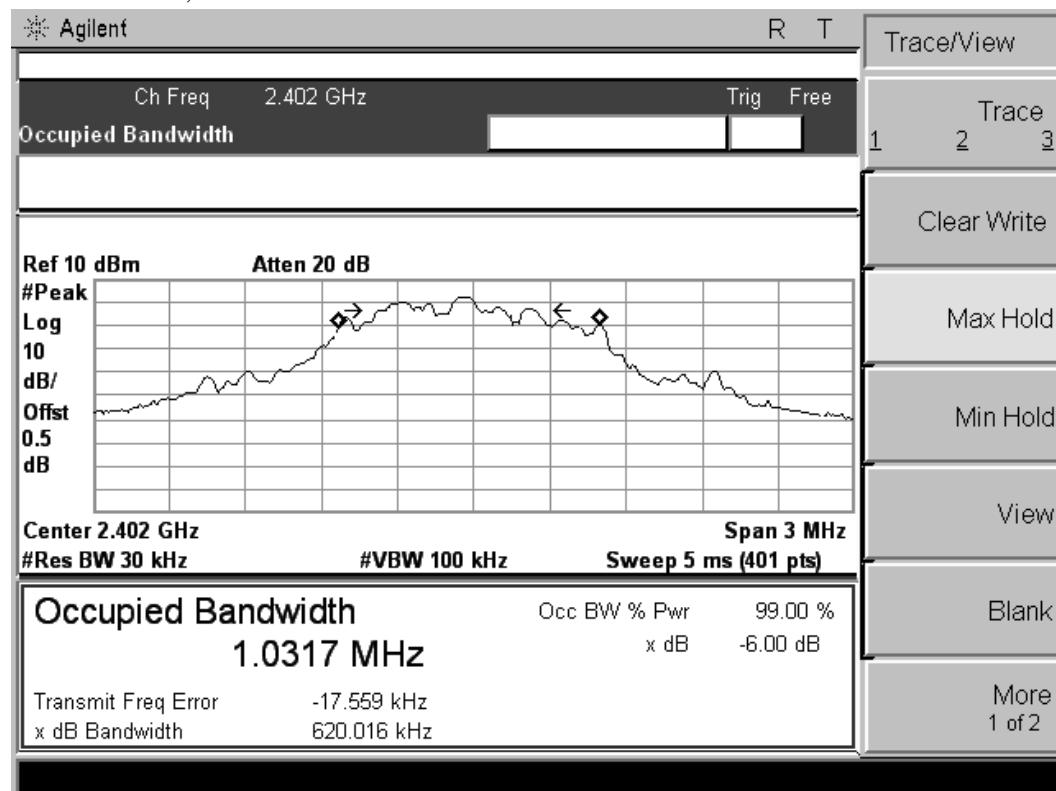

## Middle Channel, 2440MHz

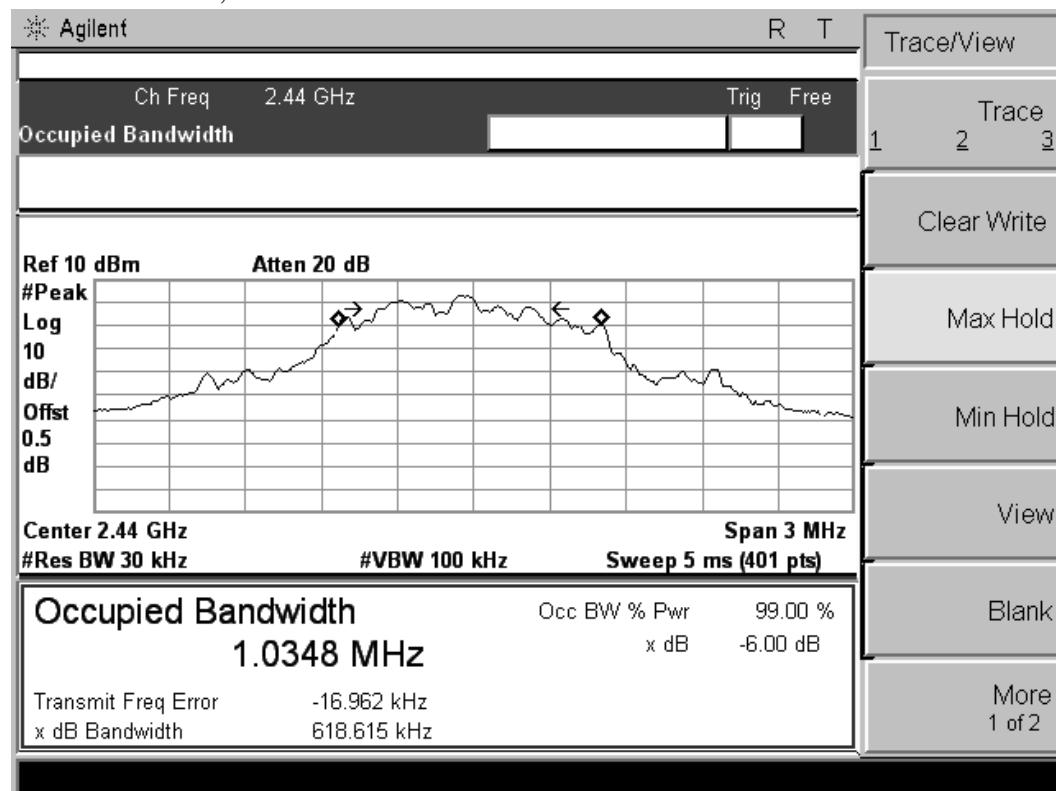


## High Channel, 2480MHz

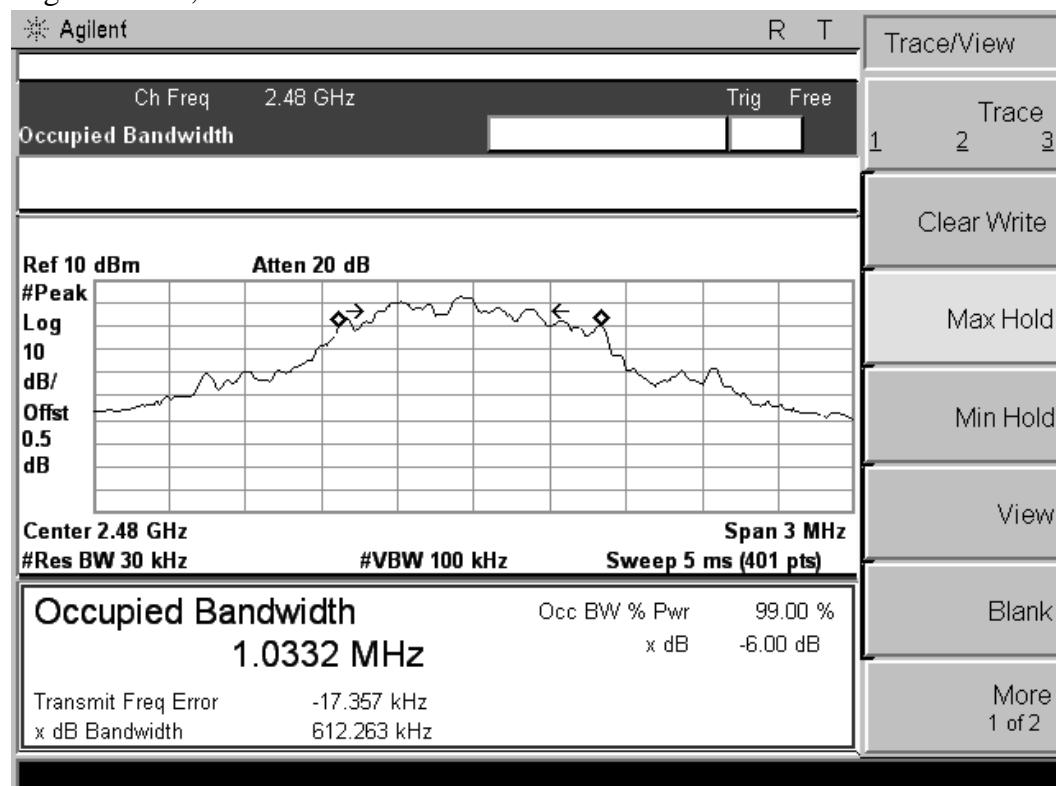


## 6.4. Radiated Emissions Measurement


### 6.4.1 Block Diagram of Test Setup

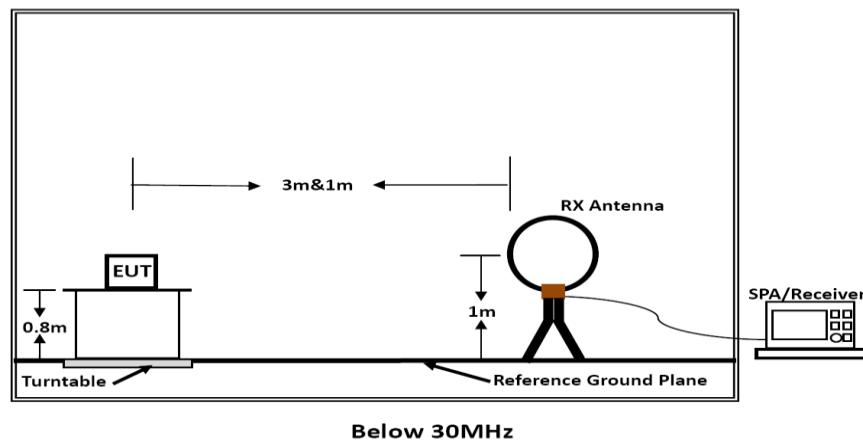

Below 30MHz

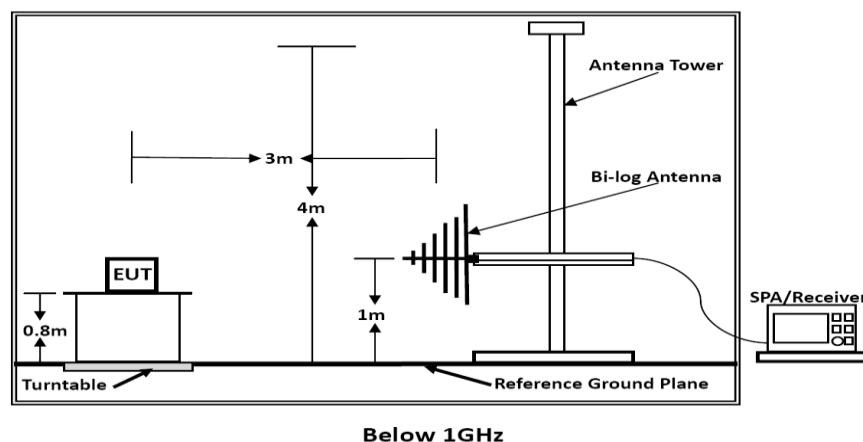

Below 1GHz

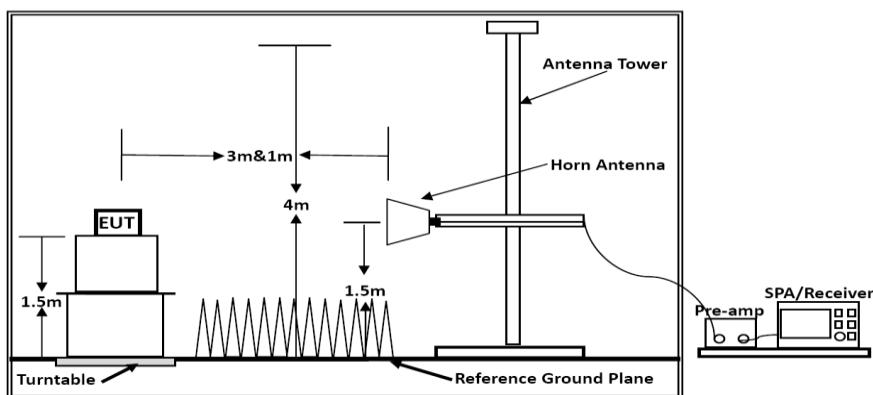

Above 1 GHz

#### 6.4..2 Radiated Emission Limit

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293.	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

Part 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector.

Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

Part 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

### 6.4.3 Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

#### 6.4.4 Test Procedures

##### 1) Sequence of testing 9 kHz to 30 MHz

###### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

###### **Premeasurement:**

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

###### **Final measurement:**

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0 ° to 360 °) and by rotating the elevation axes (0 ° to 360 °).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45$  °) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 3) Sequence of testing 1 GHz to 12.75 GHz

#### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### **Premeasurement:**

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### **Final measurement:**

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum found antenna polarisation and turntable position of the premeasurement the software maximizes the peaks by rotating the turntable position (0 ° to 360 °). This measurement is repeated for different EUT-table positions (0 ° to 150 ° in 30 °-steps). This procedure is repeated for both antenna polarisations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 4) Sequence of testing above 12.75 GHz

##### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

##### **Premeasurement:**

- The antenna is moved spherical over the EUT in different polarisations of the antenna.

##### **Final measurement:**


- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and RMS detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

#### 6.4.5 Results for Radiated Emissions

PASS.

*Only record the worst test result in this report.*


*The test data please refer to following page:*

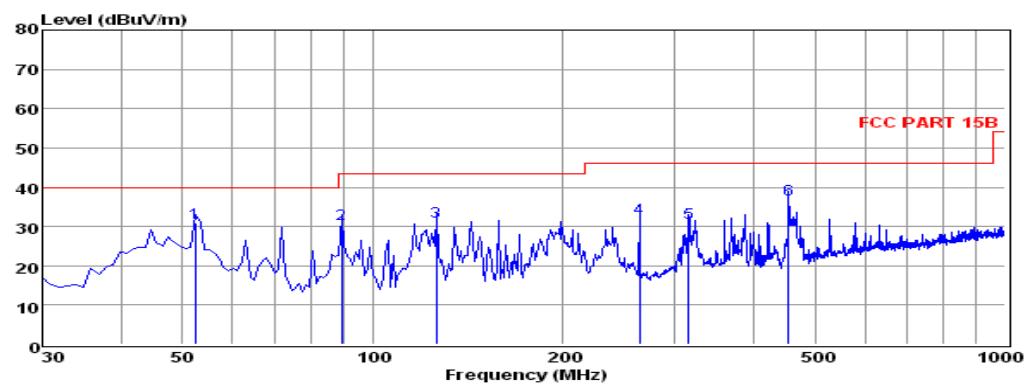

Env. / Ins: 24 °C / 56%  
 EUT: MID  
 M/N: MTAB-07530A  
 Power Rating: AC 120V/60Hz  
 Test Mode: TX-2402  
 Operator: KYLE YIN  
 Memo:  
 pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	52.31	17.41	0.46	13.14	31.01	40.00	-8.99	QP
2	89.17	18.29	0.68	11.64	30.61	43.50	-12.89	QP
3	126.03	20.99	0.71	9.55	31.25	43.50	-12.25	QP
4	263.77	18.93	1.03	12.17	32.13	46.00	-13.87	QP
5	316.15	16.62	1.09	13.28	30.99	46.00	-15.01	QP
6	454.86	19.88	1.39	15.58	36.85	46.00	-9.15	QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that ate 20db blow the official limit are not reported

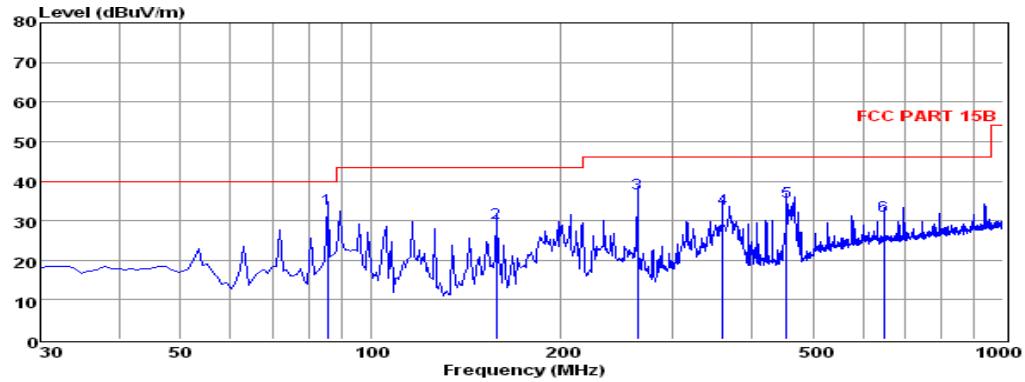

Env. / Ins: 24 °C / 56%  
 EUT: MID  
 M/N: MTAB-07530A  
 Power Rating: AC 120V/60Hz  
 Test Mode: TX-2402  
 Operator: KYLE YIN  
 Memo:  
 pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	85.29	22.01	0.47	10.40	32.88	40.00	-7.12	QP
2	158.04	20.12	0.83	8.59	29.54	43.50	-13.96	QP
3	263.77	23.55	1.03	12.17	36.75	46.00	-9.25	QP
4	359.80	17.45	1.18	14.43	33.06	46.00	-12.94	QP
5	454.86	17.92	1.39	15.58	34.89	46.00	-11.11	QP
6	647.89	11.05	1.54	18.62	31.21	46.00	-14.79	QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that ate 20db blow the official limit are not reported

\*\*\*Note: Pre-scan all mode and recorded the worst case results in this report.

#### 6.4.6. Results for Radiated Emissions (Above 1GHz)

Emissions that fall into restricted frequency bands was blow the emission limits in Section 15.209. Only list the worst Data results in this report.

##### Channel 1

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4804.00	47.10	33.06	35.04	3.94	49.06	74	-24.94	Peak	Horizontal
4804.00	38.11	33.06	35.04	3.94	40.07	54	-13.93	Average	Horizontal
4804.00	43.62	33.06	35.04	3.94	45.58	74	-28.42	Peak	Vertical
4804.00	38.77	33.06	35.04	3.94	40.73	54	-13.27	Average	Vertical

##### Channel 20

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4880.00	44.43	33.16	35.15	3.96	46.40	74	-27.60	Peak	Horizontal
4880.00	41.01	33.16	35.15	3.96	42.98	54	-11.02	Average	Horizontal
4880.00	43.07	33.16	35.15	3.96	45.04	74	-28.96	Peak	Vertical
4880.00	35.10	33.16	35.15	3.96	37.07	54	-16.93	Average	Vertical

##### Channel 40

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4960.00	46.89	33.26	35.14	3.98	48.99	74	-25.01	Peak	Horizontal
4960.00	30.82	33.26	35.14	3.98	32.92	54	-21.08	Average	Horizontal
4960.00	49.35	33.26	35.14	3.98	51.45	74	-22.55	Peak	Vertical
4960.00	39.44	33.26	35.14	3.98	41.54	54	-12.46	Average	Vertical

##### Notes:

1. Measuring frequencies from 9k~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30 MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 6.4.7. Results for Band edge Testing (Radiated)

Tx-2402

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2364.67	41.20	32.89	35.16	3.51	42.44	74	-31.56	Peak	Horizontal
2364.50	33.75	32.90	35.16	3.51	35.00	54	-19.00	Average	Horizontal
2400.00	51.13	32.92	35.16	3.54	52.43	74	-21.57	Peak	Horizontal
2400.00	38.36	32.92	35.16	3.54	39.66	54	-14.34	Average	Horizontal
2380.28	41.06	32.89	35.16	3.51	42.30	74	-31.70	Peak	Vertical
2381.86	38.82	32.90	35.16	3.51	40.07	54	-13.93	Average	Vertical
2400.00	47.80	32.92	35.16	3.54	49.10	74	-24.90	Peak	Vertical
2400.00	40.78	32.92	35.16	3.54	42.08	54	-11.92	Average	Vertical

Tx-2480

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.50	50.33	33.06	35.18	3.60	51.81	74	-22.19	Peak	Horizontal
2483.50	33.98	33.08	35.18	3.60	35.48	54	-18.52	Average	Horizontal
2490.45	45.30	33.08	35.18	3.62	46.82	74	-27.18	Peak	Horizontal
2490.54	39.31	33.08	35.18	3.62	40.83	54	-13.17	Average	Horizontal
2483.50	48.84	33.06	35.18	3.60	50.32	74	-23.68	Peak	Vertical
2483.50	30.75	33.08	35.18	3.60	32.25	54	-21.75	Average	Vertical
2497.66	47.36	33.08	35.18	3.62	48.88	74	-25.12	Peak	Vertical
2497.71	37.00	33.08	35.18	3.62	38.52	54	-15.48	Average	Vertical

## 6.5. Conducted Spurious Emissions And Band Edges Test

### 6.5.1. Standard Applicable

According to §15.247 (d) & A8.5: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 6.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz

### 6.5.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

### 6.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 5.4.4.


### 6.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


### 6.5.6. Test Results of Conducted Spurious Emissions

Emissions that fall into restricted frequency bands was blow the emission limits in Section 15.209.


## Test Result of Low Channel:

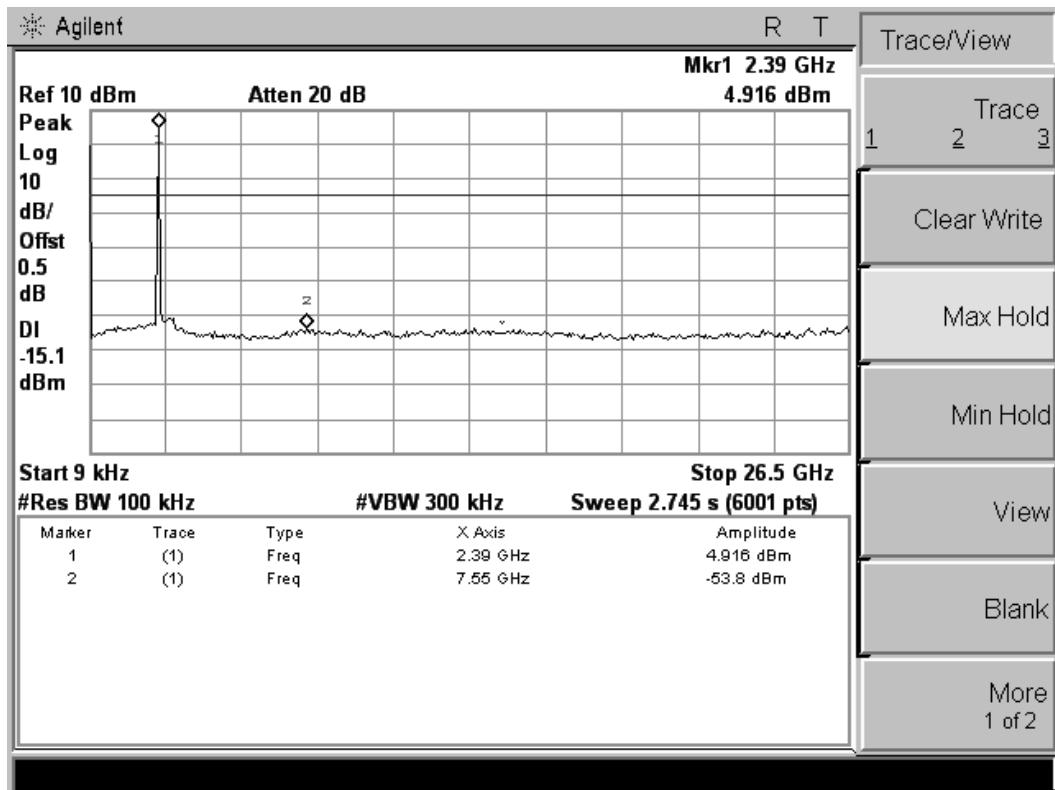



## Test Result of Middle Channel:

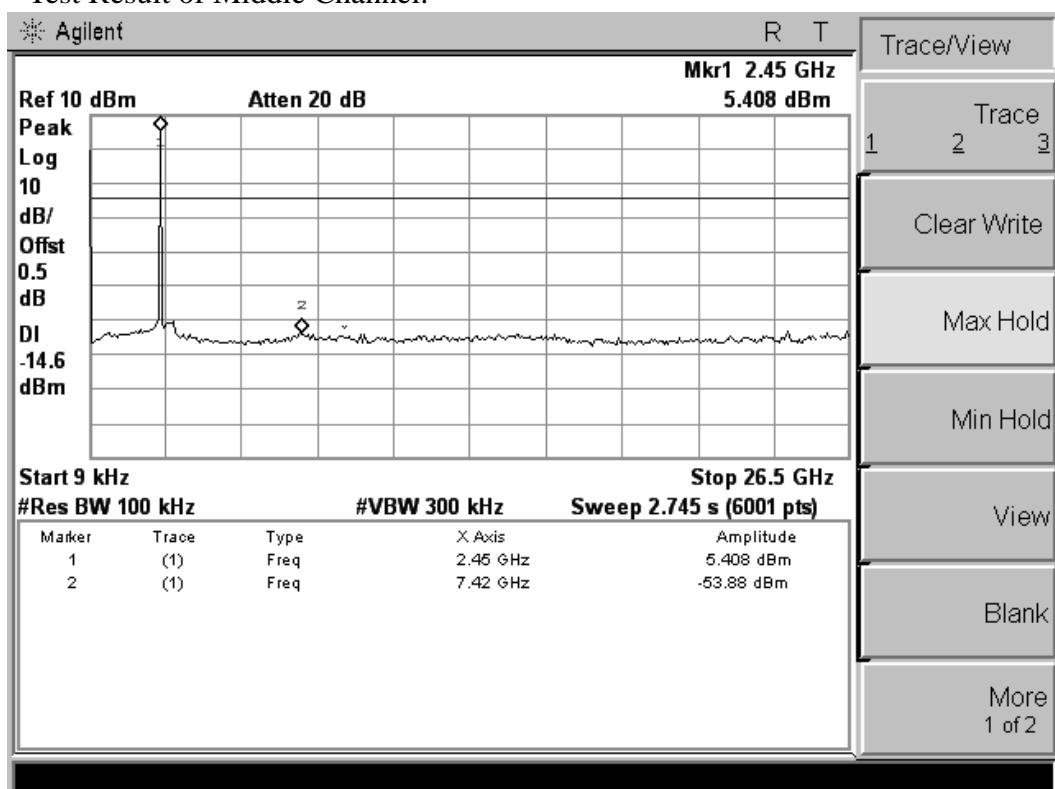

## Test Result of High Channel:

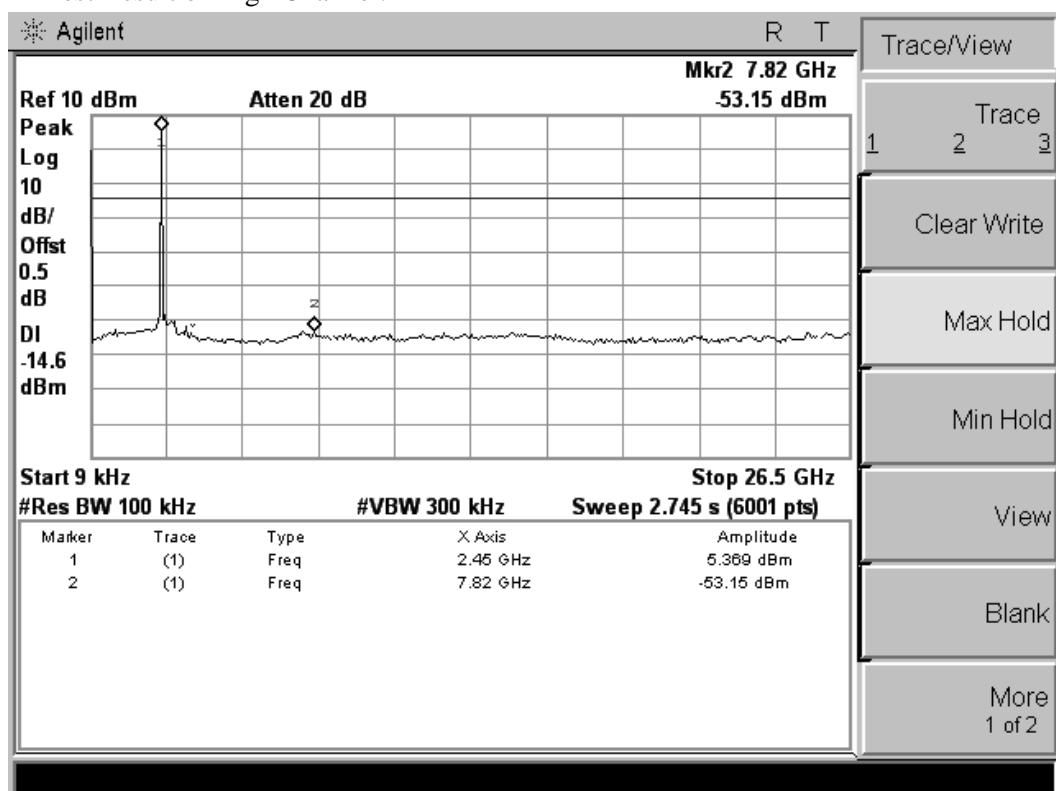

## 6.5.7. Test Results of Band Edges Test

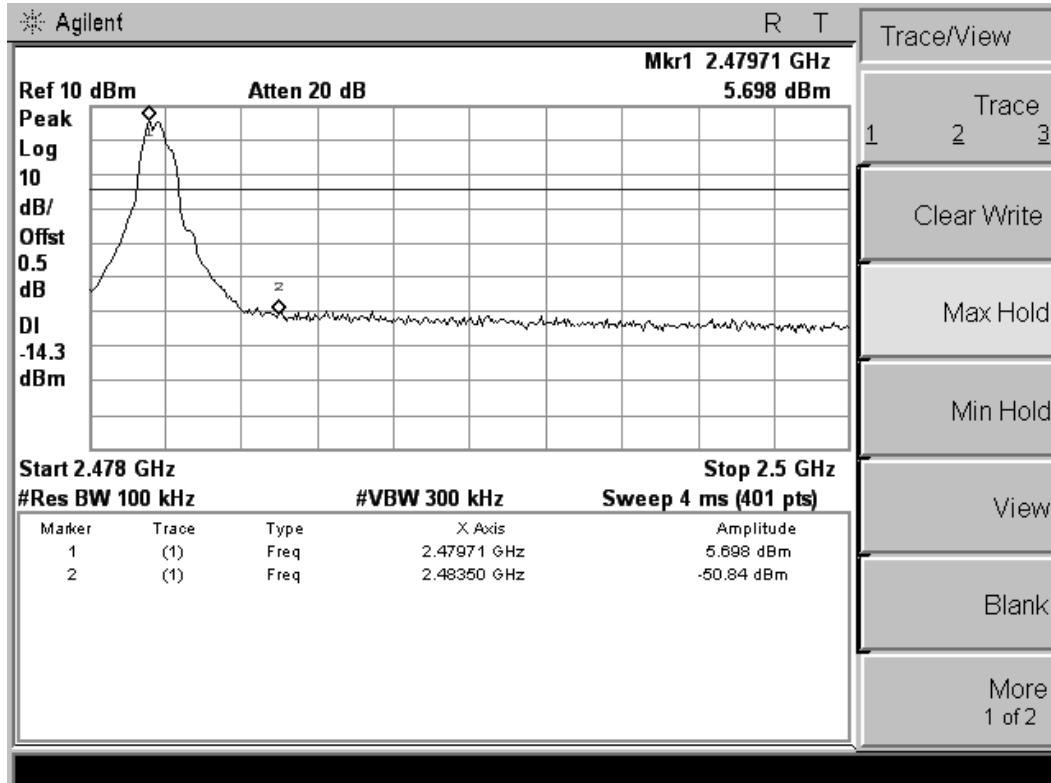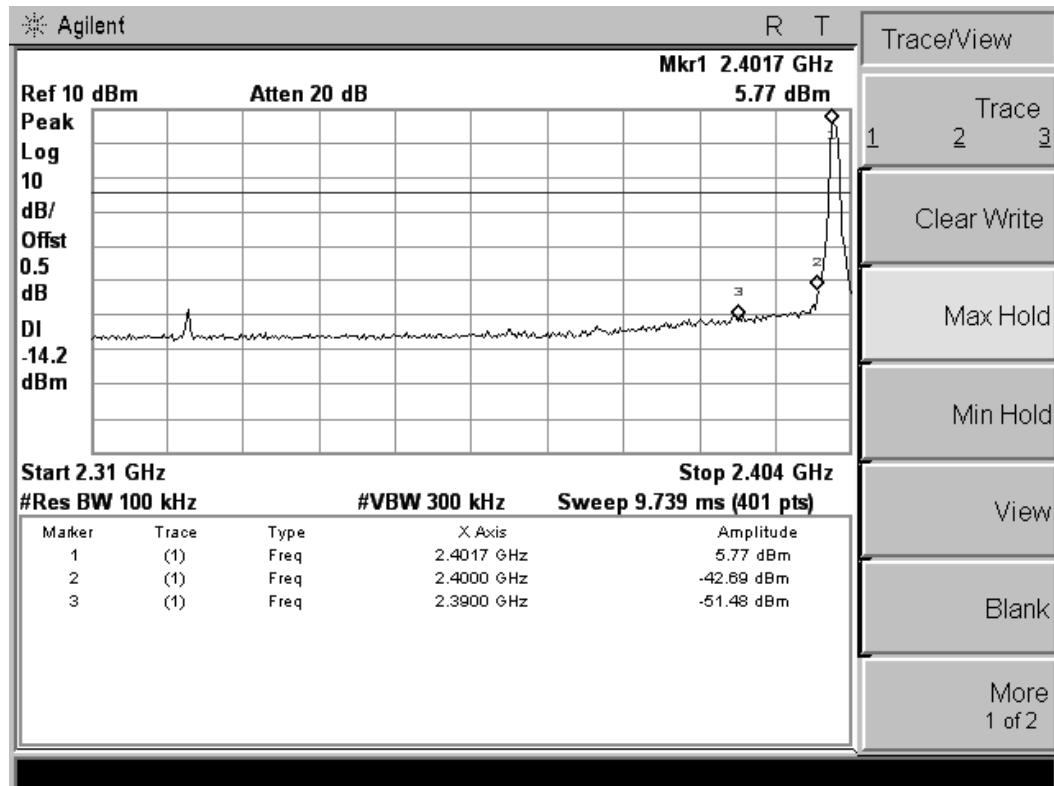


## 6.6. Power line conducted emissions

### 6.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

### 6.6.2 Block Diagram of Test Setup


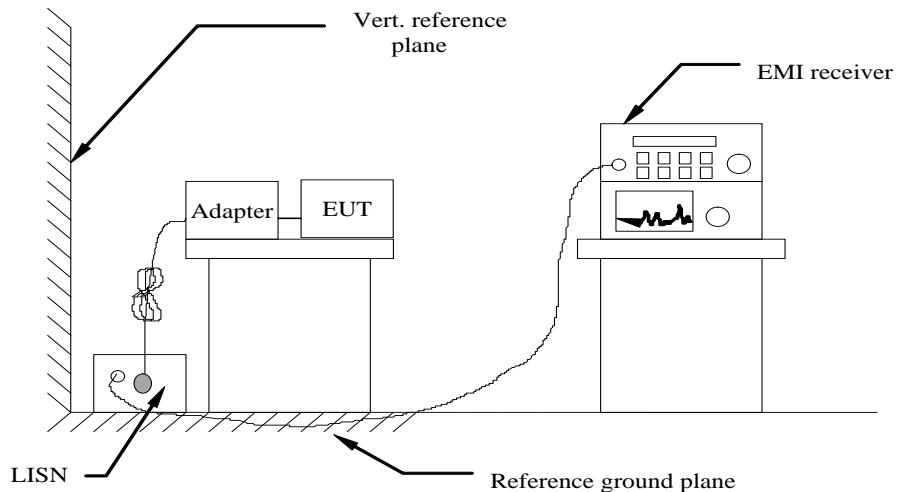


### 6.6.3 Test Results

PASS.

The test data please refer to following page.

## Test result for GFSK (Low Chanel)

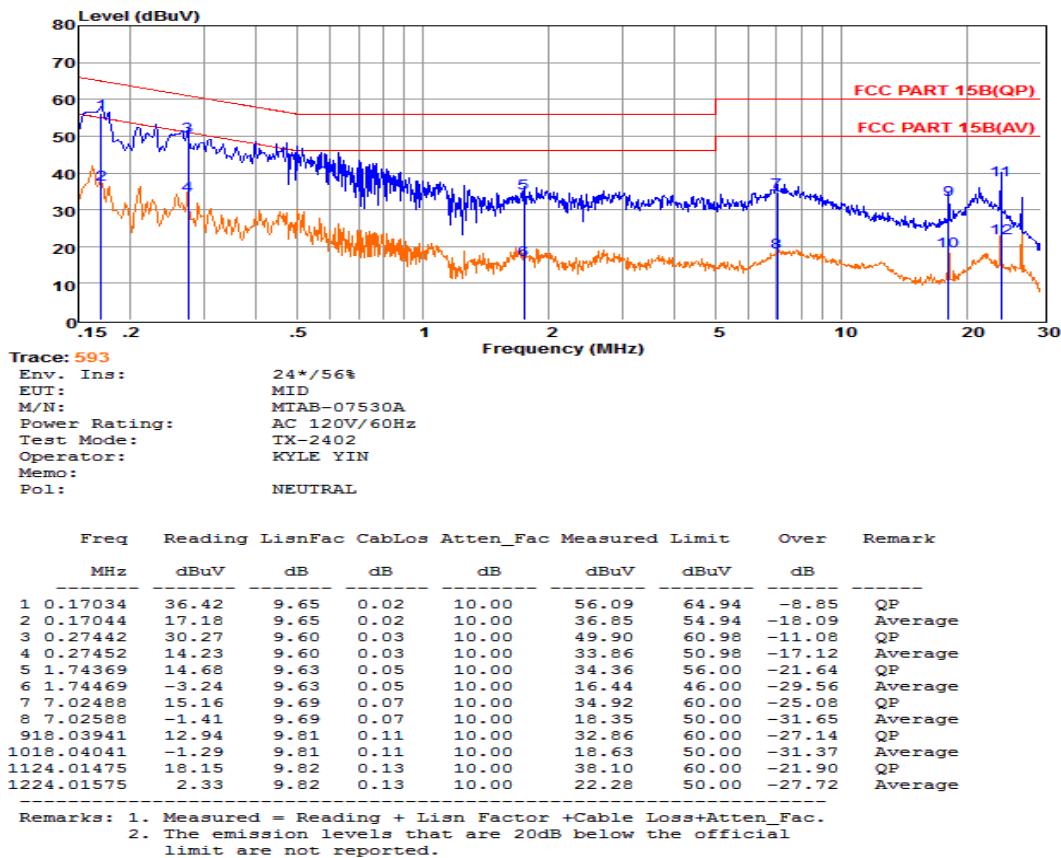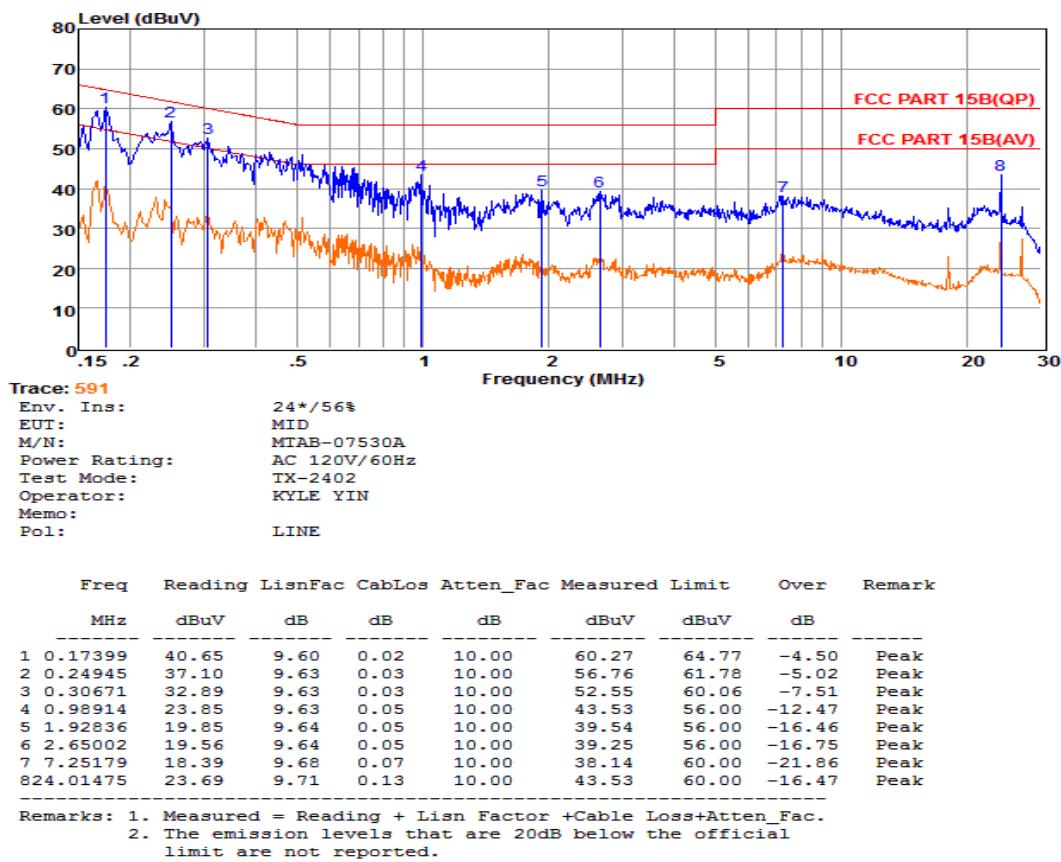

## 6.7. Antenna Requirements

### 6.7.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 6.7.2. Antenna Connector Construction

The SMD antenna used for transmitting is 1.5dBi, and the antenna is on PCB board and no consideration of replacement. Please see EUT photo for details.

### 6.7.3. Results: Compliance.

## Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	3 MHz
Video bandwidth:	3 MHz
Trace-Mode:	Max hold

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal Bluetooth devices, the GFSK mode is used.

## Limits:

FCC	IC
Antenna Gain	
6dBi	

T <sub>nom</sub>	V <sub>nom</sub>	Lowest channel 2402 MHz	Middle channel 2440 MHz	Highest channel 2480 MHz
Conducted power [dBm] Measured with GFSK modulation		6.231	5.861	5.985
Radiated power [dBm] Measured with GFSK modulation		7.681	7.331	7.465
Gain [dBi] Calculated		1.45	1.47	1.48
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		

**Result: -/-**

-----THE END OF REPORT-----