



Band:	GSM 1900	Test Mode:	GSM Link (GMSK)
-------	----------	------------	-----------------


Conducted Spurious Emission on Channel 512

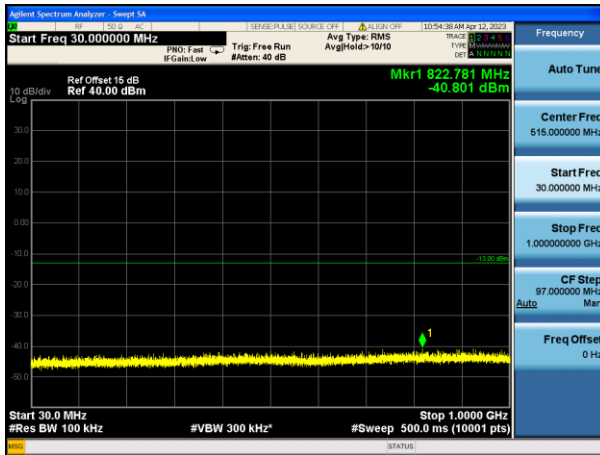

Conducted Spurious Emission on Channel 661


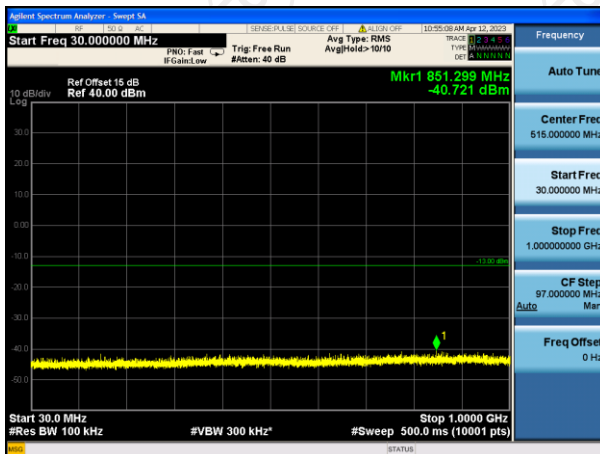


Conducted Spurious Emission on Channel 810


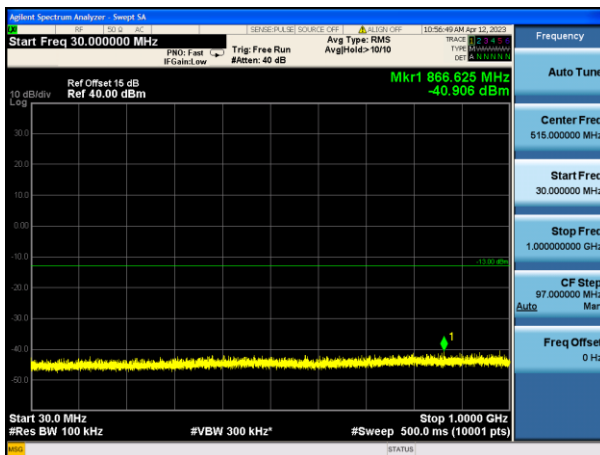


Band:	WCDMA Band V	Test Mode:	RMC 12.2Kbps Link (QPSK)
-------	--------------	------------	--------------------------



Conducted Spurious Emission on Channel 4132

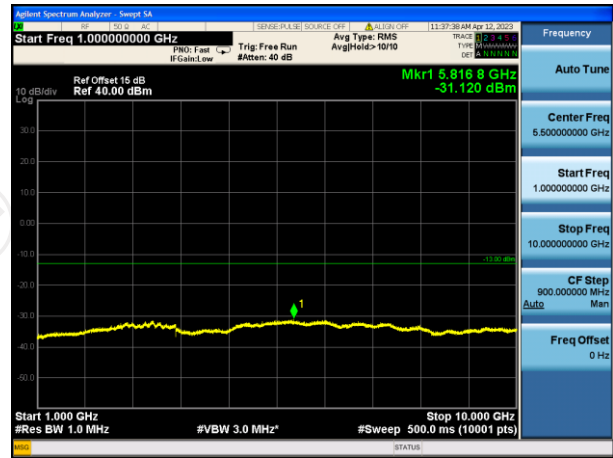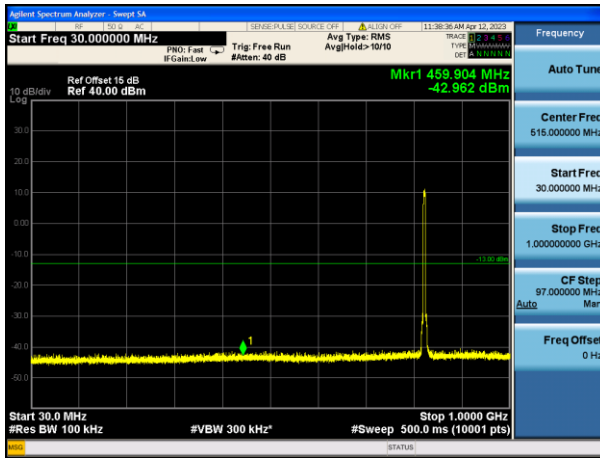

Conducted Spurious Emission on Channel 4182

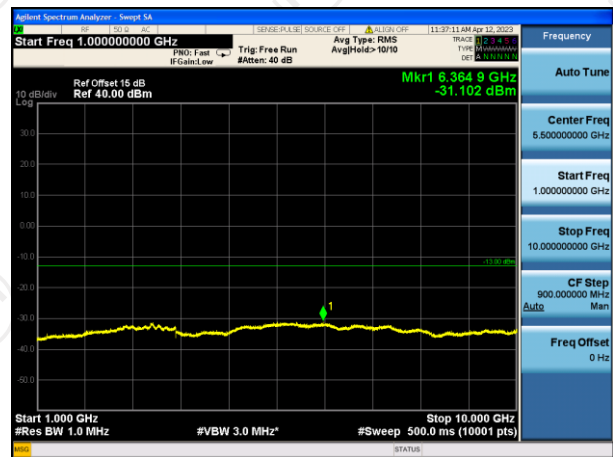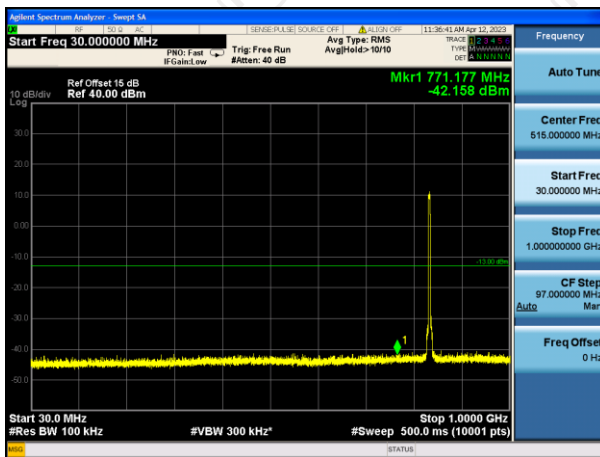


Conducted Spurious Emission on Channel 4233

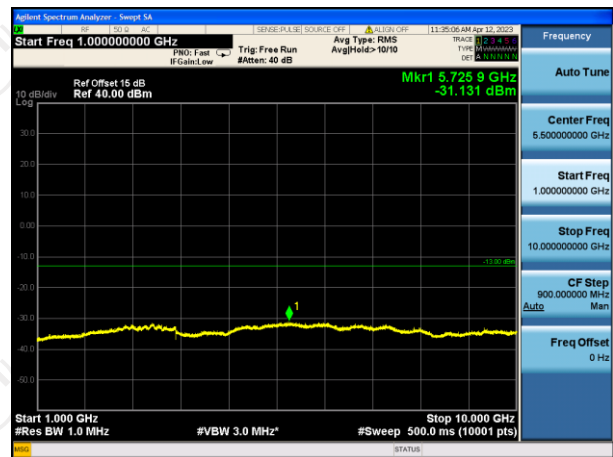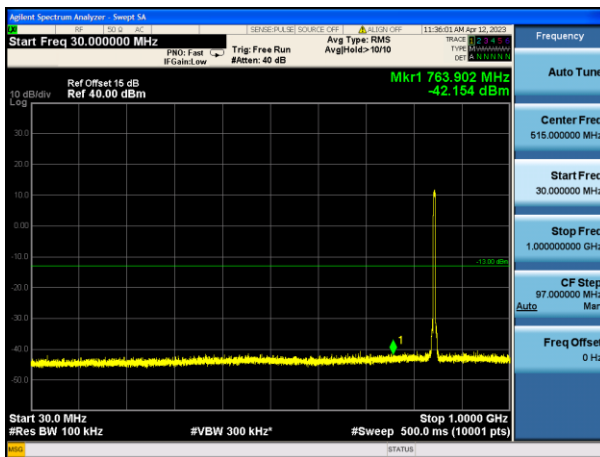


Band:	WCDMA Band II	Test Mode:	RMC 12.2Kbps Link (QPSK)
-------	---------------	------------	--------------------------


Conducted Spurious Emission on Channel 9262

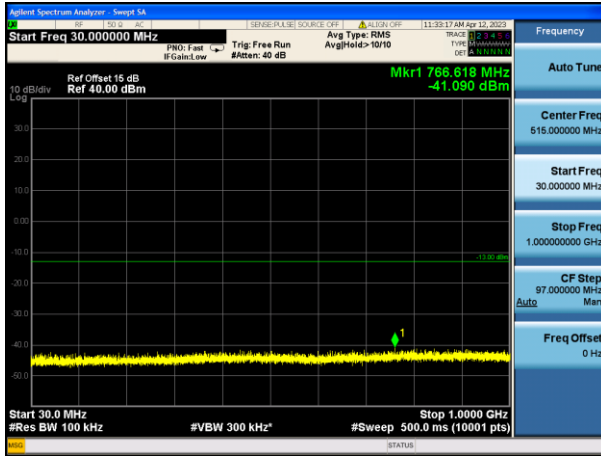

Conducted Spurious Emission on Channel 9400

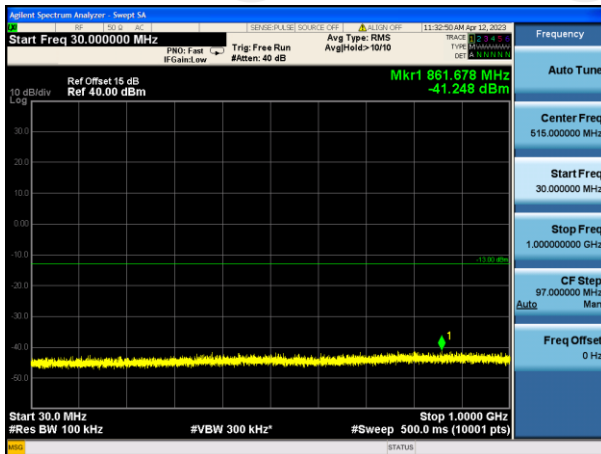

Conducted Spurious Emission on Channel 9538


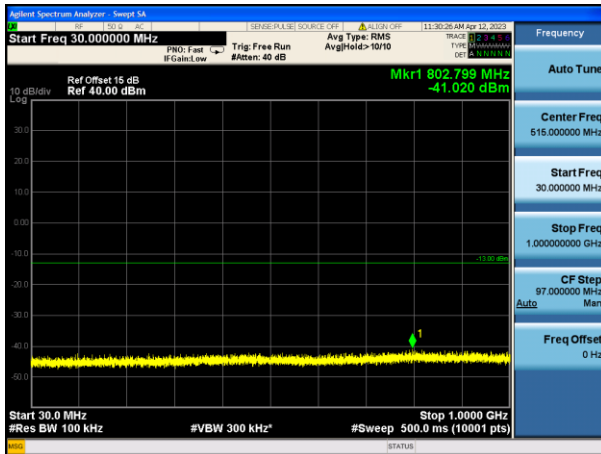


GSM1900(GSM) Conducted Spurious Emission for Below 1G					
Channel	RBW (KHz)	Test result (dBm)	RBW (MHz)	Calculate result (dBm)	Limit (-13dBm)
512	100	-40.80	1	-30.80	Pass
661	100	-40.72	1	-30.72	Pass
810	100	-40.91	1	-30.91	Pass
WCDMA Band II(RMC 12.2Kbps) Conducted Spurious Emission for Below 1G					
Channel	RBW (KHz)	Test result (dBm)	RBW (MHz)	Calculate result (dBm)	Limit (-13dBm)
9262	100	-41.09	1	-31.09	Pass
9400	100	-41.25	1	-31.25	Pass
9538	100	-41.02	1	-31.02	Pass
<p>Compensate 10dB is for Exchange rate of RBW                      Exchange rate of RBW = <math>10 \cdot \log_{10}(\text{Reference bandwidth}/\text{RBW at measurement}) = 10[\text{dB}]</math>                      where Reference bandwidth = 1 MHz</p>					

**Note:** Measurements were conducted in all GMSK modulation (GSM/GPRS/EGPRS) and the worst case Mode (GSM) was submitted only.

## 5.5. Effective Radiated Power and Effective Isotropic Radiated Power Measurement

### 5.5.1. Test Specification
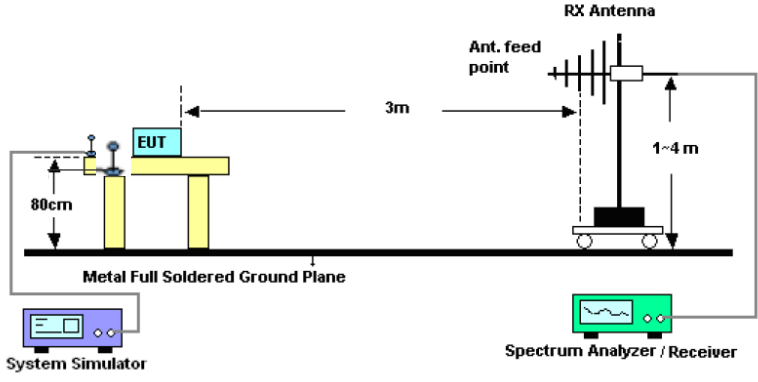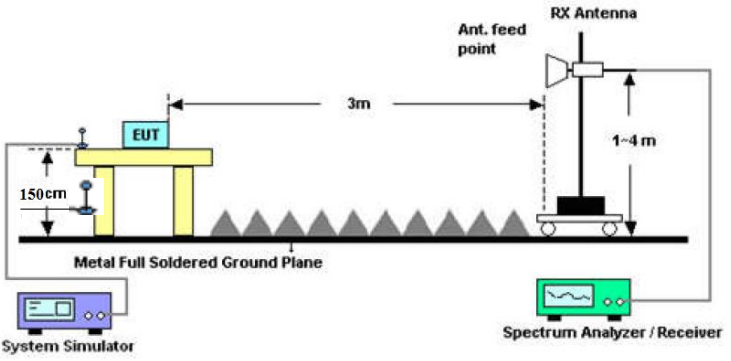
<b>Test Requirement:</b>	FCC part 22.913(a) and FCC part 24.232(c)																								
<b>Test Method:</b>	FCC KDB 971168 D01v03r01																								
<b>Receiver Setup:</b>	<table border="1"> <thead> <tr> <th></th> <th>GSM/GPRS/EDGE</th> <th>WCDMA/HSPA</th> </tr> </thead> <tbody> <tr> <td>SPAN</td> <td>500kHz</td> <td>10MHz</td> </tr> <tr> <td>RBW</td> <td>10kHz</td> <td>100kHz</td> </tr> <tr> <td>VBW</td> <td>30kHz</td> <td>300kHz</td> </tr> <tr> <td>Detector</td> <td>RMS</td> <td>RMS</td> </tr> <tr> <td>Trace</td> <td>Average</td> <td>Average</td> </tr> <tr> <td>Average Type</td> <td>Power</td> <td>Power</td> </tr> <tr> <td>Sweep Count</td> <td>100</td> <td>100</td> </tr> </tbody> </table>		GSM/GPRS/EDGE	WCDMA/HSPA	SPAN	500kHz	10MHz	RBW	10kHz	100kHz	VBW	30kHz	300kHz	Detector	RMS	RMS	Trace	Average	Average	Average Type	Power	Power	Sweep Count	100	100
		GSM/GPRS/EDGE	WCDMA/HSPA																						
	SPAN	500kHz	10MHz																						
	RBW	10kHz	100kHz																						
	VBW	30kHz	300kHz																						
	Detector	RMS	RMS																						
	Trace	Average	Average																						
Average Type	Power	Power																							
Sweep Count	100	100																							
<b>Limit:</b>	GSM850: 7W ERP PCS1900: 2W EIRP WCDMA Band V: 7W ERP WCDMA Band II: 2W EIRP																								
<b>Test Setup:</b>	From 30MHz to 1GHz  Above 1GHz 																								
<b>Test Procedure:</b>	1. The testing follows FCC KDB 971168 D01v03r01 Section 5.8. and ANSI / TIA-603-D-2010 Section																								

	<p>2.2.17.</p> <ol style="list-style-type: none"> <li>2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01v03.</li> <li>3. Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment.</li> <li>4. Replace the transmitter under test with a substitution antenna. The center of the antenna should be at the same location as the center of the antenna under test.</li> <li>5. Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. LOSS = Generator Output Power (dBm) – Analyzer reading (dBm)</li> <li>6. Determine the effective radiated output power at each angular position from the readings in steps 3) and 5) using the following equation: ERP (dBm) = LVL (dBm) + LOSS (dB)</li> <li>7. The maximum ERP is the maximum value determined in the preceding step.</li> <li>8. Calculating ERP: ERP (dBm) = Output Power (dBm) - Losses (dB) + Antenna Gain (dBd) Antenna Gain (dBd) = Antenna Gain (dBi) - 2.15 EIRP = ERP + 2.15</li> </ol>
<b>Test results:</b>	PASS

5.5.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Universal Radio Communication Tester	R&S	CMU200	110188	Jul. 04, 2023
Spectrum Analyzer	R&S	FSQ40	200061	Jul. 03, 2023
Signal Generator	HP	83623B	3614A00396	Feb. 24, 2024
Broadband Antenna	Schwarzbeck	VULB9163	340	Jul. 05, 2024
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jul. 05, 2024
Broadband Antenna	Schwarzbeck	VULB9163	412	Jul. 05, 2024
Horn Antenna	Schwarzbeck	BBHA 9120D	1201	Jul. 05, 2024
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Feb. 24, 2024
Coaxial cable	SKET	RC-18G-N-M	/	Feb. 24, 2024
Coaxial cable	SKET	RC_40G-K-M	/	Feb. 24, 2024
Antenna Mast	Keleto	RE-AM	/	/
EMI Test Software	Shurple Technology	EZ-EMC	/	/

5.5.3. Test Data

Test Result of ERP

GSM850 (GSM) Radiated Power ERP					
Horizontal Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	H	12.04	21.66	31.55	1.43
836.6	H	11.81	21.54	31.20	1.32
848.8	H	12.46	21.46	31.77	1.50
Vertical Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	H	11.03	21.66	30.54	1.13
836.6	H	11.47	21.54	30.86	1.22
848.8	H	11.66	21.46	30.97	1.25

GPRS 850 (1-solt) Radiated Power ERP					
Horizontal Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	H	11.89	21.66	31.40	1.38
836.6	H	11.46	21.54	30.85	1.22
848.8	H	11.18	21.46	30.49	1.12
Vertical Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	H	9.54	21.66	29.05	0.80
836.6	H	10.97	21.54	30.36	1.81
848.8	H	10.47	21.46	29.78	0.95



EGPRS 850 (1-solt) Radiated Power ERP					
Horizontal Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	H	8.60	21.66	28.11	0.65
836.6	H	8.64	21.54	28.03	0.64
848.8	H	8.18	21.46	27.49	0.56
Vertical Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	H	8.35	21.66	27.86	0.61
836.6	H	8.54	21.54	27.93	0.62
848.8	H	8.30	21.46	27.61	0.58

**Note:** All GPRS slot have been tested, but only the worst GPRS 1-slot show in this test item.

**Note:** All EGPRS slot have been tested, but only the worst EGPRS 1-slot show in this test item.

WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP					
Horizontal Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.4	H	1.88	21.66	21.39	0.14
836.6	H	2.54	21.54	21.93	0.16
846.6	H	2.47	21.46	21.78	0.15
Vertical Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.4	H	2.01	21.66	21.52	0.14
836.6	H	2.15	21.54	21.54	0.14
846.6	H	2.38	21.46	21.69	0.15

**Note:** \* ERP = LVL (dBm) + Correction Factor (dB) - 2.15

Correction Factor= S.G. Power - Cable loss + Antenna Gain- SPA. Reading

Test Result of EIRP

GSM1900 (GSM) Radiated Power EIRP					
Horizontal Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	H	7.53	21.66	29.19	0.83
1880.0	H	7.77	21.54	29.31	0.85
1909.8	H	7.92	21.46	29.38	0.87
Vertical Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	H	7.47	21.66	29.13	0.82
1880.0	H	7.75	21.54	29.29	0.85
1909.8	H	8.01	21.46	29.47	0.89

GPRS1900 (1-solt) Radiated Power EIRP					
Horizontal Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	H	7.31	21.66	28.97	0.79
1880.0	H	6.81	21.54	28.35	0.68
1909.8	H	7.32	21.46	28.78	0.76
Vertical Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	H	6.57	21.66	28.23	0.67
1880.0	H	6.81	21.54	28.35	0.68
1909.8	H	7.06	21.46	28.52	0.71

EGPRS1900 (1-slot) Radiated Power EIRP					
Horizontal Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	H	3.62	21.66	25.28	0.34
1880.0	H	3.85	21.54	25.39	0.35
1909.8	H	4.03	21.46	25.49	0.35
Vertical Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	H	3.75	21.66	25.41	0.35
1880.0	H	3.82	21.54	25.36	0.34
1909.8	H	4.07	21.46	25.53	0.36

**Note:** All GPRS slot have been tested, but only the worst GPRS 1-slot show in this test item

**Note:** All EGPRS slot have been tested, but only the worst EGPRS 1-slot show in this test item



WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP					
Horizontal Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.4	H	0.17	21.66	21.83	0.15
1880.0	H	0.14	21.54	21.68	0.15
1907.6	H	0.52	21.46	21.98	0.16
Vertical Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.4	H	0.27	21.66	21.93	0.15
1880.0	H	0.25	21.54	21.79	0.15
1907.6	H	0.44	21.46	21.90	0.16

**Note:** \* EIRP = LVL (dBm) + Correction Factor (dB)

Correction Factor = S.G. Power - Cable loss + Substitution Antenna Gain - SPA. Reading

## 5.6. Field Strength of Spurious Radiation Measurement

### 5.6.1. Test Specification
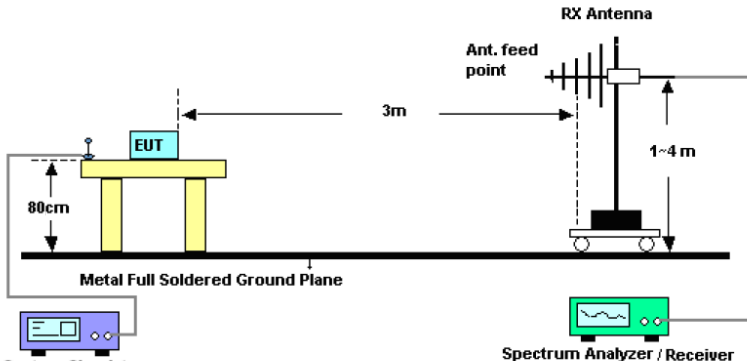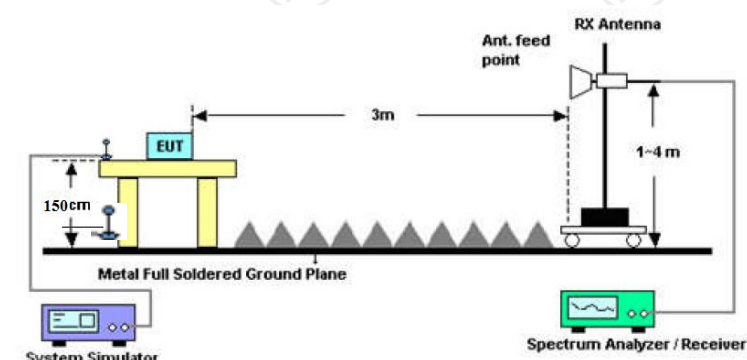
<b>Test Requirement:</b>	FCC part 22.917(a) and FCC part 24.238(a)
<b>Test Method:</b>	FCC KDB 971168 D01v03r01
<b>Operation mode:</b>	Refer to item 3.1
<b>Limit:</b>	-13dBm
<b>Test setup:</b>	<p>For 30MHz~1GHz</p>  <p>Above 1GHz</p> 
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The testing follows FCC KDB 971168 D01v03r01 Section 6 and ANSI / TIA-603-D-2010 Section 2.2.12.</li> <li>2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.</li> <li>3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.</li> <li>4. The table was rotated 360 degrees to determine the position of the highest spurious emission.</li> <li>5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.</li> <li>6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of</li> </ol>

	<p>maximum spurious emission.</p> <p>7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.</p> <p>8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.</p> <p>9. Taking the record of output power at antenna port.</p> <p>10. Repeat step 7 to step 8 for another polarization.</p> <p>11. <math>EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain</math></p> <p>12. <math>ERP (dBm) = EIRP - 2.15</math></p> <p>13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.</p> <p>14. The limit line is derived from <math>43 + 10\log(P)</math> dB below the transmitter power P(Watts)</p> <p><math>= P(W) - [43 + 10\log(P)] (dB)</math></p> <p><math>= [30 + 10\log(P)] (dBm) - [43 + 10\log(P)] (dB)</math></p> <p><math>= -13dBm.</math></p>
<b>Test results:</b>	PASS
<b>Remark:</b>	All modulations have been tested, but only the worst modulation show in this test item.

5.6.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Universal Radio Communication Tester	R&S	CMU200	110188	Jul. 04, 2023
Spectrum Analyzer	R&S	FSQ40	200061	Jul. 03, 2023
Signal Generator	HP	83623B	3614A00396	Feb. 24, 2024
Broadband Antenna	Schwarzbeck	VULB9163	340	Jul. 05, 2024
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jul. 05, 2024
Broadband Antenna	Schwarzbeck	VULB9163	412	Jul. 05, 2024
Horn Antenna	Schwarzbeck	BBHA 9120D	1201	Jul. 05, 2024
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Feb. 24, 2024
Coaxial cable	SKET	RC-18G-N-M	/	Feb. 24, 2024
Coaxial cable	SKET	RC_40G-K-M	/	Feb. 24, 2024
Antenna Mast	Keleto	RE-AM	/	/
EMI Test Software	Shurple Technology	EZ-EMC	/	/

### 5.6.3. Test Data

#### Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dB $\mu$ V/m)	Limit@3m (dB $\mu$ V/m)
--	--	--
--	--	--
--	--	--
--	--	--

**Note:** 1. Emission Level=Reading+ Cable loss+Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

<b>Band</b>	<b>GSM 850</b>	<b>Test channel:</b>	<b>Lowest</b>
<b>Test mode:</b>		<b>Temperature :</b>	<b>25°C</b>
		<b>Relative Humidity:</b>	<b>56%</b>

**Note:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1648.4	Vertical	-59.16	23.12	-36.04	-13.00	PASS
2472.6	V	-67.29	23.20	-44.09		
3296.8	V	-80.55	23.28	-57.27		
1648.4	Horizontal	-58.61	23.12	-35.49		
2472.6	H	-65.34	23.20	-42.14		
3296.8	H	-78.60	23.28	-55.32		

<b>Band</b>	<b>GSM 850</b>	<b>Test channel:</b>	<b>Middle</b>
<b>Test mode:</b>		<b>Temperature :</b>	<b>25°C</b>
		<b>Relative Humidity:</b>	<b>56%</b>

**Note:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1673.2	Vertical	-60.41	23.17	-37.24	-13.00	PASS
2509.8	V	-70.86	23.26	-47.60		
3346.4	V	-80.07	23.38	-56.69		
1673.2	Horizontal	-58.22	23.17	-35.05		
2509.8	H	-67.21	23.26	-43.95		
3346.4	H	-79.39	23.38	-56.01		

<b>Band</b>	<b>GSM 850</b>	<b>Test channel:</b>	<b>Highest</b>
<b>Test mode:</b>		<b>Temperature :</b>	<b>25°C</b>
		<b>Relative Humidity:</b>	<b>56%</b>

**Note:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1697.6	Vertical	-61.39	23.23	-38.16	-13.00	PASS
2546.4	V	-71.55	23.32	-48.23		
3395.2	V	-78.59	23.44	-55.15		
1697.6	Horizontal	-57.28	23.23	-34.05		
2546.4	H	-66.52	23.32	-43.20		
3395.2	H	-81.33	23.44	-58.09		



<b>Band</b>	<b>PCS 1900</b>	<b>Test channel:</b>	<b>Lowest</b>
<b>Test mode:</b>		<b>Temperature :</b>	<b>25°C</b>
		<b>Relative Humidity:</b>	<b>56%</b>

**Note:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3700.4	Vertical	-66.66	23.49	-43.17	-13.00	PASS
5550.6	V	-75.54	23.75	-51.79		
7400.8	V	-81.15	23.89	-57.26		
3700.4	Horizontal	-63.86	23.49	-40.37		
5550.6	H	-70.65	23.75	-46.90		
7400.8	H	-79.46	23.89	-55.57		

<b>Band</b>	<b>PCS 1900</b>	<b>Test channel:</b>	<b>Middle</b>
<b>Test mode:</b>		<b>Temperature :</b>	<b>25°C</b>
		<b>Relative Humidity:</b>	<b>56%</b>

**Note:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3760.0	Vertical	-66.99	23.58	-43.41	-13.00	PASS
5640.0	V	-76.51	23.85	-52.66		
7520.0	V	-75.08	23.99	-51.09		
3760.0	Horizontal	-63.61	23.58	-40.03		
5640.0	H	-76.54	23.85	-52.69		
7520.0	H	-80.18	23.99	-56.19		

<b>Band</b>	<b>PCS 1900</b>	<b>Test channel:</b>	<b>Highest</b>
<b>Test mode:</b>		<b>Temperature :</b>	<b>25°C</b>
		<b>Relative Humidity:</b>	<b>56%</b>

**Note:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3819.6	Vertical	-65.34	23.64	-41.70	-13.00	PASS
5729.4	V	-74.67	23.93	-50.74		
7639.2	V	-81.68	24.08	-57.60		
3819.6	Horizontal	-63.10	23.64	-39.46		
5729.4	H	-69.66	23.93	-45.73		
7639.2	H	-80.44	24.08	-56.36		

<b>Band</b>	<b>WCDMA Band V</b>	<b>Test channel:</b>	<b>Lowest</b>
<b>Test mode:</b>	<b>RMC 12.2Kbps Link (QPSK)</b>	<b>Temperature :</b>	<b>25°C</b>
		<b>Relative Humidity:</b>	<b>56%</b>

**Note:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1652.8	Vertical	-72.14	23.14	-49.00	-13.00	PASS
2479.2	V	-80.07	23.23	-56.84		
3305.6	V	-79.26	23.34	-55.92		
1652.8	Horizontal	-69.28	23.14	-46.14		
2479.2	H	-79.11	23.23	-55.88		
3305.6	H	-80.03	23.34	-56.69		

<b>Band</b>	<b>WCDMA Band V</b>	<b>Test channel:</b>	<b>Middle</b>
<b>Test mode:</b>	<b>RMC 12.2Kbps Link (QPSK)</b>	<b>Temperature :</b>	<b>25°C</b>
		<b>Relative Humidity:</b>	<b>56%</b>

**Note:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1673.2	Vertical	-70.16	23.17	-46.99	-13.00	PASS
2509.8	V	-79.22	23.26	-55.96		
3346.4	V	-79.95	23.38	-56.57		
1673.2	Horizontal	-68.18	23.17	-45.01		
2509.8	H	-82.14	23.26	-58.88		
3346.4	H	-79.48	23.38	-56.10		

<b>Band</b>	<b>WCDMA Band V</b>	<b>Test channel:</b>	<b>Highest</b>
<b>Test mode:</b>	<b>RMC 12.2Kbps Link (QPSK)</b>	<b>Temperature :</b>	<b>25°C</b>
		<b>Relative Humidity:</b>	<b>56%</b>

**Note:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1693.2	Vertical	-73.96	23.20	-50.76	-13.00	PASS
2539.8	V	-80.33	23.29	-57.04		
3386.4	V	-83.54	23.42	-60.12		
1693.2	Horizontal	-70.34	23.20	-47.14		
2539.8	H	-79.53	23.29	-56.24		
3386.4	H	-83.39	23.42	-59.97		

<b>Band</b>	<b>WCDMA Band II</b>	<b>Test channel:</b>	<b>Lowest</b>
<b>Test mode:</b>	<b>RMC 12.2Kbps Link (QPSK)</b>	<b>Temperature :</b>	<b>25°C</b>
		<b>Relative Humidity:</b>	<b>56%</b>

**Note:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3704.8	Vertical	-69.60	23.53	-46.07	-13.00	PASS
5557.2	V	-82.71	23.78	-58.93		
7409.6	V	-83.63	23.92	-59.71		
3704.8	Horizontal	-71.79	23.53	-48.26		
5557.2	H	-79.95	23.78	-56.17		
7409.6	H	-83.54	23.92	-59.62		

<b>Band</b>	<b>WCDMA Band II</b>	<b>Test channel:</b>	<b>Middle</b>
<b>Test mode:</b>	<b>RMC 12.2Kbps Link (QPSK)</b>	<b>Temperature :</b>	<b>25°C</b>
		<b>Relative Humidity:</b>	<b>56%</b>

**Note:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3760.0	Vertical	-80.99	23.58	-57.41	-13.00	PASS
5640.0	V	-83.58	23.85	-59.73		
7520.0	V	-73.03	23.99	-49.04		
3760.0	Horizontal	-79.16	23.58	-55.58		
5640.0	H	-83.45	23.85	-59.60		
7520.0	H	-80.44	23.99	-56.45		


<b>Band</b>	<b>WCDMA Band II</b>	<b>Test channel:</b>	<b>Highest</b>
<b>Test mode:</b>	<b>RMC 12.2Kbps Link (QPSK)</b>	<b>Temperature :</b>	<b>25°C</b>
		<b>Relative Humidity:</b>	<b>56%</b>

**Note:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3815.2	Vertical	-73.13	23.62	-49.51	-13.00	PASS
5722.8	V	-84.52	23.90	-60.62		
7630.4	V	-85.70	24.05	-61.65		
3815.2	Horizontal	-72.02	23.62	-48.40		
5722.8	H	-79.52	23.90	-55.62		
7630.4	H	-84.79	24.05	-60.74		

## 5.7. Frequency Stability Measurement

### 5.7.1. Test Specification
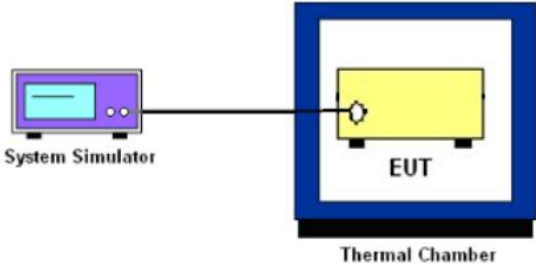
<b>Test Requirement:</b>	FCC Part 2.1055 ; FCC Part 22.355 ; FCC Part 24.235
<b>Test Method:</b>	FCC KDB 971168 D01v03r01
<b>Operation mode:</b>	Refer to item 3.1
<b>Limit:</b>	FCC Part 22.355 : $\pm 2.5$ ppm FCC Part 24.235 : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.
<b>Test Setup:</b>	 <p>The diagram shows a purple 'System Simulator' connected by a cable to a yellow 'EUT' (Equipment Under Test) which is housed inside a blue 'Thermal Chamber'.</p>
<b>Test Procedure:</b>	<p><b>Test Procedures for Temperature Variation</b></p> <ol style="list-style-type: none"> <li>1. The testing follows FCC KDB 971168 D01v03r01 Section 9.0.</li> <li>2. The EUT was set up in the thermal chamber and connected with the system simulator.</li> <li>3. With power OFF, the temperature was decreased to <math>-30^{\circ}\text{C}</math> and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.</li> <li>4. With power OFF, the temperature was raised in <math>10^{\circ}\text{C}</math> steps up to <math>50^{\circ}\text{C}</math>. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.</li> </ol> <p><b>Test Procedures for Voltage Variation</b></p> <ol style="list-style-type: none"> <li>1. The testing follows FCC KDB 971168 D01v03r01 Section 9.0.</li> <li>2. The EUT was placed in a temperature chamber at <math>25\pm 5^{\circ}\text{C}</math> and connected with the system simulator.</li> <li>3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.</li> <li>4. The variation in frequency was measured for the worst case.</li> </ol>
<b>Test Result:</b>	PASS
<b>Remark:</b>	All three channels of all modulations have been tested, but only the worst channel and the worst modulation show in this test item.

**5.7.2. Test Instruments**

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Universal Radio Communication Tester	R&S	CMU200	110188	Jul. 04, 2023
Programable tempratuce and humidity chamber	JQ	JQ-2000	/	Jul. 04, 2023
DC power supply	Kingrang	KR3005K	/	Jul. 04, 2023
Combiner Box	AT890-RFB	Ascentest	/	/

5.7.3. Test Data

Test Result of Temperature Variation

<b>Band :</b>	<b>GSM 850</b>	<b>Channel:</b>	<b>190</b>
<b>Limit (ppm) :</b>	<b>2.5</b>	<b>Frequency:</b>	<b>836.6MHz</b>
Temperature (°C)	Deviation (ppm)		Result
50	0.015		PASS
40	0.012		
30	0.010		
20	0.013		
10	0.017		
0	0.017		
-10	0.011		
-20	0.016		
-30	0.014		

<b>Band :</b>	<b>GSM 1900</b>	<b>Channel:</b>	<b>661</b>
<b>Limit (ppm) :</b>	<b>Note</b>	<b>Frequency:</b>	<b>1880MHz</b>
Temperature (°C)	Deviation (ppm)		Result
50	0.047		PASS
40	0.018		
30	0.019		
20	0.017		
10	0.020		
0	0.021		
-10	0.017		
-20	0.019		
-30	0.020		

**Note:** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Band :	WCDMA Band V	Channel:	4182
Limit (ppm) :	2.5	Frequency:	836.4MHz
Temperature (°C)	RMC 12.2Kbps Deviation (ppm)		Result
50	0.018		PASS
40	0.019		
30	0.017		
20	0.014		
10	0.020		
0	0.015		
-10	0.015		
-20	0.019		
-30	0.014		

Band :	WCDMA Band II	Channel:	9400
Limit (ppm) :	Note	Frequency:	1880MHz
Temperature (°C)	RMC 12.2Kbps Deviation (ppm)		Result
50	0.016		PASS
40	0.015		
30	0.017		
20	0.016		
10	0.019		
0	0.020		
-10	0.016		
-20	0.017		
-30	0.019		

**Note:** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

**Test Result of Voltage Variation**

Band & Channel	Mode	Voltage (Volt)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH190	GSM	4.18	+0.015	2.5	PASS
		3.80	+0.016		
		BEP	+0.017		
GSM 1900 CH661	GSM	4.18	+0.021	(Note 3.)	
		3.80	+0.022		
		BEP	+0.018		
WCDMA Band V CH4183	RMC 12.2Kbps	4.18	-0.013	2.5	
		3.80	-0.016		
		BEP	-0.018		
WCDMA Band II CH9400	RMC 12.2Kbps	4.18	-0.018	(Note 3.)	
		3.80	-0.016		
		BEP	-0.020		

**Note:**

1. Normal Voltage = 3.8V.
2. Battery End Point (BEP) = 3.42V.
3. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



## Appendix B: Photographs of Test Setup

Refer to the test report No. TCT230403E011

## Appendix C: Photographs of EUT

Refer to the test report No. TCT230403E011

**\*\*\*\*\*END OF REPORT\*\*\*\*\***