

FCC PART 90

TEST REPORT

For

ZTE TRUNKING TECHNOLOGY CORPORATION

4/F, R&D Building 1, ZTE Industrial Park, LiuXian Road, Xili, Nanshan District,
Shenzhen, P. R. China

FCC ID: 2AEKCPH5X0VHF

Report Type: Original Report	Product Type: Two way radio
Test Engineer: Simon Wang	<i>Simon wang</i>
Report Number: RSZ150625007-00	
Report Date: 2015-07-22	
Reviewed By: Jimmy Xiao RF Engineer	<i>Jimmy xiao</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §1.1307(b) & §2.1093 - RF EXPOSURE	8
APPLICABLE STANDARD	8
FCC §2.1046 & §90.205 - RF Output Power	9
APPLICABLE STANDARD	9
TEST PROCEDURE	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST DATA	9
FCC §2.1047 & §90.207 - MODULATION CHARACTERISTIC	11
APPLICABLE STANDARD	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST PROCEDURE	11
TEST DATA	11
FCC §2.1049 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK	16
APPLICABLE STANDARD	16
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST PROCEDURE	17
TEST DATA	18
FCC §2.1051 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	23
APPLICABLE STANDARD	23
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST PROCEDURE	24
TEST DATA	24
FCC §2.1053 & §90.210 - RADIATED SPURIOUS EMISSIONS	27
APPLICABLE STANDARD	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST PROCEDURE	27
TEST DATA	28
FCC §2.1055 & §90.213- FREQUENCY STABILITY	30
APPLICABLE STANDARD	30
TEST EQUIPMENT LIST AND DETAILS.....	30
TEST PROCEDURE	30

TEST DATA30

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR.....32

 APPLICABLE STANDARD32

 TEST EQUIPMENT LIST AND DETAILS.....32

 TEST PROCEDURE32

 TEST DATA33

PRODUCT SIMILARITY DECLARATION LETTER.....36

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *ZTE TRUNKING TECHNOLOGY CORPORATION*'s product, model number: *PH500 VHF (FCC ID: 2AEKCPH5X0VHF)* or the "EUT" in this report was a *Two way radio*, which the main EUT was measured approximately: 13.5 cm (L) × 6.2 cm (W) × 3.7 cm (H), rated with input voltage: DC 7.4 V battery or 12V from adapter.

Adapter Information:

Model: AC100U

Input: 100~240V, 50/60Hz, 0.45A

Output: 12V, 1.0A

Note: This series products model: PH520 VHF and PH500 VHF are identical schematics, the difference among them is PH500 VHF have no screen and PH520 VHF have screen, and model PH500 VHF was selected for fully testing, the detailed information can be referred to the attached declaration letter that stated and guaranteed by the applicant.

** All measurement and test data in this report was gathered from production sample serial number: 1505545 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2015-06-25.*

Objective

This test report is prepared on behalf of *ZTE TRUNKING TECHNOLOGY CORPORATION* in accordance with Part 2 and Part 90 of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No related submittal(s)

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA 603-D and ANSI 63.4-2009.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.


Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
N/A	50 ohm Load	N/A	N/A

Block Diagram of Test Setup

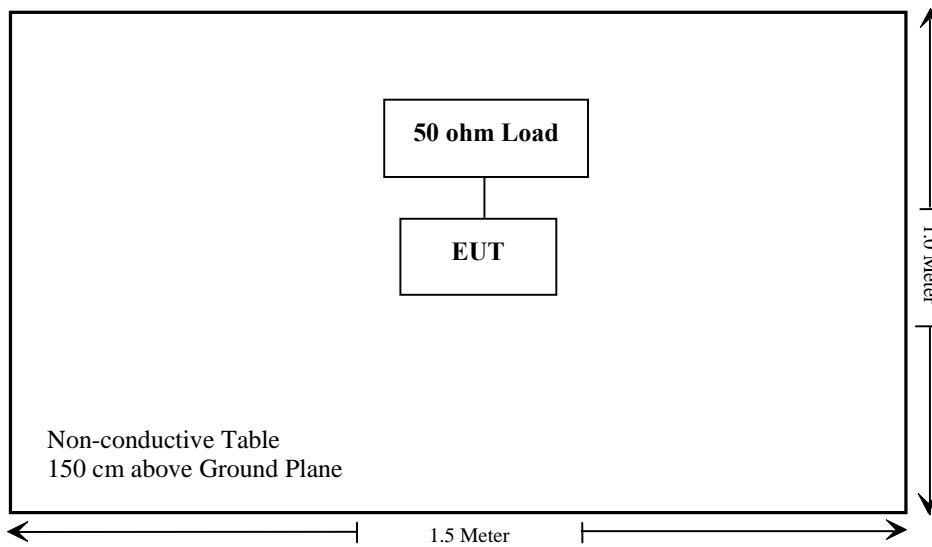

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§1.1307(b);§2.1093	RF Exposure	Compliance
§2.1046;§90.205	RF Output Power	Compliance
§2.1047;§90.207	Modulation Characteristic	Compliance
§2.1049;§90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance
§2.1051;§90.210	Spurious Emission at Antenna Terminal	Compliance
§2.1053;§90.210	Spurious Radiated Emissions	Compliance
§2.1055;§90.213	Frequency Stability	Compliance
§90.214	Transient Frequency Behavior	Compliance

FCC §1.1307(b) & §2.1093 - RF EXPOSURE

Applicable Standard

According to FCC §1.1307(b) and §2.1093, portable device operates Part 90 should be subjected to routine environmental evaluation for RF exposure prior or equipment authorization or use.

Result: Compliance.

Please refer to SAR Report Number: RSZ150625007-20A

FCC §2.1046 & §90.205 - RF Output Power

Applicable Standard

FCC §2.1046 and §90.205

Test Procedure

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

R B/W	Video B/W
100 kHz	300 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2015-04-27	2016-04-26
HP Agilent	RF Communication test set	8920A	3325U00859	2015-06-03	2016-06-03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2015-07-02.

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table.

Modulation	Channel Separation (kHz)	Frequency (MHz)	Power Level	Output Power (dBm)	Output Power (W)	Result
Analog	12.5	136.0125	High	37.10	5.13	Pass
			Low	30.51	1.12	Pass
	12.5	155.0125	High	37.13	5.16	Pass
			Low	30.37	1.09	Pass
	12.5	173.9875	High	37.20	5.25	Pass
			Low	30.00	1.00	Pass
Digital	12.5	136.0125	High	37.36	5.45	Pass
			Low	30.51	1.12	Pass
	12.5	155.0125	High	37.34	5.42	Pass
			Low	30.33	1.08	Pass
	12.5	173.9875	High	37.10	5.13	Pass
			Low	29.58	0.91	Pass

Note: The rated high power is 5W. The limit of the high output power is 4W-6W.
 The rated low power is 1W. The limit of the low output power is 0.8W-1.2W.

FCC §2.1047 & §90.207 - MODULATION CHARACTERISTIC

Applicable Standard

FCC§2.1047and §90.207:

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
HP	RF Communication Test Set	8920A	3438A05201	2015-06-14	2016-06-13
LEADER	MILLIVOLTMETER	LMV-181A	6041126	2015-06-09	2016-06-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

Test Method: TIA/EIA-603-D 2.2.3

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2015-07-03.

Test Mode: Transmitting


Result: Compliance.

Analog Modulation:

MODULATION LIMITING

Carrier Frequency: 155.0125 MHz, Channel Separation=12.5 kHz


Audio Input Level [dB]	Frequency Deviation (kHz)			Limit [kHz]
	@ 300 Hz	@ 1kHz	@ 3 kHz	
20.0	1.652	1.852	2.054	2.5
15.0	1.510	1.834	2.050	2.5
10.0	1.256	1.805	2.047	2.5
5.0	0.776	1.740	2.001	2.5
0.0	0.459	1.500	1.904	2.5
-5.0	0.295	1.113	1.857	2.5
-10.0	0.210	0.657	1.725	2.5
-15.0	0.152	0.411	1.202	2.5
-20.0	0.114	0.275	0.734	2.5

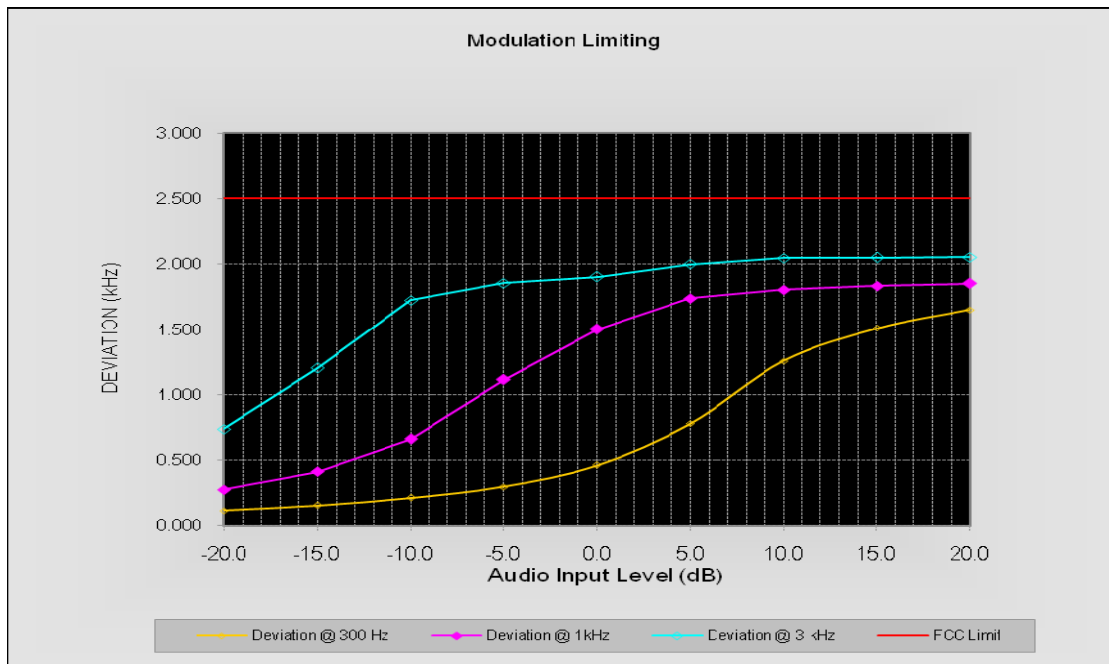

Audio Frequency Response

Carrier Frequency: 155.0125 MHz, Channel Separation=12.5 kHz


Audio Frequency (Hz)	Response Attenuation (dB)
300	-10.01
400	-7.01
500	-5.35
600	-4.01
700	-2.81
800	-1.70
900	-0.69
1000	0.00
1200	1.70
1400	2.85
1600	3.87
1800	4.90
2000	6.07
2100	6.62
2200	7.31
2300	7.92
2400	8.33
2500	8.78
2600	9.25
2700	9.57
2800	9.83
2900	9.80
3000	9.70

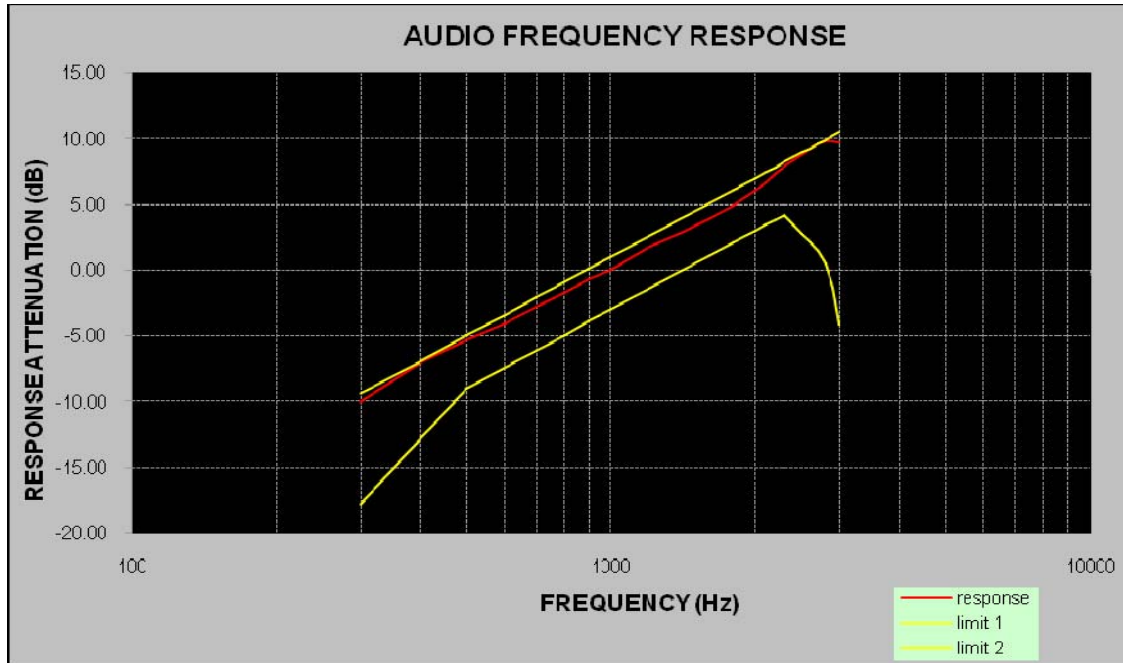

Audio Frequency Low Pass Filter Response

Carrier Frequency: 155.0125 MHz, Channel Separation=12.5 kHz

Audio Frequency (kHz)	Response Attenuation (dB)	FCC Limit (dB)
1.0	/	/
3.0	-10.1	0.0
4.0	-18.2	-12.5
5.0	-29.8	-22.2
6.0	-39.6	-30.1
7.0	-48.8	-36.8
8.0	-50.2	-42.6
9.0	-56.0	-47.7
10.0	-62.6	-52.3
12.0	-68.7	-60.2
14.0	-76.9	-66.9
16.0	-80.4	-72.7
18.0	-88.5	-77.8
20.0	-89.0	-82.5

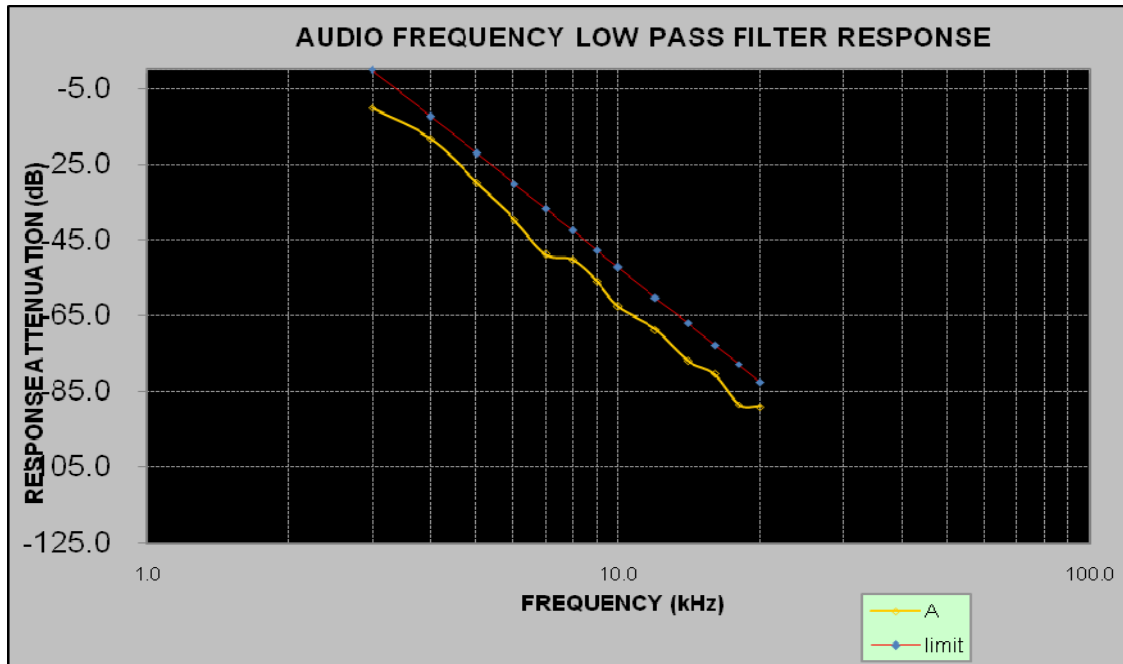

FCC §2.1049 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK

Applicable Standard

FCC §2.1049, §90.209 and §90.210

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 , 0dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least $7.27 (f_d - 2.88 \text{ kHz})$ dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2015-04-27	2016-04-26
HP	RF Communication Test Set	8920A	3438A05201	2015-06-14	2016-06-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz and the spectrum was recorded in the frequency band ± 50 kHz from the carrier frequency.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2015-07-02.


Test Mode: Transmitting

Item	Frequency (MHz)	Channel space (kHz)	Power Level	99% Occupied Bandwidth (kHz)	26 dB Emissions Bandwidth (kHz)
Analog	155.0125	12.5	High	5.31	10.22
			Low	5.31	10.22
Digital	155.0125	12.5	High	7.41	8.92
			Low	7.41	8.92


**Analog Modulation:
99% Occupied Bandwidth & 26 dB Emissions Bandwidth 12.5 kHz, 155.0125 MHz (High Power)**

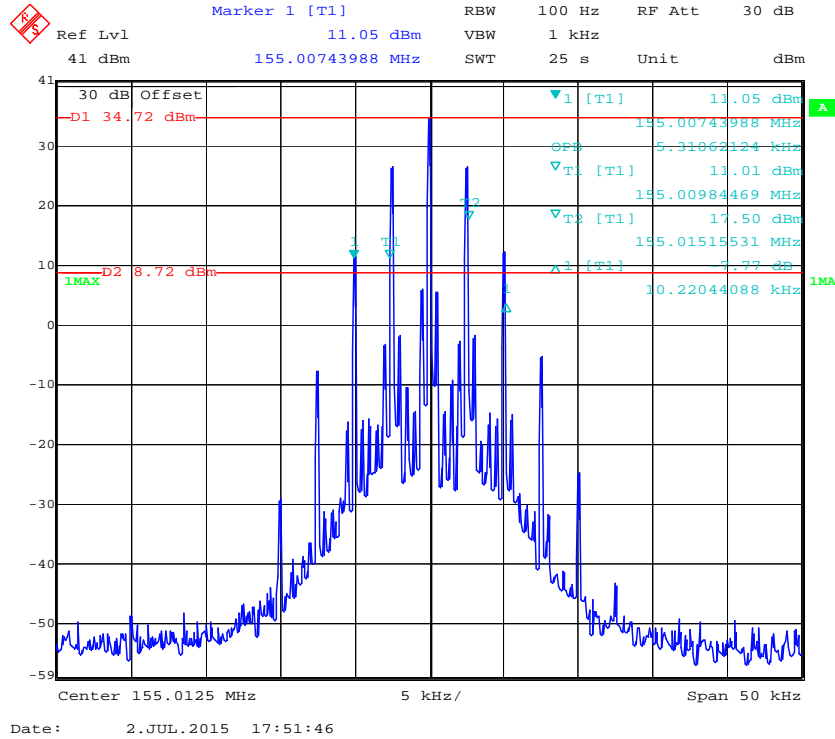


99% Occupied Bandwidth & 26 dB Emissions Bandwidth 12.5 kHz, 155.0125 MHz (Low Power)

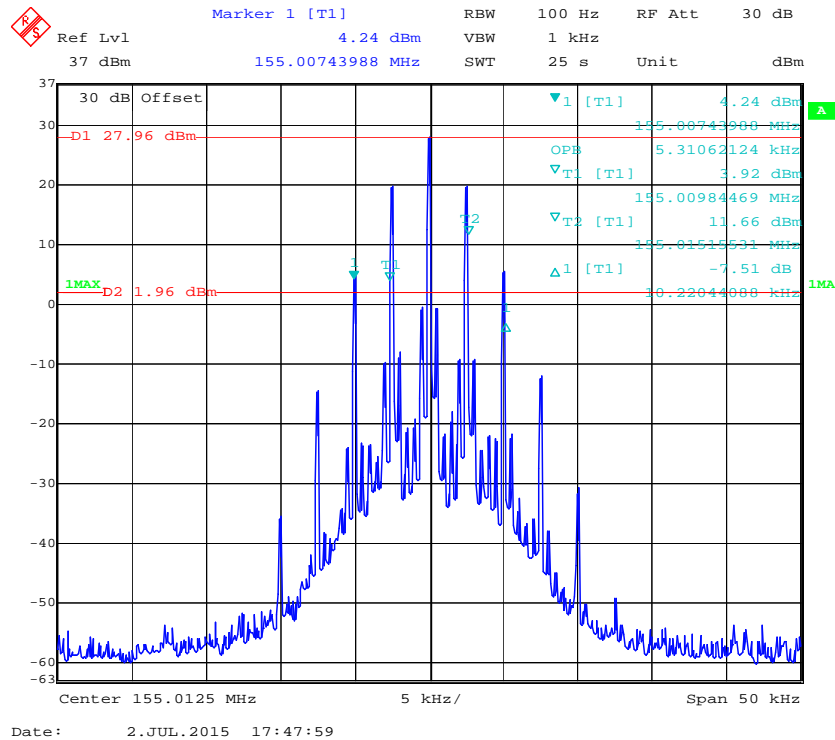


Emission Mask D with High Power 12.5 kHz, 155.0125 MHz

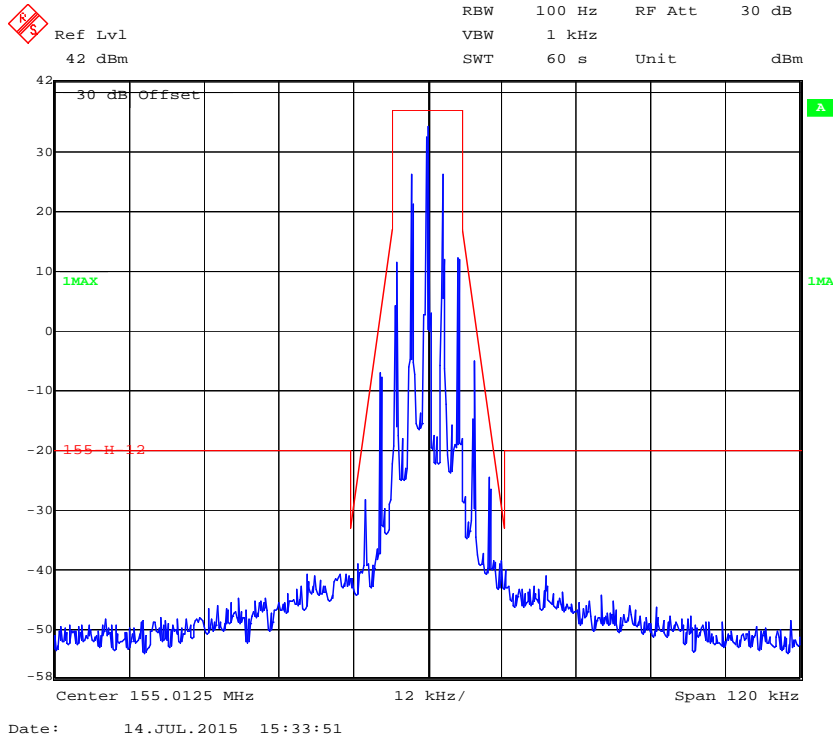


Emission Mask D with Low Power 12.5 kHz, 155.0125 MHz

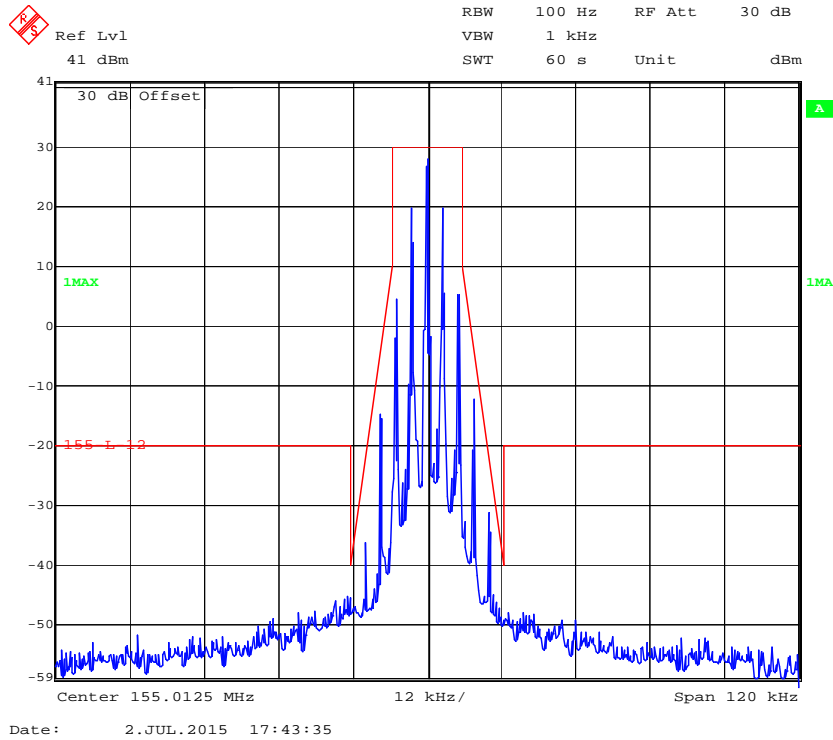


Digital Modulation:
99% Occupied Bandwidth & 26 dB Emissions Bandwidth 12.5 kHz, 155.0125 MHz (High Power)

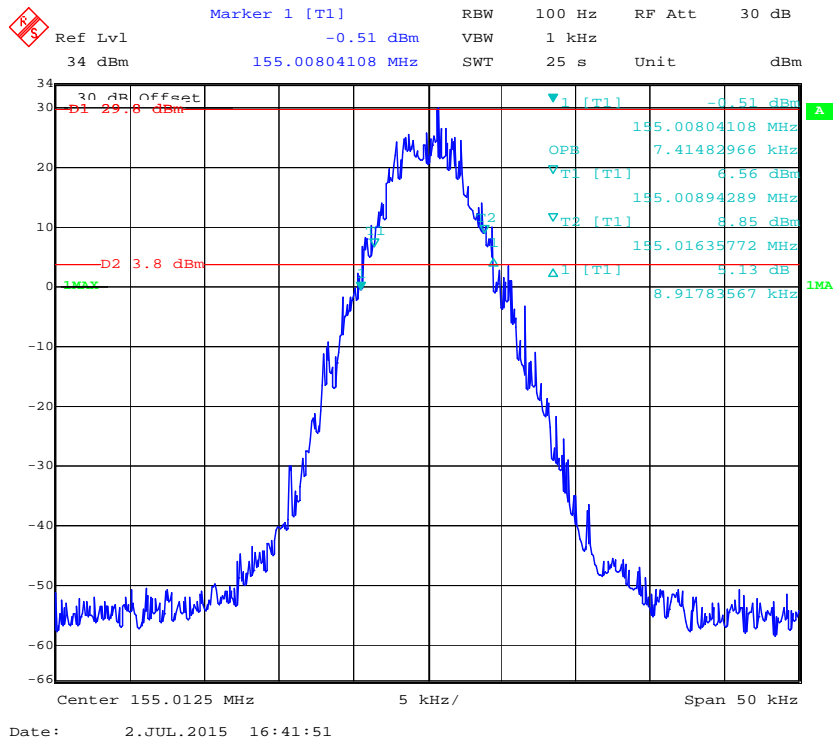


99% Occupied Bandwidth & 26 dB Emissions Bandwidth 12.5 kHz, 155.0125 MHz (Low Power)

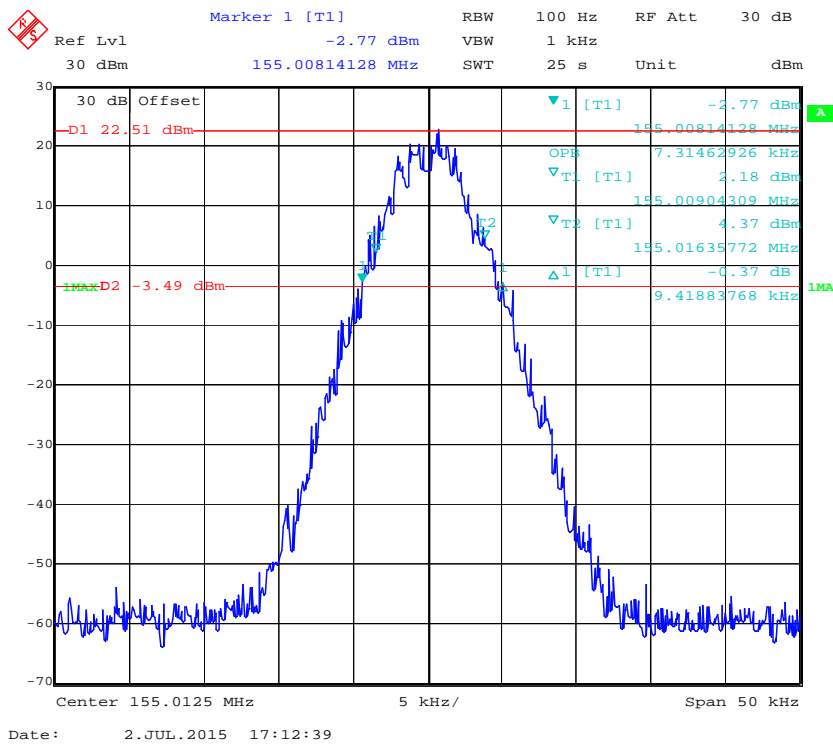

Emission Mask D with High Power 12.5 kHz, 155.0125 MHz

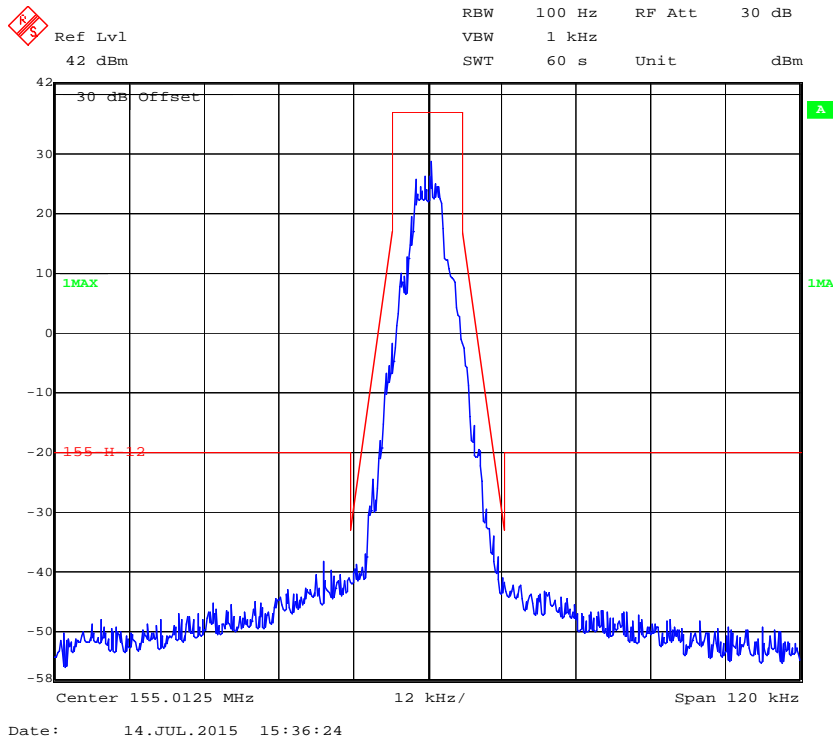

Emission Mask D with Low Power 12.5 kHz, 155.0125 MHz

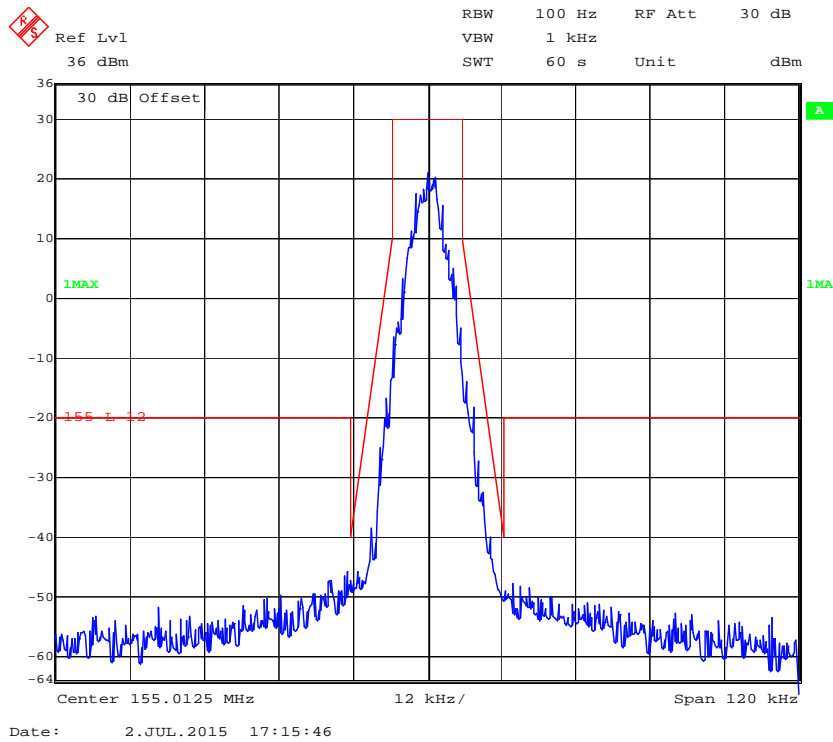

FCC §2.1051 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 , 0 dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least $7.27 (f_d - 2.88)$ dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.
- 4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2015-04-27	2016-04-26

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz, and 1MHz for above 1GHz. sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Simon Wang on 2015-07-02.

Test Mode: Transmitting


Please refer to the following plots.

Analog Modulation:

30 MHz – 1 GHz, Spacing Channel 12.5 kHz, 155.0125 MHz

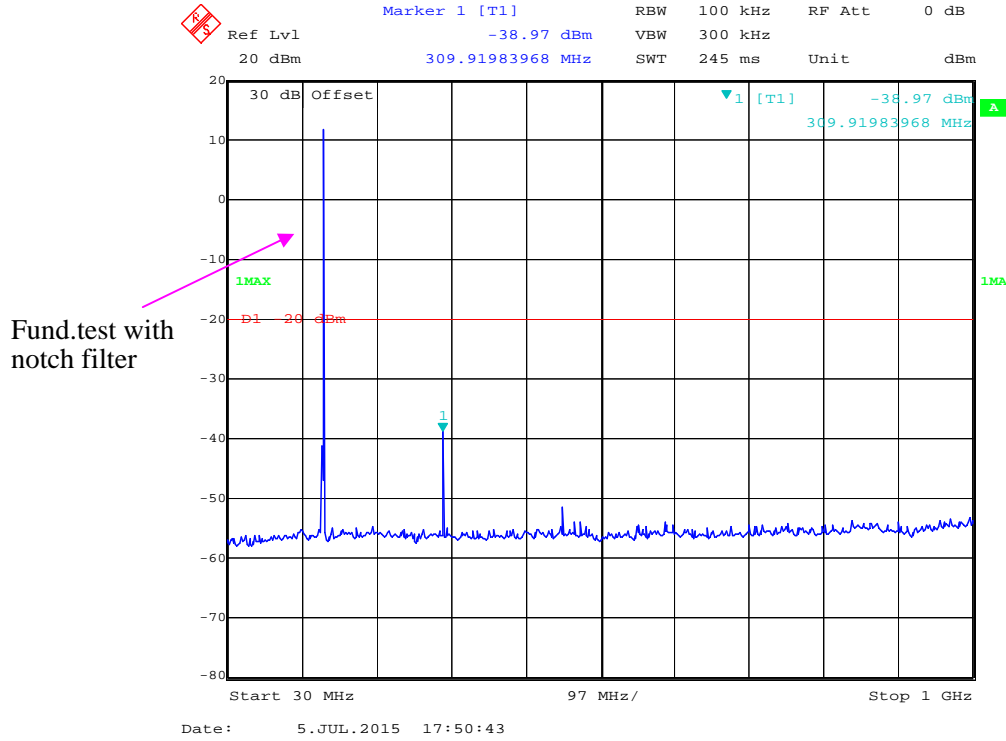


1 GHz – 2 GHz, Spacing Channel 12.5 kHz, 155.0125 MHz

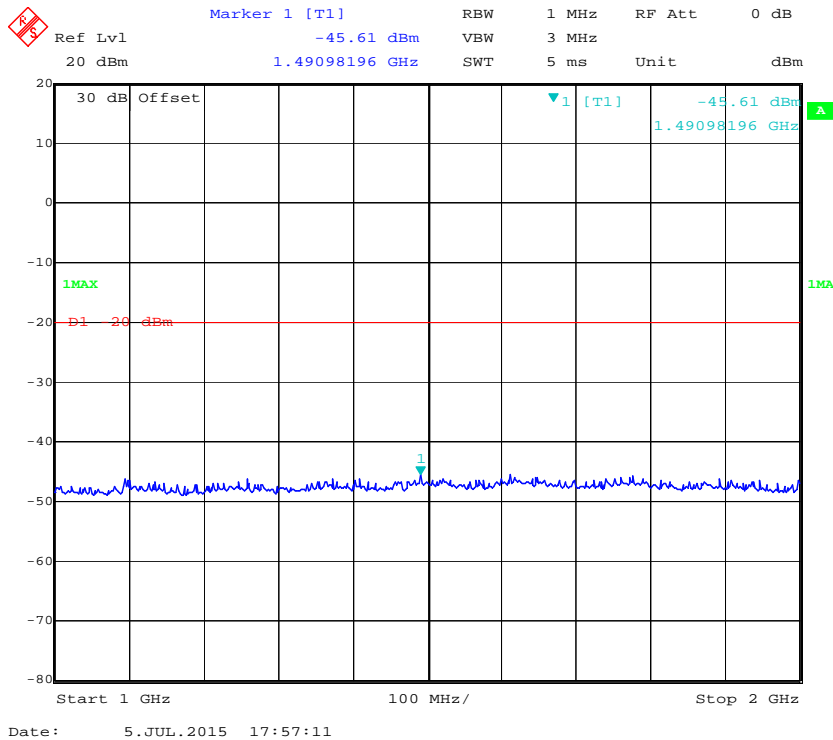


Digital Modulation:

30 MHz – 1 GHz, Spacing Channel 12.5 kHz, 155.0125 MHz

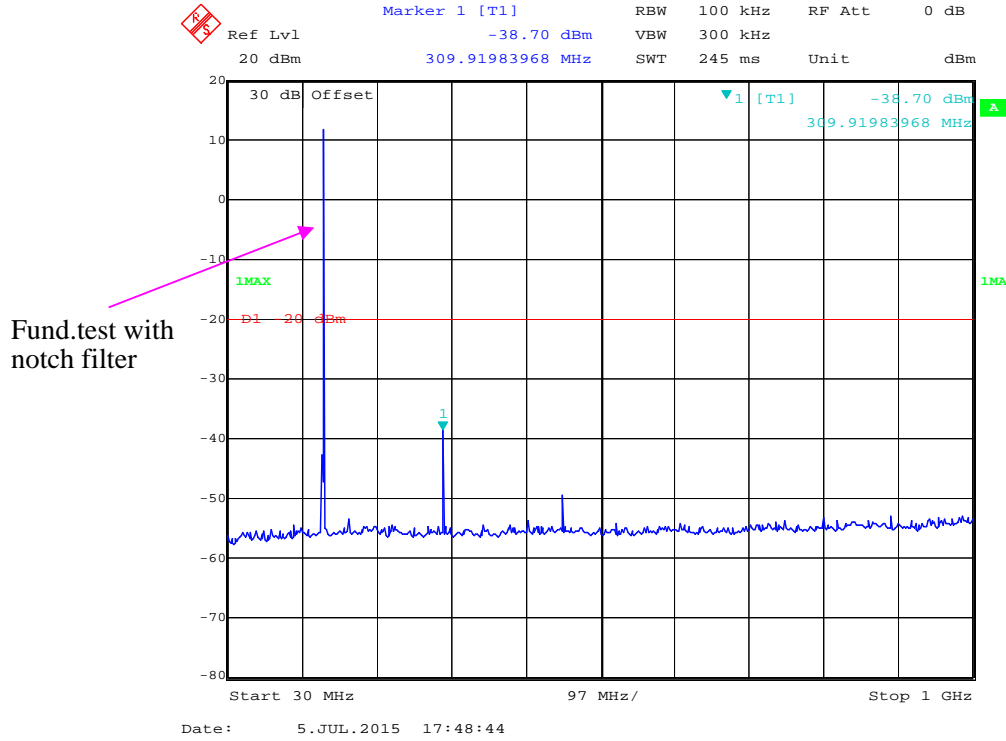

1 GHz – 2 GHz, Spacing Channel 12.5 kHz, 155.0125 MHz

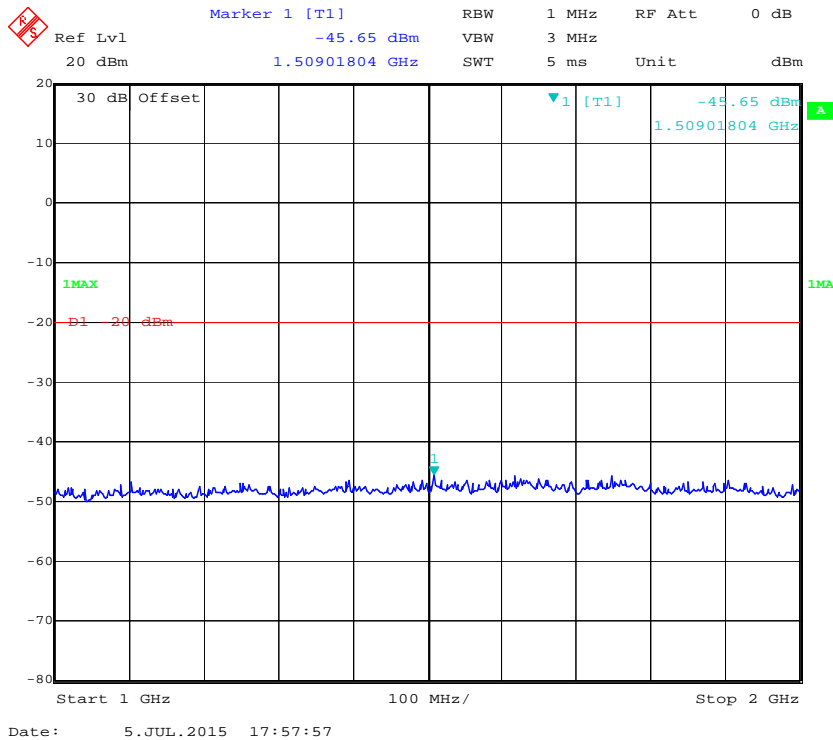

FCC §2.1053 & §90.210 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053 and §90.210

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2014-11-03	2015-11-03
HP	Amplifier	8447E	1937A01046	2015-05-06	2016-05-05
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2015-04-27	2016-04-26
Sunol Sciences	Horn Antenna	DRH-118	A052304	2013-12-01	2016-11-30
HP	Synthesized Sweeper	8341B	2624A00116	2015-06-03	2016-06-03
Mini-Circuits	Amplifier	ZVA-183-S+	5969001149	2015-04-23	2016-04-22
A.H. System	Horn Antenna	SAS-200/571	135	2015-02-11	2016-02-10
COM POWER	Dipole Antenna	AD-100	041000	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 50 + 10 Log₁₀ (power out in Watts) for EUT with a 12.5 kHz channel bandwidth.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2015-07-04.

Test Mode: Transmitting

Model: PH500 VHF

Frequency (MHz)	Receiver Reading (dBµV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 90	
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
Analog Modulation 155.0125 MHz, Channel Spacing 12.5K										
310.025	47.12	119	1.5	H	-49.9	0.36	0	-50.26	-20	30.26
310.025	48.03	73	1.7	V	-49.0	0.36	0	-49.36	-20	29.36
775.0625	52.54	290	2.3	H	-44.5	0.65	0	-45.15	-20	25.15
775.0625	53.30	88	1.4	V	-43.7	0.65	0	-44.35	-20	24.35
1550.13	40.86	313	1.4	H	-54.6	1.30	6.70	-49.20	-20	29.20
1550.13	49.22	293	1.2	V	-51.0	1.30	6.70	-45.60	-20	25.60
1705.14	45.84	347	1.9	H	-51.0	1.60	6.90	-45.70	-20	25.70
1705.14	54.51	143	2.1	V	-44.4	1.60	6.90	-39.10	-20	19.10
Digital Modulation 155.0125 MHz, Channel Spacing 12.5K										
310.025	48.95	219	2.4	H	-48.0	0.36	0	-48.36	-20	28.36
310.025	50.06	70	1.6	V	-46.9	0.36	0	-47.26	-20	27.26
1085.09	43.54	153	2.1	H	-57.0	1.50	6.10	-52.40	-20	32.40
1085.09	54.63	160	2.0	V	-47.0	1.50	6.10	-42.40	-20	22.40
1705.14	45.33	348	1.9	H	-51.5	1.60	6.90	-46.20	-20	26.20
1705.14	53.51	133	2.2	V	-45.4	1.60	6.90	-40.10	-20	20.10

Model: PH520 VHF

Frequency (MHz)	Receiver Reading (dBµV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 90	
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
Analog Modulation 155.0125 MHz, Channel Spacing 12.5K										
310.025	47.12	119	1.5	H	-49.9	0.36	0	-50.26	-20	30.26
310.025	48.03	73	1.7	V	-49.0	0.36	0	-49.36	-20	29.36
775.0625	52.54	290	2.3	H	-44.5	0.65	0	-45.15	-20	25.15
775.0625	53.30	88	1.4	V	-43.7	0.65	0	-44.35	-20	24.35
1550.13	40.86	313	1.4	H	-54.6	1.30	6.70	-49.20	-20	29.20
1550.13	49.22	293	1.2	V	-51.0	1.30	6.70	-45.60	-20	25.60
1705.14	45.84	347	1.9	H	-51.0	1.60	6.90	-45.70	-20	25.70
1705.14	54.51	143	2.1	V	-44.4	1.60	6.90	-39.10	-20	19.10
Digital Modulation 155.0125 MHz, Channel Spacing 12.5K										
310.025	48.95	219	2.4	H	-48.0	0.36	0	-48.36	-20	28.36
310.025	50.06	70	1.6	V	-46.9	0.36	0	-47.26	-20	27.26
1085.09	43.54	153	2.1	H	-57.0	1.50	6.10	-52.40	-20	32.40
1085.09	54.63	160	2.0	V	-47.0	1.50	6.10	-42.40	-20	22.40
1705.14	45.33	348	1.9	H	-51.5	1.60	6.90	-46.20	-20	26.20
1705.14	53.51	133	2.2	V	-45.4	1.60	6.90	-40.10	-20	20.10

Note:

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1055 & §90.213- FREQUENCY STABILITY

Applicable Standard

FCC §2.1055 and §90.213

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
Hewlett-Packard	Frequency Counter	5343A	2232A00827	2013-05-09	2016-05-08
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2014-11-01	2015-11-01
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2015-07-04.

Test Mode: Transmitting

For Analog 12.5 kHz:

Reference Frequency: 155.0125 MHz, Limit: ±2.5 ppm, 12.5 kHz			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Power Supplied (V_{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	7.4	155.012485	-0.10
40	7.4	155.012483	-0.11
30	7.4	155.012481	-0.12
20	7.4	155.012480	-0.13
10	7.4	155.012490	-0.06
0	7.4	155.012492	-0.05
-10	7.4	155.012486	-0.09
-20	7.4	155.012489	-0.07
-30	7.4	155.012488	-0.08
Frequency Stability versus Input Voltage			
20	6.4	155.0124893	-0.07

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR

Applicable Standard

Regulations: FCC §90.214

Test method: ANSI/TIA-603-D 2010, section 2.2.19.3

Test Equipment List and Details


Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSIQ26	837405/023	2015-04-27	2016-04-26
HP	RF Communication Test Set	8920A	3438A05201	2015-06-14	2016-06-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

- a) Connect the EUT and test equipment as shown on the following block diagram.
- b) Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- c) Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ± 12.5 kHz deviation and set its output level to -100dBm.
- d) Turn on the transmitter.
- e) Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as P_0 .
- f) Turn off the transmitter.
- g) Adjust the RF level of the signal generator to provide RF power equal to P_0 . This signal generator RF level shall be maintained throughout the rest of the measurement.
- h) Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- i) Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at ± 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- j) Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .

k) Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period t_3 .

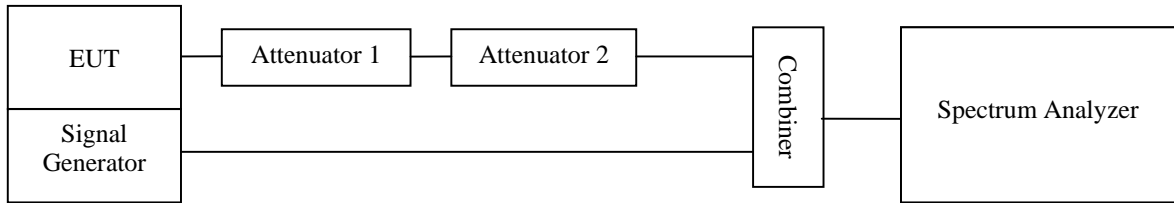

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2015-07-05.


Test Mode: Transmitting

Channel Separation (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	5 (t1)	<+/-12.5 kHz	Pass
	20 (t2)	<+/-6.25 kHz	
	5 (t3)	<+/-12.5 kHz	


Please refer to the following plots.

Channel Spacing 12.5 kHz

Turn on (155.0125 MHz)

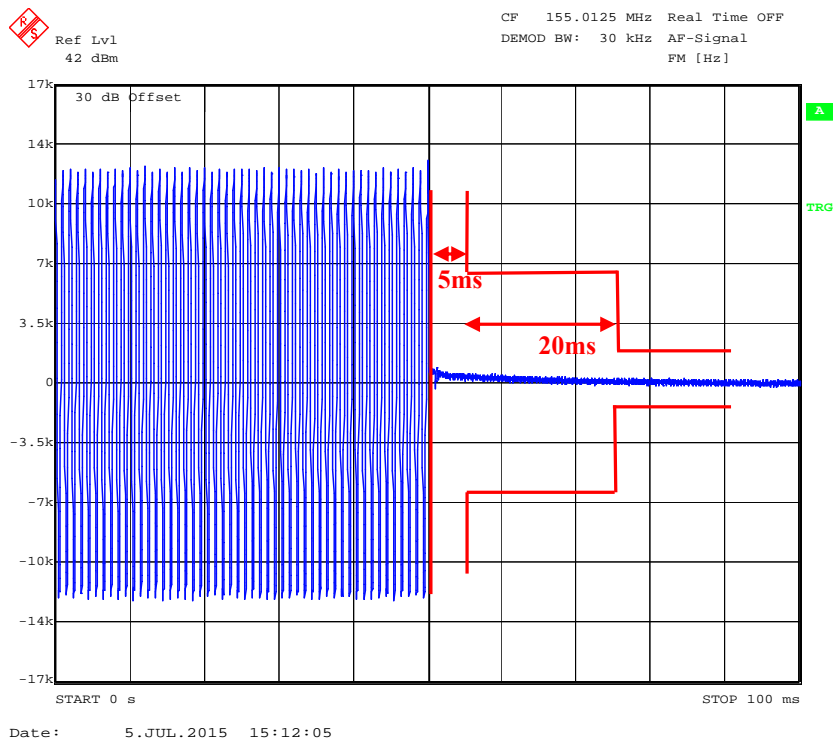

Turn off (155.0125 MHz)

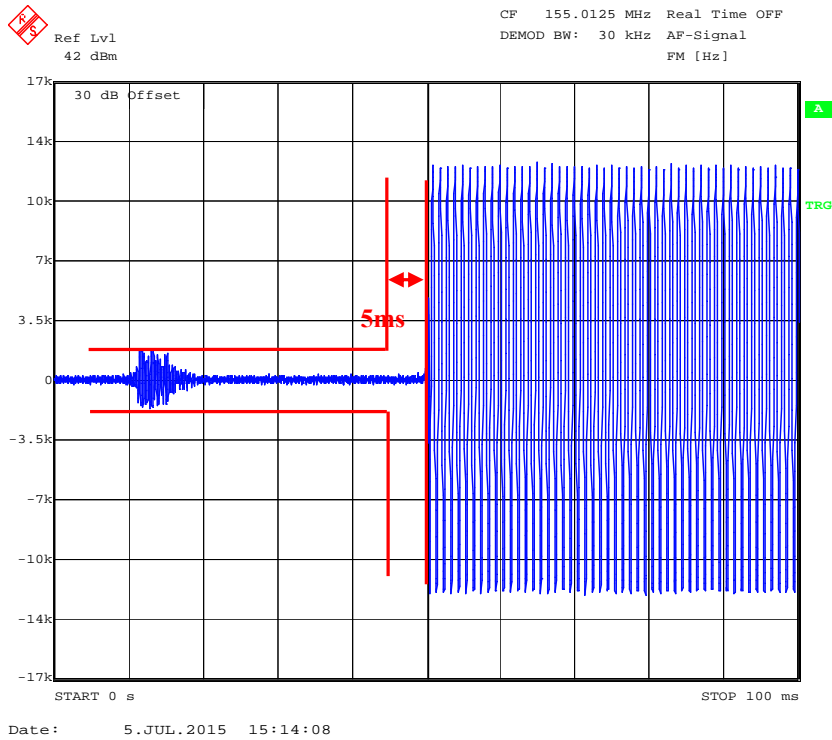

PRODUCT SIMILARITY DECLARATION LETTER

ZTE TRUNKING TECHNOLOGY CORPORATION
4/F, R&D Building 1, ZTE Industrial Park, LiuXian Road, Xili, Nanshan District, Shenzhen, P. R. China
Tel: 0755-2677463 Fax: 0755-26774670

07/06/2015

Product Similarity Declaration

To Whom It May Concern,

We, ZTE TRUNKING TECHNOLOGY CORPORATION, hereby declare that we have a product named as Two way radio (Model no: PH500 VHF) was tested by BACL, meanwhile, for our marketing purpose, we would like to list a series models (PH520 VHF) on reports and certificate, all the models are identical schematics, except for the differences as below,

- 1, PH500 VHF have no screen
2. PH520 VHF have screen

No other changes are made to them.

We confirm that all information above is true, and we'll be responsible for all the consequences. Please contact me if you have any question.

Signature:

Yanchun Ma *Yanchun Ma*
Manager

***** END OF REPORT *****