

# Emissions Test Report

**EUT Name:** Home Wi-Fi Router  
**Model No.:** A010001  
CFR 47 Part 15.407 2015 and RSS 247: 2015

*Prepared for:*

Clifford Clarke  
eero inc  
933 20th Street  
San Francisco, CA 94107  
Tel: (415) 738-7972  
Fax:

*Prepared by:*

TUV Rheinland of North America, Inc.  
1279 Quarry Lane  
Pleasanton, CA 94566  
Tel: (925) 249-9123  
Fax: (925) 249-9124  
<http://www.tuv.com/>

*Report/Issue Date:* October 02, 2015  
*Job #* 0000132673  
*Report Number:* 31562808.001



# Statement of Compliance

*Manufacturer:* eero inc  
933 20th Street  
San Francisco, CA 94107  
(415) 738-7972

*Requester / Applicant:* Clifford Clarke

*Name of Equipment:* Home Wi-Fi Router  
*Model No.* A010001  
*Type of Equipment:* Intentional Radiator  
*Application of Regulations:* CFR 47 Part 15.407 2015 and RSS 247: 2015  
*Test Dates:* 08 Sep 2015 to 18 Sep 2015

## *Guidance Documents:*

Emissions: ANSI C63.10-2013, KDB 789033 D02 General UNII Test Procedures New Rules v01, KDB 662911 D01 Multiple Transmitter Output v02r01

## *Test Methods:*

Emissions: ANSI C63.10-2013, KDB 789033 D02 General UNII Test Procedures New Rules v01, KDB 662911 D01 Multiple Transmitter Output v02r01

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report contains data that are not covered by A2LA accreditation. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.

Kerwinn Corpuz

Test Engineer

Date October 02, 2015

David Spencer

A2LA Signatory

Date October 02, 2015



**Testing Cert #3331.02**



**US5254**



Industry  
Canada Industrie  
Canada

**2932M-1**

Table of Contents

<b>1</b>	<b>Executive Summary</b>	<b>7</b>
1.1	Scope	7
1.2	Purpose	7
1.3	Summary of Test Results	8
1.4	Special Accessories	8
1.5	Equipment Modifications	8
<b>2</b>	<b>Laboratory Information</b>	<b>9</b>
2.1	Accreditations & Endorsements	9
2.1.1	US Federal Communications Commission	9
2.1.2	NIST / A2LA	9
2.1.3	Canada – Industry Canada	9
2.1.4	Japan – VCCI	9
2.1.5	Acceptance by Mutual Recognition Arrangement	10
2.2	Test Facilities	10
2.2.1	Emission Test Facility	10
2.2.2	Immunity Test Facility	10
2.3	Measurement Uncertainty	10
2.3.1	Sample Calculation – radiated & conducted emissions	11
2.3.2	Measurement Uncertainty	11
1.1.1	Measurement Uncertainty Immunity	12
2.4	Calibration Traceability	12
<b>3</b>	<b>Product Information</b>	<b>13</b>
3.1	Product Description	13
3.2	Equipment Configuration	13
3.3	Operating Mode	13
3.4	Unique Antenna Connector	14
3.4.1	Results	14
<b>4</b>	<b>Emissions</b>	<b>15</b>
4.1	Output Power Requirements	15
4.1.1	Test Method	15
4.1.2	Results	16
4.2	Occupied Bandwidth	25
4.2.1	Test Method	25
4.2.2	Results	25
4.3	Peak Power Spectral Density	34
4.3.1	Test Method	34
4.3.2	Results	35
4.4	Undesirable Emission Limits	44
4.4.1	Test Method	44
4.4.2	Results	45

Table of Contents

<b>4.5</b>	<b>Transmitter Spurious Emissions</b>	<b>69</b>
4.5.1	Test Methodology	69
4.5.2	Transmitter Spurious Emission Limit	70
4.5.3	Test Results	71
<b>4.6</b>	<b>AC Conducted Emissions</b>	<b>112</b>
4.6.1	Test Methodology	112
4.6.2	Test Results	112
<b>4.7</b>	<b>Frequency Stability</b>	<b>117</b>
4.7.1	Test Methodology	117
4.7.2	Manufacturer Declaration	117
4.7.3	Limit	118
4.7.4	Test results:	118
<b>4.8</b>	<b>Voltage Variation</b>	<b>120</b>
4.8.1	Test Methodology	120
4.8.2	Test results	120
<b>4.9</b>	<b>Maximum Permissible Exposure</b>	<b>122</b>
4.9.1	Test Methodology	122
4.9.2	RF Exposure Limit	122
4.9.3	EUT Operating Condition	123
4.9.4	Classification	123
4.9.5	Test Results	123
4.9.6	Sample Calculation	123
<b>5</b>	<b>Test Equipment List</b>	<b>124</b>
5.1	Equipment List	124
<b>6</b>	<b>EMC Test Plan</b>	<b>125</b>
6.1	Introduction	125
6.2	Customer	125
6.3	Equipment Under Test (EUT)	126
6.4	Test Specifications	130

Index of Tables

**Table 1:** Summary of Test Results ..... 8

**Table 2:** RF Output Power at the Antenna Port – Test Results ..... 16

**Table 3:** RF Output Power at the Antenna Port – Test Results Continues ..... 17

**Table 4:** RF Output Power at the Antenna Port – Test Results Continues ..... 18

**Table 5:** Occupied Bandwidth – Test Results ..... 26

**Table 6:** Occupied Bandwidth – Test Results Continues ..... 27

**Table 7:** Peak Power Spectral Density – Test Results ..... 35

**Table 8:** Peak Power Spectral Density – Test Results Continues ..... 36

**Table 9:** Peak Power Spectral Density – Test Results Continues ..... 37

**Table 10:** Emissions at the Band-Edge – Test Results ..... 45

**Table 11:** Emissions at the Band-Edge – Test Results Continues ..... 46

**Table 12:** Transmit Spurious Emission at Band-Edge Requirements ..... 72

**Table 13:** Transmit Spurious Emission at Band-Edge Requirements Continues ..... 73

**Table 14:** Transmit Spurious Emission at Band-Edge Requirements Continues ..... 74

**Table 15:** AC Conducted Emissions – Test Results ..... 112

**Table 16:** Frequency Stability – Test Results ..... 118

**Table 17:** Voltage Variation – Test Results ..... 120

**Table 18:** Customer Information ..... 125

**Table 19:** Technical Contact Information ..... 125

**Table 20:** EUT Specifications ..... 126

**Table 21:** Antenna Information ..... 127

**Table 22:** EUT Channel Power Specifications ..... 128

**Table 23:** Interface Specifications ..... 129

**Table 24:** Supported Equipment ..... 129

**Table 25:** Description of Sample used for Testing ..... 129

**Table 26:** Description of Test Configuration used for Radiated Measurement. .... 129

**Table 27:** Test Specifications ..... 130

# 1 Executive Summary

## 1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.407 2015 and RSS 247: 2015 based on the results of testing performed on 08 Sep 2015 to 18 Sep 2015 on the Home Wi-Fi Router Model A010001 manufactured by eero inc This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

## 1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report. The 5745 MHz to 5825 MHz frequency band is covered in this document.

### 1.3 Summary of Test Results

**Table 1:** Summary of Test Results

Test	Test Method ANSI C63.4	Test Parameters (Measured)	Result
Spurious Emission in Transmitted Mode	CFR47 15.209, CFR47 15.407 (b) RSS-GEN Sect.7.2.3, RSS 247 Sect. 6.2.4.2	Class B	<b>Complied</b>
Restricted Bands of Operation	CFR47 15.205, RSS GEN Sect.8.10	Class B	<b>Complied</b>
AC Power Conducted Emission	CFR47 15.207, RSS-GEN Sect.8.8	Class B	<b>Complied</b>
Occupied Bandwidth	CFR47 15.407 (e), RSS GEN Sect.6.6	See plots	<b>Complied</b>
Maximum Output Power	CFR47 15.407 (a), RSS 247 Sect. 6.2.4.1	22.66 dBm (11a mode) 22.42 dBm (HT 20) 22.51 dBm (VHT 20) 17.69 dBm (HT 40) 17.73 dBm (VHT 40) 16.49 dBm (VHT80)	<b>Complied</b>
Peak Power Spectral Density	CFR47 15.407 (a), RSS 247 Sect. 6.2.4.1	< 30 dBm/500kHz	<b>Complied</b>
Conducted Emission – Antenna Port	CFR47 15.407 (b), RSS 247 Sect.6.2.4.2	30 MHz - 40 GHz < 27 dBm/MHz	<b>Complied</b>
Frequency Stability	CFR47 15.407 (g), RSS GEN Sect. 6.11	±20 ppm	<b>Complied</b>
RF Exposure	CFR47 15.407 (f), 2.1091, RSS-102 Issue 5	General Population	<b>Complied</b>

Note: This test report covers 5725 MHz to 5850 MHz band.

### 1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

### 1.5 Equipment Modifications

None



## 2 Laboratory Information

### 2.1 Accreditations & Endorsements

#### 2.1.1 US Federal Communications Commission



TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 is recognized by the commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (US5254). The laboratory scope of accreditation includes: Title 47 CFR Parts 15, 18, and 90. The accreditation is updated every 3 years.

#### 2.1.2 NIST / A2LA



TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:1999 and ISO 9002 (Lab Code Testing Cert #3331.02). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

#### 2.1.3 Canada – Industry Canada



TUV Rheinland of North America at the 1279 Quarry Ln, Pleasanton, CA 94566 address is accredited by Industry Canada for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by Industry Canada (File Number 2932M). This reference number is the indication to the Industry Canada Certification Officers that the site meets the requirements of RSS 212, Issue 1 (Provisional). The accreditation is updated every 3 years.

#### 2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 has been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Pleasanton: A-0031

VCCI Registration No. for Santa Clara: A-0032

### 2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member

country.

## 2.2 Test Facilities

All of the test facilities are located at 1279 Quarry Lane, Pleasanton, California 94566, USA. The 2305 Mission College, Santa Clara, 95054, USA location is considered a Pleasanton annex.

### 2.2.1 Emission Test Facility

The Semi-Anechoic chamber and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7:1992. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2014, at a test distance of 3 and 5 meters. The site is listed with the FCC and accredited by A2LA (Lab Code Testing Cert #3331.02). The 3/5-meter semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2014, at a test distance of 3 meter and 5 meters. A report detailing this site can be obtained from TUV Rheinland of North America.

### 2.2.2 Immunity Test Facility

ESD, EFT, Surge, PQF: These tests are performed in an environmentally controlled room with a 3.7 m x 4.8 m x 3.175 mm thick aluminum floor connected to PE ground.

For ESD testing, tabletop equipment is placed on an insulated mat with a surface resistivity of  $10^9$  Ohms/square on a 1.6 m x 0.8 m x 0.8 m high non-conductive table with a 3.175 mm aluminum top (Horizontal Coupling Plane). The HCP is connected to the main ground plane via a low impedance ground strap through two 470-k $\Omega$  resistors. The Vertical Coupling Plane consists of an aluminum plate 50 cm x 50 cm x 3.175 mm thick. The VCP is connected to the main ground plane via a low impedance ground strap through two 470-k $\Omega$  resistors.

For EFT, Surge, PQF, the HCP and VCP are removed.

RF Field Immunity testing is performed in a 7.3m x 4.3m x 4.1m anechoic chamber.

RF Conducted and Magnetic Field Immunity testing is performed on a 4.8m x 3.7m x 3.175mm thick aluminum ground plane.

All test areas allow a minimum distance of 1 meter from the EUT to walls or conducting objects.

## 2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1<sup>st</sup> Edition, 1995.

The *Combined Standard Uncertainty* is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

### 2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dBμV)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

#### Sample radiated emissions calculation @ 30 MHz

**Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)**

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

### 2.3.2 Measurement Uncertainty

Per CISPR 16-4-2	U <sub>lab</sub>	U <sub>cispr</sub>
<b>Radiated Disturbance @ 10 meters</b>		
30 – 1,000 MHz	2.25 dB	4.51 dB
<b>Radiated Disturbance @ 3 meters</b>		
30 – 1,000 MHz	2.26 dB	4.52 dB
1 – 6 GHz	2.12 dB	4.25 dB
6 – 18 GHz	2.47 dB	4.93 dB
<b>Conducted Disturbance @ Mains Terminals</b>		
150 kHz – 30 MHz	1.09 dB	2.18 dB
<b>Disturbance Power</b>		
30 MHz – 300 MHz	3.92 dB	4.3 dB

**Voltech PM6000A**

The estimated combined standard uncertainty for harmonic current and flicker measurements is $\pm 5.0\%$ .	Per CISPR 16-4-2 Methods
--	--------------------------

**1.1.1 Measurement Uncertainty Immunity**

The estimated combined standard uncertainty for ESD immunity measurements is $\pm 8.2\%$ .	Per IEC 61000-4-2
The estimated combined standard uncertainty for radiated immunity measurements is $\pm 4.10$ dB.	Per IEC 61000-4-3
The estimated combined standard uncertainty for conducted immunity measurements with CDN is $\pm 3.66$ dB	Per IEC 61000-4-6
The estimated combined standard uncertainty for power frequency magnetic field immunity is $\pm 2.9\%$ .	Per IEC 61000-4-8

**Thermo KeyTek EMC Pro**

The estimated combined standard uncertainty for EFT fast transient immunity measurements is $\pm 2.6\%$ .
The estimated combined standard uncertainty for surge immunity measurements is $\pm 2.6\%$ .
The estimated combined standard uncertainty for voltage variation and interruption measurements is $\pm 1.74\%$ .

The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

**2.4 Calibration Traceability**

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

---

## 3 Product Information

### 3.1 Product Description

The Model A010001, Home Wi-Fi Router, is a Wi-Fi router for the home capable of operating in the 2.4 GHz and 5 GHz frequency bands over 20 MHz, 40 MHz and 80 MHz channels.

### 3.2 Equipment Configuration

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of an EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

### 3.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. In the case of an EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.

The final operating mode was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

---

### **3.4 Unique Antenna Connector**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, or 15.221.

#### **3.4.1 Results**

The Home Wi-Fi Router has seven custom integrated antennas. The 5.8GHz band uses custom integrated antennas, Antenna 7 and Antenna 8, and has maximum gain + 2.24 dBi. There are no beam forming and no additional antenna available.

Refer to Table 13 for additional antenna information.

## 4 Emissions

Testing was performed in accordance with CFR 47 Part 15.407: 2015 and RSS 247 Sect.6: 2015. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in section 8 of the standard were used.

### 4.1 Output Power Requirements

*The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.*

*The maximum output power and harmonics shall not exceed CFR47 Part 15.407 (a):2015 and RSS 247 Sect.6.2.4.1: 2015.*


*The maximum transmitted power is*

*Band 5725-5850 MHz: 1 W.*

#### 4.1.1 Test Method

The ANSI C63.10-2013 Section 6.10.3.1 conducted method was used to measure the channel power output. The preliminary investigation was performed at different data rate/ chain to determine the highest power output for each mode. The worst findings were conducted on 3 channels in each operating range per CFR47 Part 15.407(a): 2015 and RSS 247 Sect.6.2.4.1; 5725 MHz to 5825 MHz. The worst mode results indicated below.

Test Setup:

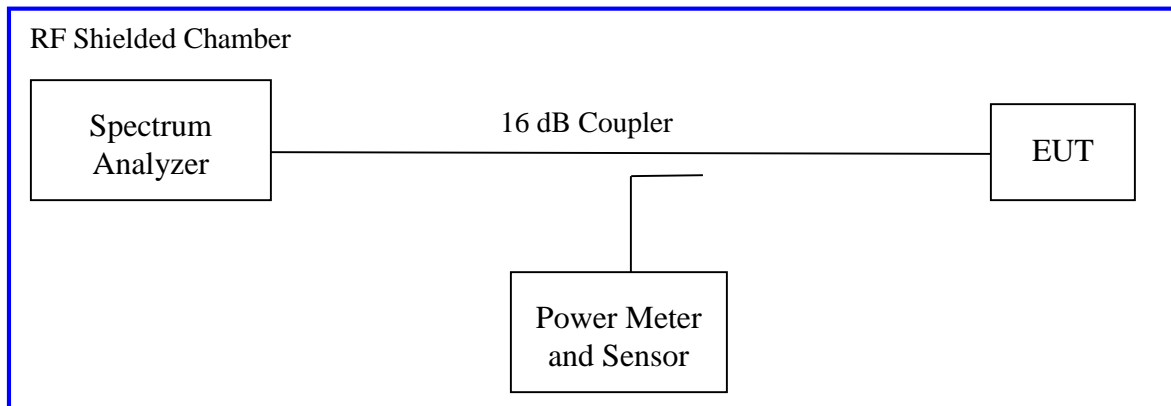

*Method SA-1 of "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices" applies since the EUT continuously transmit; where duty cycle is greater than 98%. Sample detector was used.*

Each chain was measured individually and applied the measure-and-sum approach per KDB662911.

### 4.1.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 2: RF Output Power at the Antenna Port – Test Results**

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature					
<b>Antenna Type:</b> Custom Integrated			<b>Power Setting:</b> See test plan		
<b>Max. Directional Gain:</b> + 2.24 dBi					
<b>Signal State:</b> Modulated at 100%.					
<b>Ambient Temp.:</b> 21° C			<b>Relative Humidity:</b> 39%		
<b>802.11a</b>					
Operating Channel (MHz)	Limit [dBm]	Ch0 [dBm]	Ch1 [dBm]	Total Power [dBm]	Margin [dB]
5745.00	30.00	17.53	20.30	22.14	-7.86
5785.00	30.00	22.53	22.66	25.61	-4.39
5825.00	30.00	18.58	19.27	21.95	-8.05
<b>Note:</b> 1. The highest output power was observed at 802.11a, 6.0 Mbps, 1 Data Stream. 2. The sum of Ch0 and Ch1 = Total Power. 3. Plots for all the measurements stated above were taken, to reduce complexity and bulkiness of the report Highlighted Plots are placed in the report.					
<b>802.11n</b>					
Operating Channel (MHz)	Limit [dBm]	Ch0 [dBm]	Ch1 [dBm]	Total Power [dBm]	Margin [dB]
5745.00	30.00	18.09	20.17	22.26	-7.74
5785.00	30.00	21.60	22.42	25.04	-4.96
5825.00	30.00	18.70	19.04	21.88	-8.12
<b>Note:</b> 1. The highest output power was observed at HT20 MCS0, 1 Data Streams. 2. The sum of Ch0 and Ch1 = Total Power. 3. Plots for all the measurements stated above were taken, to reduce complexity and bulkiness of the report Highlighted Plots are placed in the report.					



**Table 3: RF Output Power at the Antenna Port – Test Results Continues**

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature					
<b>Antenna Type:</b> Custom Integrated			<b>Power Setting:</b> See test plan		
<b>Max. Directional Gain:</b> + 2.24 dBi					
<b>Signal State:</b> Modulated at 100%.					
<b>Ambient Temp.:</b> 21° C			<b>Relative Humidity:</b> 39%		
<b>802.11ac</b>					
Operating Channel (MHz)	Limit [dBm]	Ch0 [dBm]	Ch1 [dBm]	Total Power [dBm]	Margin [dB]
5745.00	30.00	19.37	19.28	22.34	-7.66
5785.00	30.00	21.61	22.51	25.09	-4.91
5825.00	30.00	18.51	18.58	21.56	-8.44
<b>Note:</b> 1. The highest output power was observed at VHT20 MCS0, 1 Data Streams. 2. The sum of Ch0 and Ch1 = Total Power. 3. Plots for all the measurements stated above were taken, to reduce complexity and bulkiness of the report Highlighted Plots are placed in the report.					
<b>802.11n</b>					
Operating Channel (MHz)	Limit [dBm]	Ch0 [dBm]	Ch1 [dBm]	Total Power [dBm]	Margin [dB]
5755.00	30.00	17.53	17.69	20.62	-9.38
5795.00	30.00	16.42	17.01	19.74	-10.26
<b>Note:</b> 1. The highest output power was observed at HT40 MCS0, 1 Data Streams. 2. The sum of Ch0 and Ch1 = Total Power. 3. Plots for all the measurements stated above were taken, to reduce complexity and bulkiness of the report Highlighted Plots are placed in the report.					

**Table 4: RF Output Power at the Antenna Port – Test Results Continues**

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature					
<b>Antenna Type:</b> Custom Integrated			<b>Power Setting:</b> See test plan		
<b>Max. Directional Gain:</b> + 2.24 dBi					
<b>Signal State:</b> Modulated at 100%.					
<b>Ambient Temp.:</b> 21° C			<b>Relative Humidity:</b> 39%		
<b>802.11ac</b>					
Operating Channel (MHz)	Limit [dBm]	Ch0 [dBm]	Ch1 [dBm]	Total Power [dBm]	Margin [dB]
5755.00	30.00	17.73	17.76	20.76	-9.24
5795.00	30.00	16.47	17.05	19.78	-10.22
<b>Note:</b> 1. The highest output power was observed at VHT40 MCS0, 1 Data Streams. 2. The sum of Ch0 and Ch1 = Total Power. 3. Plots for all the measurements stated above were taken, to reduce complexity and bulkiness of the report Highlighted Plots are placed in the report.					
<b>802.11ac</b>					
Operating Channel (MHz)	Limit [dBm]	Ch0 [dBm]	Ch1 [dBm]	Total Power [dBm]	Margin [dB]
5775.00	30.00	15.96	16.49	19.24	-10.76
<b>Note:</b> 1. The highest output power was observed at VHT80 MCS0, 1 Data Streams. 2. The sum of Ch0 and Ch1 = Total Power. 3. Plots for all the measurements stated above were taken, to reduce complexity and bulkiness of the report Highlighted Plots are placed in the report.					

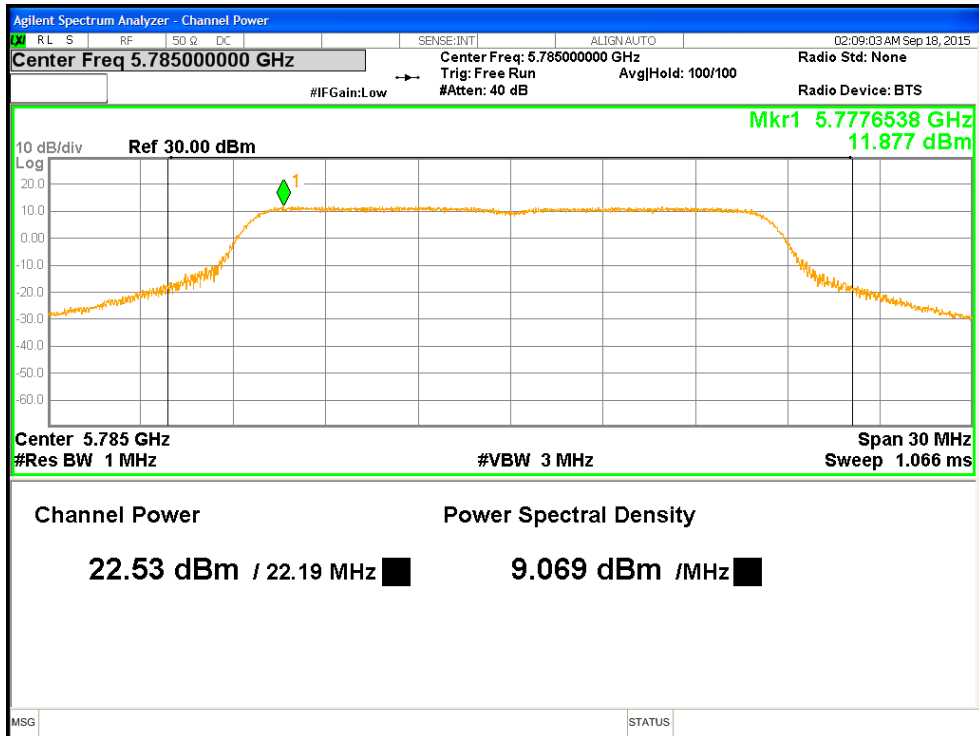


Figure 1: Maximum Transmitted Power, 5785 MHz at 11a 6Mbps, Chain 0

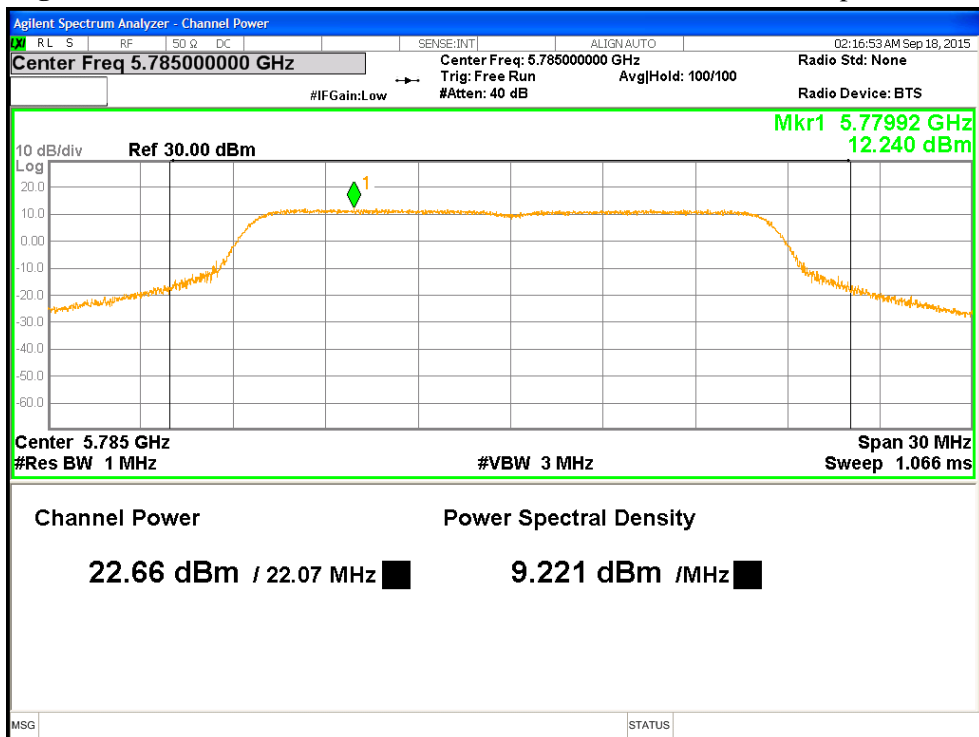


Figure 2: Maximum Transmitted Power, 5785 MHz at 11a 6Mbps, Chain 1

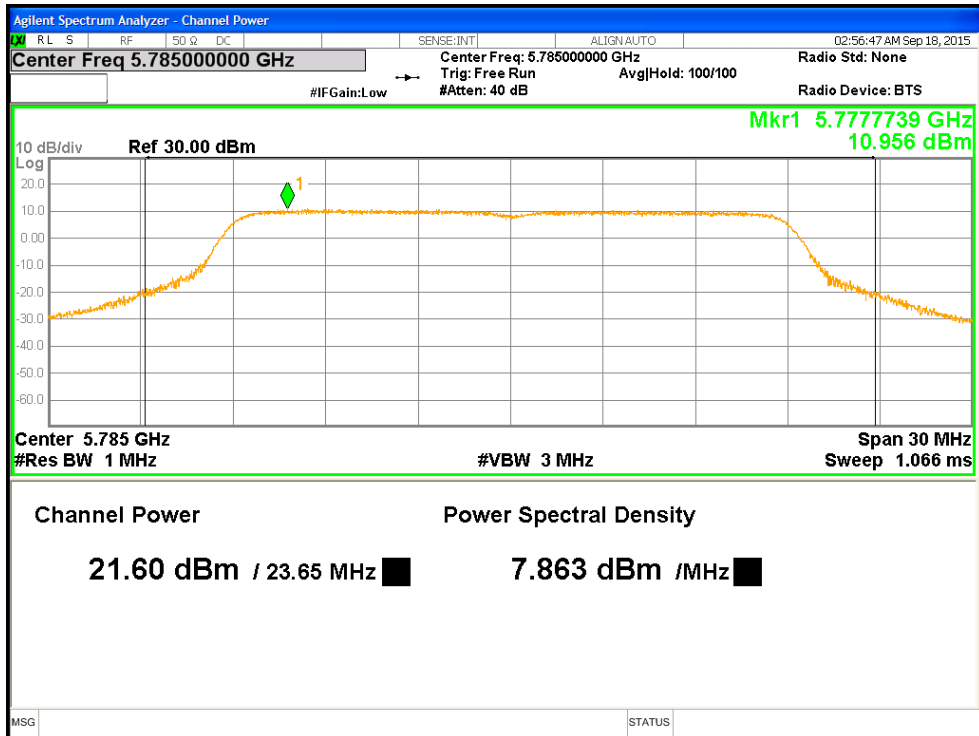


Figure 3: Maximum Transmitted Power, 5785 MHz at HT20 MCS0, Chain 0

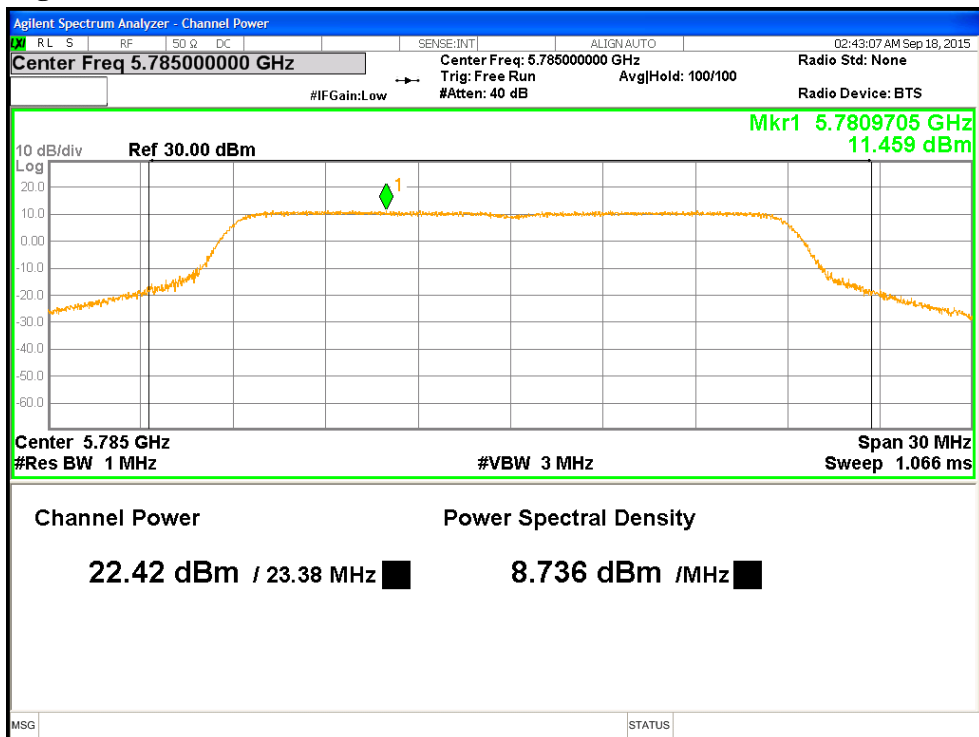


Figure 4: Maximum Transmitted Power, 5785 MHz at HT20 MCS0, Chain 1

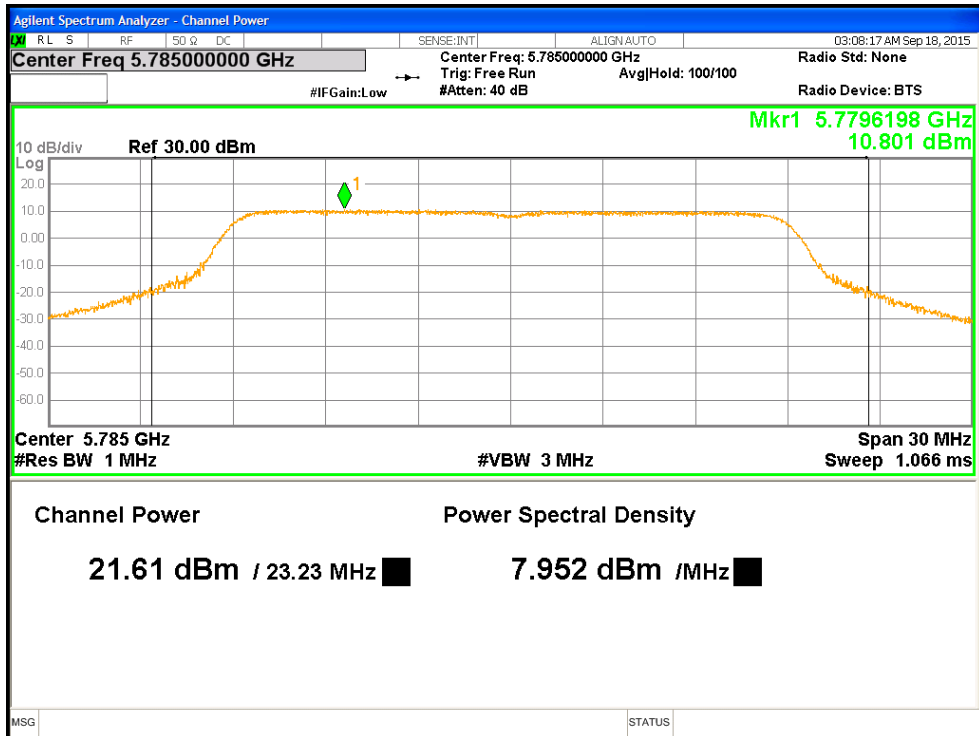


Figure 5: Maximum Transmitted Power, 5785 MHz at VHT20 MCS0, Chain 0

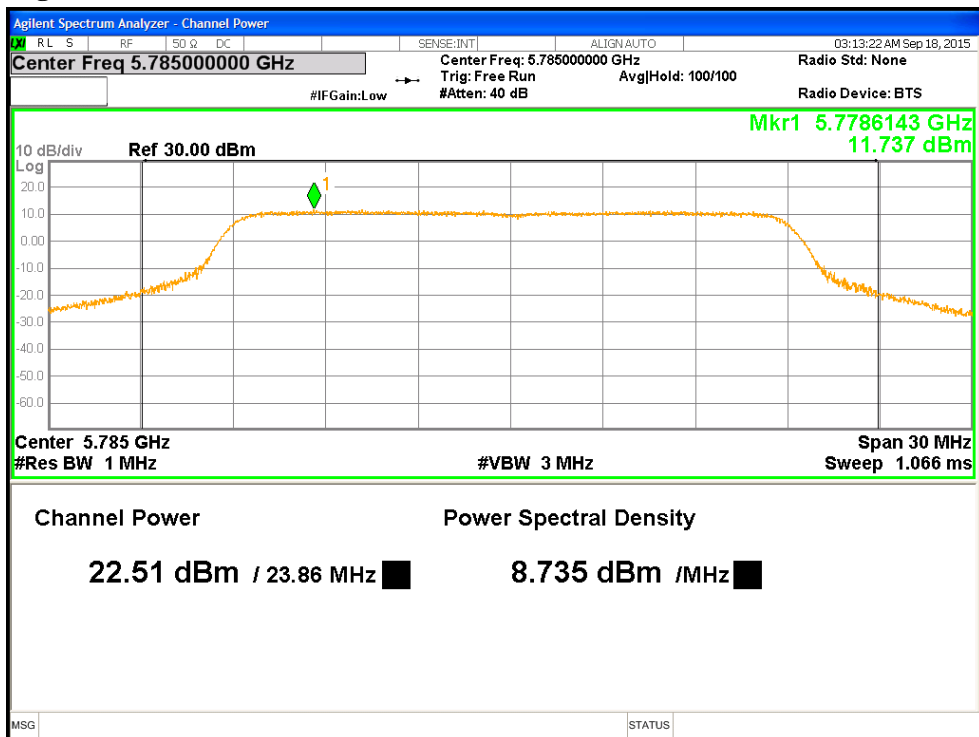


Figure 6: Maximum Transmitted Power, 5785 MHz at VHT20 MCS0, Chain 1

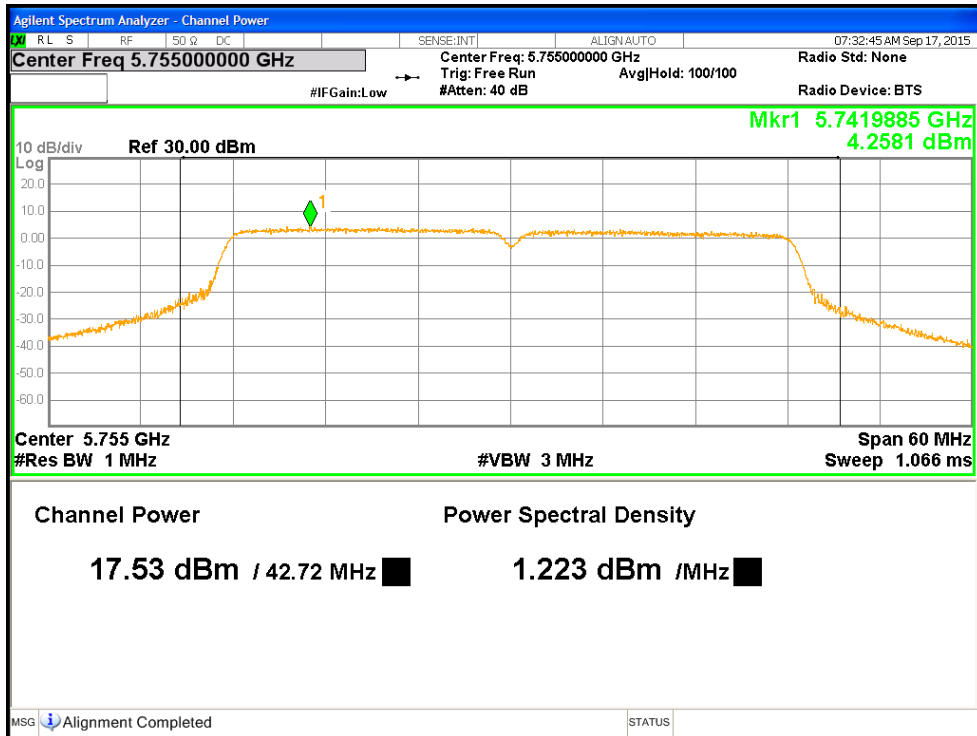


Figure 7: Maximum Transmitted Power, 5755 MHz at HT40 MCS0, Chain 0

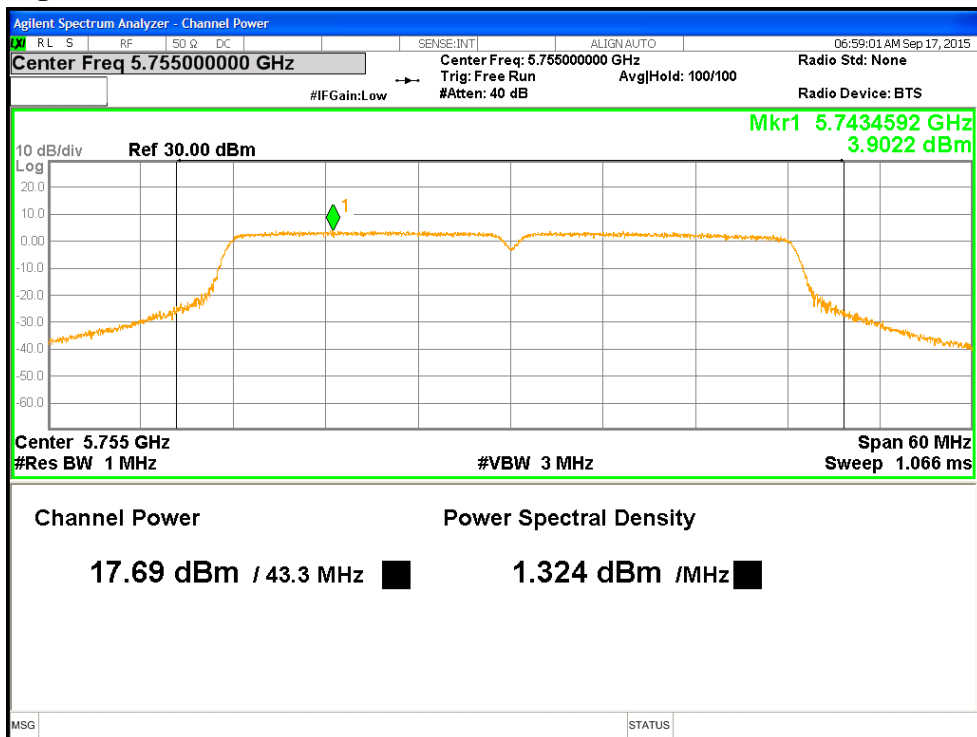


Figure 8: Maximum Transmitted Power, 5755 MHz at HT40 MCS0, Chain 1

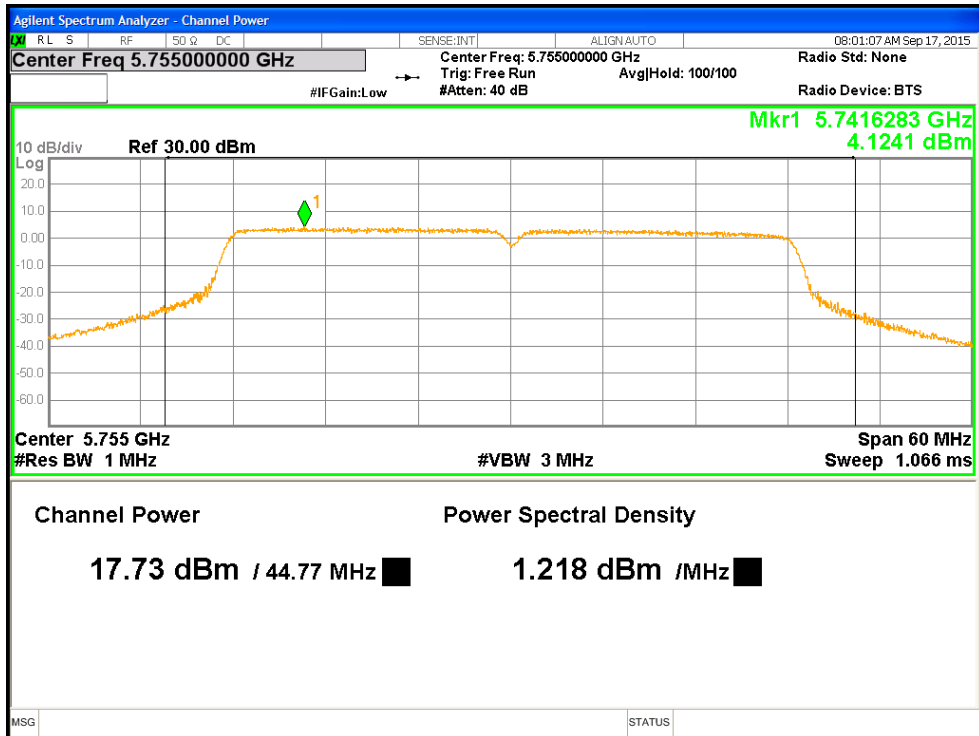


Figure 9: Maximum Transmitted Power, 5755 MHz at VHT40 MCS0, Chain 0

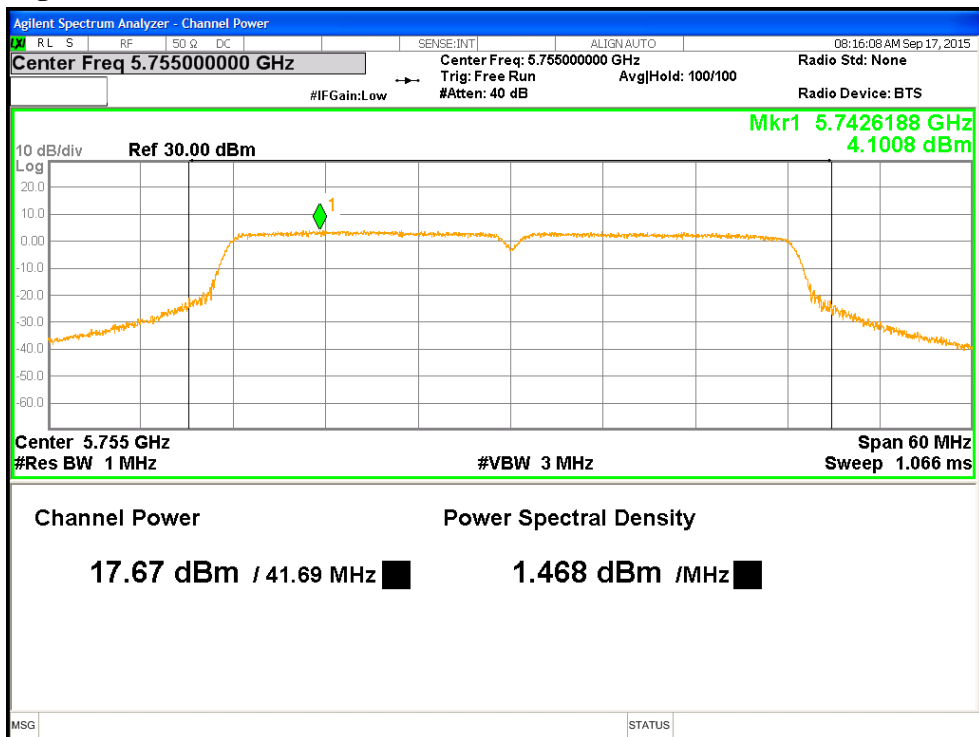


Figure 10: Maximum Transmitted Power, 5755 MHz at VHT40 MCS0, Chain 0

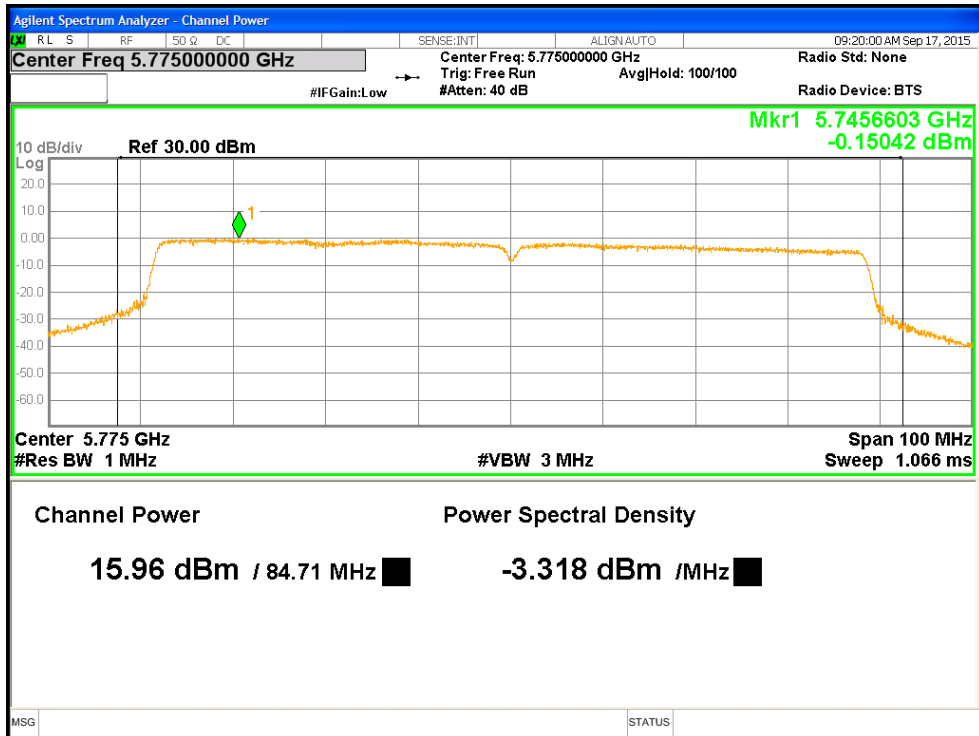


Figure 11: Maximum Transmitted Power, 5775 MHz at VHT80 MCS0, Chain 0

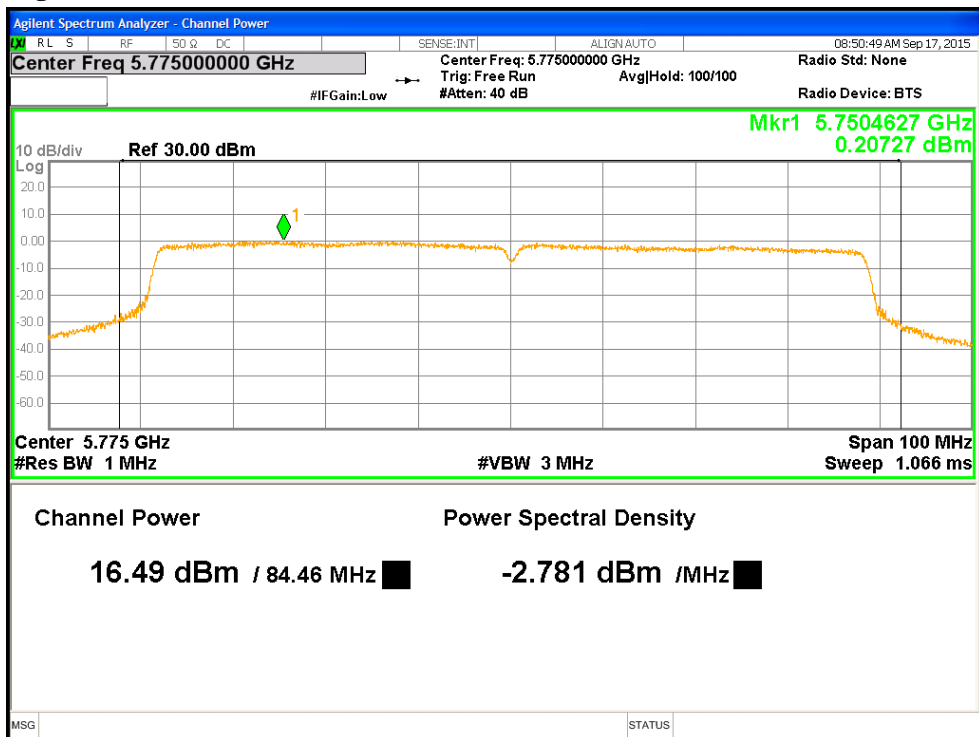


Figure 12: Maximum Transmitted Power, 5775 MHz at VHT80 MCS0, Chain 1



## 4.2 Occupied Bandwidth

The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.

The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.


The 6 or 26 dB bandwidth is defined the bandwidth of 6 or 26 dB from highest transmitted level of the fundamental frequency.

Within the 5.725 – 5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz per CFR47 Part 15.407(e).

### 4.2.1 Test Method

The conducted method was used to measure the occupied bandwidth. The measurement was performed with modulation per CFR47 15.407(e) 2015 and RSS Gen Sect. 4.4.1:2010. The preliminary investigation was performed to find the narrowest 26 dB bandwidth for each operational mode at different data rates. This worst finding was performed on 3 channels in each operating frequency range; 5725 to 5850 MHz band, a 6 dB bandwidth was used. The worst results indicated below.

Test Setup:

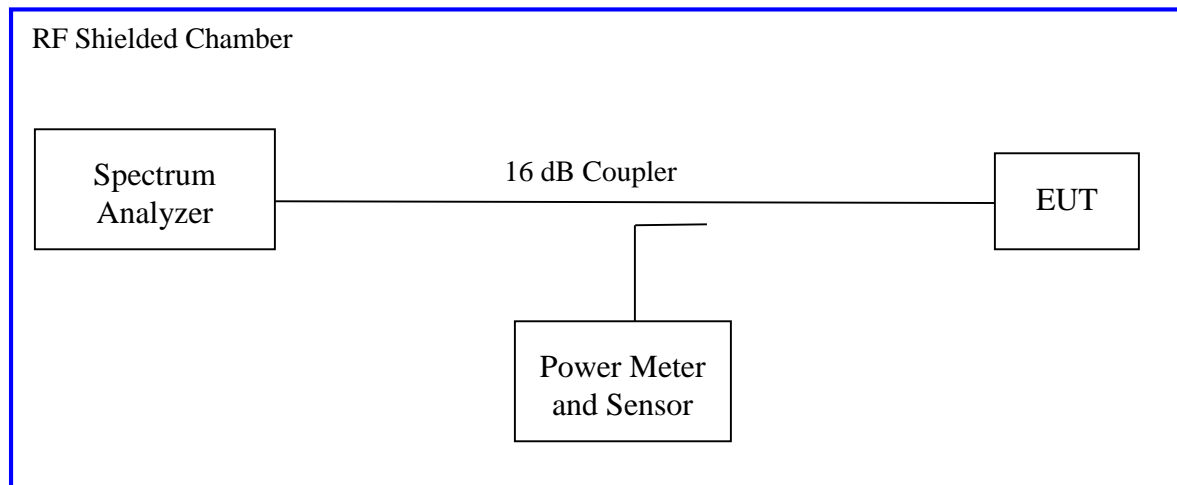

### 4.2.2 Results

These occupied bandwidth measurements were taken for references only.

**Table 5: Occupied Bandwidth – Test Results**

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature and Voltage only				
<b>Antenna Type:</b> Custom Integrated			<b>Power Setting:</b> See test plan	
<b>Max. Directional Gain:</b> + 2.24 dBi				
<b>Signal State:</b> Modulated at 100%.				
<b>Ambient Temp.:</b> 21° C			<b>Relative Humidity:</b> 39%	
<b>Bandwidth (MHz) for 802.11a</b>				
Freq. (MHz)	6dB Bandwidth (MHz)		99% Bandwidth (MHz)	
	Ch0	Ch1	Ch0	Ch1
5745	16.35	16.32	16.45	16.44
5785	16.34	16.34	16.44	16.47
5825	16.32	16.32	16.45	16.43
<b>Note:</b> 1. The bandwidth was measured at 6.0 Mbps. 2. Plots for all the measurements stated above were taken, to reduce complexity and bulkiness of the report Highlighted Plots are placed in the report.				
<b>Bandwidth (MHz) for 802.11n</b>				
Freq. (MHz)	6dB Bandwidth (MHz)		99% Bandwidth (MHz)	
	Ch0	Ch1	Ch0	Ch1
5745	16.69	17.55	17.67	17.63
5785	17.36	17.58	17.66	17.65
5825	17.71	17.55	17.66	17.66
<b>Note:</b> 1. The bandwidth was measured at HT20 MCS0, 1 Data Streams 2. Plots for all the measurements stated above were taken, to reduce complexity and bulkiness of the report Highlighted Plots are placed in the report.				
<b>Bandwidth (MHz) for 802.11ac</b>				
Freq. (MHz)	6dB Bandwidth (MHz)		99% Bandwidth (MHz)	
	Ch0	Ch1	Ch0	Ch1
5745	17.59	17.56	17.67	17.65
5785	17.60	17.56	17.66	17.67
5825	17.55	17.62	17.66	17.64
<b>Note:</b> 1. The bandwidth was measured at VHT20 MCS0, 1 Data Streams 2. Plots for all the measurements stated above were taken, to reduce complexity and bulkiness of the report Highlighted Plots are placed in the report.				

**Table 6: Occupied Bandwidth – Test Results Continues**

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature and Voltage only				
<b>Antenna Type:</b> Custom Integrated			<b>Power Setting:</b> See test plan	
<b>Max. Directional Gain:</b> + 2.24 dBi				
<b>Signal State:</b> Modulated at 100%.				
<b>Ambient Temp.:</b> 21° C			<b>Relative Humidity:</b> 39%	
<b>Bandwidth (MHz) for 802.11n</b>				
Freq. (MHz)	6dB Bandwidth (MHz)		99% Bandwidth (MHz)	
	Ch0	Ch1	Ch0	Ch1
5755	34.07	36.30	36.13	36.13
5795	35.67	35.43	36.16	36.12
<b>Note:</b> 1. The bandwidth was measured at HT40 MCS0, 1 Data Streams 2. Plots for all the measurements stated above were taken, to reduce complexity and bulkiness of the report Highlighted Plots are placed in the report.				
<b>Bandwidth (MHz) for 802.11ac</b>				
Freq. (MHz)	6dB Bandwidth (MHz)		99% Bandwidth (MHz)	
	Ch0	Ch1	Ch0	Ch1
5755	35.04	35.36	36.16	36.11
5795	35.35	35.35	36.13	36.14
<b>Note:</b> 1. The bandwidth was measured at VHT40 MCS0, 1 Data Streams 2. Plots for all the measurements stated above were taken, to reduce complexity and bulkiness of the report Highlighted Plots are placed in the report.				
<b>Bandwidth (MHz) for 802.11ac</b>				
Freq. (MHz)	6dB Bandwidth (MHz)		99% Bandwidth (MHz)	
	Ch0	Ch1	Ch0	Ch1
5775	71.92	74.67	75.48	75.46
<b>Note:</b> 1. The bandwidth was measured at VHT80 MCS0, 1 Data Streams 2. Plots for all the measurements stated above were taken, to reduce complexity and bulkiness of the report Highlighted Plots are placed in the report.				

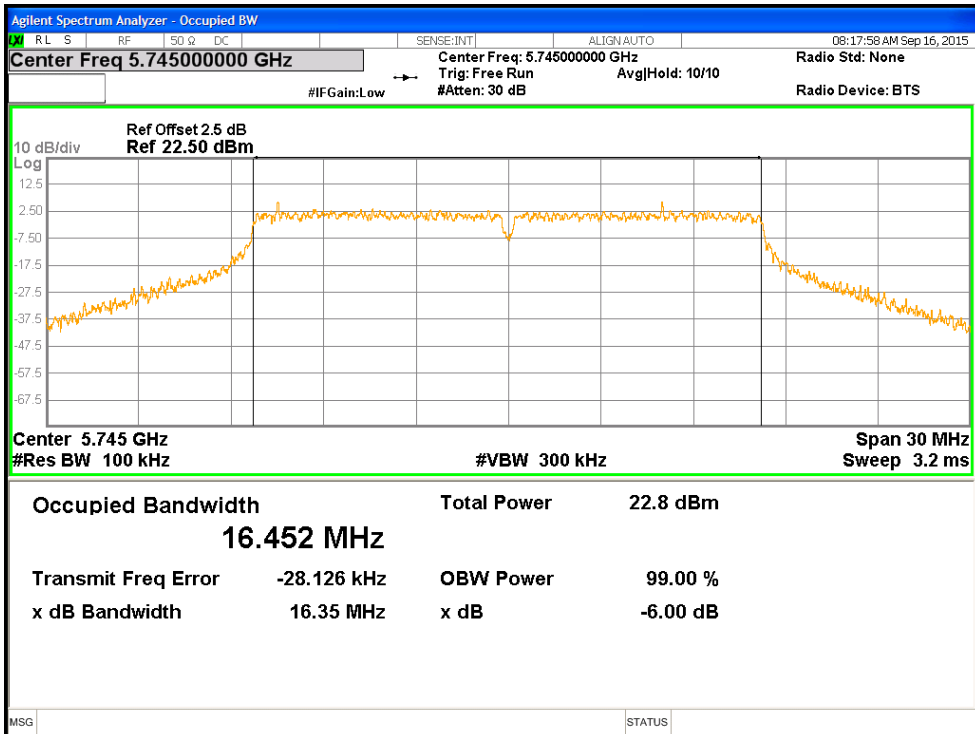


Figure 13: 6dB & 99% Occupied Bandwidth, 5745 MHz at 802.11a 6Mbps, Chain 0

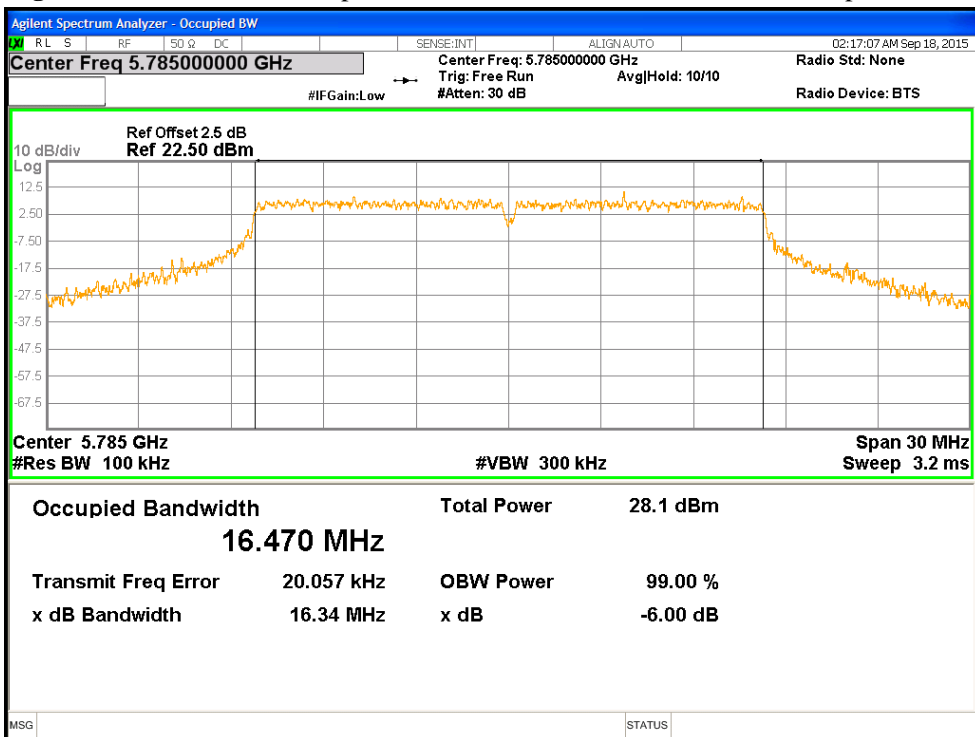


Figure 14: 6dB & 99% Occupied Bandwidth, 5785 MHz at 802.11a 6Mbps, Chain 1

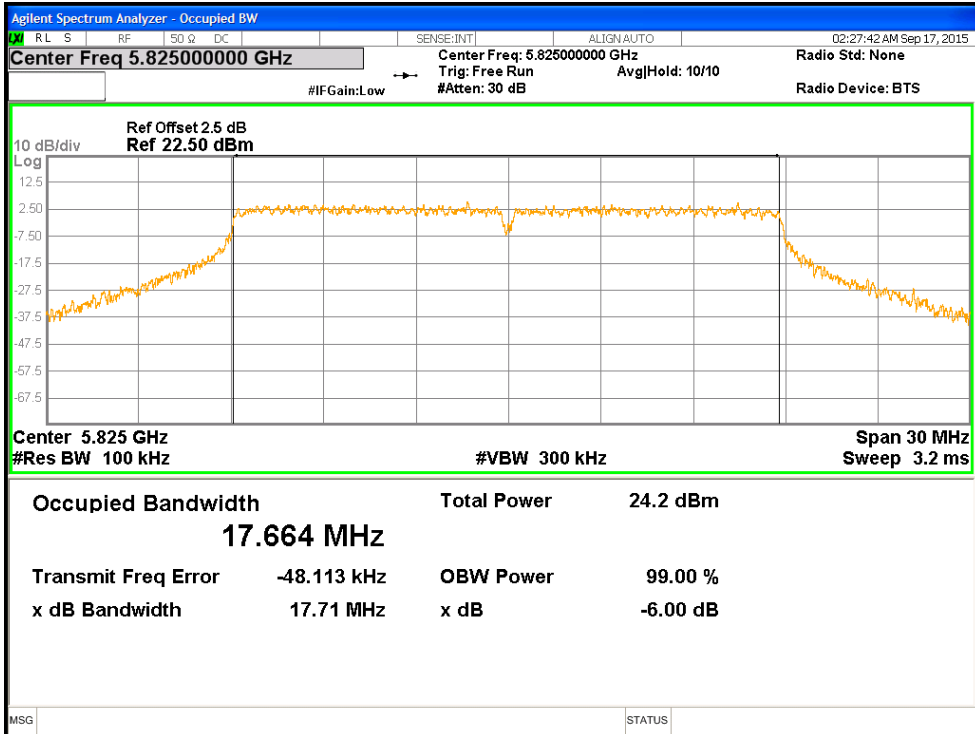


Figure 15: 6dB & 99% Occupied Bandwidth, 5825 MHz at HT20 MCS0, Chain 0

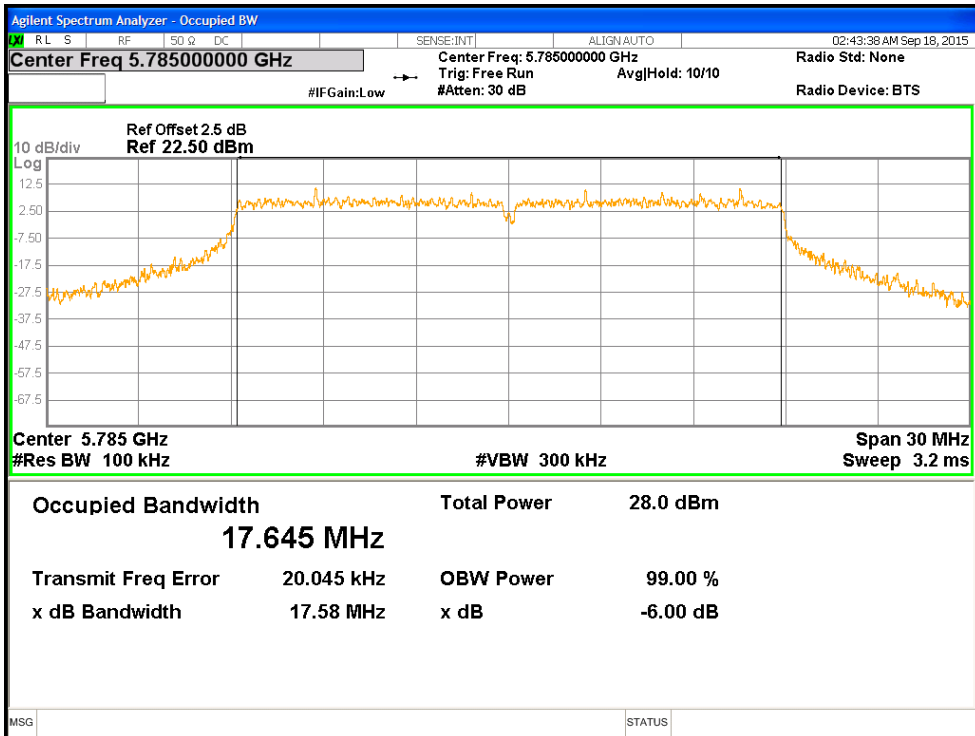


Figure 16: 6dB & 99% Occupied Bandwidth, 5785 MHz at HT20 MCS0, Chain 1

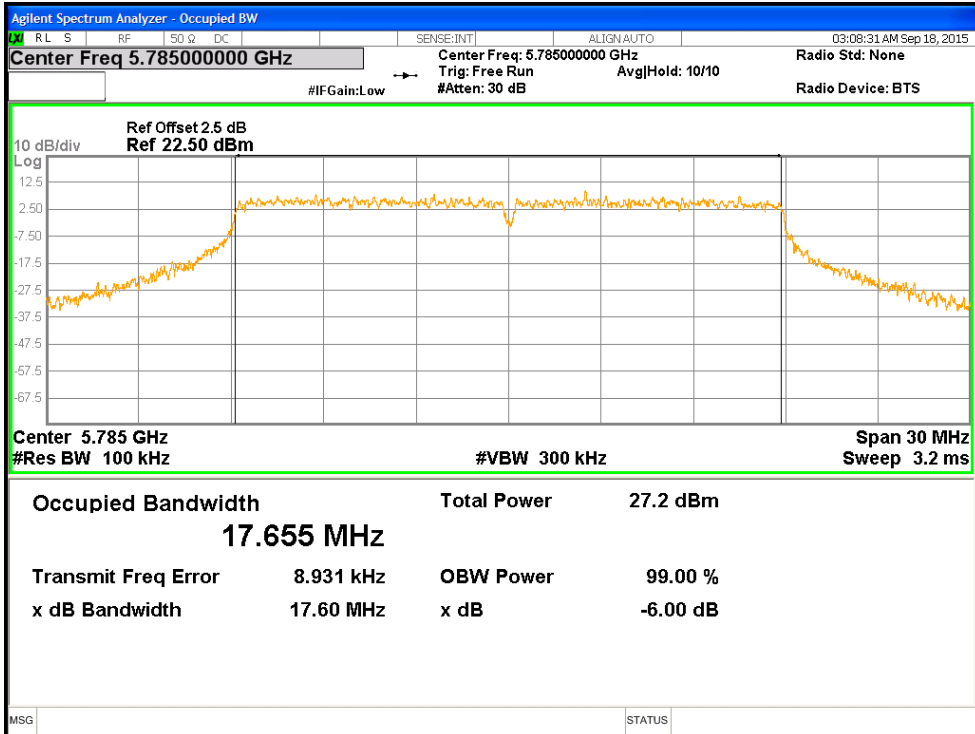


Figure 17: 6dB & 99% Occupied Bandwidth, 5785 MHz at VHT20 MCS0, Chain 0

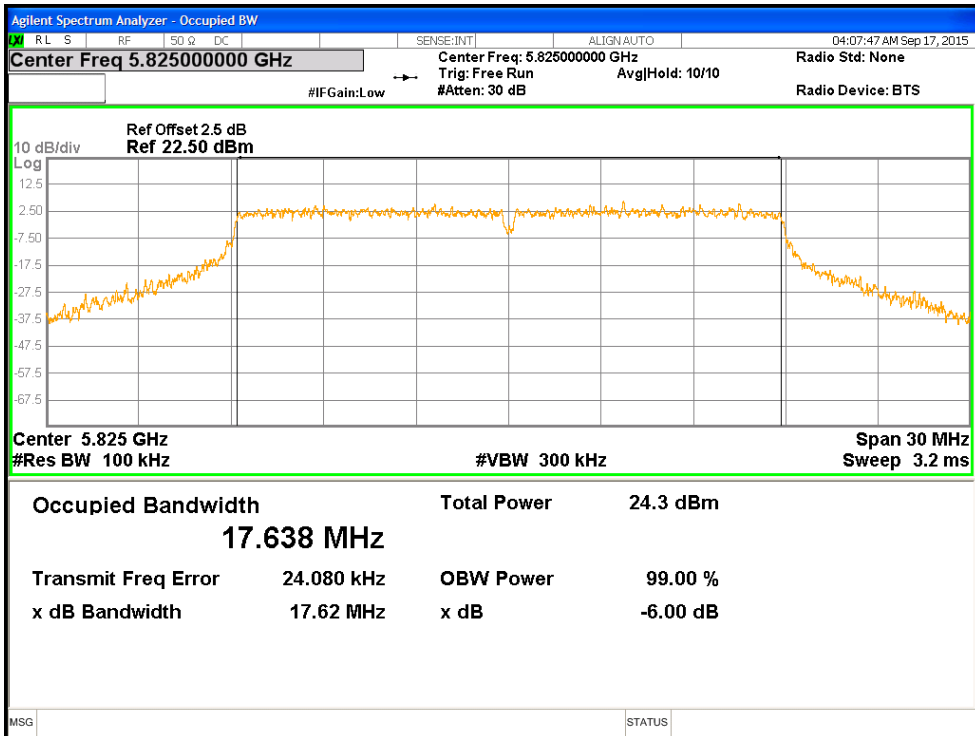


Figure 18: 6dB & 99% Occupied Bandwidth, 5825 MHz at VHT20 MCS0, Chain 1

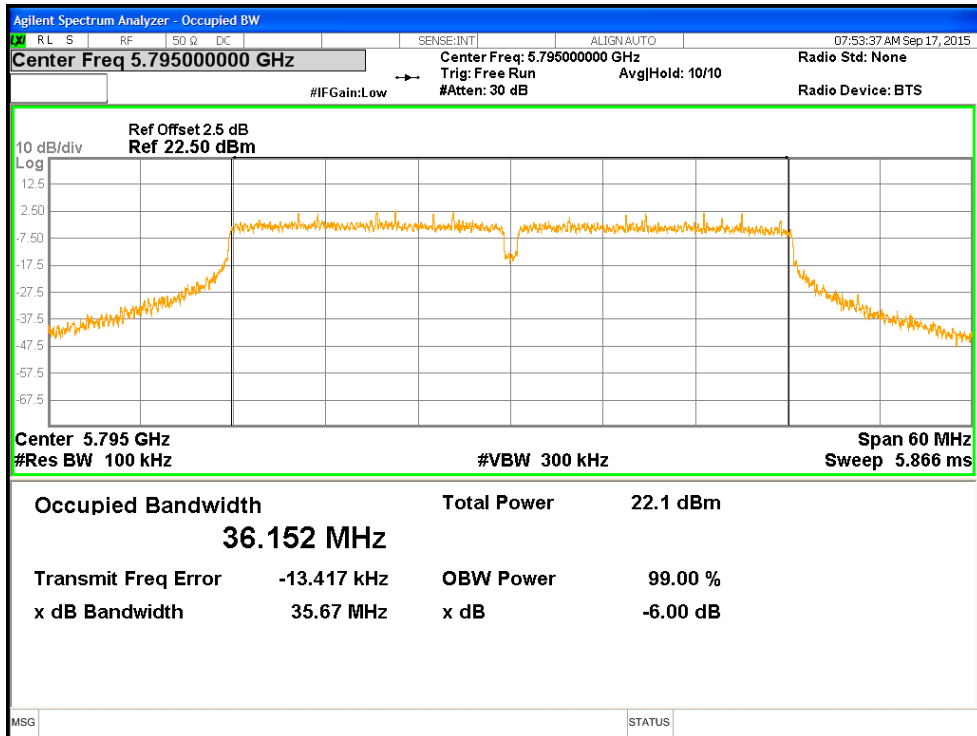


Figure 19: 6dB & 99% Occupied Bandwidth, 5795 MHz at HT40 MCS0, Chain 0

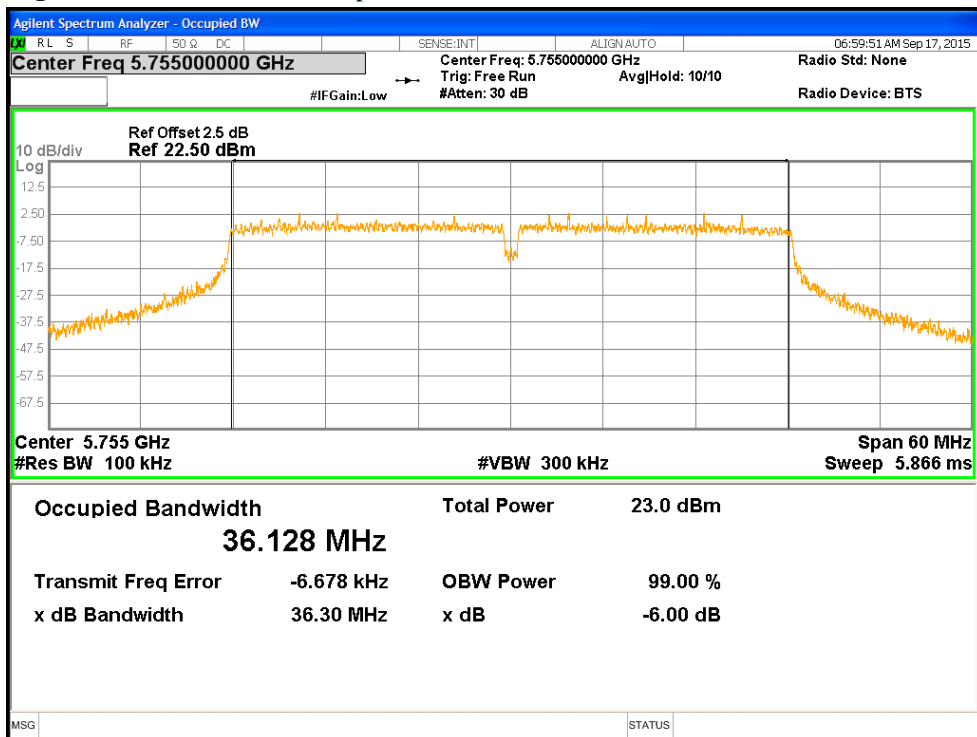


Figure 20: 6dB & 99% Occupied Bandwidth, 5755 MHz at HT40 MCS0, Chain 1

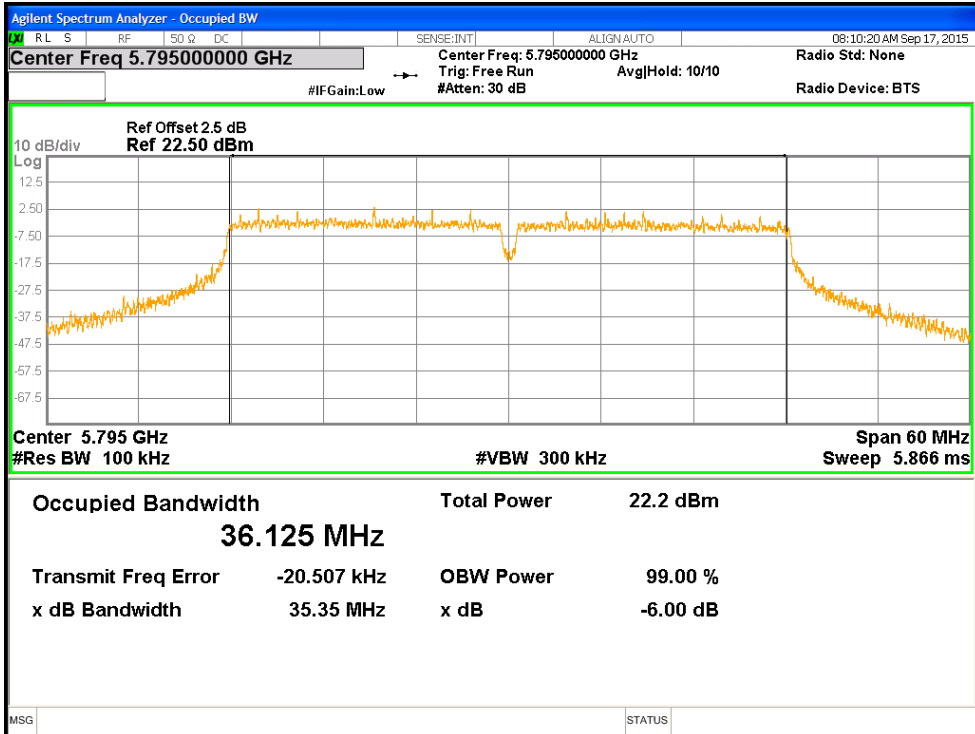


Figure 21: 6dB & 99% Occupied Bandwidth, 5795 MHz at VHT40 MCS0, Chain 0

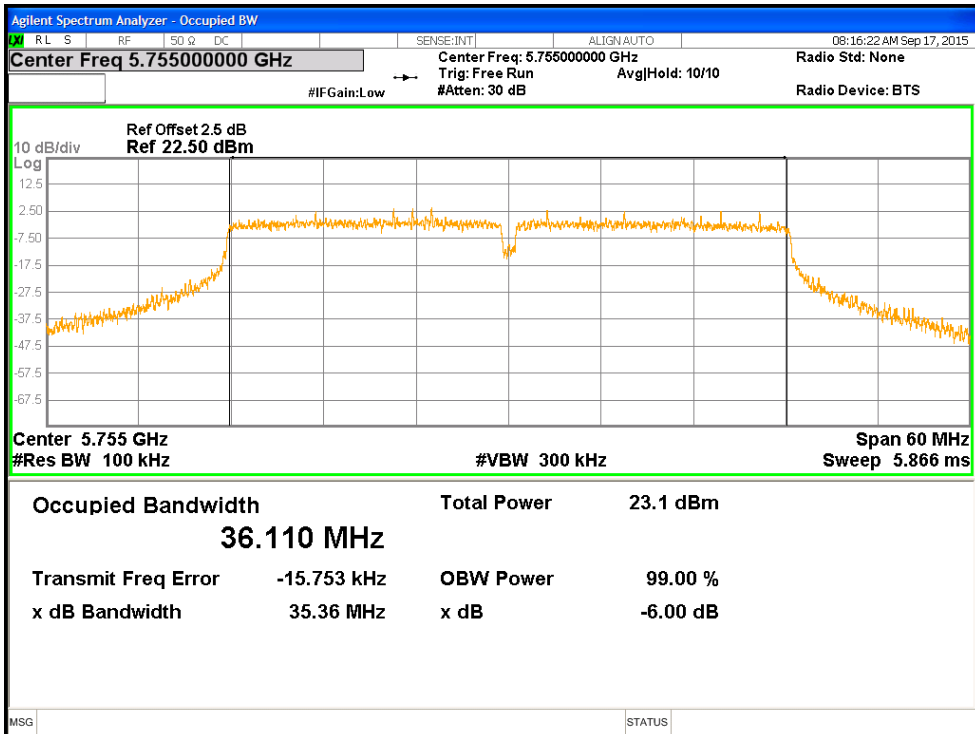


Figure 22: 6dB & 99% Occupied Bandwidth, 5755 MHz at VHT40 MCS0, Chain 1



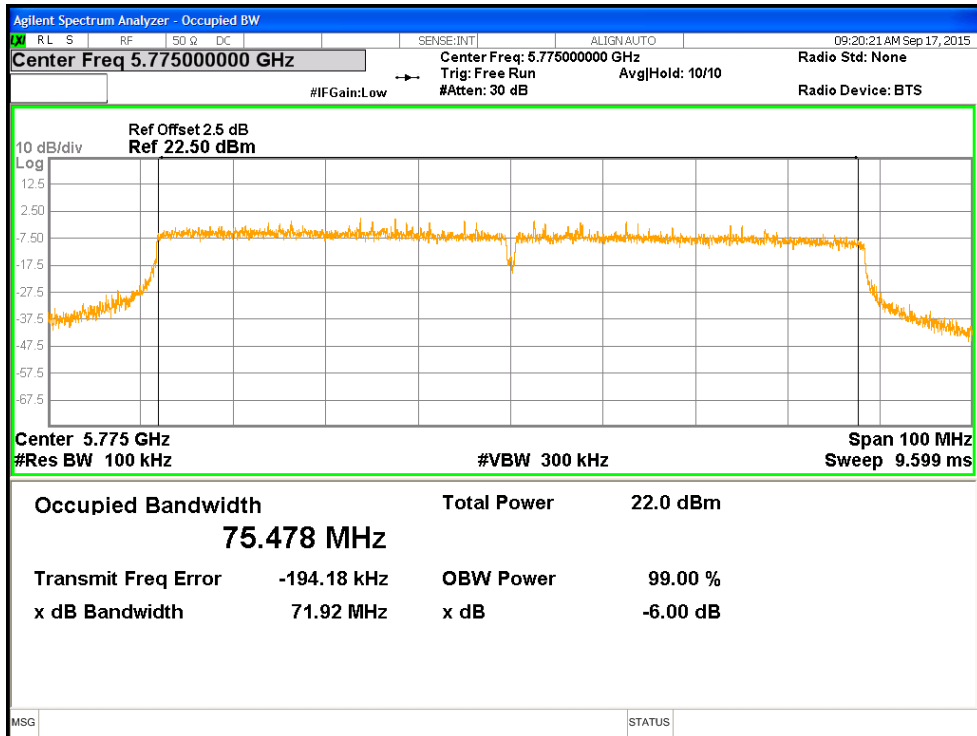


Figure 23: 6dB & 99% Occupied Bandwidth, 5775 MHz at VHT80 MCS0, Chain 0

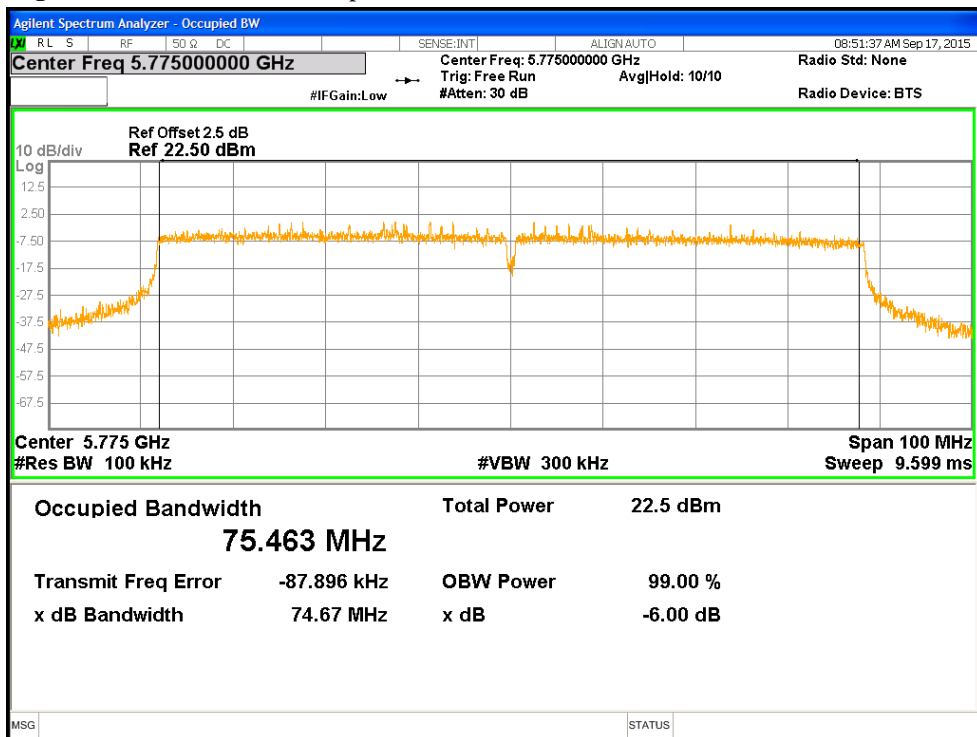


Figure 24: 6dB & 99% Occupied Bandwidth, 5775 MHz at VHT80 MCS0, Chain 1


### 4.3 Peak Power Spectral Density

According to the CFR47 Part 15.407 (a) and RSS 247 Sect.6.2.4.1, in the 5.725 – 5.85 GHz band, the maximum power spectral density shall not exceed 30 dBm in any 500kHz band.during any time interval of continuous transmission.

#### 4.3.1 Test Method

The conducted method was used to measure the channel power output per ANSI C63.10-2013 Section 6.11.2. The measurement was performed with modulation per CFR47 Part 15.407 (a) and RSS 247 Sect.6.2.4.1. The pre-evaluation was performed to find the worst modes. The worst findings were conducted on 3 channels in each operating frequency range of 5725 MHz to 5850 MHz. The worst sample result indicated below.

Test Setup:

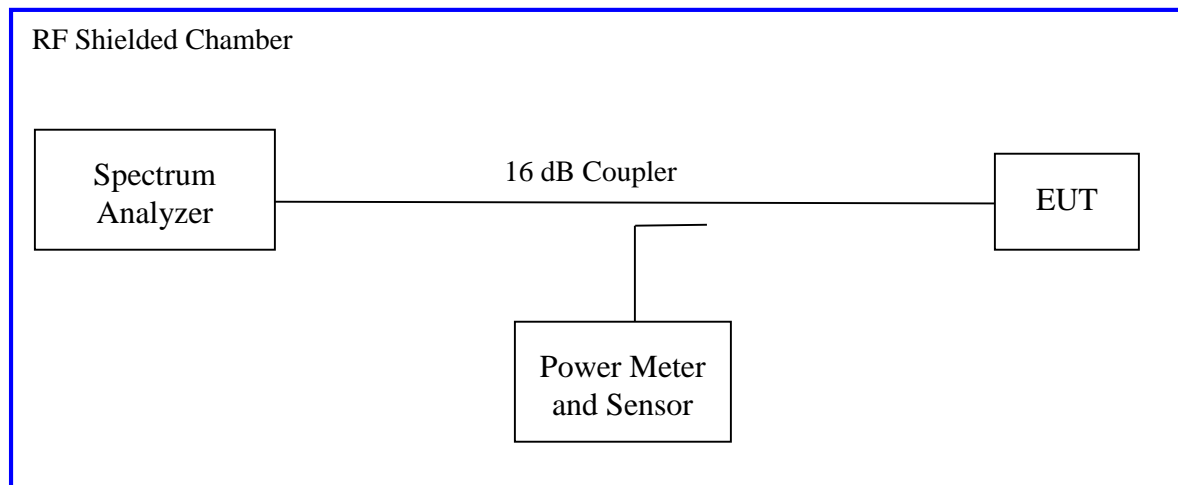

### 4.3.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 7: Peak Power Spectral Density – Test Results**

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature and Voltage only					
<b>Antenna Type:</b> Custom Integrated			<b>Power Setting:</b> See test plan		
<b>Max. Directional Gain:</b> + 2.24 dBi					
<b>Signal State:</b> Modulated at 100%.					
<b>Ambient Temp.:</b> 21° C			<b>Relative Humidity:</b> 39%		
<b>Peak Power Spectral Density</b>					
<b>802.11a</b>					
<b>Freq. (MHz)</b>	<b>Ch0 [dBm]</b>	<b>Ch1 [dBm]</b>	<b>Total PSD [dBm]</b>	<b>Limit [dBm]</b>	<b>Margin [dB]</b>
5745	6.82	9.10	11.12	30.00	-18.88
5785	11.74	11.64	14.70	30.00	-15.30
5825	7.74	8.58	11.19	30.00	-18.81
<b>Note:</b> 1. The highest peak power spectral density was observed at <b>11a 6Mbps</b> per data stream. 2. The sum of Ch0 and Ch1 = Total PSD. 3. Limited numbers of plots are placed in the report.					
<b>802.11n</b>					
<b>Freq. (MHz)</b>	<b>Ch0 [dBm]</b>	<b>Ch1 [dBm]</b>	<b>Total PSD [dBm]</b>	<b>Limit [dBm]</b>	<b>Margin [dB]</b>
5745	6.95	8.93	11.06	30.00	-18.94
5785	10.87	11.30	14.10	30.00	-15.90
5825	7.90	8.02	10.97	30.00	-19.03
<b>Note:</b> 1. The highest peak power spectral density was observed at <b>HT20 MCS0</b> per data stream. 2. The sum of Ch0 and Ch1 = Total PSD. 3. Limited numbers of plots are placed in the report.					

**Table 8: Peak Power Spectral Density – Test Results Continues**

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature and Voltage only					
<b>Antenna Type:</b> Custom Integrated			<b>Power Setting:</b> See test plan		
<b>Max. Directional Gain:</b> + 2.24 dBi					
<b>Signal State:</b> Modulated at 100%.					
<b>Ambient Temp.:</b> 21° C			<b>Relative Humidity:</b> 39%		
<b>Peak Power Spectral Density</b>					
<b>802.11ac</b>					
Freq. (MHz)	Ch0 [dBm]	Ch1 [dBm]	Total PSD [dBm]	Limit [dBm]	Margin [dB]
5745	7.03	8.07	10.59	30.00	-19.41
5785	10.81	11.36	14.10	30.00	-15.90
5825	7.73	7.61	10.68	30.00	-19.32
<b>Note:</b> 1. The highest peak power spectral density was observed at <b>VHT20 MCS0</b> per data stream. 2. The sum of Ch0 and Ch1 = Total PSD. 3. Limited numbers of plots are placed in the report.					
<b>802.11n</b>					
Freq. (MHz)	Ch0 [dBm]	Ch1 [dBm]	Total PSD [dBm]	Limit [dBm]	Margin [dB]
5755	3.63	3.93	6.79	30.00	-23.21
5795	2.81	3.39	6.12	30.00	-23.88
<b>Note:</b> 1. The highest peak power spectral density was observed at <b>HT40 MCS0</b> per data stream. 2. The sum of Ch0 and Ch1 = Total PSD. 3. Limited numbers of plots are placed in the report.					

**Table 9:** Peak Power Spectral Density – Test Results Continues

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature and Voltage only					
<b>Antenna Type:</b> Custom Integrated			<b>Power Setting:</b> See test plan		
<b>Max. Directional Gain:</b> + 2.24 dBi					
<b>Signal State:</b> Modulated at 100%.					
<b>Ambient Temp.:</b> 21° C			<b>Relative Humidity:</b> 39%		
<b>Peak Power Spectral Density</b>					
<b>802.11ac</b>					
Freq. (MHz)	Ch0 [dBm]	Ch1 [dBm]	Total PSD [dBm]	Limit [dBm]	Margin [dB]
5755	4.10	3.98	7.05	30.00	-22.95
5795	3.01	3.10	6.07	30.00	-23.93
<b>Note:</b> 1. The highest peak power spectral density was observed at <b>VHT40 MCS0</b> per data stream. 2. The sum of Ch0 and Ch1 = Total PSD. 3. Limited numbers of plots are placed in the report.					
<b>802.11ac</b>					
Freq. (MHz)	Ch0 [dBm]	Ch1 [dBm]	Total PSD [dBm]	Limit [dBm]	Margin [dB]
5775	-0.12	0.29	3.10	30.00	-26.90
<b>Note:</b> 1. The highest peak power spectral density was observed at <b>VHT80 MCS0</b> per data stream. 2. The sum of Ch0 and Ch1 = Total PSD. 3. Limited numbers of plots are placed in the report.					

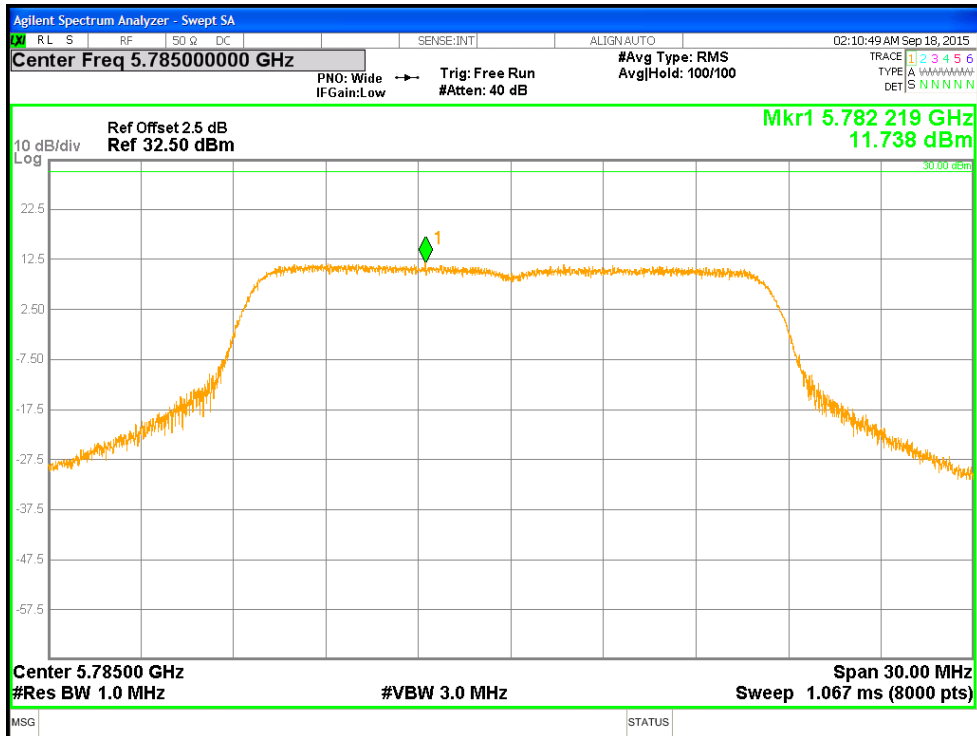


Figure 25: Power Spectral Density, 5785 MHz at 802.11a 6Mbps, Chain 0

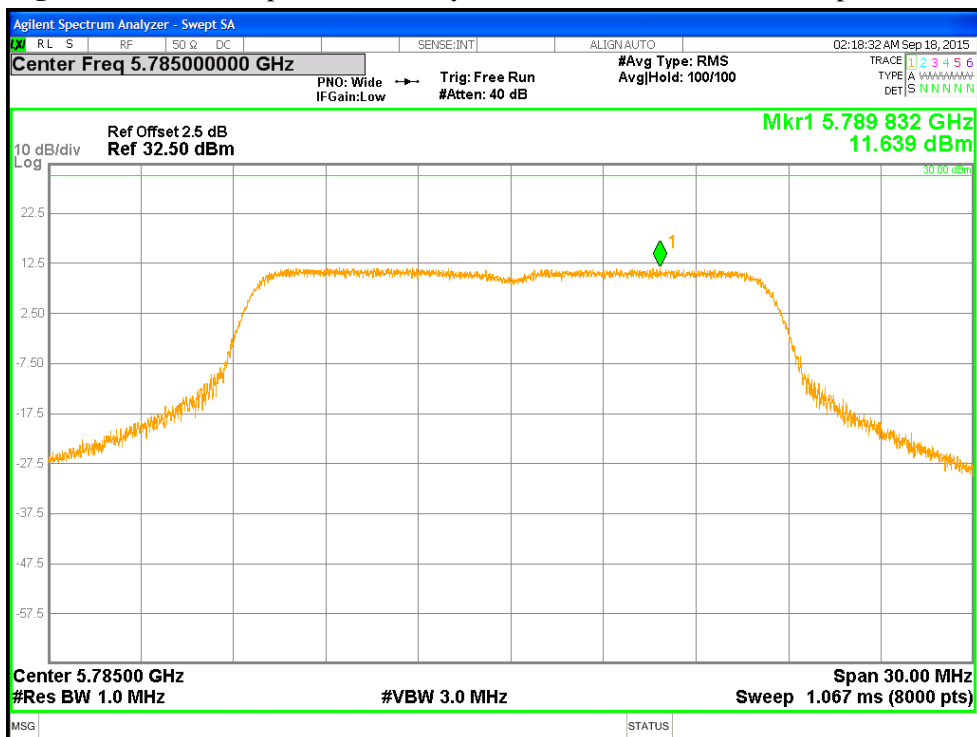


Figure 26: Power Spectral Density, 5785 MHz at 802.11a 6Mbps, Chain 1

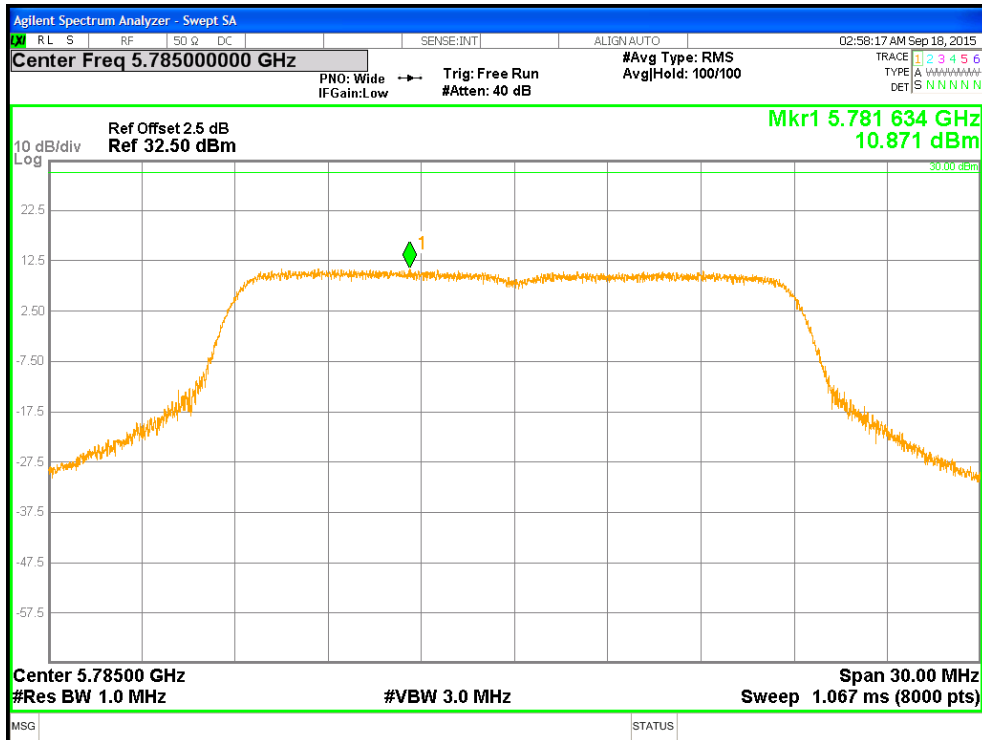


Figure 27: Power Spectral Density, 5785 MHz at HT20 MCS0, Chain 0

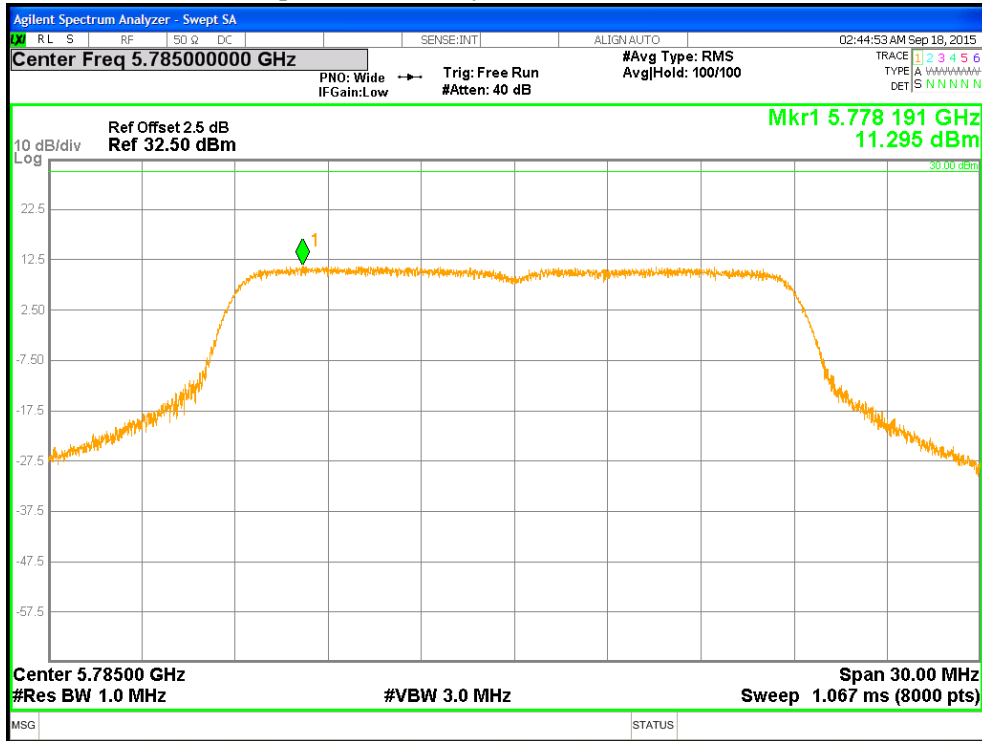


Figure 28: Power Spectral Density, 5785 MHz at HT20 MCS0, Chain 1

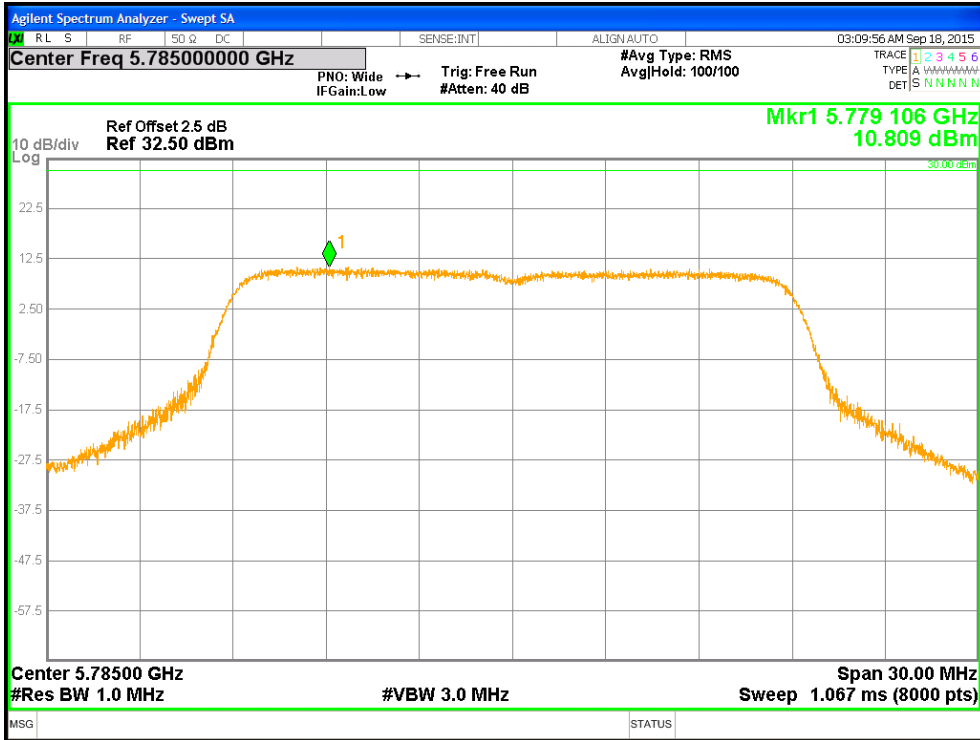


Figure 29: Power Spectral Density, 5785 MHz at VHT20 MCS0, Chain 0

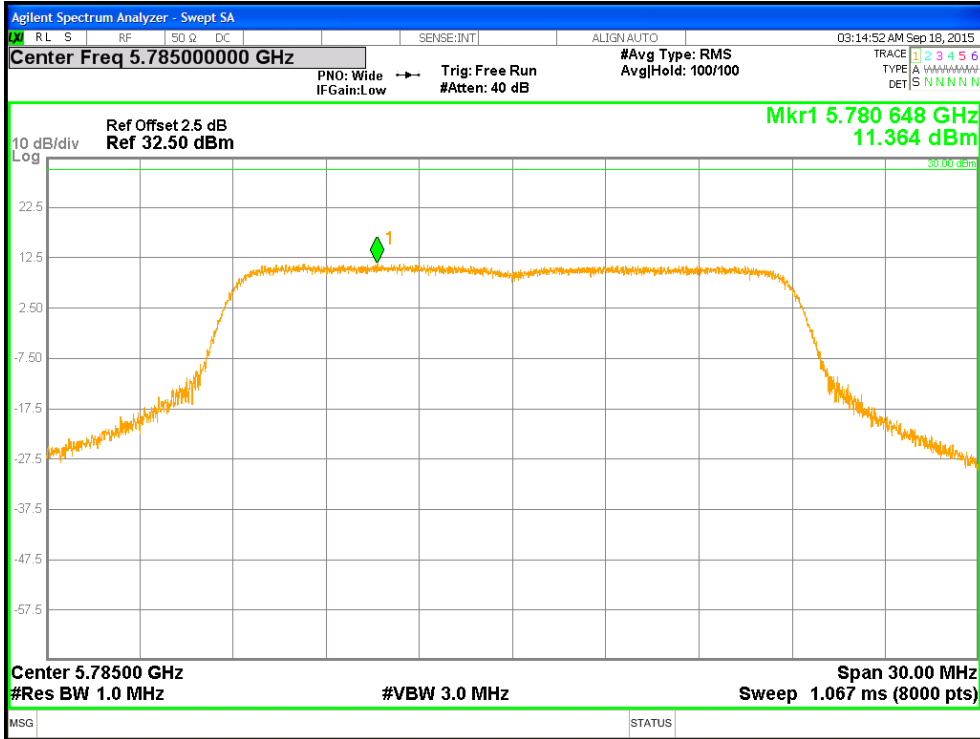


Figure 30: Power Spectral Density, 5785 MHz at VHT20 MCS0, Chain 1



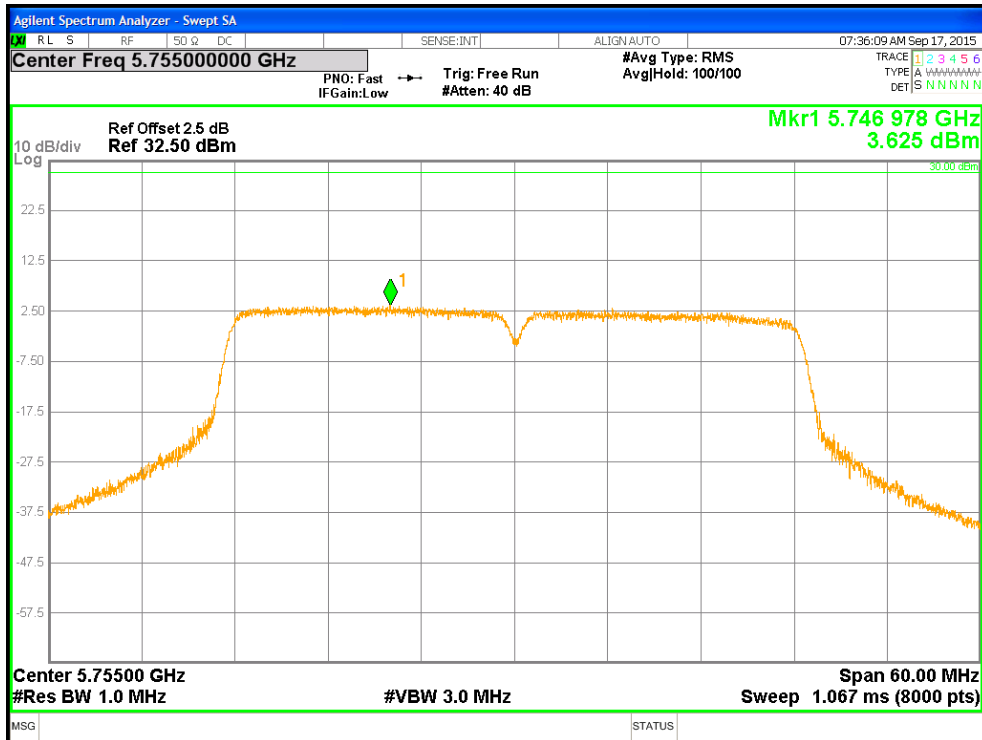


Figure 31: Power Spectral Density, 5755 MHz at HT40 MCS0, Chain 0

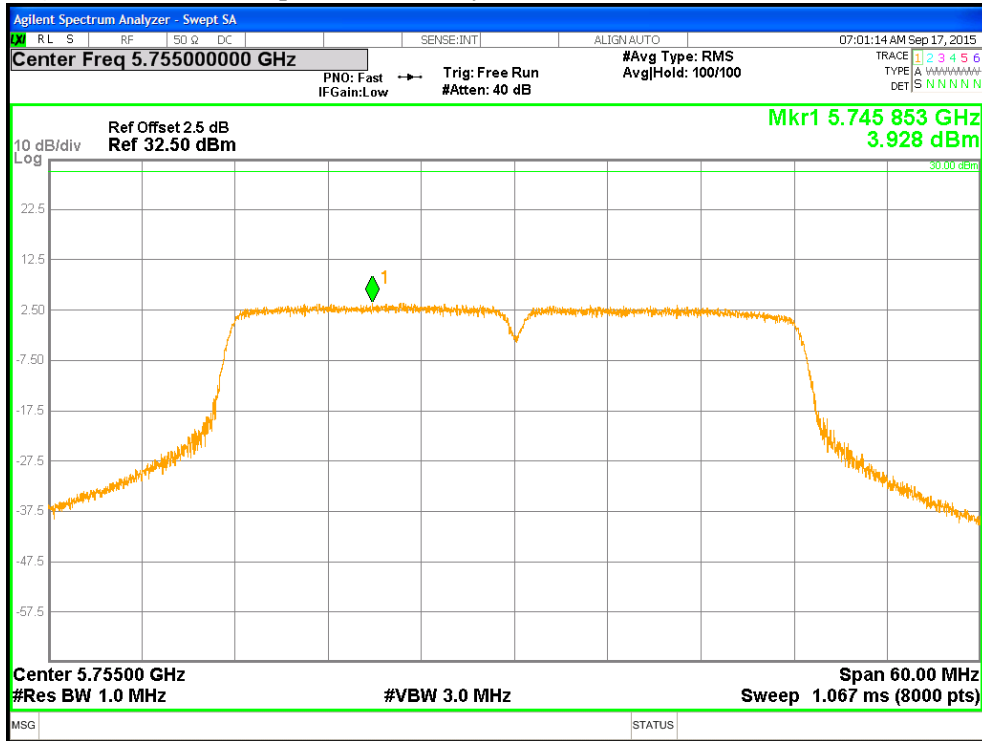


Figure 32: Power Spectral Density, 5755 MHz at HT40 MCS0, Chain 1

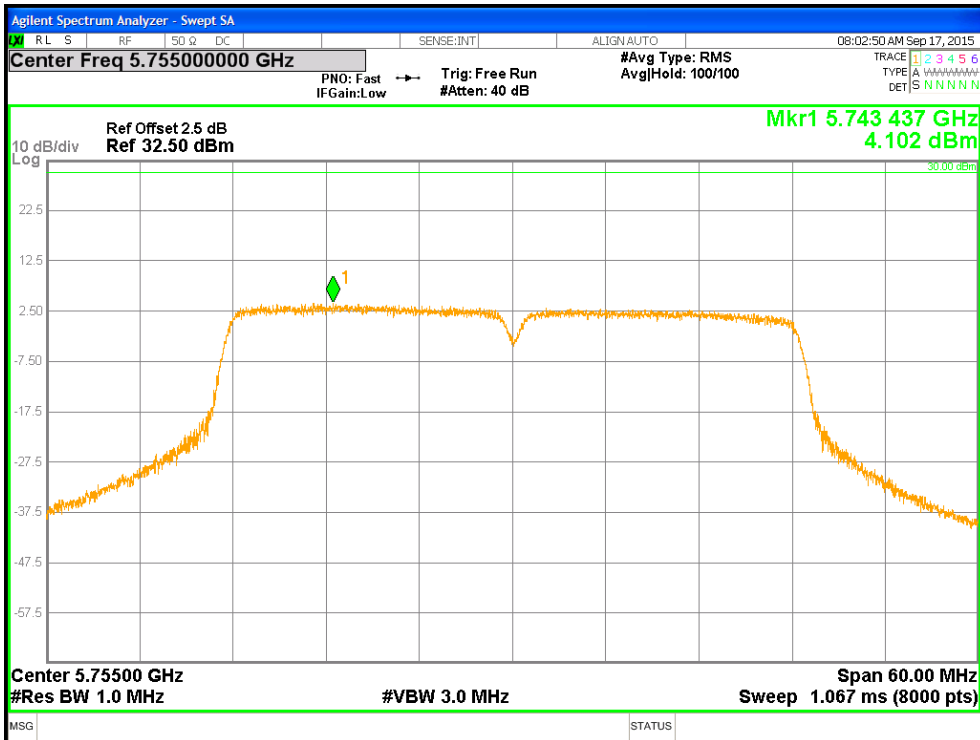


Figure 33: Power Spectral Density, 5755 MHz at VHT40 MCS0, Chain 0

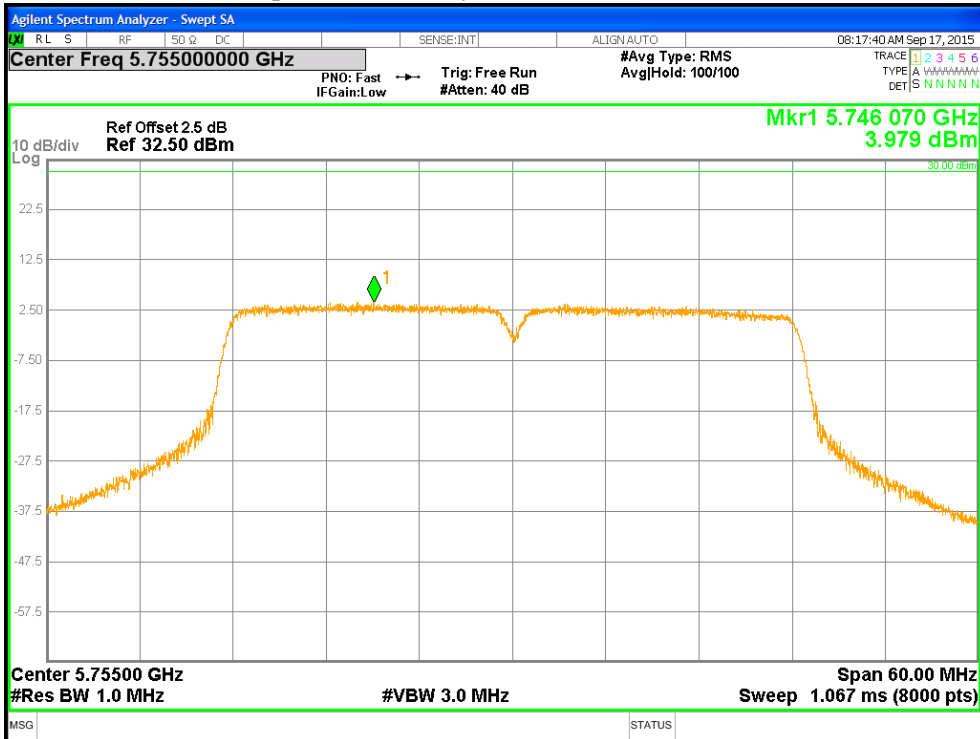


Figure 34: Power Spectral Density, 5755 MHz at VHT40 MCS0, Chain 1

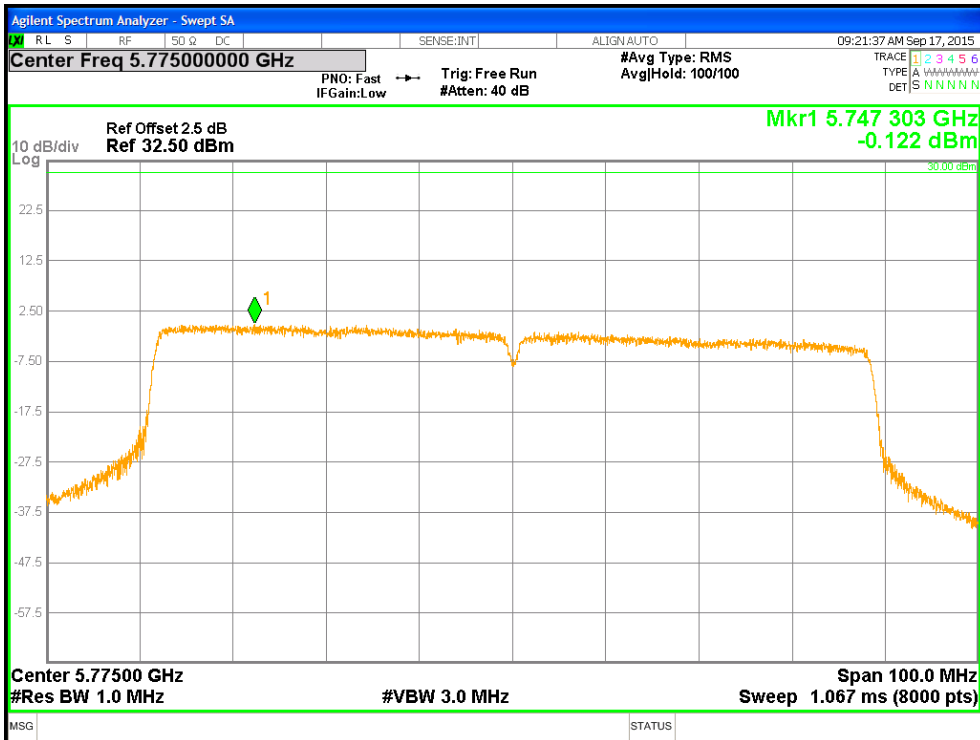


Figure 35: Power Spectral Density, 5775 MHz at VHT80 MCS0, Chain 0

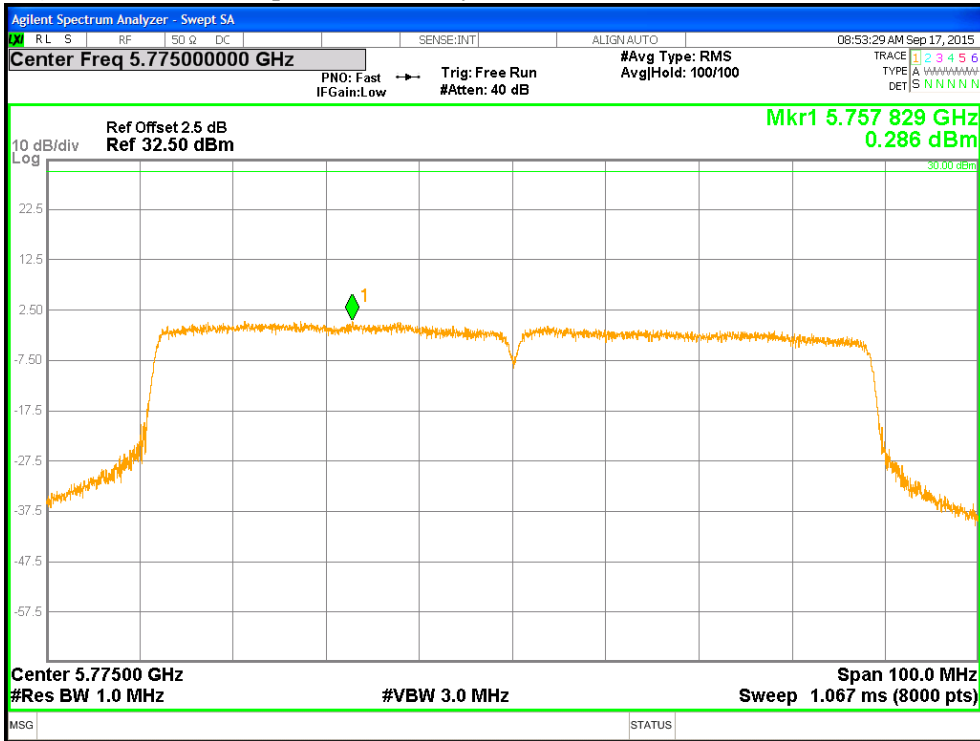


Figure 36: Power Spectral Density, 5775 MHz at VHT80 MCS0, Chain 1

#### 4.4 Undesirable Emission Limits

CFR47 15.407 (b) and RSS 247 Sect.6.2.4.2: The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

##### 4.4.1 Test Method

The conducted method was used to measure the undesirable emission requirement. The measurement was performed with modulation. This test was conducted on 3 channels of Sample in each mode on Sample. The worst sample result indicated below.

Final Scan: 802.11a, 802.11n (HT20 and HT40), 802.11ac (VHT20, VHT40 and VHT80)

Test Setup:

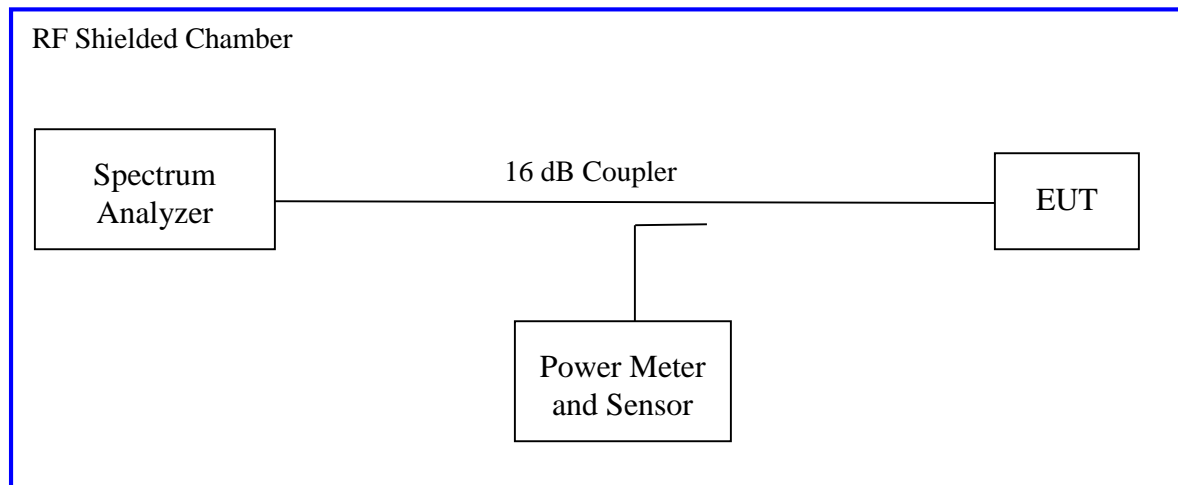

Measurement Procedure AVG2 of KDB 662911

## 4.4.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 10:** Emissions at the Band-Edge – Test Results

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature and Voltage only						
<b>Antenna Type:</b> Custom Integrated			<b>Power Setting:</b> See test plan			
<b>Max. Directional Gain:</b> + 2.24 dBi						
<b>Signal State:</b> Modulated at 100%.						
<b>Ambient Temp.:</b> 20° C			<b>Relative Humidity:</b> 42%			
<b>Non-Restricted Frequency Band Emission</b>						
<b>Freq. (MHz)</b>	<b>Mode</b>	<b>Chain</b>	<b>Measured (dBm)</b>	<b>Limit (dBm)</b>	<b>Plots</b>	<b>Comment</b>
39953	802.11a 6Mbps	0	-31.43	-27.00	Fig. 37, 38	Below edge
38775	802.11a 6Mbps	1	-31.96	-27.00	Fig. 39, 40	Below edge
39954	802.11a 6Mbps	0	-30.96	-27.00	Fig. 41, 42	Above edge
39732	802.11a 6Mbps	1	-32.33	-27.00	Fig. 43, 44	Above edge
38803	HT20-MCS0	0	-31.56	-27.00	Fig. 45, 46	Below edge
38519	HT20-MCS0	1	-32.28	-27.00	Fig. 47, 48	Below edge
5864	HT20-MCS0	0	-30.39	-27.00	Fig. 49, 50	Above edge
38832	HT20-MCS0	1	-32.31	-27.00	Fig. 51, 52	Above edge
39984	VHT20 MCS0	0	-30.82	-27.00	Fig. 53, 54	Below edge
39031	VHT20 MCS0	1	-32.66	-27.00	Fig. 55, 56	Below edge
39138	VHT20 MCS0	0	-30.55	-27.00	Fig. 57, 58	Above edge
5862	VHT20 MCS0	1	-30.90	-27.00	Fig. 59, 60	Above edge
Note: 1. All out of band emissions are lower than the 17dBr level (10 MHz below or above the band edge) and 27dBr level (10 MHz greater than below or above the band edge).						

**Table 11:** Emissions at the Band-Edge – Test Results Continues

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature and Voltage only						
<b>Antenna Type:</b> Custom Integrated			<b>Power Setting:</b> See test plan			
<b>Max. Directional Gain:</b> + 2.24 dBi						
<b>Signal State:</b> Modulated at 100%.						
<b>Ambient Temp.:</b> 20° C			<b>Relative Humidity:</b> 42%			
<b>Non-Restricted Frequency Band Emission</b>						
<b>Freq. (MHz)</b>	<b>Mode</b>	<b>Chain</b>	<b>Measured (dBm)</b>	<b>Limit (dBm)</b>	<b>Plots</b>	<b>Comment</b>
39123	HT40 MCS0	0	-31.44	-27.00	Fig. 61, 62	Below edge
39164	HT40 MCS0	1	-32.18	-27.00	Fig. 63, 64	Below edge
38906	HT40 MCS0	0	-31.14	-27.00	Fig. 65, 66	Above edge
38831	HT40 MCS0	1	-31.15	-27.00	Fig. 67, 68	Above edge
39896	VHT40-MCS0	0	-31.33	-27.00	Fig. 69, 70	Below edge
38422	VHT40-MCS0	1	-31.75	-27.00	Fig. 71, 72	Below edge
38831	VHT40-MCS0	0	-31.58	-27.00	Fig. 73, 74	Above edge
38565	VHT40-MCS0	1	-31.83	-27.00	Fig. 75, 76	Above edge
5724	VHT80 MCS0	0	-23.82	-17.00	Fig. 77, 78	Below edge
5714	VHT80 MCS0	1	-28.63	-17.00	Fig. 79, 80	Below edge
5850	VHT80 MCS0	0	-42.21	-17.00	Fig. 77, 78	Above edge
5850	VHT80 MCS0	1	-40.74	-17.00	Fig. 79, 80	Above edge
Note: 1. All out of band emissions are lower than the 17dBr level (10 MHz below or above the band edge) and 27dBr level (10 MHz greater than below or above the band edge).						

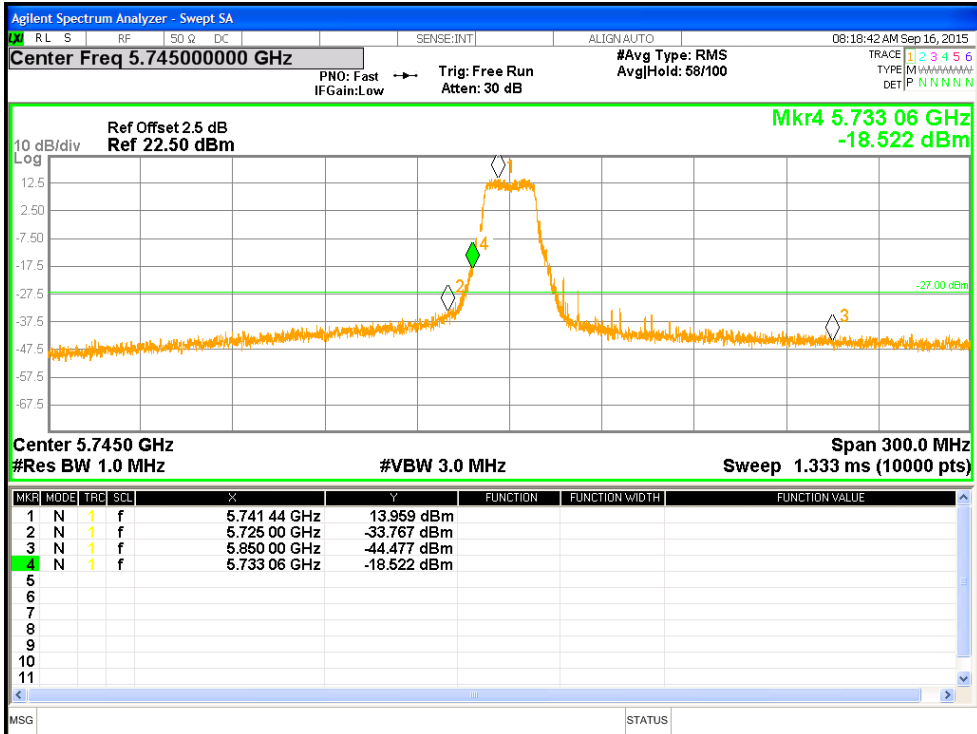


Figure 37: Measured Below Edge for 802.11a-6Mbps at 5745 MHz, Chain 0

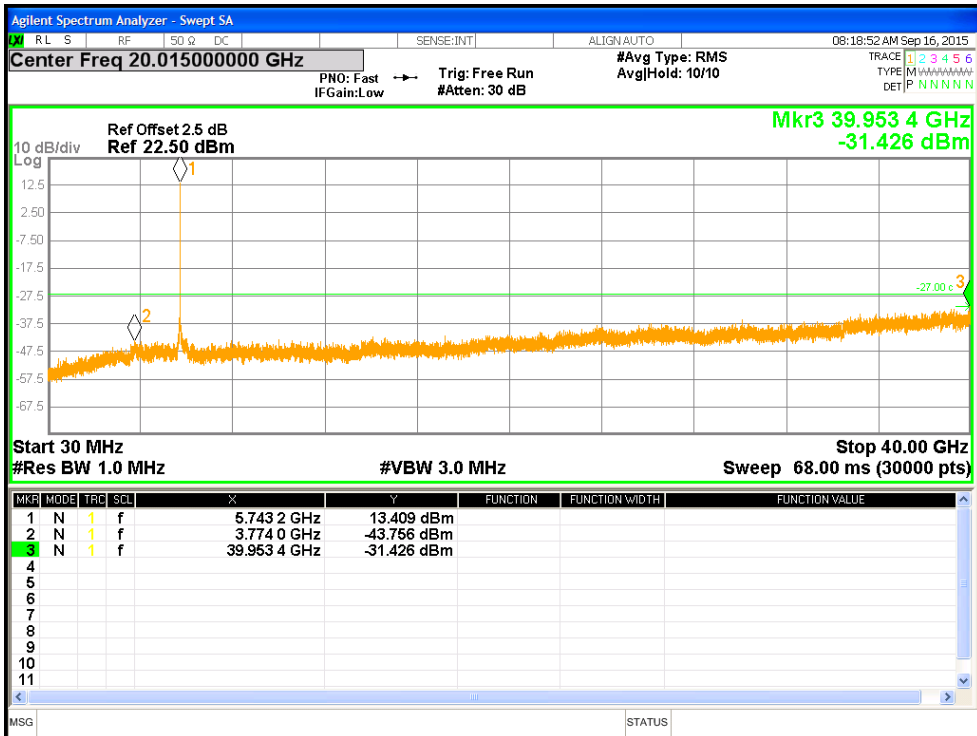


Figure 38: Undesirable Emission for 802.11a-6Mbps at 5745 MHz, Chain 0

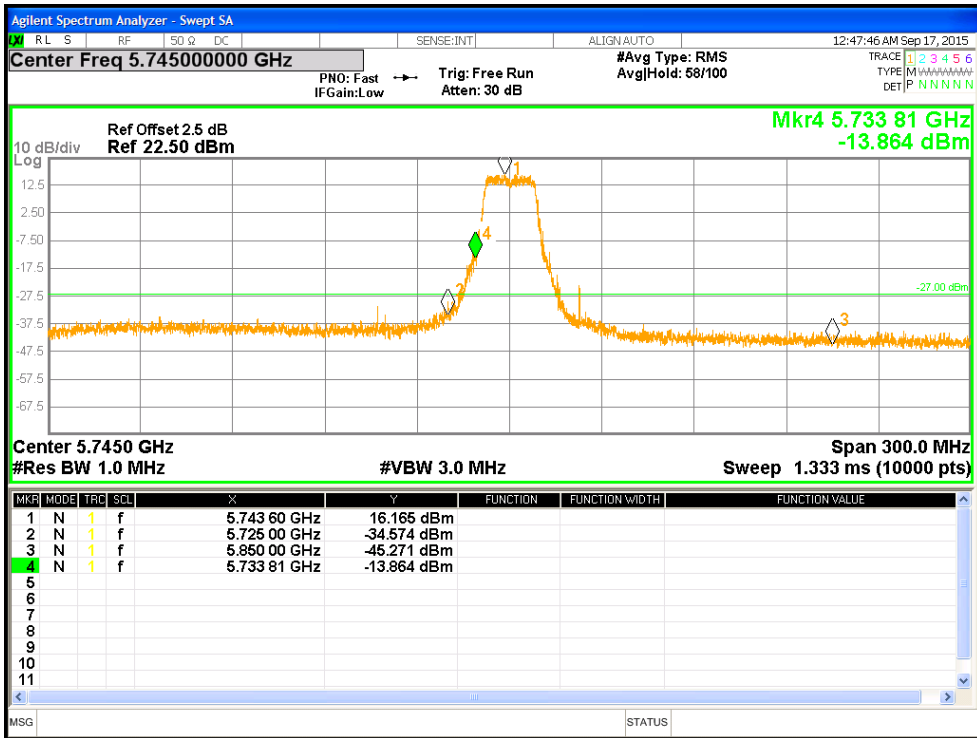


Figure 39: Measured Below Edge for 802.11a-6Mbps at 5745 MHz, Chain 1

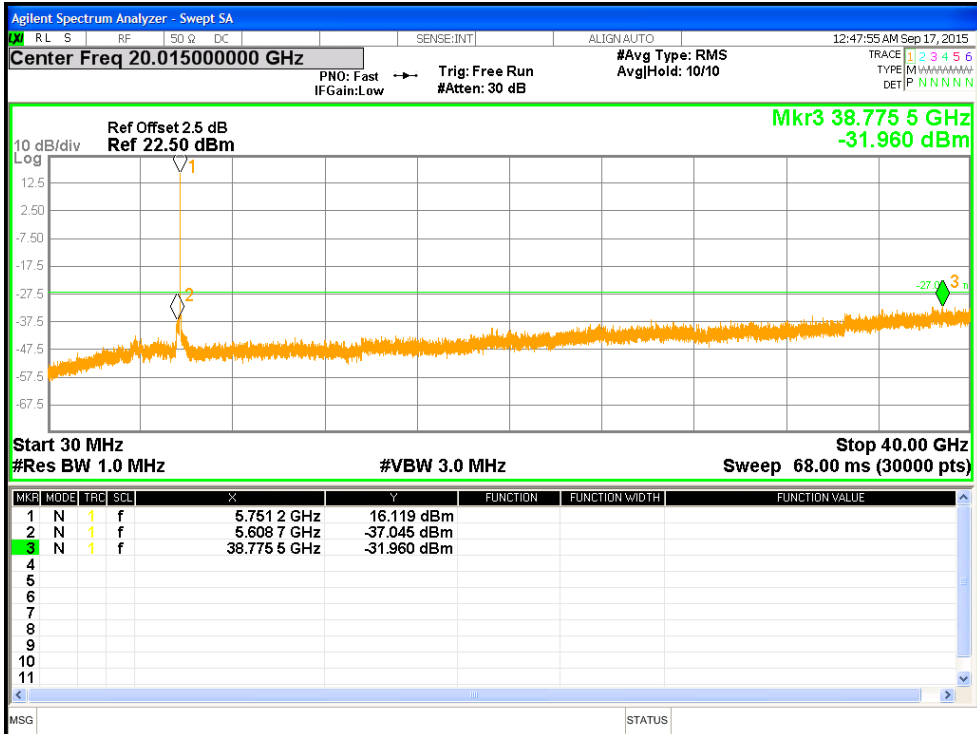


Figure 40: Undesirable Emission for 802.11a-6Mbps at 5745 MHz, Chain 1



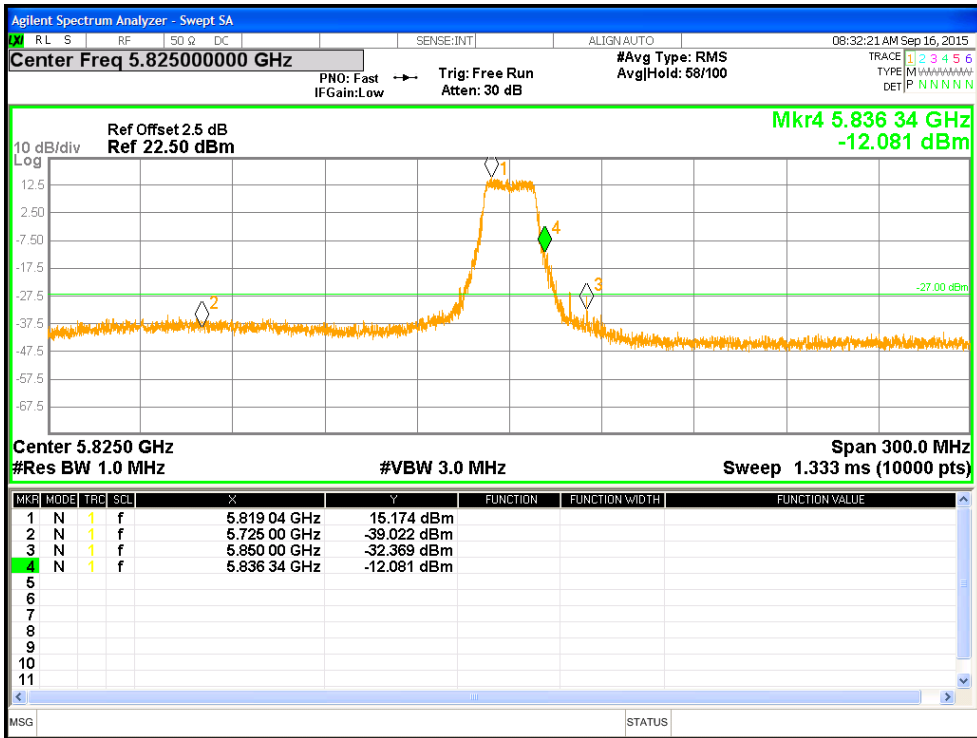


Figure 41: Measured Above Edge for 802.11a-6Mbps at 5825 MHz, Chain 0

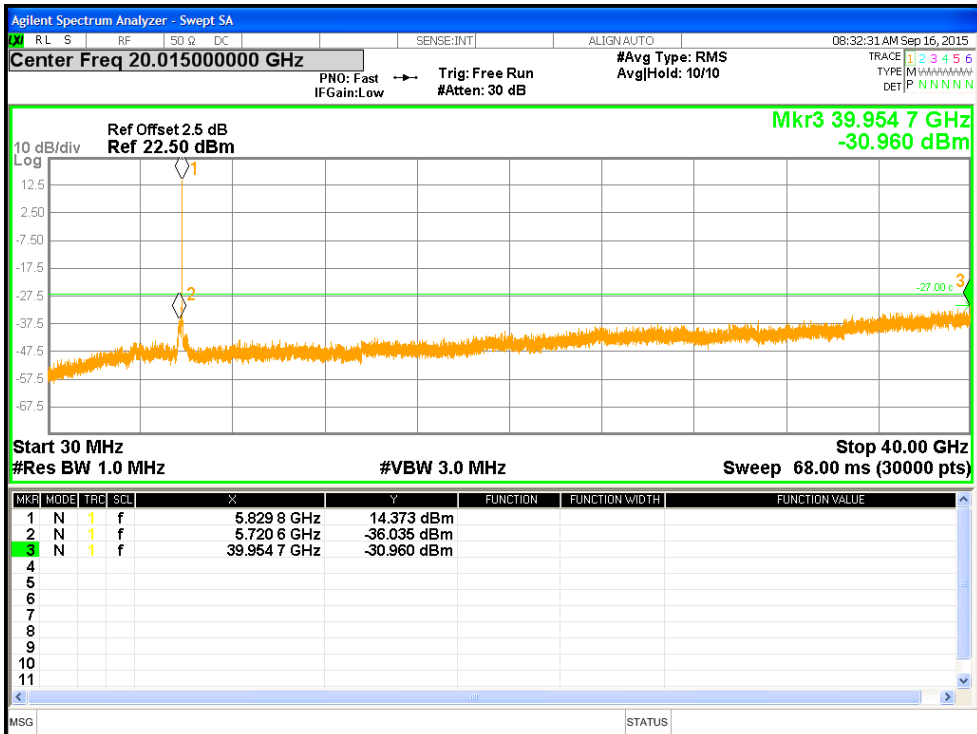


Figure 42: Undesirable Emission for 802.11a-6Mbps at 5825 MHz, Chain 0

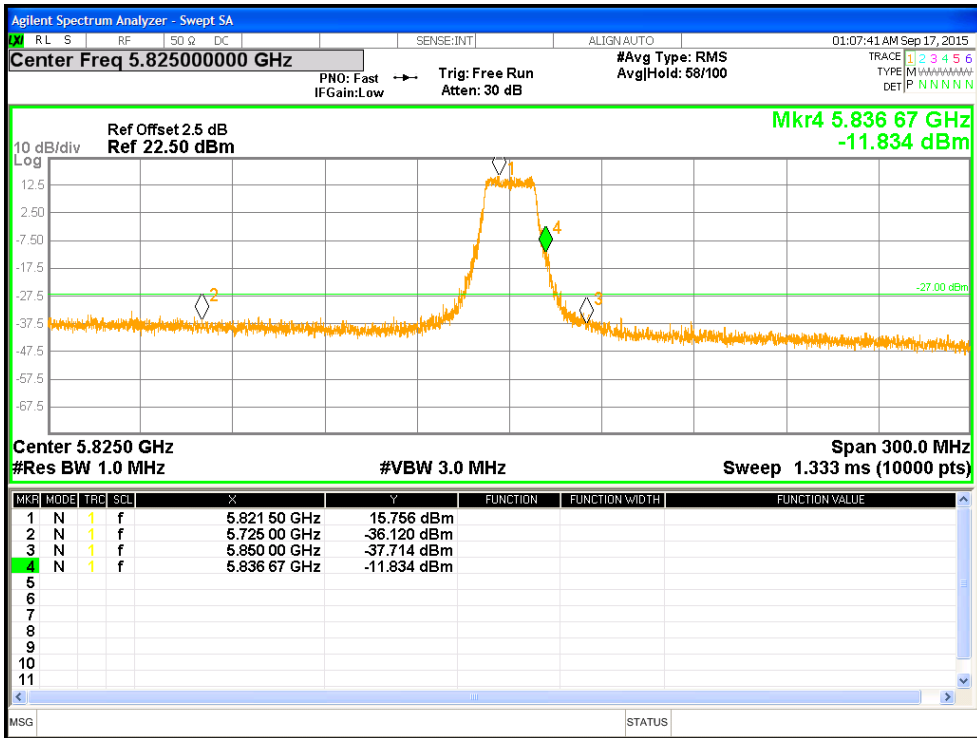


Figure 43: Measured Above Edge for 802.11a-6Mbps at 5825 MHz, Chain 1

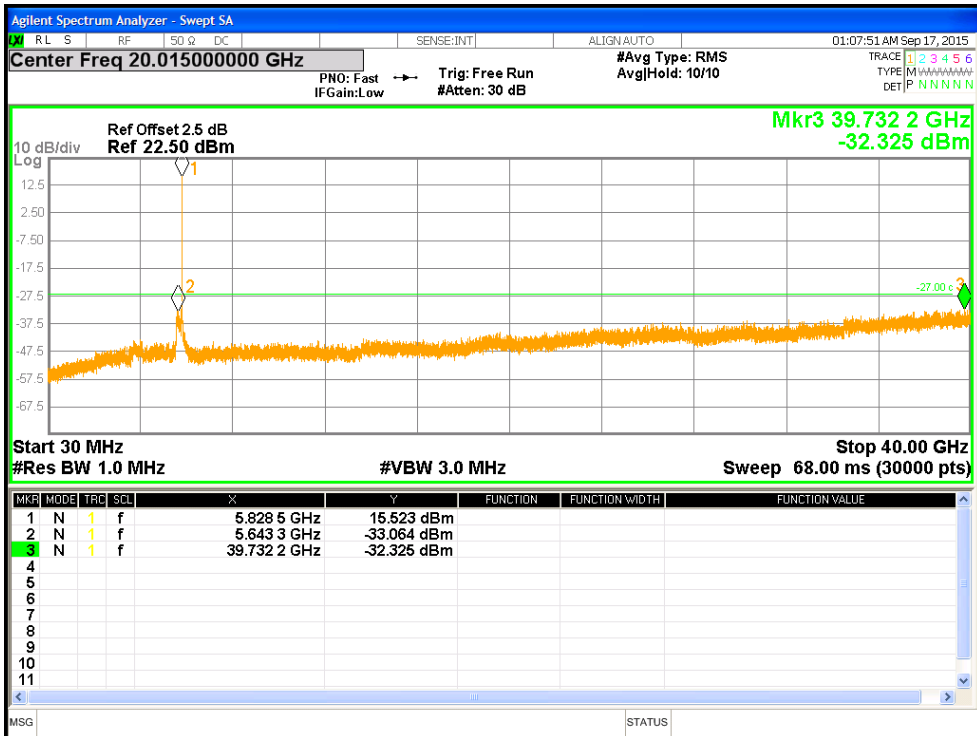


Figure 44: Undesirable Emission for 802.11a-6Mbps at 5825 MHz, Chain 1

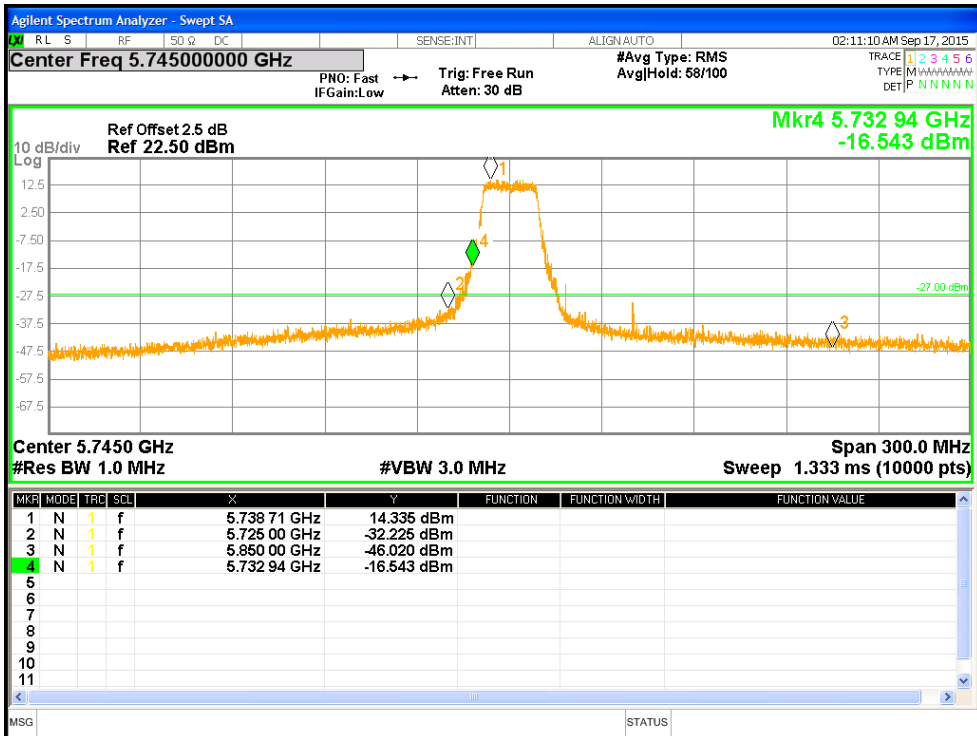


Figure 45: Measured Below Edge for HT20-MCS0 at 5745 MHz, Chain 0

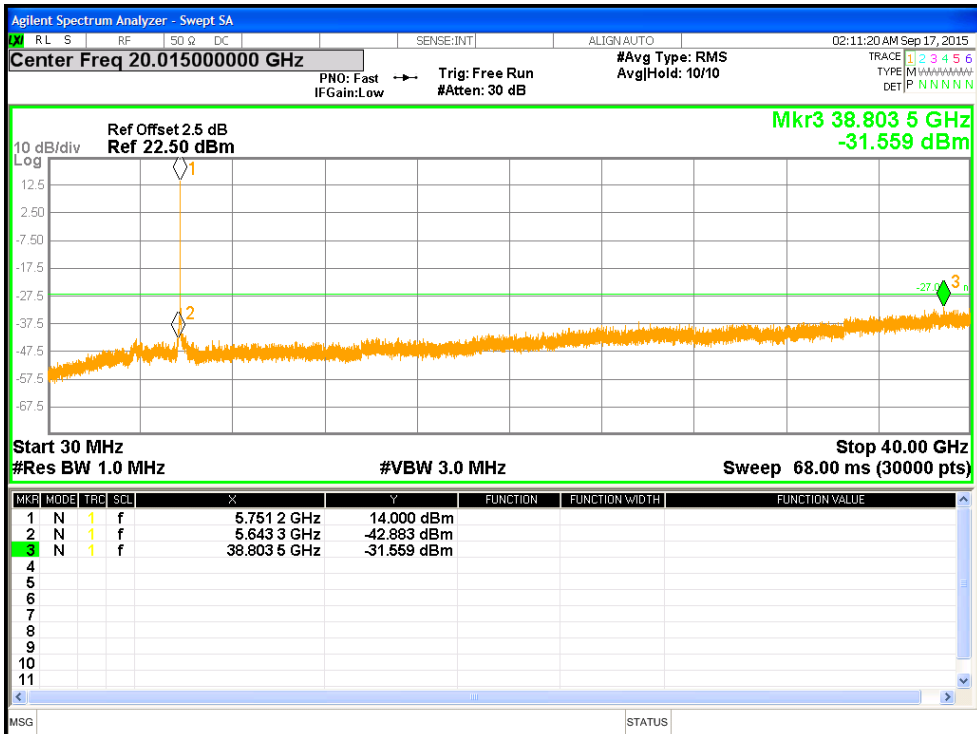


Figure 46: Undesirable Emission for HT20-MCS0 at 5745 MHz, Chain 0

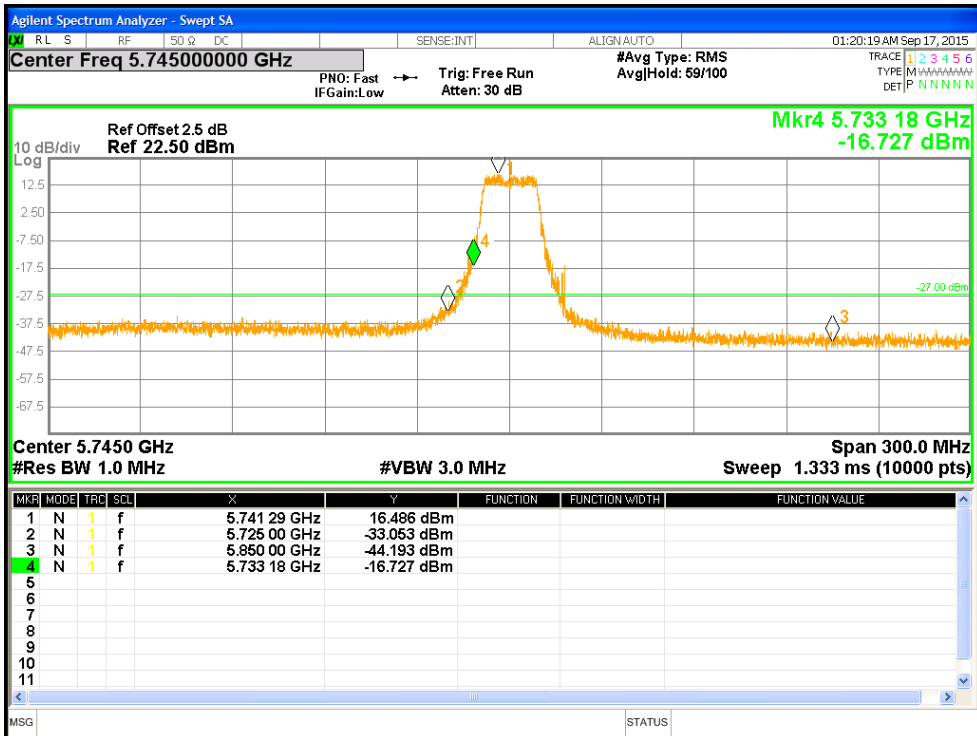


Figure 47: Measured Below Edge for HT20-MCS0 at 5745 MHz, Chain 1

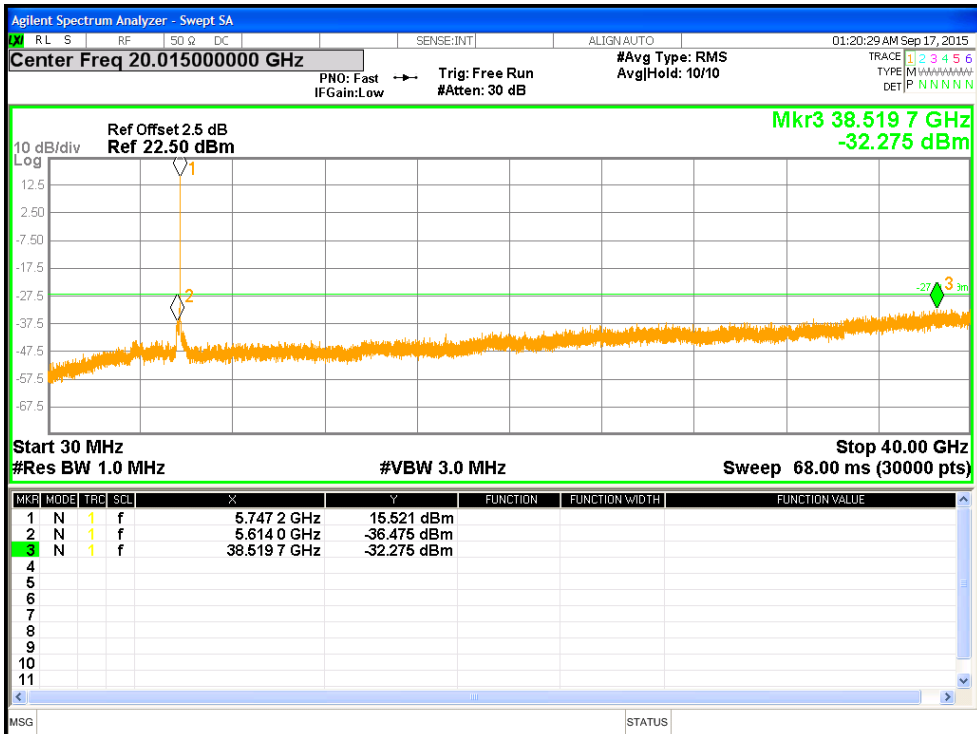


Figure 48: Undesirable Emission for HT20-MCS0 at 5745 MHz, Chain 1

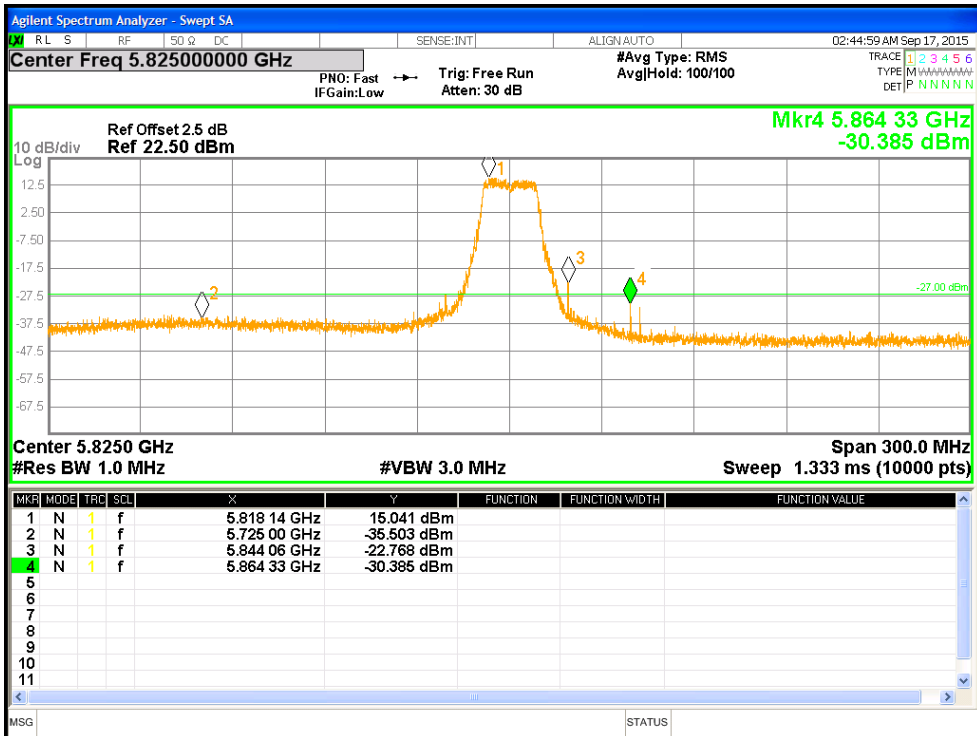


Figure 49: Measured Above Edge for HT20-MCS0 at 5825 MHz, Chain 0

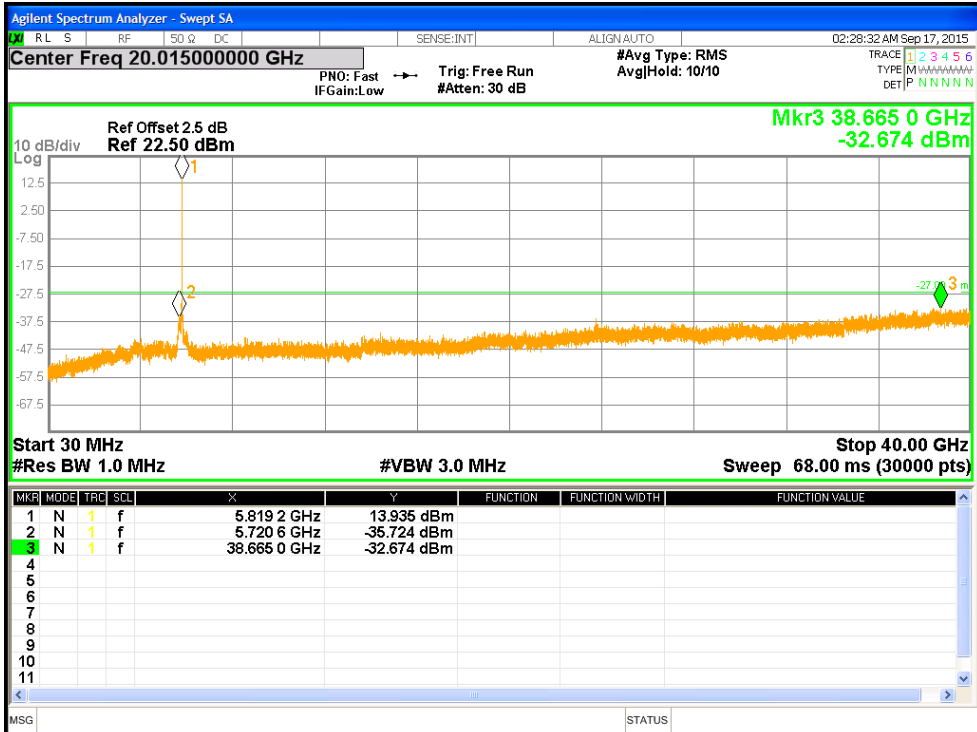


Figure 50: Undesirable Emission for HT20-MCS0 at 5825 MHz, Chain 0

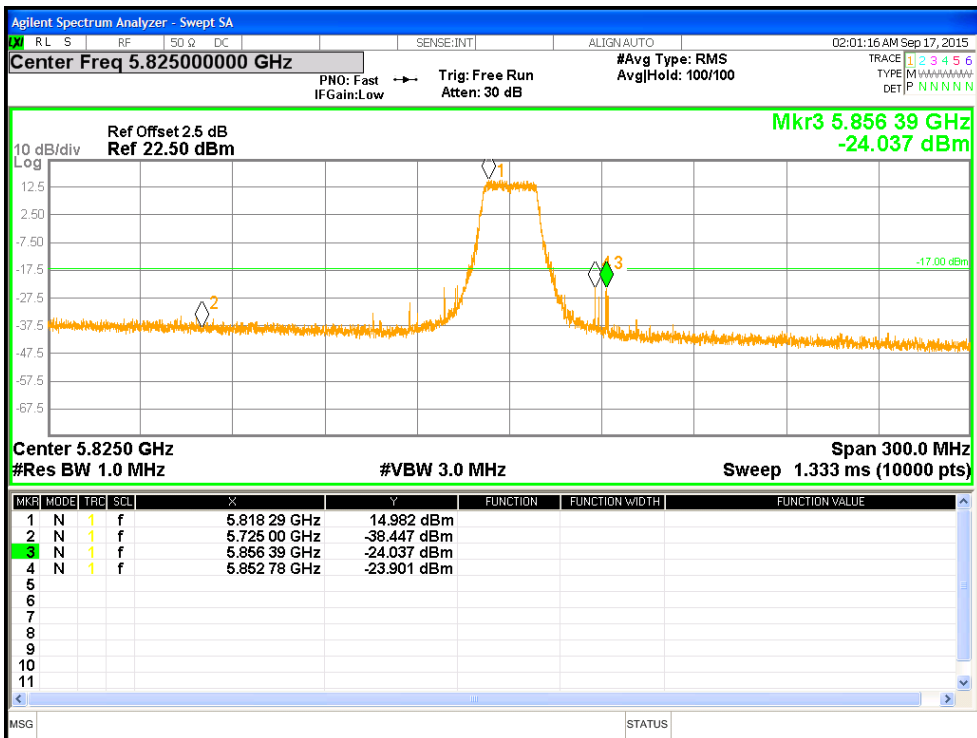


Figure 51: Measured Above Edge for HT20-MCS0 at 5825 MHz, Chain 1

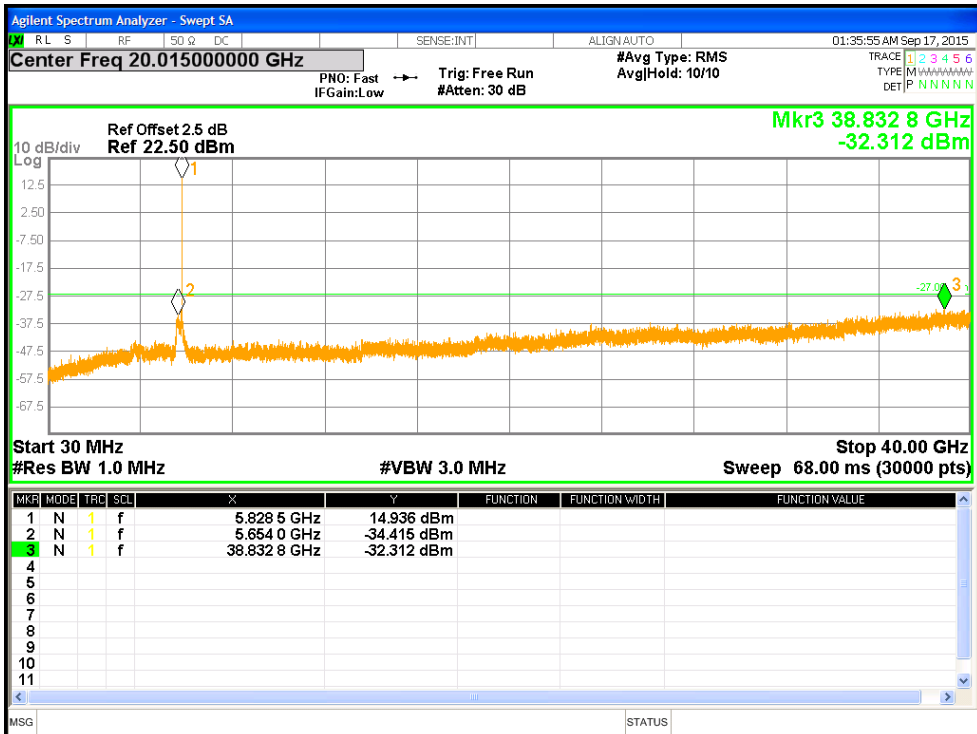


Figure 52: Undesirable Emission for HT20-MCS0 at 5825 MHz, Chain 1

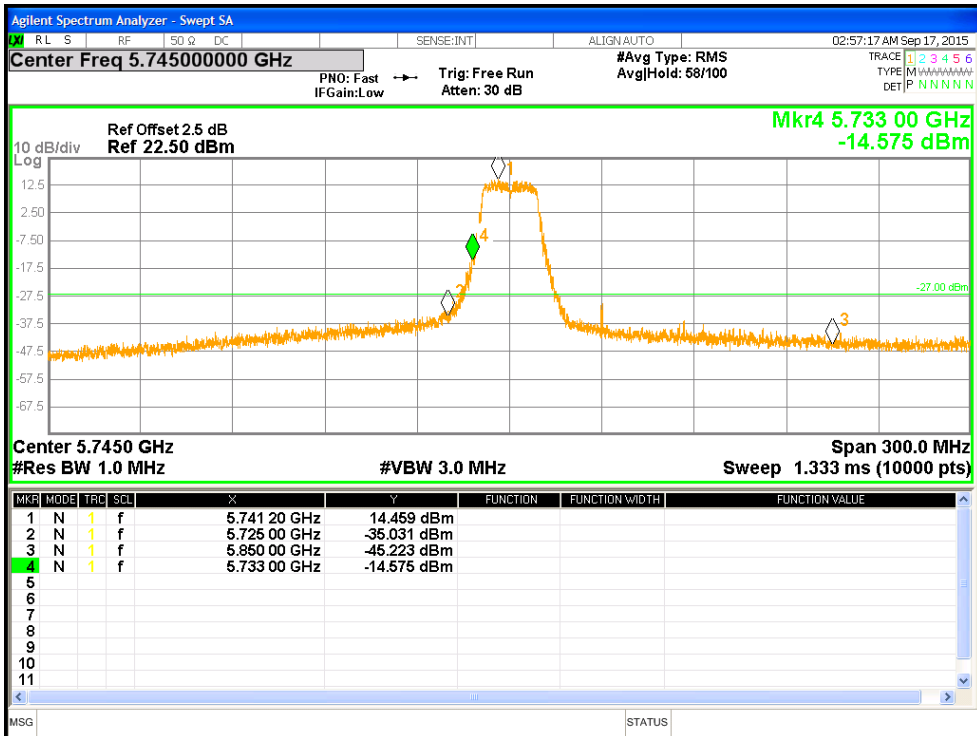


Figure 53: Measured Below Edge for VHT20-MCS0 at 5745 MHz, Chain 0

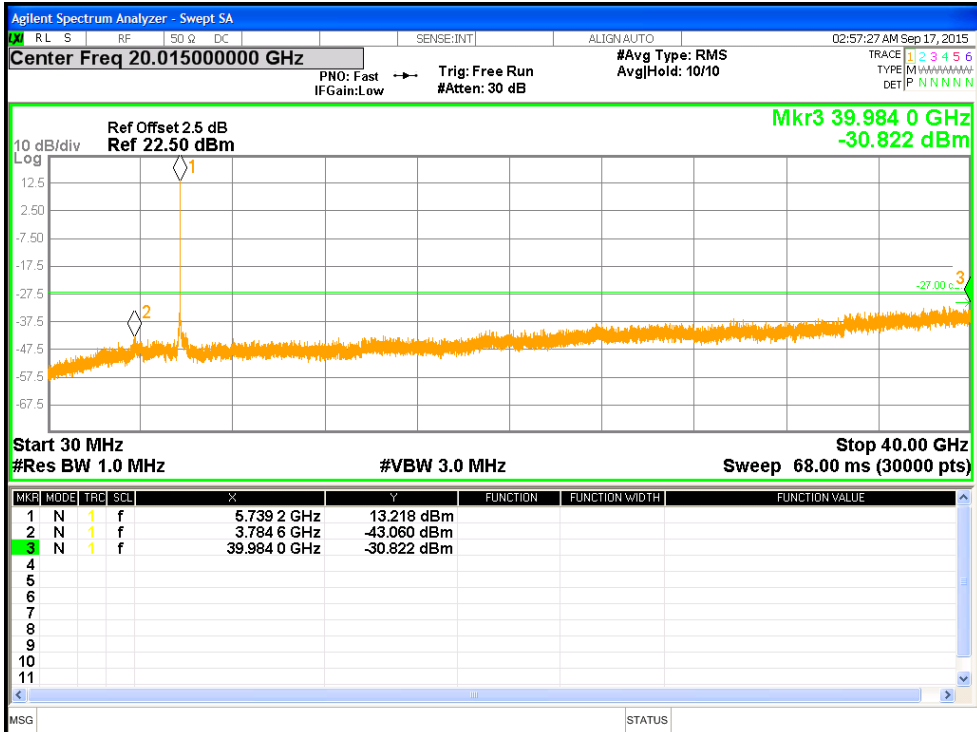


Figure 54: Undesirable Emission for VHT20-MCS0 at 5745 MHz, Chain 0

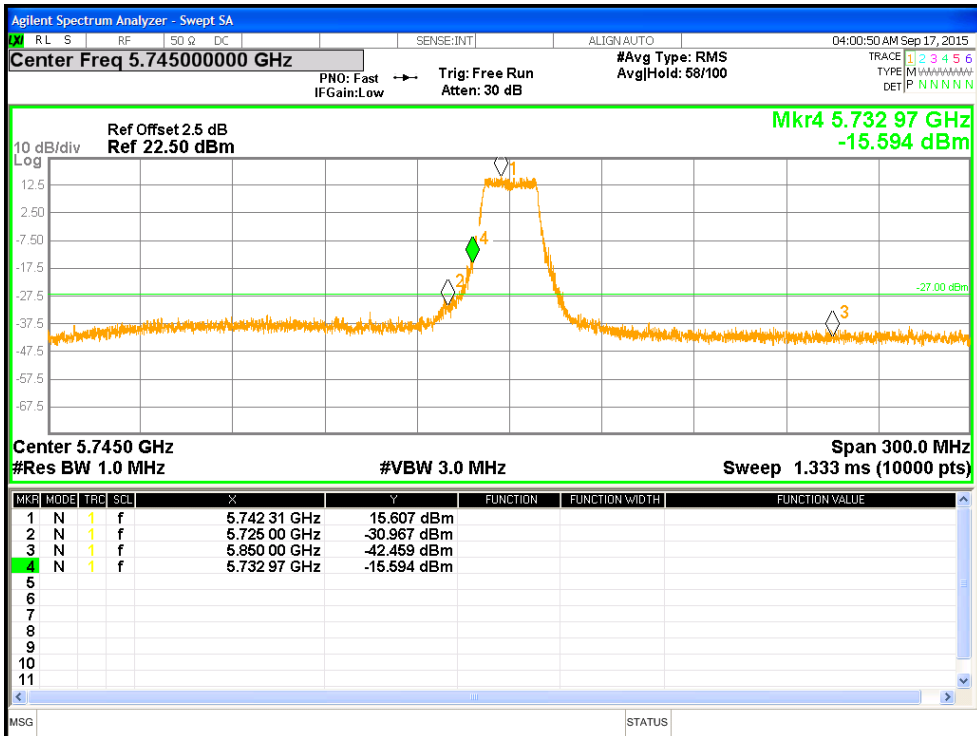


Figure 55: Measured Below Edge for VHT20-MCS0 at 5745 MHz, Chain 1

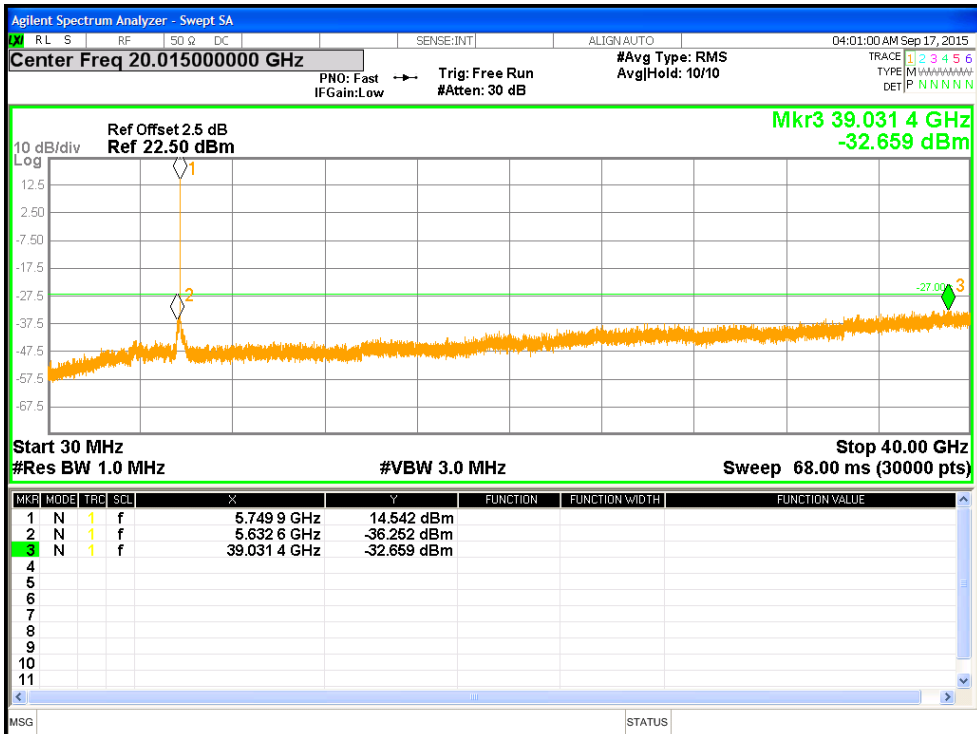


Figure 56: Undesirable Emission for VHT20-MCS0 at 5745 MHz, Chain 1



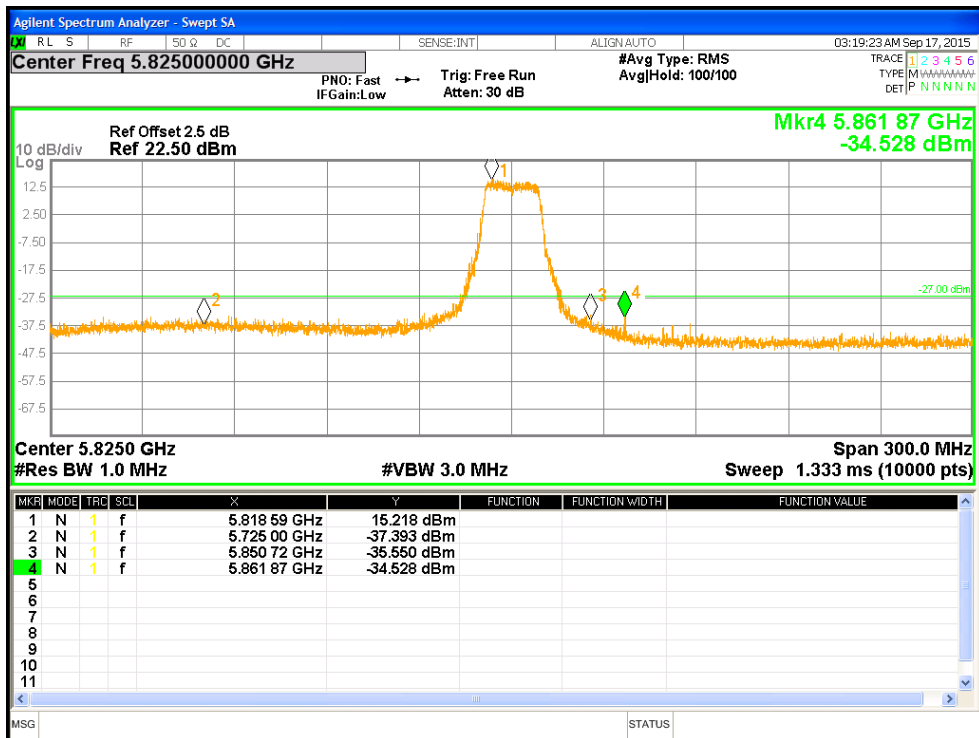


Figure 57: Measured Above Edge for VHT20-MCS0 at 5825 MHz, Chain 0

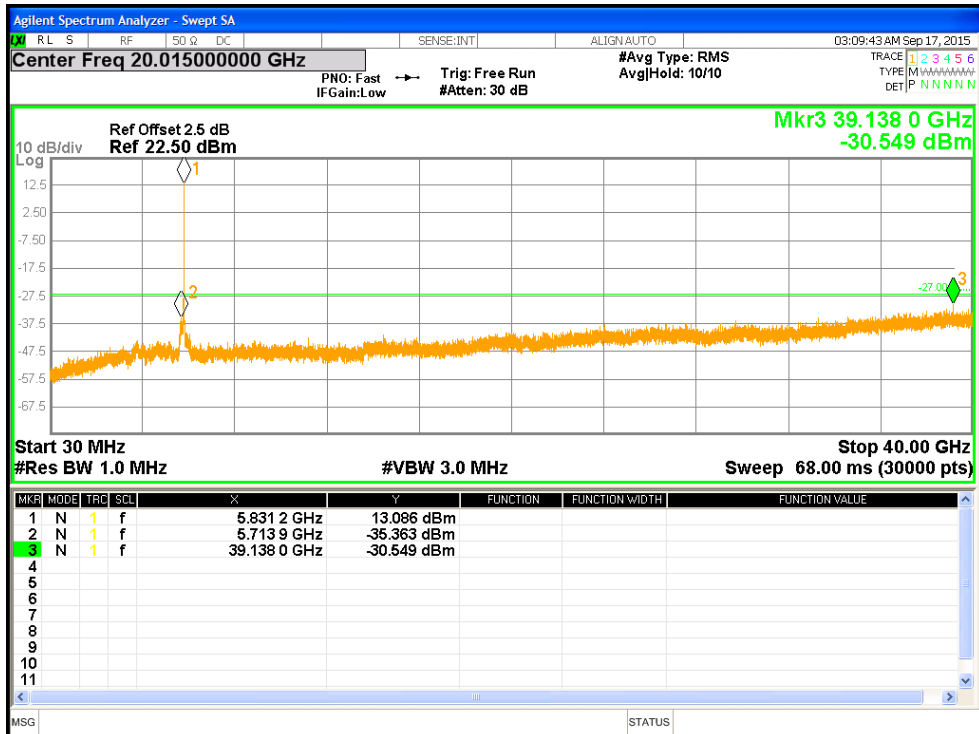


Figure 58: Undesirable Emission for VHT20-MCS0 at 5825 MHz, Chain 0

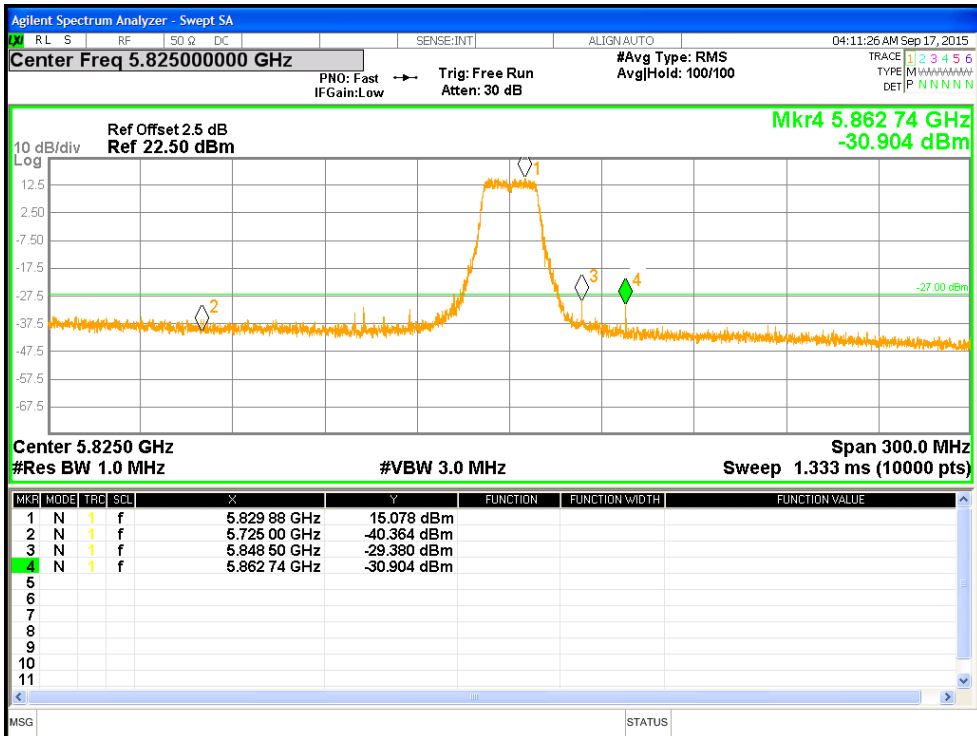


Figure 59: Measured Above Edge for VHT20-MCS0 at 5825 MHz, Chain 1

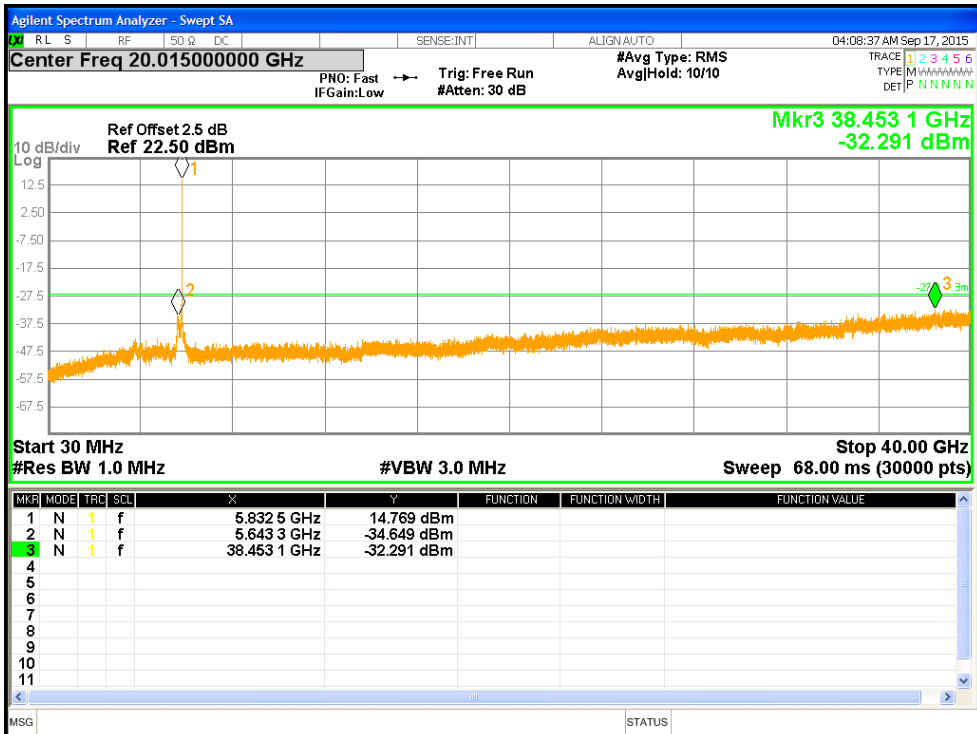


Figure 60: Undesirable Emission for VHT20-MCS0 at 5825 MHz, Chain 1

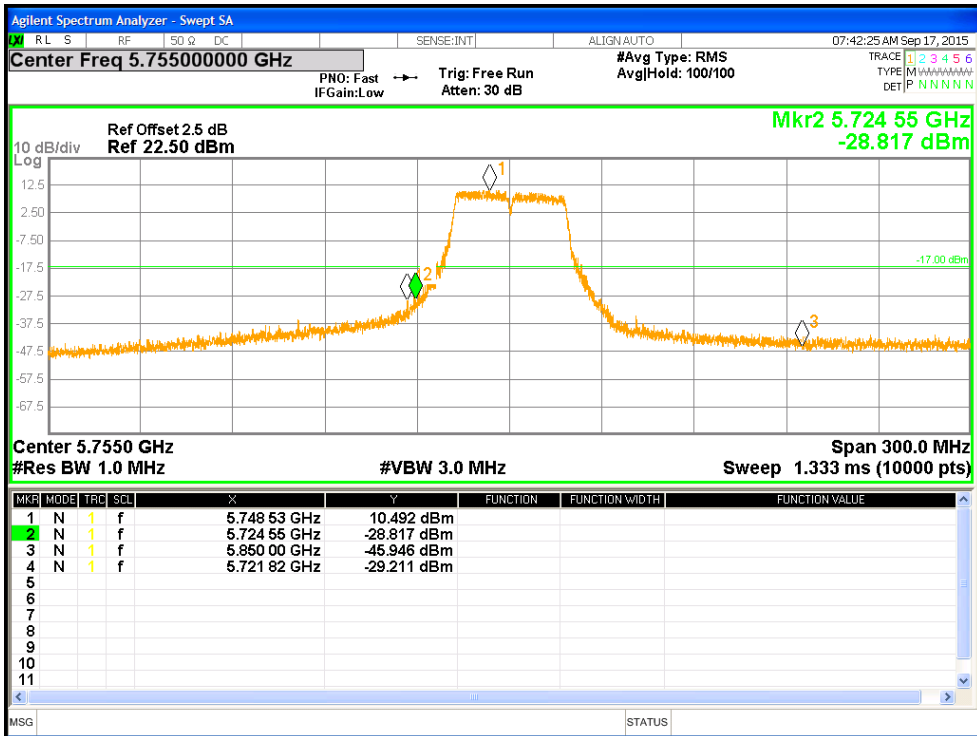


Figure 61: Measured Below Edge for HT40-MCS0 at 5755 MHz, Chain 0

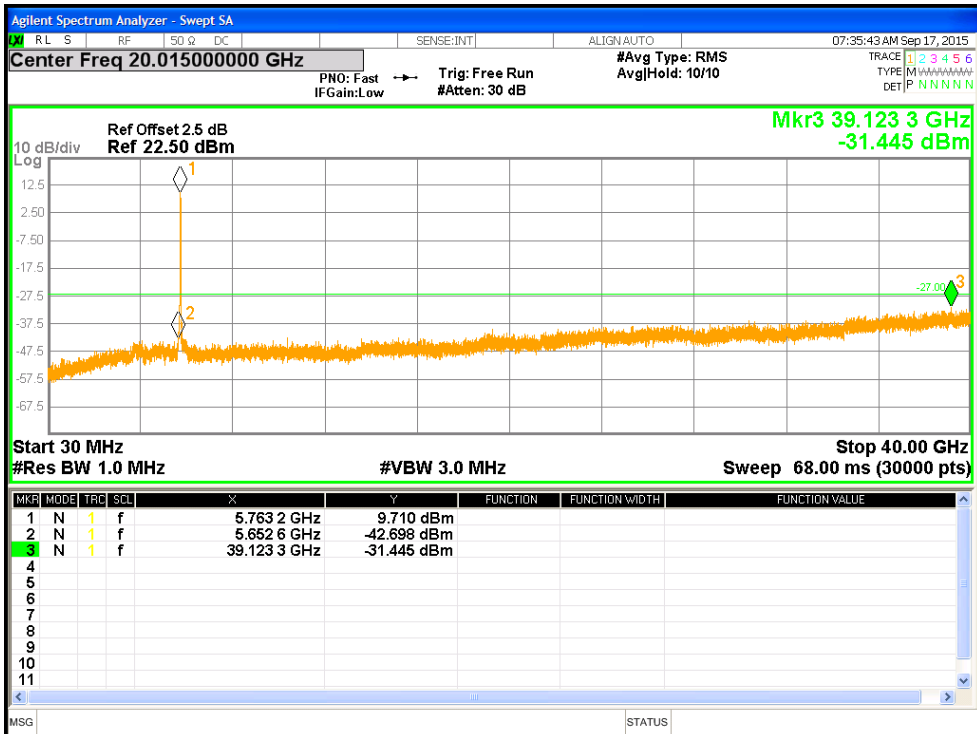


Figure 62: Undesirable Emission for HT40-MCS0 at 5755 MHz, Chain 0

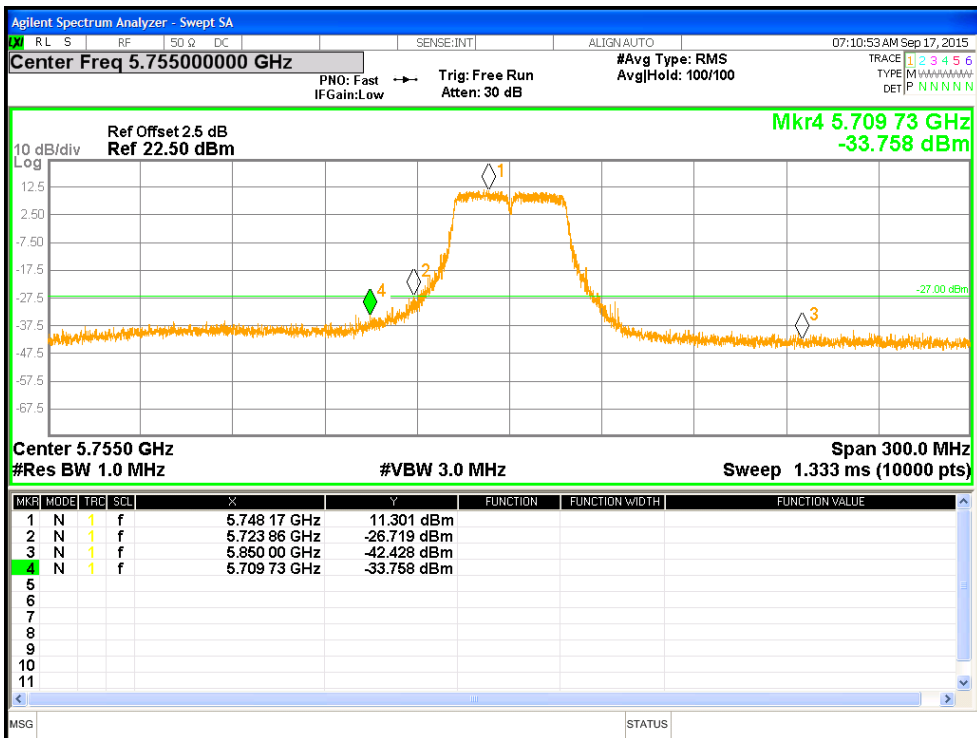


Figure 63: Measured Below Edge for HT40-MCS0 at 5755 MHz, Chain 1

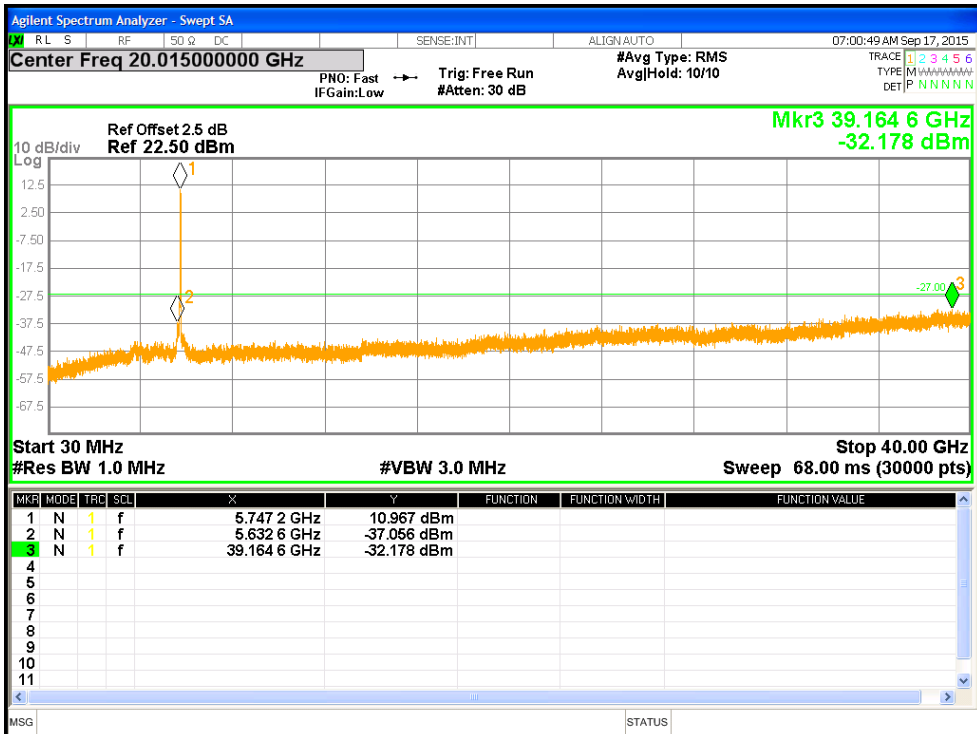


Figure 64: Undesirable Emission for HT40-MCS0 at 5755 MHz, Chain 1

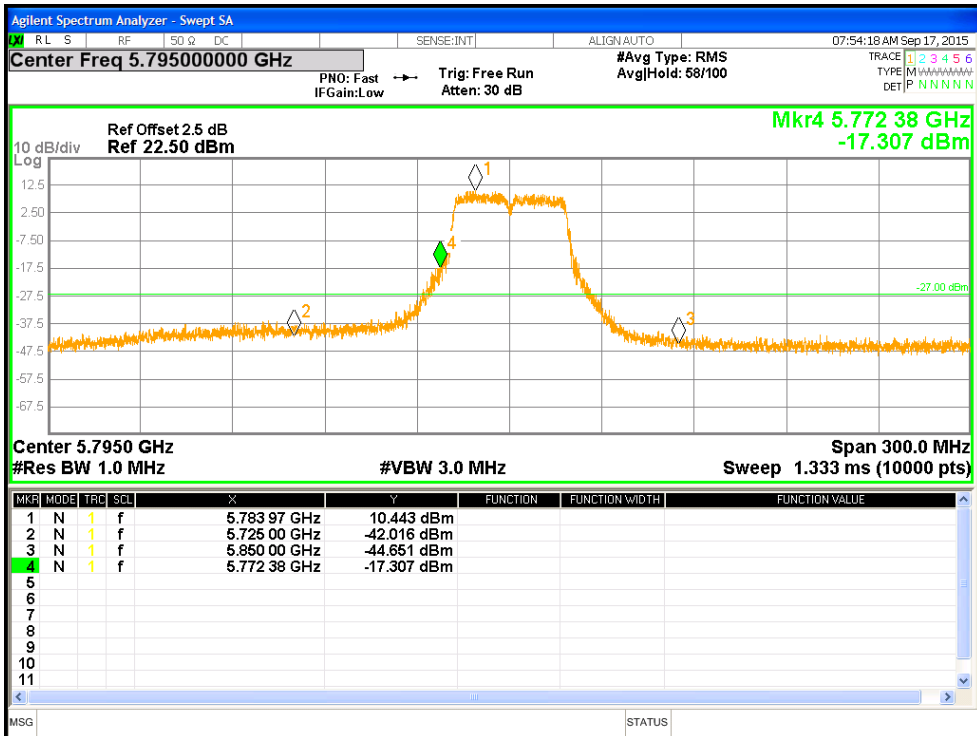


Figure 65: Measured Above Edge for HT40-MCS0 at 5795 MHz, Chain 0

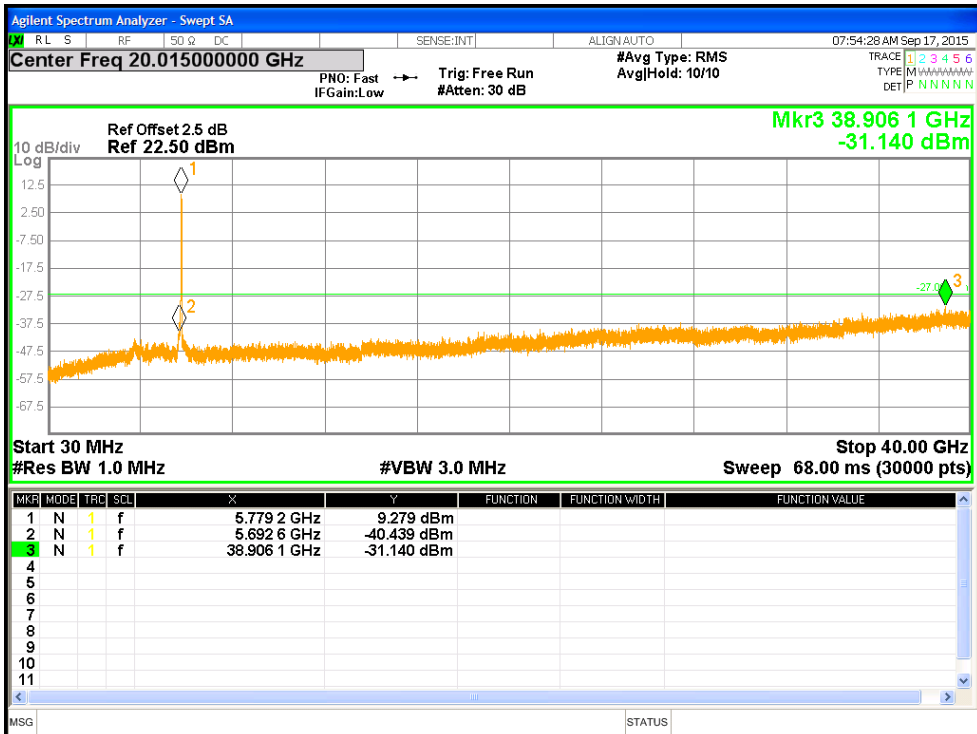


Figure 66: Undesirable Emission for HT40-MCS0 at 5795 MHz, Chain 0

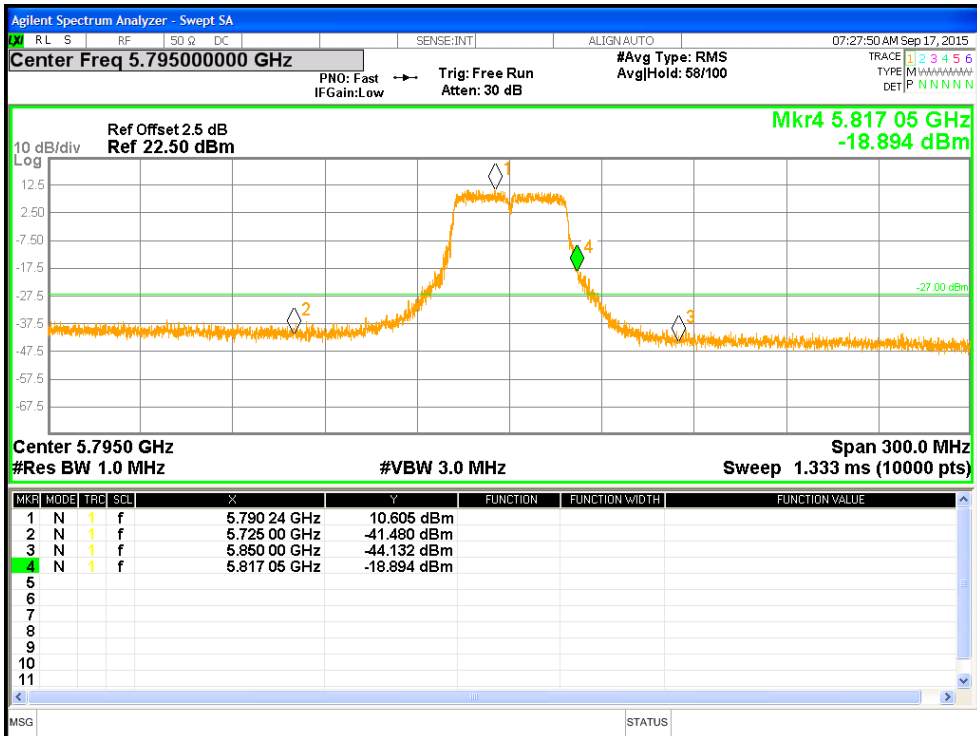


Figure 67: Measured Above Edge for HT40-MCS0 at 5795 MHz, Chain 1

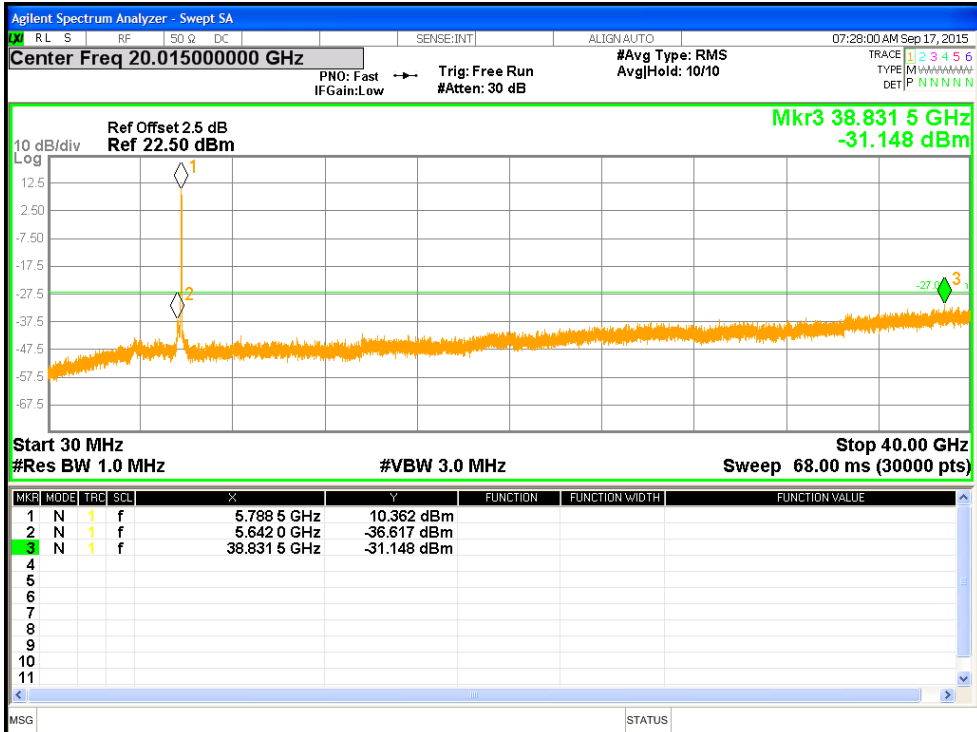


Figure 68: Undesirable Emission for HT40-MCS0 at 5795 MHz, Chain 1

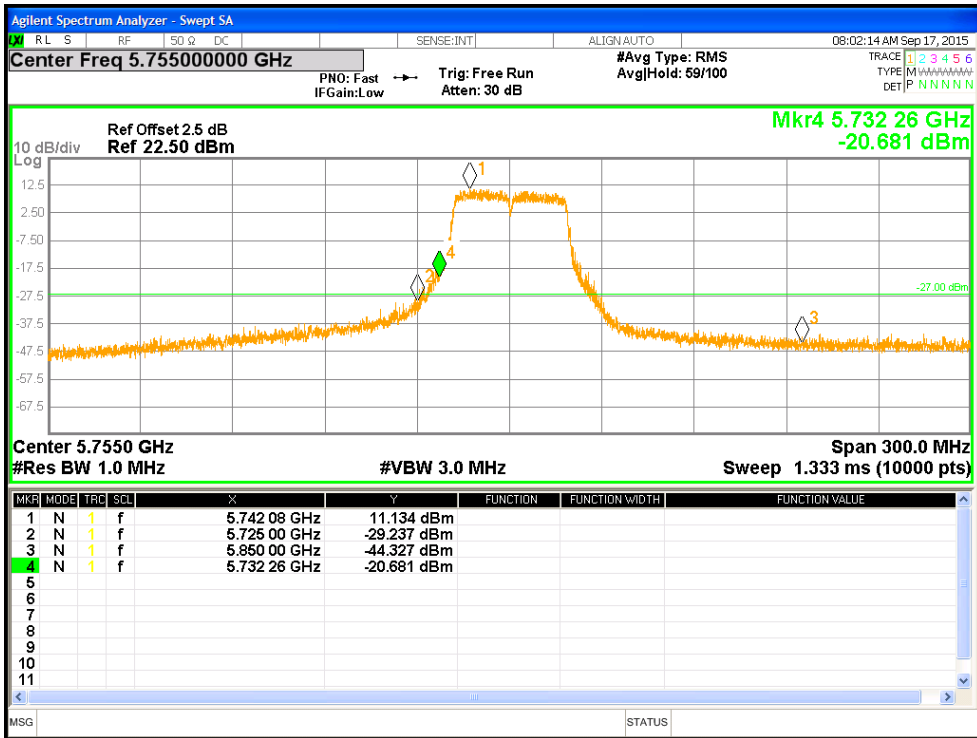


Figure 69: Measured Below Edge for VHT40-MCS0 at 5755 MHz, Chain 0

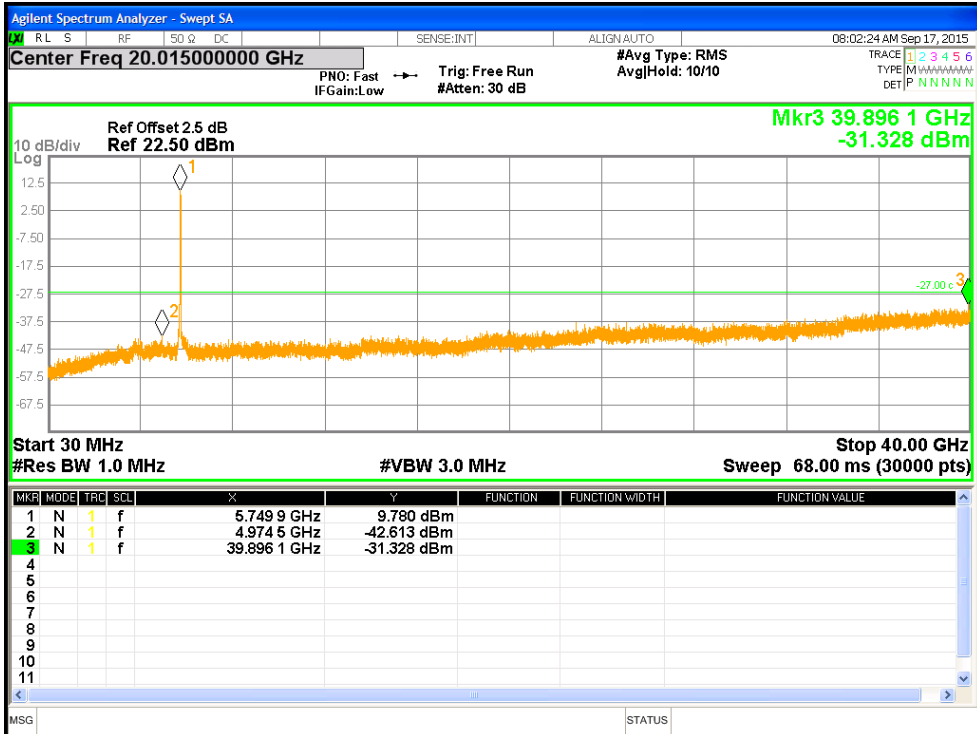


Figure 70: Undesirable Emission for VHT40-MCS0 at 5755 MHz, Chain 0

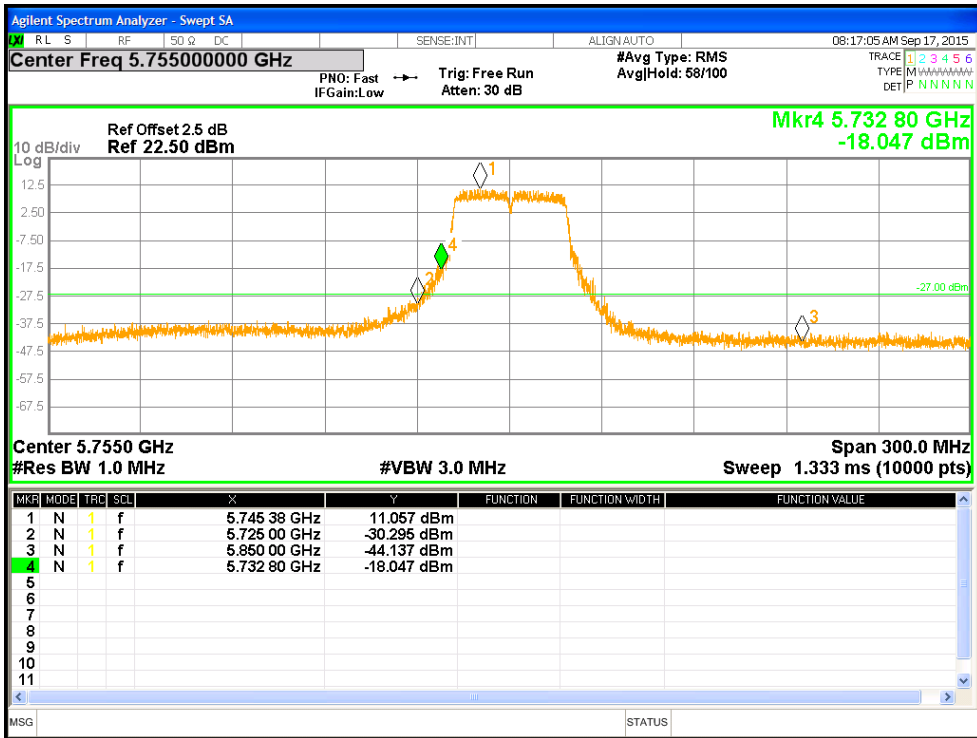


Figure 71: Measured Below Edge for VHT40-MCS0 at 5755 MHz, Chain 1

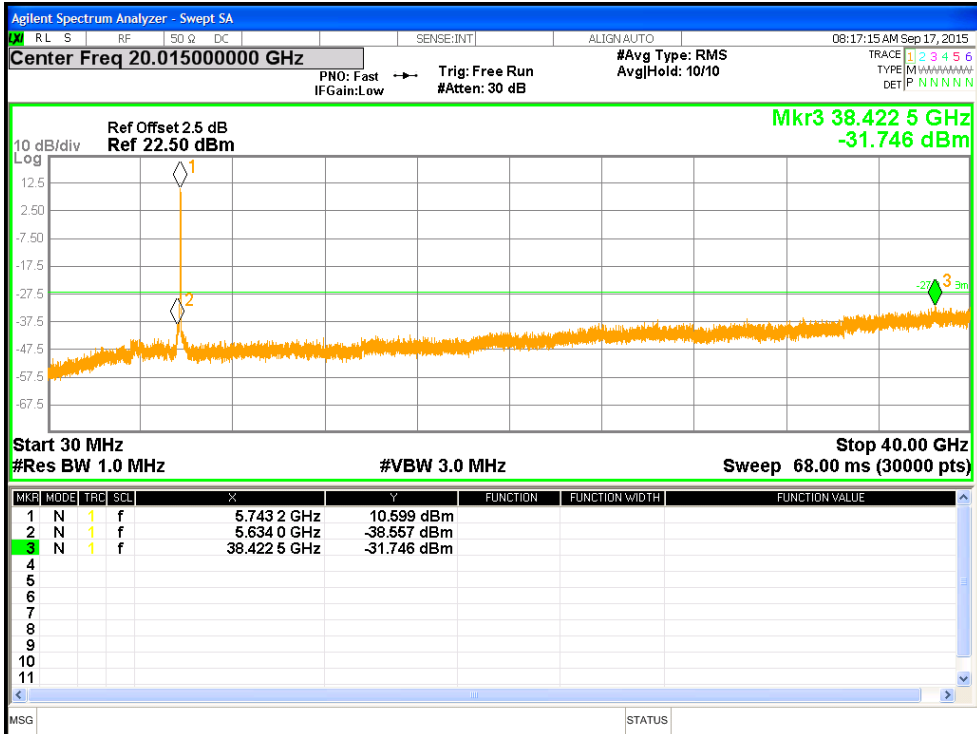


Figure 72: Undesirable Emission for VHT40-MCS0 at 5755 MHz, Chain 1



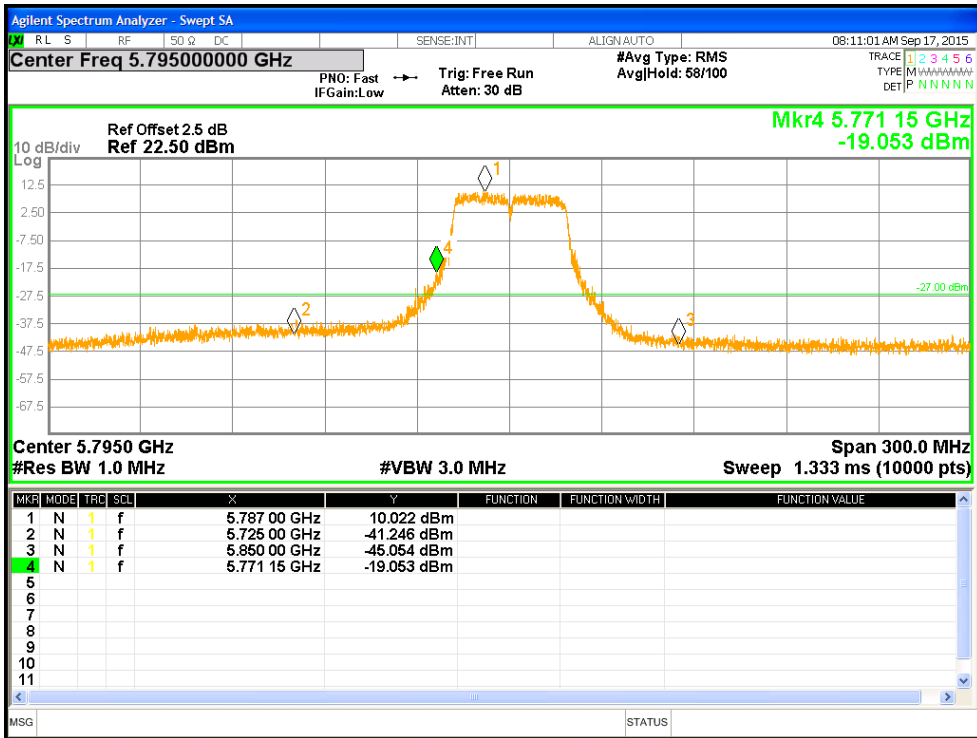


Figure 73: Measured Above Edge for VHT40-MCS0 at 5795 MHz, Chain 0

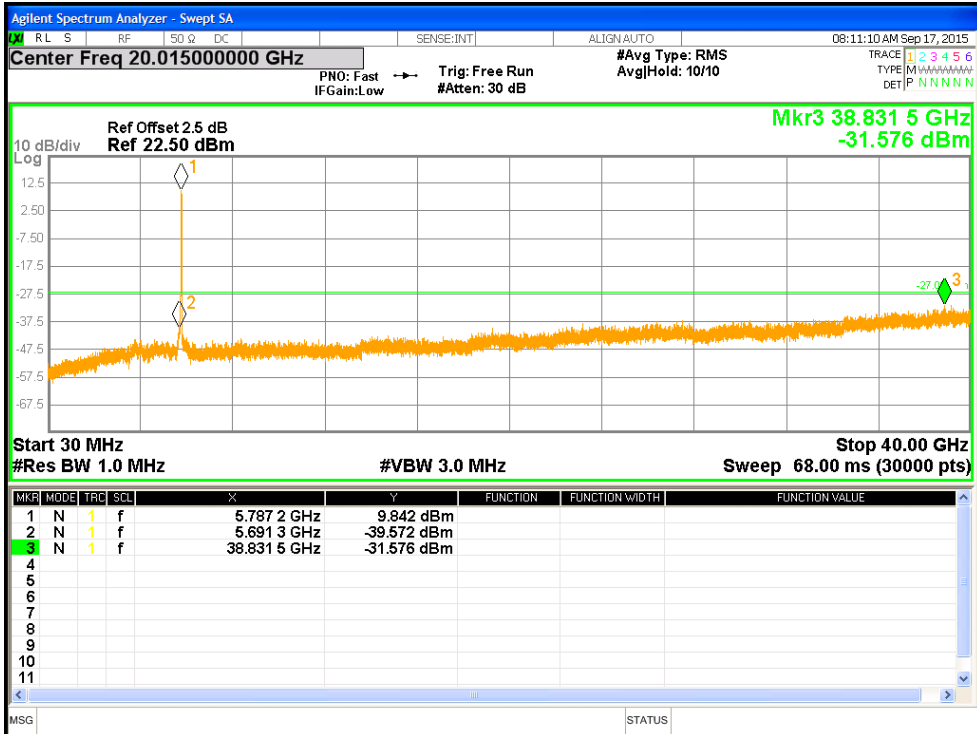


Figure 74: Undesirable Emission for VHT40-MCS0 at 5795 MHz, Chain 0

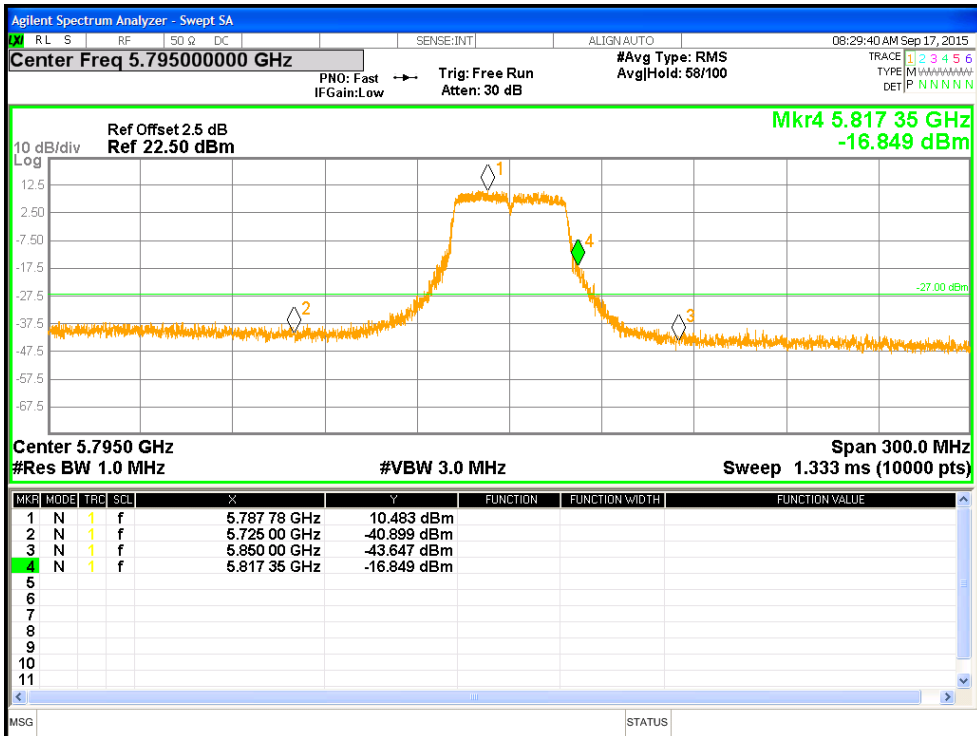


Figure 75: Measured Above Edge for VHT40-MCS0 at 5795 MHz, Chain 1

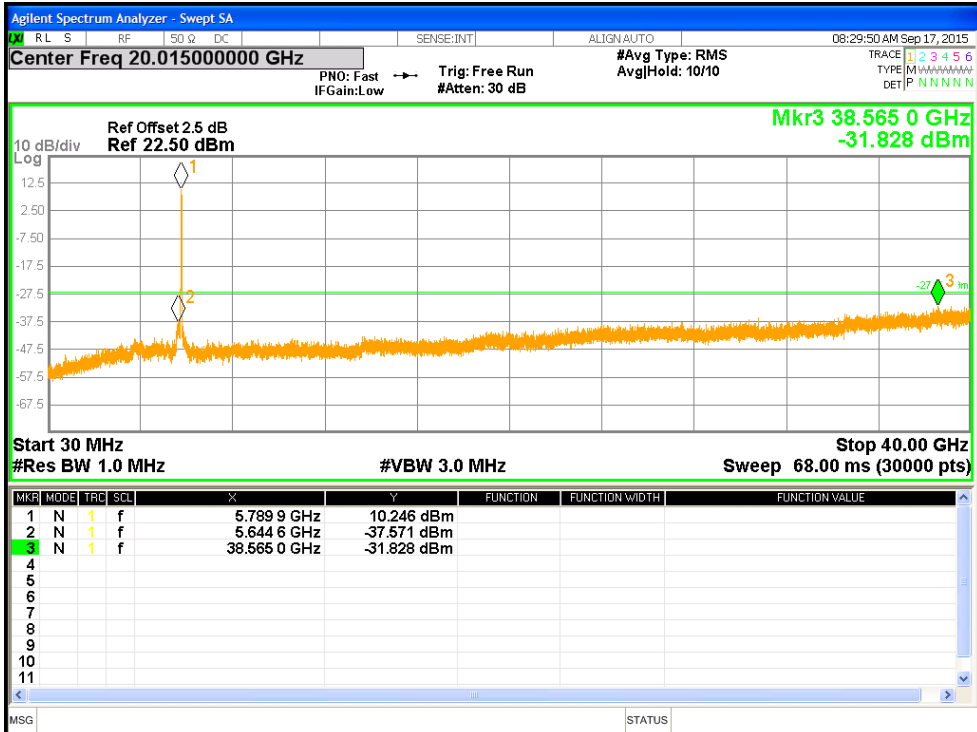


Figure 76: Undesirable Emission for VHT40-MCS0 at 5795 MHz, Chain 1

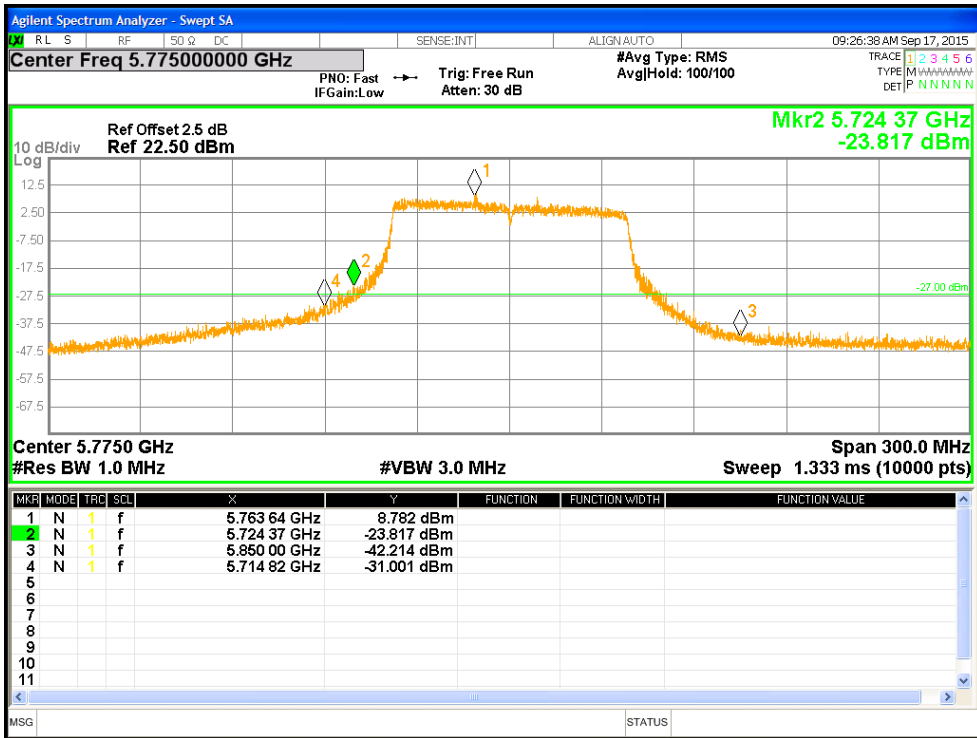


Figure 77: Measured Bandedge for VHT80-MCS0 at 5775 MHz, Chain 0

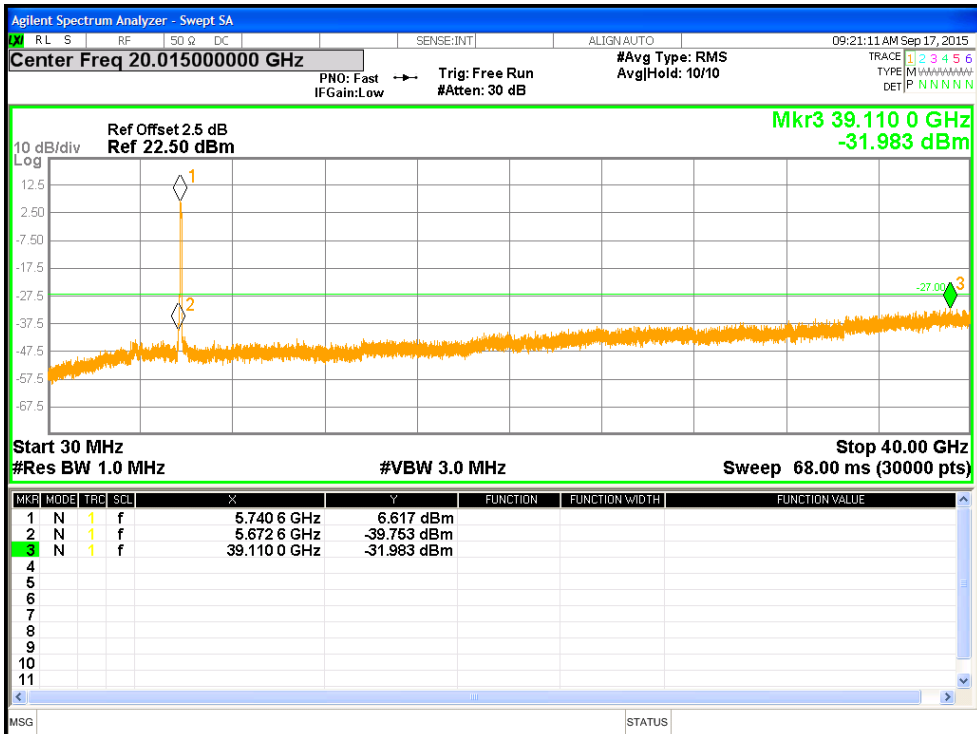


Figure 78: Undesirable Emission for VHT80-MCS0 at 5775 MHz, Chain 0

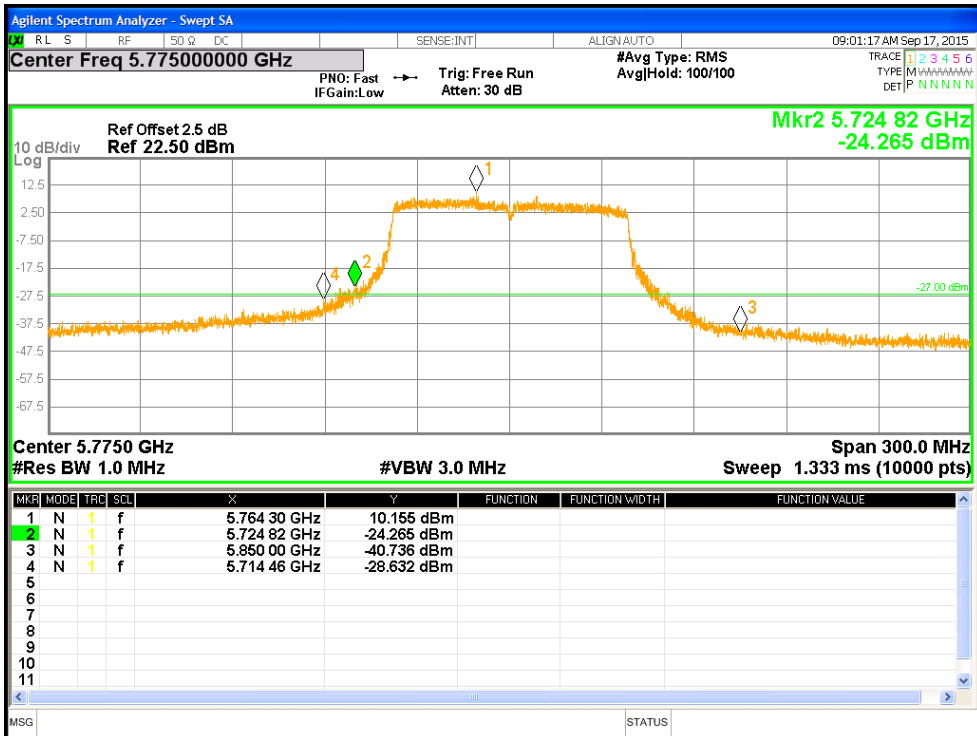


Figure 79: Measured Bandedge for VHT80-MCS0 at 5775 MHz, Chain 1

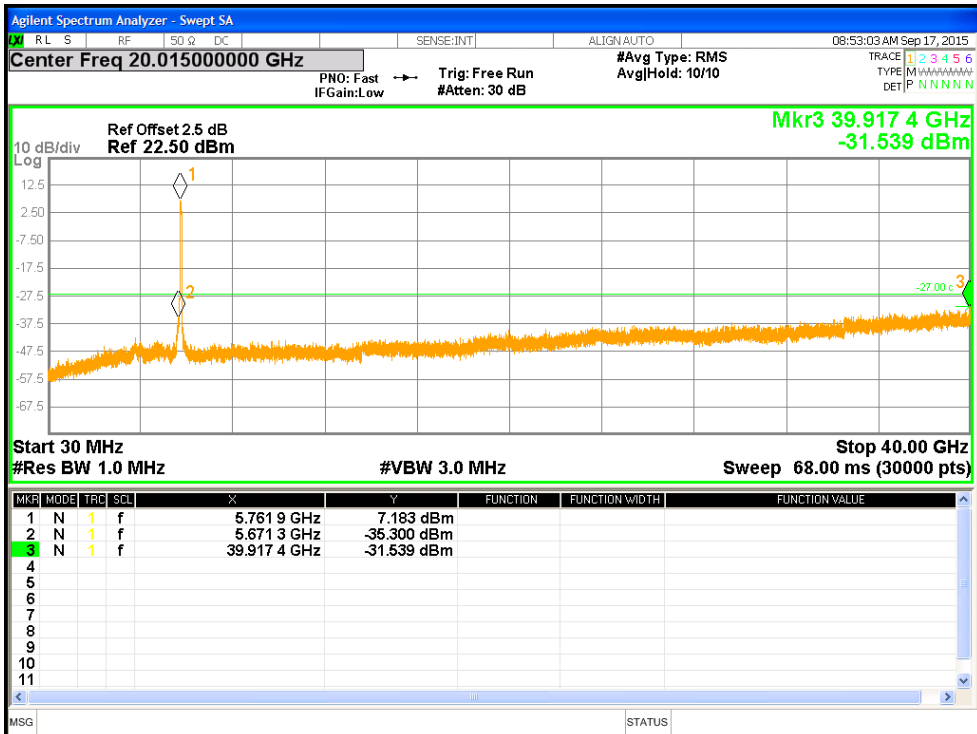


Figure 80: Undesirable Emission for VHT80-MCS0 at 5775 MHz, Chain 1

## 4.5 Transmitter Spurious Emissions

*Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmit mode; per requirement of CFR47 15.205, 15.209, 15.407(b), RSS 247 Sect. 6.2.4.2*

### 4.5.1 Test Methodology

#### 4.5.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

Pres-scans were performed to determine the worst data rate / chains for 802.11a, 802.11n (HT20 and HT40), 802.11ac (VHT20, VHT40 and VHT80).

#### 4.5.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.


Final results are:

1. HT20 at MCS0 with 2 Chains (covering 802.11a & VHT20)
2. HT40 at MCS0 with 2 Chains (covering VHT40)
3. VHT80 at MCS0 with 2 Chains

#### 4.5.1.3 Deviations

None.

**Test Setup:**

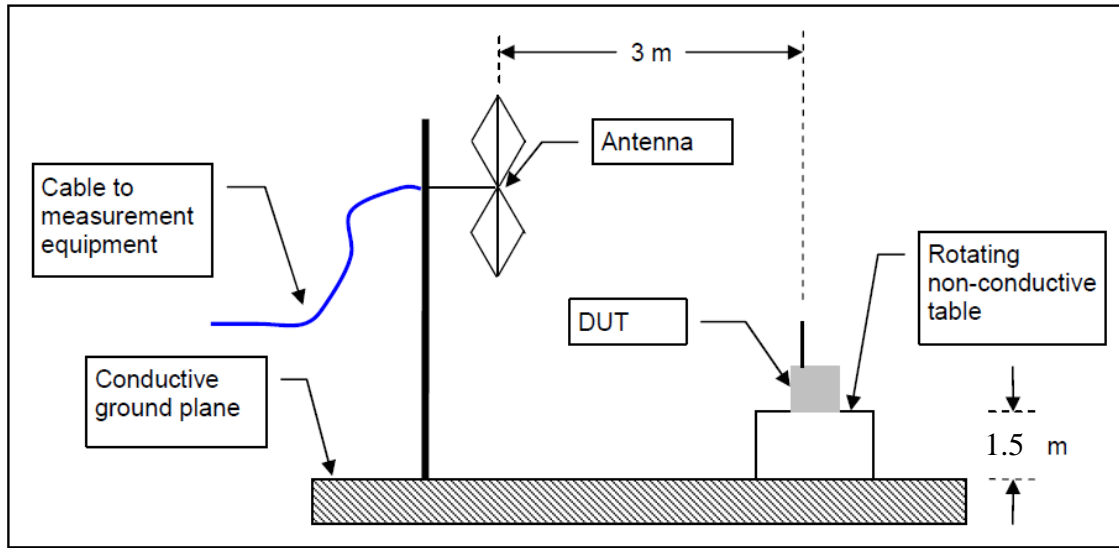

**4.5.2 Transmitter Spurious Emission Limit**

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209: 2015 and RSS 247 Sect. 6.2.4.2 2015.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F (kHz)	300
0.490-1.705	24000/F (kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

In the 5725 MHz – 5850 MHz band, all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz. The -17 dBm is equivalent to 78.2 dBuV/m and for -27 dBm is equivalent to 68.2 dBuV/m at 3 meter distance.

---

### 4.5.3 Test Results

The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and test plan.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 12:** Transmit Spurious Emission at Band-Edge Requirements

<b>Test Conditions:</b> Radiated Measurement, Normal Temperature and Voltage only								
<b>Antenna Type:</b> Custom Integrated					<b>Power Setting:</b> See test plan			
<b>Max. Directional Gain:</b> + 2.24 dBi								
<b>Signal State:</b> Modulated at 100%.								
<b>Ambient Temp.:</b> 20 °C				<b>Relative Humidity:</b> 41%				
<b>Band-Edge Results</b>								
Freq. (MHz)	Level (dBuV/m)	Pol. (H/V)	Limit (dBuV/m)	Margin (dB)	Det.	Table Deg.	Tower (cm)	Note
5725	68.70	V	74.00	-5.30	Pk	277	164	PLOT 81: 11a-6Mbps-5745MHz-TX20-Ch0 & Ch1
5725	51.61	V	54.00	-2.39	Ave	277	164	PLOT 82: 11a-6Mbps-5745MHz-TX20-Ch0 & Ch1
5725	65.78	H	74.00	-8.22	Pk	294	158	PLOT 83: 11a-6Mbps-5745MHz-TX20-Ch0 & Ch1
5725	50.01	H	54.00	-3.99	Ave	294	158	PLOT 84: 11a-6Mbps-5745MHz-TX20-Ch0 & Ch1
5850	65.05	H	74.00	-8.95	Pk	84	135	PLOT 85: 11a-6Mbps-5825MHz-TX20-Ch0 & Ch1
5850	51.17	H	54.00	-2.83	Ave	84	135	PLOT 86: 11a-6Mbps-5825MHz-TX20-Ch0 & Ch1
5850	66.24	V	74.00	-7.76	Pk	128	133	PLOT 87: 11a-6Mbps-5825MHz-TX20-Ch0 & Ch1
5850	51.13	V	54.00	-2.87	Ave	128	133	PLOT 88: 11a-6Mbps-5825MHz-TX20-Ch0 & Ch1
5725	68.69	V	74.00	-5.31	Pk	283	155	PLOT 89: HT20-MCS0-5745MHz-TX20-Ch0 & Ch1
5725	50.80	V	54.00	-3.20	Ave	283	155	PLOT 90: HT20-MCS0-5745MHz-TX20-Ch0 & Ch1
5725	67.76	H	74.00	-6.24	Pk	288	155	PLOT 91: HT20-MCS0-5745MHz-TX20-Ch0 & Ch1
5725	50.27	H	54.00	-3.73	Ave	288	155	PLOT 92: HT20-MCS0-5745MHz-TX20-Ch0 & Ch1
5850	65.72	V	74.00	-8.28	Pk	135	189	PLOT 93: HT20-MCS0-5825MHz-TX20-Ch0 & Ch1
5850	51.19	V	54.00	-2.81	Ave	135	189	PLOT 94: HT20-MCS0-5825MHz-TX20-Ch0 & Ch1
5850	64.82	H	74.00	-9.18	Pk	134	139	PLOT 95: HT20-MCS0-5825MHz-TX20-Ch0 & Ch1
5850	51.03	H	54.00	-2.97	Ave	134	139	PLOT 96: HT20-MCS0-5825MHz-TX20-Ch0 & Ch1
<b>Note:</b> Band-edge frequencies for UNII Band 3 are not a restricted band.								

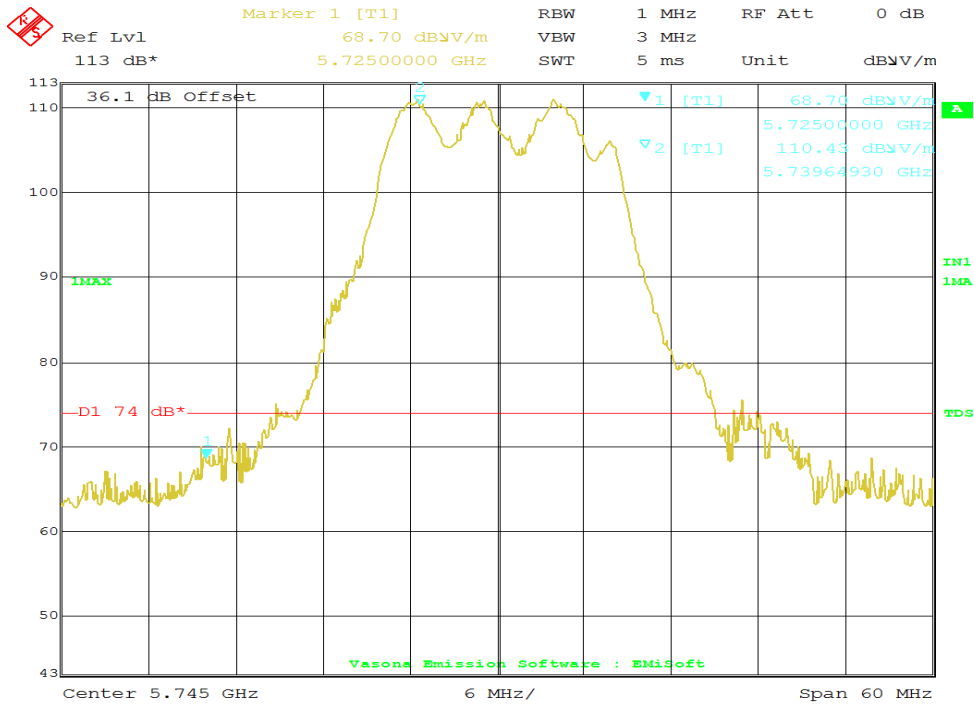


**Table 13: Transmit Spurious Emission at Band-Edge Requirements Continues**

<b>Test Conditions:</b> Radiated Measurement, Normal Temperature and Voltage only								
<b>Antenna Type:</b> Custom Integrated					<b>Power Setting:</b> See test plan			
<b>Max. Directional Gain:</b> + 2.24 dBi								
<b>Signal State:</b> Modulated at 100%.								
<b>Ambient Temp.:</b> 20 °C					<b>Relative Humidity:</b> 41%			
<b>Band-Edge Results</b>								
Freq. (MHz)	Level (dBuV/m)	Pol. (H/V)	Limit (dBuV/m)	Margin (dB)	Det.	Table Deg.	Tower (cm)	Note
5725	70.85	V	74.00	-3.15	Pk	303	159	PLOT 97: VHT20-MCS0-5745MHz-TX20-Ch0 & Ch1
5725	51.34	V	54.00	-2.66	Ave	303	159	PLOT 98: VHT20-MCS0-5745MHz-TX20-Ch0 & Ch1
5725	66.69	H	74.00	-7.31	Pk	293	159	PLOT 99: VHT20-MCS0-5745MHz-TX20-Ch0 & Ch1
5725	50.09	H	54.00	-3.91	Ave	293	159	PLOT 100: VHT20-MCS0-5745MHz-TX20-Ch0 & Ch1
5850	64.74	H	74.00	-9.26	Pk	94	133	PLOT 101: VHT20-MCS0-5825MHz-TX20-Ch0 & Ch1
5850	51.13	H	54.00	-2.87	Ave	94	133	PLOT 102: VHT20-MCS0-5825MHz-TX20-Ch0 & Ch1
5850	68.05	V	74.00	-5.95	Pk	130	140	PLOT 103: VHT20-MCS0-5825MHz-TX20-Ch0 & Ch1
5850	51.15	V	54.00	-2.85	Ave	130	140	PLOT 104: VHT20-MCS0-5825MHz-TX20-Ch0 & Ch1
5725	68.48	H	74.00	-5.52	Pk	288	151	PLOT 105: HT40-MCS0-5755MHz-TX20-Ch0 & Ch1
5725	51.99	H	54.00	-2.01	Ave	288	151	PLOT 106: HT40-MCS0-5755MHz-TX20-Ch0 & Ch1
5725	66.22	V	74.00	-7.78	Pk	305	160	PLOT 107: HT40-MCS0-5755MHz-TX20-Ch0 & Ch1
5725	49.83	V	54.00	-4.17	Ave	305	160	PLOT 108: HT40-MCS0-5755MHz-TX20-Ch0 & Ch1
5850	64.10	V	74.00	-9.90	Pk	127	144	PLOT 109: HT40-MCS0-5795MHz-TX20-Ch0 & Ch1
5850	51.09	V	54.00	-2.91	Ave	127	144	PLOT 110: HT40-MCS0-5795MHz-TX20-Ch0 & Ch1
5850	63.99	H	74.00	-10.01	Pk	104	133	PLOT 111: HT40-MCS0-5795MHz-TX20-Ch0 & Ch1
5850	51.04	H	54.00	-2.96	Ave	104	133	PLOT 112: HT40-MCS0-5795MHz-TX20-Ch0 & Ch1
<b>Note:</b> Band-edge frequencies for UNII Band 3 are not a restricted band.								


**Table 14:** Transmit Spurious Emission at Band-Edge Requirements Continues

<b>Test Conditions:</b> Radiated Measurement, Normal Temperature and Voltage only								
<b>Antenna Type:</b> Custom Integrated					<b>Power Setting:</b> See test plan			
<b>Max. Directional Gain:</b> + 2.24 dBi								
<b>Signal State:</b> Modulated at 100%.								
<b>Ambient Temp.:</b> 20 °C				<b>Relative Humidity:</b> 41%				
<b>Band-Edge Results</b>								
Freq. (MHz)	Level (dBuV/m)	Pol. (H/V)	Limit (dBuV/m)	Margin (dB)	Det.	Table Deg.	Tower (cm)	Note
5725	67.62	V	74.00	-6.38	Pk	297	160	PLOT 113: VHT40-MCS0-5755MHz-TX20-Ch0 & Ch1
5725	49.77	V	54.00	-4.23	Ave	297	160	PLOT 114: VHT40-MCS0-5755MHz-TX20-Ch0 & Ch1
5725	66.18	H	74.00	-7.82	Pk	289	160	PLOT 115: VHT40-MCS0-5755MHz-TX20-Ch0 & Ch1
5725	50.10	H	54.00	-3.90	Ave	289	160	PLOT 116: VHT40-MCS0-5755MHz-TX20-Ch0 & Ch1
5850	64.10	H	74.00	-9.90	Pk	93	145	PLOT 117: VHT40-MCS0-5795MHz-TX20-Ch0 & Ch1
5850	51.08	H	54.00	-2.92	Ave	93	145	PLOT 118: VHT40-MCS0-5795MHz-TX20-Ch0 & Ch1
5850	63.86	V	74.00	-10.14	Pk	131	147	PLOT 119: VHT40-MCS0-5795MHz-TX20-Ch0 & Ch1
5850	51.02	V	54.00	-2.98	Ave	131	147	PLOT 120: VHT40-MCS0-5795MHz-TX20-Ch0 & Ch1
5725	72.24	V	74.00	-1.76	Pk	298	155	PLOT 121: VHT80-MCS0-5775MHz-TX20-Ch0 & Ch1
5725	50.63	V	54.00	-3.37	Ave	298	155	PLOT 122: VHT80-MCS0-5775MHz-TX20-Ch0 & Ch1
5725	66.31	H	74.00	-7.69	Pk	343	154	PLOT 123: VHT80-MCS0-5775MHz-TX20-Ch0 & Ch1
5725	49.46	H	54.00	-4.54	Ave	343	154	PLOT 124: VHT80-MCS0-5775MHz-TX20-Ch0 & Ch1
5850	64.12	V	74.00	-9.88	Pk	130	140	PLOT 125: VHT80-MCS0-5775MHz-TX20-Ch0 & Ch1
5850	51.09	V	54.00	-2.91	Ave	130	140	PLOT 126: VHT80-MCS0-5775MHz-TX20-Ch0 & Ch1
5850	64.18	H	74.00	-9.82	Pk	93	125	PLOT 127: VHT80-MCS0-5775MHz-TX20-Ch0 & Ch1
5850	51.11	H	54.00	-2.89	Ave	93	125	PLOT 128: VHT80-MCS0-5775MHz-TX20-Ch0 & Ch1
<b>Note:</b> Band-edge frequencies for UNII Band 3 are not a restricted band.								




Date: 8.SEP.2015 14:40:43

**Figure 81: Radiated Emission 5725 MHz Edge for 11a 5745 MHz – Vert. (Pk)**

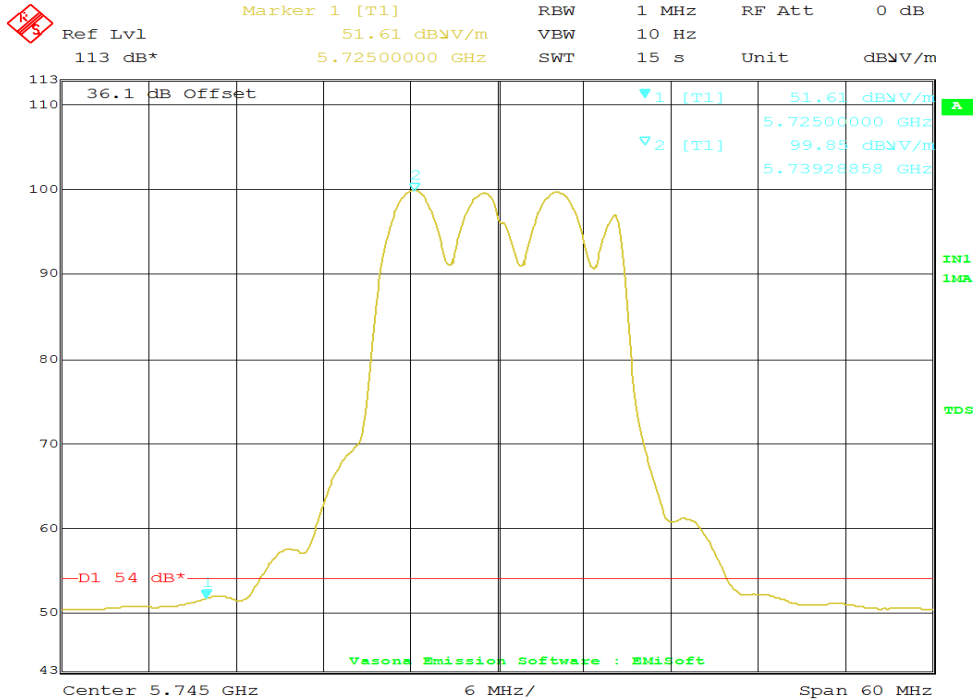


Date: 8.SEP.2015 14:43:56

**Figure 82: Radiated Emission 5725 MHz Edge for 11a 5745 MHz – Vert. (Ave)**

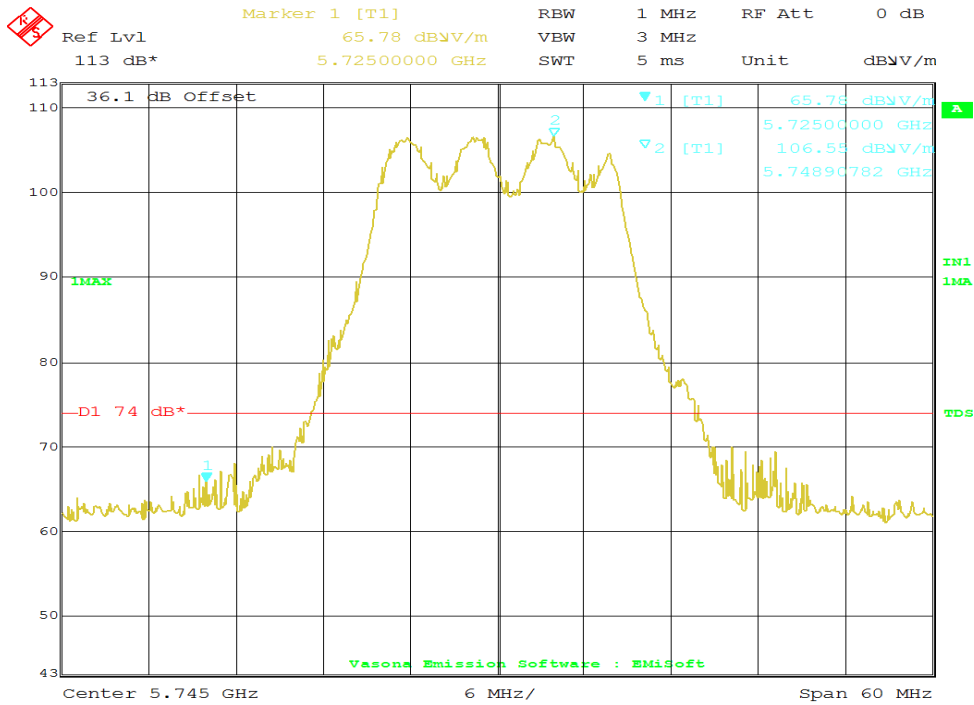


Date: 8.SEP.2015 15:00:59

**Figure 83: Radiated Emission 5725 MHz Edge for 11a 5745 MHz – Horz. (Pk)**

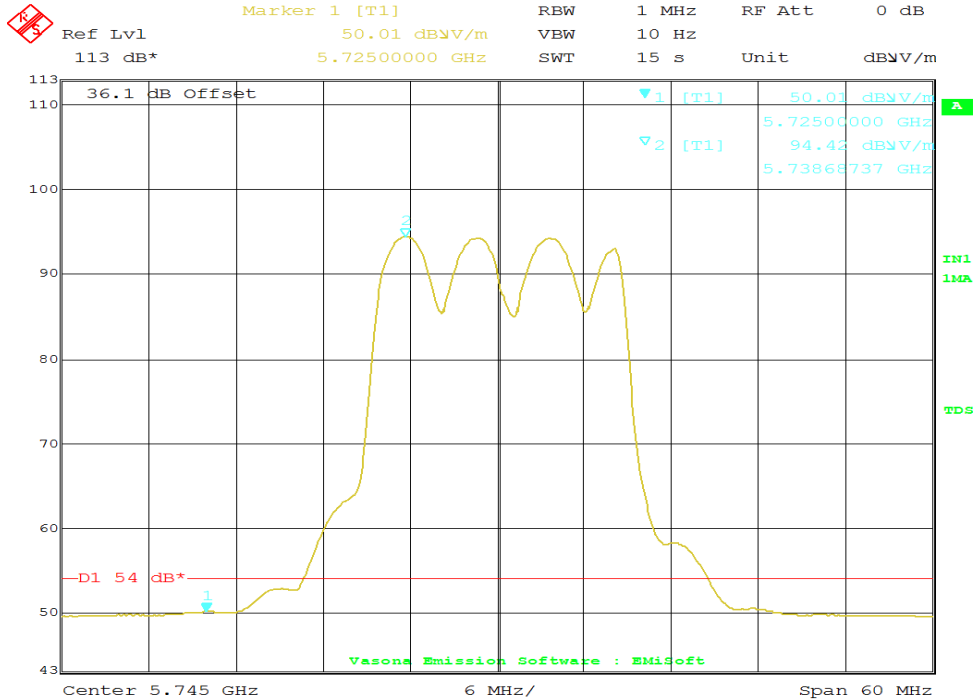


Date: 8.SEP.2015 15:02:59

**Figure 84: Radiated Emission 5725 MHz Edge for 11a 5745 MHz – Horz. (Ave)**

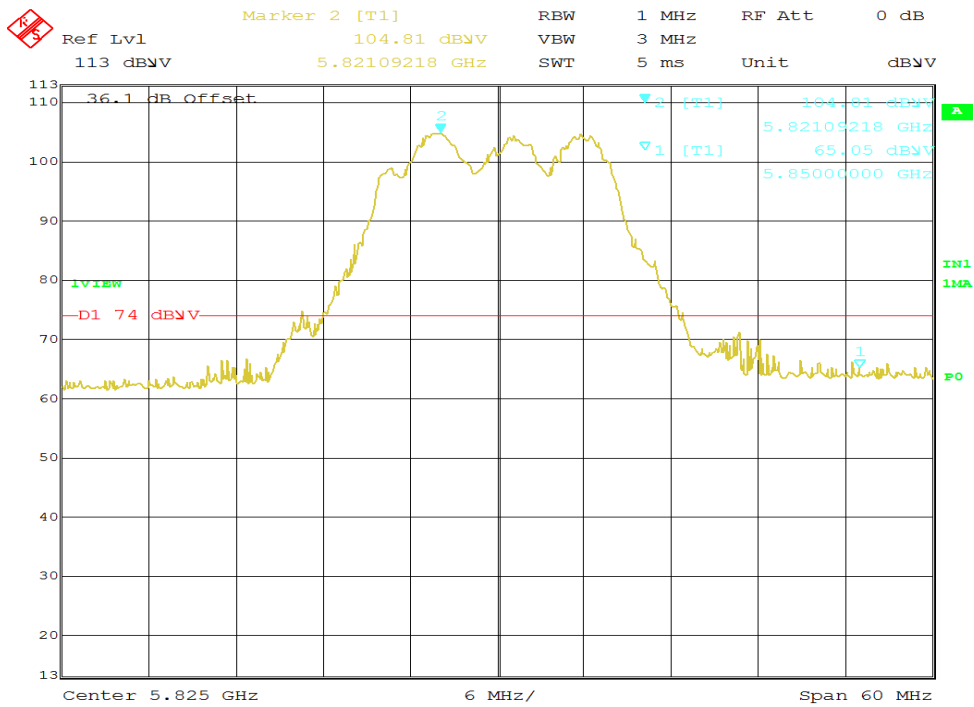


Date: 8.SEP.2015 20:06:54

**Figure 85: Radiated Emission 5850 MHz Edge for 11a 5825 MHz – Horz. (Pk)**

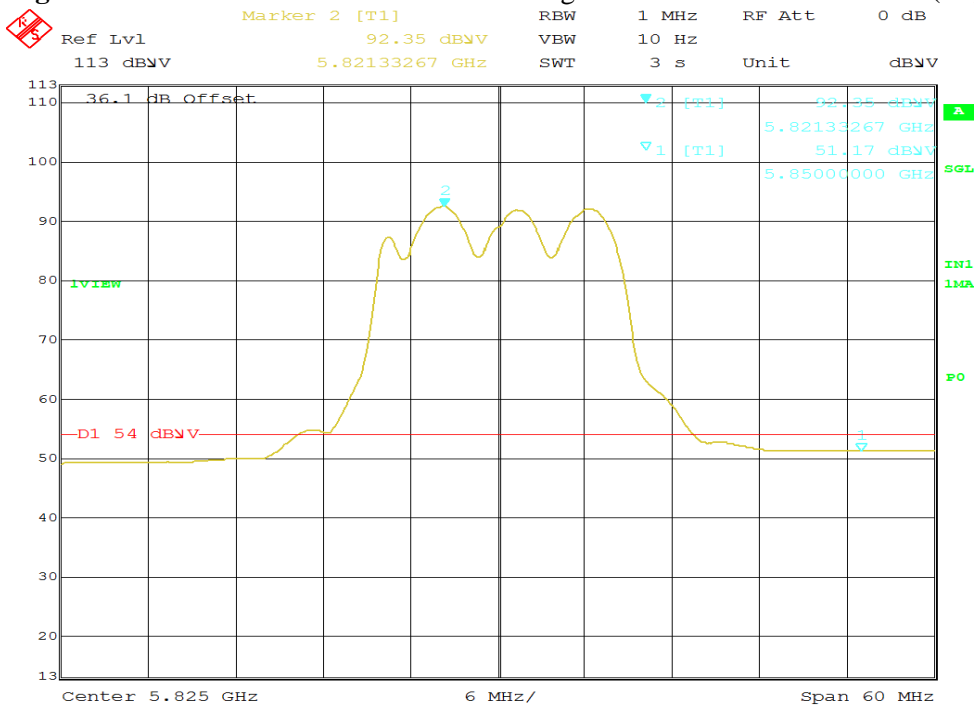


Date: 8.SEP.2015 20:07:30

**Figure 86: Radiated Emission 5850 MHz Edge for 11a 5825 MHz – Horz. (Ave)**

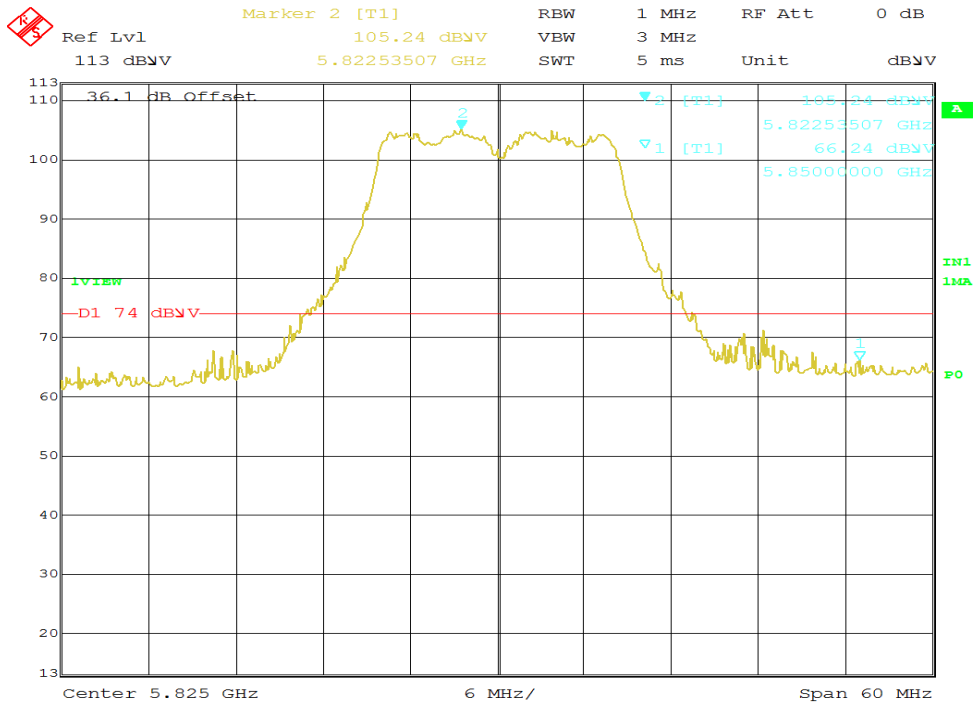


Date: 8.SEP.2015 20:09:39

**Figure 87: Radiated Emission 5850 MHz Edge for 11a 5825 MHz – Vert. (Pk)**

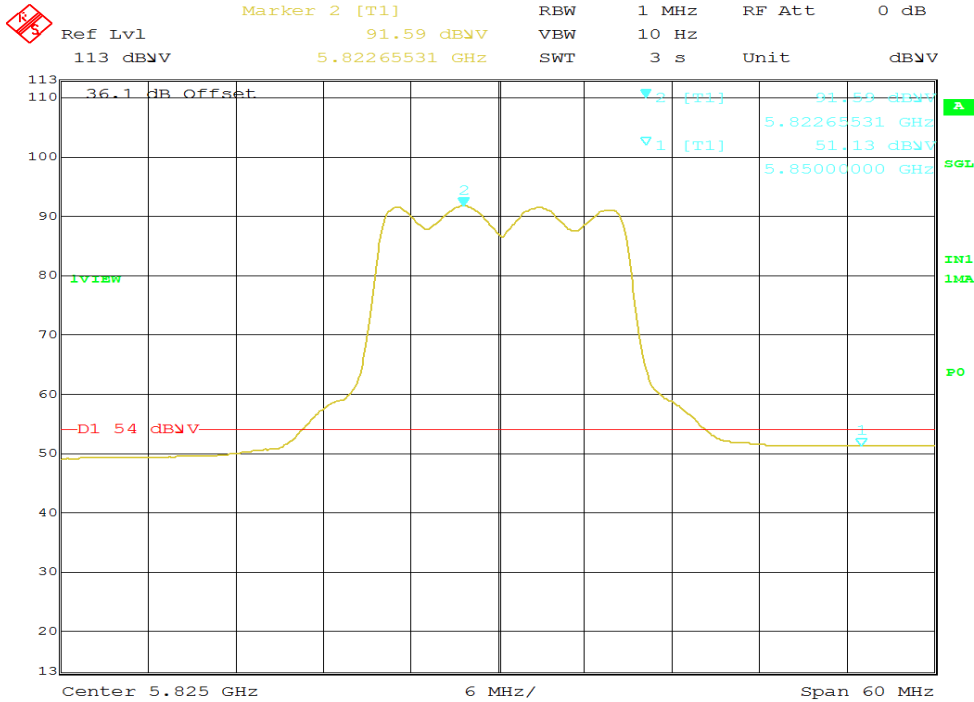


Date: 8.SEP.2015 20:10:21

**Figure 88: Radiated Emission 5850 MHz Edge for 11a 5825 MHz – Vert. (Ave)**

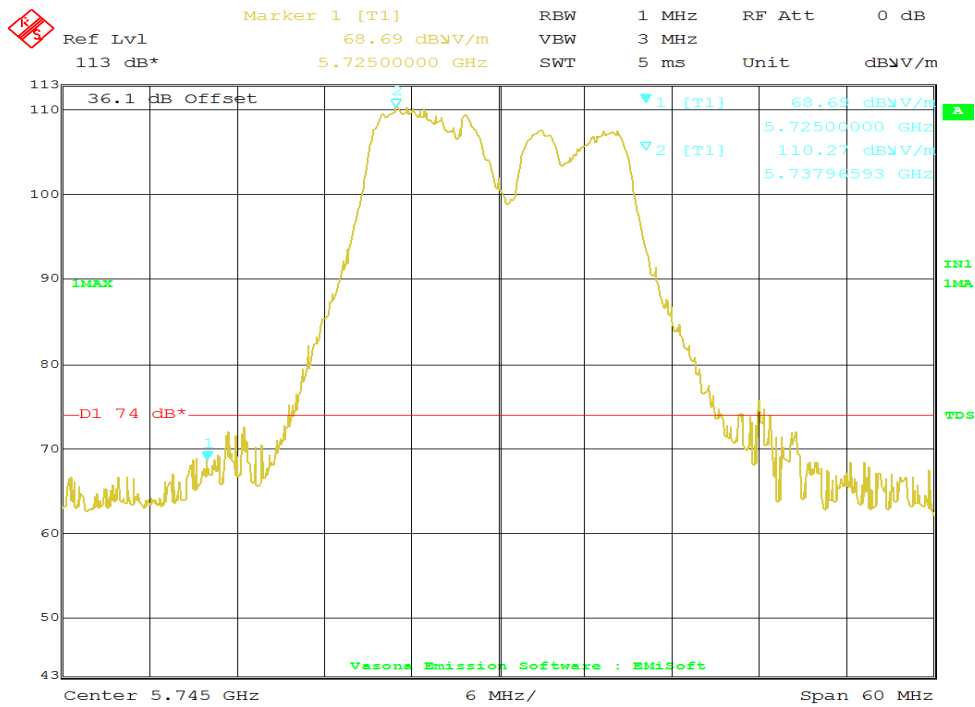


Date: 8.SEP.2015 15:14:37

**Figure 89: Radiated Emission 5725 MHz Edge for HT20 5745 MHz – Vert. (Pk)**

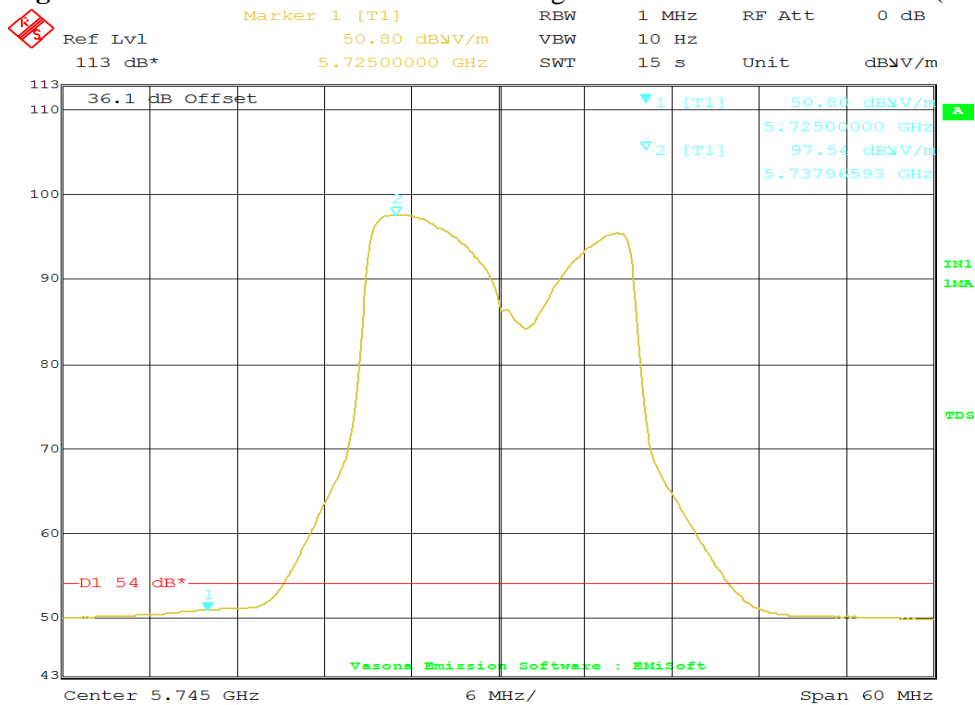


Date: 8.SEP.2015 15:16:26

**Figure 90: Radiated Emission 5725 MHz Edge for HT20 5745 MHz – Vert. (Ave)**

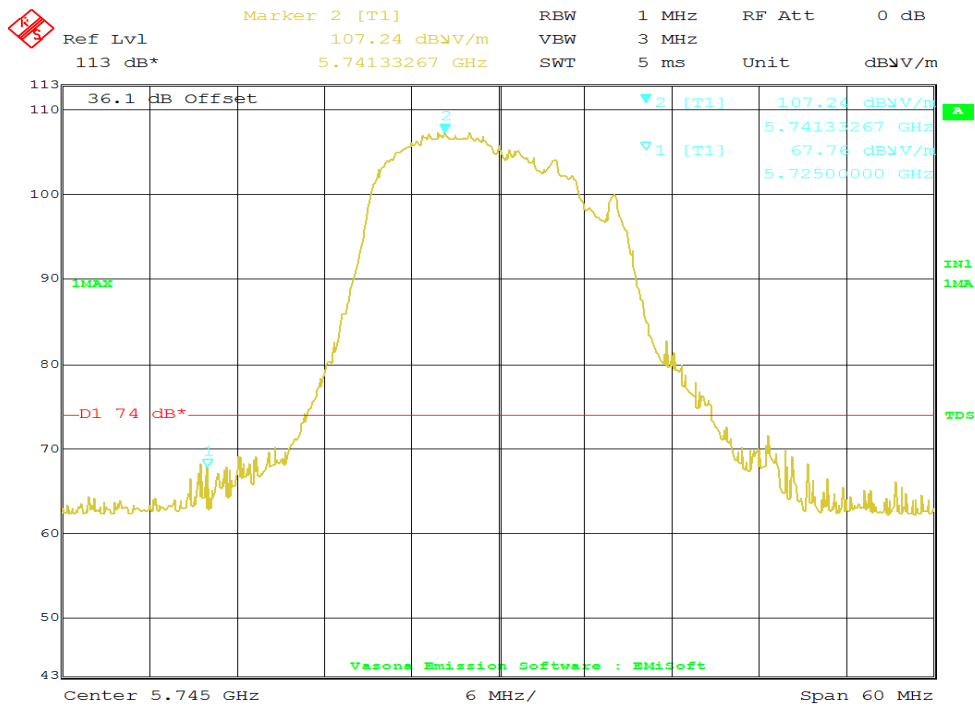

Date: 8.SEP.2015 15:21:41


**Figure 91: Radiated Emission 5725 MHz Edge for HT20 5745 MHz – Horz. (Pk)**

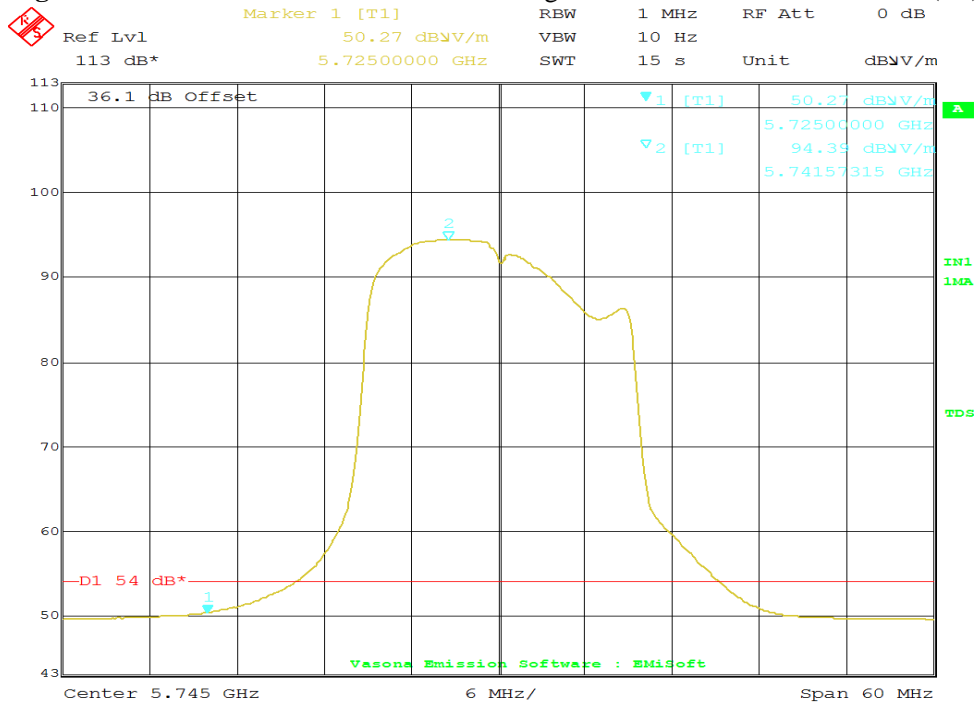

Date: 8.SEP.2015 15:24:21


**Figure 92: Radiated Emission 5725 MHz Edge for HT20 5745 MHz – Horz. (Ave)**



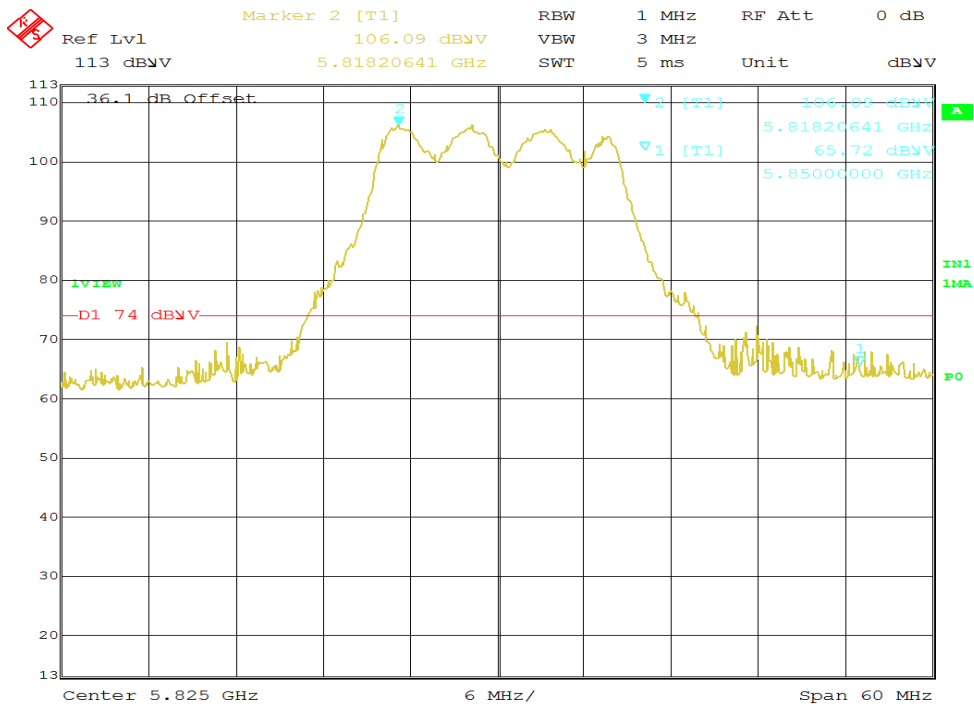


Date: 8.SEP.2015 20:15:45

**Figure 93: Radiated Emission 5850 MHz Edge for HT20 5825 MHz – Vert. (Pk)**

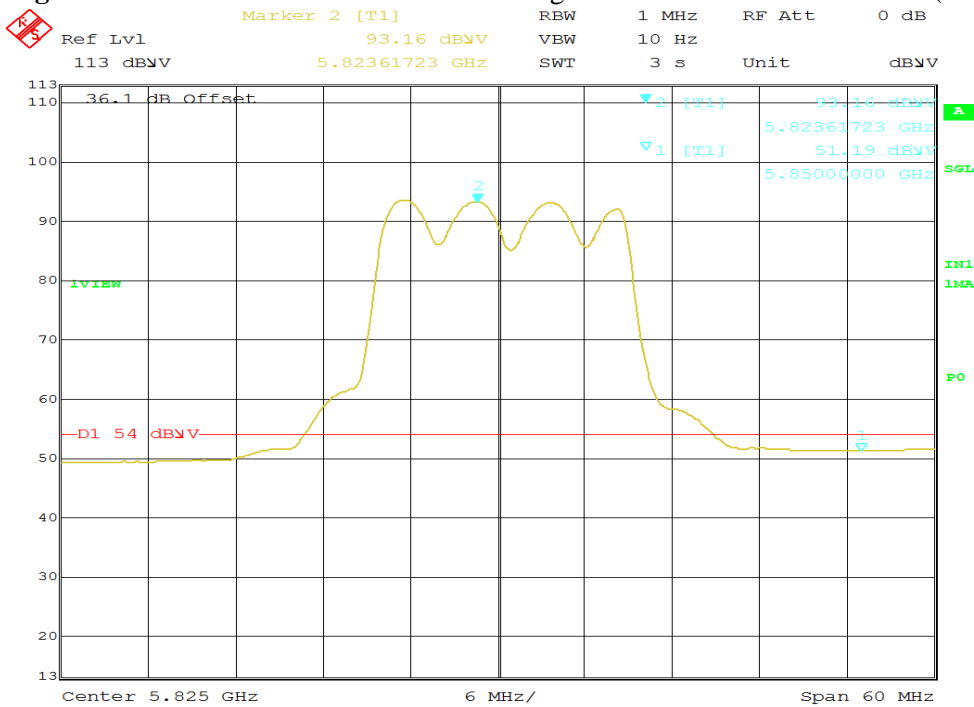


Date: 8.SEP.2015 20:16:19

**Figure 94: Radiated Emission 5850 MHz Edge for HT20 5825 MHz – Vert. (Ave)**

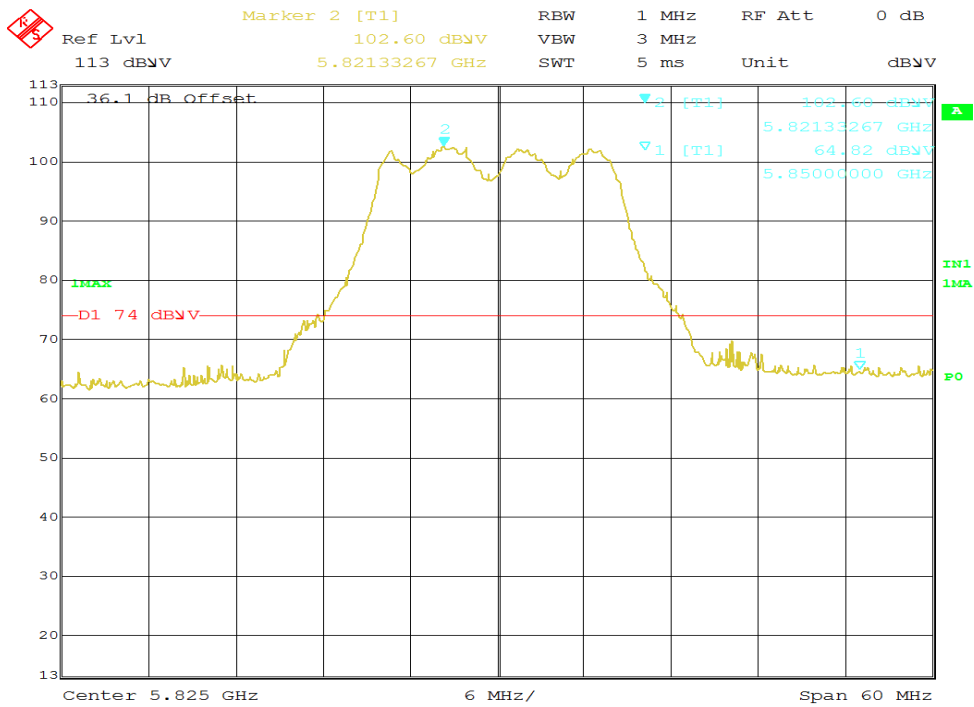


Date: 8.SEP.2015 20:18:39

**Figure 95:** Radiated Emission 5850 MHz Edge for HT20 5825 MHz – Horz. (Pk)

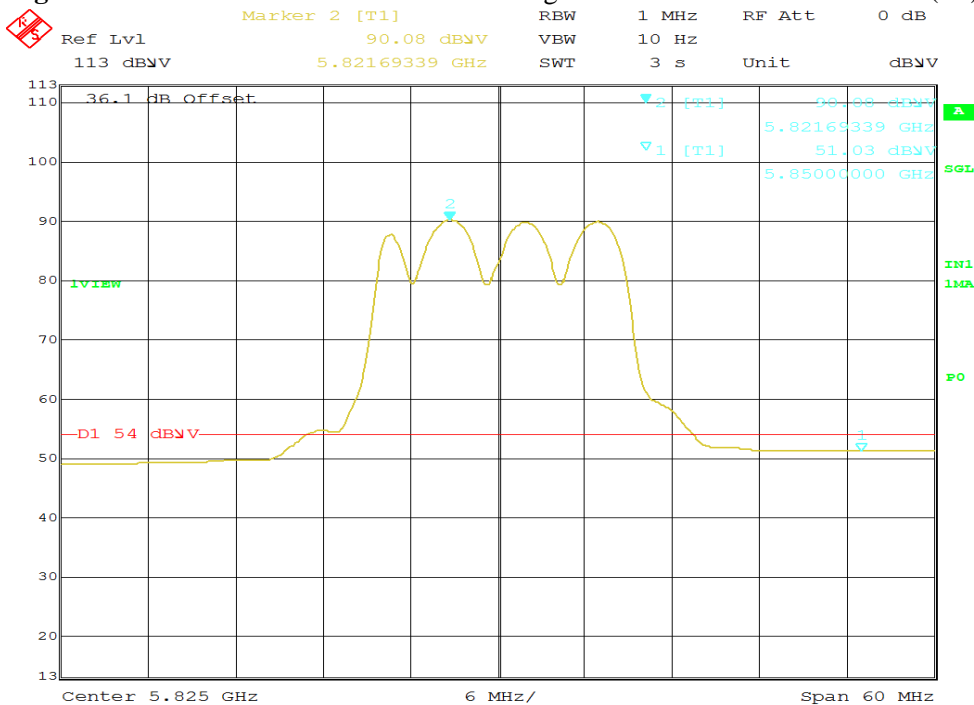


Date: 8.SEP.2015 20:19:14

**Figure 96:** Radiated Emission 5850 MHz Edge for HT20 5825 MHz – Horz. (Ave)

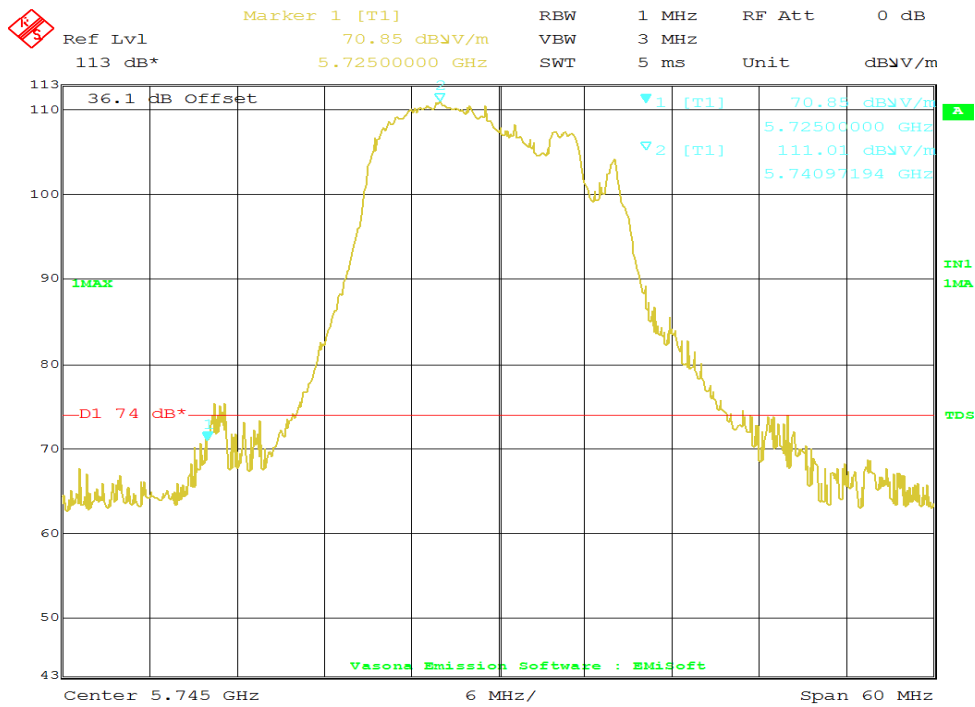


Date: 8.SEP.2015 15:35:48

**Figure 97: Radiated Emission 5725 MHz Edge for VHT20 5745 MHz – Vert. (Pk)**

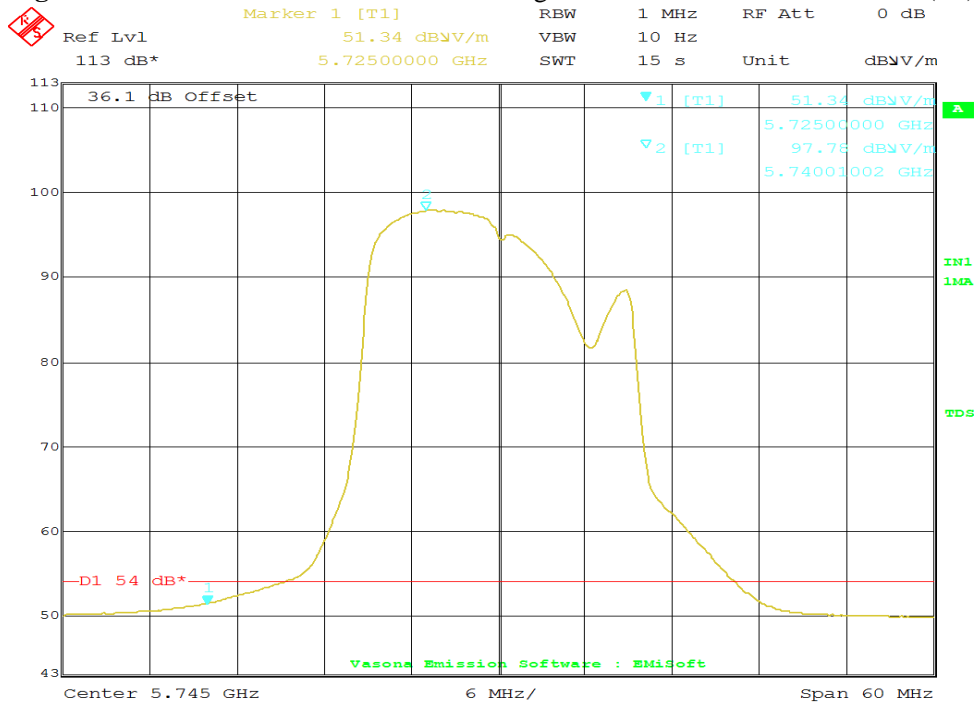


Date: 8.SEP.2015 15:37:22

**Figure 98: Radiated Emission 5725 MHz Edge for VHT20 5745 MHz – Vert. (Ave)**

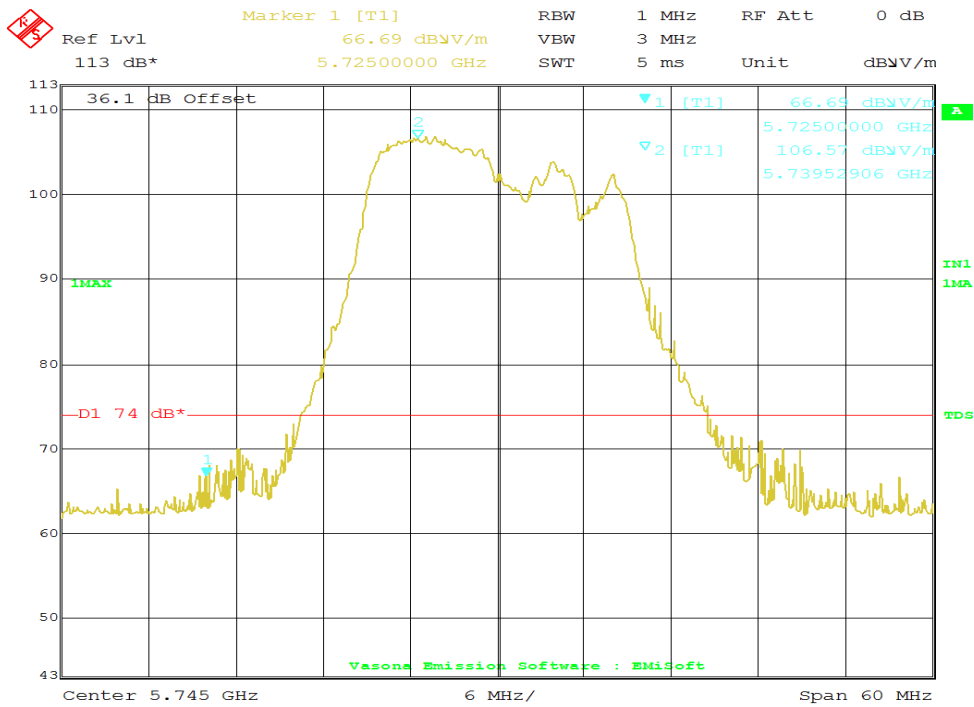


Date: 8.SEP.2015 15:45:34

**Figure 99: Radiated Emission 5725 MHz Edge for VHT20 5745 MHz – Horz. (Pk)**

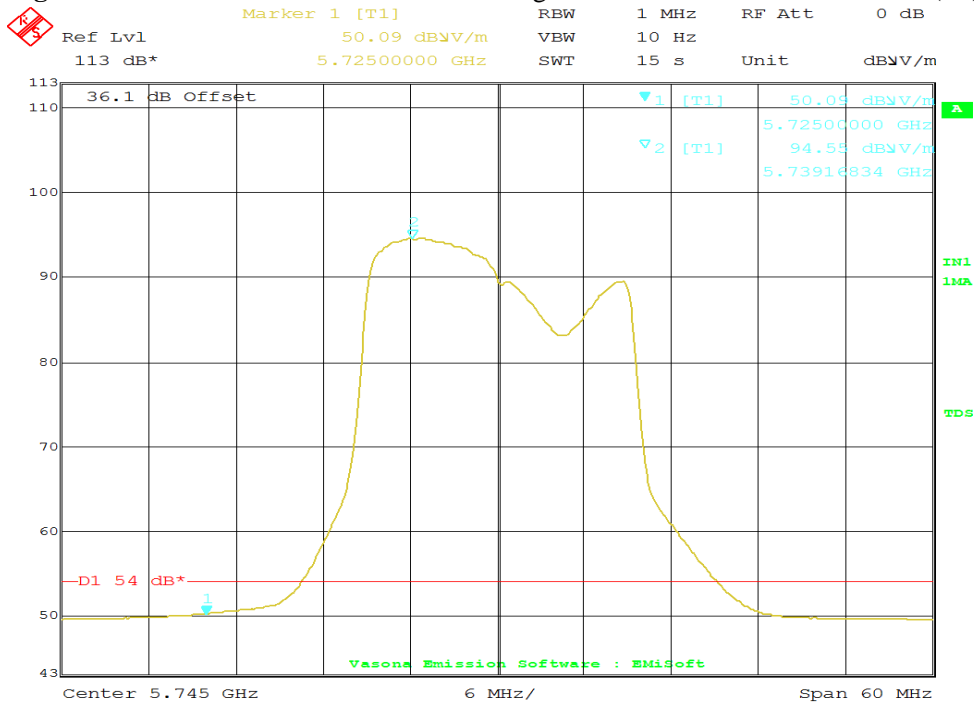


Date: 8.SEP.2015 15:58:29

**Figure 100: Radiated Emission 5725 MHz Edge for VHT20 5745 MHz – Horz. (Ave)**

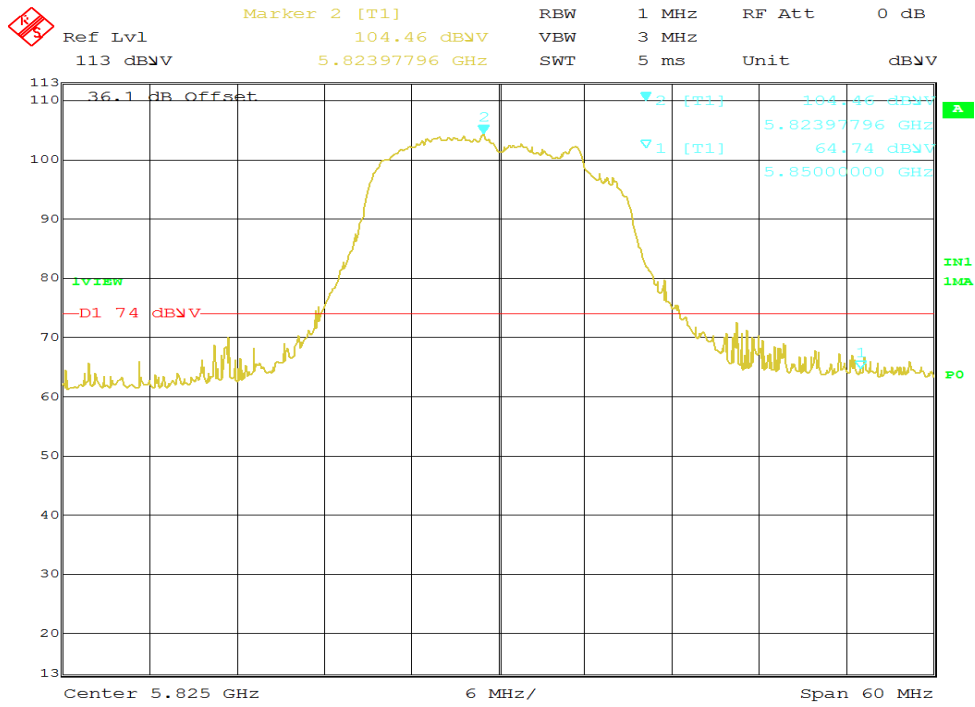


Date: 8.SEP.2015 20:31:40

**Figure 101: Radiated Emission 5850 MHz Edge for VHT20 5825 MHz – Horz. (Pk)**

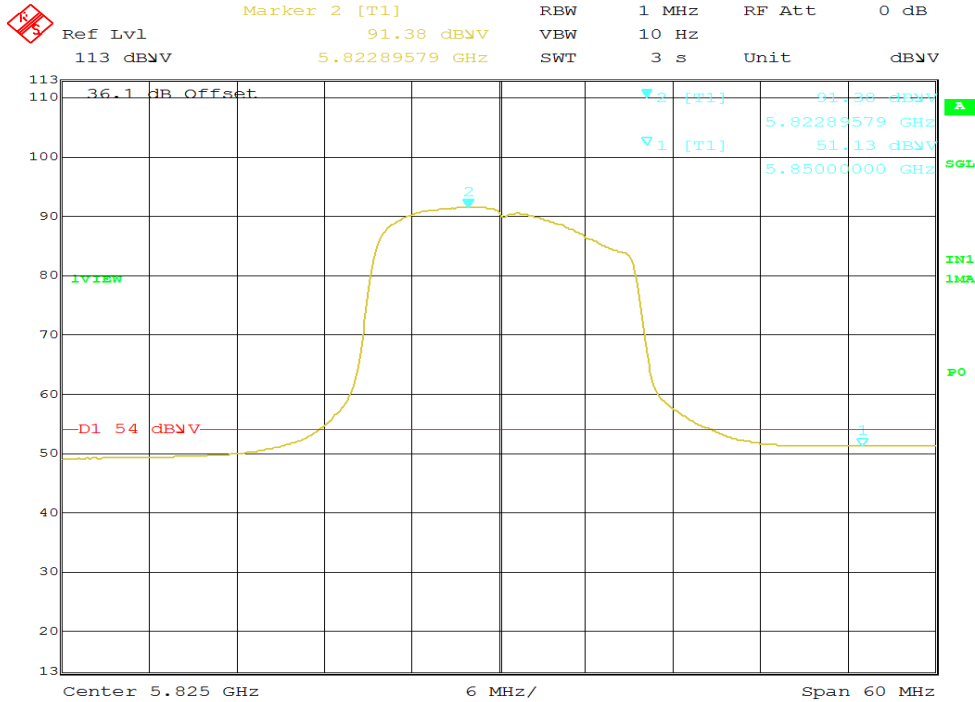


Date: 8.SEP.2015 20:32:12

**Figure 102: Radiated Emission 5850 MHz Edge for VHT20 5825 MHz – Horz. (Ave)**

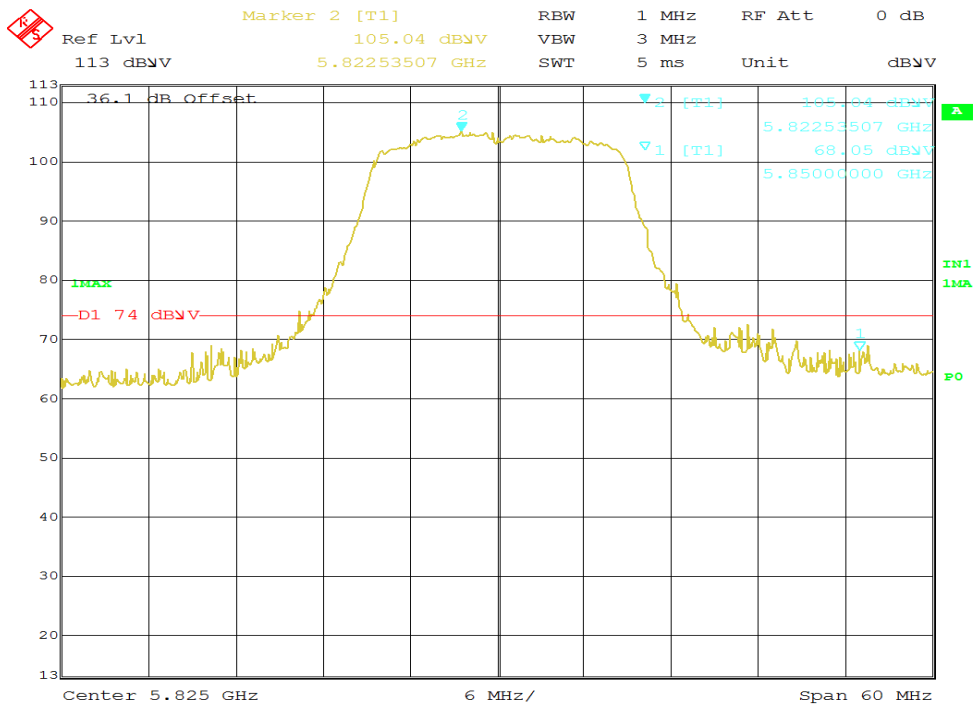


Date: 8.SEP.2015 20:34:25

**Figure 103: Radiated Emission 5850 MHz Edge for VHT20 5825 MHz – Vert. (Pk)**

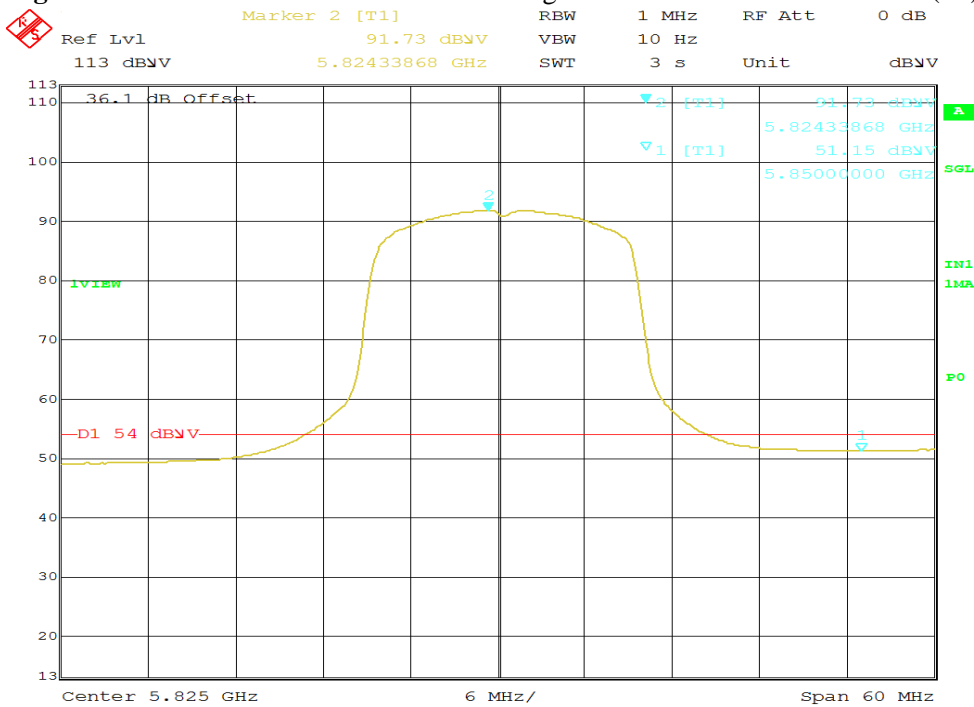


Date: 8.SEP.2015 20:34:58

**Figure 104: Radiated Emission 5850 MHz Edge for VHT20 5825 MHz – Vert. (Ave)**

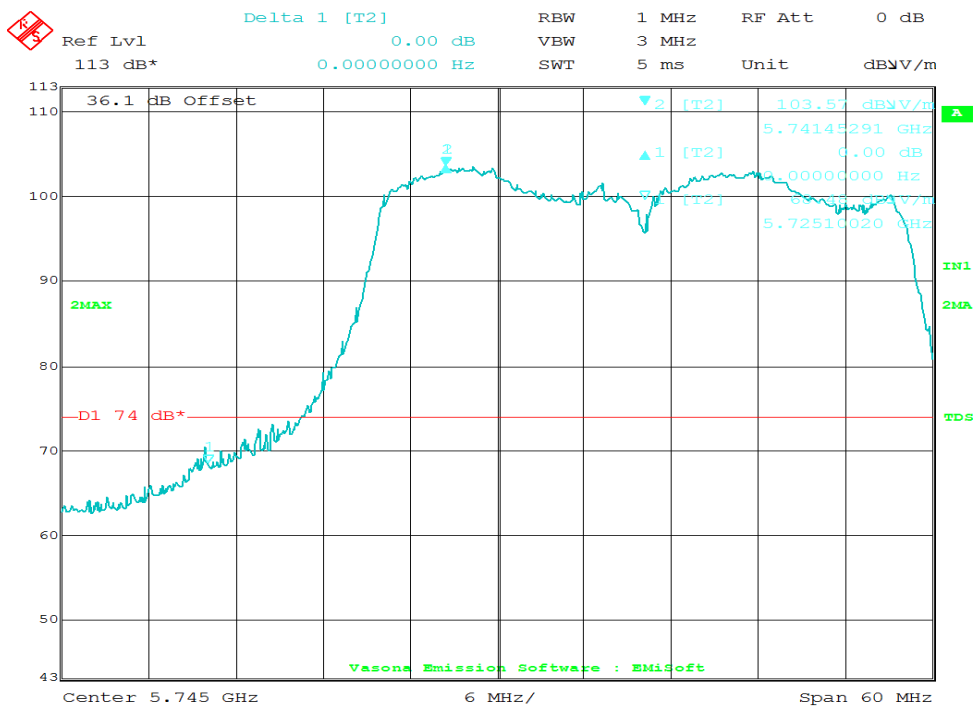


Date: 8.SEP.2015 16:23:38

**Figure 105: Radiated Emission 5725 MHz Edge for HT40 5755 MHz – Horz. (Pk)**

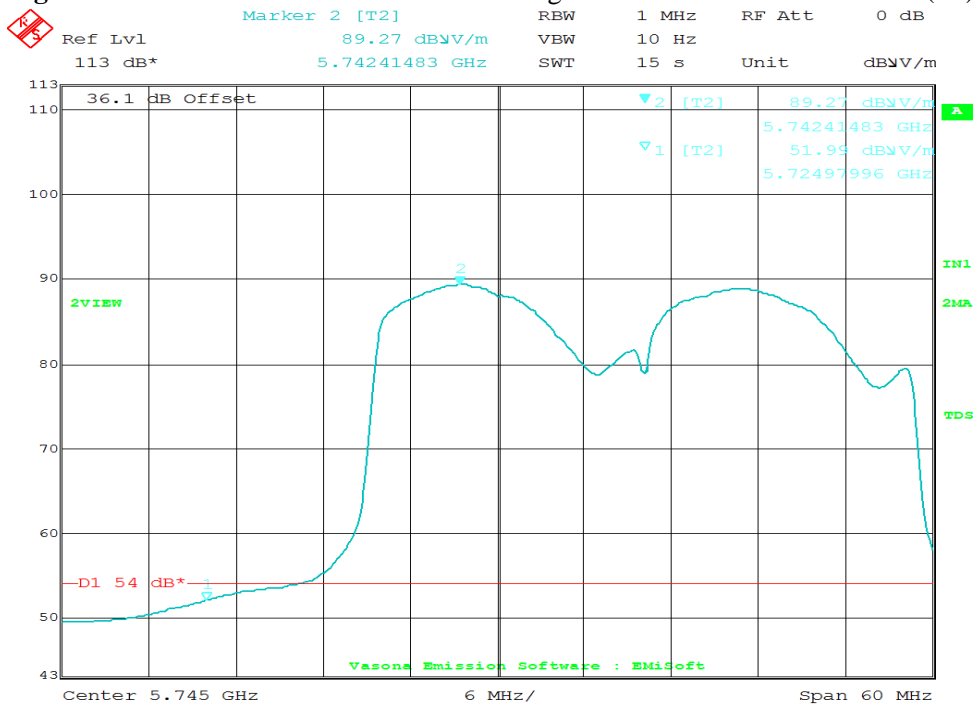


Date: 8.SEP.2015 16:27:45

**Figure 106: Radiated Emission 5725 MHz Edge for HT40 5755 MHz – Horz. (Ave)**

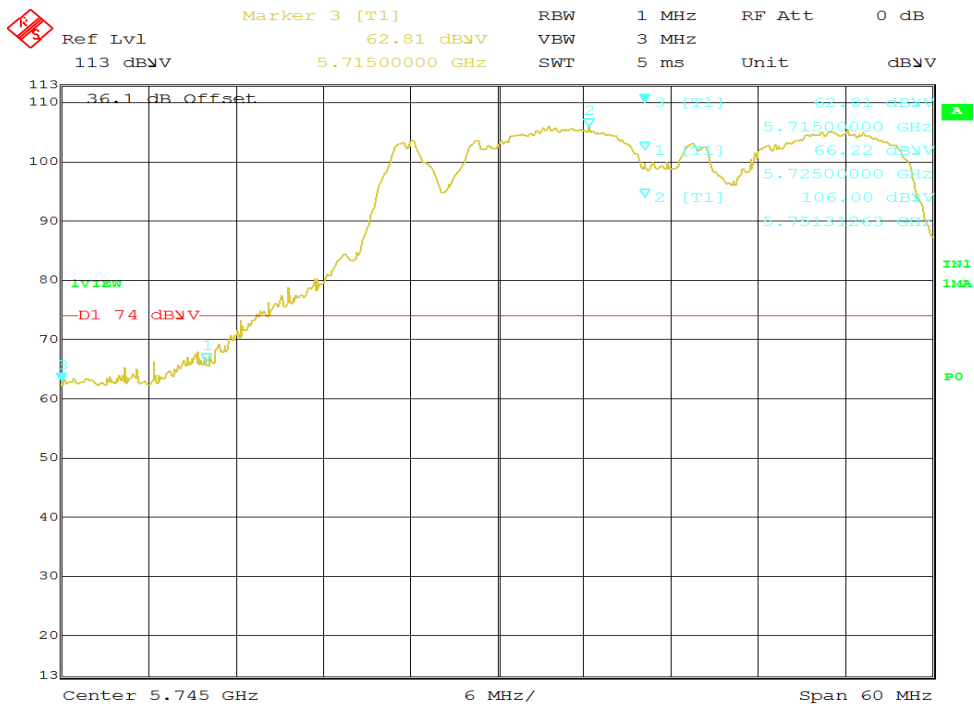

Date: 8.SEP.2015 17:34:22


**Figure 107: Radiated Emission 5725 MHz Edge for HT40 5755 MHz – Vert. (Pk)**

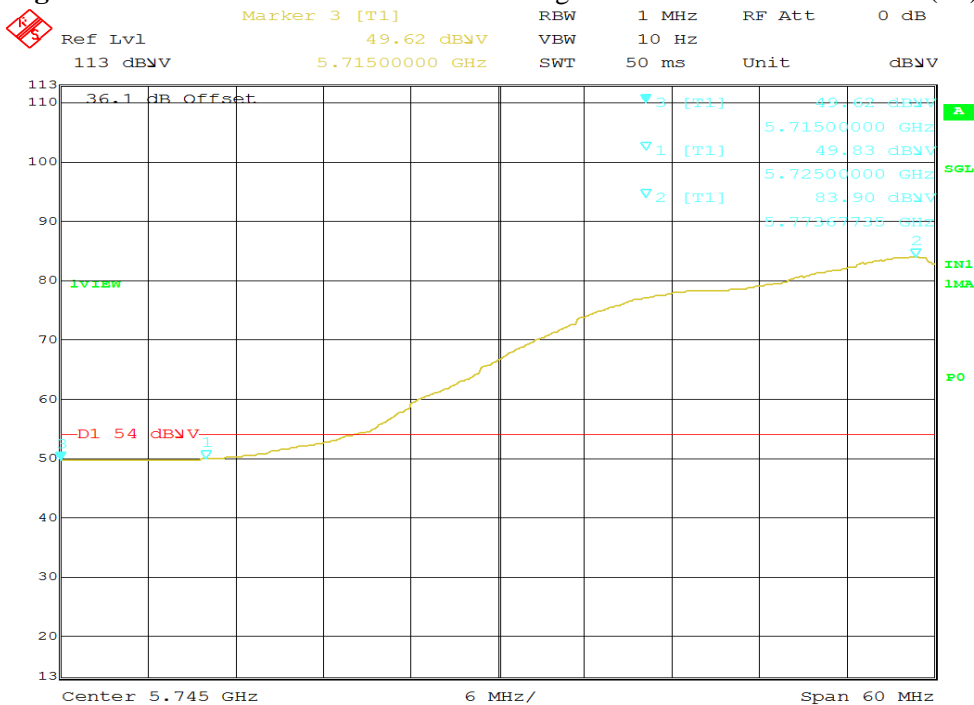

Date: 8.SEP.2015 17:35:30


**Figure 108: Radiated Emission 5725 MHz Edge for HT40 5755 MHz – Vert. (Ave)**



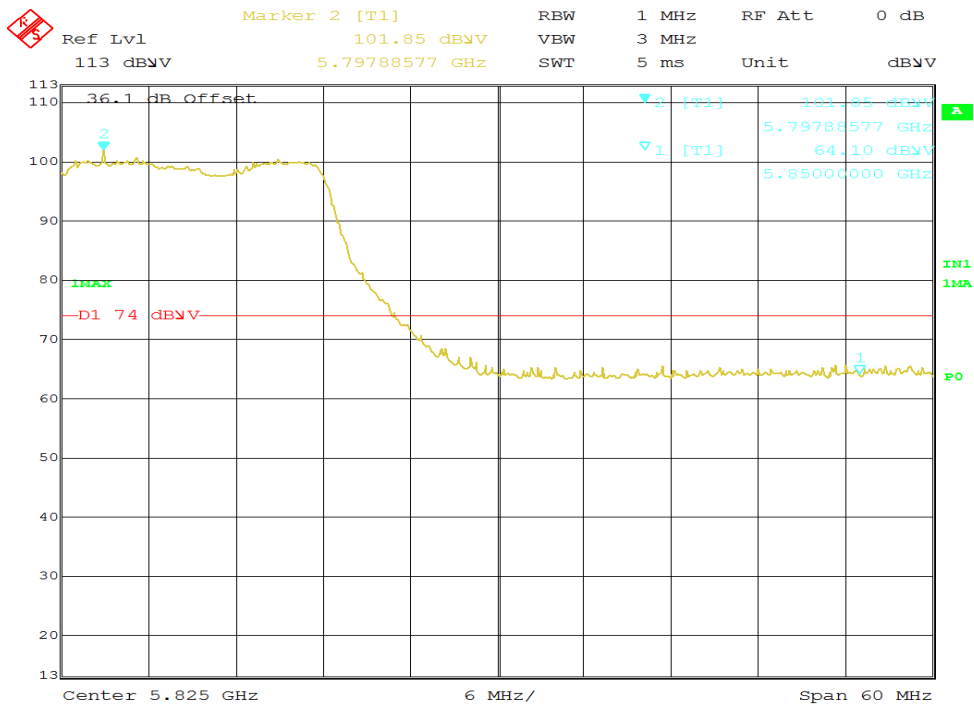


Date: 8.SEP.2015 20:53:06

**Figure 109: Radiated Emission 5850 MHz Edge for HT40 5795 MHz – Vert. (Pk)**

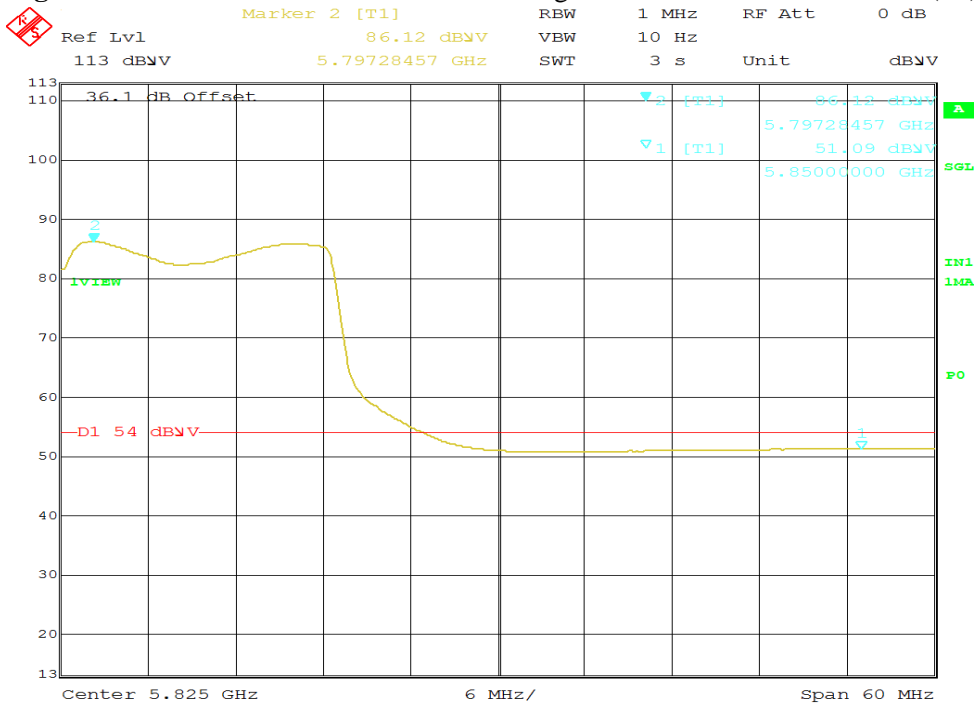


Date: 8.SEP.2015 20:53:44

**Figure 110: Radiated Emission 5850 MHz Edge for HT40 5795 MHz – Vert. (Ave)**

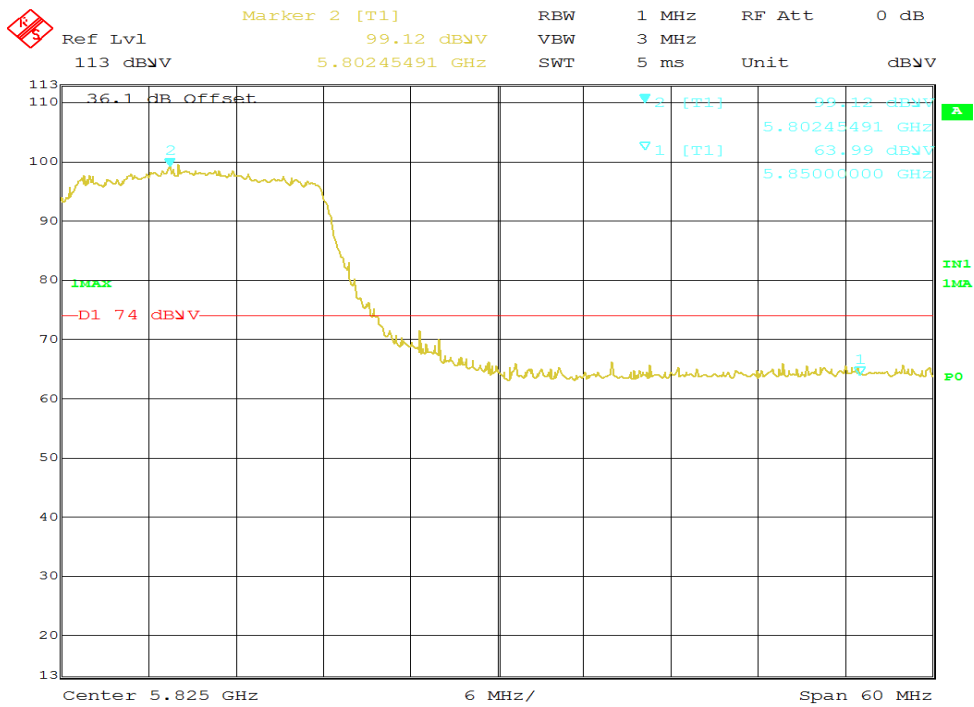


Date: 8.SEP.2015 21:32:16

**Figure 11: Radiated Emission 5850 MHz Edge for HT40 5795 MHz – Horz. (Pk)**

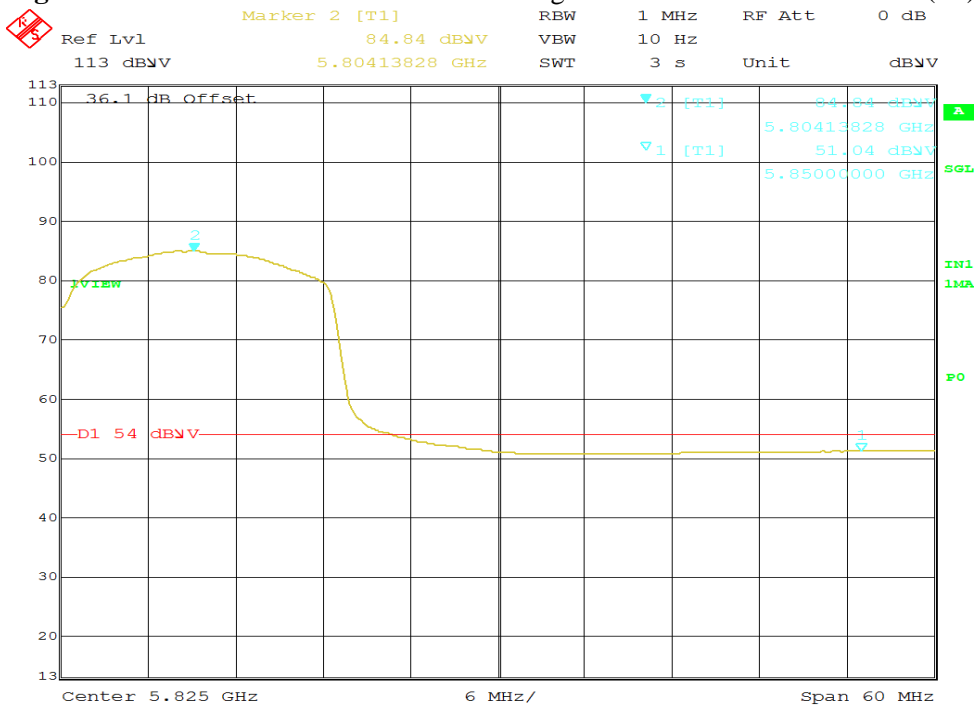


Date: 8.SEP.2015 21:32:55

**Figure 12: Radiated Emission 5850 MHz Edge for HT40 5795 MHz – Horz. (Ave)**

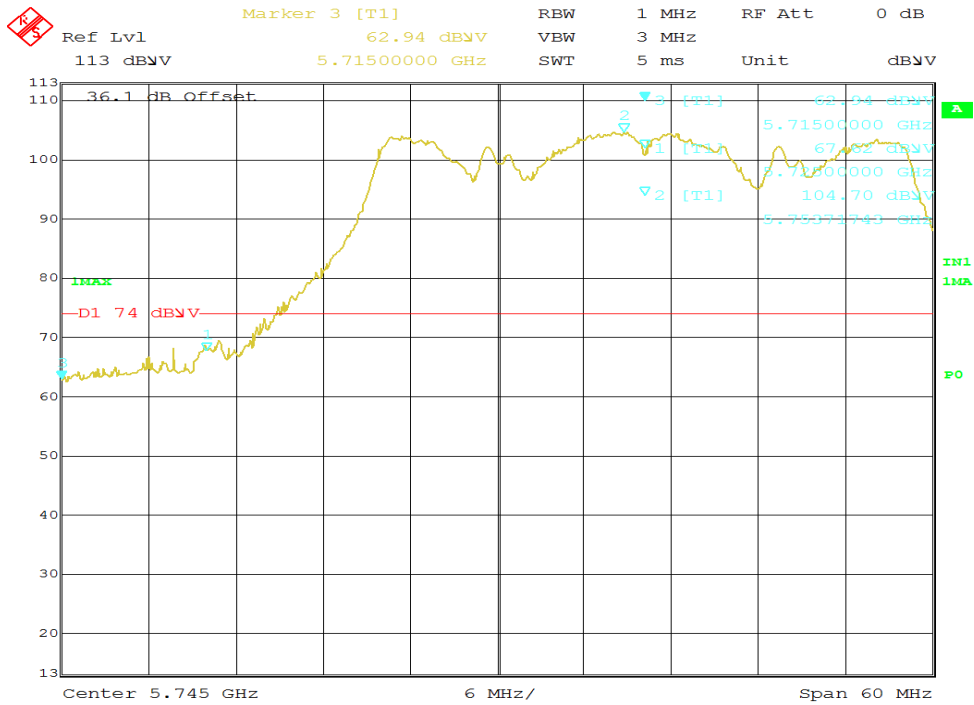


Date: 8.SEP.2015 17:20:45

**Figure 113: Radiated Emission 5725 MHz Edge for VHT40 5755 MHz – Vert. (Pk)**

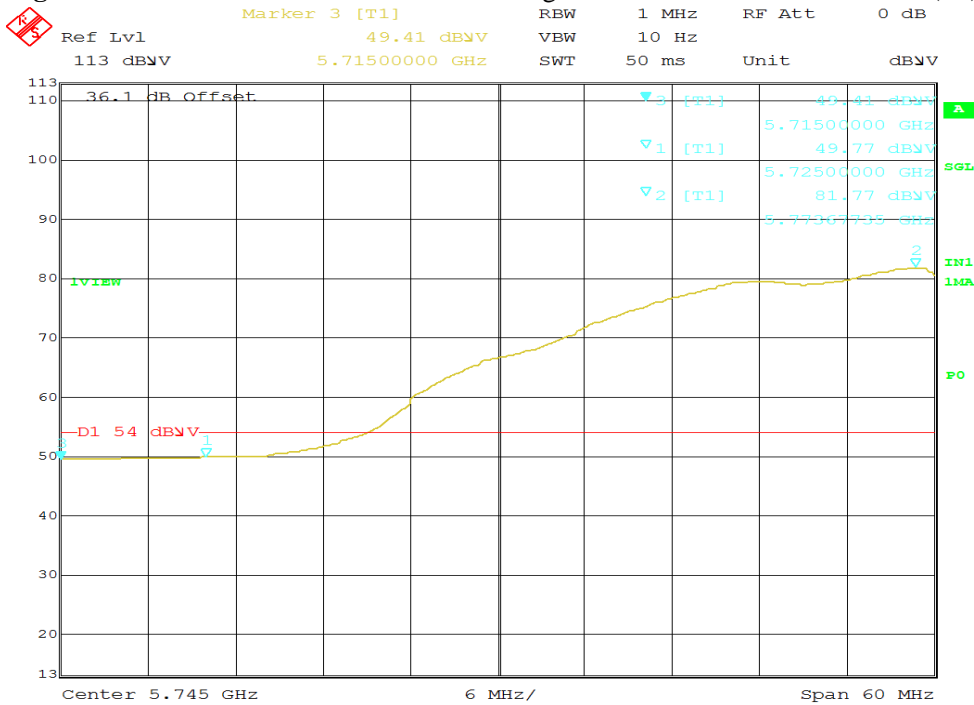


Date: 8.SEP.2015 17:22:12

**Figure 114: Radiated Emission 5725 MHz Edge for VHT40 5755 MHz – Vert. (Ave)**

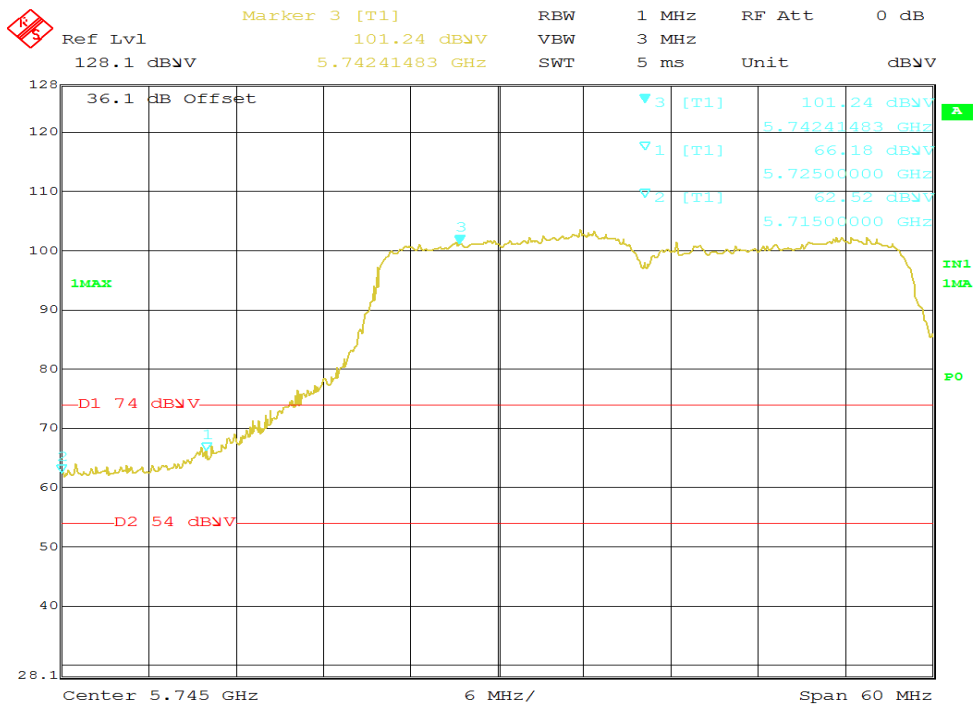


Date: 8.SEP.2015 17:05:06

**Figure 115: Radiated Emission 5725 MHz Edge for VHT40 5755 MHz – Horz. (Pk)**

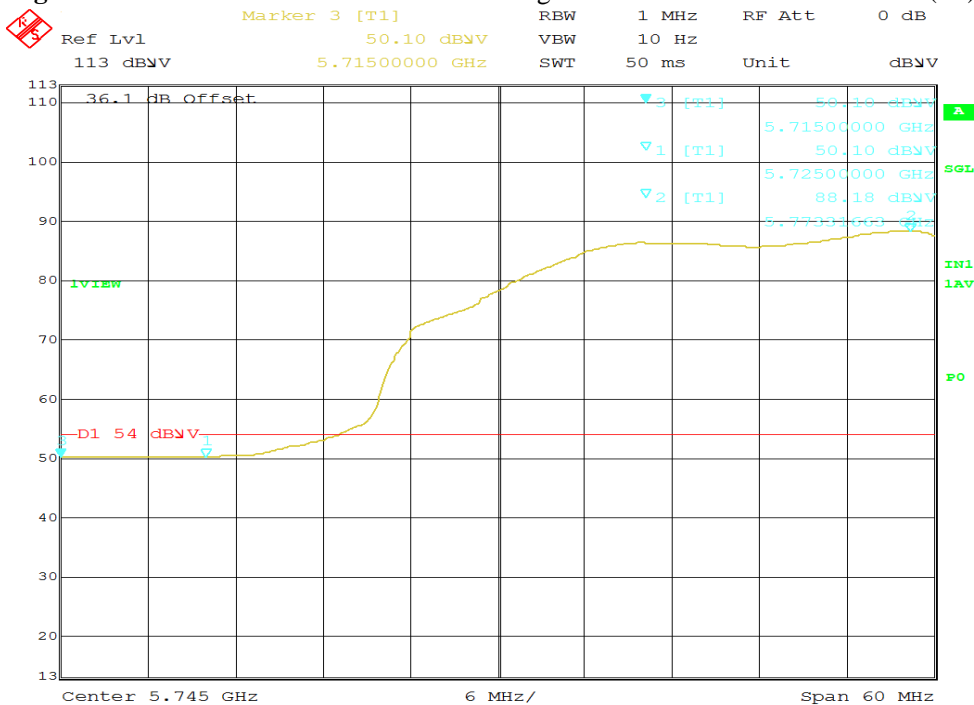


Date: 8.SEP.2015 17:28:20

**Figure 116: Radiated Emission 5725 MHz Edge for VHT40 5755 MHz – Horz. (Ave)**

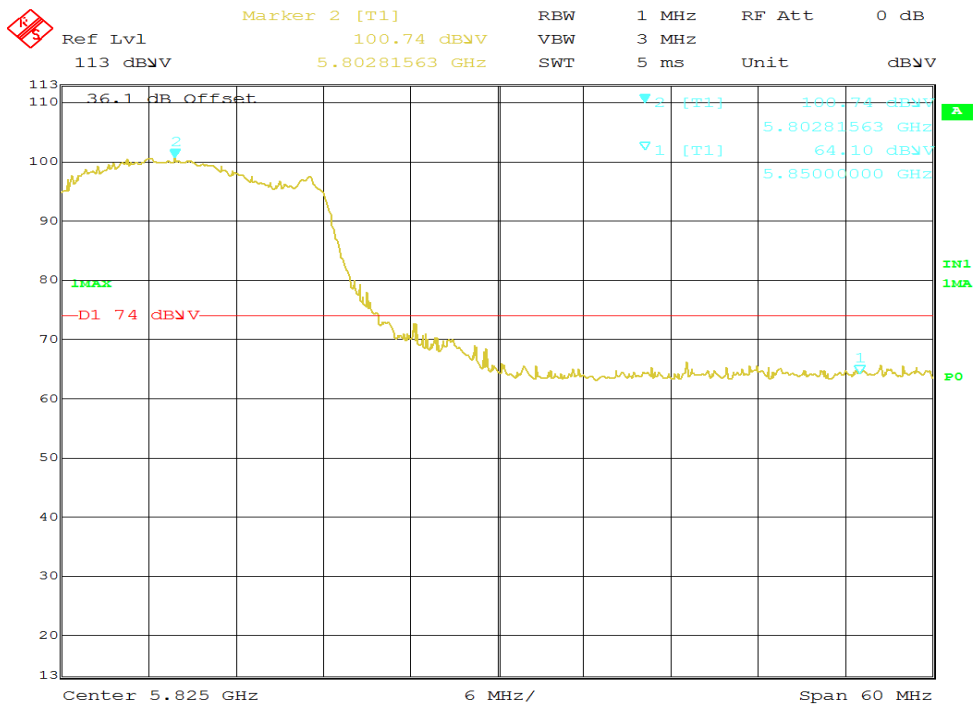


Date: 8.SEP.2015 21:39:35

**Figure 117: Radiated Emission 5850 MHz Edge for VHT40 5795 MHz – Horz. (Pk)**

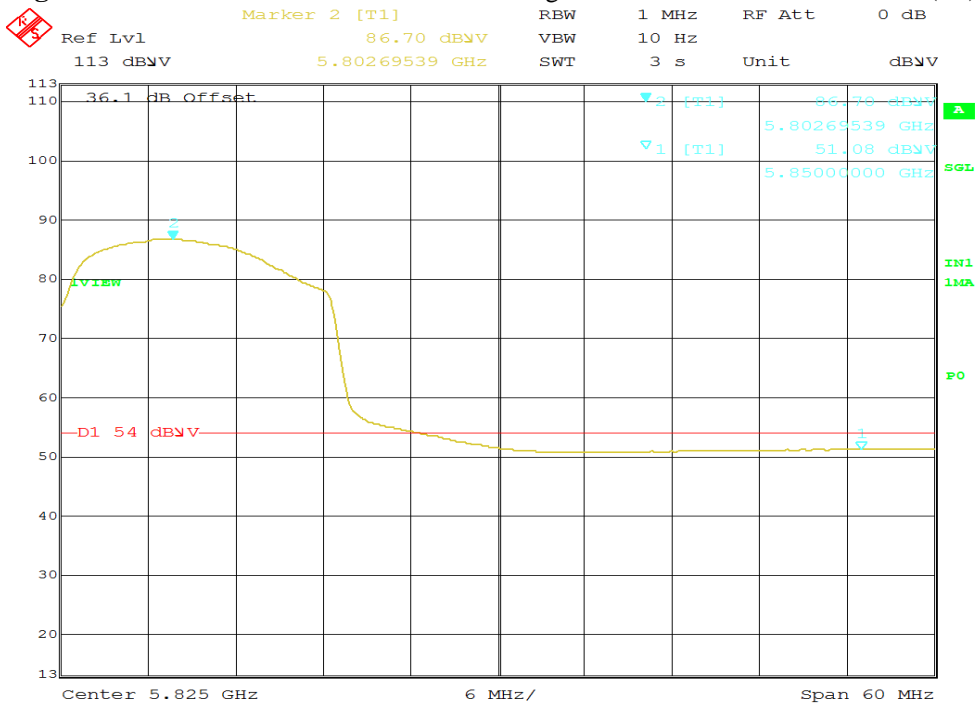


Date: 8.SEP.2015 21:40:14

**Figure 118: Radiated Emission 5850 MHz Edge for VHT40 5795 MHz – Horz. (Ave)**

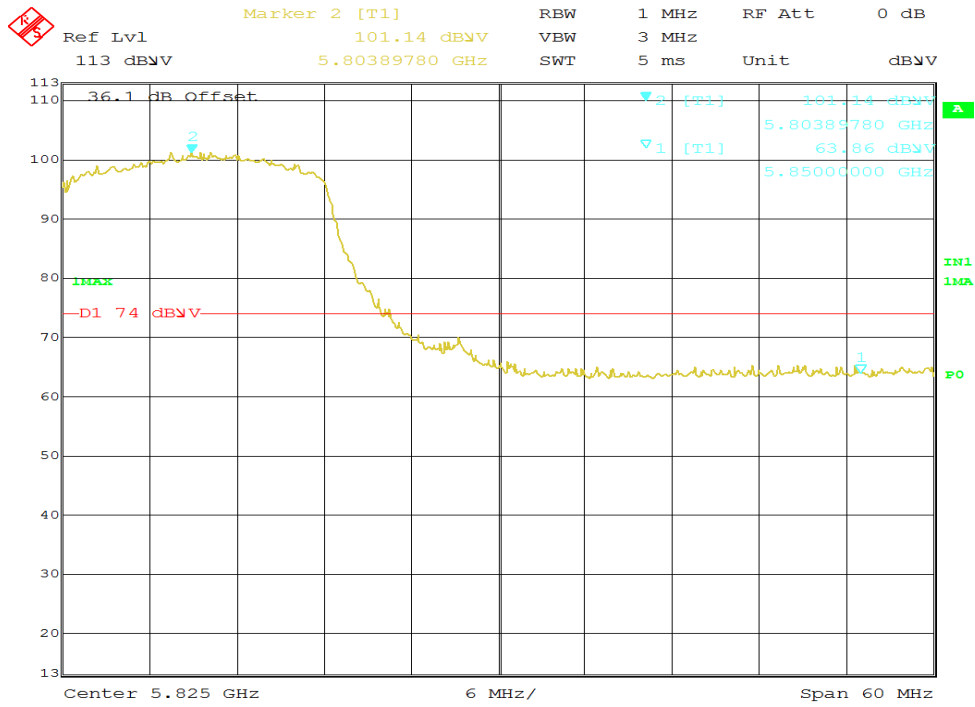


Date: 8.SEP.2015 21:41:33

**Figure 119: Radiated Emission 5850 MHz Edge for VHT40 5795 MHz – Vert. (Pk)**

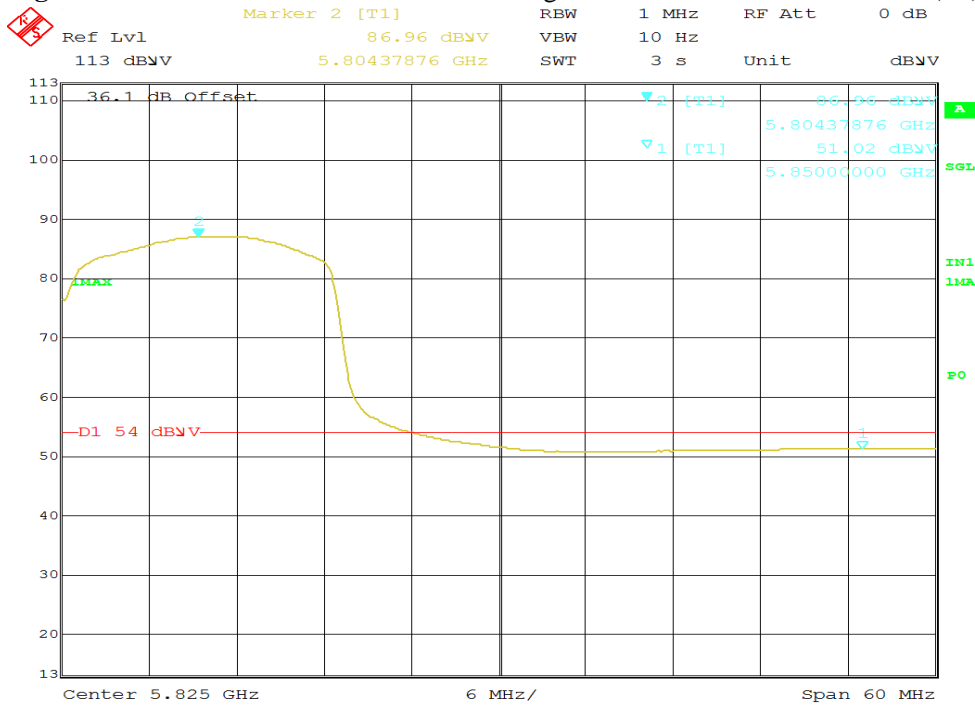


Date: 8.SEP.2015 21:42:01

**Figure 120: Radiated Emission 5850 MHz Edge for VHT40 5795 MHz – Vert. (Ave)**

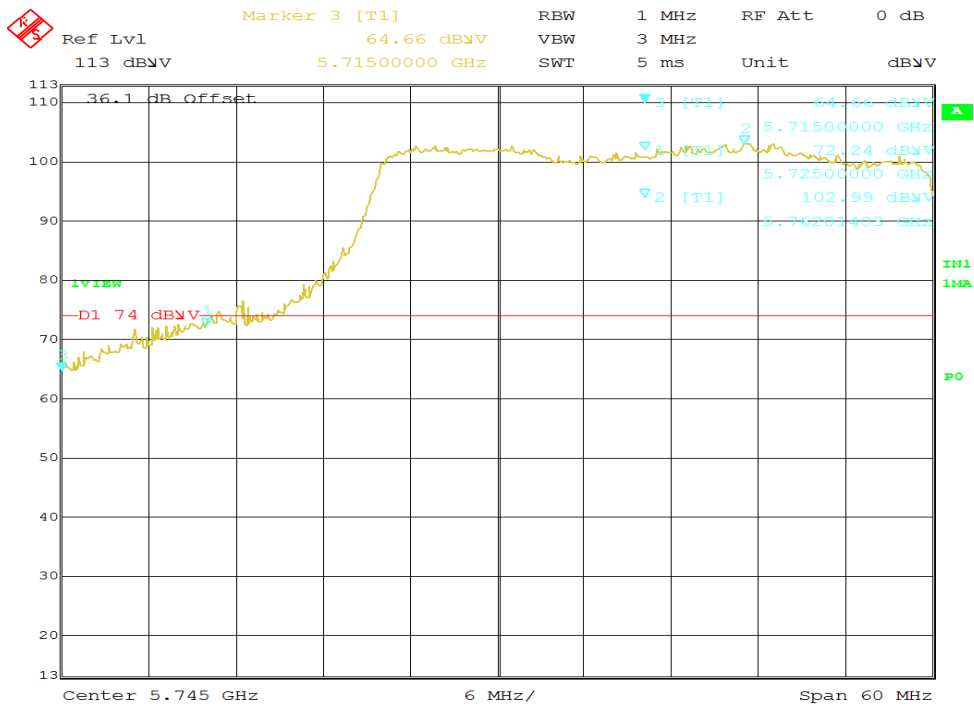


Date: 8.SEP.2015 17:46:32

**Figure 121: Radiated Emission 5725 MHz Edge for VHT80 5775 MHz – Vert. (Pk)**

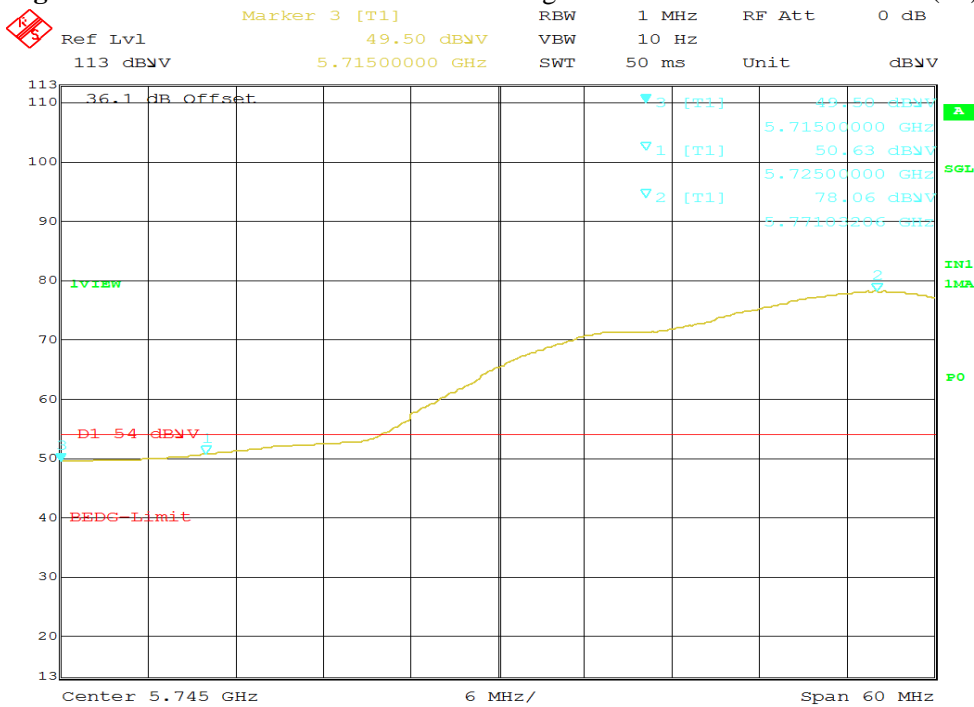


Date: 8.SEP.2015 17:49:55

**Figure 122: Radiated Emission 5725 MHz Edge for VHT80 5775 MHz – Vert. (Ave)**

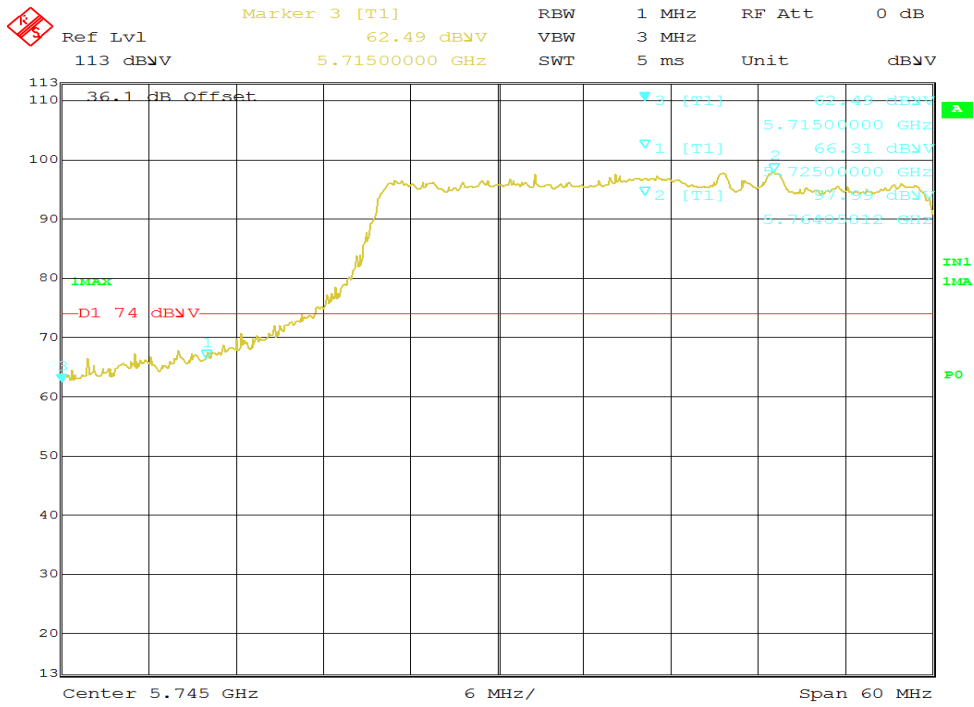

Date: 8.SEP.2015 17:53:51


**Figure 123: Radiated Emission 5725 MHz Edge for VHT80 5775 MHz – Horz. (Pk)**

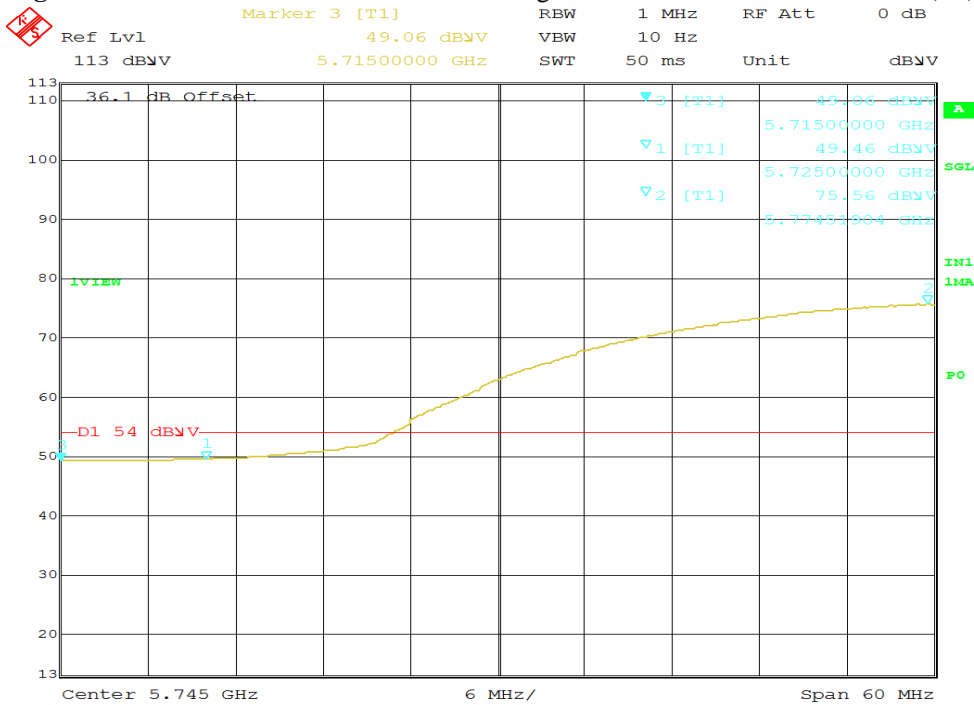

Date: 8.SEP.2015 17:54:47


**Figure 124: Radiated Emission 5725 MHz Edge for VHT80 5775 MHz – Horz. (Ave)**



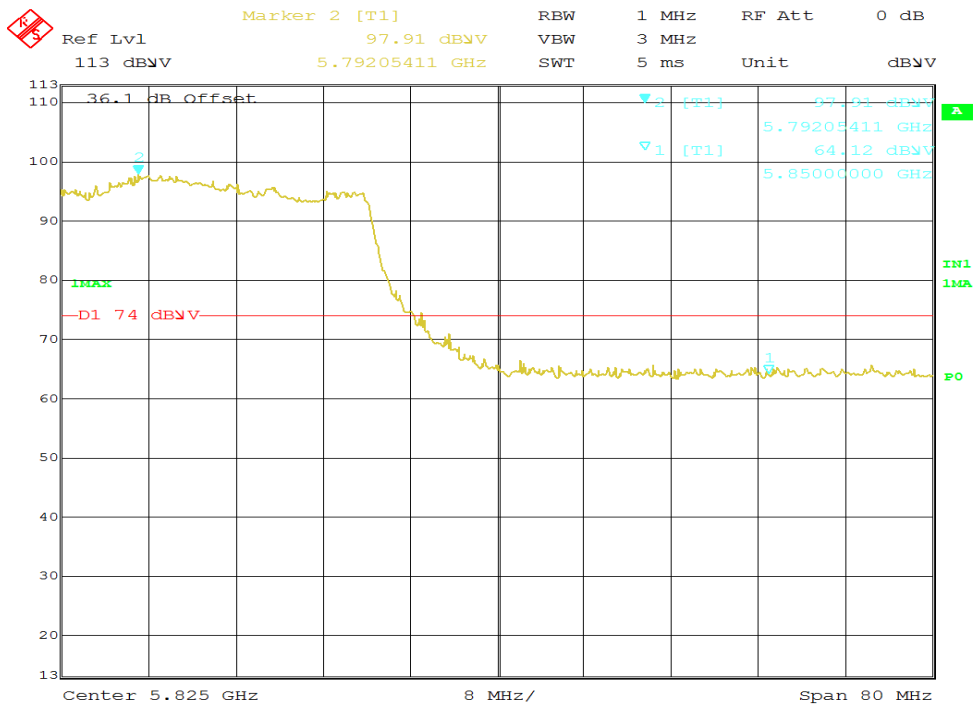


Date: 8.SEP.2015 21:46:08

**Figure 125: Radiated Emission 5850 MHz Edge for VHT80 5775 MHz – Vert. (Pk)**

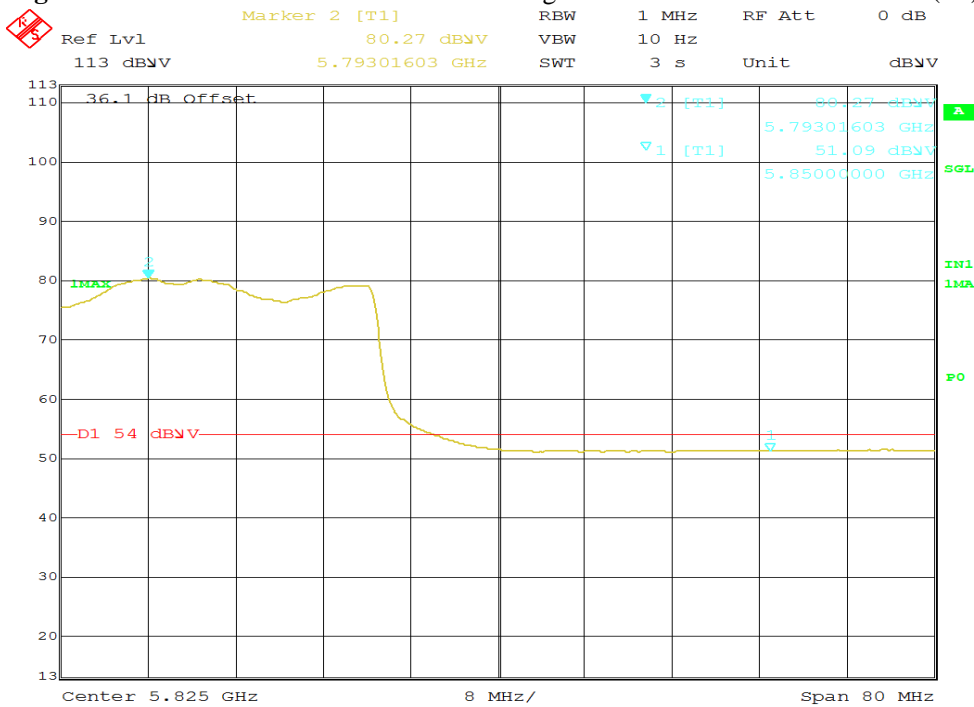


Date: 8.SEP.2015 21:46:44

**Figure 126: Radiated Emission 5850 MHz Edge for VHT80 5775 MHz – Vert. (Ave)**

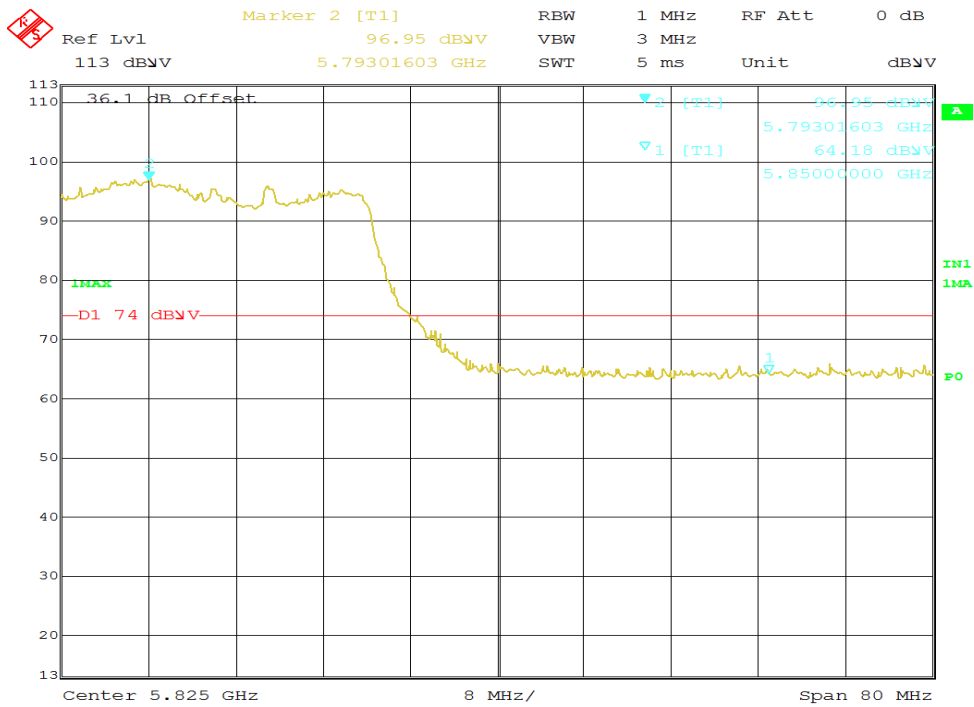

Date: 8.SEP.2015 21:48:30

**Figure 127: Radiated Emission 5850 MHz Edge for VHT80 5775 MHz – Horz. (Pk)**

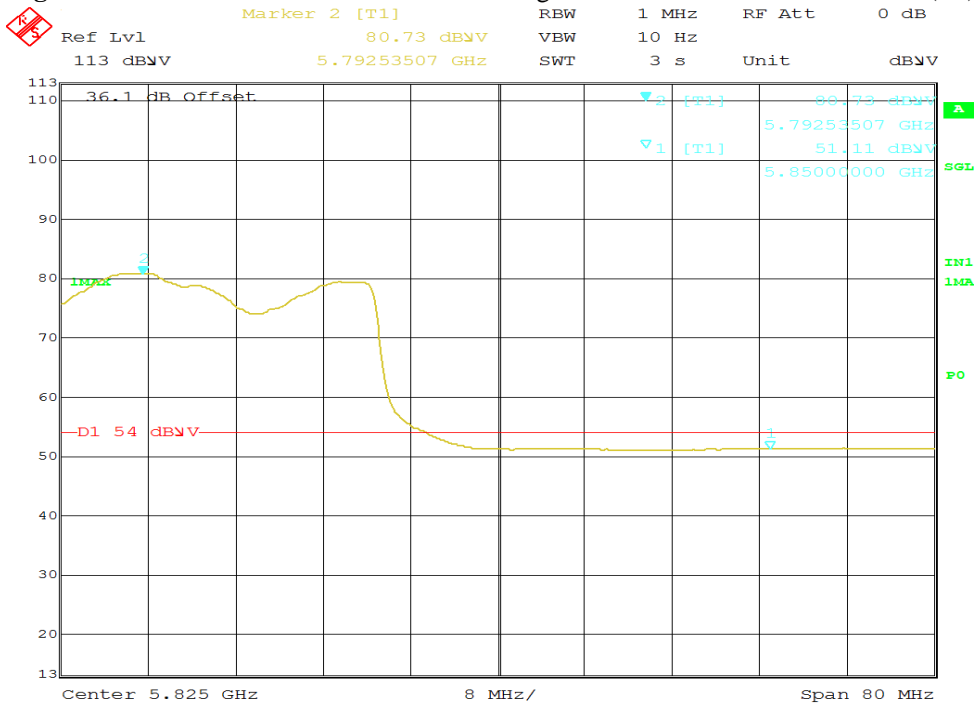


Date: 8.SEP.2015 21:49:10

**Figure 128: Radiated Emission 5850 MHz Edge for VHT80 5775 MHz – Horz. (Ave)**

<b>SOP 1 Radiated Emissions</b>				Tracking # 31562808.001 Page 1 of 13			
<b>EUT Name</b>	Home Wi-Fi Router			<b>Date</b>	September 11, 2015		
<b>EUT Model</b>	A010001			<b>Temp / Hum in</b>	21° C / 35%rh		
<b>EUT Serial</b>	E58V-0034-H6W8-7MJX			<b>Temp / Hum out</b>	N/A		
<b>EUT Config.</b>	802.11n at HT20 MCS0 / chain 0 & 1			<b>Line AC / Freq</b>	120 Vac / 60 Hz		
<b>Standard</b>	CFR47 Part 15 Subpart E, RSS-247, RSS-GEN			<b>RBW / VBW</b>	120 kHz/ 300 kHz		
<b>Dist/Ant Used</b>	3m / JB3			<b>Performed by</b>	Chris Byleckie		

30 MHz – 1 GHz Transmit at 5785 MHz

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB
374.99	43.24	4.30	-16.87	30.67	QP	V	125	6	46.00	-15.33
81.12	48.53	3.00	-24.73	26.80	QP	V	131	72	40.00	-13.20
125.00	53.55	3.26	-18.18	38.63	QP	V	100	128	43.50	-4.87
959.99	38.70	5.86	-8.68	35.88	QP	V	135	188	46.00	-10.13
750.01	39.49	5.37	-11.31	33.56	QP	H	111	278	46.00	-12.44
39.58	48.89	2.69	-17.72	33.86	QP	V	109	342	40.00	-6.14

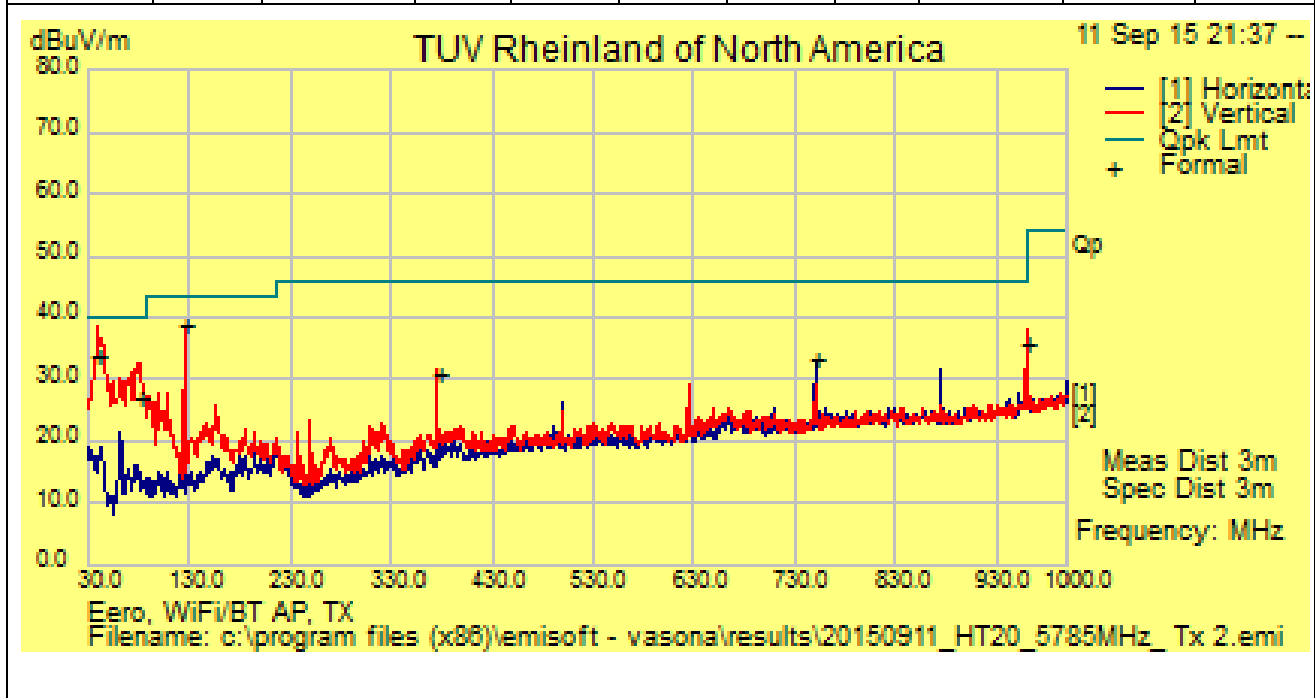


Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty  
 Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

- Note: 1. Worst case was observed on Mid channel of HT20 MCS0 mode.  
 2. Mode tested are 802.11a, HT20, VHT20, HT40, VHT40 & VHT80 (low, mid & high channel).  
 3. To reduce complexity and bulkiness of the report Worst case Plots are placed in the report.

<b>SOP 1 Radiated Emissions</b>			Tracking # 31562808.001 Page 2 of 13		
<b>EUT Name</b>	Home Wi-Fi Router	<b>Date</b>	September 10, 2015		
<b>EUT Model</b>	A010001	<b>Temp / Hum in</b>	21° C / 34%rh		
<b>EUT Serial</b>	E58V-0034-H6W8-7MJX	<b>Temp / Hum out</b>	N/A		
<b>EUT Config.</b>	802.11n at HT20 MCS0 / chain 0 & 1	<b>Line AC / Freq</b>	120 Vac / 60 Hz		
<b>Standard</b>	CFR47 Part 15 Subpart E, RSS-247, RSS-GEN	<b>RBW / VBW</b>	1 MHz / 3 MHz		
<b>Dist/Ant Used</b>	3m – EMCO3115 / 1m – AHA-840	<b>Performed by</b>	Kerwinn Corpuz		

1 – 18 GHz Transmit at 5745 MHz (Low Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB
14643.37	38.54	3.42	-6.69	35.27	Average	H	163	276	54.00	-18.73
18000.00	37.14	4.05	2.48	43.67	Average	H	164	310	54.00	-10.33

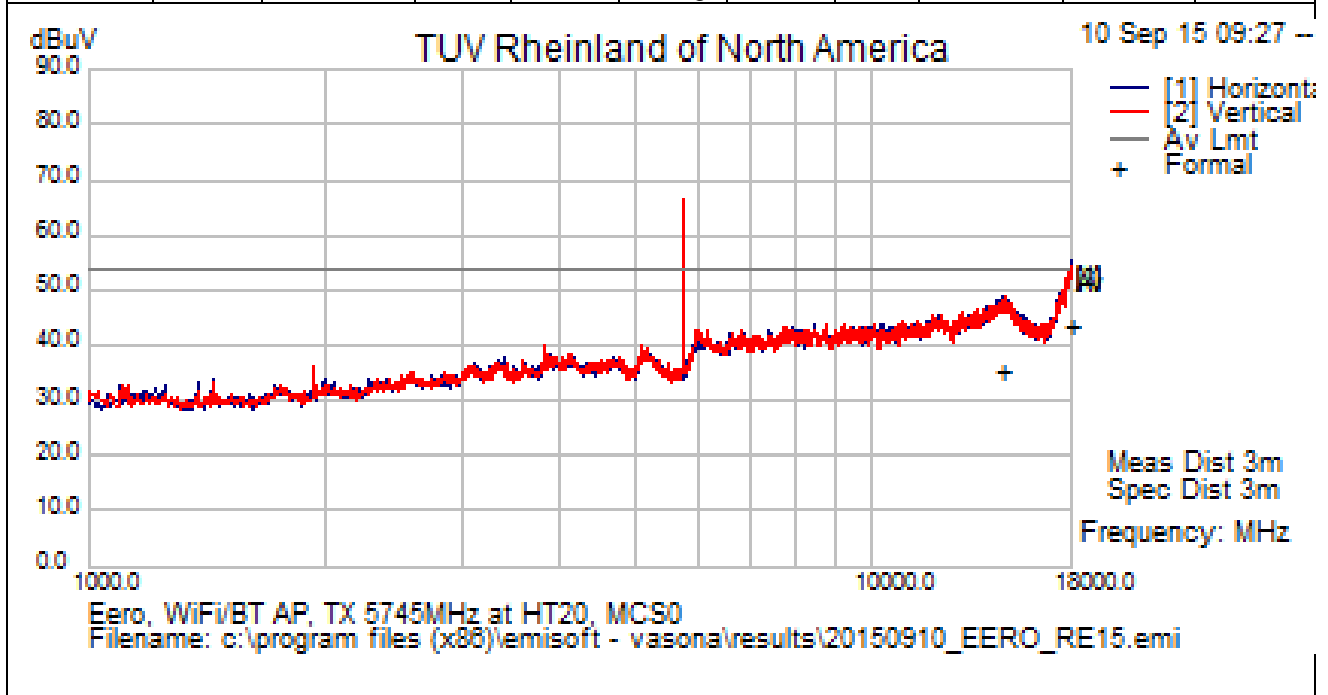

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty


Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

- Note:
1. Worst case was observed on HT20 MCS0 mode.
  2. Modes covered are 802.11a and VHT20.
  3. To reduce complexity and bulkiness of the report Worst case Plots are placed in the report.
  4. Emission above the Spurious Limit is the Fundamental.

<b>SOP 1 Radiated Emissions</b>		Tracking # 31562808.001 Page 3 of 13	
<b>EUT Name</b>	Home Wi-Fi Router	<b>Date</b>	September 11, 2015
<b>EUT Model</b>	A010001	<b>Temp / Hum in</b>	20° C / 37%rh
<b>EUT Serial</b>	E58V-0034-H6W8-7MJX	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	802.11n at HT20 MCS0 / chain 0 & 1	<b>Line AC / Freq</b>	120 Vac / 60 Hz
<b>Standard</b>	CFR47 Part 15 Subpart E, RSS-247, RSS-GEN	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	3m – EMCO3115 / 1m – AHA-840	<b>Performed by</b>	Kerwinn Corpuz

18 – 40 GHz Transmit at 5745 MHz (Low Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB
34375.82	43.88	7.01	-12.44	38.46	Average	V	166	56	54.00	-15.54
38545.80	46.05	7.56	-11.96	41.64	Average	V	195	196	54.00	-12.36
39823.44	47.13	7.65	-13.54	41.25	Average	V	131	0	54.00	-12.75

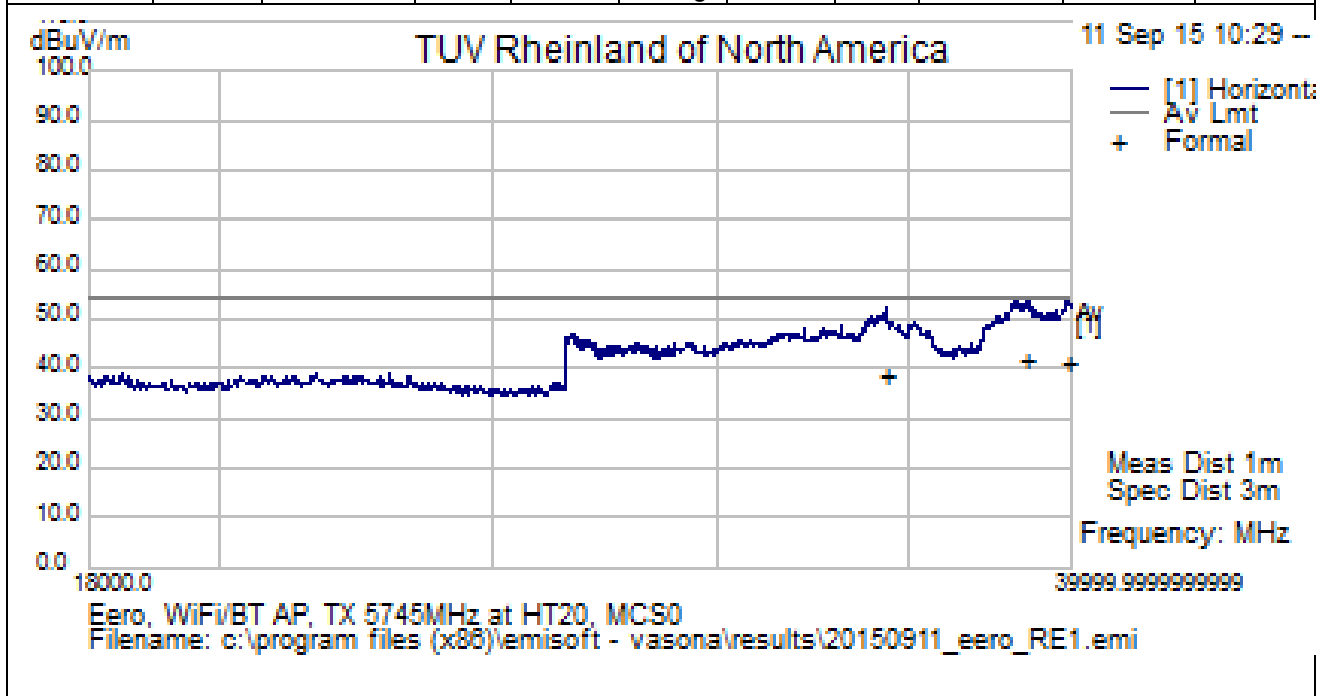

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty

Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

Note: 1. Worst case was observed on HT20 MCS0 mode.


2. Modes covered are 802.11a and VHT20.

3. To reduce complexity and bulkiness of the report Worst case Plots are placed in the report.

<b>SOP 1 Radiated Emissions</b>		Tracking # 31562808.001 Page 4 of 13	
<b>EUT Name</b>	Home Wi-Fi Router	<b>Date</b>	September 10, 2015
<b>EUT Model</b>	A010001	<b>Temp / Hum in</b>	21° C / 34%rh
<b>EUT Serial</b>	E58V-0034-H6W8-7MJX	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	802.11n at HT20 MCS0 / chain 0 & 1	<b>Line AC / Freq</b>	120 Vac / 60 Hz
<b>Standard</b>	CFR47 Part 15 Subpart E, RSS-247, RSS-GEN	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	3m – EMCO3115 / 1m – AHA-840	<b>Performed by</b>	Kerwinn Corpuz

1 – 18 GHz Transmit at 5785 MHz (Mid Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB
14765.23	38.74	3.39	-6.41	35.72	Average	H	166	246	54.00	-18.28
17992.99	36.83	4.04	2.31	43.18	Average	V	178	196	54.00	-10.82

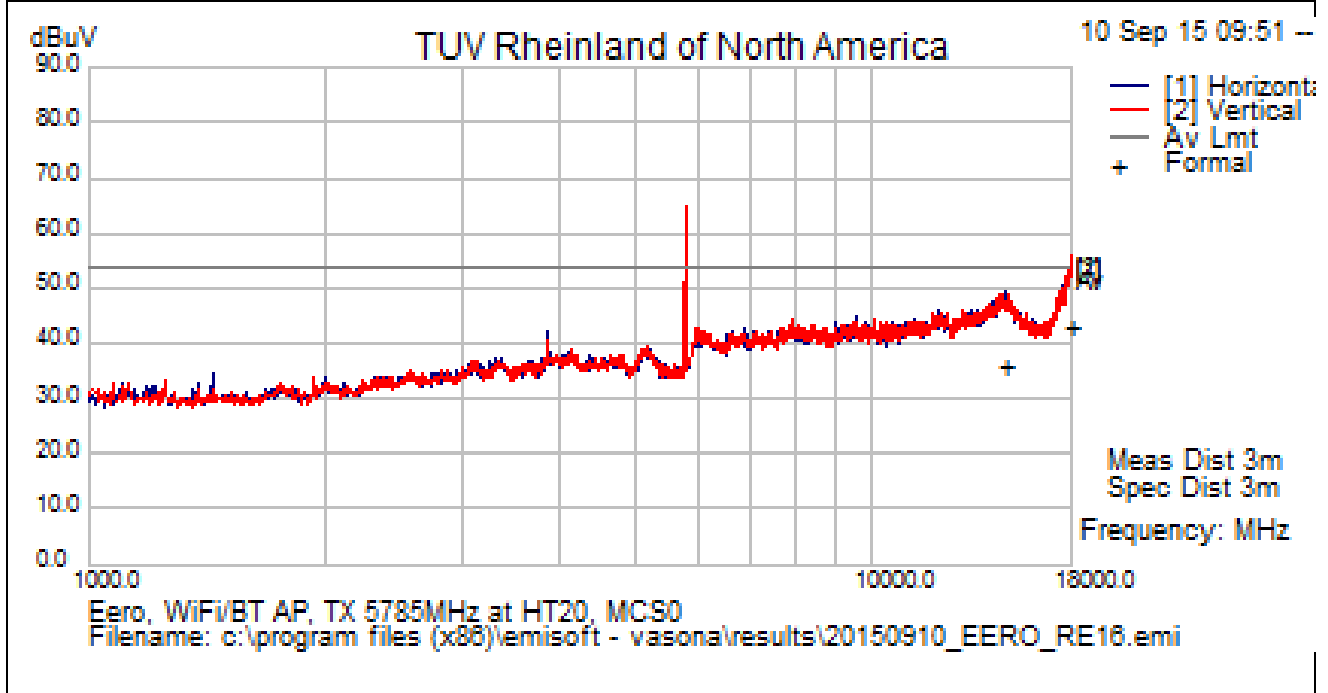

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty


Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

- Note: 1. Worst case was observed on HT20 MCS0 mode.  
 2. Modes covered are 802.11a and VHT20.  
 3. To reduce complexity and bulkiness of the report Worst case Plots are placed in the report.  
 4. Emission above the Spurious Limit is the Fundamental.

<b>SOP 1 Radiated Emissions</b>				Tracking # 31562808.001 Page 5 of 13			
<b>EUT Name</b>	Home Wi-Fi Router			<b>Date</b>	September 11, 2015		
<b>EUT Model</b>	A010001			<b>Temp / Hum in</b>	20° C / 37%rh		
<b>EUT Serial</b>	E58V-0034-H6W8-7MJX			<b>Temp / Hum out</b>	N/A		
<b>EUT Config.</b>	802.11n at HT20 MCS0 / chain 0 & 1			<b>Line AC / Freq</b>	120 Vac / 60 Hz		
<b>Standard</b>	CFR47 Part 15 Subpart E, RSS-247, RSS-GEN			<b>RBW / VBW</b>	1 MHz / 3 MHz		
<b>Dist/Ant Used</b>	3m – EMCO3115 / 1m – AHA-840			<b>Performed by</b>	Kerwinn Corpuz		

18 – 40 GHz Transmit at 5785 MHz (Mid Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB
39953.85	46.69	7.63	-13.52	40.81	Average	H	158	334	54.00	-13.19
34226.89	43.77	6.99	-12.43	38.33	Average	V	114	160	54.00	-15.67
38169.63	45.68	7.52	-12.01	41.19	Average	V	167	62	54.00	-12.81

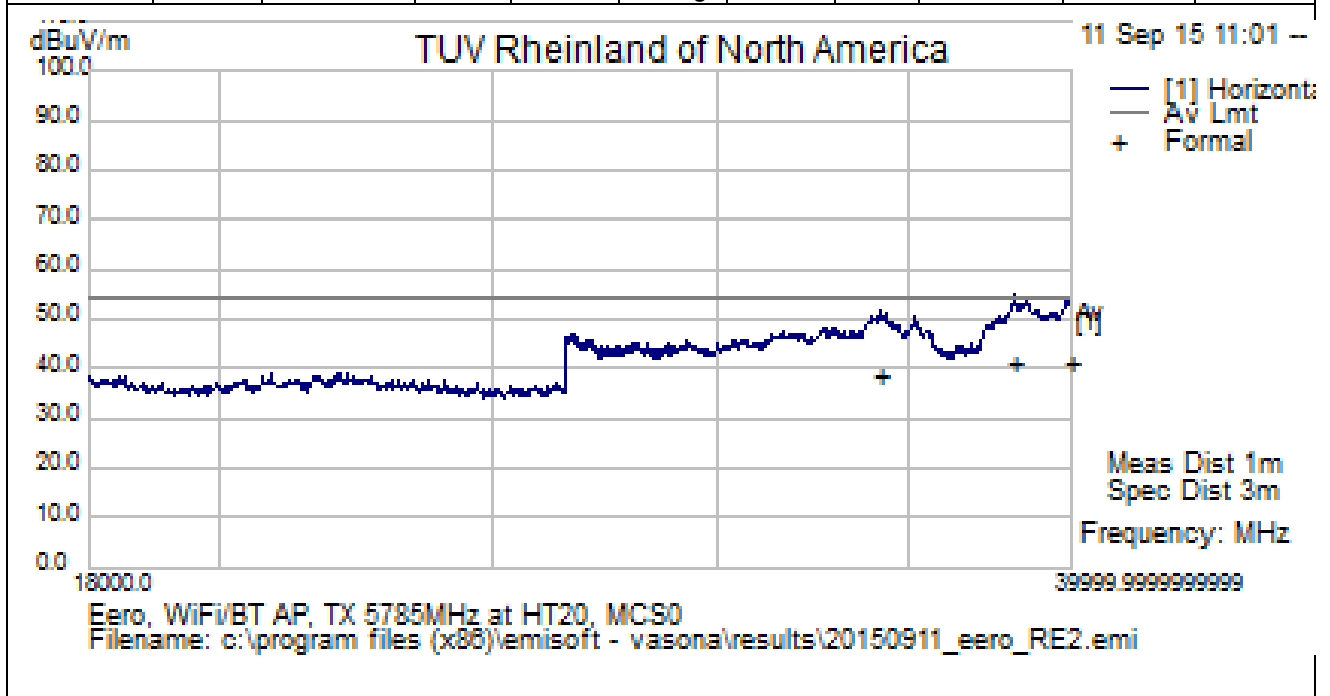

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty

Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

Note: 1. Worst case was observed on HT20 MCS0 mode.


2. Modes covered are 802.11a and VHT20.

3. To reduce complexity and bulkiness of the report Worst case Plots are placed in the report.

<b>SOP 1 Radiated Emissions</b>			Tracking # 31562808.001 Page 6 of 13		
<b>EUT Name</b>	Home Wi-Fi Router	<b>Date</b>	September 10, 2015		
<b>EUT Model</b>	A010001	<b>Temp / Hum in</b>	21° C / 34%rh		
<b>EUT Serial</b>	E58V-0034-H6W8-7MJX	<b>Temp / Hum out</b>	N/A		
<b>EUT Config.</b>	802.11n at HT20 MCS0 / chain 0 & 1	<b>Line AC / Freq</b>	120 Vac / 60 Hz		
<b>Standard</b>	CFR47 Part 15 Subpart E, RSS-247, RSS-GEN	<b>RBW / VBW</b>	1 MHz / 3 MHz		
<b>Dist/Ant Used</b>	3m – EMCO3115 / 1m – AHA-840	<b>Performed by</b>	Kerwinn Corpuz		

1 – 18 GHz Transmit at 5825 MHz (High Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB
17993.42	36.87	4.04	2.32	43.23	Average	H	219	174	54.00	-10.78
14734.22	38.82	3.38	-6.36	35.84	Average	V	153	340	54.00	-18.16

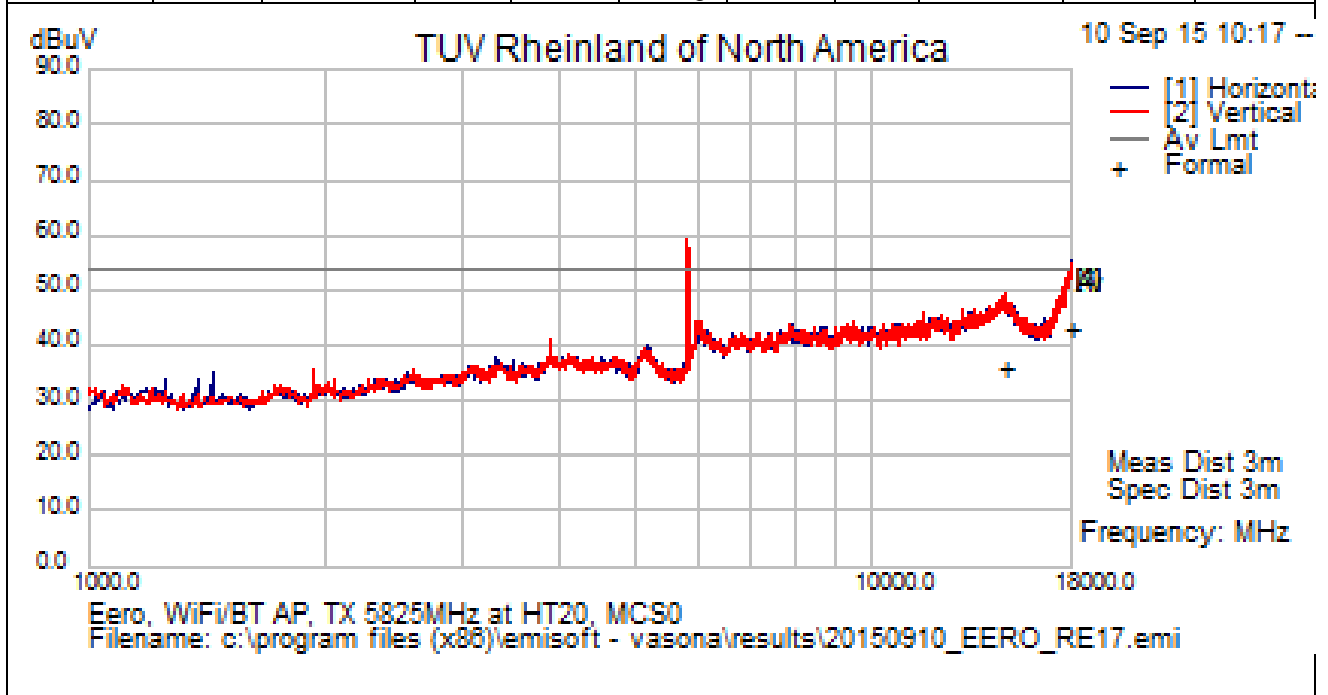

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty

Total CF= AF+ Cable Loss AF= Antenna factor + Preamp


- Note:
1. Worst case was observed on HT20 MCS0 mode.
  2. Modes covered are 802.11a and VHT20.
  3. To reduce complexity and bulkiness of the report Worst case Plots are placed in the report.
  4. Emission above the Spurious Limit is the Fundamental.



<b>SOP 1 Radiated Emissions</b>			Tracking # 31562808.001 Page 7 of 13		
<b>EUT Name</b>	Home Wi-Fi Router	<b>Date</b>	September 11, 2015		
<b>EUT Model</b>	A010001	<b>Temp / Hum in</b>	20° C / 37%rh		
<b>EUT Serial</b>	E58V-0034-H6W8-7MJX	<b>Temp / Hum out</b>	N/A		
<b>EUT Config.</b>	802.11n at HT20 MCS0 / chain 0 & 1	<b>Line AC / Freq</b>	120 Vac / 60 Hz		
<b>Standard</b>	CFR47 Part 15 Subpart E, RSS-247, RSS-GEN	<b>RBW / VBW</b>	1 MHz / 3 MHz		
<b>Dist/Ant Used</b>	3m – EMCO3115 / 1m – AHA-840	<b>Performed by</b>	Kerwinn Corpuz		

18 – 40 GHz Transmit at 5825 MHz (High Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB
34401.22	43.78	7.01	-12.44	38.35	Average	V	106	336	54.00	-15.65
39887.73	47.37	7.63	-13.53	41.47	Average	V	111	316	54.00	-12.53

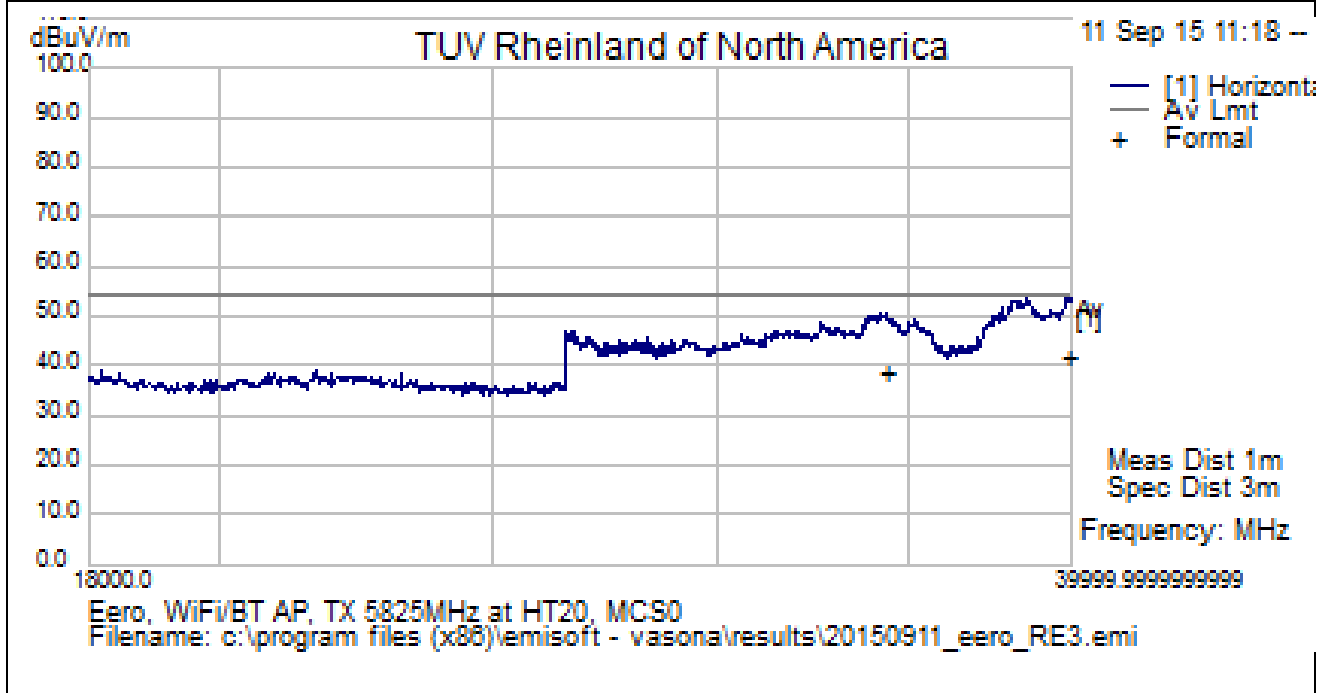

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty

Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

Note: 1. Worst case was observed on HT20 MCS0 mode.


2. Modes covered are 802.11a and VHT20.

3. To reduce complexity and bulkiness of the report Worst case Plots are placed in the report.

<b>SOP 1 Radiated Emissions</b>			Tracking # 31562808.001 Page 8 of 13		
<b>EUT Name</b>	Home Wi-Fi Router	<b>Date</b>	September 10, 2015		
<b>EUT Model</b>	A010001	<b>Temp / Hum in</b>	21° C / 34%rh		
<b>EUT Serial</b>	E58V-0034-H6W8-7MJX	<b>Temp / Hum out</b>	N/A		
<b>EUT Config.</b>	802.11n at HT40 MCS0 / chain 0 & 1	<b>Line AC / Freq</b>	120 Vac / 60 Hz		
<b>Standard</b>	CFR47 Part 15 Subpart E, RSS-247, RSS-GEN	<b>RBW / VBW</b>	1 MHz / 3 MHz		
<b>Dist/Ant Used</b>	3m – EMCO3115 / 1m – AHA-840	<b>Performed by</b>	Kerwinn Corpuz		

1 – 18 GHz Transmit at 5755 MHz (Low Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB
14696.98	38.77	3.41	-6.45	35.73	Average	H	134	196	54.00	-18.27
17999.06	37.07	4.05	2.46	43.58	Average	V	215	118	54.00	-10.42

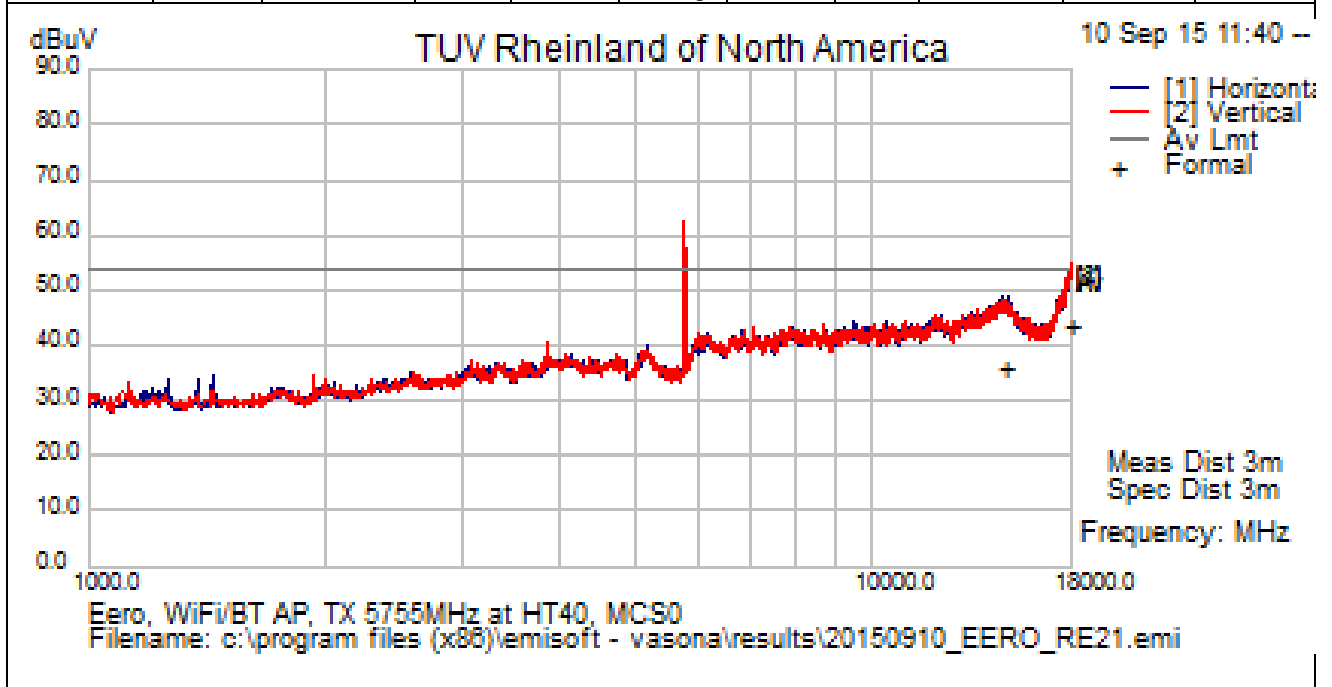

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty


Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

- Note: 1. Worst case was observed on HT40 MCS0 mode.  
 2. Mode covered is VHT40.  
 3. To reduce complexity and bulkiness of the report Worst case Plots are placed in the report.  
 4. Emission above the Spurious Limit is the Fundamental.

<b>SOP 1 Radiated Emissions</b>				Tracking # 31562808.001 Page 9 of 13			
<b>EUT Name</b>	Home Wi-Fi Router			<b>Date</b>	September 11, 2015		
<b>EUT Model</b>	A010001			<b>Temp / Hum in</b>	20° C / 37%rh		
<b>EUT Serial</b>	E58V-0034-H6W8-7MJX			<b>Temp / Hum out</b>	N/A		
<b>EUT Config.</b>	802.11n at HT40 MCS0 / chain 0 & 1			<b>Line AC / Freq</b>	120 Vac / 60 Hz		
<b>Standard</b>	CFR47 Part 15 Subpart E, RSS-247, RSS-GEN			<b>RBW / VBW</b>	1 MHz / 3 MHz		
<b>Dist/Ant Used</b>	3m – EMCO3115 / 1m – AHA-840			<b>Performed by</b>	Kerwinn Corpuz		

18 – 40 GHz Transmit at 5755 MHz (Low Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB
34314.32	44.04	7.00	-12.44	38.60	Average	V	166	238	54.00	-15.40
39846.49	47.56	7.65	-13.54	41.67	Average	V	131	278	54.00	-12.33

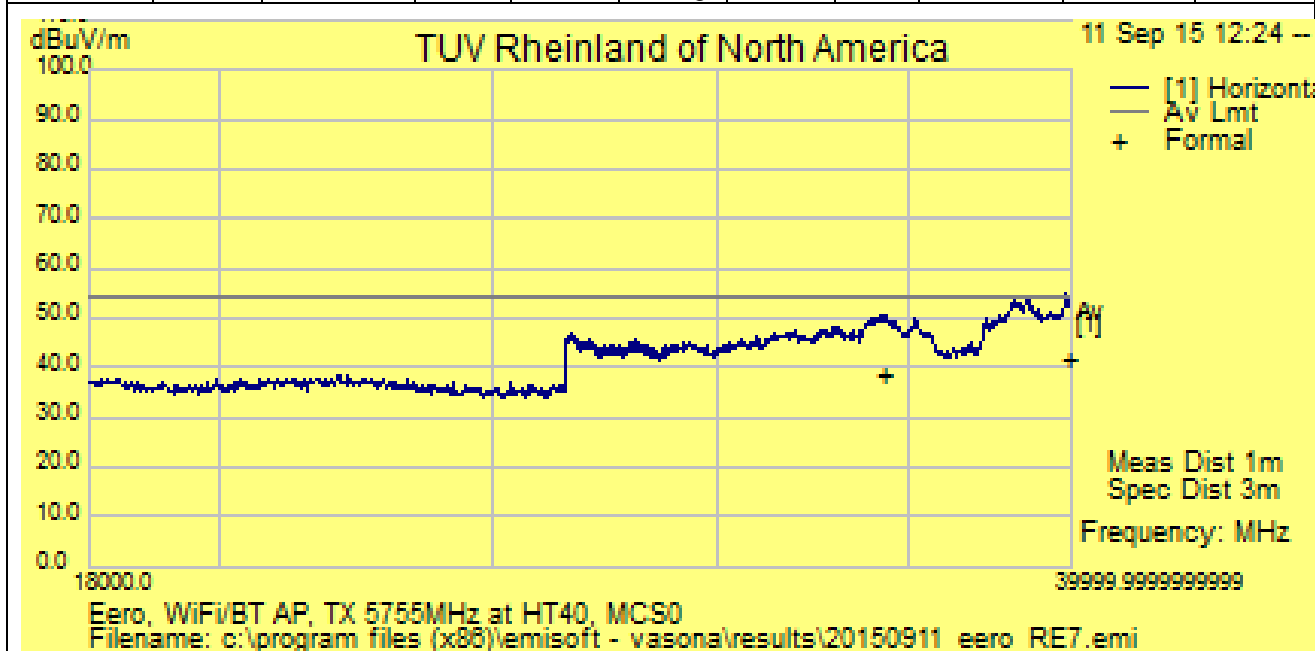

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty

Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

Note: 1. Worst case was observed on HT40 MCS0 mode.


2. Mode covered is VHT40.

3. To reduce complexity and bulkiness of the report Worst case Plots are placed in the report.

<b>SOP 1 Radiated Emissions</b>			Tracking # 31562808.001 Page 10 of 13		
<b>EUT Name</b>	Home Wi-Fi Router	<b>Date</b>	September 10, 2015		
<b>EUT Model</b>	A010001	<b>Temp / Hum in</b>	21° C / 34%rh		
<b>EUT Serial</b>	E58V-0034-H6W8-7MJX	<b>Temp / Hum out</b>	N/A		
<b>EUT Config.</b>	802.11n at HT40 MCS0 / chain 0 & 1	<b>Line AC / Freq</b>	120 Vac / 60 Hz		
<b>Standard</b>	CFR47 Part 15 Subpart E, RSS-247, RSS-GEN	<b>RBW / VBW</b>	1 MHz / 3 MHz		
<b>Dist/Ant Used</b>	3m – EMCO3115 / 1m – AHA-840	<b>Performed by</b>	Kerwinn Corpuz		

1 – 18 GHz Transmit at 5795 MHz (High Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB
14781.94	38.63	3.38	-6.45	35.57	Average	H	182	148	54.00	-18.43
18000.00	37.09	4.05	2.48	43.62	Average	H	132	326	54.00	-10.38

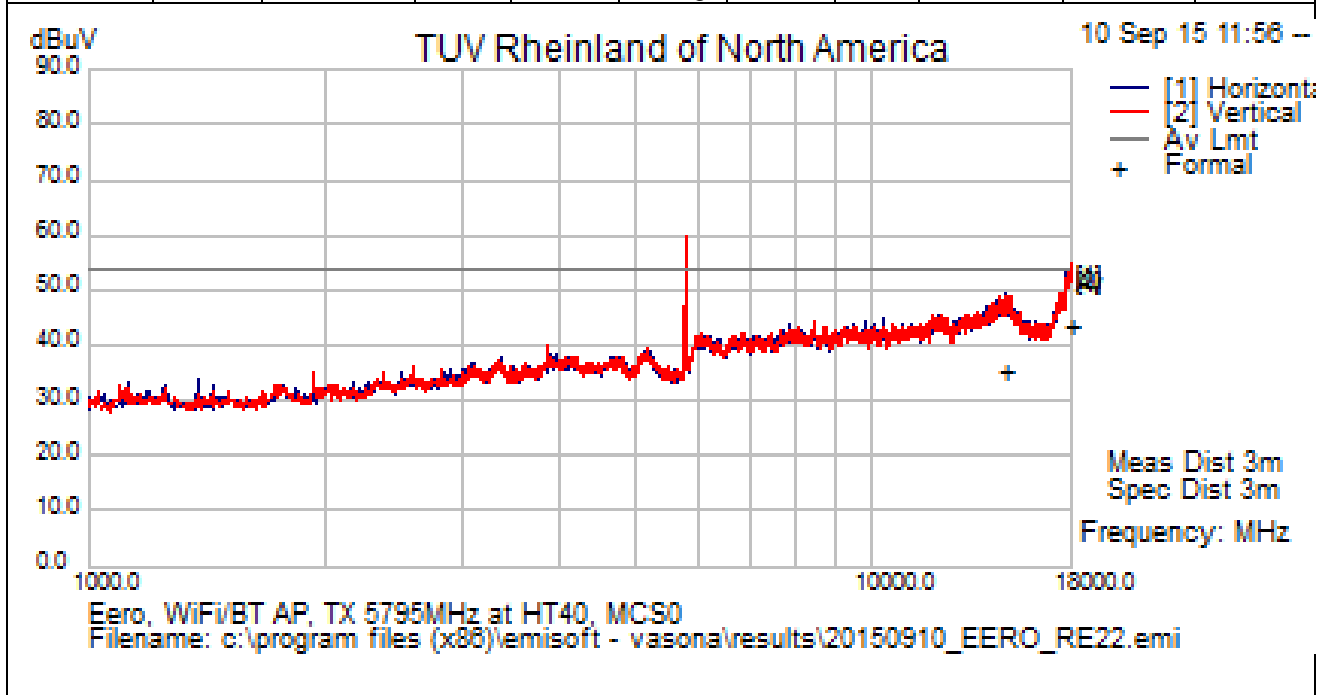

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty

Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

Note: 1. Worst case was observed on HT40 MCS0 mode.

2. Mode covered is VHT40.


3. To reduce complexity and bulkiness of the report Worst case Plots are placed in the report.

4. Emission above the Spurious Limit is the Fundamental.

<b>SOP 1 Radiated Emissions</b>			Tracking # 31562808.001 Page 11 of 13		
<b>EUT Name</b>	Home Wi-Fi Router	<b>Date</b>	September 11, 2015		
<b>EUT Model</b>	A010001	<b>Temp / Hum in</b>	20° C / 37%rh		
<b>EUT Serial</b>	E58V-0034-H6W8-7MJX	<b>Temp / Hum out</b>	N/A		
<b>EUT Config.</b>	802.11n at HT40 MCS0 / chain 0 & 1	<b>Line AC / Freq</b>	120 Vac / 60 Hz		
<b>Standard</b>	CFR47 Part 15 Subpart E, RSS-247, RSS-GEN	<b>RBW / VBW</b>	1 MHz / 3 MHz		
<b>Dist/Ant Used</b>	3m – EMCO3115 / 1m – AHA-840	<b>Performed by</b>	Kerwinn Corpuz		

18 – 40 GHz Transmit at 5795 MHz (High Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB
38569.16	46.03	7.55	-12.00	41.58	Average	H	162	32	54.00	-12.42
33981.88	43.43	6.94	-12.45	37.92	Average	V	111	126	54.00	-16.08

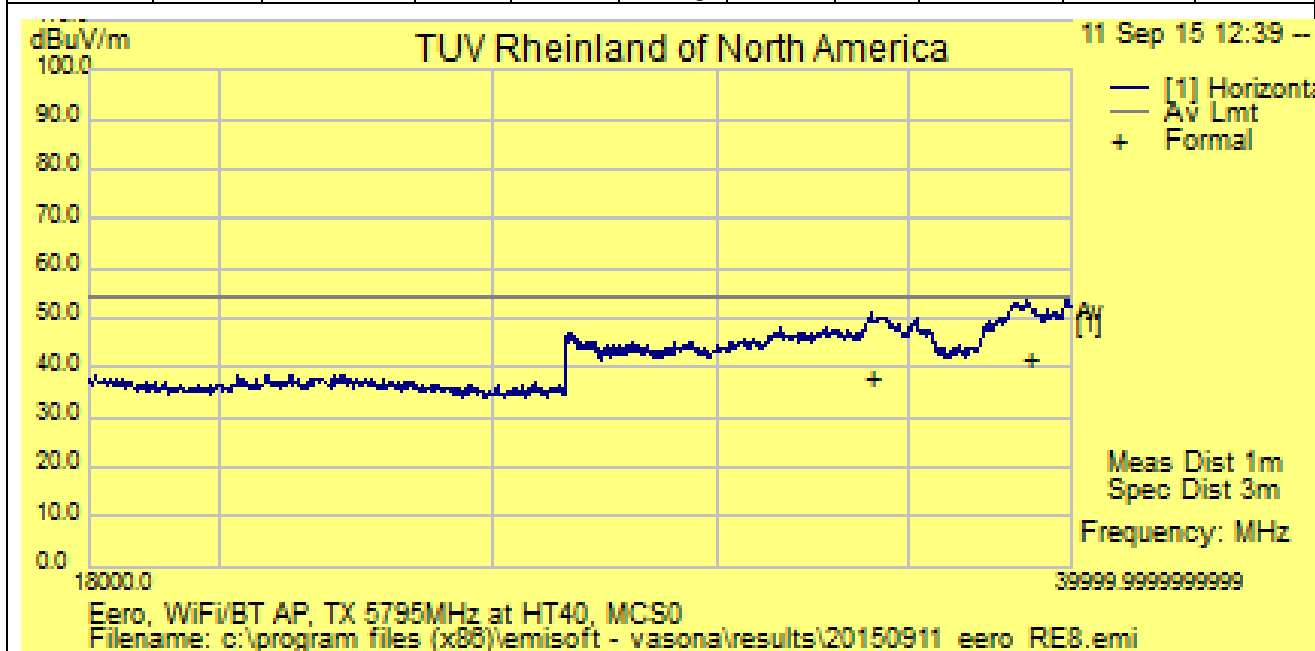

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty

Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

Note: 1. Worst case was observed on HT40 MCS0 mode.


2. Mode covered is VHT40.

3. To reduce complexity and bulkiness of the report Worst case Plots are placed in the report.

<b>SOP 1 Radiated Emissions</b>				Tracking # 31562808.001 Page 12 of 13			
<b>EUT Name</b>	Home Wi-Fi Router			<b>Date</b>	September 10, 2015		
<b>EUT Model</b>	A010001			<b>Temp / Hum in</b>	21° C / 34%rh		
<b>EUT Serial</b>	E58V-0034-H6W8-7MJX			<b>Temp / Hum out</b>	N/A		
<b>EUT Config.</b>	802.11ac at VHT80 MCS0 / chain 0 & 1			<b>Line AC / Freq</b>	120 Vac / 60 Hz		
<b>Standard</b>	CFR47 Part 15 Subpart E, RSS-247, RSS-GEN			<b>RBW / VBW</b>	1 MHz / 3 MHz		
<b>Dist/Ant Used</b>	3m – EMCO3115 / 1m – AHA-840			<b>Performed by</b>	Kerwinn Corpuz		

1 – 18 GHz Transmit at 5775 MHz (Center Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB
18000.00	37.02	4.05	2.48	43.55	Average	H	145	150	54.00	-10.45
14760.57	38.76	3.39	-6.39	35.76	Average	V	224	230	54.00	-18.24

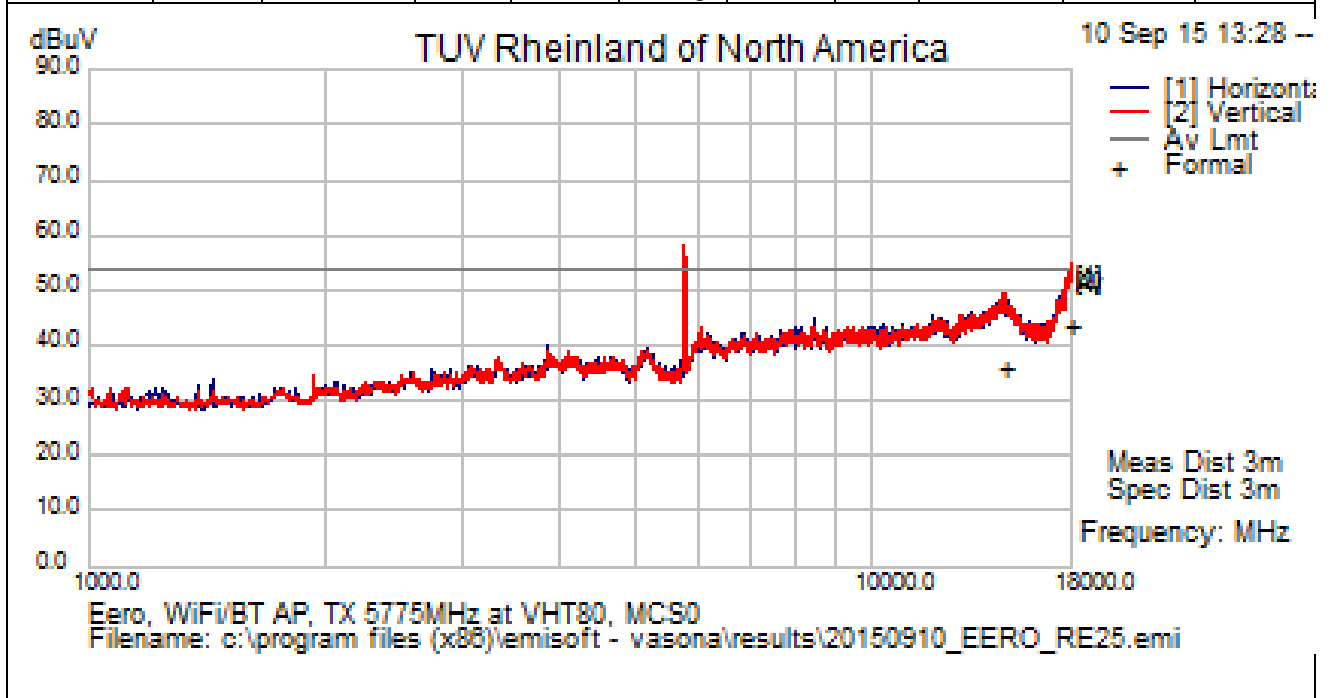

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty


Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

- Note:
1. Worst case was observed on VHT80 MCS0 mode.
  2. To reduce complexity and bulkiness of the report Worst case Plots are placed in the report.
  3. Emission above the Spurious Limit is the Fundamental.

<b>SOP 1 Radiated Emissions</b>				Tracking # 31562808.001 Page 13 of 13			
<b>EUT Name</b>	Home Wi-Fi Router			<b>Date</b>	September 11, 2015		
<b>EUT Model</b>	A010001			<b>Temp / Hum in</b>	20° C / 37%rh		
<b>EUT Serial</b>	E58V-0034-H6W8-7MJX			<b>Temp / Hum out</b>	N/A		
<b>EUT Config.</b>	802.11ac at VHT80 MCS0 / chain 0 & 1			<b>Line AC / Freq</b>	120 Vac / 60 Hz		
<b>Standard</b>	CFR47 Part 15 Subpart E, RSS-247, RSS-GEN			<b>RBW / VBW</b>	1 MHz / 3 MHz		
<b>Dist/Ant Used</b>	3m – EMCO3115 / 1m – AHA-840			<b>Performed by</b>	Kerwinn Corpuz		

18 – 40 GHz Transmit at 5775 MHz (Center Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB
34333.44	44.00	7.00	-12.44	38.57	Average	V	161	170	54.00	-15.43
38587.91	45.94	7.55	-12.04	41.45	Average	V	146	324	54.00	-12.55

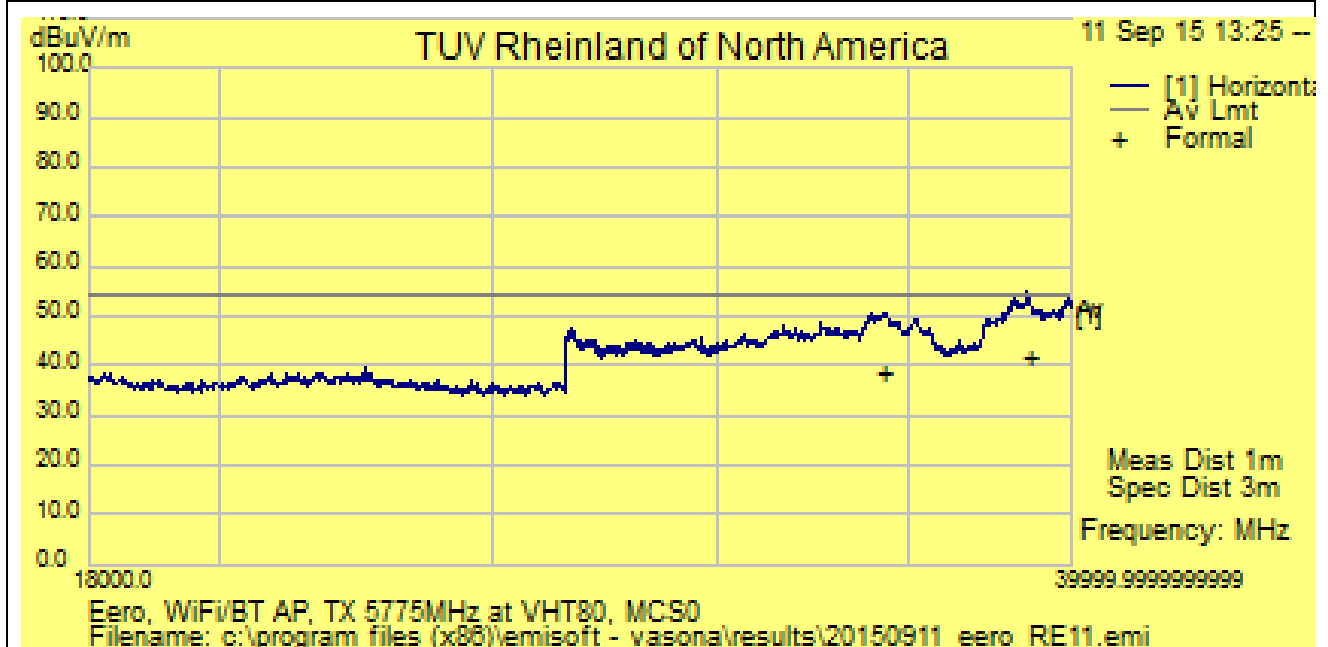

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty

Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

Note: 1. Worst case was observed on VHT80 MCS0 mode.

2. To reduce complexity and bulkiness of the report Worst case Plots are placed in the report.

## 4.6 AC Conducted Emissions

Testing was performed in accordance with ANSI C63.4: 2014. These test methods are listed under the laboratory's A2LA Scope of Accreditation.

This test measures the levels emanating from the EUT's AC input port, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

The AC conducted emissions of equipment under test shall not exceed the values in CFR47 Part 15.207: 2015 and RSS 247: 2015.

### 4.6.1 Test Methodology

A test program that controls instrumentation and data logging was used to automate the AC Power Line Conducted emission test procedure. The frequency range of interest was divided into sub-ranges such as to yield a frequency resolution of 9 kHz. Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a set of 50µH / 50Ω LISNs.

Testing is performed in Lab 5. The setup photographs clearly identify which site was used. The vertical ground plane used in the semi-anechoic chamber is a 2m x 2m solid aluminum frame and panel, and it is bonded to the horizontal ground plane.

In the case of tabletop equipment, the EUT is placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane and 40cm from a vertical ground reference plane. The rear of the EUT was positioned flush with the backside of the table and directly over the LISNs. The power and I/O cables were routed over the edge of the table and bundled approximately 40cm from the ground plane. Support equipment was powered from a separate LISN.

#### 4.6.1.1 Deviations

There were no deviations from this test methodology.

### 4.6.2 Test Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 15:** AC Conducted Emissions – Test Results

<b>Test Conditions:</b> Conducted Measurement at Normal Conditions only		
<b>Antenna Type:</b> Custom Integrated		<b>Power Level:</b> See Test Plan
<b>AC Power:</b> 120 Vac/60 Hz		<b>Configuration:</b> Tabletop
<b>Ambient Temperature:</b> 22° C		<b>Relative Humidity:</b> 37% RH
<b>Configuration</b>	<b>Frequency Range</b>	<b>Test Result</b>
Line 1 (Hot)	0.15 to 30 MHz	Pass
Line 2 (Neutral)	0.15 to 30 MHz	Pass




SOP 2 Conducted Emissions						Tracking # 31562808.001 Page 1 of 4			
<b>EUT Name</b>		Home Wi-Fi Router				<b>Date</b>		September 15, 2015	
<b>EUT Model</b>		A010001				<b>Temp / Hum in</b>		22° C / 37% rh	
<b>EUT Serial</b>		E58V-0034-H6W8-7MJX				<b>Temp / Hum out</b>		N/A	
<b>EUT Config.</b>		TX mode / chain 0 & 1				<b>Line AC / Freq</b>		120Vac/60Hz	
<b>Standard</b>		CFR47 Part 15.207 and RSS Gen				<b>RBW / VBW</b>		9 kHz / 30 kHz	
<b>Lab/LISN</b>		Lab #5 /Com-Power, Line 1				<b>Performed by</b>		Chris Byleckie	
Frequency	Raw	Limiter	Ins. Loss	Level	Detector	Line	Limit	Margin	Result
MHz	dBuV	dB	dB	dBuV		Line	dBuV	dB	
0.286	34.14	9.96	0.12	44.23	QP	Live	60.63	-16.40	Pass
0.286	29.45	9.96	0.12	39.53	Ave	Live	50.63	-11.10	Pass
0.380	38.32	9.96	0.09	48.37	QP	Live	58.27	-9.90	Pass
0.380	33.96	9.96	0.09	44.02	Ave	Live	48.27	-4.26	Pass
0.706	22.41	9.98	0.07	32.46	QP	Live	56.00	-23.54	Pass
0.706	11.13	9.98	0.07	21.18	Ave	Live	46.00	-24.82	Pass
0.751	22.05	9.98	0.07	32.10	QP	Live	56.00	-23.90	Pass
0.751	8.46	9.98	0.07	18.51	Ave	Live	46.00	-27.49	Pass
1.033	22.68	9.99	0.06	32.73	QP	Live	56.00	-23.27	Pass
1.033	10.87	9.99	0.06	20.93	Ave	Live	46.00	-25.07	Pass
1.310	22.74	10.00	0.06	32.80	QP	Live	56.00	-23.20	Pass
1.310	11.74	10.00	0.06	21.80	Ave	Live	46.00	-24.20	Pass
Spec Margin = QP./Ave. - Limit, ± Uncertainty									
Combined Standard Uncertainty $u_c(y) = \pm 1.2$ dB Expanded Uncertainty $U = k u_c(y)$ $k = 2$ for 95% confidence									
Notes: EUT was setup as table top equipment and transmitted at 5785 MHz in 802.11n at HT20 MCS0									

**SOP 2** Conducted Emissions

Tracking # 31562808.001 Page 2 of 4

<b>EUT Name</b>	Home Wi-Fi Router	<b>Date</b>	September 15, 2015
<b>EUT Model</b>	A010001	<b>Temp / Hum in</b>	22° C / 37% rh
<b>EUT Serial</b>	E58V-0034-H6W8-7MJX	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	TX mode / chain 0 & 1	<b>Line AC</b>	120Vac/60Hz
<b>Standard</b>	CFR47 Part 15.207 and RSS Gen	<b>RBW / VBW</b>	9 kHz / 30 kHz
<b>Lab/LISN</b>	Lab #5 /Com-Power, Line 1	<b>Performed by</b>	Chris Byleckie

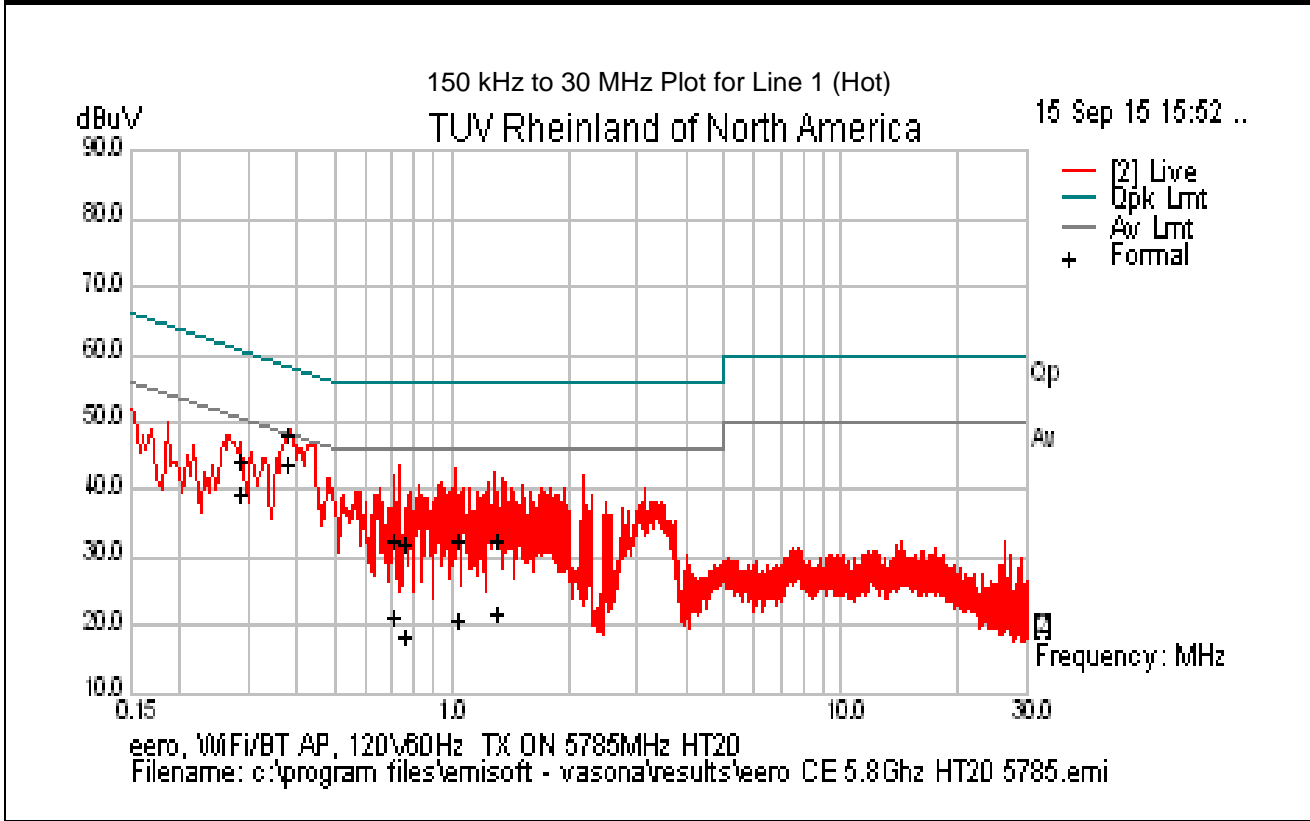


Note: Met FCC Class B limit.

SOP 2 Conducted Emissions						Tracking # 31562808.001 Page 3 of 4			
<b>EUT Name</b>		Home Wi-Fi Router				<b>Date</b>		September 15, 2015	
<b>EUT Model</b>		A010001				<b>Temp / Hum in</b>		22° C / 37% rh	
<b>EUT Serial</b>		E58V-0034-H6W8-7MJX				<b>Temp / Hum out</b>		N/A	
<b>EUT Config.</b>		TX mode / chain 0 & 1				<b>Line AC / Freq</b>		120Vac/60Hz	
<b>Standard</b>		CFR47 Part 15.207 and RSS Gen				<b>RBW / VBW</b>		9 kHz / 30 kHz	
<b>Lab/LISN</b>		Lab #5 /Com-Power, Line 2				<b>Performed by</b>		Chris Byleckie	
Frequency	Raw	Limiter	Ins. Loss	Level	Detector	Line	Limit	Margin	Result
MHz	dBuV	dB	dB	dBuV		Line	dBuV	dB	
0.179	34.47	9.95	0.19	44.61	QP	Neutral	64.54	-19.92	Pass
0.179	23.40	9.95	0.19	33.54	Ave	Neutral	54.54	-21.00	Pass
0.384	37.45	9.96	0.09	47.51	QP	Neutral	58.19	-10.68	Pass
0.384	32.84	9.96	0.09	42.90	Ave	Neutral	48.19	-5.29	Pass
0.401	29.51	9.96	0.09	39.56	QP	Neutral	57.83	-18.27	Pass
0.401	18.89	9.96	0.09	28.94	Ave	Neutral	47.83	-18.90	Pass
0.869	28.07	9.99	0.07	38.12	QP	Neutral	56.00	-17.88	Pass
0.869	20.37	9.99	0.07	30.42	Ave	Neutral	46.00	-15.58	Pass
0.915	27.50	9.99	0.07	37.56	QP	Neutral	56.00	-18.44	Pass
0.915	19.09	9.99	0.07	29.14	Ave	Neutral	46.00	-16.86	Pass
1.304	25.26	10.00	0.06	35.32	QP	Neutral	56.00	-20.68	Pass
1.304	17.08	10.00	0.06	27.14	Ave	Neutral	46.00	-18.86	Pass
Spec Margin = QP./Ave. - Limit, ± Uncertainty									
Combined Standard Uncertainty $u_c(y) = \pm 1.2$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence									
Notes: EUT was setup as table top equipment and transmitted at 5785 MHz in 802.11n at HT20 MCS0									

**SOP 2** Conducted Emissions

Tracking # 31562808.001 Page 4 of 4

<b>EUT Name</b>	Home Wi-Fi Router	<b>Date</b>	September 15, 2015
<b>EUT Model</b>	A010001	<b>Temp / Hum in</b>	22° C / 37% rh
<b>EUT Serial</b>	E58V-0034-H6W8-7MJX	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	TX mode / chain 0 & 1	<b>Line AC</b>	120Vac/60Hz
<b>Standard</b>	CFR47 Part 15.207 and RSS Gen	<b>RBW / VBW</b>	9 kHz / 30 kHz
<b>Lab/LISN</b>	Lab #5 /Com-Power, Line 2	<b>Performed by</b>	Chris Byleckie

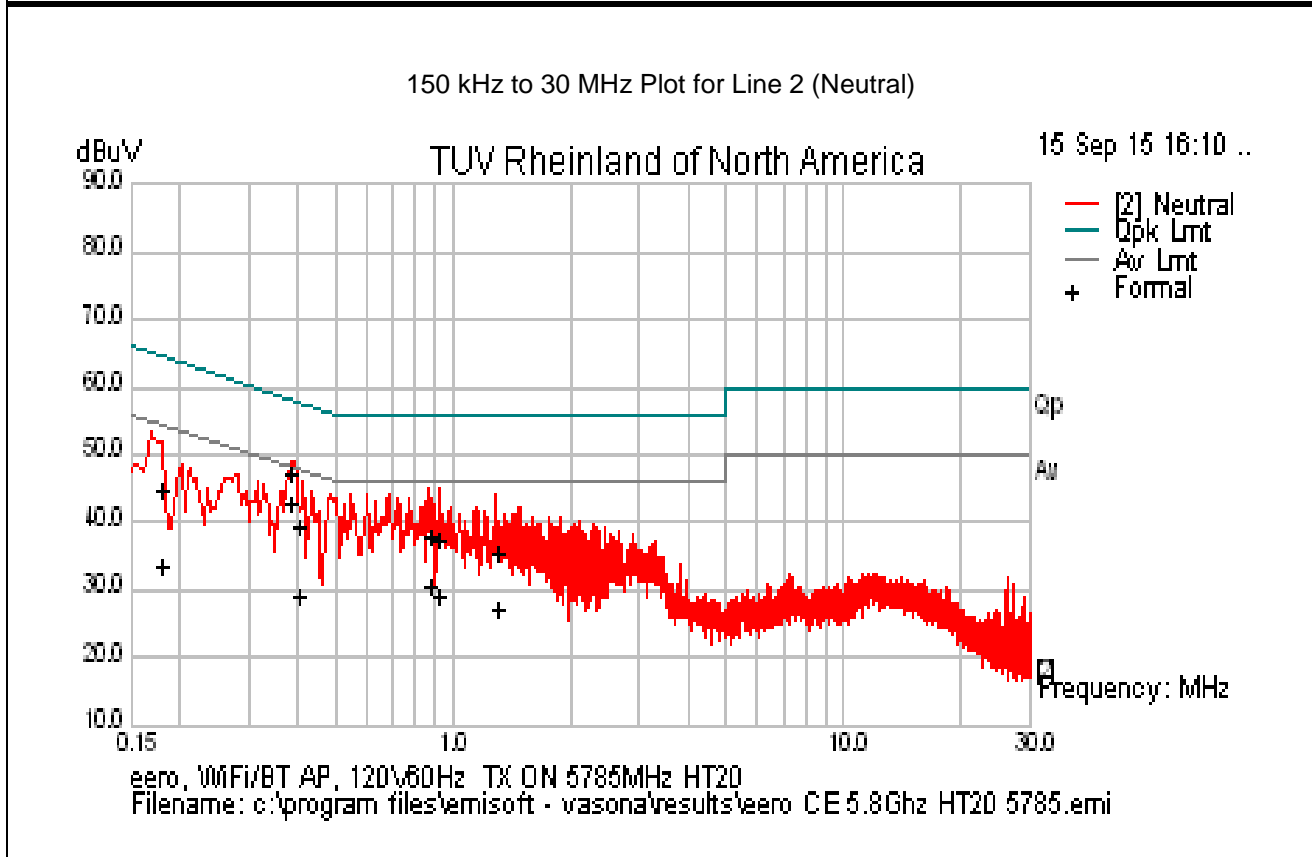

Note: Met FCC Class B Limit.

---

## **4.7 Frequency Stability**

In accordance with 47 CFR Part 15.407(g) the frequency stability of U-NII devices must be such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual. The Manufacturer calls out operating temperature ranges of +0° to +35° C

### **4.7.1 Test Methodology**

The manufacturer of the equipment is responsible for ensuring that the frequency stability is such that emissions are always maintained within the band of operation under all conditions. This test performs according to ANSI C63.10-2013 Section 6.8

### **4.7.2 Manufacturer Declaration**

The frequency stability of the reference oscillator sets the frequency stability of the RF transceiver signals. Therefore all of the RF signal should have  $\pm 20$  ppm stability.

This stability accounts for room temp tolerance of the crystal oscillator circuit, frequency variation across temperature, and crystal ageing.

Worst case:

5.800 GHz-  $\pm 20$  ppm/116 kHz

$\pm 20$  ppm at 5.8 GHz translates to a maximum frequency shift of  $\pm 116$  kHz. As the edge of the channels are at least one MHz from either of the band edges,  $\pm 103$  kHz is more than sufficient to guarantee that the intentional emission will remain in the band over the entire operating range of the radio.

### 4.7.3 Limit

CFR47 Part 407(g) - Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### 4.7.4 Test results:

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s) since the maximum frequency drift was -12.96 ppm.

**Table 16:** Frequency Stability – Test Results

Temperature	Time	PPM
0° C	Start	-3.63
	2 Min.	-2.59
	5 Min	4.84
	10 min	2.94
10° C	Start	-2.94
	2 Min.	-8.12
	5 Min	3.28
	10 min	-6.22
20° C	Start	-3.80
	2 Min.	-2.94
	5 Min	1.04
	10 min	-8.99
30° C	Start	-6.39
	2 Min.	-1.90
	5 Min	-3.28
	10 min	-2.94
40° C	Start	-7.78
	2 Min.	-11.06
	5 Min	-12.96
	10 min	-9.33
50° C	Start	-0.35
	2 Min.	-3.80
	5 Min	-11.58
	10 min	-11.06

**Note:** All frequency drifts were less than  $\pm 20$  ppm. The worst frequency drift was -12.96 ppm

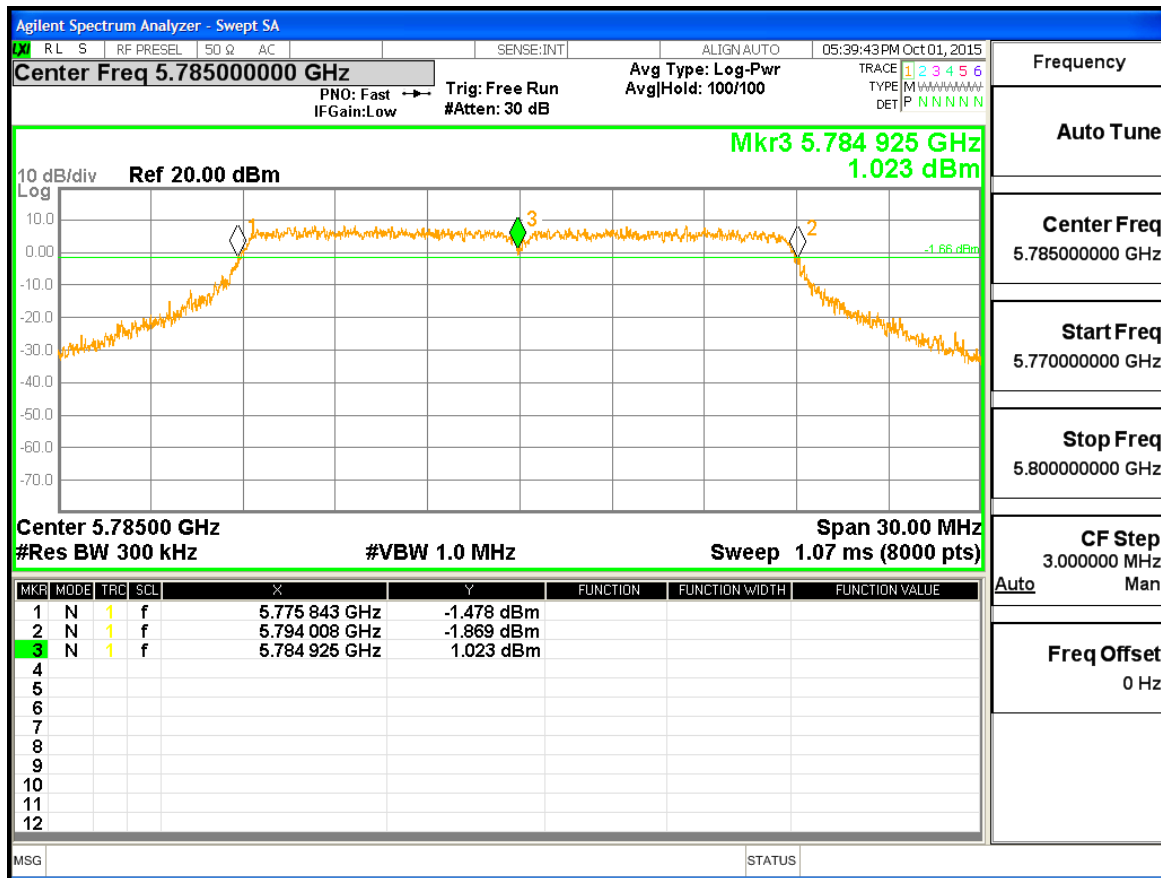


Figure 129: Frequency Stability – Worst Case

## 4.8 Voltage Variation

In accordance with 47 CFR Part 15.31 (e) intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 4.8.1 Test Methodology

The ac supply voltage was varied between 85% and 115% of the nominal rated supply voltage. The fundamental frequency was observed during the variation. The access point was powered 120 Vac / 60 Hz by programmable power supply. The voltage was varied from 102 Vac to 138 Vac mean while the fundamental frequencies were observed and record for the maximum drift in ppm; part per millions.

### 4.8.2 Test results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s). The fundamental frequencies drifted less than  $\pm 20$  ppm.

**Table 17:** Voltage Variation – Test Results

Frequency MHz	Nominal (120Vac) MHz	Lo Voltage (102Vac) MHz	Hi Voltage (138Vac) MHz	Max Drift ppm
5785	-0.005	-0.097	-0.03	-15.903



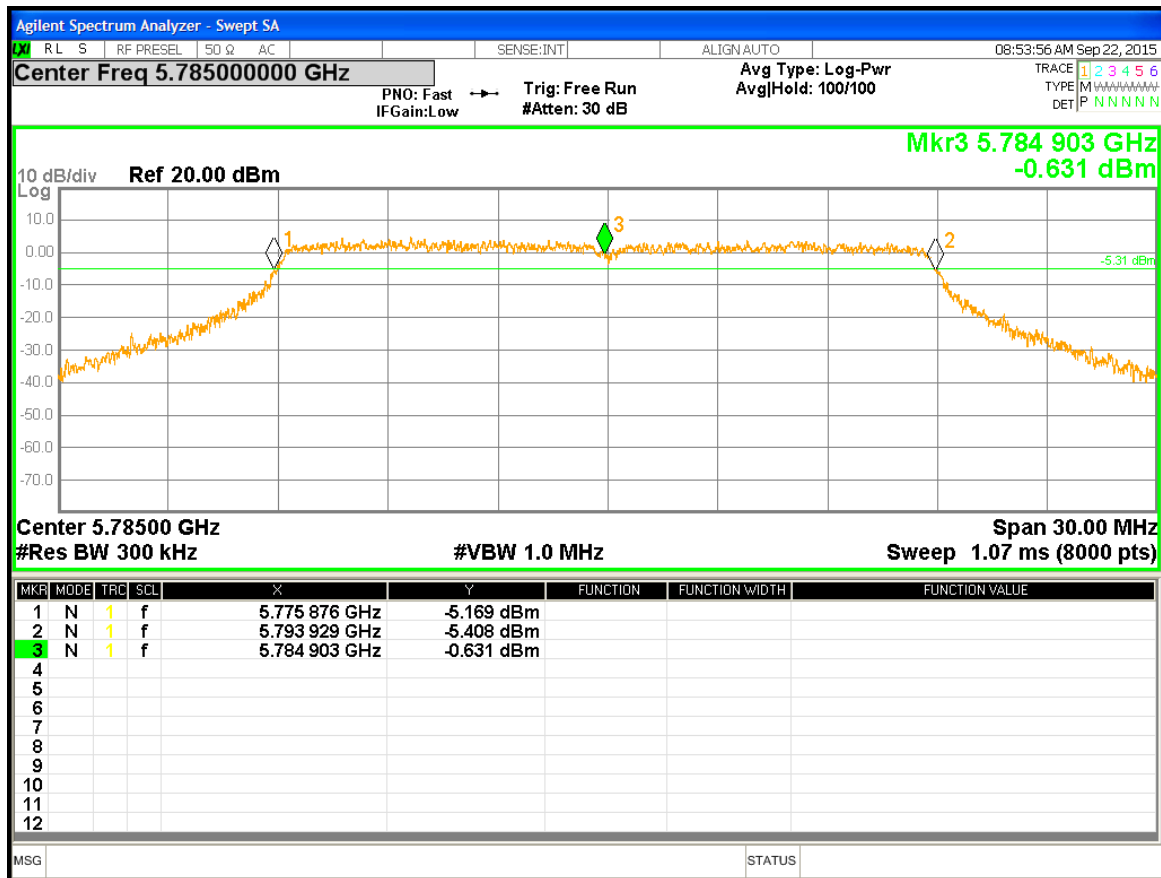


Figure 130: Voltage Variation – Worst Case

## 4.9 Maximum Permissible Exposure

### 4.9.1 Test Methodology

In this document, we try to prove the safety of radiation harmfulness to the human body for our product. The limit for Maximum Permissible Exposure (MPE) specified in FCC 1.1310 is followed. The Gain of the antenna used in this calculation is declared by the manufacturer, and the maximum total power input to the antenna is measured. Through the Friis transmission formula and the maximum gain of the antenna, we can calculate the distance, away from the product, where the limit of MPE is reached.

Although the Friis transmission formula is a far field assumption, the calculated result of that is an over-prediction for near field power density. We will take that as the worst case to specify the safety range.

### 4.9.2 RF Exposure Limit

According to FCC 1.1310 table 1: The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b)

#### LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (minutes)
<b>(A)Limits For Occupational / Control Exposures</b>				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300	...	...	1.0	6
300 - 1500	...	...	f/300	6
1500 - 100,000	...	...	5	6
<b>(B)Limits For General Population / Uncontrolled Exposure</b>				
0.3–1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/ f <sup>2</sup> )	30
30–300	27.5	0.037	0.2	30
300 - 1500	...	...	f/1500	30
1500 - 100,000	...	...	1.0	30

F = Frequency in MHz

\* = Plane-wave equivalent power density

### 4.9.3 EUT Operating Condition

The software provided by Manufacturer enabled the EUT to transmit data at lowest, middle and highest channel individually.

### 4.9.4 Classification

The antenna of the product, under normal use condition, is at least 20cm away from the body of the user. Warning statement to the user for keeping at least 20cm or more separation distance with the antenna should be included in user's manual. So, this device is classified as a **Mobile Device**.

See below calculation for 5.8 GHz, worse case, RF Exposure at a distance of 20cm.

### 4.9.5 Test Results

#### 4.9.5.1 Antenna Gain

The 5.8 GHz transmitting maximum antenna gain is +2.24 dBi or 1.68 (numeric).

#### 4.9.5.2 Output Power into Antenna & RF Exposure value at distance 20cm:

Calculations for this report are based on highest power measurement.

Limit for MPE (from FCC part 1.1310 table1) is 1.0 mW/cm<sup>2</sup>

The highest measured total power is +25.61 dBm or 363.56 mW (summed 2 chains)

Using the Friss transmission formula, the EIRP is Pout\*G, and R is 20cm.

$P_d = (363.56 * 1.68) / (1600\pi) = 0.1215 \text{ mW/cm}^2$ , which is 0.878mW/cm<sup>2</sup> (0.0878W/m<sup>2</sup>) below to the limit.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

### 4.9.6 Sample Calculation

The Friss transmission formula:  $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where;

$P_d$  = power density in mW/cm<sup>2</sup>

$P_{out}$  = output power to antenna in mW

$G$  = gain of antenna in linear scale

$\pi \approx 3.1416$

$R$  = distance between observation point and center of the radiator

in cm

Ref. : David K. Cheng, *Field and Wave Electromagnetics*, Second Edition, Page 640, Eq. (11-133).

## 5 Test Equipment List

### 5.1 Equipment List

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal mm/dd/yyyy	Next Cal mm/dd/yyyy
Bilog Antenna	Sunol Sciences	JB3	A102606	07/08/2014	07/08/2016
Horn Antenna	Sunol Sciences	DRH-118	A040806	02/10/2015	02/10/2016
Antenna (18-40 GHz)	Com-Power	AHA-840	105005	07/08/2015	07/08/2016
Spectrum Analyzer	Rohde & Schwarz	FSL6	100169	01/13/2015	01/13/2016
Spectrum Analyzer	Agilent	N9038A	MY51210195	01/12/2015	01/12/2016
Spectrum Analyzer	Agilent	N9030A	MY51380689	01/19/2015	01/19/2016
Spectrum Analyzer	Rohde Schwarz	ESIB	832427/002	01/13/2015	01/13/2016
Spectrum Analyzer	Rohde Schwarz	FSV40	1321.3008K40	11/01/2015	11/01/2016
Amplifier	Sonoma Instruments	310	213221	09/30/2014	09/30/2015
Amplifier	Miteq	TTA1800-30-4G	1842452	01/13/2015	01/13/2016
Amplifier	Rohde & Schwarz	TS-PR26	100011	07/24/2015	07/24/2016
Amplifier	Rohde & Schwarz	TS-PR40	100012	02/21/2015	02/21/2016
Power Meter	Agilent	E4418B	MY45103902	01/15/2015	01/15/2016
Power Sensor	Hewlett Packard	8482A	US37295801	01/15/2015	01/15/2016
Thermometer	Fluke	52II	96480032	07/15/2015	07/15/2016
Thermo Chamber	Espec	BTZ-133	0613436	03/16/2015	03/16/2016
DC Power Supply	Agilent	E3634A	MY400004331	01/12/2015	01/12/2016
Notch Filter	Micro-Tronics	BRM50716	003	01/30/2015	01/30/2016
Signal Generator	Anritsu	MG3694A	42803	01/13/2015	01/13/2016
Signal Generator	Rohde & Schwarz	SMF100A	1167.0000K02	10/14/2014	10/14/2015
Signal Generator	Rohde & Schwarz	SMBV100A	1407.6004K02	12/04/2014	12/04/2015
Power Sensors	Rohde & Schwarz	OSP120	1520.9010.02	12/19/2014	12/14/2015

\* Calibration of equipment past due for re-calibration will be performed expeditiously. If any equipment is found to be out of tolerance at that time, affected customers will be notified accordingly.

---

## 6 EMC Test Plan

### 6.1 Introduction

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

### 6.2 Customer

**Table 18:** Customer Information

<b>Company Name</b>	eero inc
<b>Address</b>	933 20th Street
<b>City, State, Zip</b>	San Francisco, CA 94107
<b>Country</b>	USA
<b>Phone</b>	(415) 738-7972
<b>Fax</b>	

**Table 19:** Technical Contact Information

<b>Name</b>	Clifford Clarke
<b>E-mail</b>	compliance@eero.com
<b>Phone</b>	(415) 738-7972
<b>Fax</b>	

### 6.3 Equipment Under Test (EUT)

**Table 20:** EUT Specifications

<b>EUT Specifications</b>	
Dimensions	W: 4.75in (121mm) x D: 4.75in (121mm) x H: 0.85-1.26in (22-33mm)
AC Input	100-240V AC, 50 – 60 Hz
Environment	Indoor
Operating Temperature Range:	0 to 35 degrees C
Multiple Feeds:	<input type="checkbox"/> Yes and how many <input checked="" type="checkbox"/> No
Hardware Version	01A
Part Number	830-00001-14
RF Software Version	v1.0.0
802.11-radio modules	
Operating Mode	802.11a, 802.11n (HT20, HT40), 802.11ac (VHT20, VHT40, VHT80)
Transmitter Frequency Band	5.725 GHz – 5.850 GHz, U-NII-3 band
Max. Rated Power Output	See Channel Planning Table.
Power Setting @ Operating Channel	See Channel Planning Table.
Antenna Type	Qty 7 – 2 custom antennas at 5.8GHz. See Table 13 for details
Antenna Gain	Antenna 7 = -1.01 dBi, Antenna 8 = +2.24 dBi
Modulation Type	<input type="checkbox"/> AM <input type="checkbox"/> FM <input checked="" type="checkbox"/> DSSS <input checked="" type="checkbox"/> OFDM <input type="checkbox"/> Other describe: 16QAM and 64 QAM
Data Rate	802.11a: 2 Spatial Streams: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n/ac HT20/VHT20: 2 Spatial Streams: 13, 26, 39, 52, 78, 104, 117, 130 /156 Mbps (LGI) 802.11n/ac HT40/VHT40: 2 Spatial Streams: 27, 54, 81, 108, 162, 216, 243, 270 / 324, 370 Mbps (LGI) 802.11ac VHT 80: 2 Spatial Streams: 58.5, 117, 175.5, 234, 351, 468, 526.5, 585, 702, 780 Mbps (LGI)
TX/RX Chain (s)	MIMO (2x2); no beam forming
Directional Gain Type	<input checked="" type="checkbox"/> Correlated <input type="checkbox"/> Beam-Forming <input type="checkbox"/> Other describe:

<b>EUT Specifications</b>	
Type of Equipment	<input checked="" type="checkbox"/> Table Top <input checked="" type="checkbox"/> Wall-mount <input type="checkbox"/> Floor standing cabinet <input type="checkbox"/> Other:
<b>Note:</b> All 2 chains will be on / transmitted at all time.	

**Table 21:** Antenna Information

Number	Antenna Type	Description	Max Gain (dBi)
Antenna 1	Stamped metal Planar Inverted F antenna(PIFA)	2.4 GHz Wi-Fi Chain 2	1.50
Antenna 2	Stamped metal PIFA	2.4 GHz Wi-Fi Chain 1	-0.75
Antenna 3	Stamped metal PIFA	Bluetooth	2.51
Antenna 5	Monopole	5 GHz Wi-Fi U-NII-1 Band, Chain 1	1.11
Antenna 6	Monopole	5 GHz Wi-Fi U-NII-1 Band, Chain 2	2.13
Antenna 7	Monopole	5 GHz Wi-Fi U-NII-3 Band, Chain 1	-1.01
Antenna 8	Monopole	5 GHz Wi-Fi U-NII-3 Band, Chain 2	2.24

**Table 22:** EUT Channel Power Specifications

**Max Power for single Chain**

No.	Frequency (MHz)	Target Power Value dBm					
		802.11a	802.11n HT20	802.11ac VHT20	802.11n HT40	802.11ac VHT40	802.11ac VHT80
149	5745	20.30	20.17	19.37			
151	5755				17.69	17.73	
153	5765						
155	5775						16.49
157	5785	22.66	22.42	22.51			
159	5795				17.01	17.05	
161	5805						
165	5825	19.27	19.04	18.58			

**Note:** 1. The adjusted power target values are updated at the evaluated frequencies.  
 2. TP setting = 20 for all Low and High channels. TP setting = 25 for 11a, HT20 and VHT20 on Mid channel.



**Table 23:** Interface Specifications

Interface Type	Cabled with what type of cable?	Is the cable shielded?	Maximum potential length of the cable?	Metallic (M), Coax (C), Fiber (F), or Not Applicable?
Ethernet	RJ45	<input checked="" type="checkbox"/> No	<input checked="" type="checkbox"/> Metric: 2 m	<input type="checkbox"/> N/A

**Table 24:** Supported Equipment

Equipment	Manufacturer	Model	Serial	Used for
Laptop	Dell	Latitude	35521341769	Setup EUT operating channel
<b>Note:</b> None.				

**Table 25:** Description of Sample used for Testing

Device	Serial	RF Connection	CFR47 Part 15.407
Access Point	E58V-0034-H6W8-7MJX	Custom Integrated Antenna	TX Emission, AC Conducted Emission
		Direct Connection	Peak Transmit Power, Peak Power Spectral Density, Occupied Bandwidth Band-Edge Out-of-Band Emission

**Table 26:** Description of Test Configuration used for Radiated Measurement.

Device	Antenna	Mode	Setup Photo (X-Axis)	Setup Photo (Y-Axis)	Setup Photo (Z-Axis)
Access Point	Custom Integrated	Transmit	EUT laid flat.	N/A	N/A
<b>Note:</b> N/A.					

---

## 6.4 Test Specifications

Testing requirements

**Table 27:** Test Specifications

<b>Emissions and Immunity</b>	
<b>Standard</b>	<b>Requirement</b>
CFR 47 Part 15.407: 2015	All
RSS 247 Issue 1, 2015	All

**END OF REPORT**