

EMC

TEST REPORT

Report No.: 160400470TWN-001

Model No.: CS01A

Issued Date: Jun. 13, 2016

Applicant: Cocoon Labs Ltd.
46 The Calls, Leeds, West Yorkshire, LS27EY
United Kingdom

Test Method/ Standard: 47 CFR FCC Part 15.247 & ANSI C63.10 2013
KDB 558074 D01 v03r05
KDB 662911 D01 v02r01

Registration No.: 93910

Test By: Intertek Testing Services Taiwan Ltd.
No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li,
Shiang-Shan District, Hsinchu City, Taiwan


It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Intertek Laboratory. The test result(s) in this report only applies to the tested sample(s).

The test report was prepared by:


Sunny Liu/ Senior Officer



These measurements were taken by:


Wayne Chen/ Engineer

The test report was reviewed by:

Name Jimmy Yang
Title Senior Engineer



Revision History

Report No.	Issue Date	Revision Summary
160400470TWN-001	Jun. 13, 2016	Original report

Table of Contents

1. Summary of Test Data.....	5
2. General Information.....	6
2.1 Identification of the EUT	6
2.2 Adapter information	6
2.3 Description of EUT.....	7
2.4 Antenna description	7
2.5 Operation mode.....	8
2.6 Peripherals equipment.....	8
2.7 Applied test modes and channels	9
2.8 Duty Cycle	10
3. Minimum 6 dB Bandwidth	12
3.1 Operating environment	12
3.2 Limit for minimum 6dB bandwidth.....	12
3.3 Measuring instrument setting.....	12
3.4 Test procedure	12
3.5 Test diagram.....	13
3.6 Test results.....	13
4. Maximum Peak Conducted Output Power	19
4.1 Operating environment	19
4.2 Limit for maximum peak conducted output power.....	19
4.3 Measuring instrument setting.....	19
4.4 Test procedure	19
4.5 Test diagram.....	19
4.6 Test result	20
5. Power Spectral Density	21
5.1 Operating environment	21
5.2 Limit for power spectrum density.....	21
5.3 Measuring instrument setting.....	21
5.4 Test procedure	22
5.5 Test diagram.....	22
5.6 Test results.....	22
6. Emissions In Non-Restricted Frequency Bands	28
6.1 Operating environment	28

- 6.2 Limit for emissions in non-restricted frequency bands..... 28
- 6.3 Measuring instruments setting 28
- 6.4 Test procedure 29
- 6.5 Test diagram..... 29
- 6.6 Test results..... 30
- 7. Emissions In Restricted Frequency Bands (Radiated emission measurements)..... 39
 - 7.1 Operating environment 39
 - 7.2 Limit for emission in restricted frequency bands (Radiated emission measurement) 39
 - 7.3 Measuring instrument setting..... 40
 - 7.4 Test procedure 41
 - 7.5 Test configuration 42
 - 7.5.1 Radiated emission from 9kHz to 30MHz uses Loop Antenna:..... 42
 - 7.5.2 Radiated emission below 1GHz using Bilog Antenna..... 43
 - 7.5.3 Radiated emission above 1GHz using Horn Antenna..... 43
 - 7.6 Test result 44
 - 7.6.1 Measurement results: frequencies 9kHz to 30MHz..... 44
 - 7.6.2 Measurement results: frequencies below 1 GHz 45
 - 7.6.3 Measurement results: frequency above 1GHz to 25GHz 46
- 8. Emission On Band Edge 49
 - 8.1 Operating environment 49
 - 8.2 Measuring instrument setting..... 49
 - 8.3 Test procedure 49
 - 8.4 Test results..... 50
- 9. AC Power Line Conducted Emission 54
 - 9.1 Operating environment 54
 - 9.2 Limit for AC power line conducted emission 54
 - 9.3 Measuring instrument setting..... 54
 - 9.4 Test procedure 55
 - 9.5 Test diagram 55
 - 9.6 Test results..... 56
- Appendix A: Test equipment list..... 58
- Appendix B: Measurement Uncertainty 60

1. Summary of Test Data

Test Requirement	Applicable Rule (Section 15.247)	Result
Minimum 6 dB Bandwidth	15.247(a)(2)	Pass
Maximum Peak Conducted Output Power	15.247(b)(3)	Pass
Power Spectral Density	15.247(e)	Pass
Emissions In Non-Restricted Frequency Bands	15.247(d)	Pass
Emissions In Restricted Frequency Bands (Radiated emission measurements)	15.247(d), 15.205, 15.209	Pass
Emission On The Band Edge	15.247(d), 15.205	Pass
AC Power Line Conducted Emission	15.207	Pass
Antenna Requirement	15.203	Pass

2. General Information

2.1 Identification of the EUT

Product:	Cocoon
Model No:	CS01A
Operating Frequency:	2412 MHz ~ 2462 MHz for 802.11b, 802.11g, 802.11n HT20
Channel Number:	11 channels for 2412 MHz ~ 2462 MHz
Frequency of Each Channel:	2412+5 k, k=0 ~ 10 for 802.11b, 802.11g, 802.11n HT20
Access scheme:	DSSS, OFDM
Rated Power:	DC 5 V from adapter
Power Cord:	N/A
Sample Received:	Apr. 27, 2016
Sample condition:	Workable
Test Date(s):	Jun. 01, 2016 ~ Jun. 06, 2016
Note 1:	This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
Note 2:	When determining the test conclusion, the Measurement Uncertainty of test has been considered.

2.2 Adapter information

The EUT will be supplied with a power supply from below list:

No.	Model no.	Specification
Adapter 1	KSA29B0500210D5	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: DC 5 V, 2.1 A

2.3 Description of EUT

The EUT is a Cocoon, and was defined as information technology equipment.

Product SW version :	0.2.515
Product HW version :	CS01A
Radio SW version :	6.2.4
Radio HW version :	apm6988
Test SW Version :	7.4.1.17

For more detail features, please refer to user's Manual.

2.4 Antenna description

The EUT uses a permanently connected antenna.

Antenna Gain:	2 dBi
Antenna Type:	Chip Antenna
Connector Type:	Fixed

2.5 Operation mode

The EUT is supplied with DC 5 V from adapter (Test voltage: 120Vac, 60Hz).

TX-MODE is based on “Specific commands” and the program can set different frequency and modulation.

With individual verifying, the maximum output power were found out 1 Mbps data rate for 802.11b mode, 6 Mbps data rate for 802.11g mode, and 6.5 Mbps data rate for 802.11n(HT20) mode , the final tests were executed under these conditions recorded in this report individually.

802.11b ch6 chain0		802.11g ch6 chain0		802.11n HT20 ch6 chain0	
Data rate (Mbps)	AV (dBm)	Data rate (Mbps)	AV (dBm)	Data rate (Mbps)	AV (dBm)
1	16.34	6	14.42	MCS0	14.52
2	16.3	9	14.29	MCS1	14.43
5.5	16.22	12	14.21	MCS2	14.36
11	16.14	18	14.13	MCS3	14.29
-	-	24	14.08	MCS4	14.21
-	-	36	14	MCS5	14.13
-	-	48	13.92	MCS6	14.05
-	-	54	13.84	MCS7	13.99

2.6 Peripherals equipment

Peripherals	Brand	Model No.	Serial No.	Description of Data Cable
LCD TV Monitor	VIZIO	VX200E-T	LXMFBBK5100962	N/A
USB Keyboard	Microsoft	1366	0065800930366	N/A

2.7 Applied test modes and channels

Test items	Mode	Data Rate (Mbps)	Channel	Antenna
Minimum 6 dB Bandwidth	802.11 b	1	1, 6, 11	Chain0
	802.11 g	6	1, 6, 11	Chain0
	802.11 n (HT20)	6.5	1, 6, 11	Chain0
Maximum peak conducted output power	802.11 b	1	1, 6, 11	Chain0
	802.11 g	6	1, 6, 11	Chain0
	802.11 n (HT20)	6.5	1, 6, 11	Chain0
Power Spectral Density	802.11 b	1	1, 6, 11	Chain0
	802.11 g	6	1, 6, 11	Chain0
	802.11 n (HT20)	6.5	1, 6, 11	Chain0
RF Antenna Conducted Spurious	802.11 b	1	1, 6, 11	Chain0
	802.11 g	6	1, 6, 11	Chain0
	802.11 n (HT20)	6.5	1, 6, 11	Chain0
Radiated spurious Emission 9kHz~1GHz	Normal Link			
Radiated Spurious Emission 10GHz~10th Harmonic	802.11 b	1	1, 6, 11	Chain0
	802.11 g	6	1, 6, 11	Chain0
	802.11 n (HT20)	6.5	1, 6, 11	Chain0
Emission on the Band Edge	802.11 b	1	1, 6, 11	Chain0
	802.11 g	6	1, 6, 11	Chain0
	802.11 n (HT20)	6.5	1, 6, 11	Chain0
AC Power Line Conducted Emission	Normal Link			


2.8 Duty Cycle

Mode	Channel	Frequency (MHz)	Data rate	Signal on time	Total signal transmit time	Duty cycle	Duty Cycle factor
802.11b	6	2437	1	1	1	1.000	0.000
802.11g	6	2437	6	1	1	1.000	0.000
802.11n HT20	6	2437	6.5	1	1	1.000	0.000


Chain0 : Duty cycle @ 802.11b mode Ch 6



Chain0 : Duty cycle @ 802.11g mode Ch 6

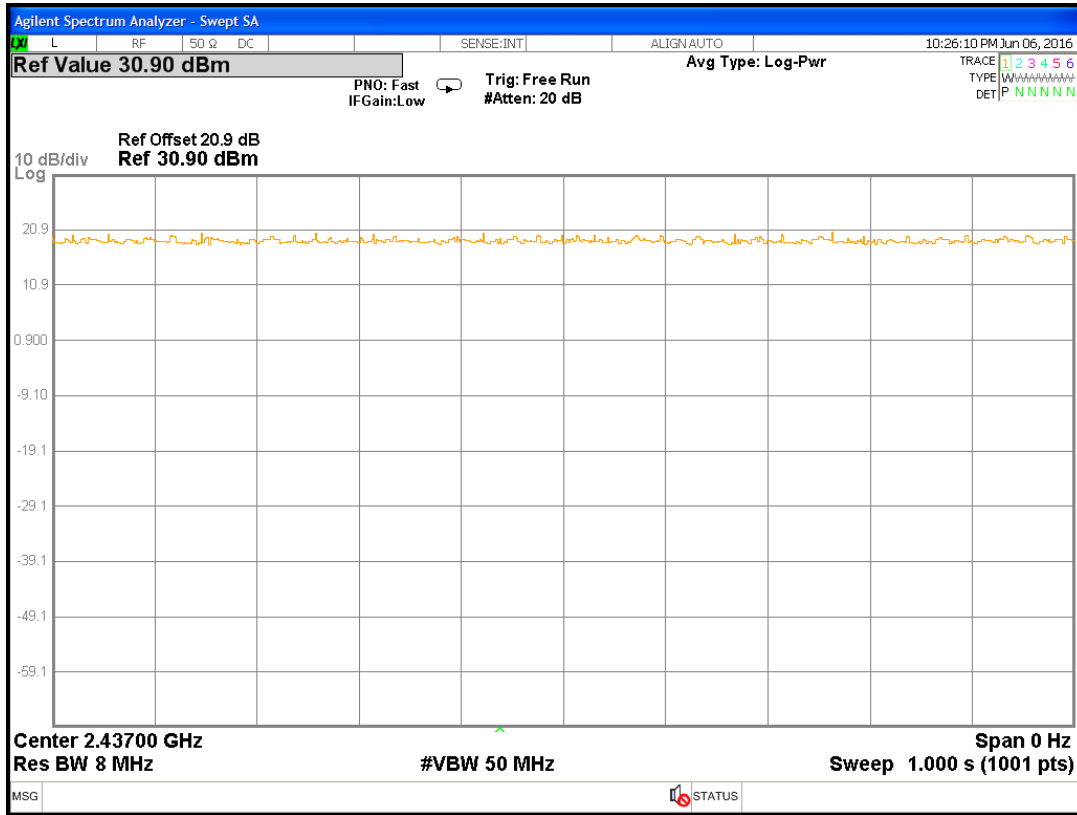

Chain0 : Duty cycle @ 802.11n(HT20) mode Ch 6

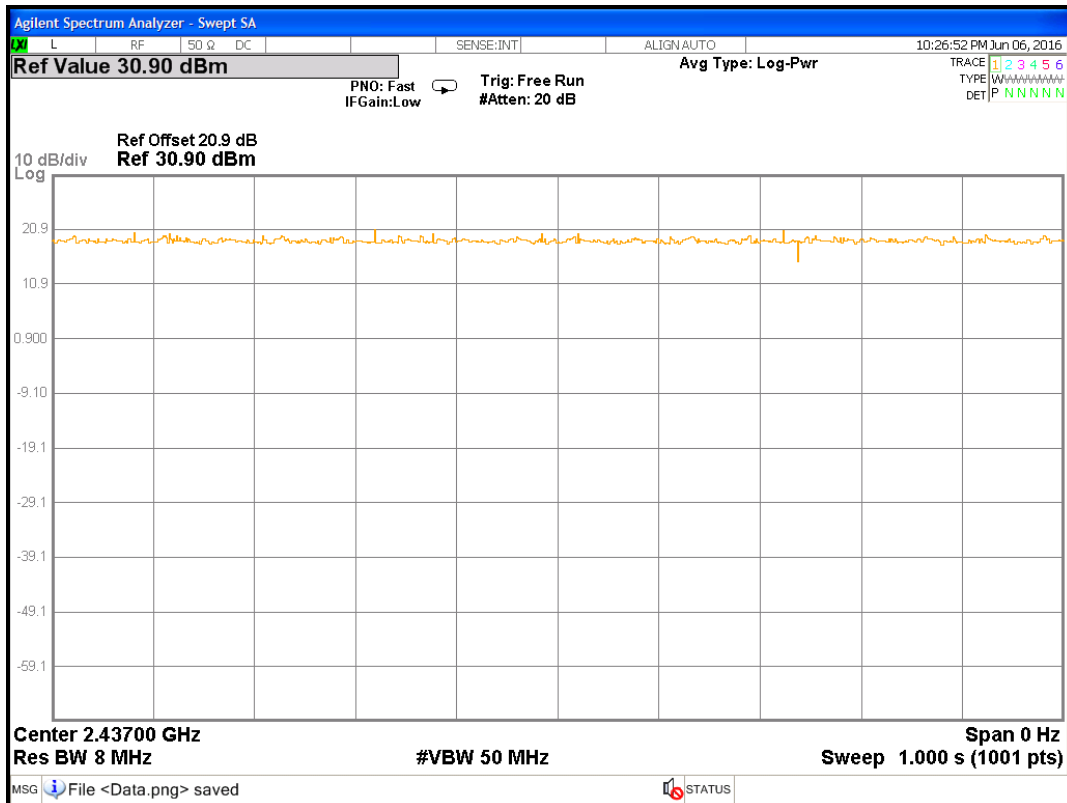

3. Minimum 6 dB Bandwidth

3.1 Operating environment

Temperature:	25	°C
Relative Humidity:	50	%
Atmospheric Pressure	1008	hPa
Requirement & Test method	15.247(a)(2) KDB 558074 D01 v03r05	

3.2 Limit for minimum 6dB bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.3 Measuring instrument setting

Spectrum analyzer settings	
Spectrum Analyzer function	Setting
Detector	Peak
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Sweep	Auto couple
Trace	Allow the trace to stabilize.
Span	Between two times and five times the occupied bandwidth
Attenuation	Auto

3.4 Test procedure

1. The transmitter output was connected to the spectrum analyzer.
2. Test was performed in accordance with clause 8.1 option1 of KDB 558074 D01
3. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

3.5 Test diagram

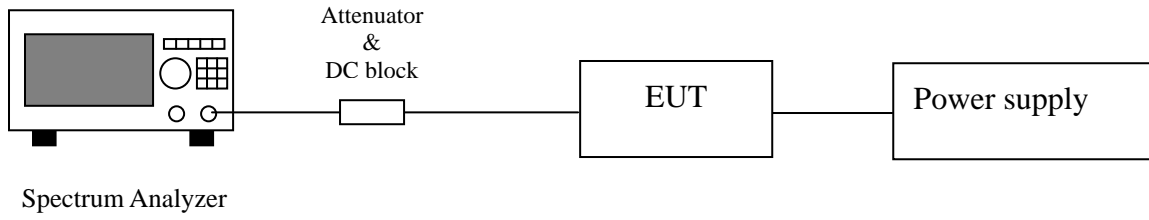


3.6 Test results


Single TX

Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11b (chain0)	1	2412	10.08	0.5
	6	2437	10.08	0.5
	11	2462	10.10	0.5
802.11g (chain0)	1	2412	16.36	0.5
	6	2437	16.01	0.5
	11	2462	16.06	0.5
802.11n(HT20) (chain0)	1	2412	16.29	0.5
	6	2437	16.28	0.5
	11	2462	16.36	0.5

Chain0 : 6dB Bandwidth @ 802.11b mode ch11

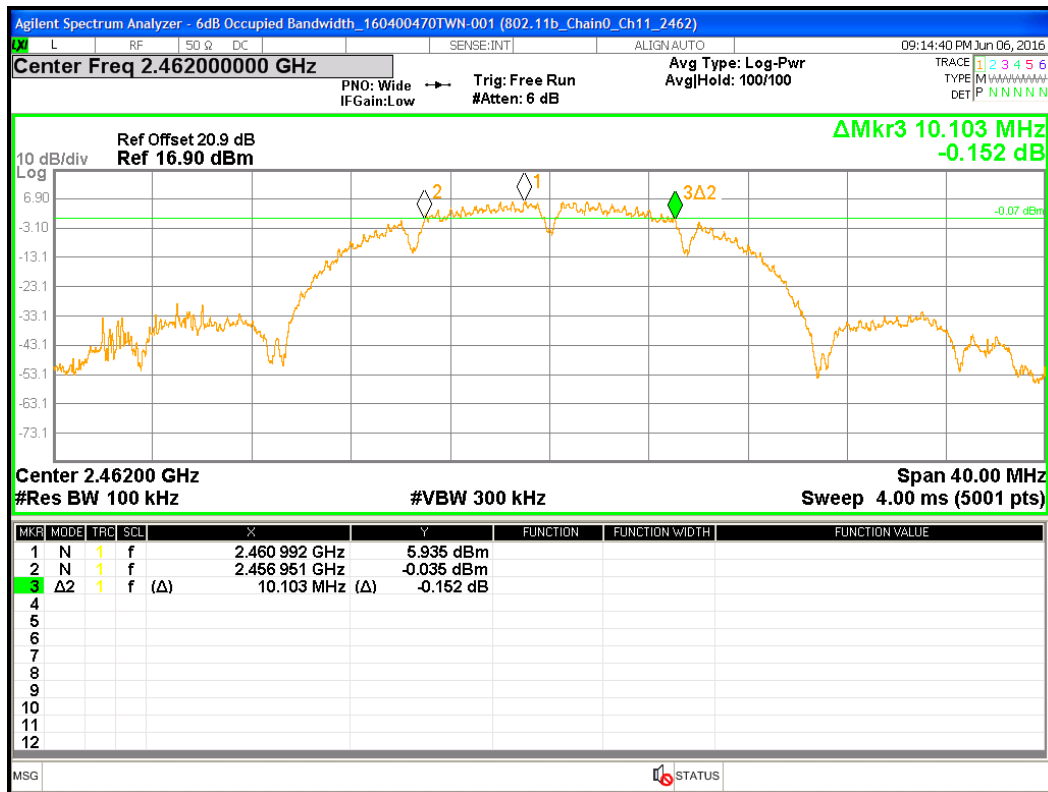

Chain0 : 6dB Bandwidth @ 802.11g mode ch1

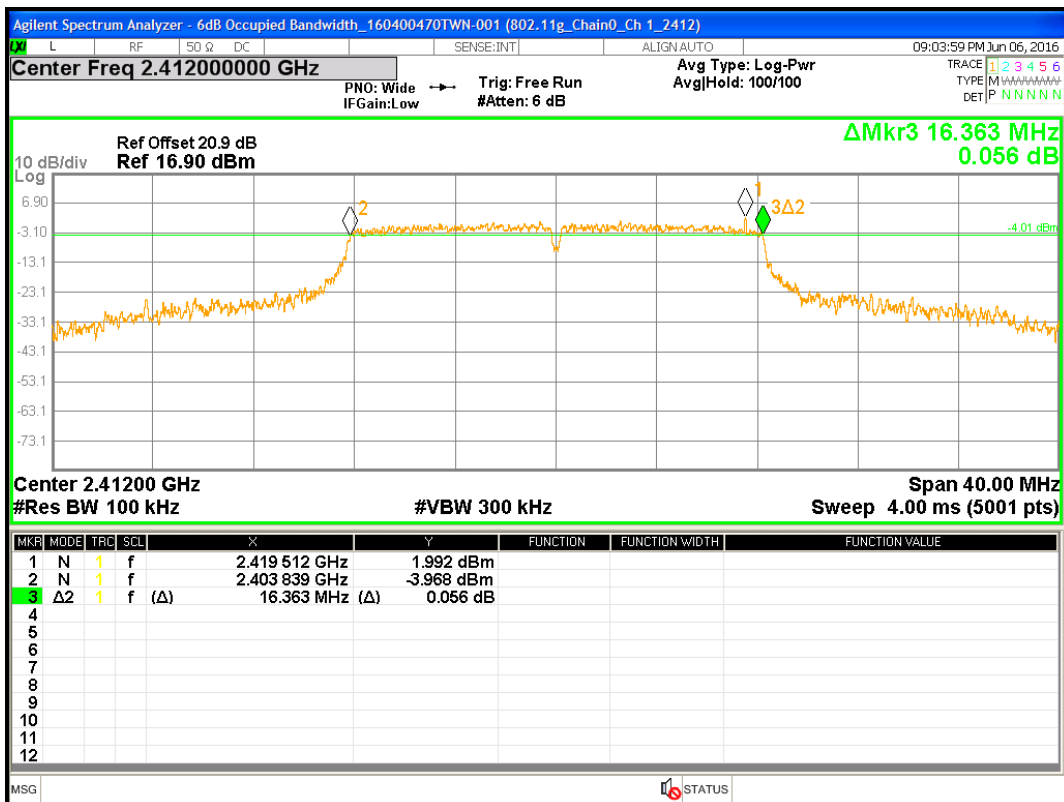

4. Maximum Peak Conducted Output Power

4.1 Operating environment

Temperature:	25	°C
Relative Humidity:	50	%
Atmospheric Pressure	1008	hPa
Requirement & Test method	15.247(b)(3) KDB 558074 D01 v03r05	

4.2 Limit for maximum peak conducted output power

For systems using digital modulation in the 2400-2483.5 MHz: 1 Watt (30dBm)


4.3 Measuring instrument setting

Power meter	
Power meter	Setting
Bandwidth	65MHz bandwidth is greater than the EUT emission bandwidth
Detector	Peak & Average

4.4 Test procedure

Test procedures refer to clause 9.1.2 peak power meter method and clause 9.2.3.2 measurement using a gated RF average power meter of KDB 558074 D01.

4.5 Test diagram

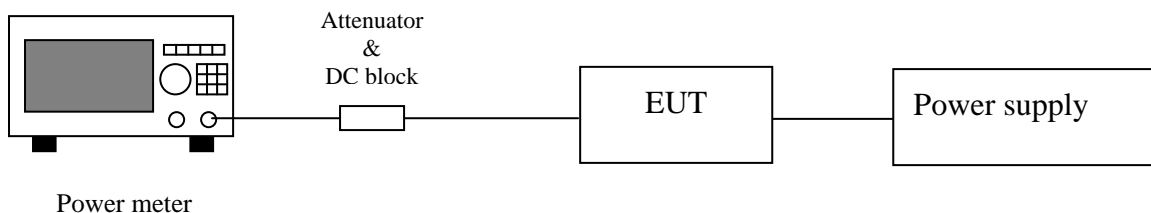

4.6 Test result

Single TX

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Output Power (AV) (dBm)	Total Power (AV) (mW)	Maximum power (PK) (dBm)	Maximum power (PK) (mW)	Limit (dBm)	Margin (dB)
802.11b (chain0)	1	2412	1	15.88	38.73	17.61	57.68	30	-12.39
	6	2437		16.34	43.05	18.01	63.24	30	-11.99
	11	2462		16.06	40.36	17.82	60.53	30	-12.18
802.11g (chain0)	1	2412	6	14.31	26.98	20.06	101.39	30	-9.94
	6	2437		14.42	27.67	20.25	105.93	30	-9.75
	11	2462		14.4	27.54	20.11	102.57	30	-9.89
802.11n(HT20) (chain0)	1	2412	6.5	14.41	27.61	19.95	98.86	30	-10.05
	6	2437		14.52	28.31	20.07	101.62	30	-9.93
	11	2462		14.37	27.35	19.75	94.41	30	-10.25

5. Power Spectral Density

5.1 Operating environment

Temperature:	25	°C
Relative Humidity:	50	%
Atmospheric Pressure	1008	hPa
Requirement & Test method	15.247(e) KDB 558074 D01 v03r05	

5.2 Limit for power spectrum density

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission


5.3 Measuring instrument setting

Spectrum analyzer settings	
Spectrum Analyzer function	Setting
Detector	Peak
RBW	≥ 3 kHz
VBW	≥ 3 x RBW
Sweep	Auto couple
Trace	Max hold
Span	1.5 times x 6dB bandwidth
Attenuation	Auto

5.4 Test procedure

1. Test procedure refer to clause 10.2 method PKPSD (peak PSD) of KDB 558074 D01 and clause E) 2) b) measure and sum spectral maxima across the outputs.
2. Using the maximum conducted output power in the fundamental emission demonstrates compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Use the peak marker function to determine the maximum amplitude level within the RBW.

5.5 Test diagram

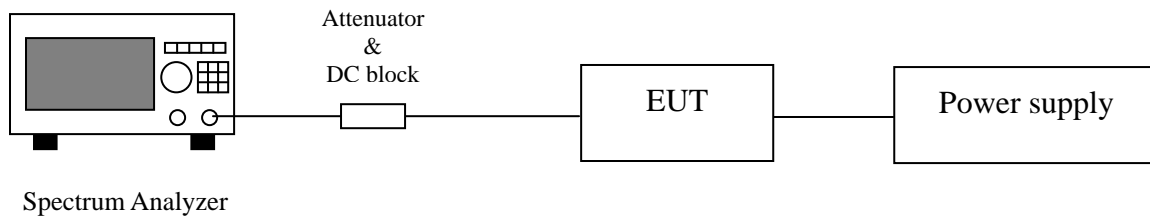


5.6 Test results

Single TX


Mode	Channel	Frequency (MHz)	RBW factor	PSD in 10 kHz	PSD in 3kHz		Limit (dBm)	Margin (dB)
					(dBm)	(mW)		
802.11b (chain0)	1	2412	5.229	-4.06	-9.29	0.118	8	-17.29
	6	2437	5.229	-3.04	-8.26	0.149	8	-16.26
	11	2462	5.229	-3.37	-8.60	0.138	8	-16.60
802.11g (chain0)	1	2412	5.229	-7.47	-12.70	0.054	8	-20.70
	6	2437	5.229	-7.27	-12.50	0.056	8	-20.50
	11	2462	5.229	-6.81	-12.03	0.063	8	-20.03
802.11n (HT20) (chain0)	1	2412	5.229	-7.62	-12.85	0.052	8	-20.85
	6	2437	5.229	-7.56	-12.79	0.053	8	-20.79
	11	2462	5.229	-5.27	-10.50	0.089	8	-18.50

Remark: RBW Correction: $10 \cdot \log(10\text{kHz}/3\text{kHz})$


Chain0 : Power Spectral Density @ 802.11b mode Ch 1

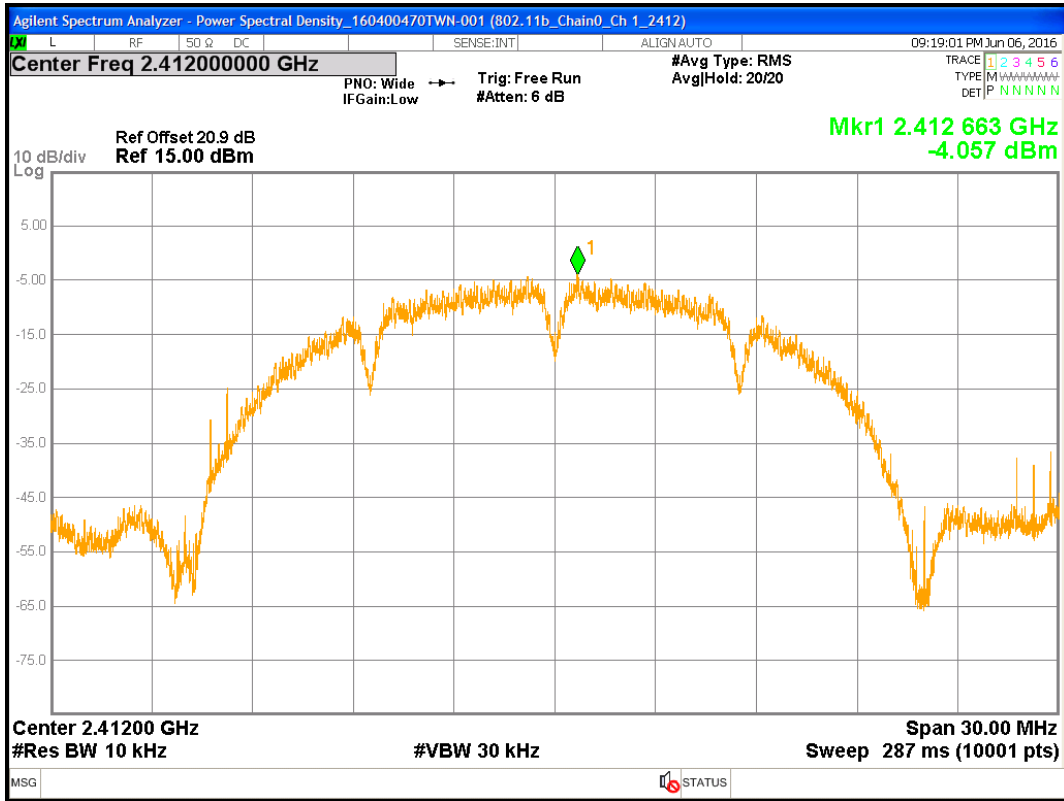


Chain0 : Power Spectral Density @ 802.11b mode ch6

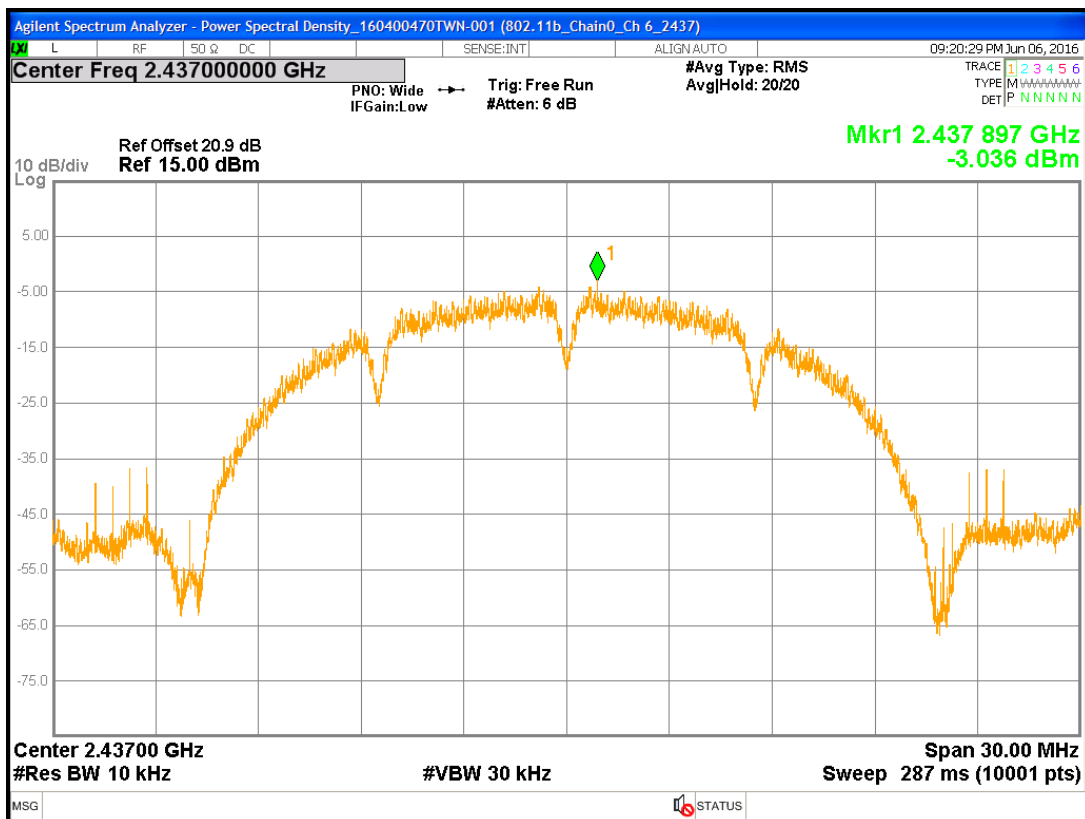


Chain0 : Power Spectral Density @ 802.11b mode ch11

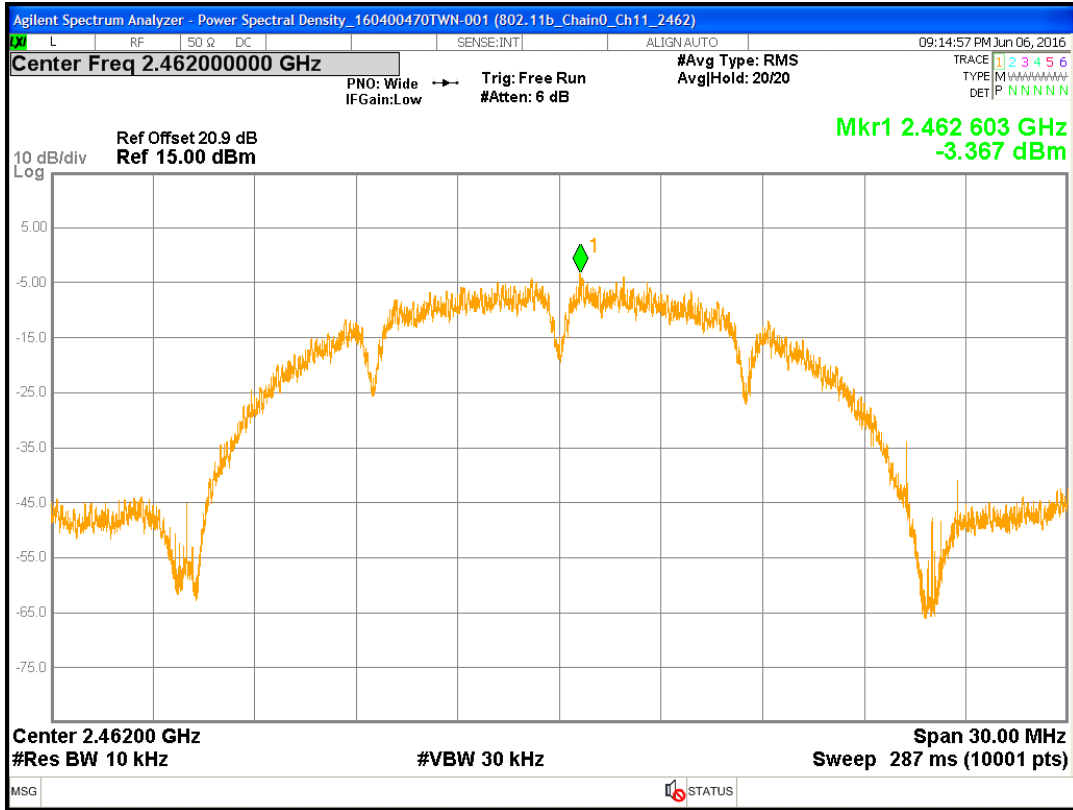


Chain0 : Power Spectral Density @ 802.11g mode ch1

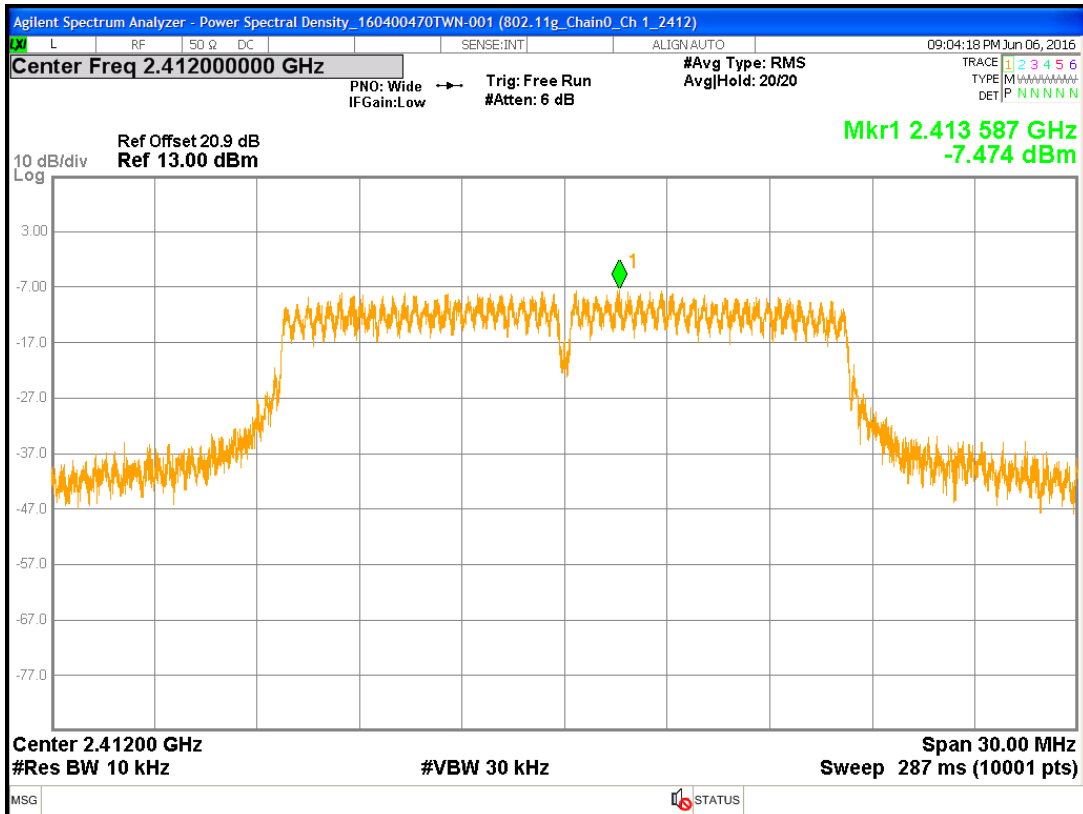


Chain0 : Power Spectral Density @ 802.11g mode ch6

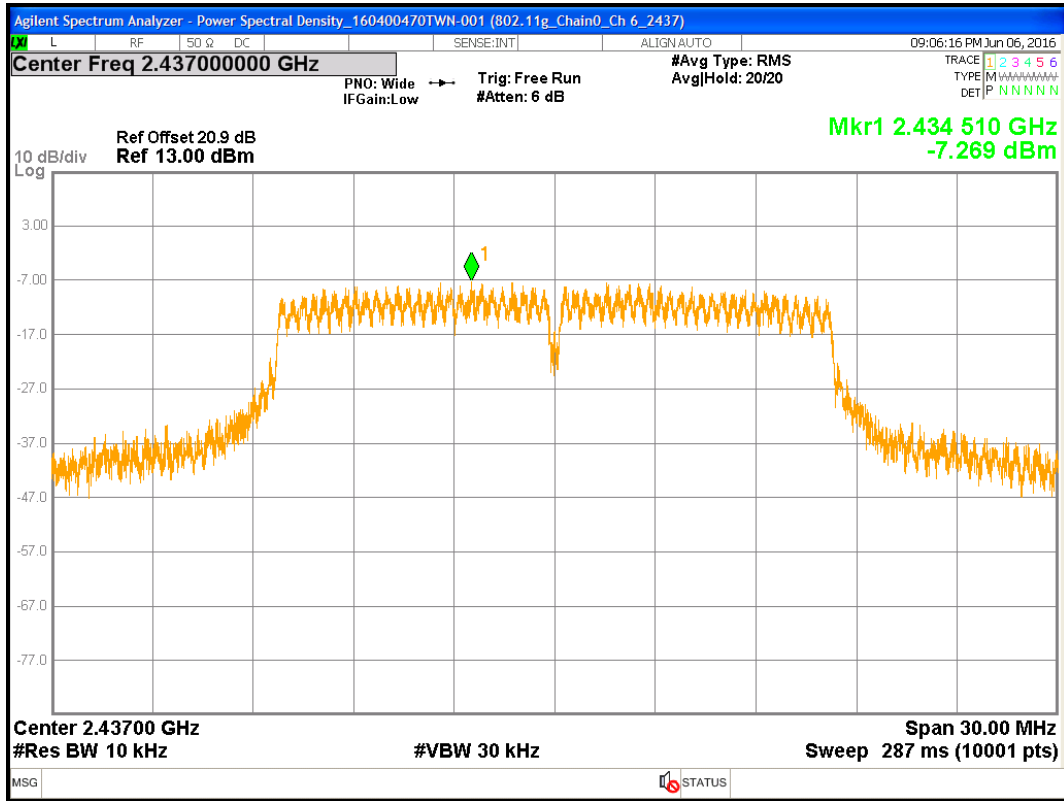


Chain0 : Power Spectral Density @ 802.11g mode ch11

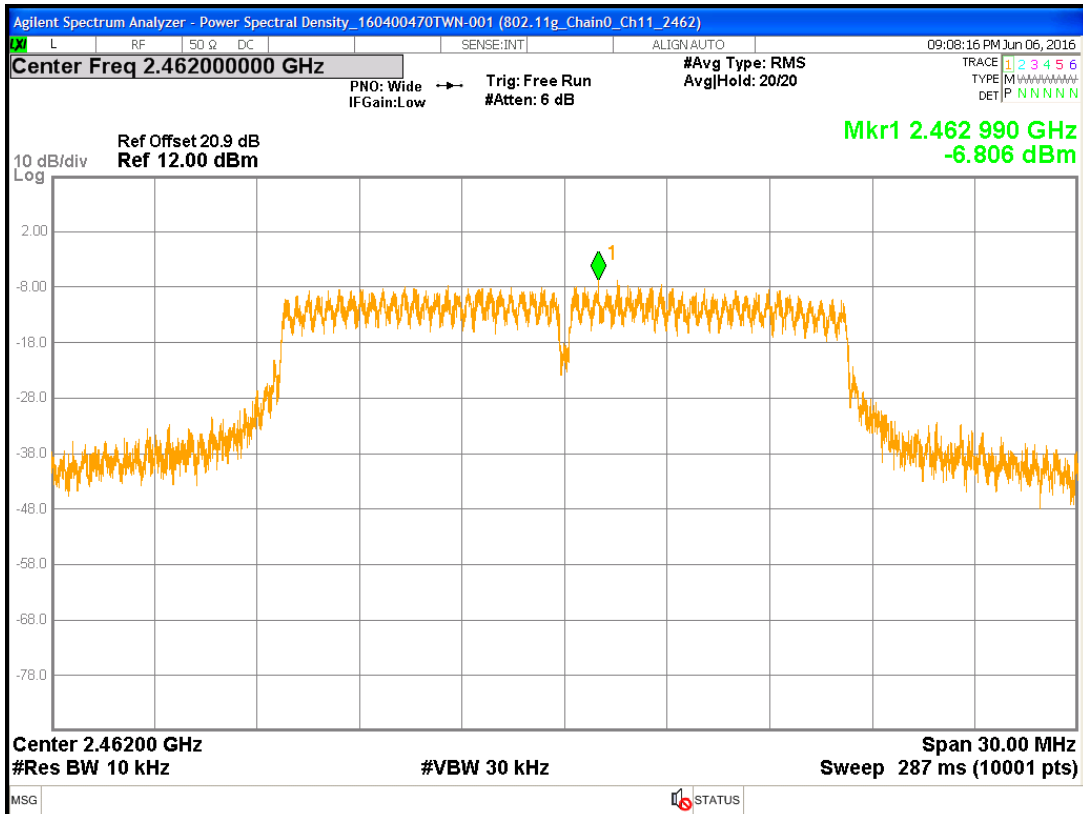

Chain0 : Power Spectral Density @ 802.11n(HT20) mode ch1

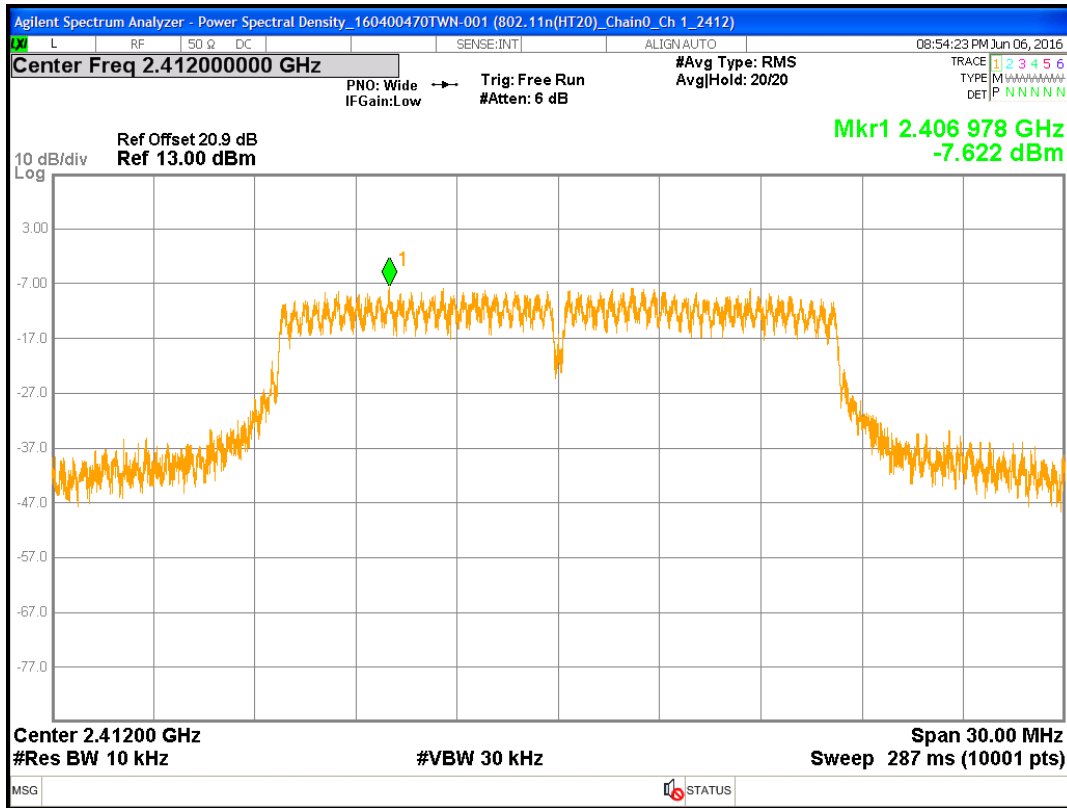


Chain0 : Power Spectral Density @ 802.11n(HT20) mode ch6

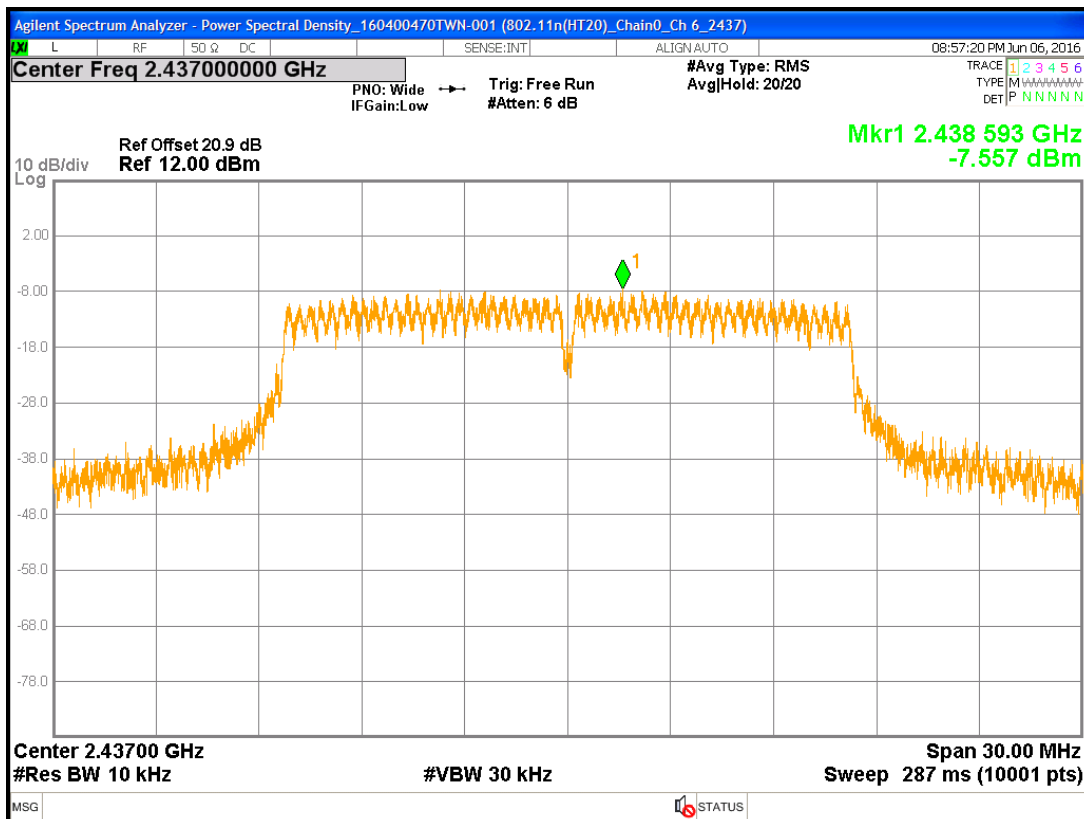



Chain0 : Power Spectral Density @ 802.11n(HT20) mode ch11

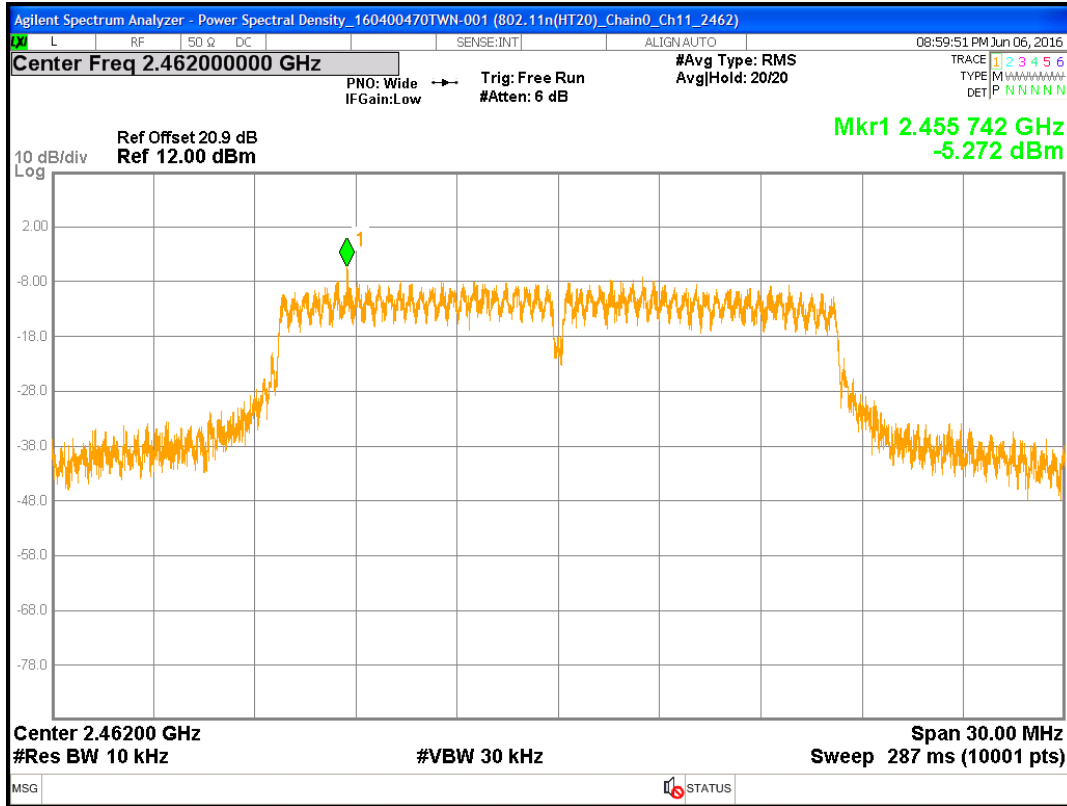

6. Emissions In Non-Restricted Frequency Bands

6.1 Operating environment

Temperature:	25	°C
Relative Humidity:	50	%
Atmospheric Pressure	1008	hPa
Requirement	15.247(d)	
Channel number	Low 、 Middle 、 High	

6.2 Limit for emissions in non-restricted frequency bands

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

6.3 Measuring instruments setting

Reference level measurement

Spectrum analyzer settings	
Spectrum Analyzer function	Setting
Detector	Peak
RBW	≥ 100 kHz
VBW	$\geq 3 \times$ RBW
Sweep	Auto couple
Trace	Max hold
Span	≥ 1.5 time 6dB bandwidth
Attenuation	Auto


Emission level measurement

Spectrum analyzer settings	
Spectrum Analyzer function	Setting
Detector	Peak
RBW	≥ 100 kHz
VBW	$\geq 3 \times$ RBW
Sweep	Auto couple
Trace	Max hold
Attenuation	Auto

6.4 Test procedure

1. The procedure was used in antenna-port conducted and connected to the spectrum analyzer.
2. Set instrument center frequency to center frequency
3. Use the parameter configured in clause 6.3 to measure
4. Use the peak marker function to determine the maximum amplitude level.

6.5 Test diagram

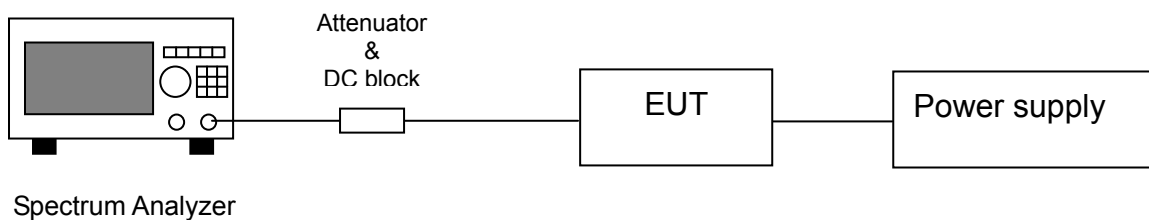

7. Emissions In Restricted Frequency Bands (Radiated emission measurements)

7.1 Operating environment

Temperature:	25	°C
Relative Humidity:	50	%
Atmospheric Pressure	1008	hPa
Requirement	15.247(d), 15.205, 15.209	

7.2 Limit for emission in restricted frequency bands (Radiated emission measurement)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	2400/F(kHz)	30
1.705~30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

7.3 Measuring instrument setting

Below 1GHz measurement

Receiver settings	
Receiver function	Setting
Detector	QP
RBW	9-150 kHz ; 200-300 Hz 0.15-30 MHz; 9-10 kHz 30-1000 MHz; 100-120 kHz
VBW	$\geq 3 \times$ RBW
Sweep	Auto couple
Attenuation	Auto

Above 1GHz measurement


Spectrum analyzer settings	
Spectrum Analyzer function	Setting
Detector	Peak
RBW	1MHz
VBW	3MHz for Peak; 10Hz for Average
Sweep	Auto couple
Start Frequency	1GHz
Stop Frequency	Tenth harmonic
Attenuation	Auto

7.4 Test procedure


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the companion devices. The turntable was rotated by 360 degree to find the position of the maximum emission level.
3. The height of the receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of the both horizontal and vertical polarization
4. If find the frequencies above the limit or below within 3dB, the antenna tower was scan (from 1m to 4m) and then the turntable was rotated to find the maximum reading.
5. Set the test-receiver system to peak or CISPR quasi-peak detector with specified bandwidth under maximum hold mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.
7. If the emissions level of the EUT in peak mode was 3dB lower than the average limit specified then testing will be stopped and peak values of the EUT will be reported. Otherwise, the emissions which do not have 3dB margin will be measured using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, The emissions level of the EUT in peak mode was lower than average limit, then testing will be stopped and peak values of the EUT will be reported, otherwise, the emission will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be quasi-peak measured by receiver.

7.5 Test configuration


7.5.1 Radiated emission from 9kHz to 30MHz uses Loop Antenna:

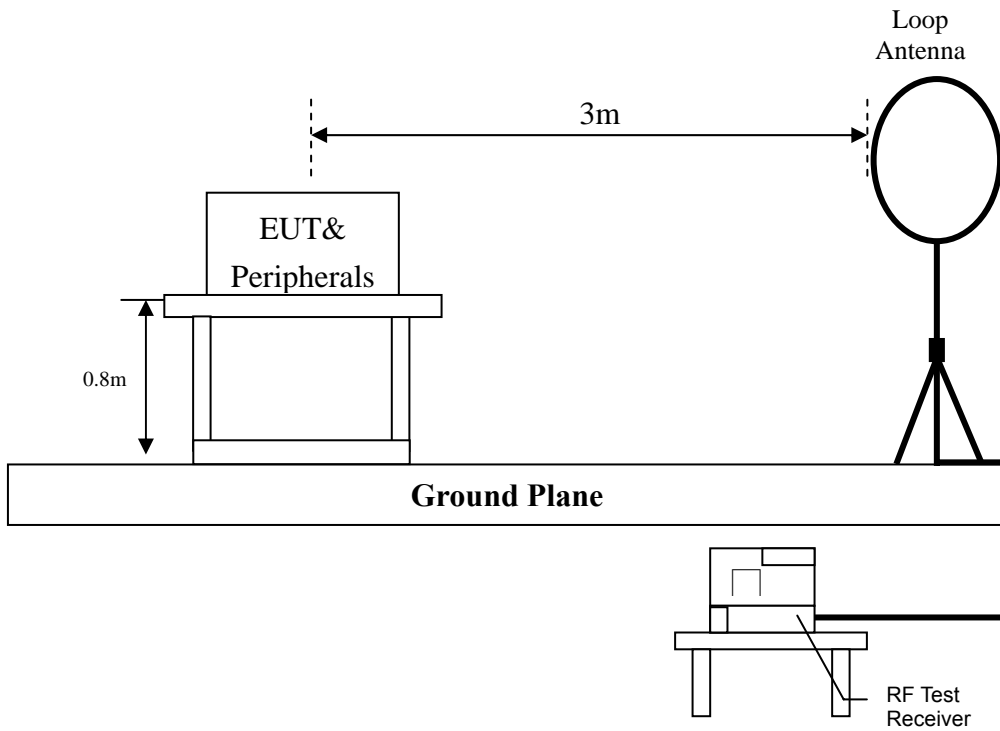

7.5.2 Radiated emission below 1GHz using Bilog Antenna

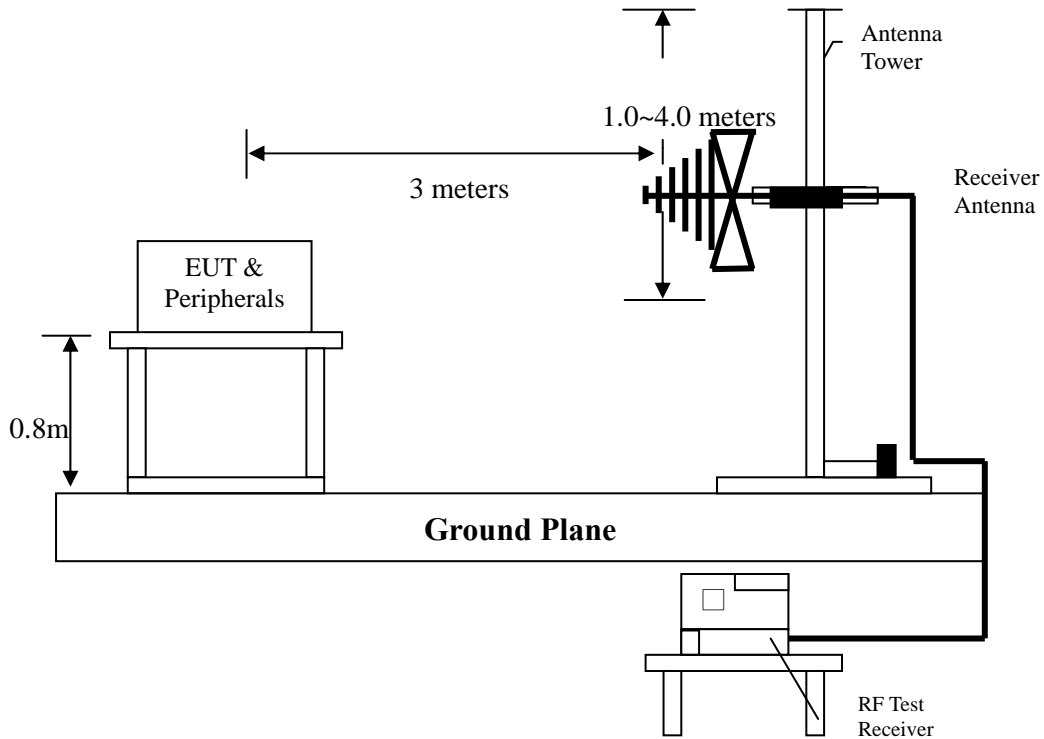

7.5.3 Radiated emission above 1GHz using Horn Antenna

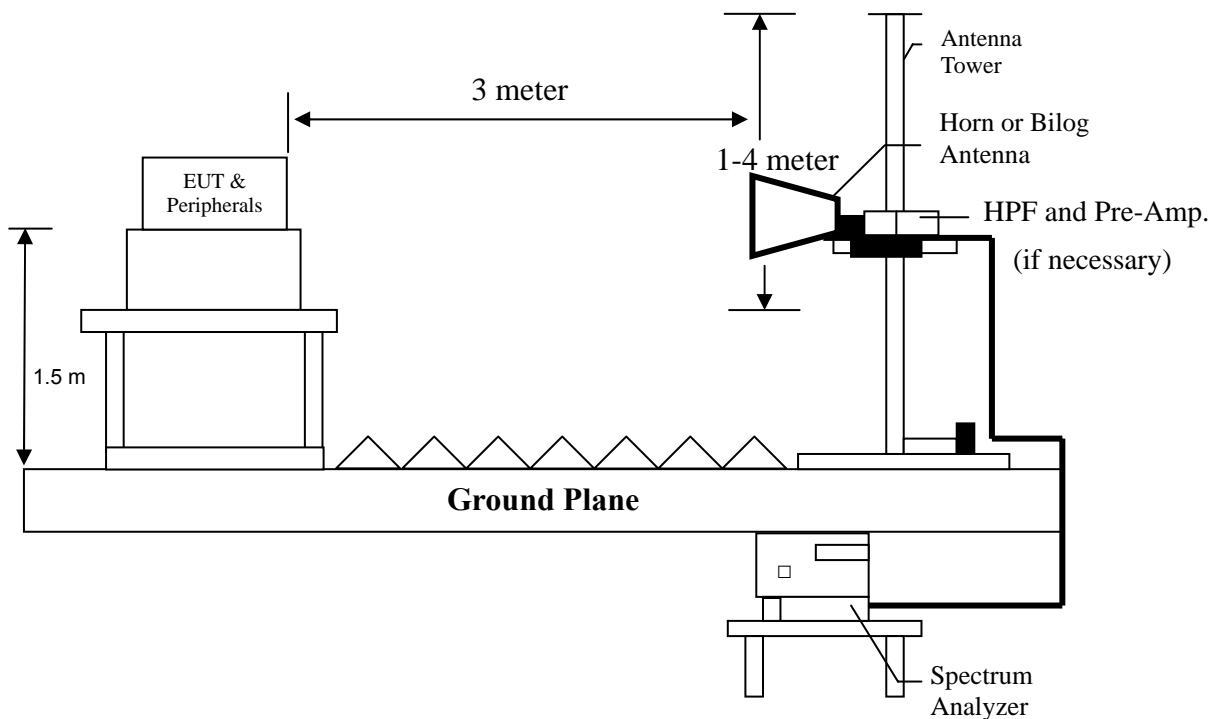

7.6 Test result

7.6.1 Measurement results: frequencies 9kHz to 30MHz

EUT : CS01A
Test mode : TX Mode

Frequency (MHz)	Detection value	factor (dB/m)	Reading (dB μ V)	Value (dB μ V/m)	Limit @ 3m (dB μ V/m)	Tolerance (dB)
0.02	QP	20.92	10.24	31.16	121.58	-90.43
0.03	QP	20.86	21.30	42.16	118.06	-75.90
0.05	QP	20.83	9.34	30.17	113.62	-83.45
0.07	QP	20.81	18.89	39.70	110.70	-71.01
0.09	QP	20.78	7.18	27.96	108.52	-80.56

Remark: Corr. Factor = Antenna Factor + Cable Loss - PreAmplifier Gain

7.6.2 Measurement results: frequencies below 1 GHz

The test was performed on EUT under 802.11b/g/n continuously transmitting mode. The worst case occurred at 802.11g ch 1 .

EUT : CS01A
 Worst Case : 802.11g ch 1 .

Antenna Polariz. (V/H)	Freq. (MHz)	Receiver Detector	Corr. Factor (dB/m)	Reading (dBμV)	Corrected Level (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Vertical	59.10	QP	16.28	15.27	31.55	40.00	-8.45
Vertical	111.48	QP	13.19	17.39	30.58	43.50	-12.92
Vertical	125.06	QP	14.37	15.52	29.89	43.50	-13.61
Vertical	156.10	QP	16.46	11.06	27.52	43.50	-15.98
Vertical	185.20	QP	14.43	12.51	26.94	43.50	-16.56
Vertical	319.06	QP	17.92	12.65	30.57	46.00	-15.43
Horizontal	49.40	QP	17.06	6.11	23.17	40.00	-16.83
Horizontal	175.50	QP	15.42	6.88	22.30	43.50	-21.20
Horizontal	253.10	QP	15.98	6.15	22.13	46.00	-23.87
Horizontal	319.06	QP	17.92	11.36	29.28	46.00	-16.72
Horizontal	679.90	QP	25.31	9.27	34.58	46.00	-11.42
Horizontal	864.20	QP	28.19	8.56	36.75	46.00	-9.25

Remark: Corr. Factor = Antenna Factor + Cable Loss

7.6.3 Measurement results: frequency above 1GHz to 25GHz

EUT : CS01A
 Test mode : TX Mode

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11b Ch 1	4824	PK	V	40.10	-0.04	53.28	53.24	74.00	-20.76
	7236	PK	V	38.08	8.19	38.20	46.39	74.00	-27.61
	9648	PK	V	38.19	11.34	40.30	51.64	74.00	-22.36
	4824	PK	H	40.10	-0.04	50.39	50.35	74.00	-23.65
	7236	PK	H	38.08	8.19	38.94	47.13	74.00	-26.87
	9648	PK	H	38.19	11.34	40.09	51.43	74.00	-22.57
802.11b Ch 6	4874	PK	V	40.00	0.13	52.93	53.06	74.00	-20.94
	7311	PK	V	38.02	8.42	37.61	46.03	74.00	-27.97
	9748	PK	V	38.33	11.24	42.17	53.41	74.00	-20.59
	4874	PK	H	40.00	0.13	50.78	50.91	74.00	-23.09
	7311	PK	H	38.02	8.42	38.09	46.51	74.00	-27.49
	9748	PK	H	38.33	11.24	38.34	49.58	74.00	-24.42
802.11b Ch 11	4924	PK	V	39.91	0.30	52.80	53.10	74.00	-20.90
	7386	PK	V	37.96	8.66	37.49	46.15	74.00	-27.85
	9848	PK	V	38.47	11.14	41.69	52.83	74.00	-21.17
	4924	PK	H	39.91	0.30	50.96	51.26	74.00	-22.74
	7386	PK	H	37.96	8.66	36.75	45.41	74.00	-28.59
	9848	PK	H	38.47	11.14	38.07	49.21	74.00	-24.79
802.11g Ch 1	4320	PK	V	40.59	-1.25	46.30	45.05	74.00	-28.95
	4824	PK	V	40.10	-0.04	51.39	51.35	74.00	-22.65
	7236	PK	V	38.08	8.19	39.32	47.51	74.00	-26.49
	9648	PK	V	38.19	11.34	41.69	53.03	74.00	-20.97
	4320	PK	H	40.59	-1.25	45.14	43.89	74.00	-30.11
	4824	PK	H	40.10	-0.04	49.04	49.00	74.00	-25.00
	7236	PK	H	38.08	8.19	37.88	46.07	74.00	-27.93
	9648	PK	H	38.19	11.34	40.70	52.04	74.00	-21.96

Remark: Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

EUT : CS01A
 Test mode : TX Mode

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11g Ch 6	4320	PK	V	40.59	-1.25	44.47	43.22	74.00	-30.78
	4874	PK	V	40.00	0.13	52.37	52.50	74.00	-21.50
	7311	PK	V	38.02	8.42	38.80	47.22	74.00	-26.78
	9748	PK	V	38.33	11.24	40.71	51.95	74.00	-22.05
	4320	PK	H	40.59	-1.25	43.82	42.57	74.00	-31.43
	4874	PK	H	40.00	0.13	50.57	50.70	74.00	-23.30
	7311	PK	H	38.02	8.42	39.21	47.63	74.00	-26.37
	9748	PK	H	38.33	11.24	39.98	51.22	74.00	-22.78
802.11g Ch 11	3000	PK	V	39.77	-3.62	44.89	41.27	74.00	-32.73
	4320	PK	V	40.59	-1.25	44.02	42.77	74.00	-31.23
	4924	PK	V	39.91	0.30	48.61	48.91	74.00	-25.09
	7386	PK	V	37.96	8.66	38.91	47.57	74.00	-26.43
	9848	PK	V	38.47	11.14	39.13	50.27	74.00	-23.73
	3300	PK	H	39.93	-3.85	45.34	41.49	74.00	-32.51
	3600	PK	H	40.11	-3.50	43.72	40.22	74.00	-33.78
	3900	PK	H	40.32	-2.01	43.02	41.01	74.00	-32.99
	4320	PK	H	40.59	-1.25	43.99	42.74	74.00	-31.26
	4924	PK	H	39.91	0.30	50.15	50.45	74.00	-23.55
	7386	PK	H	37.96	8.66	39.09	47.75	74.00	-26.25
	9848	PK	H	38.47	11.14	40.26	51.40	74.00	-22.60

EUT : CS01A
 Test mode : TX Mode

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11n (HT20) Ch 1	3060	PK	V	39.80	-3.66	44.54	40.88	74.00	-33.12
	3810	PK	V	40.26	-2.46	42.03	39.57	74.00	-34.43
	4050	PK	V	40.42	-1.48	42.56	41.08	74.00	-32.92
	4320	PK	V	40.59	-1.25	44.05	42.80	74.00	-31.20
	4824	PK	V	40.10	-0.04	52.55	52.51	74.00	-21.49
	3240	PK	H	39.90	-3.80	44.21	40.41	74.00	-33.59
	4824	PK	H	40.10	-0.04	49.75	49.71	74.00	-24.29
802.11n (HT20) Ch 6	3420	PK	V	40.00	-3.94	43.31	39.37	74.00	-34.63
	4320	PK	V	40.59	-1.25	44.07	42.82	74.00	-31.18
	4874	PK	V	40.00	0.13	50.55	50.68	74.00	-23.32
	4320	PK	H	40.59	-1.25	43.52	42.27	74.00	-31.73
	4874	PK	H	40.00	0.13	49.04	49.17	74.00	-24.83
	9748	PK	H	38.33	11.24	41.49	52.73	74.00	-21.27
802.11n (HT20) Ch 11	4320	PK	H	40.59	-1.25	44.15	42.90	74.00	-31.10
	4924	PK	V	39.91	0.30	51.88	52.18	74.00	-21.82
	4320	PK	H	40.59	-1.25	43.15	41.90	74.00	-32.10
	4924	PK	H	39.91	0.30	50.46	50.76	74.00	-23.24

Remark: Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

8. Emission On Band Edge

8.1 Operating environment

Temperature:	25	°C
Relative Humidity:	50	%
Atmospheric Pressure	1008	hPa
Requirement	15.247(d), 15.205,	

8.2 Measuring instrument setting

Spectrum analyzer settings	
Spectrum Analyzer function	Setting
Detector	Peak
RBW	1MHz
VBW	3MHz for Peak; 10Hz for Average
Sweep	Auto couple
Restrict bands	2310~2390MHz
	2483.5 ~2500MHz
Attenuation	Auto

8.3 Test procedure

The test procedure is the same as clause 7.4

8.4 Test results

EUT : CS01A
 Test mode : TX Mode

Mode	Freq. (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)	Restricted band (MHz)
802.11b Chain0	2385.90	PK	H	33.83	22.89	56.72	74	-17.28	2310~2390
	2386.36	AV	H	33.83	13.86	47.69	54	-6.31	
	2497.46	PK	H	34.37	21.93	56.30	74	-17.70	2483.5~2500
	2483.50	AV	H	34.30	9.23	43.53	54	-10.47	
802.11g Chain0	2390.00	PK	H	33.85	29.00	62.85	74	-11.15	2310~2390
	2390.00	AV	H	33.85	16.12	49.97	54	-4.03	
	2483.50	PK	H	34.30	25.40	59.70	74	-14.30	2483.5~2500
	2483.50	AV	H	34.30	11.11	45.41	54	-8.59	
802.11n (HT20)	2390.00	PK	H	33.85	30.34	64.19	74	-9.81	2310~2390
	2390.00	AV	H	33.85	17.12	50.97	54	-3.03	
	2484.28	PK	H	34.30	27.79	62.09	74	-11.91	2483.5~2500
	2483.50	AV	H	34.30	11.85	46.15	54	-7.85	

9. AC Power Line Conducted Emission

9.1 Operating environment

Temperature:	25	°C
Relative Humidity:	57	%
Atmospheric Pressure	1009	hPa
Test Voltage	120V, 60Hz	
Requirement	15.207	

9.2 Limit for AC power line conducted emission

Freq. (MHz)	Conducted Limit (dBuV)	
	Q.P.	Ave.
0.15~0.50	66 – 56*	56 – 46*
0.50~5.00	56	46
5.00~30.0	60	50


9.3 Measuring instrument setting

Receiver settings	
Receiver function	Setting
Detector	QP
Start frequency	0.15MHz
Stop frequency	30MHz
IF bandwidth	9 kHz
Attenuation	10dB

9.4 Test procedure

1. Configure the EUT according to ANSI C63.10. The EUT or host of EHT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network.
3. All the companion devices are connected to the other LISN. The LISN should provide 50U_h/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30MHz was searched
5. Set the test-receiver system to peak detector and specified bandwidth with maximum hold mode.
6. The measurement has to be done between each power line and ground at the power terminal.

9.5 Test diagram

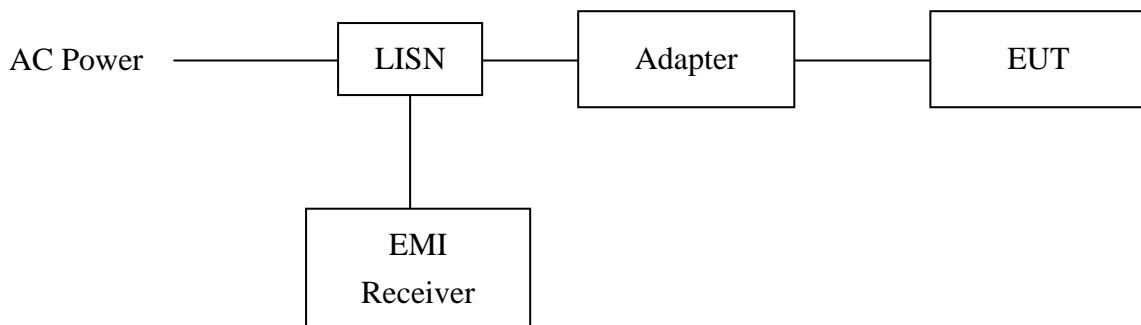


9.6 Test results

Phase: Live Line
 Model No.: CS01A
 Test Condition: WiFi mode

Frequency (MHz)	Corr. Factor (dB)	Level Qp (dBuV)	Limit Qp (dBuV)	Level Av (dBuV)	Limit Av (dBuV)	Over Limit Qp (dB)	Over Limit Av (dB)
0.159	10.32	40.70	65.52	21.19	55.52	-24.82	-34.33
0.164	10.33	39.87	65.25	25.22	55.25	-25.38	-30.03
0.204	10.38	36.47	63.45	21.49	53.45	-26.98	-31.96
0.223	10.39	33.20	62.70	19.08	52.70	-29.50	-33.62
0.552	10.49	38.43	56.00	33.10	46.00	-17.57	-12.90
0.989	10.63	32.36	56.00	23.65	46.00	-23.64	-22.35

Remark:

1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

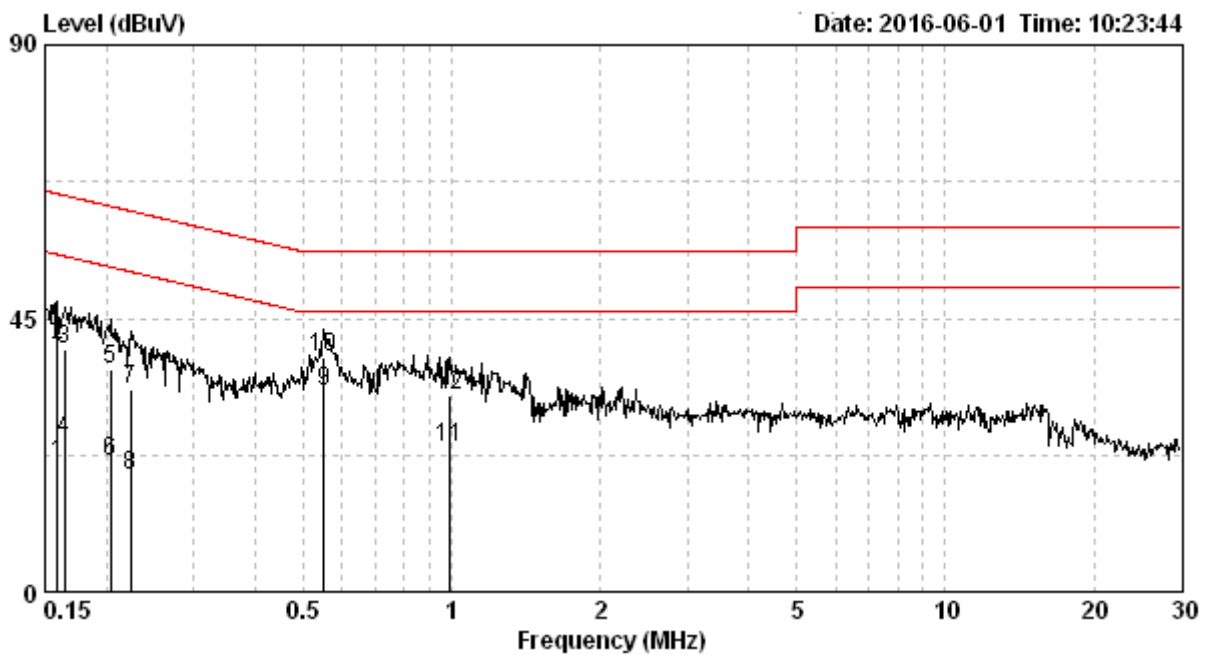


Phase: Neutral Line
 Model No.: CS01A
 Test Condition: WiFi mode

Frequency (MHz)	Corr. Factor (dB)	Level Qp (dBuV)	Limit Qp (dBuV)	Level Av (dBuV)	Limit Av (dBuV)	Over Limit (dB) Qp	Av
0.176	10.33	37.25	64.68	19.95	54.68	-27.43	-34.73
0.227	10.37	33.42	62.57	15.98	52.57	-29.14	-36.58
0.624	10.50	28.79	56.00	19.73	46.00	-27.21	-26.27
0.759	10.55	29.88	56.00	21.15	46.00	-26.12	-24.85
0.800	10.56	30.15	56.00	20.33	46.00	-25.85	-25.67
0.866	10.58	29.80	56.00	20.49	46.00	-26.20	-25.51

Remark:

1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

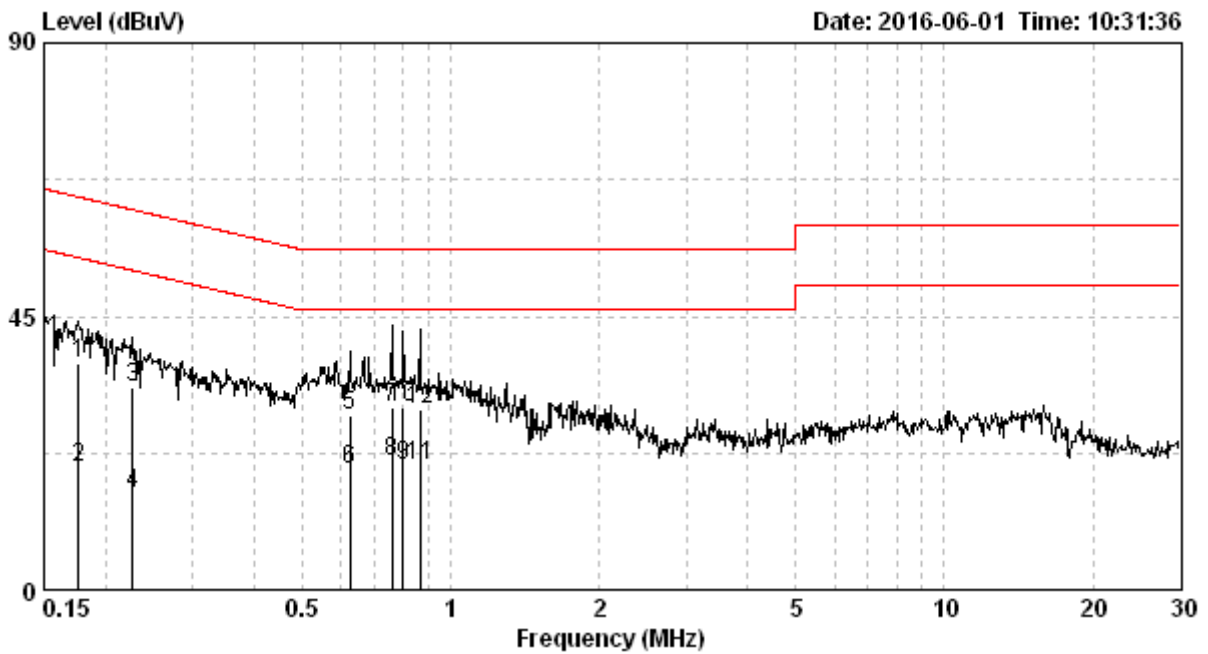

Appendix A: Test equipment list

Equipment	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
ESCI EMI Test Receiver	Rohde & Schwarz	ESCI	100018	2015/12/02	2016/11/30
Spectrum Analyzer	Rohde & Schwarz	FSP30	100137	2015/08/18	2016/08/16
Horn Antenna (1-18G)	SHWARZBECK	BBHA 9120 D	9120D-456	2014/08/29	2017/08/27
Horn Antenna (14-42G)	SHWARZBECK	BBHA 9170	BBHA9170159	2014/09/16	2017/09/14
Broadband Antenna	SHWARZBECK	VULB 9168	9168-172	2013/08/08	2016/08/06
Pre-Amplifier	EMC Co.	EMC12635SE	980205	2015/10/7	2016/10/05
Pre-Amplifier	MITEQ	JS4-26004000--2 7-8A	828825	2015/09/15	2016/09/13
Power Meter	Anritsu	ML2495A	0844001	2015/11/11	2016/11/09
Power Sensor	Anritsu	MA2411B	0738452	2015/11/11	2016/11/09
Signal Analyzer	Agilent	N9030A	MY51380492	2015/09/21	2016/09/19
966-2(A) Cable 9kHz~26.5GHz	SUHNER	SMA / EX 100	N/A	2016/05/05	2017/05/04
966-2(B) Cable 9kHz~26.5GHz	SUHNER	SUCOFLEX 104P	CB0005	2016/05/04	2017/05/03
RF Cable 9kHz~26.5GHz	SUHNER	SUCOFLEX 102	CB0006	2016/05/05	2017/05/04
966-2_3m Semi-Anechoic Chamber	966_2	CEM-966_2	N/A	2016/02/24	2017/02/22
High Pass Filter	Reactel	7HS-3G/18G-S11	N/A	2016/06/03	2017/06/02
Active Loop Antenna	SCHWARZBECK MESS-ELEKTRO NIC	FMZB1519	1519-067	2016/03/03	2017/03/02

Note: No Calibration Required (NCR).

Test Equipment/ Test site	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
EMI Test Receiver	Rohde & Schwarz	ESR-7	101232	2015/12/02	2016/11/30
Test software	ADT	Radiated test system	7.5.14	NCR	NCR
Two-Line V-Network	R&S	ENV216	101160	2015/06/16	2016/06/14
Two-Line -V-Network	R&S	ESH3-Z5	825562/003	2015/10/07	2016/10/05
CON-2 Shielded Room	N/A	N/A	N/A	NCR	NCR
CON-2 Cable	SUHNER	BNC / RG-58	2146637	2016/05/10	2017/05/09
Test software	Audix	e3	4.03b13d	NCR	NCR

Note: No Calibration Required (NCR).

Appendix B: Measurement Uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Vertically polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.14 dB
Horizontally polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.22 dB
Vertically polarized Radiated disturbances from 1GHz~18GHz in a semi-anechoic chamber at a distance of 3m	3.64 dB
Horizontally polarized Radiated disturbances from 1GHz~18GHz in a semi-anechoic chamber at a distance of 3m	3.64 dB
Vertically polarized Radiated disturbances from 18GHz~40GHz in a semi-anechoic chamber at a distance of 3m	2.7 dB
Horizontally polarized Radiated disturbances from 18GHz~40GHz in a semi-anechoic chamber at a distance of 3m	2.7 dB
Radiated disturbances from 9kHz~30MHz in a semi-anechoic chamber at a distance of 3m	3.53 dB
Emission on the Band Edge Test	3.64 dB
Minimum 6 dB Bandwidth	0.85 dB
Maximum Peak Conducted Output Power	0.42 dB
Power Spectral Density	0.85 dB
Emissions In Non-Restricted Frequency Bands	0.85 dB
AC Power Line Conducted Emission	2.47 dB