

TEST REPORT

Reference No...... : WTD21X05044191W
FCC ID : 2AEPISILVERMAXPRO
Applicant : COLOMBIANA DE COMERCIO S.A.
Address : Car. 43E No 8-71, Medellin, Colombia
Product Name : Smartphone
Test Model. : Silver Max Pro
FCC Part 2.1093
Standards : ANSI / IEEE C95.1 : 2005+A1:2010
ANSI / IEEE C95.3 : 2002(R2008)
IEEE 1528 :2013
Date of Receipt sample : May.10, 2021
Date of Test..... : May.10, 2021 to May.31, 2021
Date of Issue : Jun.01, 2021
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308


Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:







Jack Sun / Project Engineer

Lion Cai / RF Manager

Silin Chen / Manager

TABLE OF CONTENTS

1. General Information	3
1.1 Product Description for Equipment Under Test (EUT).....	3
1.2 Test Standards	5
1.3 Test Methodology	5
1.4 Test Facility	5
2. Summary of Test Results	6
3. Specific Absorption Rate (SAR).....	7
3.1 Introduction.....	7
3.2 SAR Definition	7
4. SAR Measurement System.....	8
4.1 The Measurement System	8
4.2 Probe.....	8
4.3 Probe Calibration Process.....	10
4.4 Phantom	11
4.5 Device Holder.....	11
4.6 Test Equipment List.....	12
5. Tissue Simulating Liquids.....	13
5.1 Composition of Tissue Simulating Liquid.....	13
5.2 Tissue Dielectric Parameters for Head and Body Phantoms.....	14
5.3 Tissue Calibration Result.....	15
6. SAR Measurement Evaluation	16
6.1 Purpose of System Performance Check.....	16
6.2 System Setup	16
6.3 Validation Results.....	18
7. EUT Testing Position	19
7.1 Define Two Imaginary Lines on The Handset.....	19
7.2 Cheek Position	20
7.3 Tilted Position	20
7.4 Body Position	21
7.5 EUT Antenna Position	22
7.6 EUT Testing Position.....	23
8. SAR Measurement Procedures.....	24
8.1 Measurement Procedures	24
8.2 Spatial Peak SAR Evaluation	24
8.3 Area & Zoom Scan Procedures.....	25
8.4 Volume Scan Procedures.....	25
8.5 SAR Averaged Methods	25
8.6 Power Drift Monitoring.....	25
9. SAR Test Result	26
9.1 Conducted RF Output Power	26
9.2 Test Results for Standalone SAR Test.....	29
10. Measurement Uncertainty	33
10.1 Uncertainty for EUT SAR Test.....	33
10.2 Uncertainty for System Performance Check.....	34
Annex A. Plots of System Performance Check	36
Annex B. Plots of SAR Measurement	44
Annex C. Calibration Certificate	60

1. General Information

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: COLOMBIANA DE COMERCIO S.A.
Address of applicant: Car. 43E No 8-71, Medellin, Colombia

Manufacturer: COOSEA GROUP (HK) COMPANY LIMITED LIMITED
Address of manufacturer: UNIT 5-6,16F.,MULTIFIELD PLAZA 3-7A PRAT AVENUE
TSIM SHA TSUI KL, HONG KONG

General Description of EUT:	
Product Name:	Smartphone
Brand Name:	Kalley
Model No.:	Silver Max Pro
Adding Model(s):	/
Rated Voltage:	DC3.87V by Battery
Battery:	4900mAh
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT:	
WIFI(5G)	
Support Standards:	802.11a, 802.11n-HT20/40,802.11ac-HT20/40/80
Frequency Range:	Band 1: 5180-5240MHz,Band 2: 5260-5320MHz, Band 3: 5500-5700MHz,Band 4: 5745-5825MHz
RF Output Power:	14.97dBm (Conducted)
Type of Modulation:	OFDM
Type of Antenna:	Internal permanent antenna
Antenna Gain:	-2.5dBi
Note: This report only evaluates 5G WIFI SAR	

1.2 Test Standards

ANSI/IEEE C95.1-2005, ANSI / IEEE C95.3 :2002, IEEE 1528-2013, KDB 447498 D01 v06, KDB 648474 D04 v01r03, KDB 248227 D01 v02r02, KDB 941225 D01 v03r01, KDB 941225 D05 v02r05 , and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02.

The objective is to determine compliance with FCC Part 2.1093 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02. The public notice KDB 447498 D01 v06 for Mobile and Portable Devices RF Exposure Procedure also.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010. Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

2. Summary of Test Results

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Head SAR	Body-worn (10mm Gap)	SAR _{1g} Limit (W/kg)
	Maximum SAR _{1g} (W/kg)	Maximum SAR _{1g} (W/kg)	
WLAN 5G	0.77	0.44	1.6

Remark:

*The highest reported SAR values for head, body-worn, are **0.77W/kg, 0.44W/kg**, respectively.*

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedure specified in IEEE 1528-2013 and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02

3. Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement System

4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

4.2 Probe


For the measurements the Specific Dosimetric E-Field Probe SSE2 SN 45/15 EPGO280 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Probe Length: 330 mm
- Length of Individual Dipoles: 4.5 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter : 5 mm

Waltek Testing Group (Shenzhen) Co., Ltd.
[Http://www.waltek.com.cn](http://www.waltek.com.cn)

- Distance between dipoles / probe extremity: 2.7mm
 - Probe linearity: <0.25 dB
 - Axial Isotropy: <0.25 dB
 - Spherical Isotropy: <0.50 dB
 - Calibration range: 700 to 3000MHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 62209-1 annexe technique using reference guide at the five frequencies.

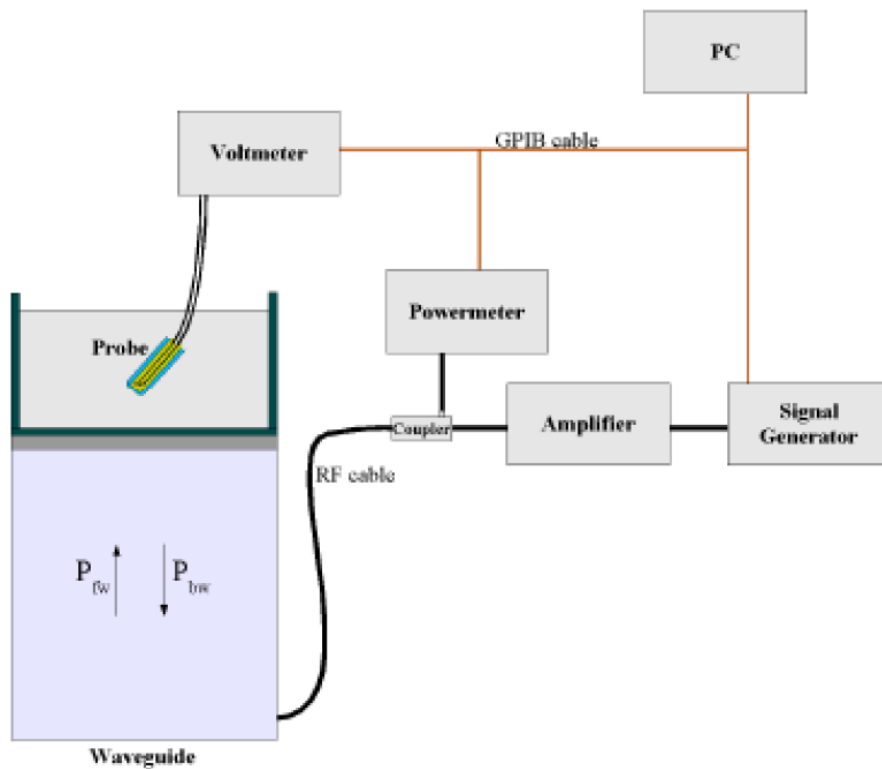

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) c^{(2z/\delta)}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

δ = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

4.3 Probe Calibration Process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm².

Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$\text{SAR} = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 °.

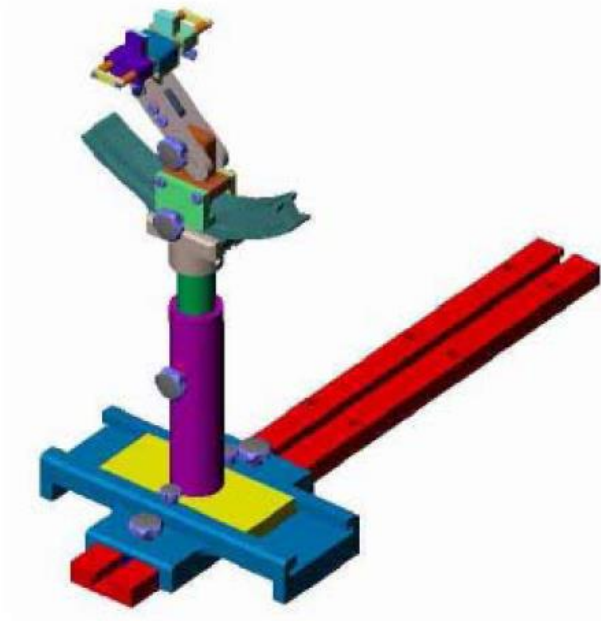

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005


4.6 Test Equipment List

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
E-Field Probe	MVG	SSE5	SN 09/13 EP168	2020-05-22	2022-05-21
E-Field Probe	MVG	SSE2	SN 45/15 EPGO280	2020-07-03	2022-07-02
835MHz Dipole	MVG	SID835	SN 47/12 DIP 0G835-204	2020-03-11	2022-03-10
1900MHz Dipole	MVG	SID1900	SN 47/12 DIP 1G900-207	2020-03-11	2022-03-10
2450MHz Dipole	MVG	SID2450	SN 13/15 DIP 2G450-364	2020-03-11	2022-03-10
2600MHz Dipole	MVG	SID2600	SN 13/15 DIP 2G600-365	2020-03-11	2022-03-10
5 GHz Waveguide	MVG	SWG5500	SN 49/16 WGA45	2020-07-03	2022-07-02
Dielectric Probe	SATIMO	SCLMP	SN 47/12 OCPG49	2020-03-11	2022-03-10
SAM Phantom	SATIMO	SAM	SN/ 47/12 SAM95	N/A	N/A
Multi Meter	Keithley	Keithley 2000	4006367	2021-03-27	2022-03-26
Power meter	Keithley	3500	JC-2017-09-001	2021-03-27	2022-03-26
Power meter	Keithley	3500	JC-2017-09-001	2021-03-27	2022-03-26
Power Sensor	Agilent	11636B	JC-2017-10-002	2021-03-27	2022-03-26
Signal Generator	Rohde & Schwarz	SMR20	100047	2021-03-27	2022-03-26
Universal Tester	Rohde & Schwarz	CMU200	112315	2021-03-27	2022-03-26
Communications Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
Network Analyzer	HP	8753C	SEMT-1064	2021-03-27	2022-03-26
Directional Couplers	Agilent	778D	20160	2021-03-27	2022-03-26

5. Tissue Simulating Liquids

5.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.

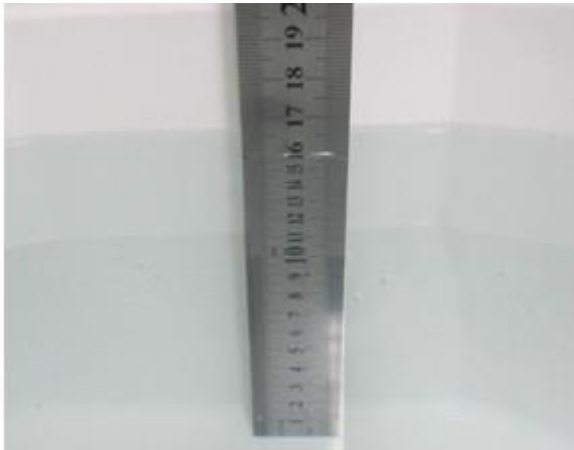

Liquid Height for Head SAR



Liquid Height for Body SAR

The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	Sugar (%)	HEC (%)	Preventol (%)	DGBE (%)
Head						
2450	55.0	0.1	0	0	0	44.9

Frequency (MHz)	Water (%)	Hexyl Carbitol (%)	Triton X-100 (%)
Head			
5000-6000	65.52	17.24	17.24

5.2 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Target Frequency (MHz)	Head	
	Conductivity (σ)	Permittivity (ϵ_r)
150	0.76	52.3
300	0.87	45.3
450	0.87	43.5
750	0.89	41.9
835	0.90	41.5
900	0.97	41.5
915	0.98	41.5
1450	1.20	40.5
1610	1.29	40.3
1750	1.37	40.1
1800-2000	1.40	40.0
2450	1.80	39.2
3000	2.40	38.5
5200	4.66	36.0
5300	35.9	4.76
5600	5.07	35.5
5800	5.27	35.3

5.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and an Agilent Network Analyzer.

Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Head Tissue Simulating Liquid									
Freq. MHz.	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading (σ)	Target (σ)	Delta (%)	Reading (ϵ_r)	Target (ϵ_r)	Delta (%)		
5200	22.5	4.80	4.66	3.00	37.11	36.0	3.08	±5	2021-05-21
5400	22.5	4.94	4.86	1.65	36.52	35.8	2.01	±5	2021-05-21
5600	22.5	5.12	5.07	0.99	35.34	35.5	-0.45	±5	2021-05-21
5800	22.5	5.31	5.27	0.76	34.92	35.3	-1.08	±5	2021-05-21


6. SAR Measurement Evaluation

6.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

6.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835MHz, 1800MHz, 1900MHz, 2450MHz, 2600MHz, and 5GHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

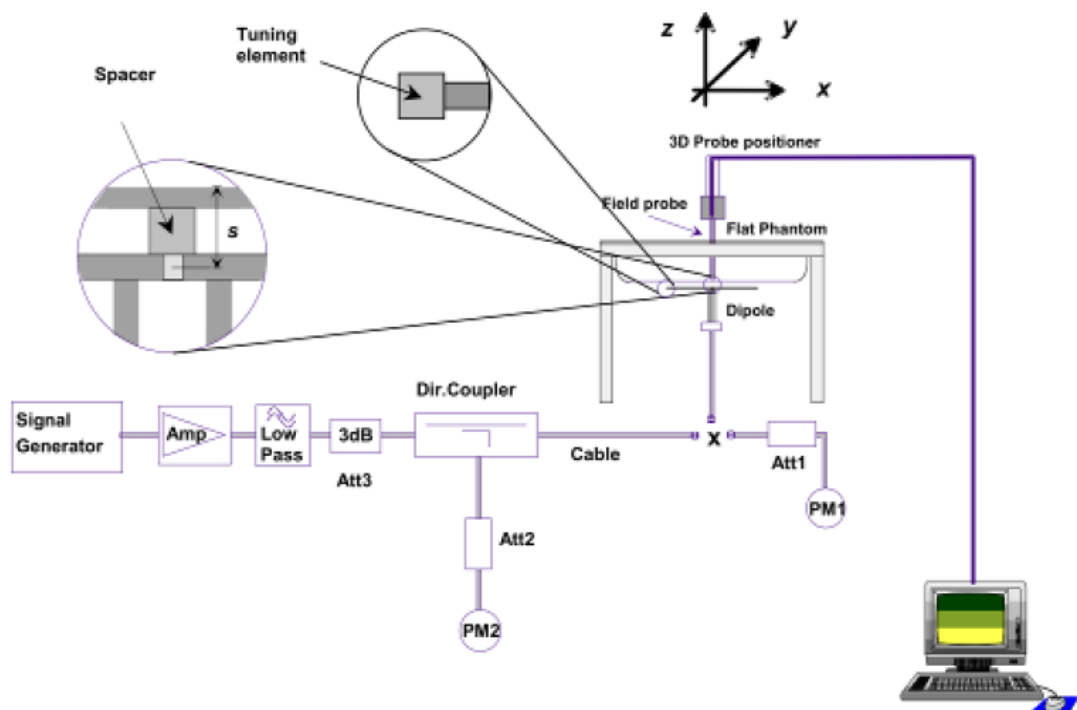

System Verification Setup Block Diagram



Setup Photo of Dipole Antenna

The output power on dipole port must be calibrated to 24 dBm(250 mW) before dipole is connected.
The output power on 5 GHz Waveguide must be calibrated to 20 dBm (100mW) before 5 GHz Waveguide is connected.

6.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. Table 6.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency	Liquid	Power (mw)	Targeted SAR1g	Measured SAR1g	Normalized SAR1g	Tolerance	Date
5200	Head	100	159.0	16.746	167.46	5.32	2021-05-21
5400	Head	100	166.4	17.481	174.81	5.05	2021-05-21
5600	Head	100	173.8	17.604	176.04	1.29	2021-05-21
5800	Head	100	181.2	17.96	179.6	-0.88	2021-05-21

Remark: Referring to IEEE 1528-2013, Section 8.2, The system check shall be performed at a test frequency that is within $\pm 10\%$ or ± 100 MHz of the compliance test mid-band frequency, so the 1750 MHz system verification is made of 1800MHz Dipole.

Targeted and Measurement SAR

Please refer to Annex A for the plots of system performance check.

7. EUT Testing Position

7.1 Define Two Imaginary Lines on The Handset

- (a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

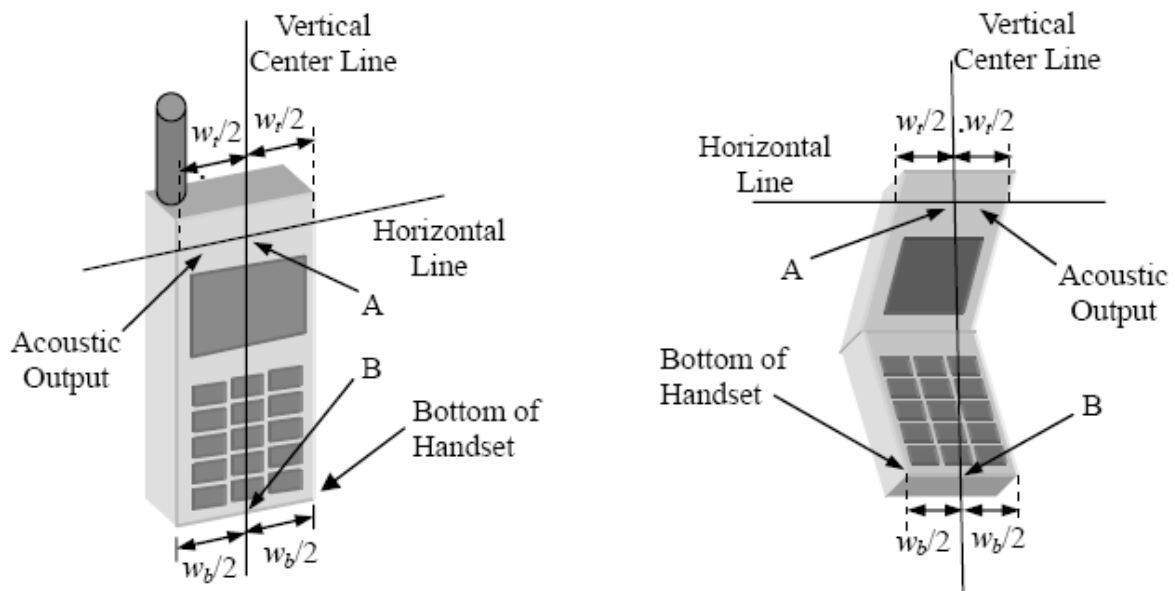


Illustration for Handset Vertical and Horizontal Reference Lines

7.2 Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 7.2).

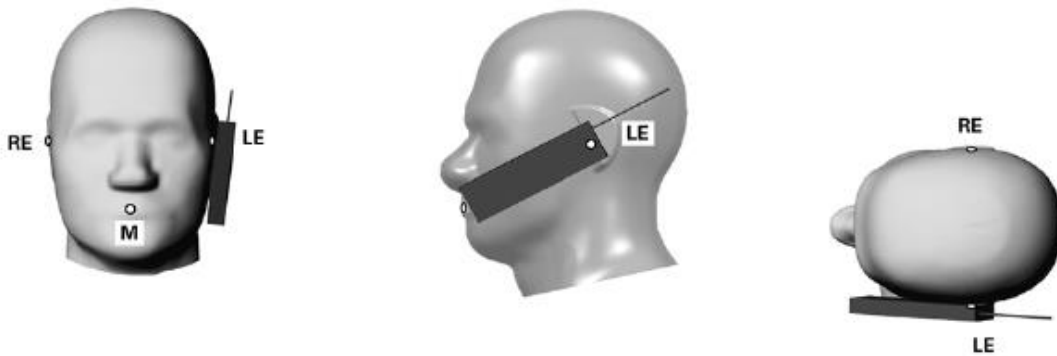


Illustration for Cheek Position

7.3 Tilted Position

- (a) To position the device in the “cheek” position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 7.3).

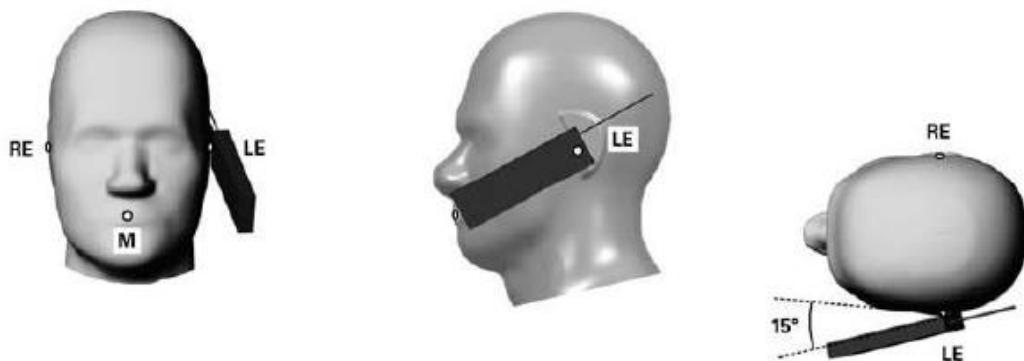


Illustration for Tilted Position

7.4 Body Position

- (a) To position the device parallel to the phantom surface with each side.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 10mm.


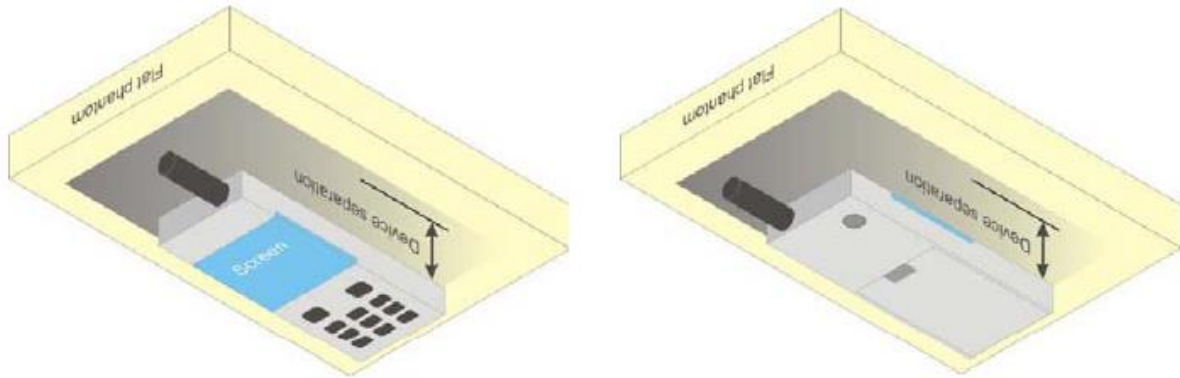


Illustration for Body Position

7.5 EUT Antenna Position

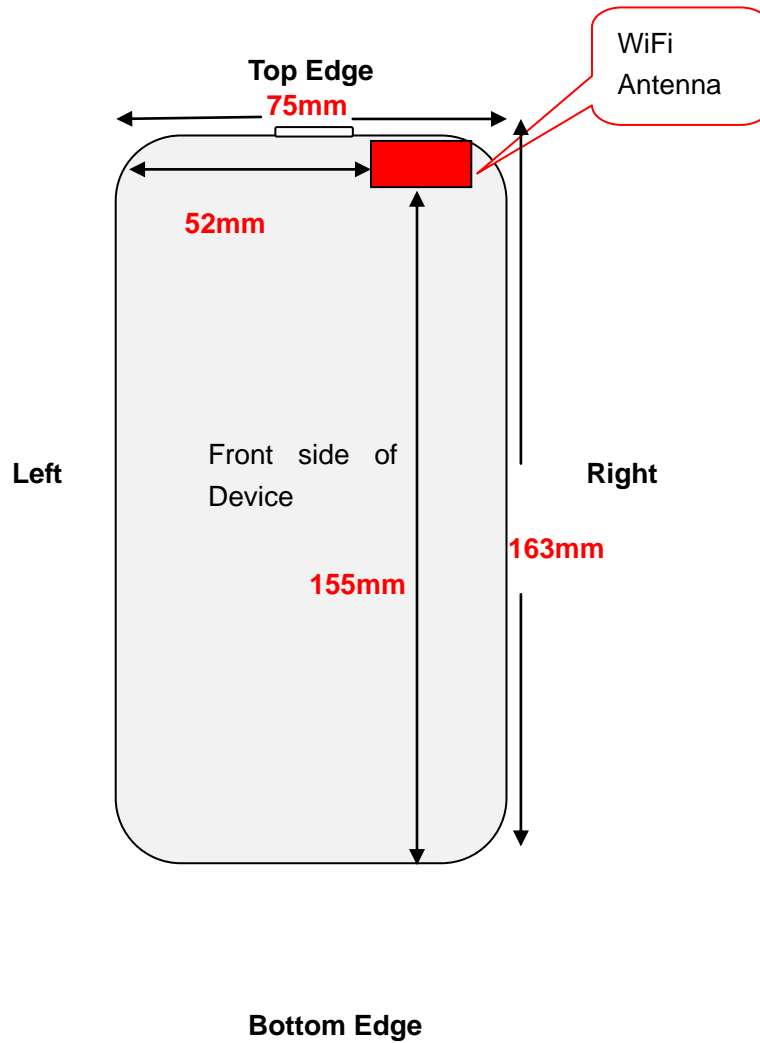

Test position consideration:

Distance of EUT antenna-to-edge/surface(mm), Test distance:10mm						
Antennas	Back side	Front side	Left Edge	Right Edge	Top Edge	Bottom Edge
WLAN	<25	<25	52	<25	<25	155

7.6 EUT Testing Position

Head/Body mode SAR assessments are required for this device. This EUT was tested in different positions for different SAR test modes, more information as below:

Head SAR tests				
Antennas	Right Cheek	Left Cheek	Right Tilted	Left Tilted
WLAN	Yes	Yes	Yes	Yes

Body-worn SAR tests, Test distance: 10mm		
Antennas	Front	Back
WLAN	Yes	Yes

Hotspot SAR tests, Test distance: 10mm						
Antennas	Front	Back	Left Side	Right Side	Top Side	Bottom Side
WLAN	Yes	Yes	No	Yes	Yes	No

Remark:

- Referring to KDB 941225 D06, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test separation distances is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
- Referring to KDB 648474 D04 Handset SAR v01r03, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$

Please refer to Annex D for the EUT test setup photos.

8. SAR Measurement Procedures

8.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

8.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.5 SAR Averaged Methods

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

9. SAR Test Result

9.1 Conducted RF Output Power

WLAN(5.2G) – Conducted Power				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11a	CH 36	5180	14.22	14.5
	CH 40	5200	14.38	14.5
	CH 48	5240	14.29	14.5
802.11n (HT20)	CH 36	5180	13.82	14.5
	CH 40	5200	14.02	14.5
	CH 48	5240	14.23	14.5
802.11n (HT40)	CH 38	5190	13.44	14.0
	CH 46	5230	13.81	14.0
802.11ac (20MHz)	CH 36	5180	13.95	14.0
	CH 40	5200	13.92	14.0
	CH 48	5240	14.32	14.5
802.11ac (40MHz)	CH 38	5190	13.47	14.0
	CH 46	5230	13.93	14.0
802.11ac (80MHz)	CH42	5210	13.76	14.0

WLAN(5.3G) – Conducted Power				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11a	CH 52	5260	14.28	15.0
	CH 56	5280	14.20	15.0
	CH 64	5320	14.55	15.0
802.11n (20MHz)	CH 52	5260	13.88	14.5
	CH 56	5280	13.90	14.5
	CH 64	5320	14.04	14.5
802.11n (40MHz)	CH 54	5270	14.06	14.5
	CH 62	5310	14.31	14.5
802.11ac (20MHz)	CH 52	5260	14.01	14.5
	CH 56	5280	14.06	14.5
	CH 64	5320	14.10	14.5
802.11ac (40MHz)	CH 54	5270	14.11	14.5
	CH 62	5310	14.33	14.5
802.11ac (80MHz)	CH58	5290	14.32	14.5

WLAN(5.6G) – Conducted Power				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11a	CH 100	5500	14.37	14.5
	CH 120	5600	14.24	14.5
	CH 140	5700	14.25	14.5
802.11n (20MHz)	CH 100	5500	14.23	14.5
	CH 120	5600	14.05	14.5
	CH 140	5700	14.11	14.5
802.11n (40MHz)	CH 102	5510	14.59	15.0
	CH118	5590	14.68	15.0
	CH 134	5670	14.35	15.0
802.11ac (20MHz)	CH 100	5500	14.39	14.5
	CH 120	5600	14.13	14.5
	CH 140	5700	14.24	14.5
802.11ac (40MHz)	CH 102	5510	14.44	14.5
	CH118	5590	14.21	14.5
	CH 134	5670	14.41	14.5
802.11ac (80MHz)	CH 106	5530	14.97	15.0
	CH122	5610	14.20	15.0

WLAN(5.8G) – Conducted Power				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11a	CH 149	5745	14.24	14.5
	CH 157	5785	14.46	14.5
	CH 165	5825	14.34	14.5
802.11n (20MHz)	CH 149	5745	14.36	14.5
	CH 157	5785	14.26	14.5
	CH 165	5825	14.25	14.5
802.11n (40MHz)	CH 151	5755	14.33	14.5
	CH 159	5795	14.40	14.5
802.11ac (20MHz)	CH 149	5745	14.52	14.5
	CH 157	5785	14.42	14.5
	CH 165	5825	14.22	14.5
802.11ac (40MHz)	CH 151	5755	14.47	14.5
	CH 159	5795	14.43	14.5
802.11ac (80MHz)	CH155	5775	14.53	14.5

Remark:

1. Per KDB 248227 D01 v02r02, When multiple channel bandwidth configurations in a frequency band have the same Waltek Testing Group (Shenzhen) Co., Ltd.
[Http://www.waltek.com.cn](http://www.waltek.com.cn)

specified maximum output power, the initial test configuration is determined by applying the following steps sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations in a frequency band with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

9.2 Test Results for Standalone SAR Test

Head SAR

WLAN 5GHz(Band 1) – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11a	Right Cheek	40	5200	14.38	14.5	1.028	0.198	0.20
	802.11a	Right Tilted	40	5200	14.38	14.5	1.028	0.105	0.11
1	802.11a	Left Cheek	40	5200	14.38	14.5	1.028	0.245	0.25
	802.11a	Left Tilted	40	5200	14.38	14.5	1.028	0.142	0.15

WLAN 5GHz(Band 2) – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11a	Right Cheek	64	5320	14.55	15.0	1.109	0.294	0.33
	802.11a	Right Tilted	64	5320	14.55	15.0	1.109	0.121	0.13
2	802.11a	Left Cheek	64	5320	14.55	15.0	1.109	0.372	0.41
	802.11a	Left Tilted	64	5320	14.55	15.0	1.109	0.104	0.12

WLAN 5GHz(Band 3) – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11ac (80MHz)	Right Cheek	106	5530	14.97	15.0	1.007	0.385	0.39
	802.11ac (80MHz)	Right Tilted	106	5530	14.97	15.0	1.007	0.142	0.14
3	802.11ac (80MHz)	Left Cheek	106	5530	14.97	15.0	1.007	0.55	0.55
	802.11ac (80MHz)	Left Tilted	106	5530	14.97	15.0	1.007	0.123	0.12

WLAN 5GHz(Band 4) – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11ac (80MHz)	Right Cheek	155	5775	14.53	15.0	1.114	0.673	0.75
	802.11ac (80MHz)	Right Tilted	155	5775	14.53	15.0	1.114	0.143	0.16
4	802.11ac (80MHz)	Left Cheek	155	5775	14.53	15.0	1.114	0.695	0.77
	802.11ac (80MHz)	Left Tilted	155	5775	14.53	15.0	1.114	0.125	0.14

Remark: Per KDB 447498 D01 v06, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

Body-worn SAR

WLAN 5GHz(Band 1) –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
5	802.11a	Back Side	40	5200	14.38	14.5	1.028	0.225	0.23
	802.11a	Front Side	40	5200	14.38	14.5	1.028	0.147	0.15

WLAN 5GHz(Band 2) –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
6	802.11a	Back Side	64	5320	14.55	15.0	1.109	0.295	0.33
	802.11a	Front Side	64	5320	14.55	15.0	1.109	0.147	0.16

WLAN 5GHz(Band 3) –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
7	802.11ac (80MHz)	Back Side	106	5530	14.97	15.0	1.007	0.339	0.34
	802.11ac (80MHz)	Front Side	106	5530	14.97	15.0	1.007	0.187	0.19

WLAN 5GHz(Band 4) –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
8	802.11ac (80MHz)	Back Side	155	5775	14.53	15.0	1.114	0.391	0.44
	802.11ac (80MHz)	Front Side	155	5775	14.53	15.0	1.114	0.27	0.30

Hotspot SAR

WLAN 5GHz(Band 1) –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
9	802.11a	Back Side	40	5200	14.38	14.5	1.028	0.225	0.23
	802.11a	Front Side	40	5200	14.38	14.5	1.028	0.147	0.15
	802.11a	Right side	40	5200	14.38	14.5	1.028	0.132	0.14
	802.11a	Top Side	40	5200	14.38	14.5	1.028	0.155	0.16

WLAN 5GHz(Band 2) –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
10	802.11a	Back Side	64	5320	14.55	15.0	1.109	0.295	0.33
	802.11a	Front Side	64	5320	14.55	15.0	1.109	0.147	0.16
	802.11a	Right side	64	5320	14.55	15.0	1.109	0.161	0.18
	802.11a	Top Side	64	5320	14.55	15.0	1.109	0.206	0.23

WLAN 5GHz(Band 3) –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
11	802.11ac (80MHz)	Back Side	106	5530	14.97	15.0	1.007	0.339	0.34
	802.11ac (80MHz)	Front Side	106	5530	14.97	15.0	1.007	0.187	0.19
	802.11ac (80MHz)	Right side	106	5530	14.97	15.0	1.007	0.158	0.16
	802.11ac (80MHz)	Top Side	106	5530	14.97	15.0	1.007	0.229	0.23

WLAN 5GHz(Band 4) –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
12	802.11ac (80MHz)	Back Side	155	5775	14.53	15.0	1.114	0.391	0.44
	802.11ac (80MHz)	Front Side	155	5775	14.53	15.0	1.114	0.27	0.30
	802.11ac (80MHz)	Right side	155	5775	14.53	15.0	1.114	0.149	0.17
	802.11ac (80MHz)	Top Side	155	5775	14.53	15.0	1.114	0.28	0.31

Remark: Per KDB 447498 D01 v06, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

10. Measurement Uncertainty

10.1 Uncertainty for EUT SAR Test

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{Cp})^{1/2}$	$(1_{Cp})^{1/2}$	1.02	1.02	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions – Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Test Sample Related									
Test sample positioning	E.4.2	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1	5.00	N	1	1	1	5.00	5.00	
Output power Variation - SAR drift measurement	E.2.9	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	∞
SAR scaling	E6.5	0.0	R	$\sqrt{3}$	1	1	0.0	0.0	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E3.2	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	∞

Liquid conductivity - deviation from target value	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	∞
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	∞
Combined Standard Uncertainty			RSS				12.98	12.53	
Expanded Uncertainty (95% Confidence interval)			K=2				25.32	24.43	

10.2 Uncertainty for System Performance Check

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{-Cp})^{1/2}$	$(1_{-Cp})^{1/2}$	1.02	1.02	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	E.2.5	0	R	$\sqrt{3}$	0	0	0.0	0.0	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions – Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	N-1

Input power and SAR drift measurement	8,6.6.2	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	∞
Deviation of experimental dipole from numerical dipole	E.6.4	5.5	R	$\sqrt{3}$	1	1	3.20	3.20	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E3.2	2.0	R	$\sqrt{3}$	1	0.84	1.10	1.10	∞
Liquid conductivity - deviation from target value	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				12.00	11.50	
Expanded Uncertainty (95% Confidence interval)			K=2				23.39	22.43	

Annex A. Plots of System Performance Check

MEASUREMENT 1

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 2.44; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results



Frequency (MHz)	5200.000000
Relative Permittivity (real part)	37.112911
Conductivity (S/m)	4.803426
Power Variation (%)	-0.940000
Ambient Temperature	22.5
Liquid Temperature	22.5

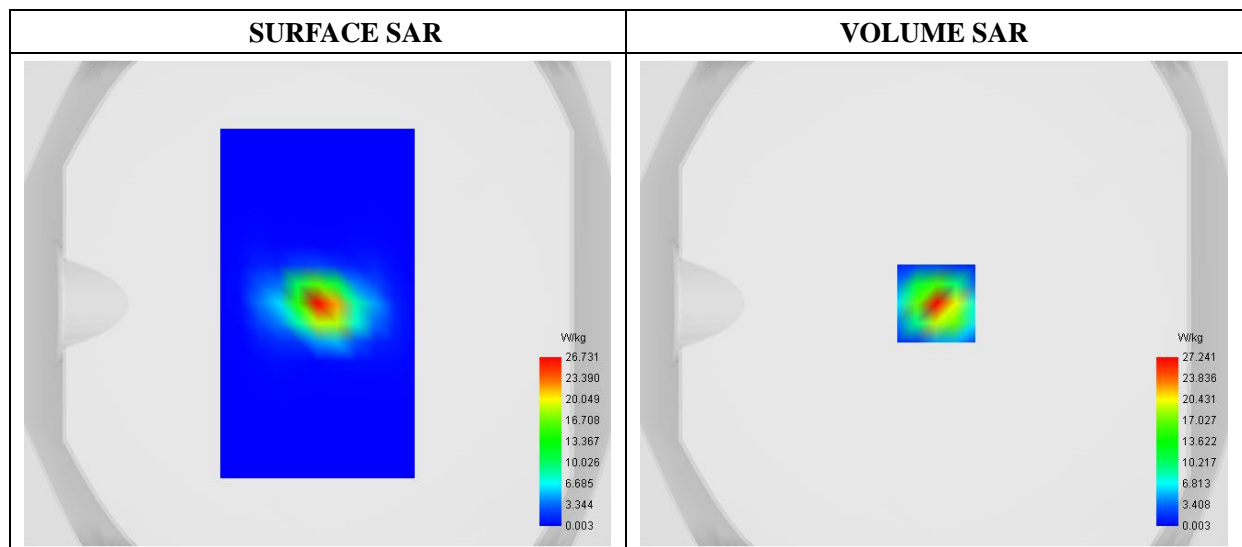

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	5.910334
SAR 1g (W/Kg)	16.746226

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
SAR (W/Kg)	41.7264	27.2408	6.5746	1.6234	0.3765	0.0793	0.0129

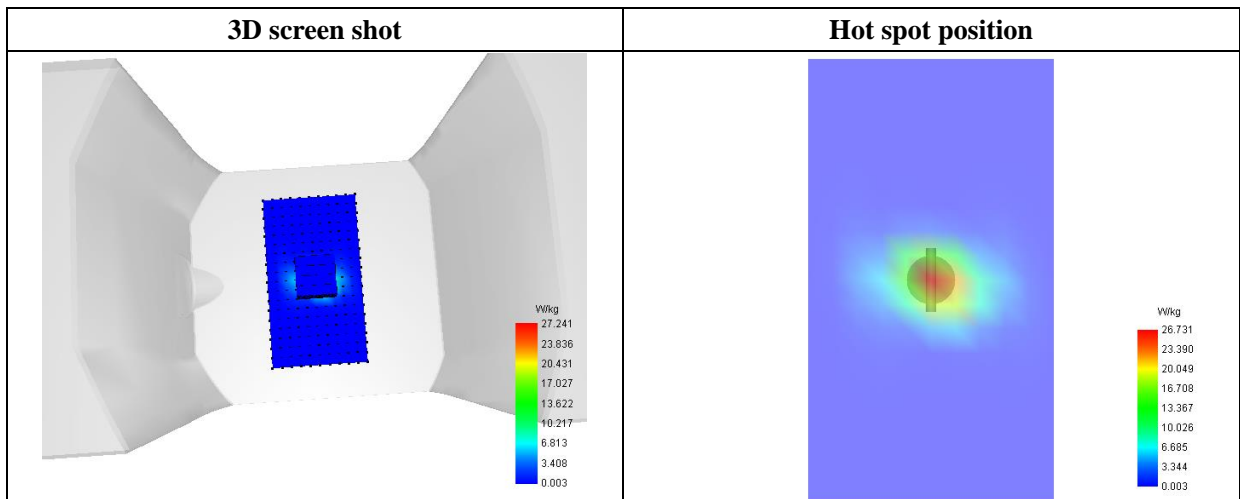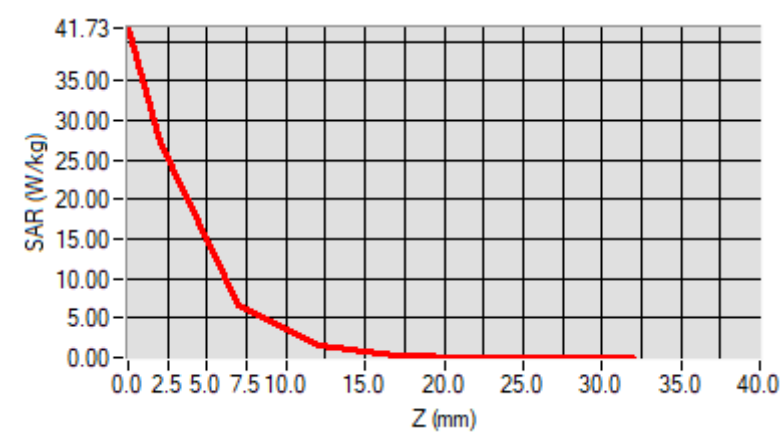

MEASUREMENT 2

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 2.68; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5400
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results



Frequency (MHz)	5400.000000
Relative Permittivity (real part)	36.520839
Conductivity (S/m)	4.940192
Power Variation (%)	1.020000
Ambient Temperature	22.5
Liquid Temperature	22.5

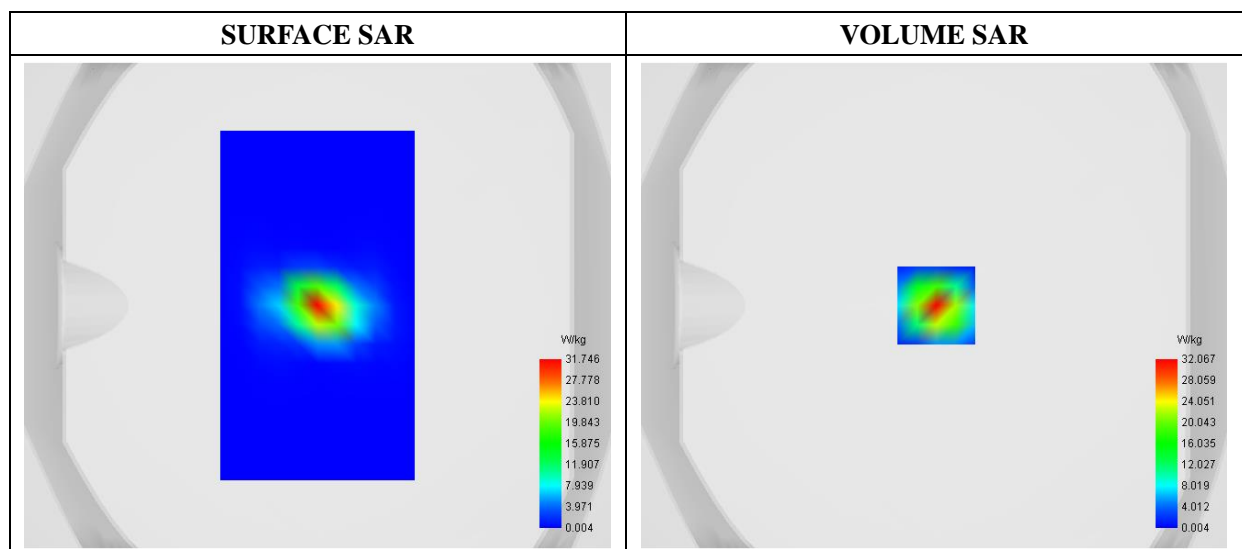

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	6.047588
SAR 1g (W/Kg)	17.481175

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
SAR (W/Kg)	49.8193	32.0669	7.0244	1.5969	0.3410	0.0635	0.0070

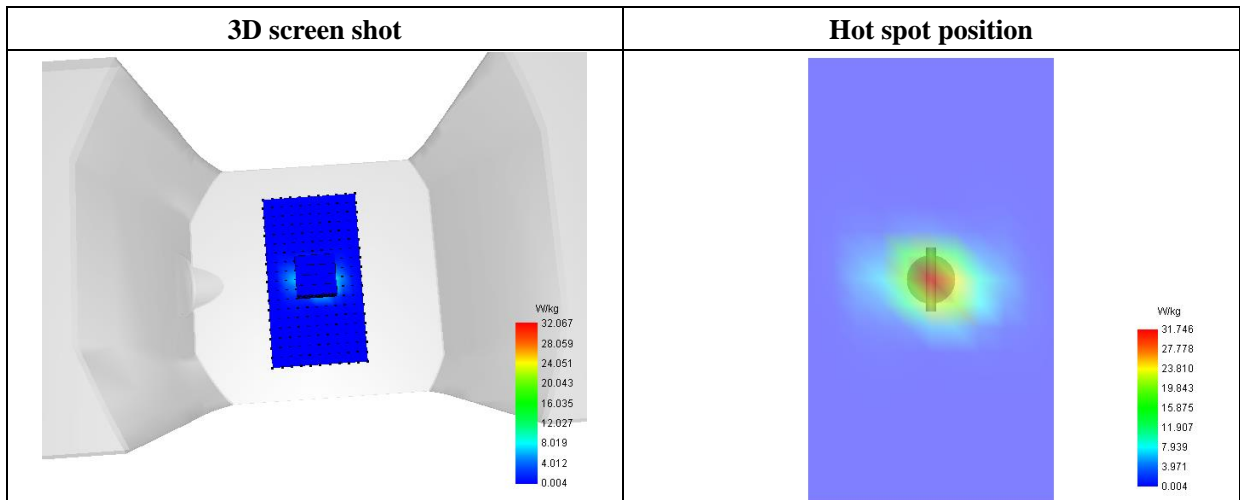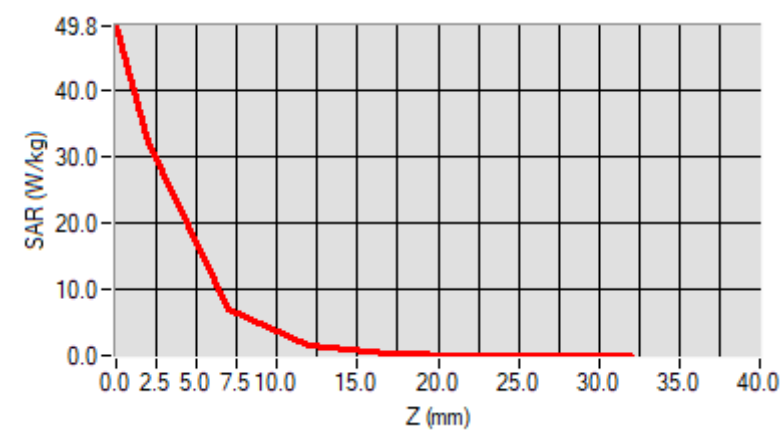

MEASUREMENT 3

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 2.72; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5600
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results



Frequency (MHz)	5600.000000
Relative Permittivity (real part)	35.341205
Conductivity (S/m)	5.120357
Power Variation (%)	-0.640000
Ambient Temperature	22.5
Liquid Temperature	22.5

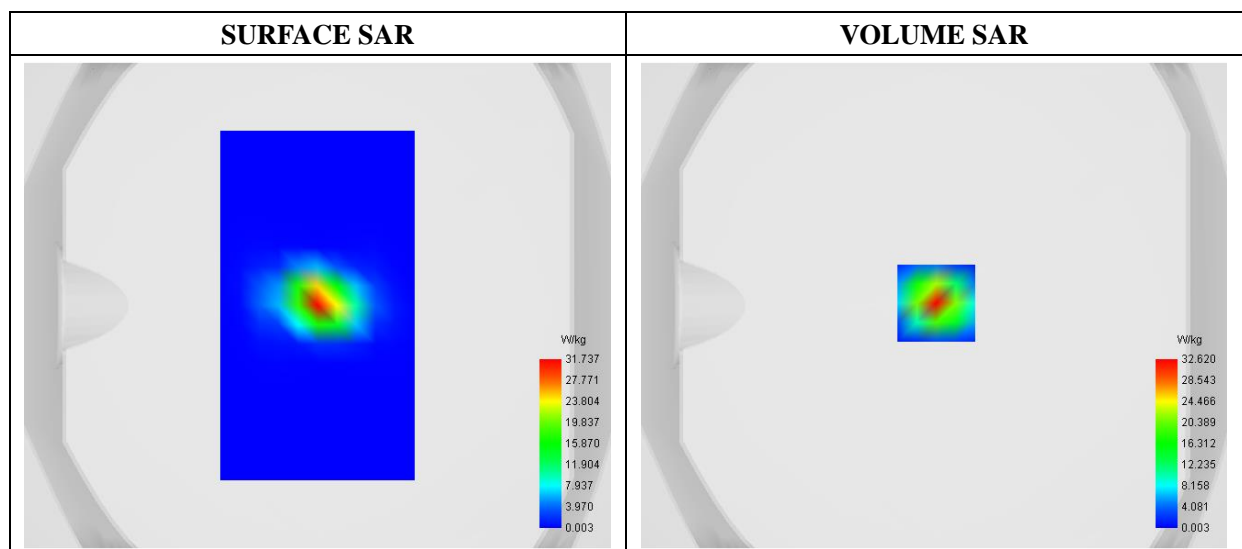

Maximum location: X=1.00, Y=1.00

SAR 10g (W/Kg)	5.922791
SAR 1g (W/Kg)	17.604052

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
SAR (W/Kg)	51.2061	32.6198	6.6166	1.3486	0.2638	0.0509	0.0050

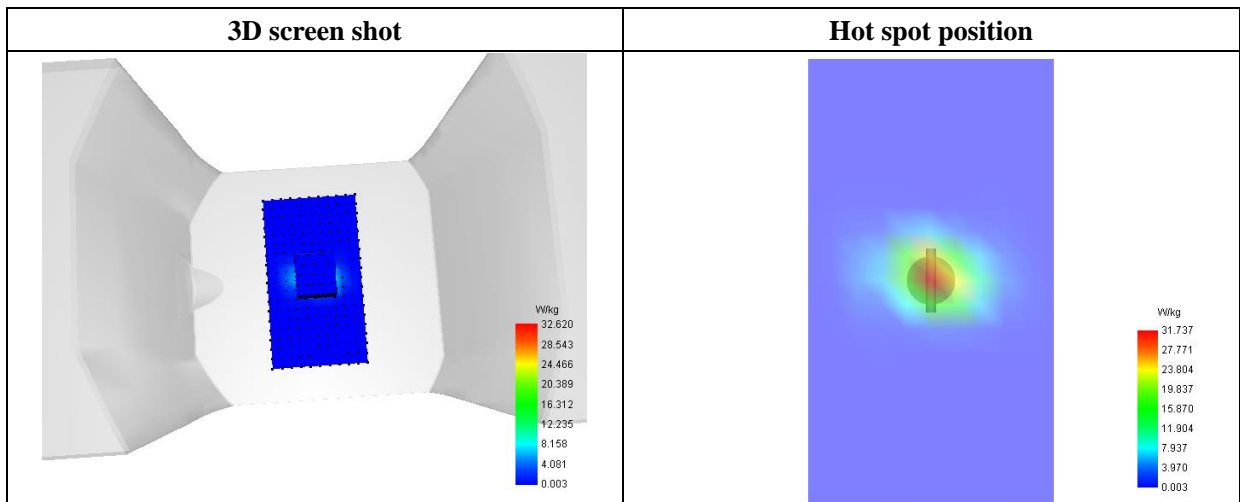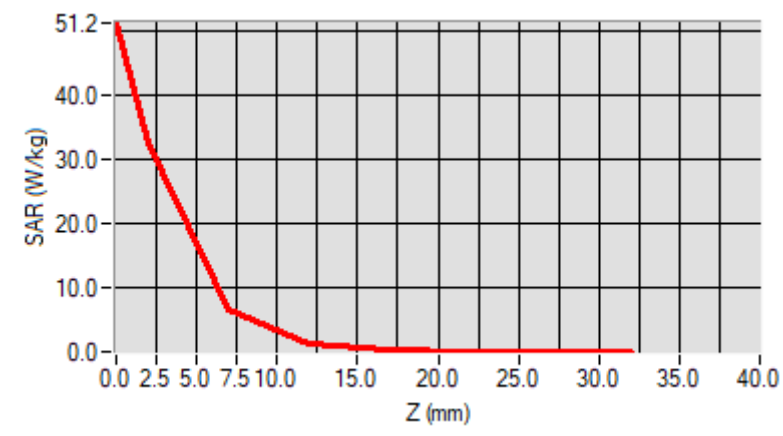

MEASUREMENT 4

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 2.52; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results



Frequency (MHz)	5800.000000
Relative Permittivity (real part)	34.923814
Conductivity (S/m)	5.312705
Power Variation (%)	-1.640000
Ambient Temperature	22.5
Liquid Temperature	22.5

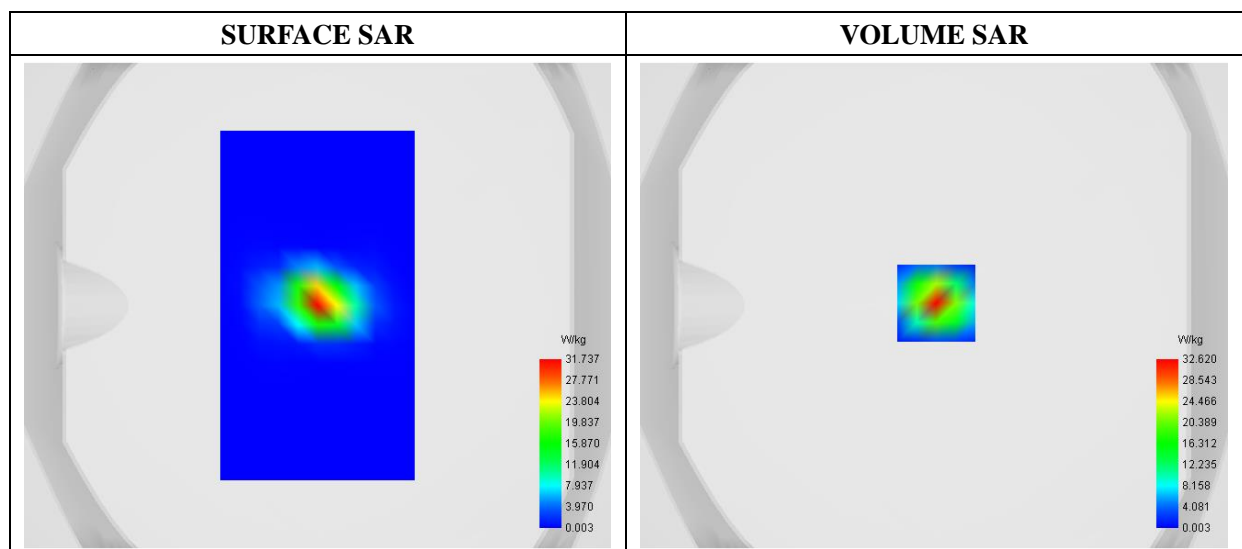

Maximum location: X=1.00, Y=1.00

SAR 10g (W/Kg)	5.983506
SAR 1g (W/Kg)	17.960742

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
SAR (W/Kg)	51.2061	32.6198	6.6166	1.3486	0.2638	0.0509	0.0050

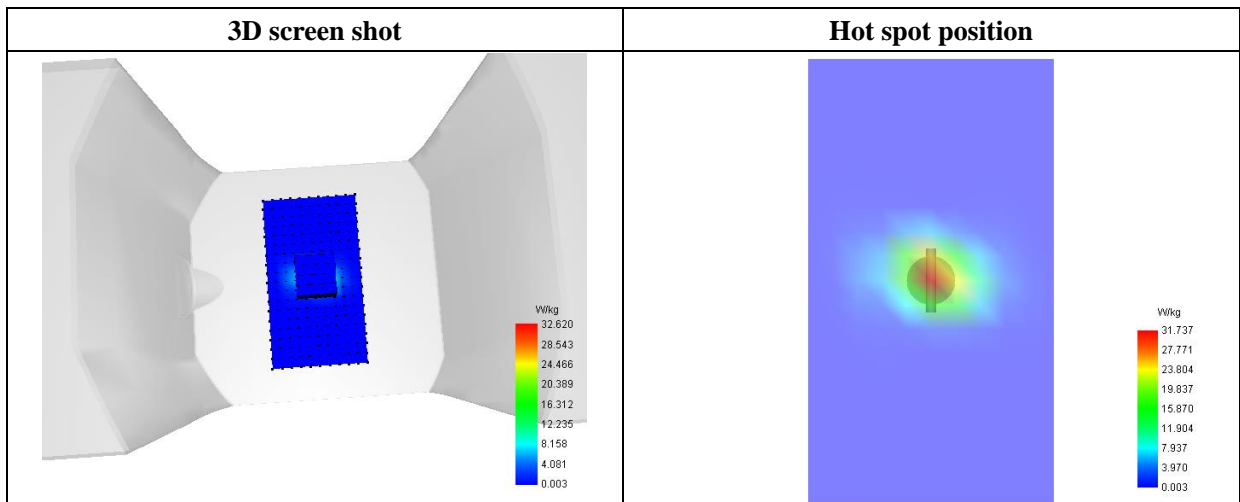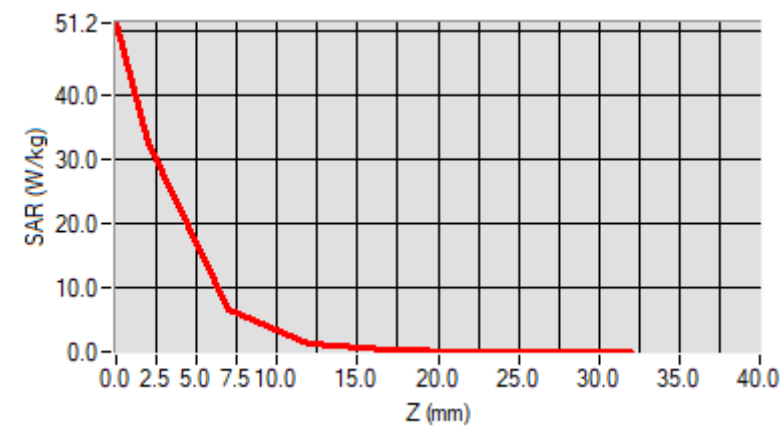

Annex B. Plots of SAR Measurement

MEASUREMENT 1

Type: Phone measurement (Complete)

Date of measurement: 2021-05-21

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 2.44; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Left Head
Device Position	Cheek
Band	WiFi(5.2GHz)_ 802.11a
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative Permittivity (real part)	37.023869
Conductivity (S/m)	4.827611
Power Variation (%)	-1.150000
Ambient Temperature	22.5
Liquid Temperature	22.5

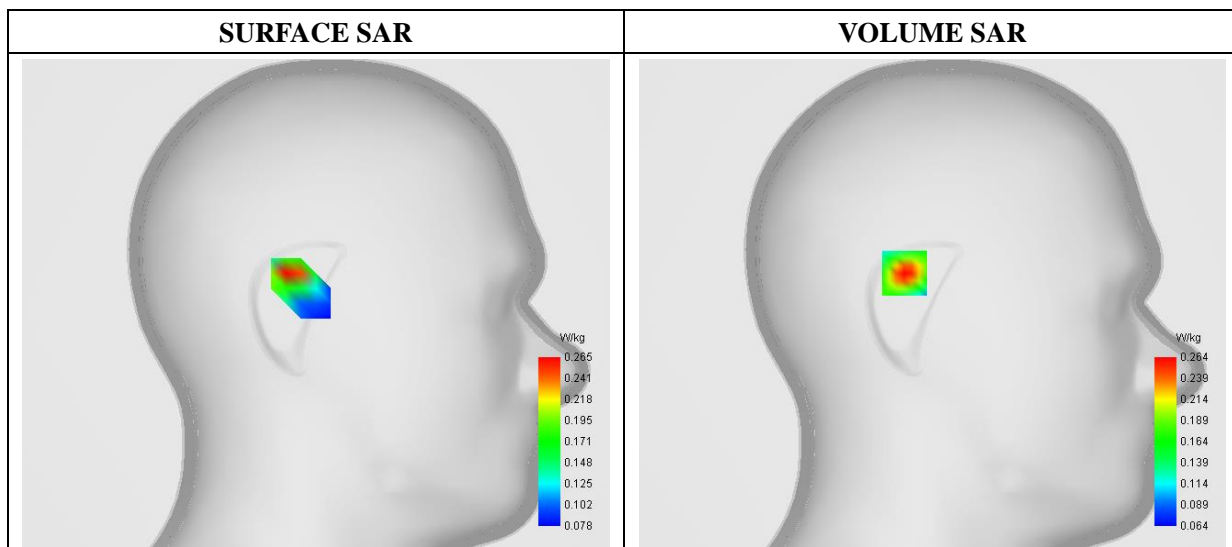


Maximum location: X=15.00, Y=16.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.140858
SAR 1g (W/Kg)	0.245340

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.3589	0.2641	0.1970	0.1505	0.1206	0.1019	0.0908	0.0846	0.0815	0.0815

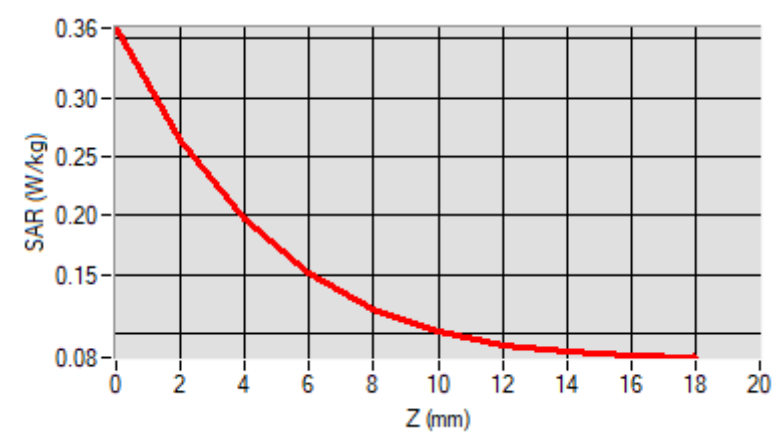

F. 3D Image

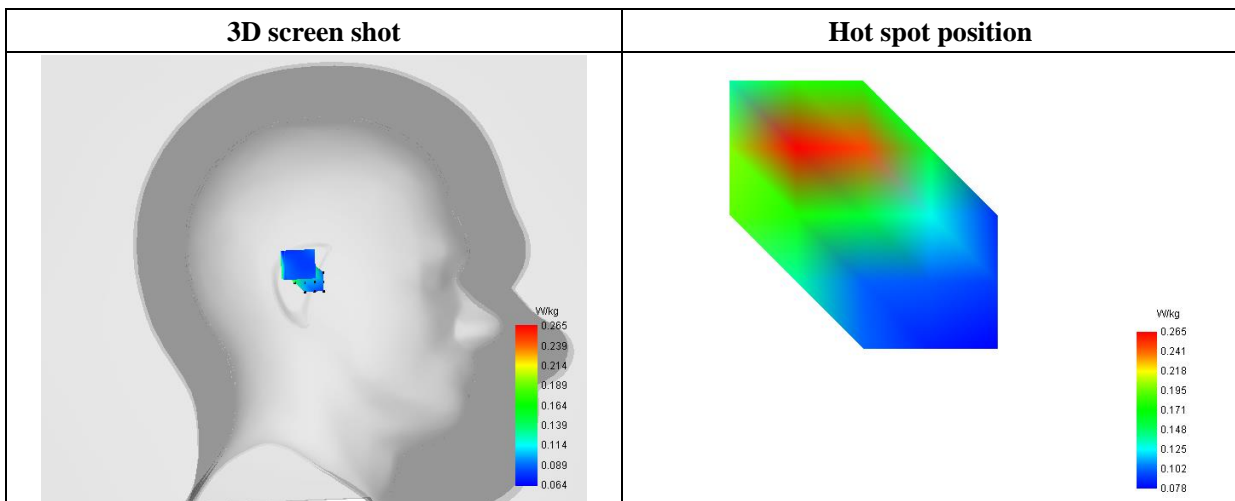

MEASUREMENT 2

Type: Phone measurement (Complete)

Date of measurement: 2021-05-21

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 2.68; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Left Head
Device Position	Cheek
Band	WiFi(5.3GHz)_ 802.11a
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5320.000000
Relative Permittivity (real part)	36.920839
Conductivity (S/m)	4.870192
Power Variation (%)	0.460000
Ambient Temperature	22.5
Liquid Temperature	22.5

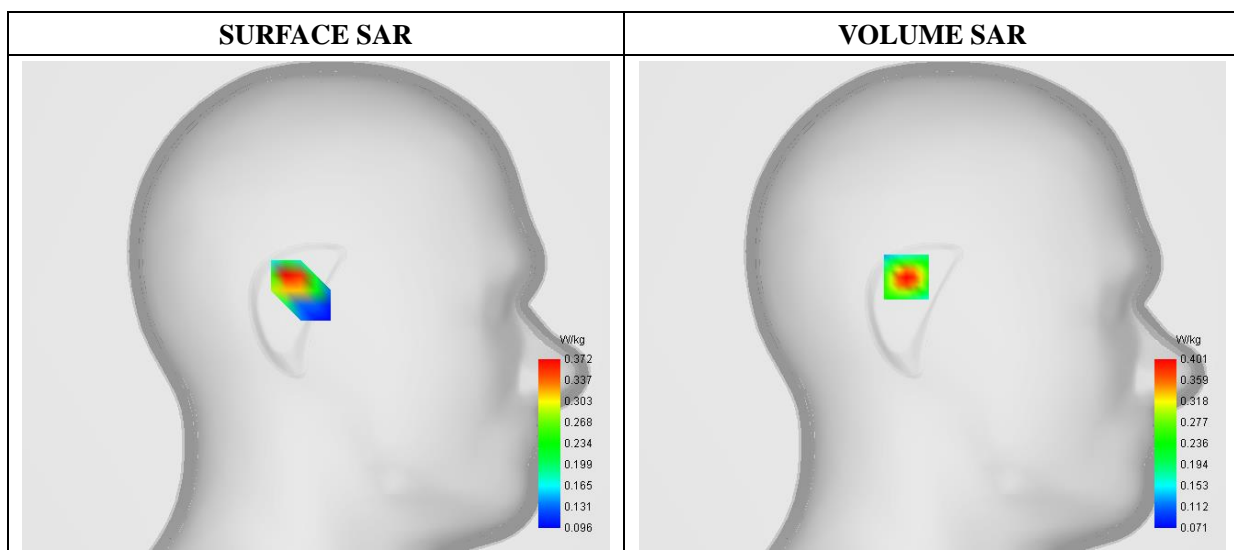


Maximum location: X=14.00, Y=15.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.191540
SAR 1g (W/Kg)	0.372012

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.5641	0.4007	0.2862	0.2082	0.1583	0.1271	0.1081	0.0969	0.0903

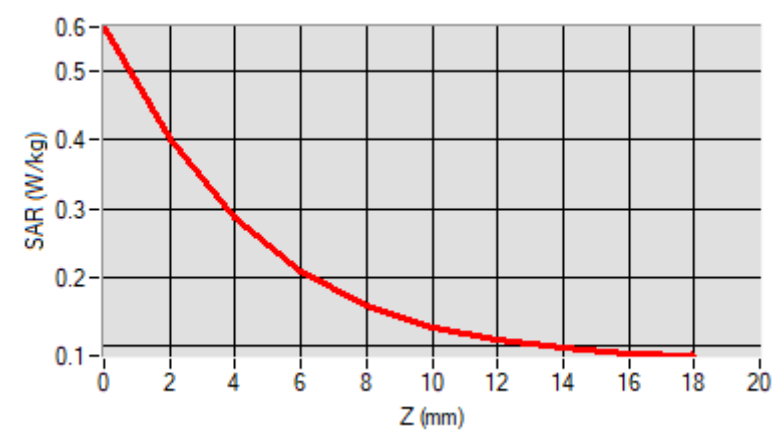

F. 3D Image

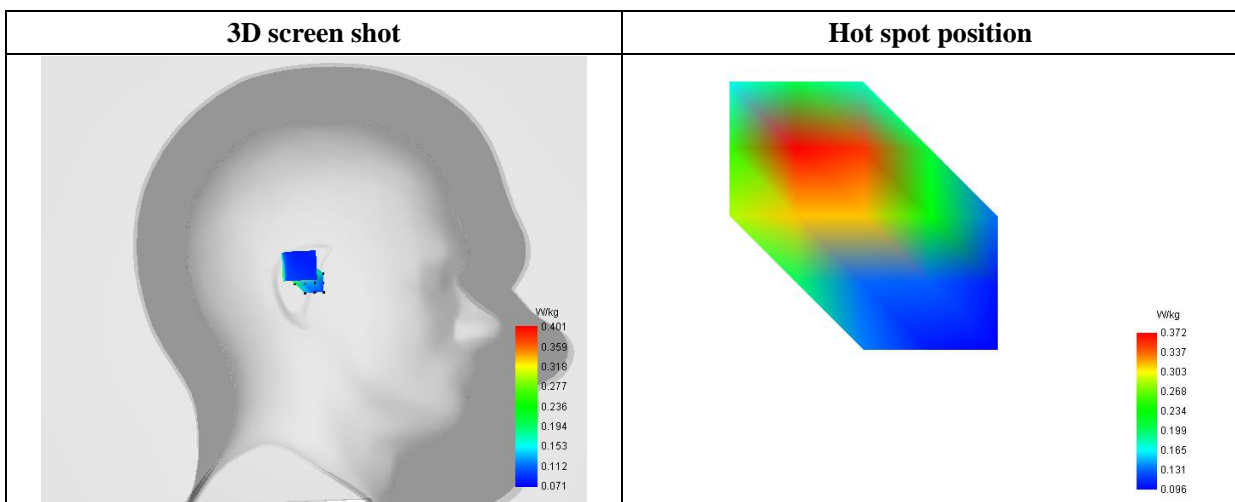

MEASUREMENT 3

Type: Phone measurement (Complete)

Date of measurement: 2021-05-21

Measurement duration: 12 minutes 21 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 2.72; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Right Head
Device Position	Cheek
Band	WiFi(5.6GHz)_802.11ac (80MHz)
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5530.000000
Relative Permittivity (real part)	35.540963
Conductivity (S/m)	5.045278
Power Variation (%)	-1.840000
Ambient Temperature	22.5
Liquid Temperature	22.5

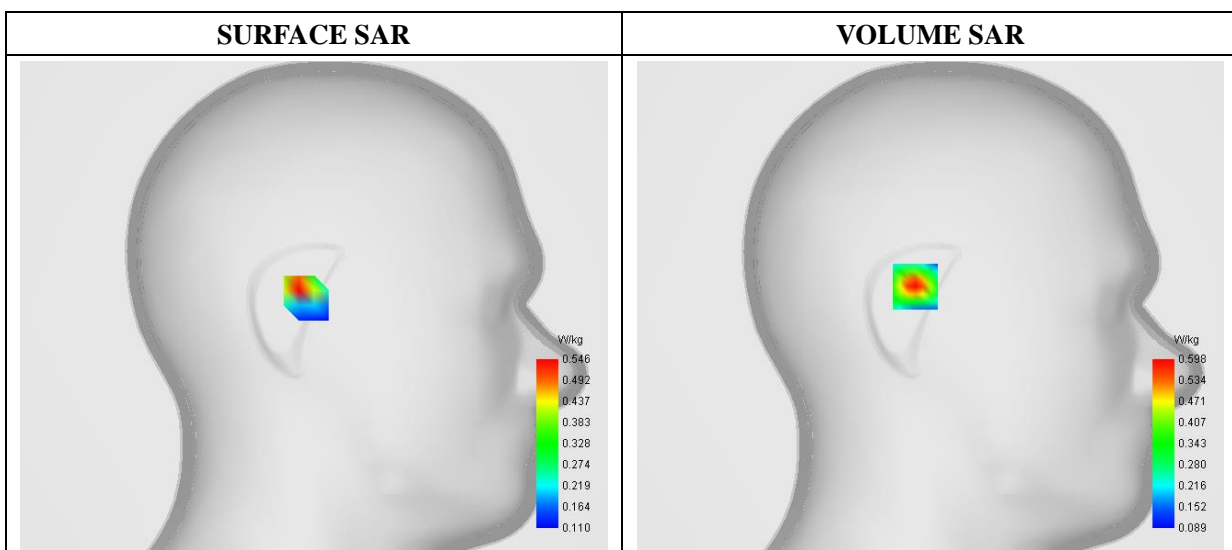


Maximum location: X=8.00, Y=10.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.254871
SAR 1g (W/Kg)	0.550323

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.8929	0.5981	0.3988	0.2701	0.1933	0.1491	0.1252	0.1139	0.1099	0.1099

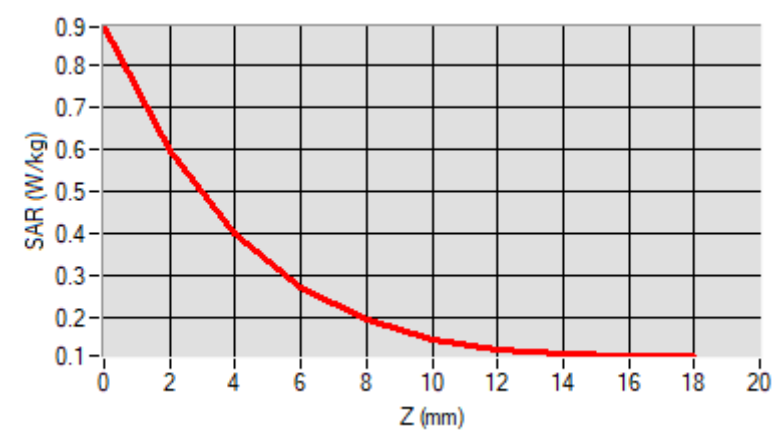

F. 3D Image

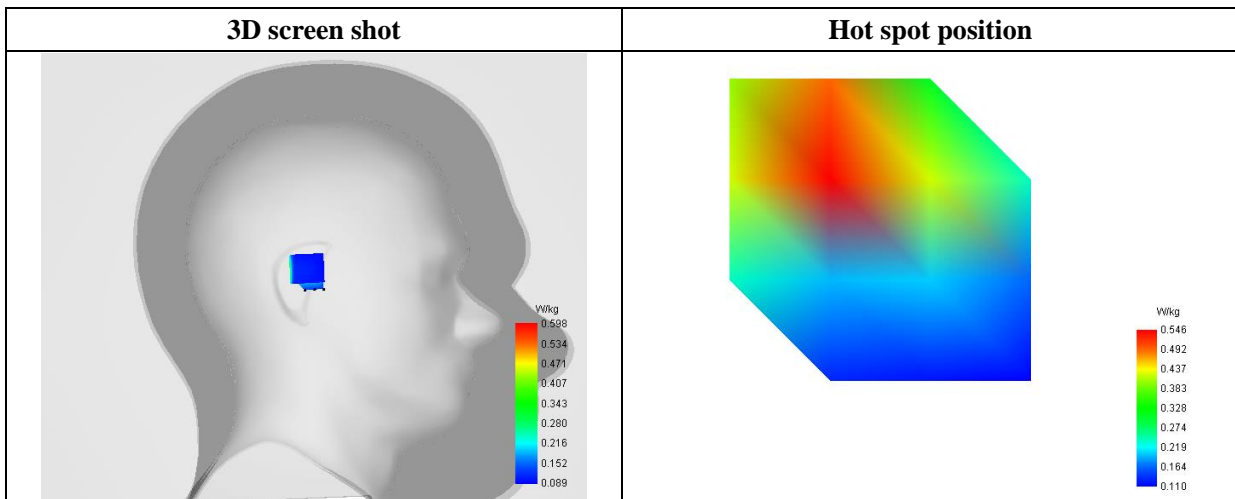

MEASUREMENT 4

Type: Phone measurement (Complete)

Date of measurement: 2021-05-21

Measurement duration: 12 minutes 21 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 2.52; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Left Head
Device Position	Cheek
Band	WiFi(5.8GHz)_ 802.11ac (80MHz)
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5775.000000
Relative Permittivity (real part)	35.142273
Conductivity (S/m)	5.270836
Power Variation (%)	-1.290000
Ambient Temperature	22.5
Liquid Temperature	22.5

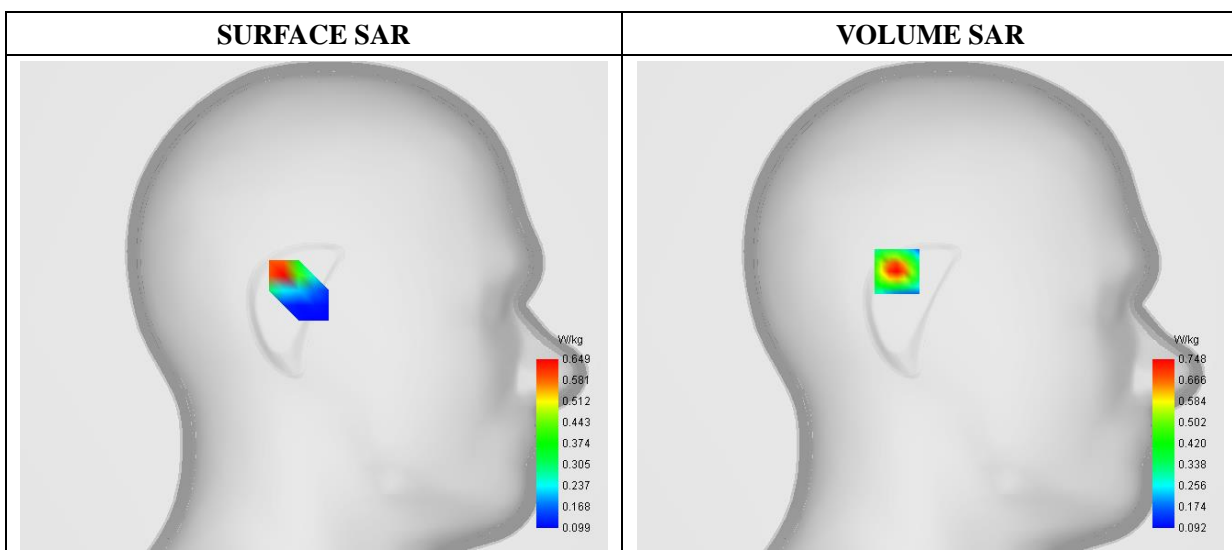


Maximum location: X=18.00, Y=18.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.303610
SAR 1g (W/Kg)	0.694555

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	1.1360	0.7477	0.4869	0.3199	0.2211	0.1644	0.1334	0.1179	0.1114	0.1114

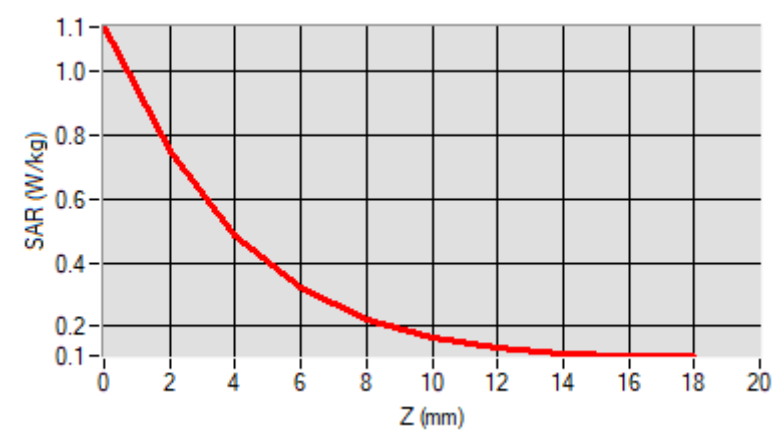

F. 3D Image

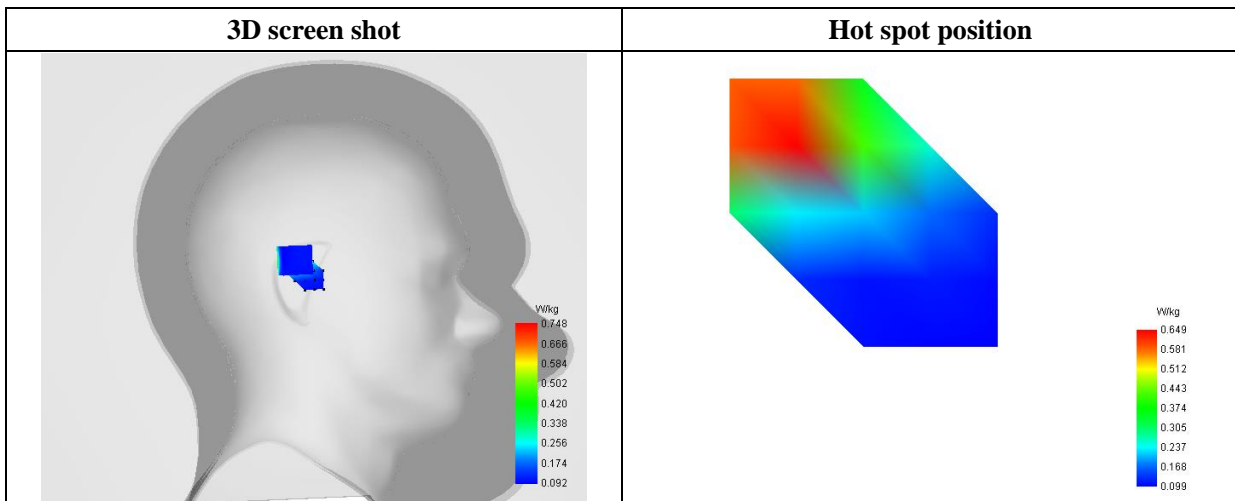

MEASUREMENT 5/9

Type: Phone measurement (Complete)

Date of measurement: 2021-05-21

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 2.44; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.2GHz)_ 802.11a
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative Permittivity (real part)	37.023869
Conductivity (S/m)	4.827611
Power Variation (%)	-1.150000
Ambient Temperature	22.5
Liquid Temperature	22.5

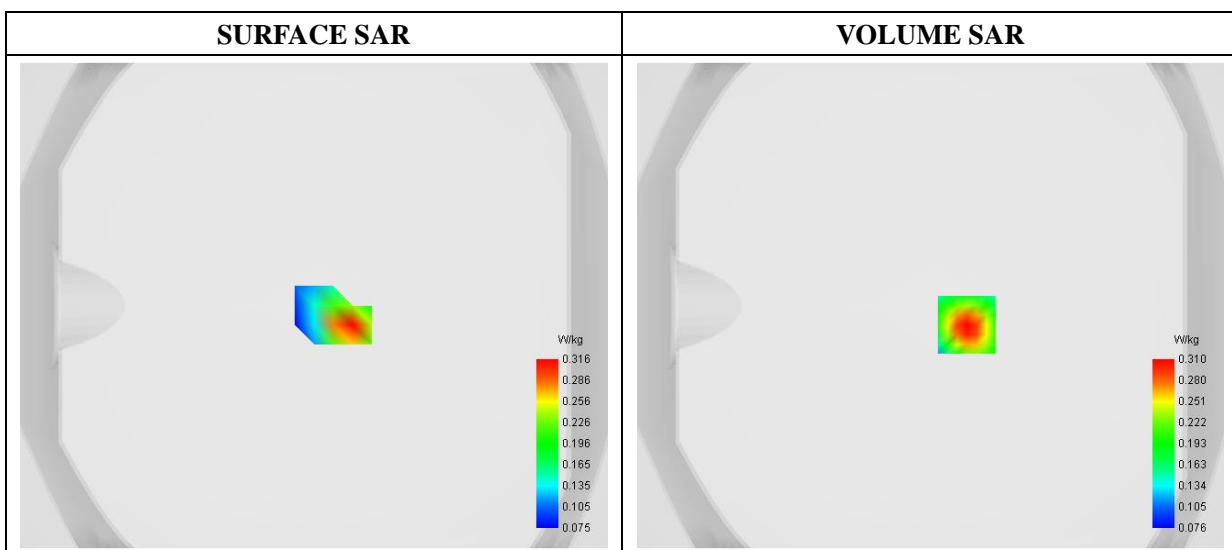


Maximum location: X=15.00, Y=-8.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.139363
SAR 1g (W/Kg)	0.224915

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.4133	0.3096	0.2352	0.1828	0.1481	0.1257	0.1116	0.1030	0.0978	0.0978

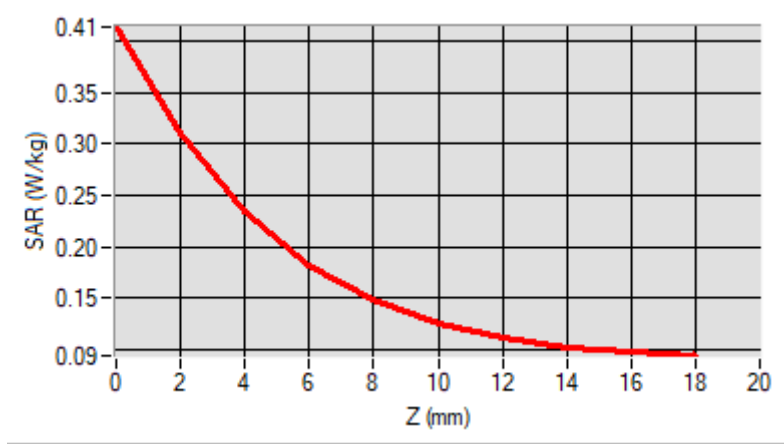

F. 3D Image

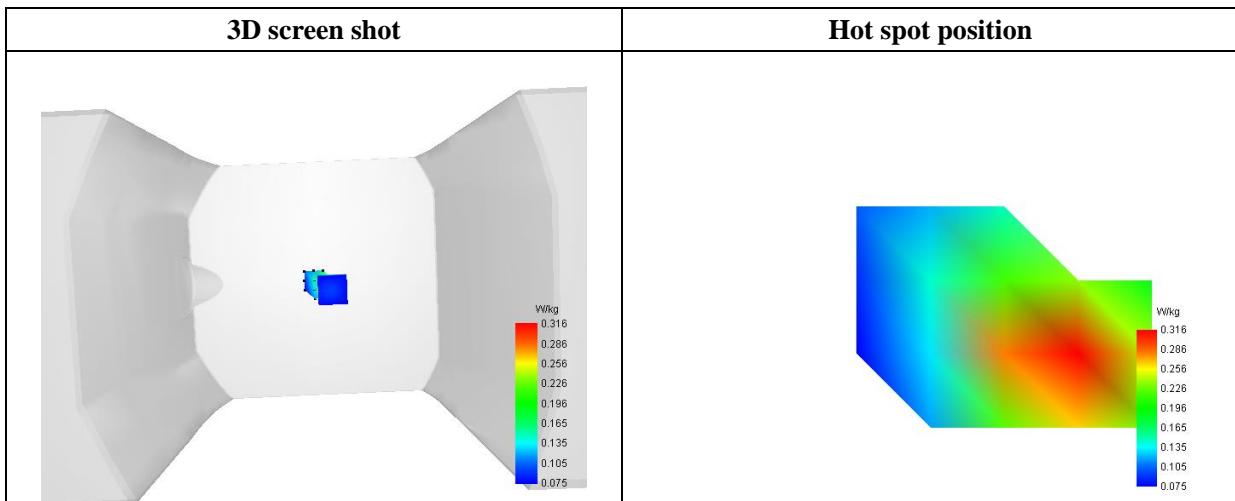

MEASUREMENT 6/10

Type: Phone measurement (Complete)

Date of measurement: 2021-05-21

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 2.68; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.3GHz)_ 802.11a
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5320.000000
Relative Permittivity (real part)	36.920839
Conductivity (S/m)	4.870192
Power Variation (%)	1.110000
Ambient Temperature	22.5
Liquid Temperature	22.5

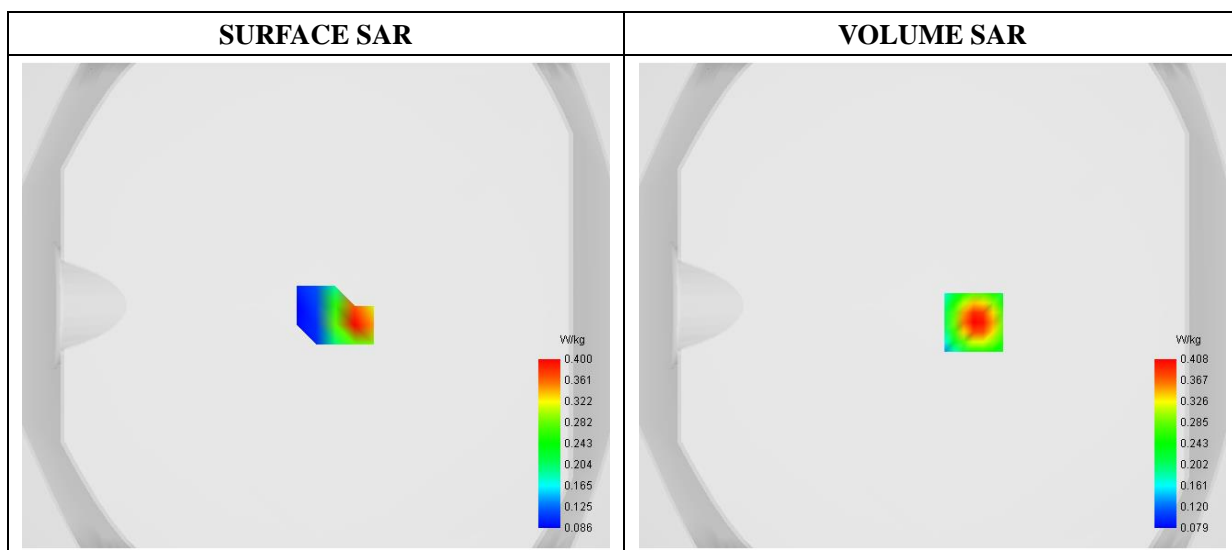


Maximum location: X=17.00, Y=-7.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.166070
SAR 1g (W/Kg)	0.294755

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.5323	0.4082	0.3151	0.2454	0.1951	0.1586	0.1317	0.1114	0.0953	

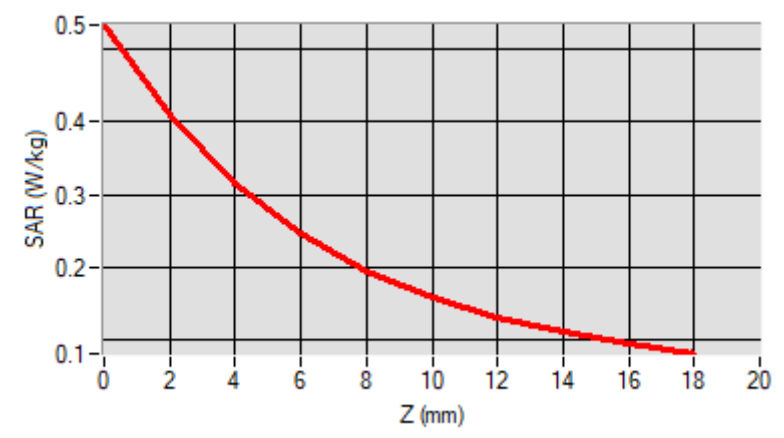

F. 3D Image

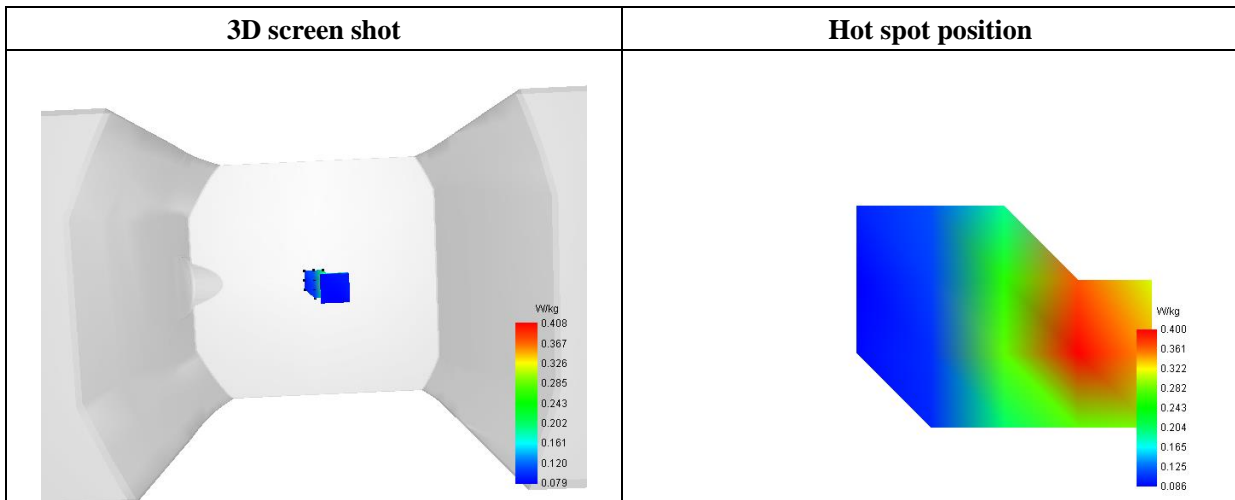

MEASUREMENT 7/11

Type: Phone measurement (Complete)

Date of measurement: 2021-05-21

Measurement duration: 12 minutes 21 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 2.72; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.6GHz)_ 802.11ac (80MHz)
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5530.000000
Relative Permittivity (real part)	35.540963
Conductivity (S/m)	5.045278
Power Variation (%)	0.750000
Ambient Temperature	22.5
Liquid Temperature	22.5

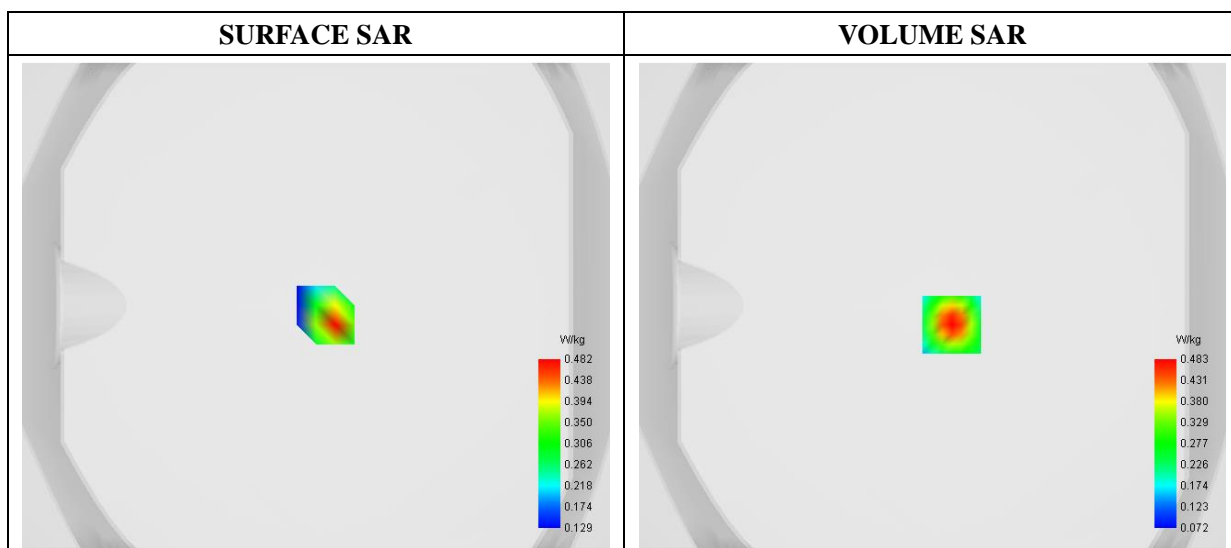


Maximum location: X=8.00, Y=-8.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.179814
SAR 1g (W/Kg)	0.338514

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.6330	0.4826	0.3702	0.2865	0.2265	0.1833	0.1517	0.1281	0.1094	

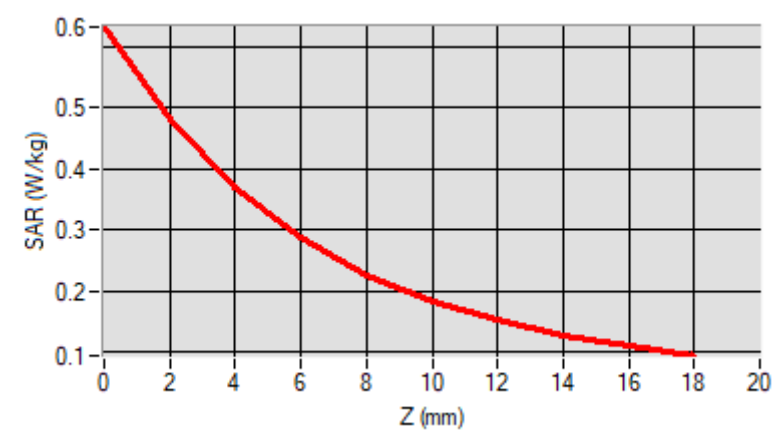

F. 3D Image

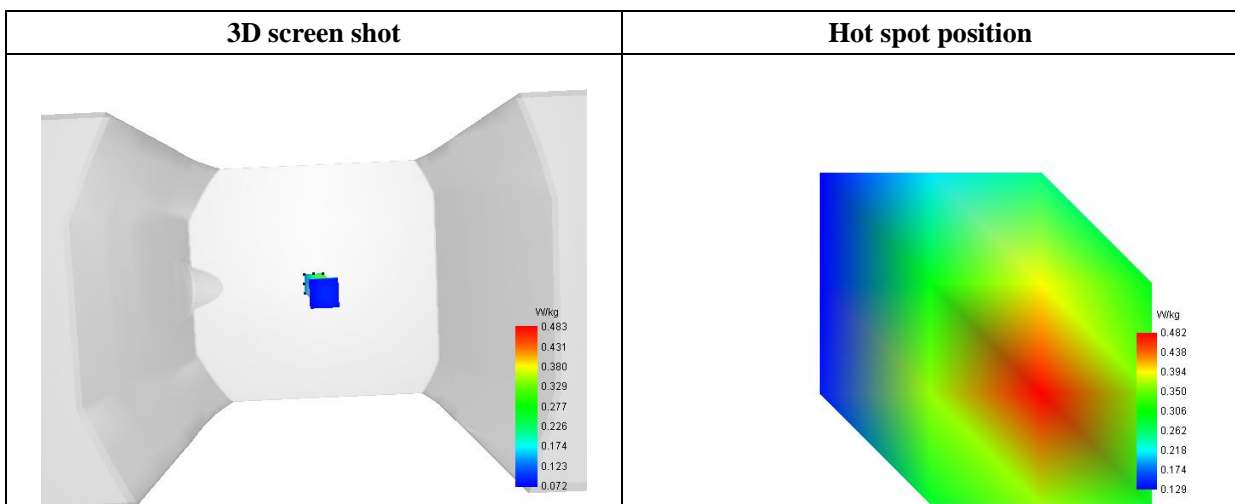

MEASUREMENT 8/12

Type: Phone measurement (Complete)

Date of measurement: 2021-05-21

Measurement duration: 12 minutes 21 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 2.52; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.8GHz)_ 802.11ac (80MHz)
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5775.000000
Relative Permittivity (real part)	35.142273
Conductivity (S/m)	5.270836
Power Variation (%)	-1.330000
Ambient Temperature	22.5
Liquid Temperature	22.5

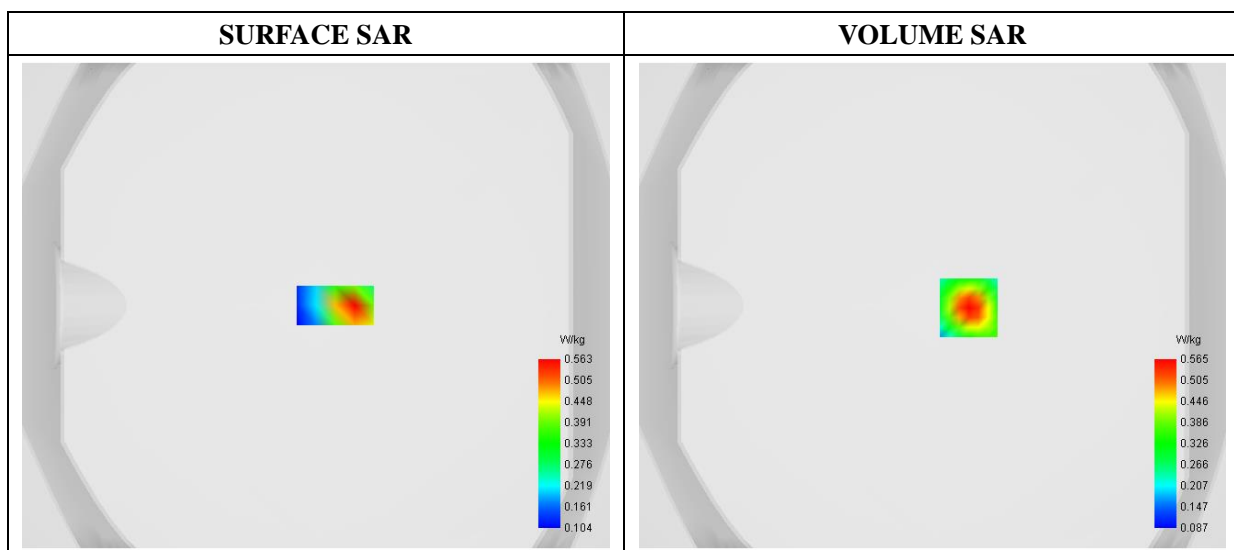


Maximum location: X=15.00, Y=-1.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.207422
SAR 1g (W/Kg)	0.391344

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.7591	0.5649	0.4228	0.3198	0.2483	0.1986	0.1639	0.1389	0.1200	

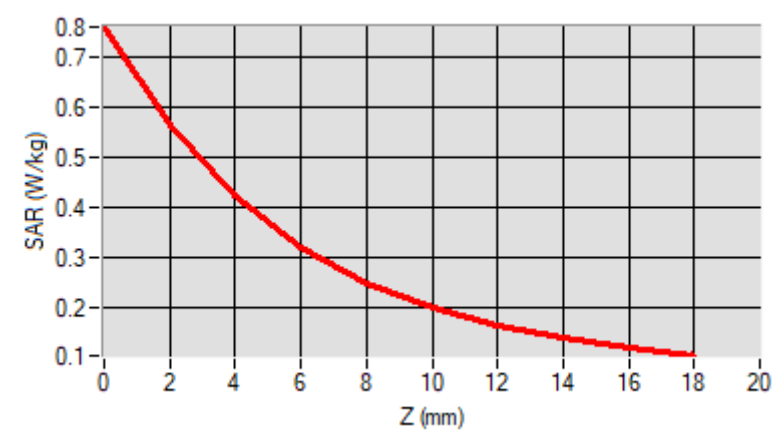

F. 3D Image

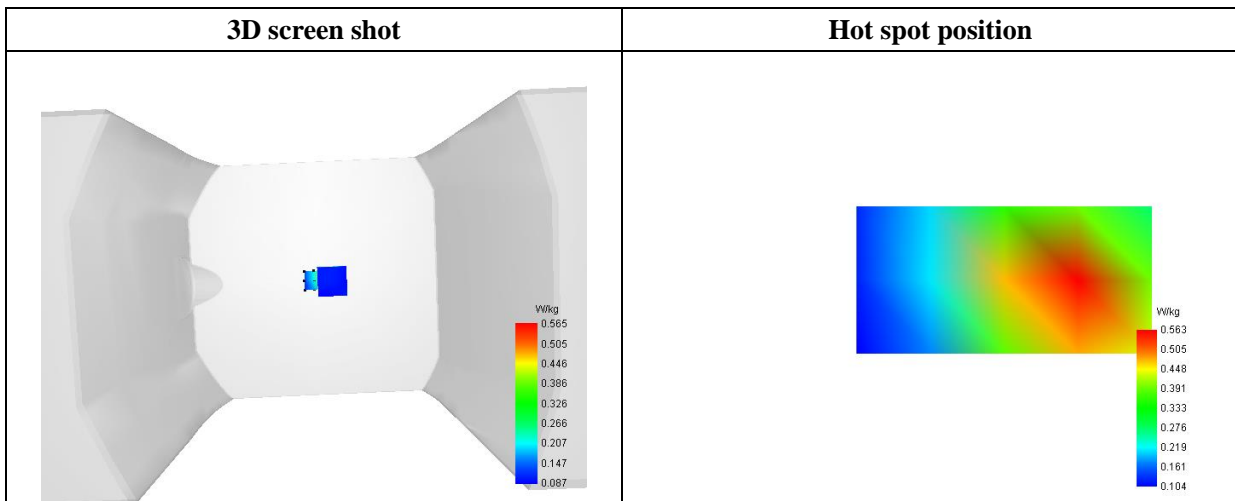

Annex C. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******