



FCC RF Test Report

APPLICANT : Midnight Dawn LLC
EQUIPMENT : Wireless Barcode Reader
MODEL NAME : PL46MN
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The testing was completed on Jun. 25, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : 2AETI-0610

Page Number : 1 of 30

Report Issued Date : Jul. 15, 2016

Report Version : Rev. 02

Report Template No.: BU5-FR15CBT4.0 Version 1.3



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Product Feature of Equipment Under Test..... 5

 1.3 Product Specification of Equipment Under Test..... 5

 1.4 Modification of EUT 5

 1.5 Testing Location 6

 1.6 Applicable Standards..... 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7

 2.1 Descriptions of Test Mode 7

 2.2 Test Mode 7

 2.3 Connection Diagram of Test System 8

 2.4 Support Unit used in test configuration and system 8

 2.5 EUT Operation Test Setup 8

 2.6 Measurement Results Explanation Example..... 8

3 TEST RESULT 9

 3.1 6dB and 99% Bandwidth Measurement 9

 3.2 Peak Output Power Measurement 14

 3.3 Power Spectral Density Measurement 15

 3.4 Conducted Band Edges and Spurious Emission Measurement 20

 3.5 Radiated Band Edges and Spurious Emission Measurement 25

 3.6 Antenna Requirements 28

4 LIST OF MEASURING EQUIPMENT..... 29

5 UNCERTAINTY OF EVALUATION..... 30

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED TEST RESULTS

APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX D. DUTY CYCLE PLOTS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR5O2025-01A	Rev. 01	Initial issue of report	Jun. 28, 2016
FR5O2025-01A	Rev. 02	Adding the remark in summary of test result and the information in section 1.2, and revising plots on appendix C	Jul. 15, 2016



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(1)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	-
-	15.207	AC Conducted Emission	15.207(a)	Not Required	EUT is battery operated
3.6	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Midnight Dawn LLC
9980 South 300 West, Suite 200, Sandy, Utah, 84070

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Barcode Reader
Model Name	PL46MN
EUT supports Radios application	WLAN 11b/g/n HT20 Bluetooth v4.1 LE
Power Supply	Battery

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	-1.10 dBm (0.0008 W)
99% Occupied Bandwidth	1.05MHz
Antenna Type	Fixed Internal Antenna type with gain 1.41 dBi
Type of Modulation	Bluetooth LE : GFSK

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH02-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH10-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.1 – LE RF Output Power	
		Data Rate / Modulation	
		GFSK	
		1Mbps	
Ch00	2402MHz	-1.10 dBm	
Ch19	2440MHz	-1.38 dBm	
Ch39	2480MHz	-1.45 dBm	


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Y plane as worst plane) from all possible combinations.
- b. AC power line Conducted Emission was tested under maximum output power.

2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.1 – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps

2.3 Connection Diagram of Test System

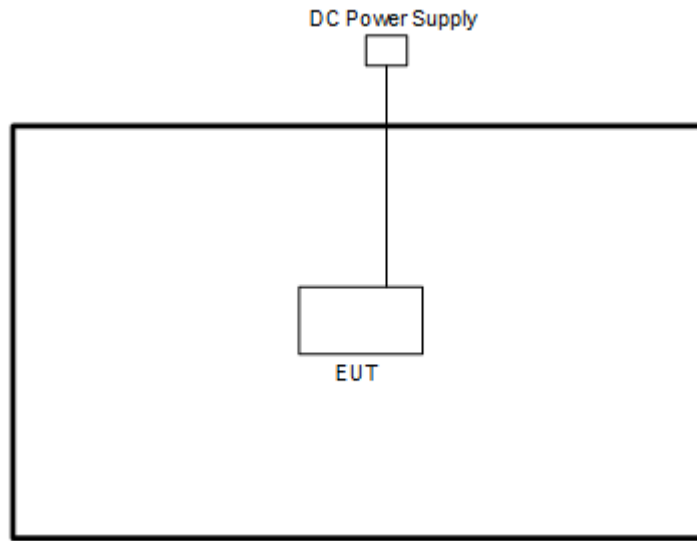

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	Topward	3303D	N/A	N/A	Unshielded, 1.8 m

2.5 EUT Operation Test Setup

For Bluetooth function, an engineering test program (Putty.exe) was provided and enabled to make EUT transmitting and receiving signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 4.2 + 10 = 14.2 \text{ (dB)}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

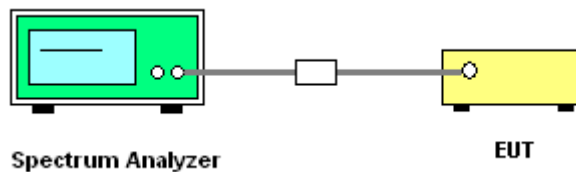




3.1.5 Test Result of 6dB Bandwidth

Test data refer to Appendix A.


6 dB Bandwidth Plot on Channel 00

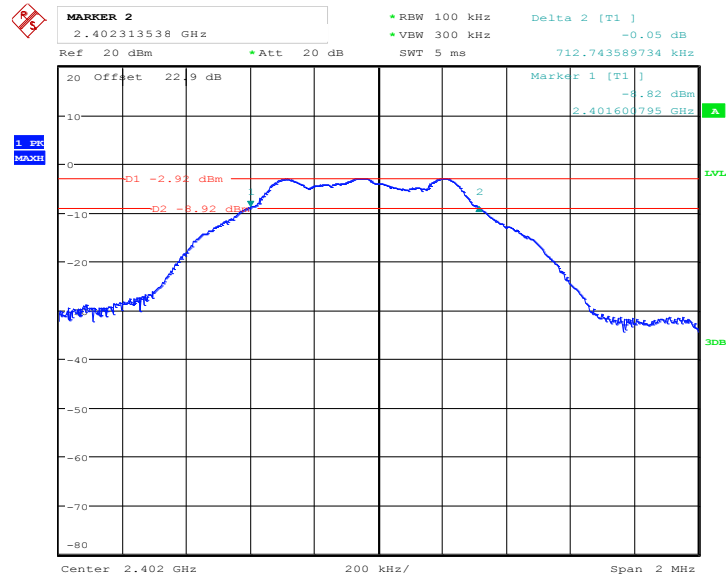

Date: 9.JUN.2016 14:20:15




6 dB Bandwidth Plot on Channel 19

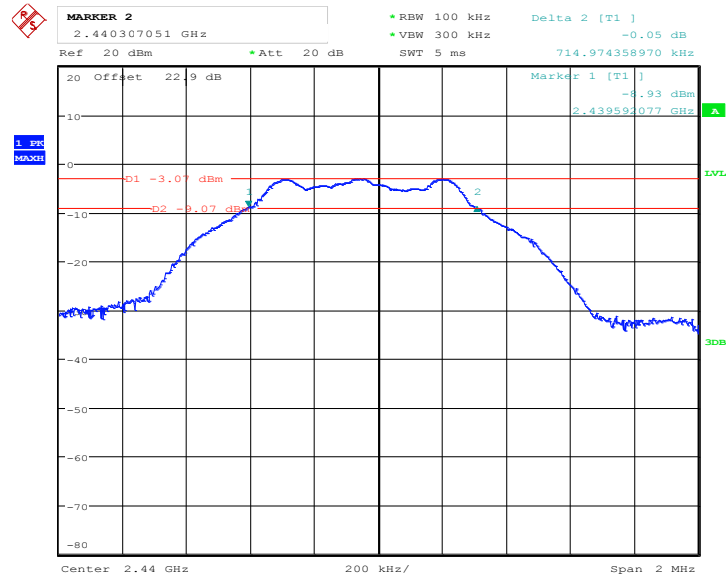

Date: 9.JUN.2016 14:22:29

6 dB Bandwidth Plot on Channel 39

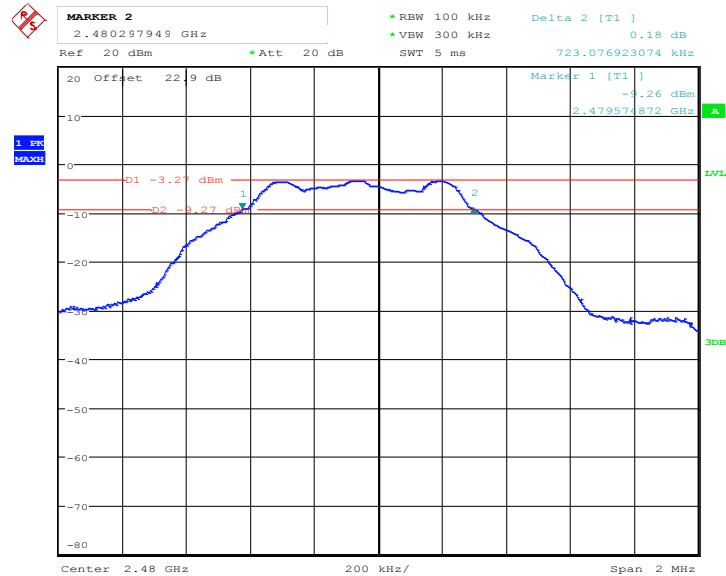


Date: 9.JUN.2016 14:26:59



3.1.6 Test Result of 99% Occupied Bandwidth

Test data refer to Appendix A.


99% Bandwidth Plot on Channel 00

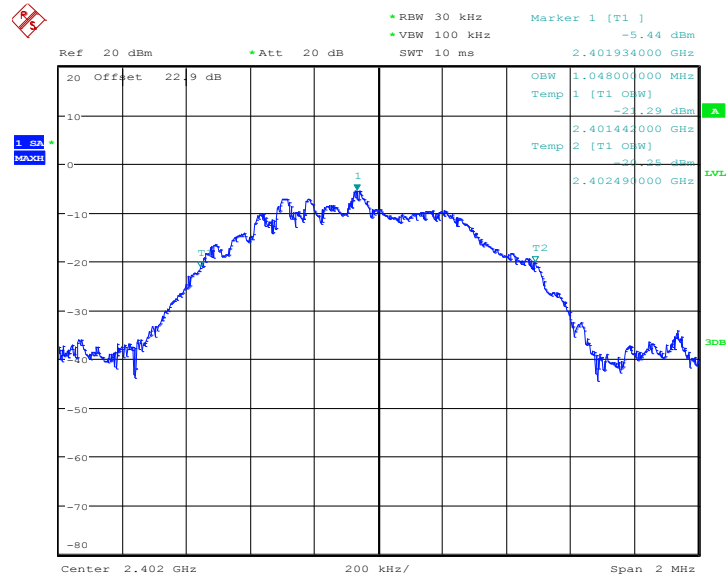

Date: 9.JUN.2016 14:21:23




99% Occupied Bandwidth Plot on Channel 19

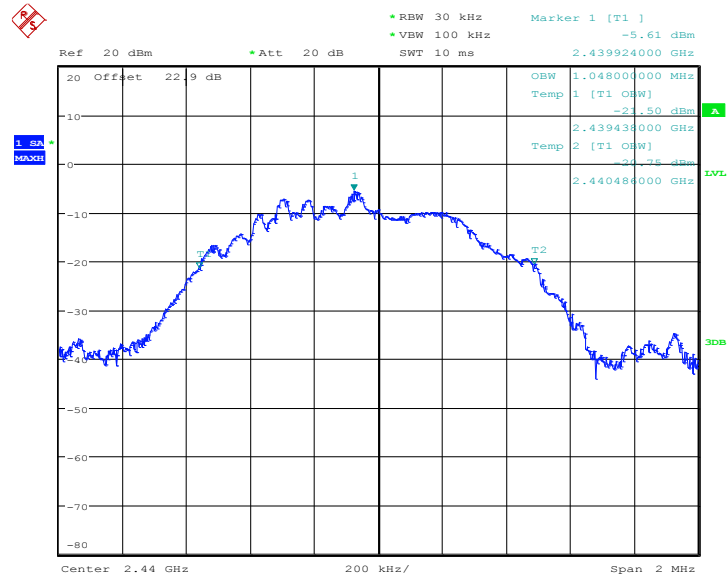

Date: 9.JUN.2016 14:23:32

99% Occupied Bandwidth Plot on Channel 39

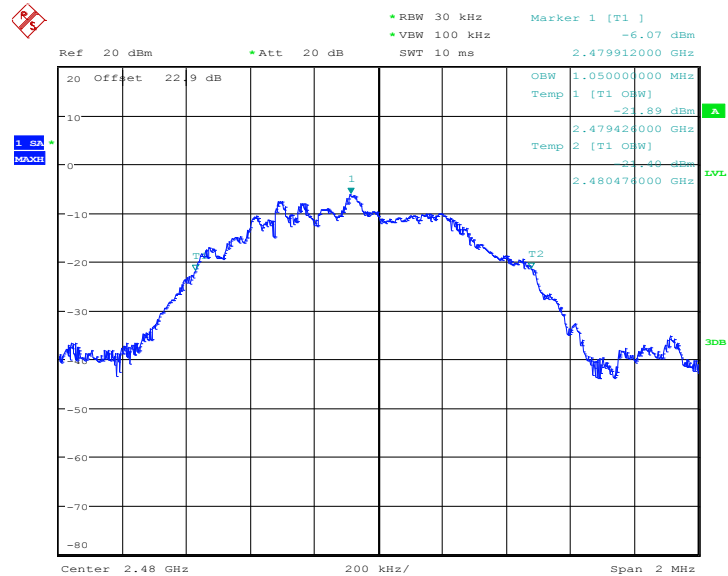

Date: 9.JUN.2016 14:31:56

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

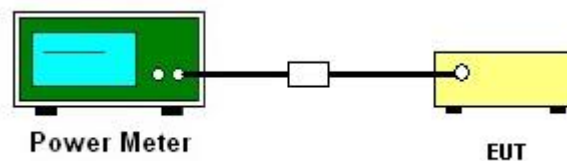

3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup




3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.



3.3.6 Test Result of Power Spectral Density Plots (100kHz)


PSD 100kHz Plot on Channel 00

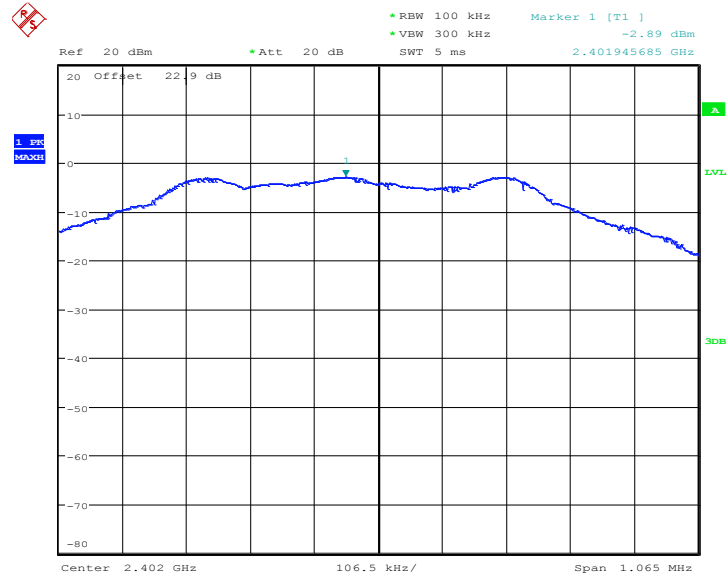

Date: 9.JUN.2016 14:20:40




PSD 100kHz Plot on Channel 19

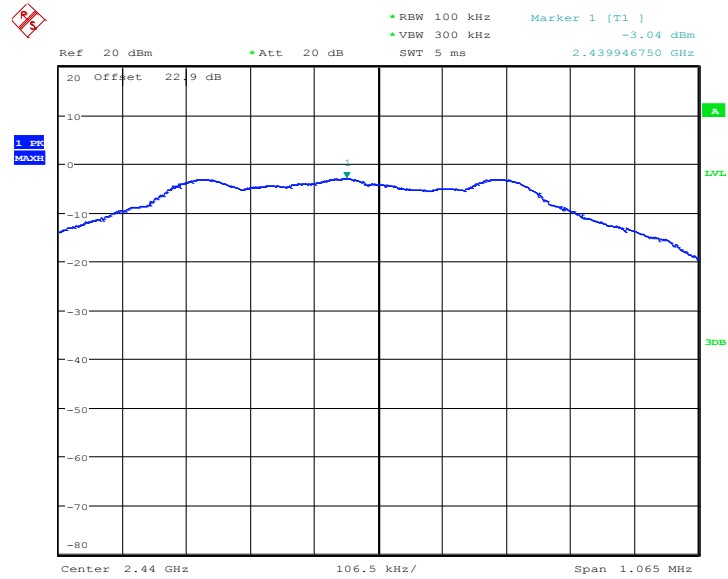

Date: 9.JUN.2016 14:22:59

PSD 100kHz Plot on Channel 39

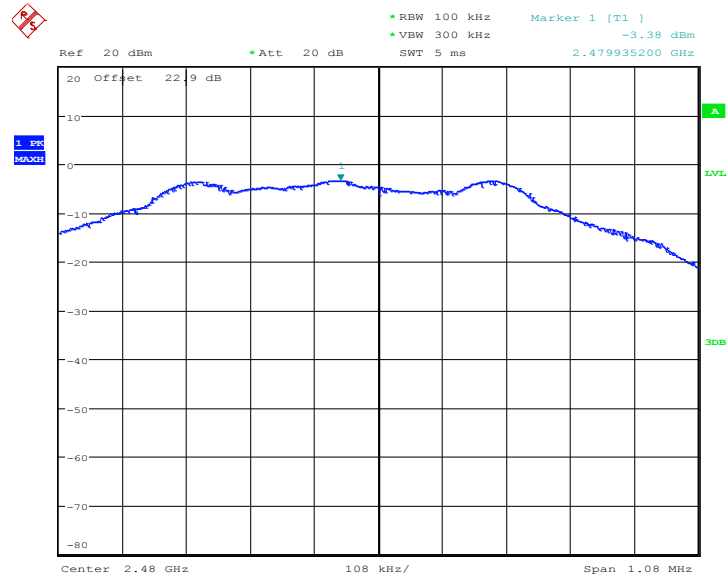


Date: 9.JUN.2016 14:30:59



3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 00

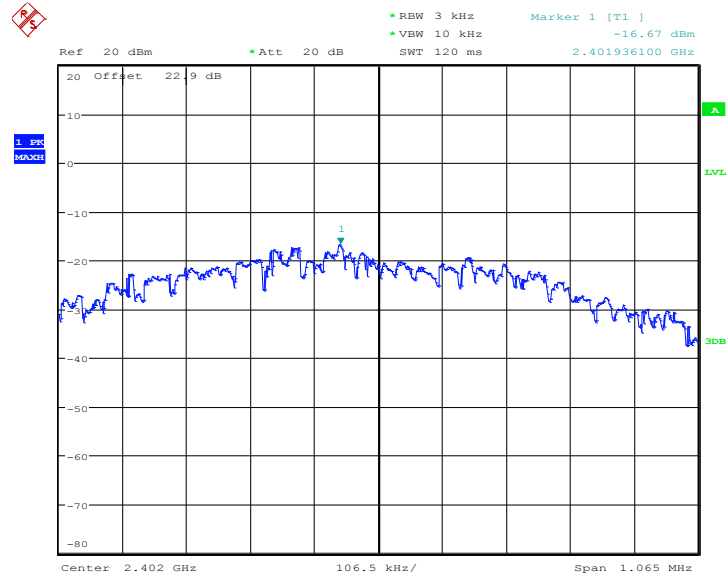

Date: 9.JUN.2016 14:20:31




PSD 3kHz Plot on Channel 19

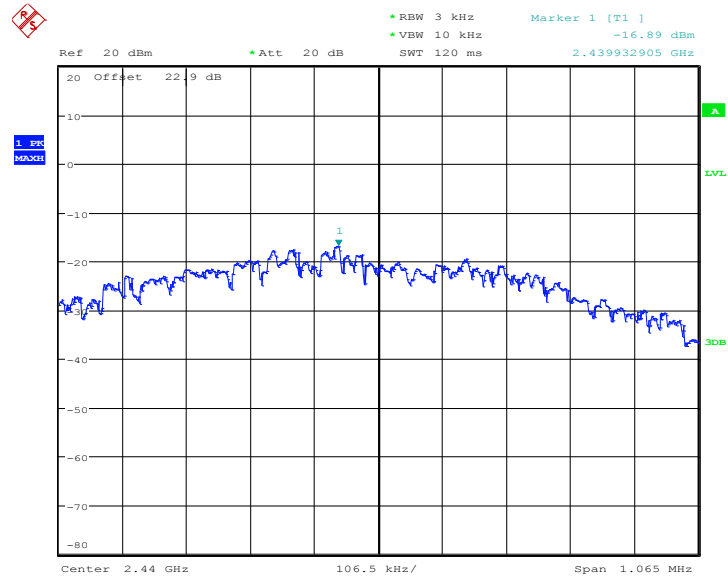

Date: 9.JUN.2016 14:22:47

PSD 3kHz Plot on Channel 39

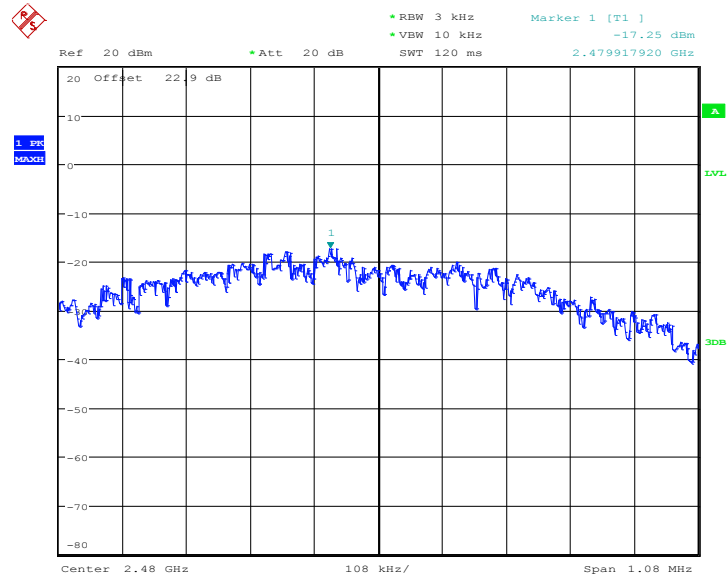

Date: 9.JUN.2016 14:29:00

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

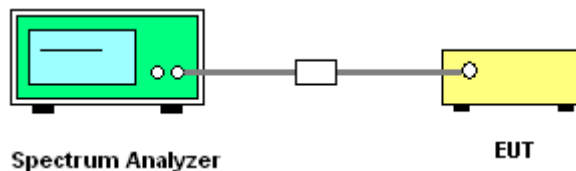




3.4.5 Test Result of Conducted Band Edges Plots

Low Band Edge Plot on Channel 00

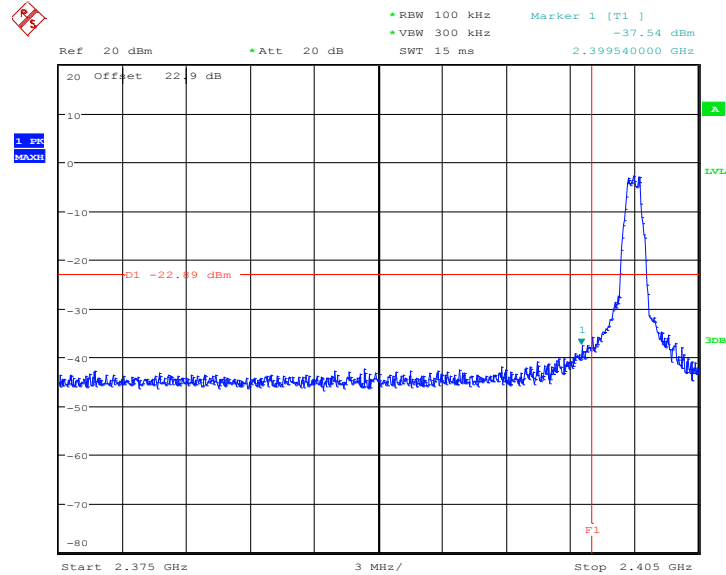

Date: 9.JUN.2016 14:20:54

High Band Edge Plot on Channel 39

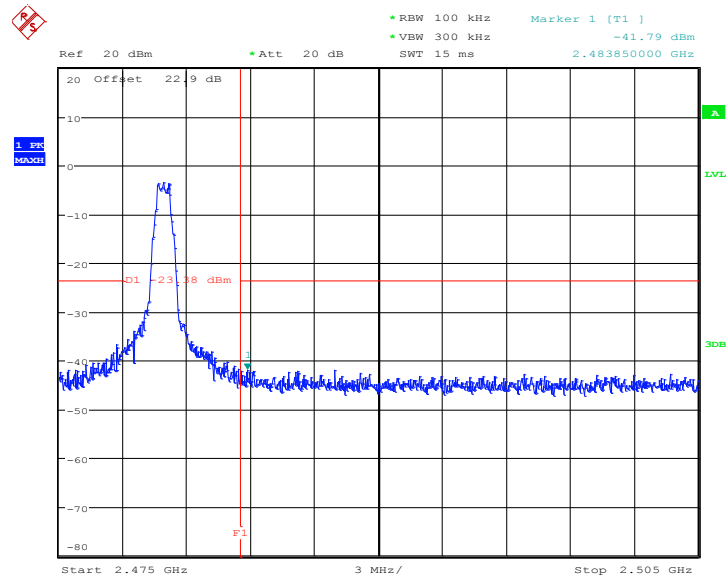


Date: 9.JUN.2016 14:31:23




3.4.6 Test Result of Conducted Spurious Emission Plots

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

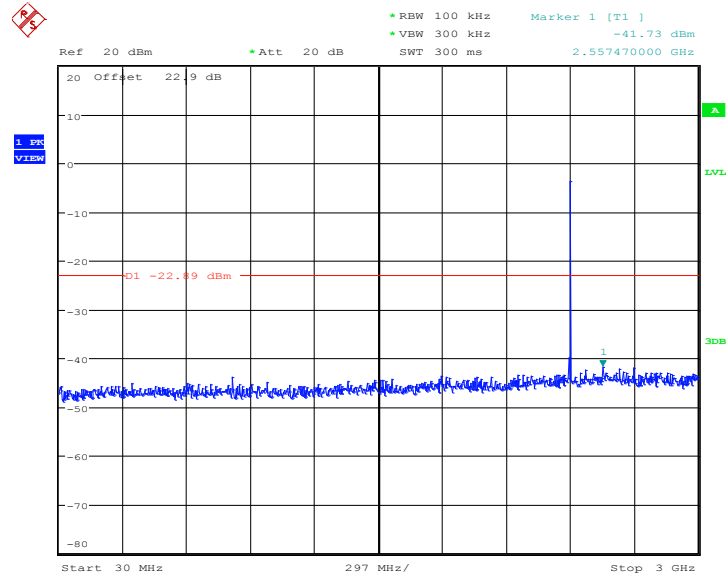

Date: 9.JUN.2016 14:21:04


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

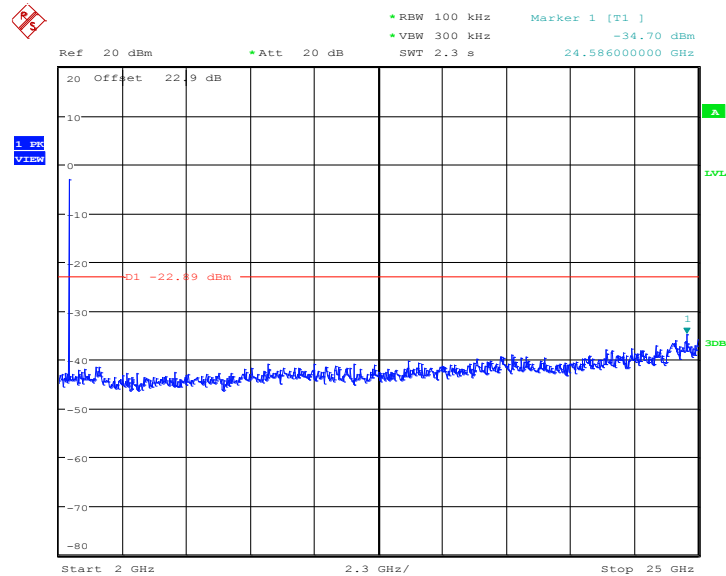

Date: 9.JUN.2016 14:21:12




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

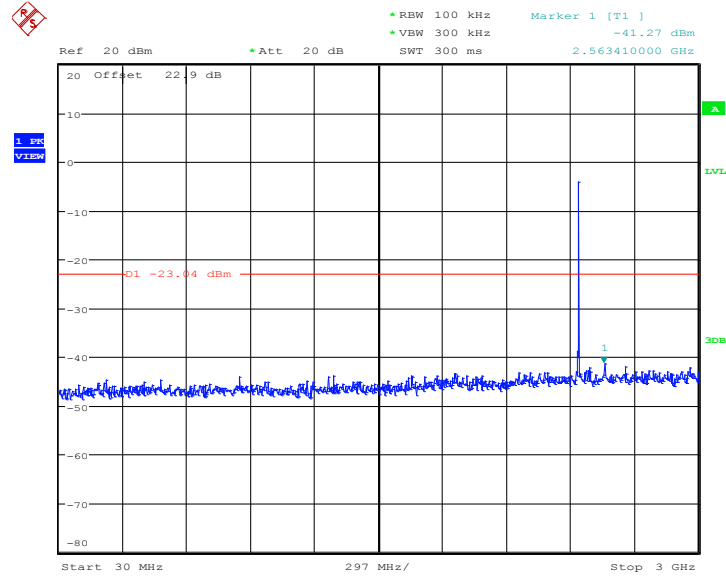

Date: 9.JUN.2016 14:23:13


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

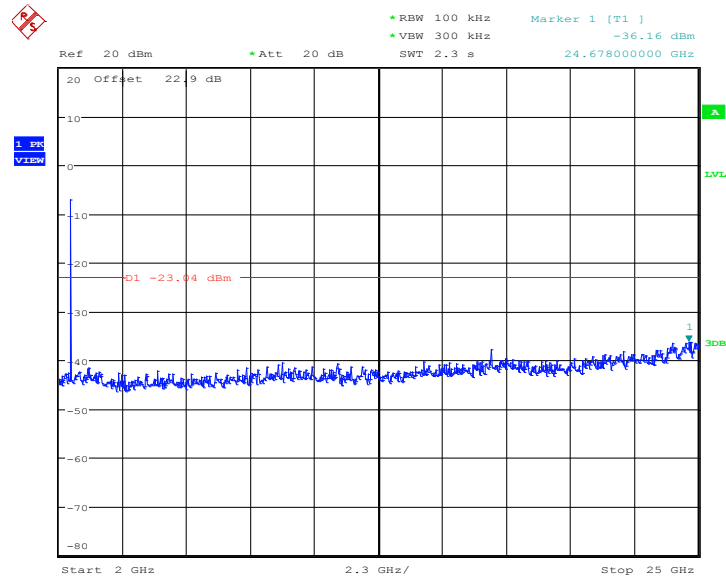

Date: 9.JUN.2016 14:23:21




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

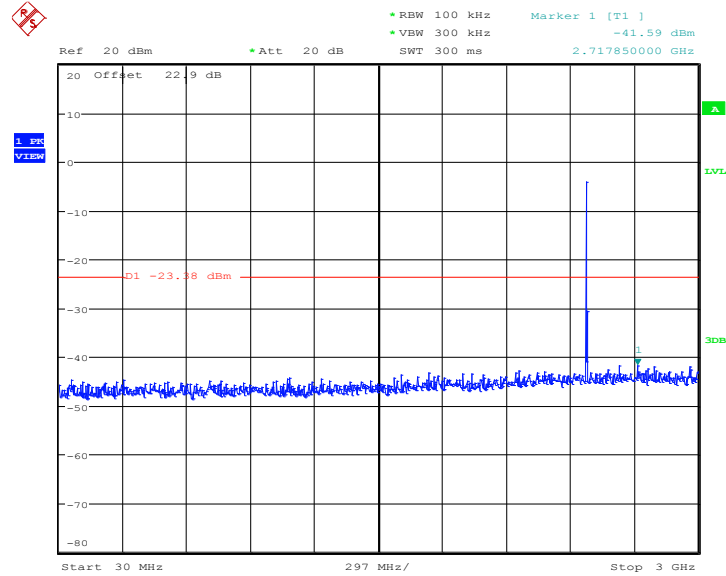

Date: 9.JUN.2016 14:31:36

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

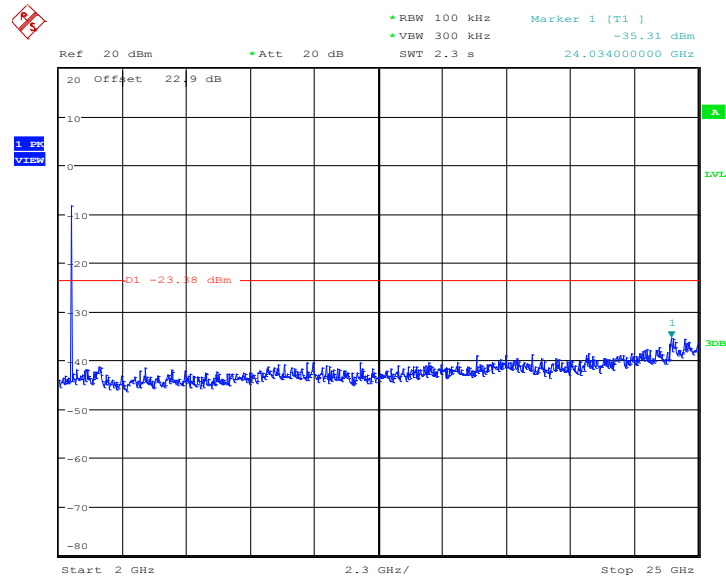

Date: 9.JUN.2016 14:31:44



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.


3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:


- (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
- For average measurement:
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

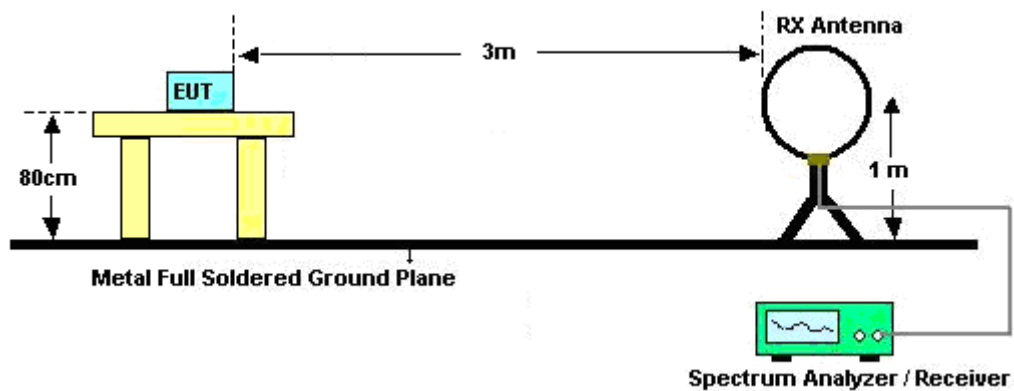

For radiated emissions from 30MHz to 1GHz

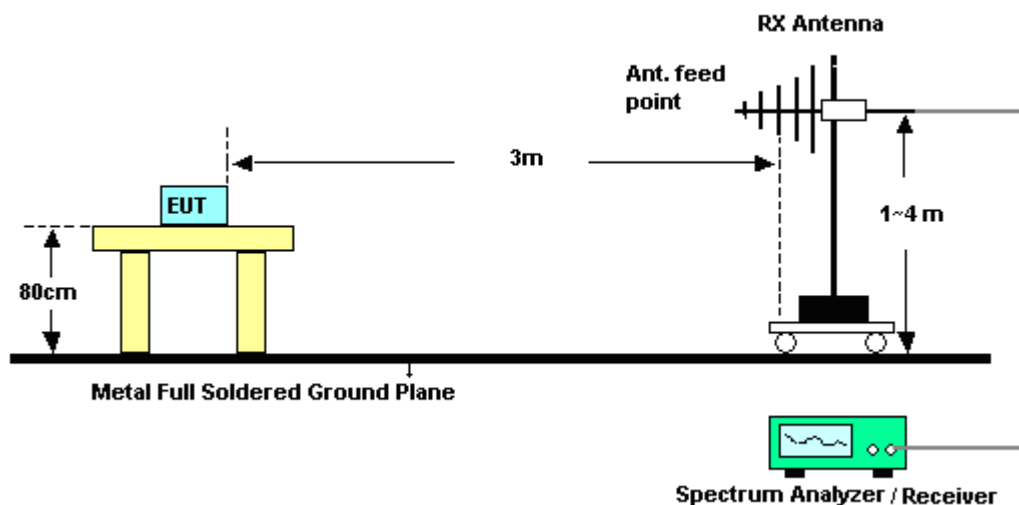

For radiated emissions above 1GHz

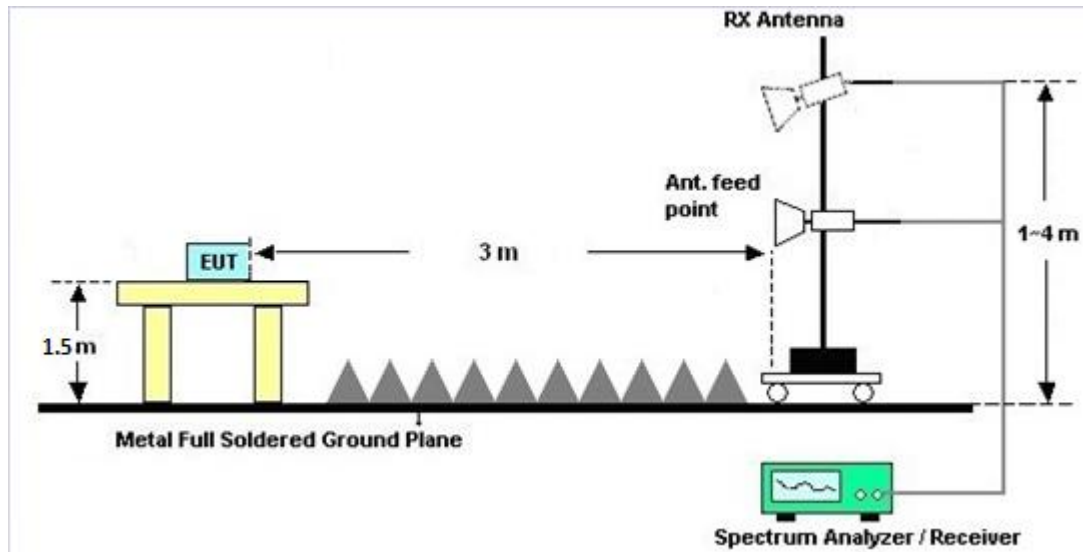

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB41292344	300MHz~40GHz	Jan. 08, 2016	Jun. 02, 2016 ~ Jun. 09, 2016	Jan. 07, 2017	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	300MHz~40GHz	Jan. 07, 2016	Jun. 02, 2016 ~ Jun. 09, 2016	Jan. 06, 2017	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 23, 2015	Jun. 02, 2016 ~ Jun. 09, 2016	Nov. 22, 2016	Conducted (TH02-HY)
Programmable Power Supply	GW Instek	PSS-2005	GEO821763	N/A	Nov. 13, 2015	Jun. 02, 2016 ~ Jun. 09, 2016	Nov. 12, 2016	Conducted (TH02-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Jun. 09, 2016 ~ Jun. 25, 2016	Sep. 01, 2016	Radiation (03CH10-HY)
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Nov. 16, 2015	Jun. 09, 2016 ~ Jun. 25, 2016	Nov. 15, 2016	Radiation (03CH10-HY)
Bilog Antenna	TESEQ	CBL 6111D	35413	30MHz~1GHz	Jan. 13, 2016	Jun. 09, 2016 ~ Jun. 25, 2016	Jan. 12, 2017	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1325	1GHz ~ 18GHz	Sep. 30, 2015	Jun. 09, 2016 ~ Jun. 25, 2016	Sep. 29, 2016	Radiation (03CH10-HY)
Preamplifier	Keysight	83017A	MY53270078	1GHz~26.5GHz	Nov. 13, 2015	Jun. 09, 2016 ~ Jun. 25, 2016	Nov. 12, 2016	Radiation (03CH10-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz ~ 44GHz	Oct. 15, 2015	Jun. 09, 2016 ~ Jun. 25, 2016	Oct. 14, 2016	Radiation (03CH10-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jun. 09, 2016 ~ Jun. 25, 2016	N/A	Radiation (03CH10-HY)
Turn Table	EMEC	TT 2200	N/A	0~360 Degree	N/A	Jun. 09, 2016 ~ Jun. 25, 2016	N/A	Radiation (03CH10-HY)
Preamplifier	MITEQ	TTA0204	1872107	2GHz~40GHz	Feb. 15, 2016	Jun. 09, 2016 ~ Jun. 25, 2016	Feb. 14, 2017	Radiation (03CH10-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz ~ 40GHz	Apr. 15, 2016	Jun. 09, 2016 ~ Jun. 25, 2016	Apr. 14, 2017	Radiation (03CH10-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	N/A	Mar. 10, 2016	Jun. 09, 2016 ~ Jun. 25, 2016	Mar. 09, 2017	Radiation (03CH10-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5
---	-----



Appendix A. Conducted Test Results

Bluetooth Low Energy

Test Engineer:	Derek Hsu	Temperature:	21~25	°C
Test Date:	2016/06/02~2016/06/09	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.05	0.71	0.50	Pass
BLE	1Mbps	1	19	2440	1.05	0.71	0.50	Pass
BLE	1Mbps	1	39	2480	1.05	0.72	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	-1.10	30.00	1.41	0.31	36.00	Pass
BLE	1Mbps	1	19	2440	-1.38	30.00	1.41	0.03	36.00	Pass
BLE	1Mbps	1	39	2480	-1.45	30.00	1.41	-0.04	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.18	-2.10
BLE	1Mbps	1	19	2440	2.18	-2.36
BLE	1Mbps	1	39	2480	2.18	-2.52

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	-2.89	-16.67	1.41	8.00	Pass
BLE	1Mbps	1	19	2440	-3.04	-16.89	1.41	8.00	Pass
BLE	1Mbps	1	39	2480	-3.38	-17.25	1.41	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. Radiated Spurious Emission

Test Engineer :	Tsung Lee and Wilson Wu	Temperature :	22~24°C
		Relative Humidity :	50~54%

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	Limit Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	(H/V)	
BLE CH 00 2402MHz		2388.435	53.01	-20.99	74	53.63	27.23	5.39	33.24	257	19	P	H	
		2362.71	42.02	-11.98	54	42.8	27.14	5.33	33.25	257	19	A	H	
	*	2402	88.83	-	-	89.43	27.23	5.39	33.22	259	19	P	H	
	*	2402	88.62	-	-	89.22	27.23	5.39	33.22	257	19	A	H	
													H	
														H
			2389.695	51.57	-22.43	74	52.19	27.23	5.39	33.24	308	208	P	V
			2382.87	41.99	-12.01	54	42.65	27.19	5.39	33.24	308	208	A	V
	*		2402	91.49	-	-	92.09	27.23	5.39	33.22	308	208	P	V
	*		2402	90	-	-	90.6	27.23	5.39	33.22	308	208	P	V
													V	
													V	
BLE CH 19 2440MHz		2365.86	51.08	-22.92	74	51.79	27.14	5.39	33.24	100	35	P	H	
		2362.22	41.7	-12.3	54	42.48	27.14	5.33	33.25	100	35	A	H	
	*	2440	88.8	-	-	89.22	27.37	5.42	33.21	100	35	P	H	
	*	2440	88.11	-	-	88.53	27.37	5.42	33.21	100	35	A	H	
			2498.11	51.34	-22.66	74	51.55	27.5	5.46	33.17	100	35	P	H
			2488.17	42.21	-11.79	54	42.43	27.5	5.46	33.18	100	35	A	H
			2349.34	50.58	-23.42	74	51.4	27.1	5.33	33.25	259	225	P	V
			2389.52	42	-12	54	42.62	27.23	5.39	33.24	259	225	A	V
	*		2440	91.18	-	-	91.6	27.37	5.42	33.21	259	225	P	V
	*		2440	90.67	-	-	91.09	27.37	5.42	33.21	259	225	P	V
			2487.26	51.42	-22.58	74	51.68	27.46	5.46	33.18	259	225	P	V
			2484.39	42.25	-11.75	54	42.51	27.46	5.46	33.18	259	225	A	V



BLE CH 39 2480MHz	*	2480	89.08	-	-	89.36	27.46	5.44	33.18	195	220	P	H
	*	2480	88.1	-	-	88.38	27.46	5.44	33.18	195	220	A	H
		2483.56	63.2	-10.8	74	63.46	27.46	5.46	33.18	195	220	P	H
		2483.56	45.79	-8.21	54	46.05	27.46	5.46	33.18	195	220	A	H
													H
													H
	*	2480	92.47	-	-	92.75	27.46	5.44	33.18	163	194	P	V
	*	2480	91.95	-	-	92.23	27.46	5.44	33.18	163	194	A	V
		2483.52	65.61	-8.39	74	65.87	27.46	5.46	33.18	163	194	P	V
		2483.56	48.11	-5.89	54	48.37	27.46	5.46	33.18	163	194	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)**

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4806	50.08	-23.92	74	43.67	31.42	7.58	32.59	100	226	P	H
		4806	44.16	-9.84	54	37.75	31.42	7.58	32.59	100	226	A	H
													H
													H
		4806	50.92	-23.08	74	44.51	31.42	7.58	32.59	177	187	P	V
		4806	46.08	-7.92	54	39.67	31.42	7.58	32.59	177	187	A	V
													V
													V
BLE CH 19 2440MHz		4878	49.13	-24.87	74	42.45	31.56	7.7	32.58	100	0	P	H
		7320	49.22	-24.78	74	37.01	36.22	9.49	33.5	100	0	P	H
													H
													H
		4878	51.02	-22.98	74	44.34	31.56	7.7	32.58	244	183	P	V
		4878	46.89	-7.11	54	40.21	31.56	7.7	32.58	244	183	A	V
		7320	49.31	-24.69	74	37.1	36.22	9.49	33.5	100	0	P	V
													V
BLE CH 39 2480MHz		4962	49.51	-24.49	74	42.31	31.73	8.05	32.58	100	0	P	H
		7440	49.24	-24.76	74	36.7	36.49	9.61	33.56	100	0	P	H
													H
													H
		4962	50.78	-23.22	74	43.58	31.73	8.05	32.58	206	191	P	V
		4962	47.95	-6.05	54	40.75	31.73	8.05	32.58	206	191	A	V
		7440	49.64	-24.36	74	37.1	36.49	9.61	33.56	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BLE LF		31.89	23.39	-16.61	40	30.58	24.98	0.65	32.82			P	H	
		43.23	21.65	-18.35	40	35.53	18.26	0.65	32.79			P	H	
		150.69	21.1	-22.4	43.5	34.75	17.7	1.33	32.68			P	H	
		753.6	38.62	-7.38	46	41.11	27.53	2.91	32.93	100	0	P	H	
		773.9	38.29	-7.71	46	40.54	27.69	2.97	32.91			P	H	
		804	38.03	-7.97	46	39.96	27.96	2.97	32.86			P	H	
														H
														H
														H
														H
														H
														H
			43.77	35.68	-4.32	40	49.56	18.26	0.65	32.79	100	0	P	V
			86.43	18.73	-21.27	40	35.64	14.62	1.14	32.67			P	V
			92.91	20.42	-23.08	43.5	36.44	15.49	1.14	32.65			P	V
			733.3	37.53	-8.47	46	40.47	27.1	2.91	32.95			P	V
			753.6	39.59	-6.41	46	42.08	27.53	2.91	32.93			P	V
			773.9	38.77	-7.23	46	41.02	27.69	2.97	32.91			P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission





Test Engineer :	Tsung Lee and Wilson Wu	Temperature :	22~24°C
		Relative Humidity :	50~54%

Note symbol





-L	Low channel location
-R	High channel location







**2.4GHz 2400~2483.5MHz
BLE (Band Edge and Fundamental @ 3m)**

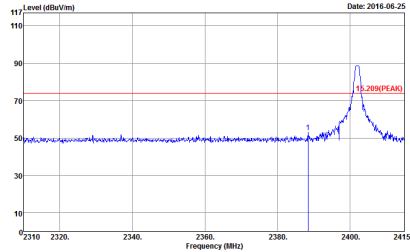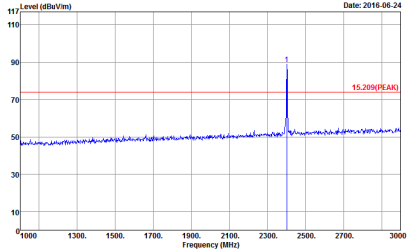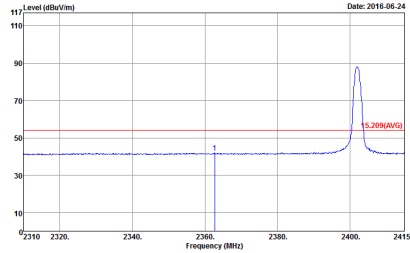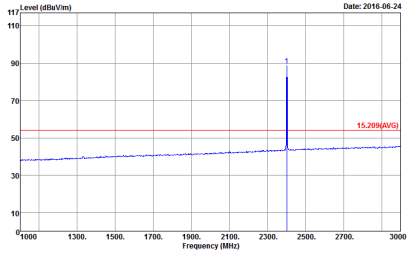BLE	2.4GHz 2400~2483.5MHz Band Edge and Fundamental @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 <p>Date: 2016-06-25</p> <p>Site : 03CH10-HY Condition : 15.209(Peak) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 1</p>	 <p>Date: 2016-06-24</p> <p>Site : 03CH10-HY Condition : 15.209(Peak) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 1</p>
Avg.	 <p>Date: 2016-06-24</p> <p>Site : 03CH10-HY Condition : 15.209(Avg) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 1</p>	 <p>Date: 2016-06-24</p> <p>Site : 03CH10-HY Condition : 15.209(Avg) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 1</p>

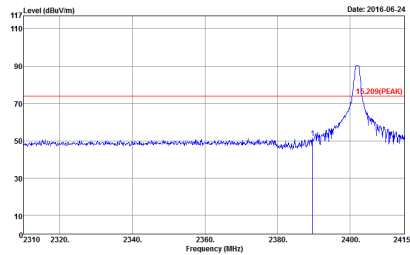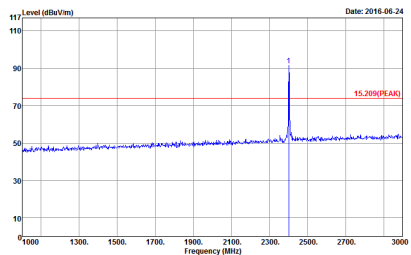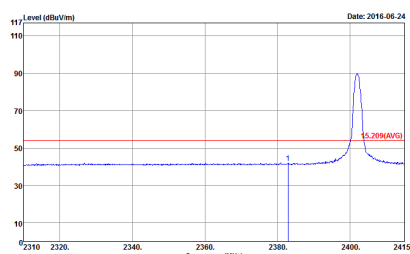
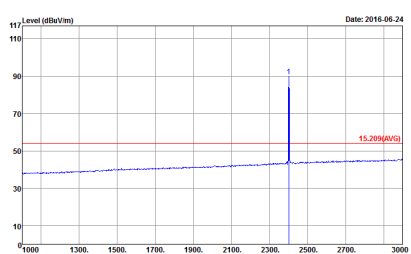


BLE	2.4GHz 2400~2483.5MHz Band Edge and Fundamental @ 3m	
ANT	BLE CH00 2402MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 5O2025-01 Mode : 1</p>	 <p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 5O2025-01 Mode : 1</p>
Avg	 <p>Site : 03CH10-HY Condition : 15.209(AVG) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 5O2025-01 Mode : 1</p>	 <p>Site : 03CH10-HY Condition : 15.209(AVG) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 5O2025-01 Mode : 1</p>

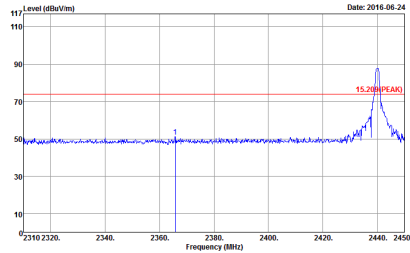
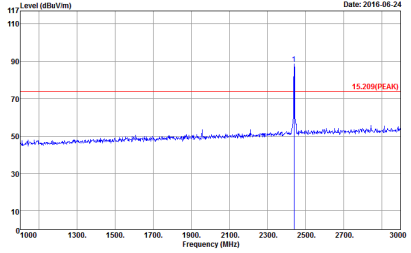
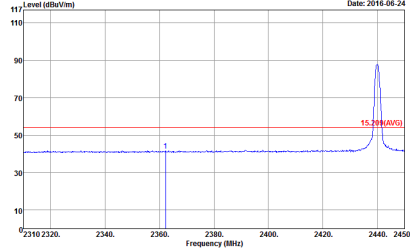
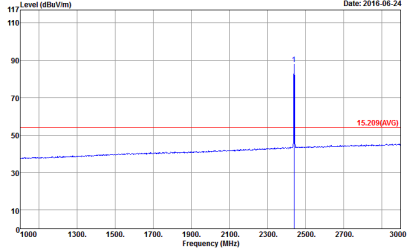


BLE	2.4GHz 2400~2483.5MHz Band Edge and Fundamental @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Horizontal	Fundamental
Peak	 <p>Date: 2016-06-24</p> <p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 2</p>	 <p>Date: 2016-06-24</p> <p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 2</p>
Avg.	 <p>Date: 2016-06-24</p> <p>Site : 03CH10-HY Condition : 15.209(AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 2</p>	 <p>Date: 2016-06-24</p> <p>Site : 03CH10-HY Condition : 15.209(AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 2</p>

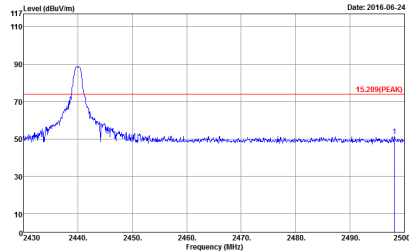
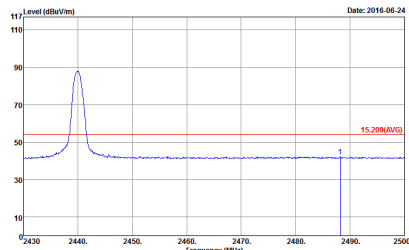


BLE	2.4GHz 2400~2483.5MHz Band Edge and Fundamental @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Horizontal	Fundamental
Peak	 <p> Date: 2016-06-24 Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 2 </p>	Left blank
Avg.	 <p> Date: 2016-06-24 Site : 03CH10-HY Condition : 15.209(AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 2 </p>	Left blank

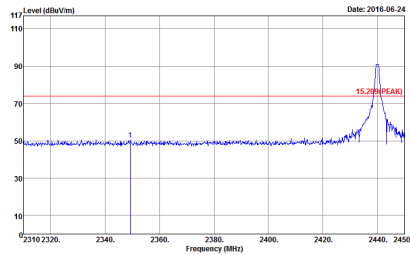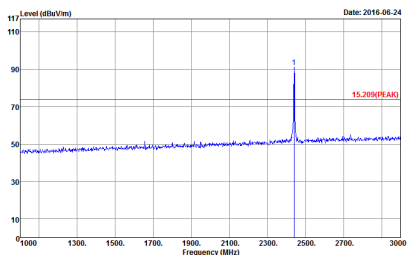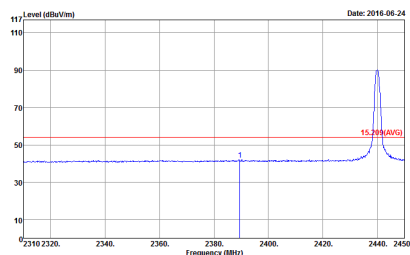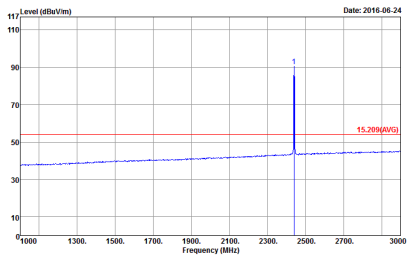

BLE	2.4GHz 2400~2483.5MHz Band Edge and Fundamental @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 2</p>	 <p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 2</p>
Avg.	 <p>Site : 03CH10-HY Condition : 15.209(AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 2</p>	 <p>Site : 03CH10-HY Condition : 15.209(AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 2</p>



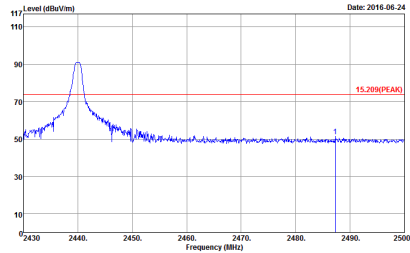
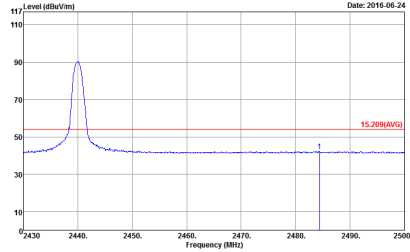


BLE	2.4GHz 2400~2483.5MHz Band Edge and Fundamental @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Vertical	Fundamental
Peak	 <p> Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 5O2025-01 Mode : 2 </p>	Left blank
Avg.	 <p> Site : 03CH10-HY Condition : 15.209(AVG) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 5O2025-01 Mode : 2 </p>	Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge and Fundamental @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Fundamental
Peak	<p>Date: 2016-06-10</p> <p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 3</p>	<p>Date: 2016-06-10</p> <p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 3</p>
Avg.	<p>Date: 2016-06-10</p> <p>Site : 03CH10-HY Condition : 15.209(AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 3</p>	<p>Date: 2016-06-10</p> <p>Site : 03CH10-HY Condition : 15.209(AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 5O2025-01 Mode : 3</p>

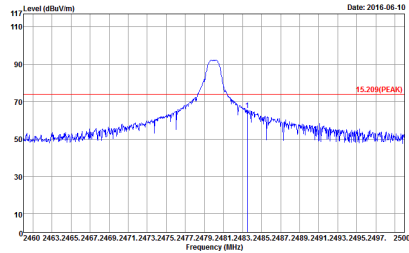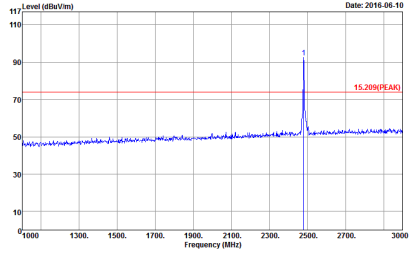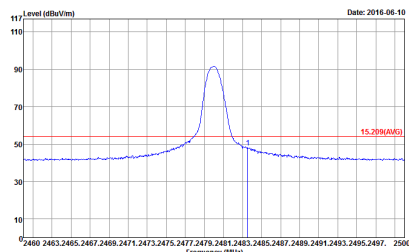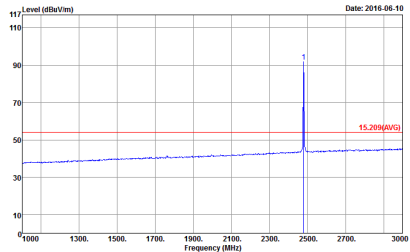

BLE	2.4GHz 2400~2483.5MHz Band Edge and Fundamental @ 3m	
ANT	BLE CH39 2480MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 5O2025-01 Mode : 3</p>	 <p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 5O2025-01 Mode : 3</p>
Avg.	 <p>Site : 03CH10-HY Condition : 15.209(AVG) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 5O2025-01 Mode : 3</p>	 <p>Site : 03CH10-HY Condition : 15.209(AVG) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 5O2025-01 Mode : 3</p>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	<p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN_9170_406_0584 HORIZONTAL Detector : Peak Project : 5O2025-01 Mode : 1</p>	<p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN_9170_406_0584 VERTICAL Detector : Peak Project : 5O2025-01 Mode : 1</p>





BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN_9170_406_0584 HORIZONTAL Detector : Peak Project : 5O2025-01 Mode : 2</p>	<p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN_9170_406_0584 VERTICAL Detector : Peak Project : 5O2025-01 Mode : 2</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
<p>Peak</p>	<p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN_9170_406_0584 HORIZONTAL Detector : Peak Project : 5O2025-01 Mode : 3</p>	<p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m HORN_9170_406_0584 VERTICAL Detector : Peak Project : 5O2025-01 Mode : 3</p>




Emission below 1GHz
2.4GHz BLE (LF)

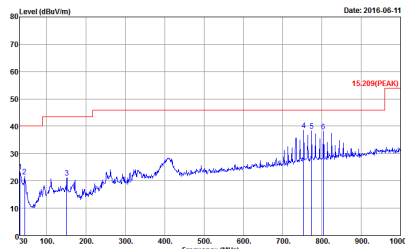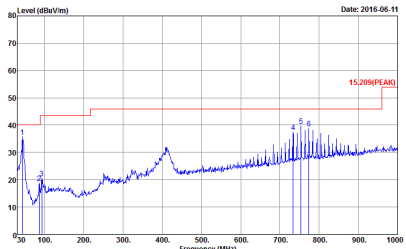BLE	2.4GHz 2400~2483.5MHz	
ANT	BLE LF	
1	Horizontal	Vertical
<p>QP / Peak</p>	 <p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m BI-LOG 6111D-LF HORIZONTAL Detector : Peak Project : 5Q2025-01 Mode : 13</p>	 <p>Site : 03CH10-HY Condition : 15.209(PEAK) 3m BI-LOG 6111D-LF VERTICAL Detector : Peak Project : 5Q2025-01 Mode : 13</p>

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth 4.1 - LE	60.51	380	2.63	3kHz

Bluetooth 4.1 - LE

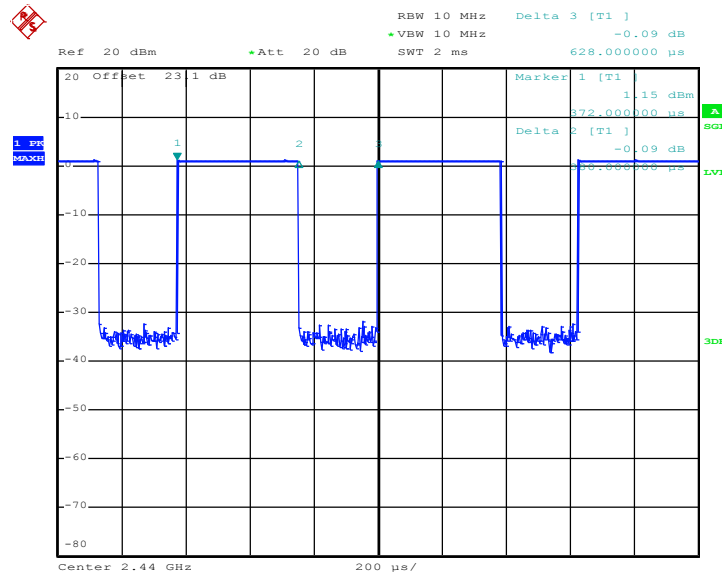

Date: 2.JUN.2016 01:23:48