

FCC RF Test Report

For

Ring LLC

Test Standards:	<u>Part 15C Subpart C §15.247</u>
Product Description:	<u>Floodlight Wired</u>
Tested Model:	<u>5W21S8</u>
Additional Model No.:	<u>N/A</u>
Brand Name:	<u>Ring</u>
FCC ID:	2AEUPBHAFM001
ISED:	20271-BHAFM001
Classification	(DTS) Digital Transmission System
Report No.:	<u>EC1811006F01</u>
Tested Date:	<u>2018-11-12 to 2018-12-25</u>
Issued Date:	<u>2018-12-25</u>
Prepared By:	 Tiny Yang/ Engineer
Approved By:	 Bacon Wu / RF Manager

Hunan Ecloud Testing Technology Co., Ltd.

Building A1, Changsha E Center, No. 18 Xiangtai Avenue, Liuyang Economic and
Technological Development Zone, Hunan, P.R.C

Tel.: +86-731-89634887 Fax.: +86-731-89634887

www.hn-ecloud.com

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Hunan Ecloud Testing Technology Co., Ltd., the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	2018.12.25	Valid	Original Report

TABLE OF CONTENTS

1. TEST LABORATORY	5
1.1 Test facility	5
2. GENERAL DESCRIPTION.....	6
2.1 Applicant	6
2.2 Manufacturer	6
2.3 General Description Of EUT	6
2.4 Modification of EUT	6
2.5 Applicable Standards.....	7
3. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
3.1 Descriptions of Test Mode	8
3.2 Test Mode	9
3.3 Support Equipment	10
3.4 Test Setup	10
3.5 Measurement Results Explanation Example.....	12
4. TEST RESULT	13
4.1 6dB and 99% Bandwidth Measurement	13
4.2 Peak Output Power Measurement	16
4.3 Power Spectral Density Measurement	19
4.4 Conducted Band Edges and Spurious Emission Measurement	22
4.5 Radiated Band Edges and Spurious Emission Measurement	31
4.6 AC Conducted Emission Measurement.....	61
4.7 Antenna Requirements.....	64
5. LIST OF MEASURING EQUIPMENT.....	65
6. UNCERTAINTY OF EVALUATION.....	66
 APPENDIX A. SETUP PHOTOGRAPHS	
 APPENDIX B. EUT EXTERNAL PHOTOGRAPHS	
 APPENDIX C. EUT INTERNAL PHOTOGRAPHS	

Summary of Test RESULT

FCC Rule	IC Rule	Description	Limit	Result	Remark
15.247(a)(2)	RSS-247 5.2(1)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
-	RSS-Gen 6.6	99% Bandwidth	-	Pass	-
15.247(b)(1)	RSS-247 A5.4(4)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
15.247(e)	RSS-247 5.2(2)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
15.247(d)	RSS-247 5.5	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
15.247(d)	RSS-247 5.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit -3.09 dB at 99.84 MHz
15.207	RSS-Gen 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit -2.81 dB at 2.721 MHz
15.203 & 15.247(b)	N/A	Antenna Requirement	N/A	Pass	-

1. Test Laboratory

1.1 Test facility

CNAS (accreditation number: L11138)

Hunan Ecloud Testing Technology Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1244 , Test Firm Registration Number: 793308)

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

ISED(CAB identifier: CN0012)

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the Wireless Device Testing Laboratories list of innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements.

A2LA (Certificate Code: 4895.01)

Hunan Ecloud Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

2. General Description

2.1 Applicant

Ring LLC
1523 26th St, Santa Monica, CA 90404

2.2 Manufacturer

Guangdong Bestek Technology Co., Ltd
No.1, B Road, Longling industrial Zone, YuanCheng District, HeYuan City. China

2.3 General Description Of EUT

Product	Floodlight Wired
Model No.	5W21S8
Additional No.	N/A
Difference Description	N/A
FCC ID	2AEUPBHAFM001
IC ID	20271-BHAFM001
Power Supply	120Vac
Modulation Technology	BLE/ LoRa
Modulation Type	GFSK/ LoRa 500KHz DTS
Operating Frequency	2402MHz ~ 2480MHz - BLE 902.5MHz ~ 927.0MHz – DTS
Max. Output Power	-3.631 dBm (0.4334 mW)
Antenna Type	BLE: PCB Antenna type with -1.8dBi gain Lora: PCB Antenna type with -4.17dBi gain
I/O Ports	Refer to user's manual

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

2.4 Modification of EUT

No modifications are made to the EUT during all test items.

2.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013
- ♦ IC RSS-247 Issue 2
- ♦ IC RSS-Gen Issue 5
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05

Remark:

1. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, ICES-005 recorded in a separate test report.

3. Test Configuration of Equipment Under Test

3.1 Descriptions of Test Mode

The transmitter has a maximum peak conducted output power as follows:

Channel	Frequency	Mode	Bluetooth RF Output Power
Ch00	2402MHz	GFSK	-3.907
Ch19	2440MHz	GFSK	-3.727
Ch39	2480MHz	GFSK	-3.631

- a. Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

3.2 Test Mode

3.2.1 Antenna Port Conducted Measurement

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.2 – LE GFSK
Conducted Test Cases	Mode 1: CH00_2402 MHz Mode 2: CH19_2440 MHz Mode 3: CH39_2480 MHz

3.2.2 Radiated Emission Test (Below 1GHz)

Radiated Test Cases	Bluetooth 4.2 - LE	
	Transmitting	Mode 1: CH00_2402 MHz

- Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
2. All above modes were tested, but only the worst case test mode 1 was reported .

3.2.3 Radiated Emission Test (Above 1GHz)

Radiated Test Cases	Bluetooth 4.2 - LE	
	Transmitting	Mode 1: CH00_2402 MHz

- Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
2. Following channel(s) was (were) selected for the final test as listed above

3.2.4 Power Line Conducted Emission Test:

AC Conducted Emission	Mode 1 : Bluetooth Link Mode
-----------------------	------------------------------


3.3 Support Equipment

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	E470C	FCC DoC	N/A	shielded cable DC O/P 1.8 m unshielded AC I/P cable 1.2 m


3.4 Test Setup

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.


Setup diagram for Conducted Test

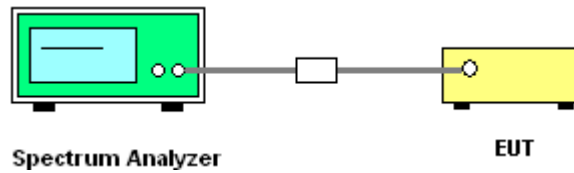


Setup diagram for Raidation(9KHz~30MHz) Test

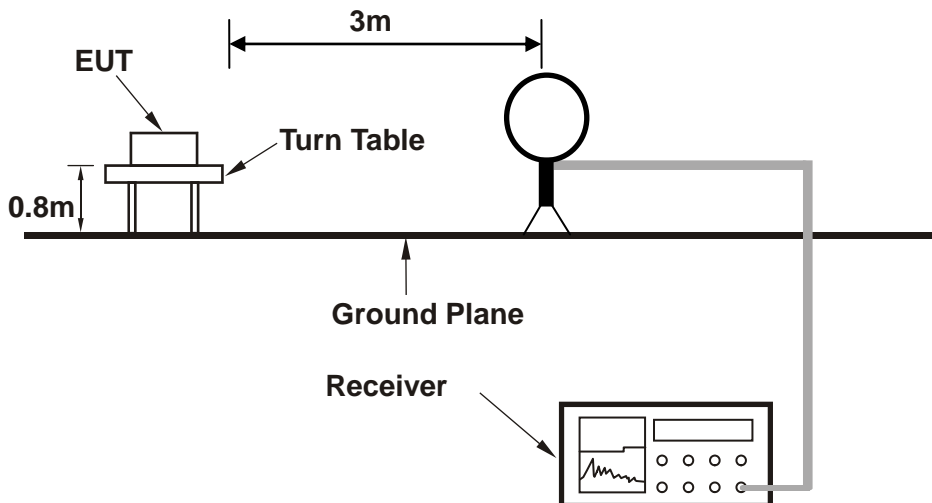


Setup diagram for Raidation(Below 1G) Test

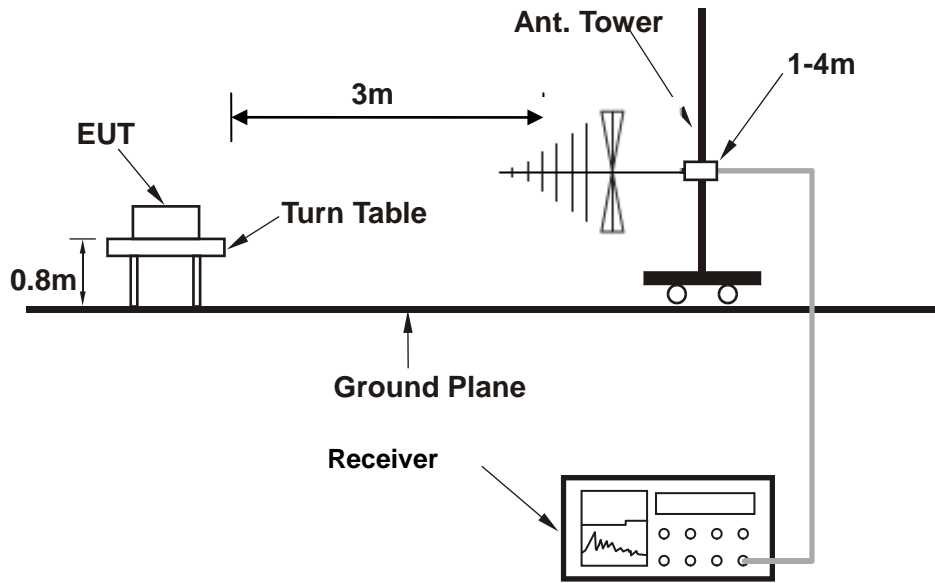

Setup diagram for Raidation(Above1G) Test

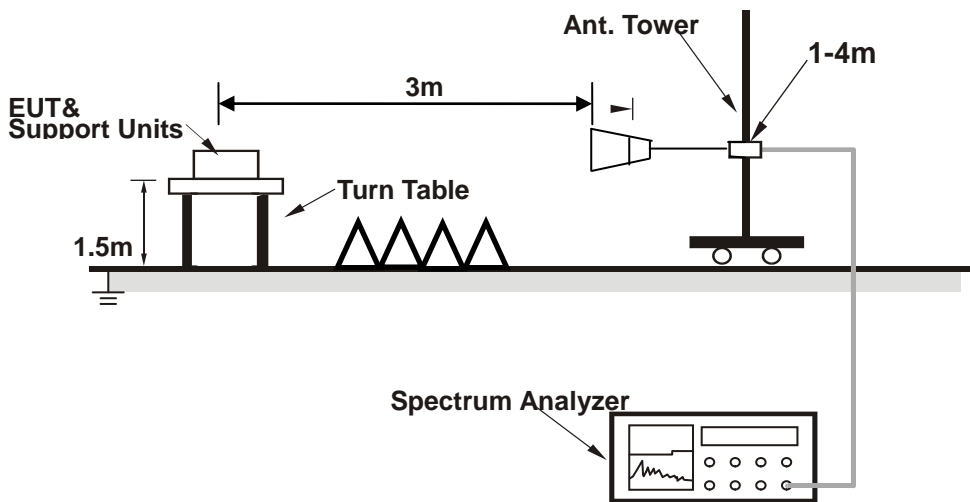

Setup diagram for AC Conducted Emission Test

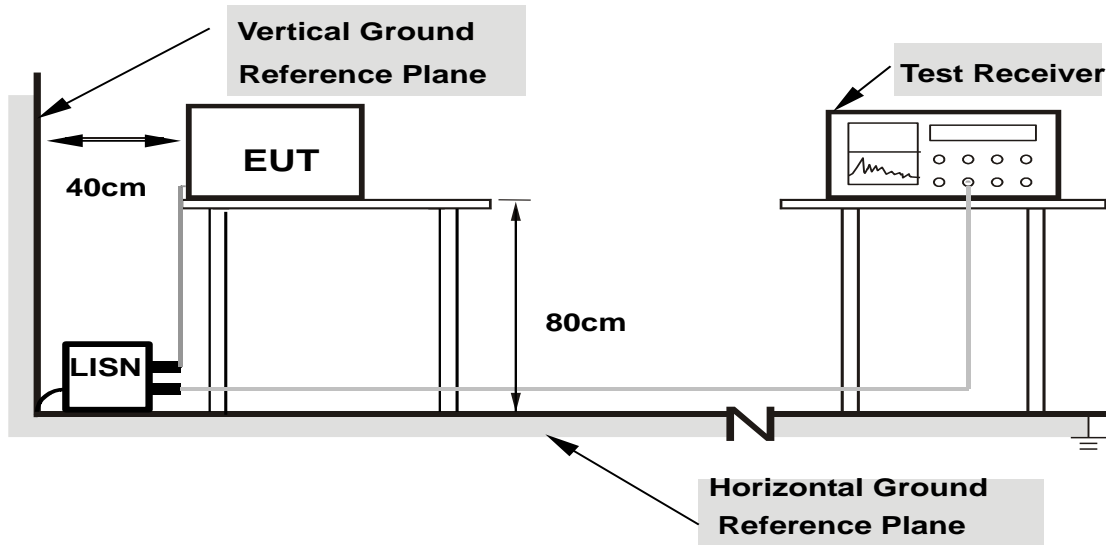

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5 + 10 = 15 \text{ (dB)} \end{aligned}$$

4. Test Result

4.1 6dB and 99% Bandwidth Measurement

4.1.1 Limit of 6dB and 99% Bandwidth

FCC §15.247 (a) (2)

IC RSS-247 5.2(1)

The minimum 6 dB bandwidth shall be at least 500 kHz.


4.1.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set to the maximum power setting and enable the EUT transmit continuously
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.

4.1.3 Test Result of 6dB and 99% Bandwidth

Test Mode :		Transmitting		Temperature : 24~26°C	
Test Engineer :		Damon Zhang		Relative Humidity : 50~53%	
Data Rate	Modulation	Channel	6dB Bandwidth [MHz]	99% OBW[MHz]	Verdict
1Mbps	GFSK	LCH	0.5158	1.0815	PASS
1Mbps	GFSK	MCH	0.5479	1.0852	PASS
1Mbps	GFSK	HCH	0.5646	1.0865	PASS

6dB and 99% Bandwidth Plot

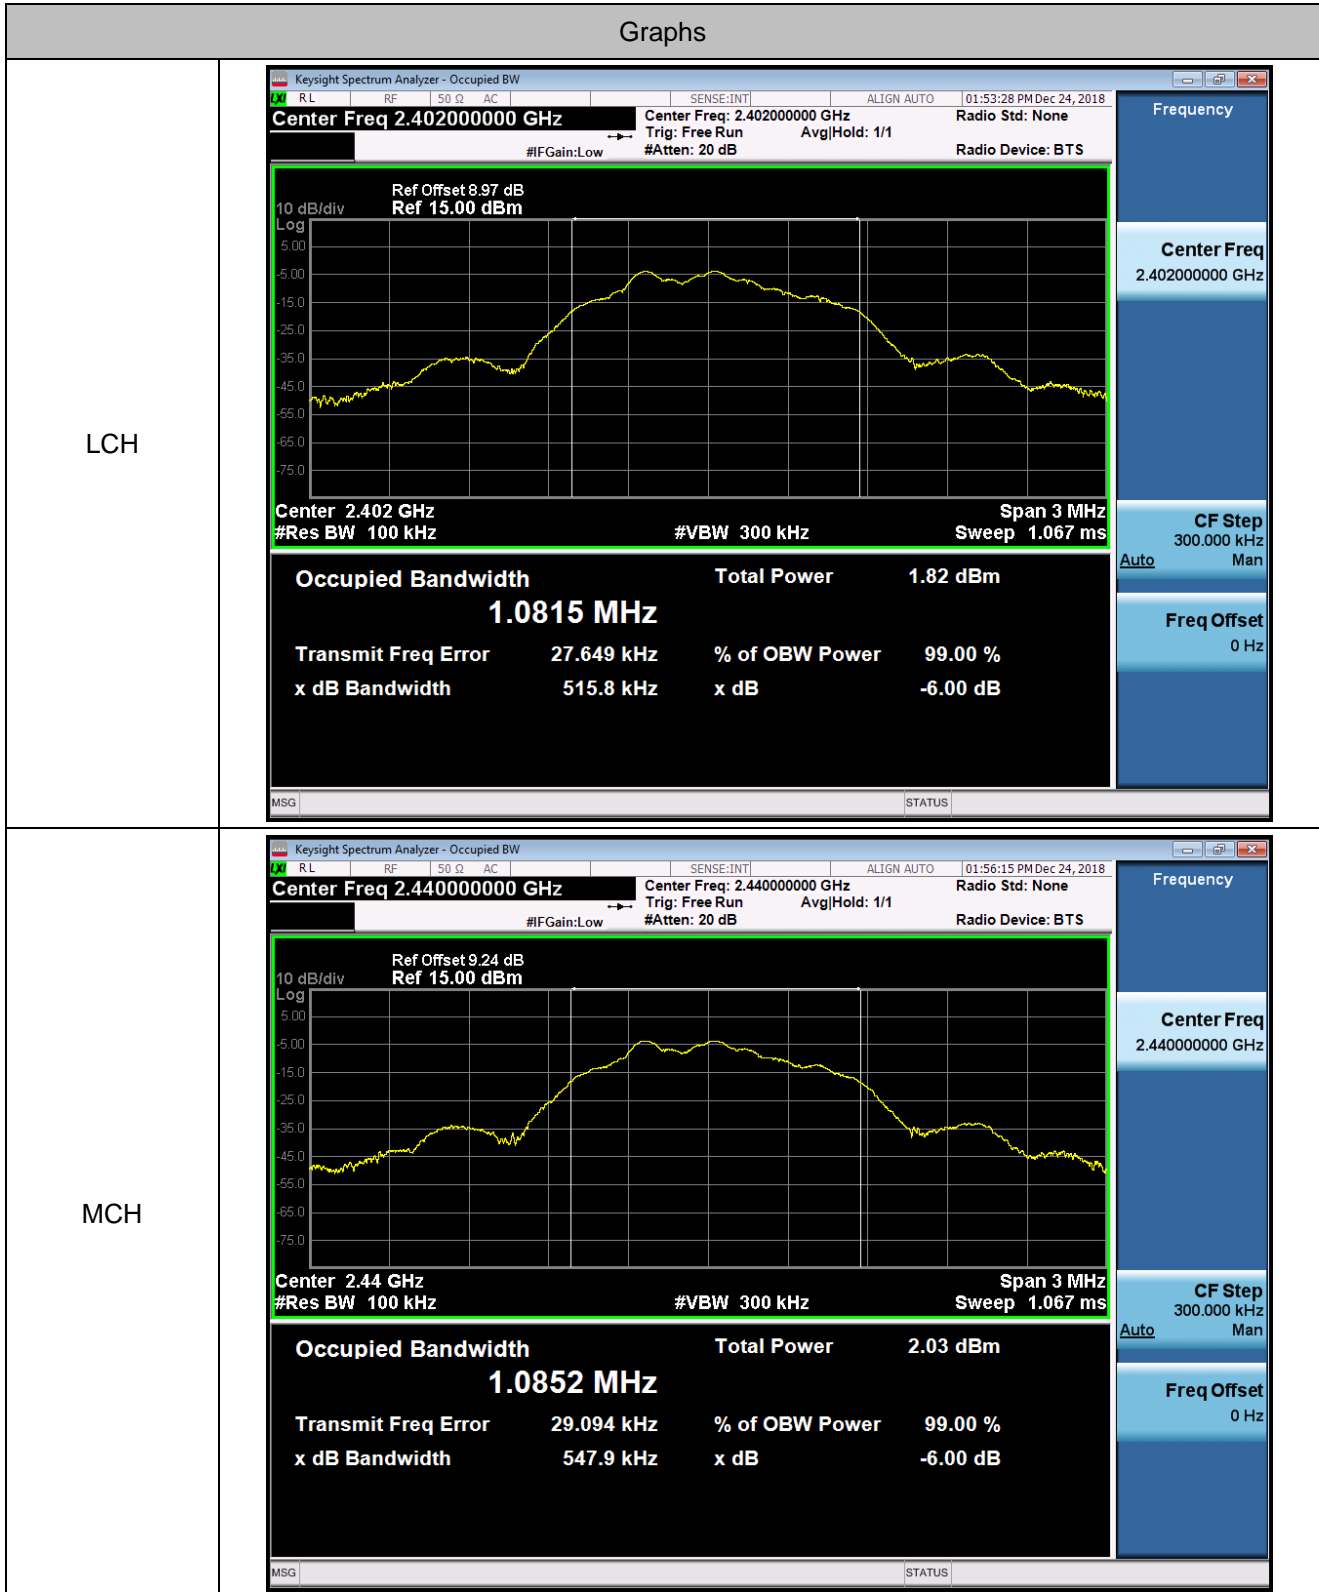

HCH



4.2 Peak Output Power Measurement

4.2.1 Limit of Peak Output Power

FCC §15.247 (b)(3)

IC RSS-247 A5.4(4)

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


4.2.2 Test Procedures


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to spectrum analyzer.
3. Set to the maximum power setting and enable the EUT transmit continuously
4. Set the RBW \geq DTS Bandwidth, VBW \geq 3*RBW, Span \geq 3*RBW, Detector=Peak, Sweep time=auto couple, Trace mode=max hold.
5. Allow trace to fully stabilize, Use peak marker function to determine the peak amplitude level.
6. Measure the conducted output power

4.2.3 Test Result of Peak Output Power

Test Mode :		Transmitting	Temperature :	24~26°C
Test Engineer :		Damon Zhang	Relative Humidity :	50~53%
Data Rate	Modulation	Channel	Conduct Peak Power[dBm]	Verdict
1Mbps	GFSK	LCH	-3.907	PASS
1Mbps	GFSK	MCH	-3.727	PASS
1Mbps	GFSK	HCH	-3.631	PASS

Peak Output Power Plot

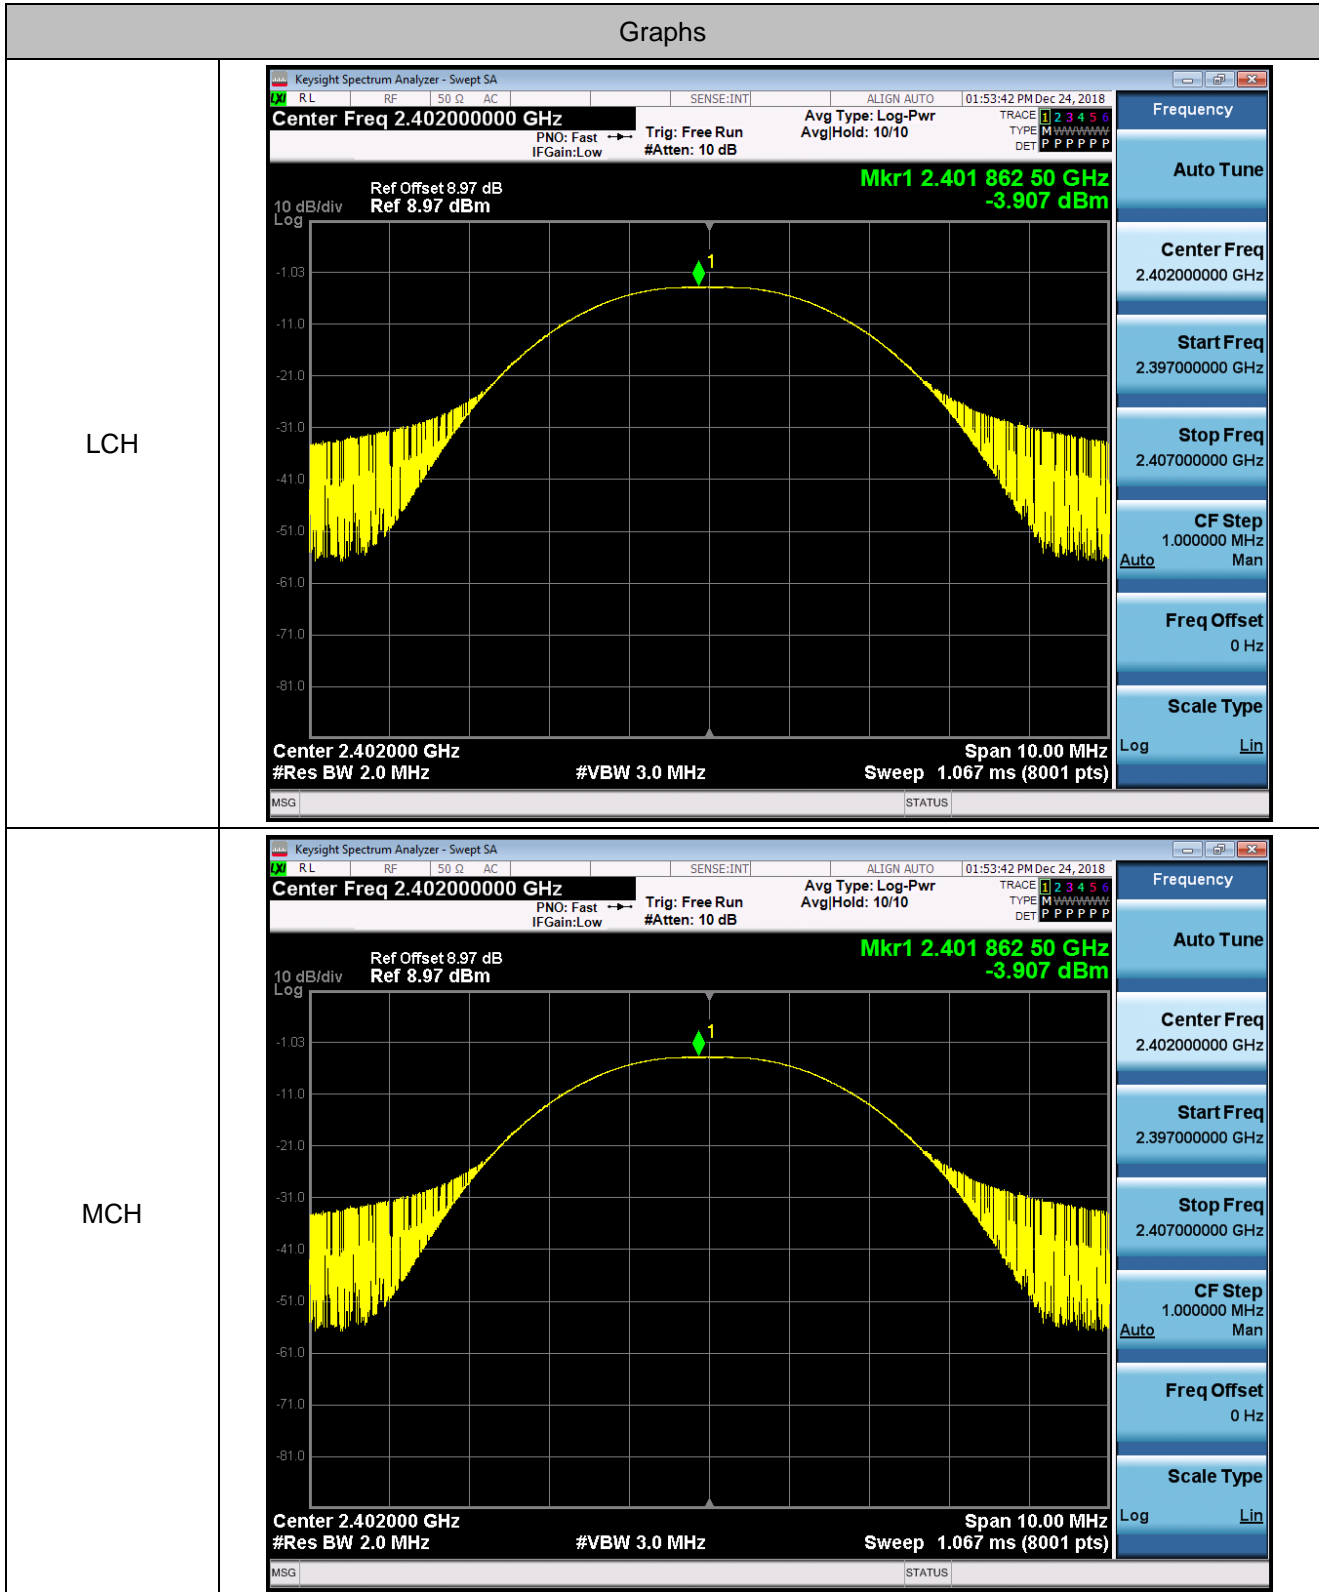

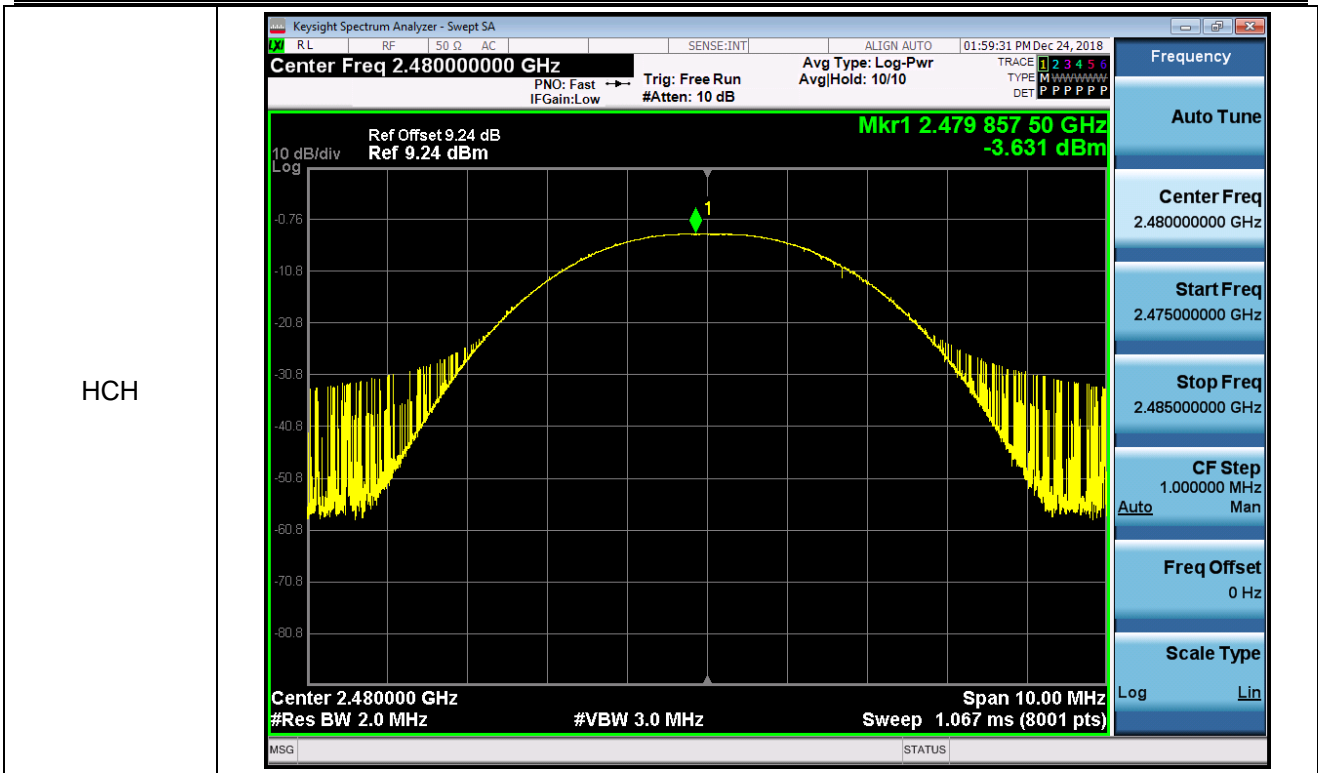

4.3 Power Spectral Density Measurement

4.3.1 Limits of Power Spectral Density

FCC § 15.247(e)

IC RSS-247 5.2(2)

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

4.3.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
5. Measure and record the results in the test report.
6. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.


4.3.3 Test Result of Power Spectral Density

Test Mode :		Transmitting	Temperature :	24~26°C
Test Engineer :		Damon Zhang	Relative Humidity :	50~53%
Data Rate	Modulation	Channel	PSD [dBm]	Verdict
1Mbps	GFSK	LCH	-20.556	PASS
1Mbps	GFSK	MCH	-20.300	PASS
1Mbps	GFSK	HCH	-20.318	PASS


Power Spectral Density Plot

Graphs


LCH

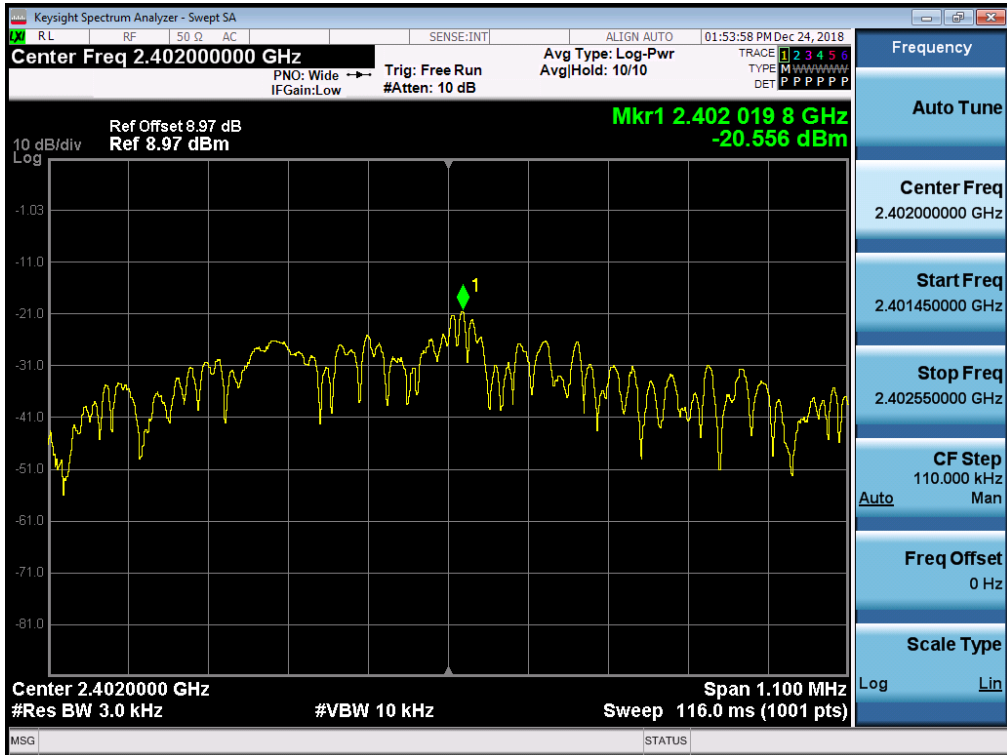

MCH

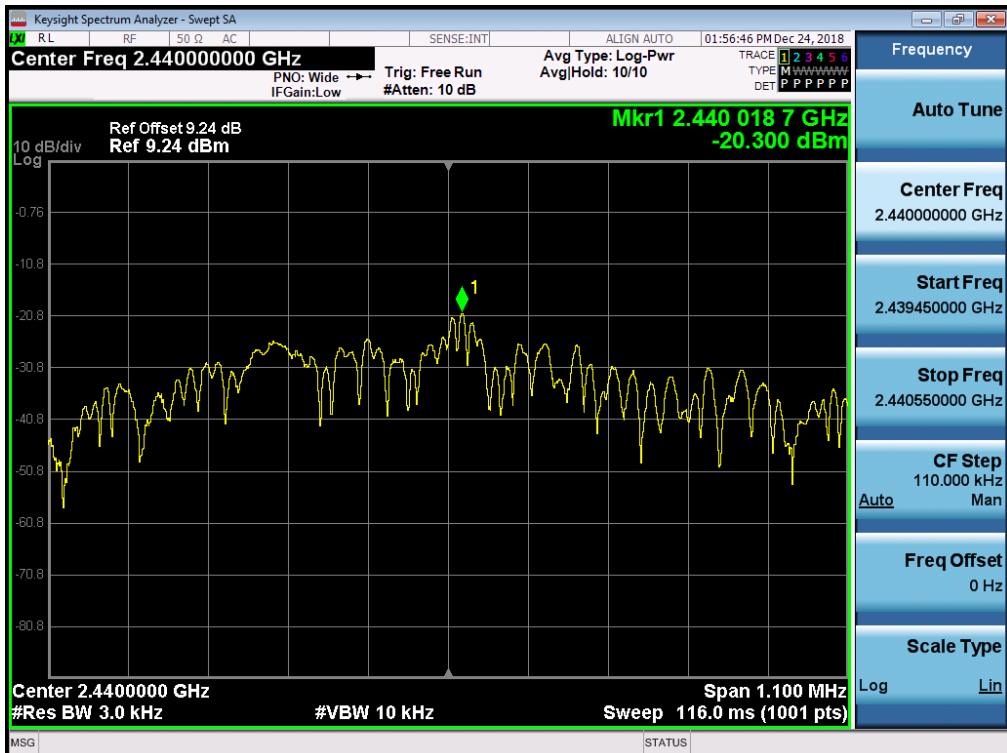

HCH

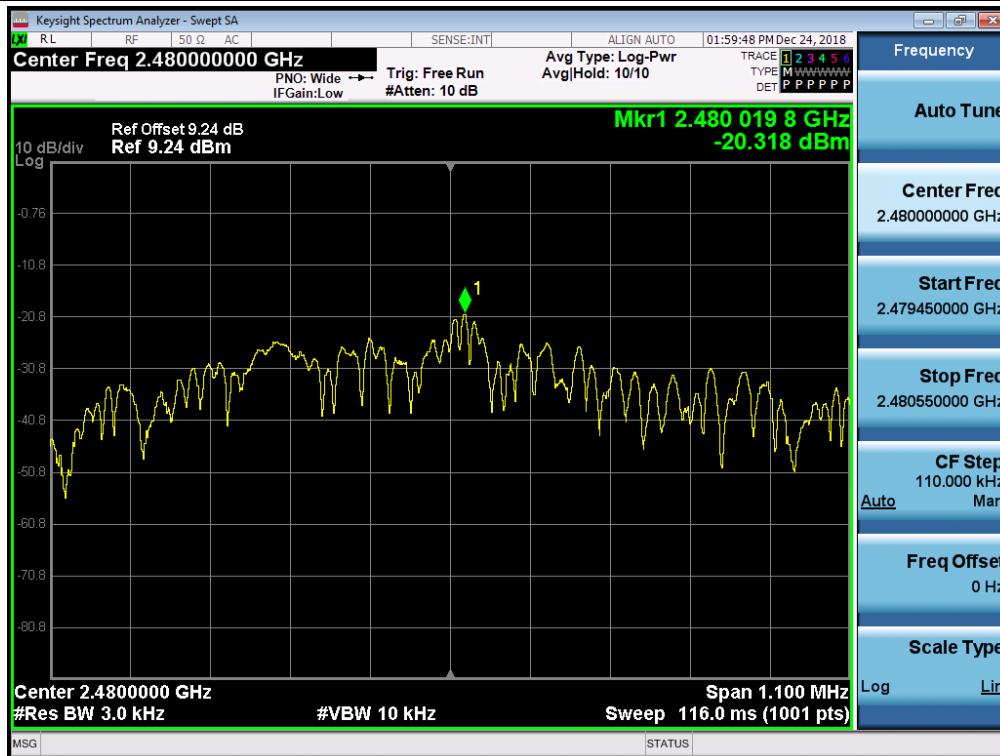

4.4 Conducted Band Edges and Spurious Emission Measurement

4.4.1 Limit of Conducted Band Edges and Spurious Emission

FCC §15.247 (d)

IC RSS-247 5.5

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


4.4.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


4.4.3 Test Result of Conducted Band Edges

Test Mode :		Transmitting		Temperature :		24~26°C	
Test Engineer :		Damon Zhang		Relative Humidity :		50~53%	
Data Rate	Modulation	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict	
1Mbps	GFSK	LCH	-3.922	-52.335	-23.92	PASS	
1Mbps	GFSK	HCH	-3.583	-54.664	-23.58	PASS	

Conducted Band Edges Plot

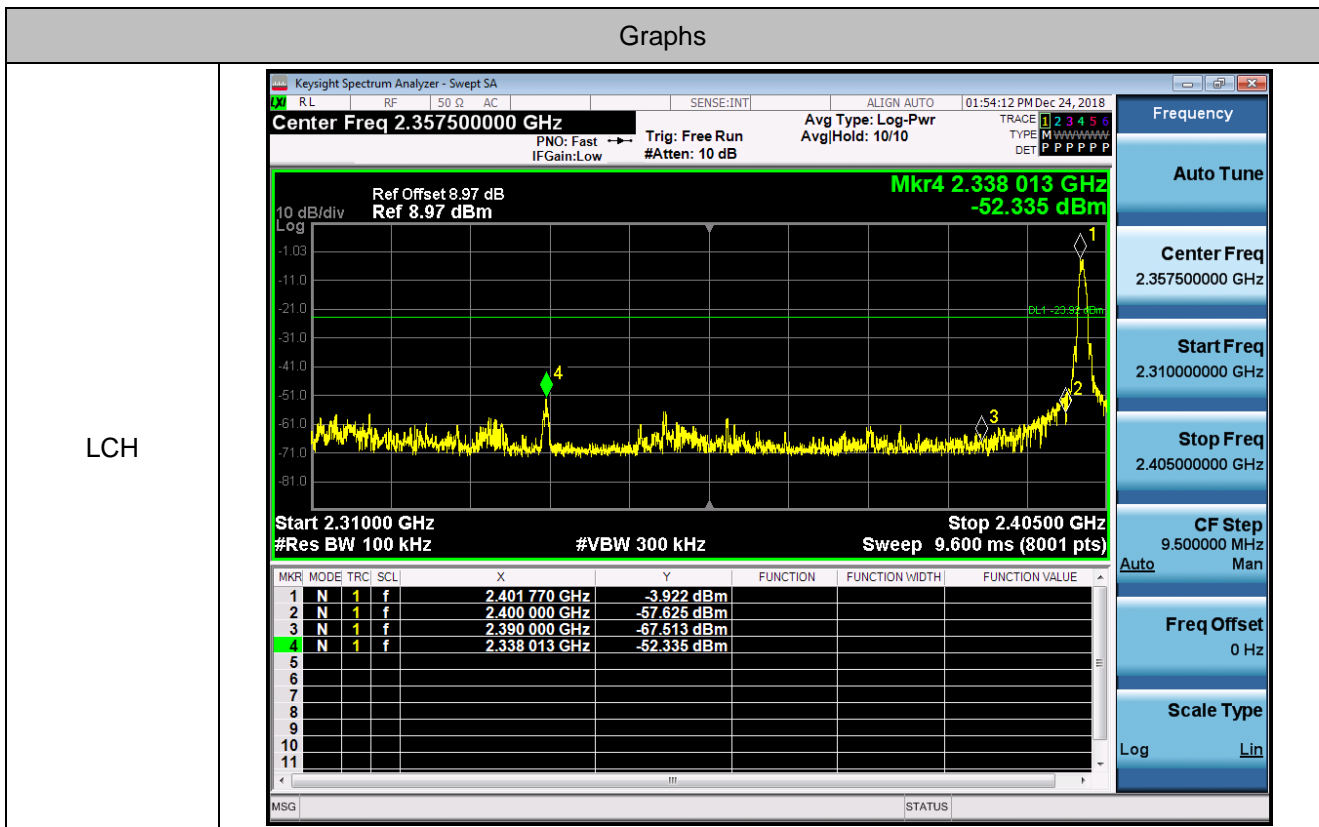


HCH

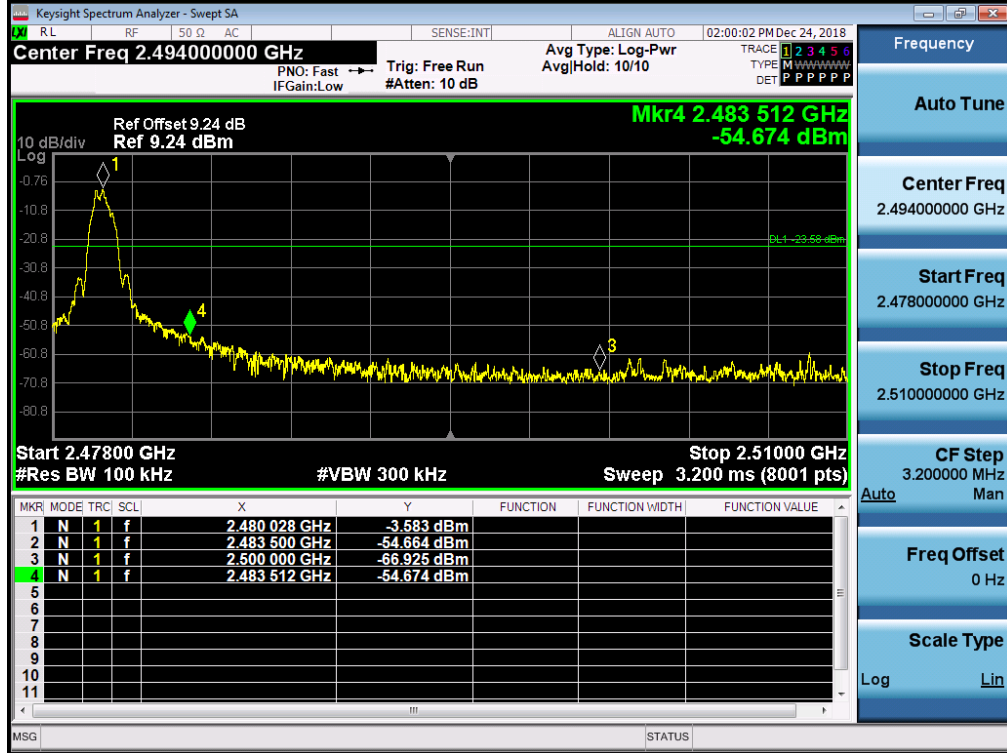


4.4.4 Test Result of Conducted Spurious Emission

Test Mode :		Transmitting		Temperature :	24~26°C
Test Engineer :		Damon Zhang		Relative Humidity :	50~53%
Data Rate	Modulation	Channel	Pref [dBm]	Puw[dBm]	Verdict
1Mbps	GFSK	LCH	-3.857	<Limit	PASS
1Mbps	GFSK	MCH	-3.731	<Limit	PASS
1Mbps	GFSK	HCH	-3.654	<Limit	PASS


Conducted Band Edges and Spurious Emission Plot

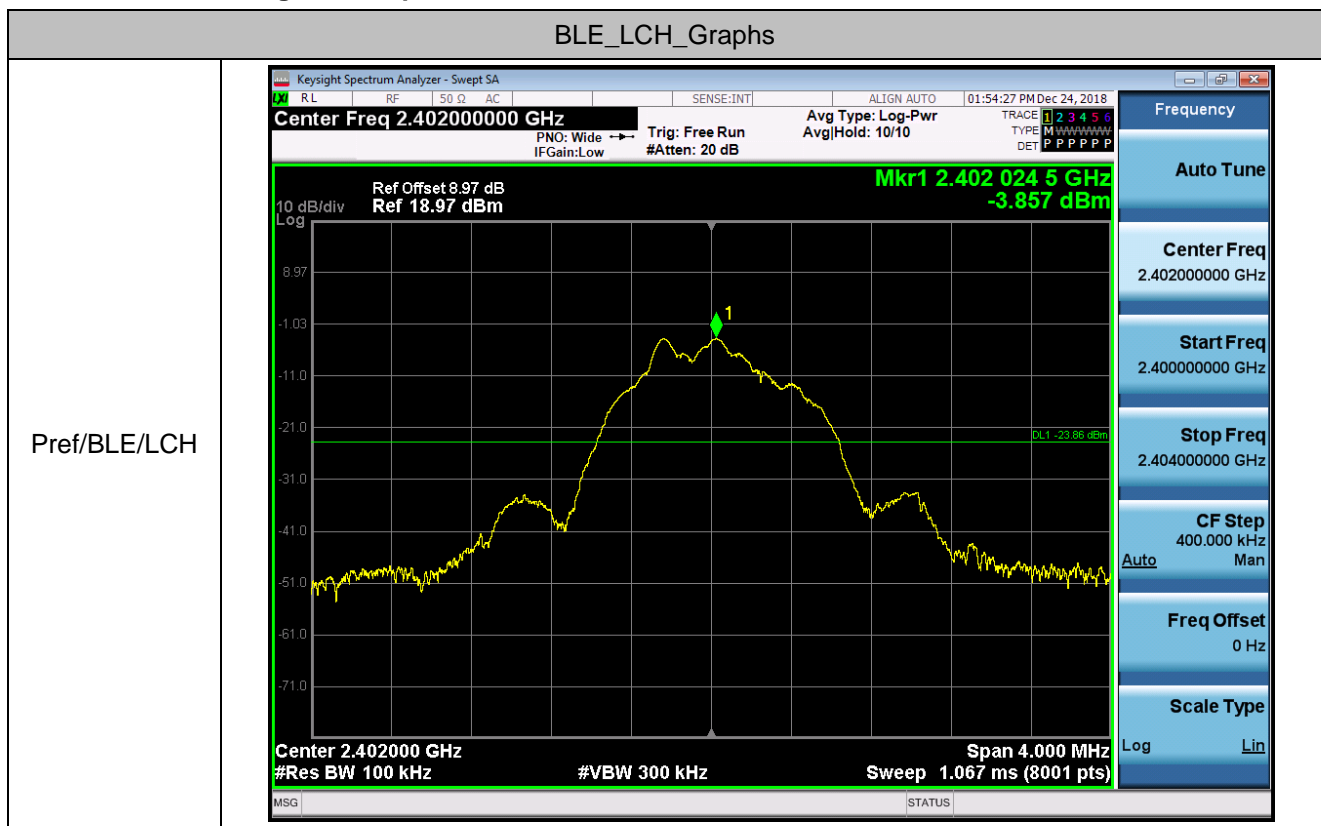


Puw/BLE/LCH

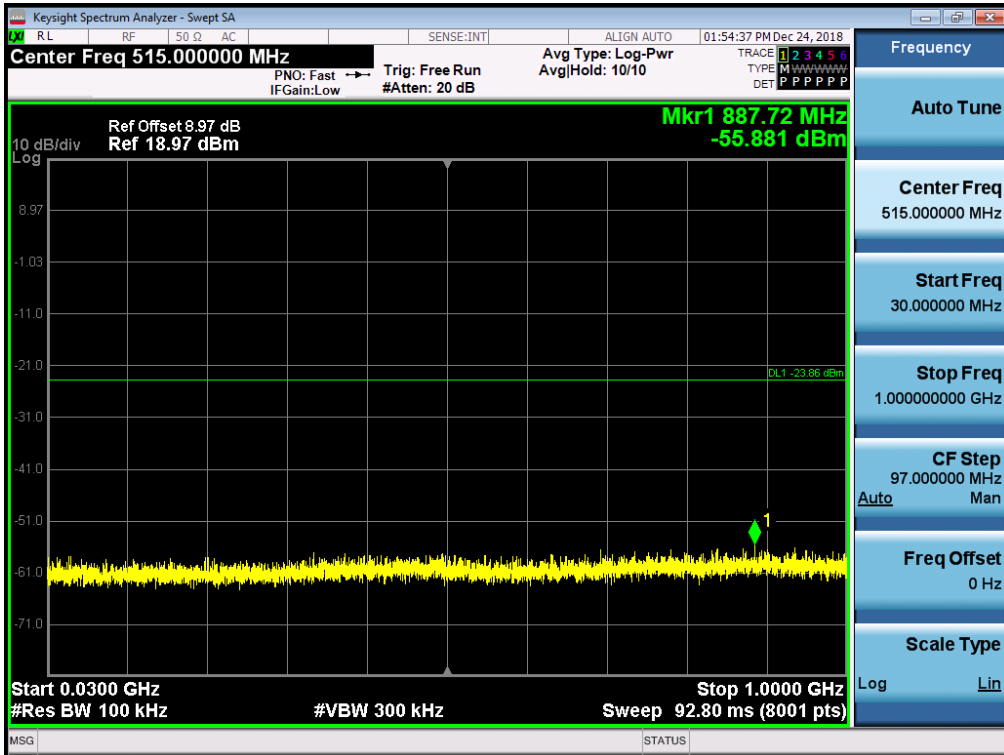

BLE_MCH_Graphs

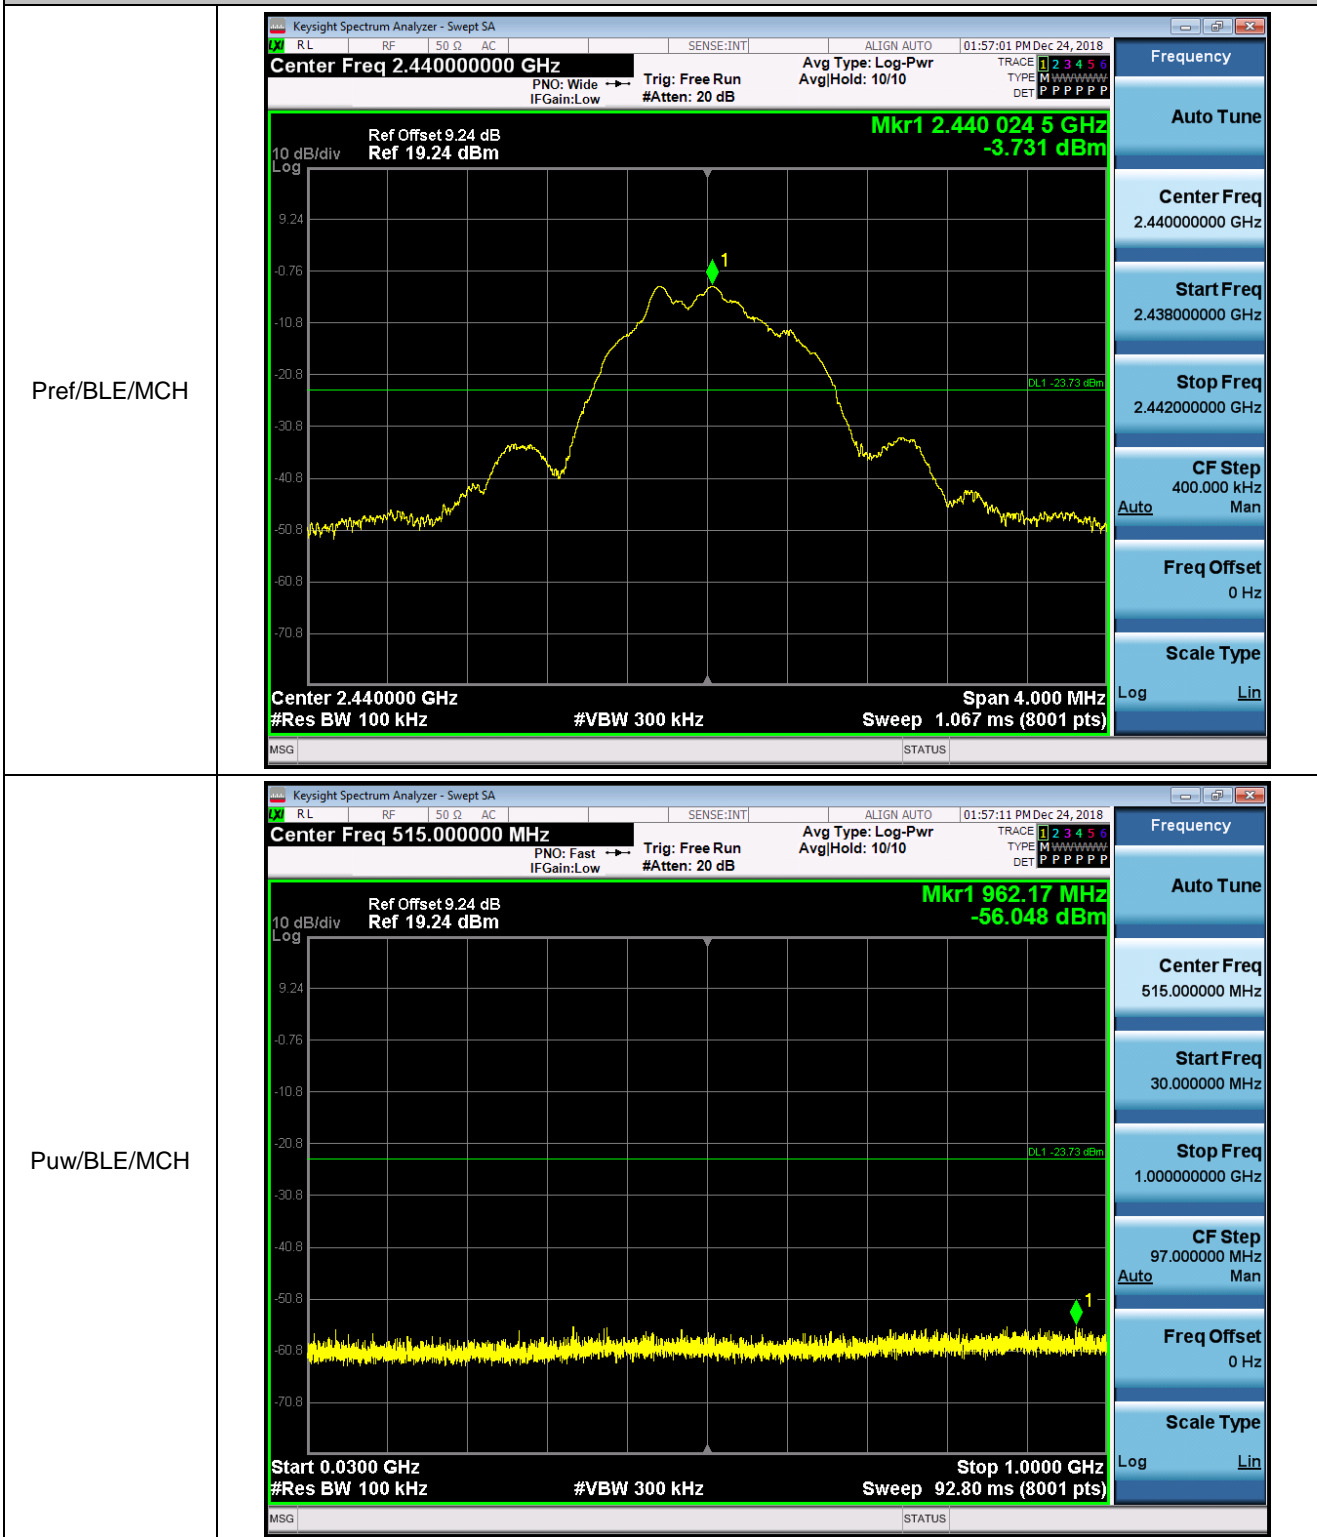

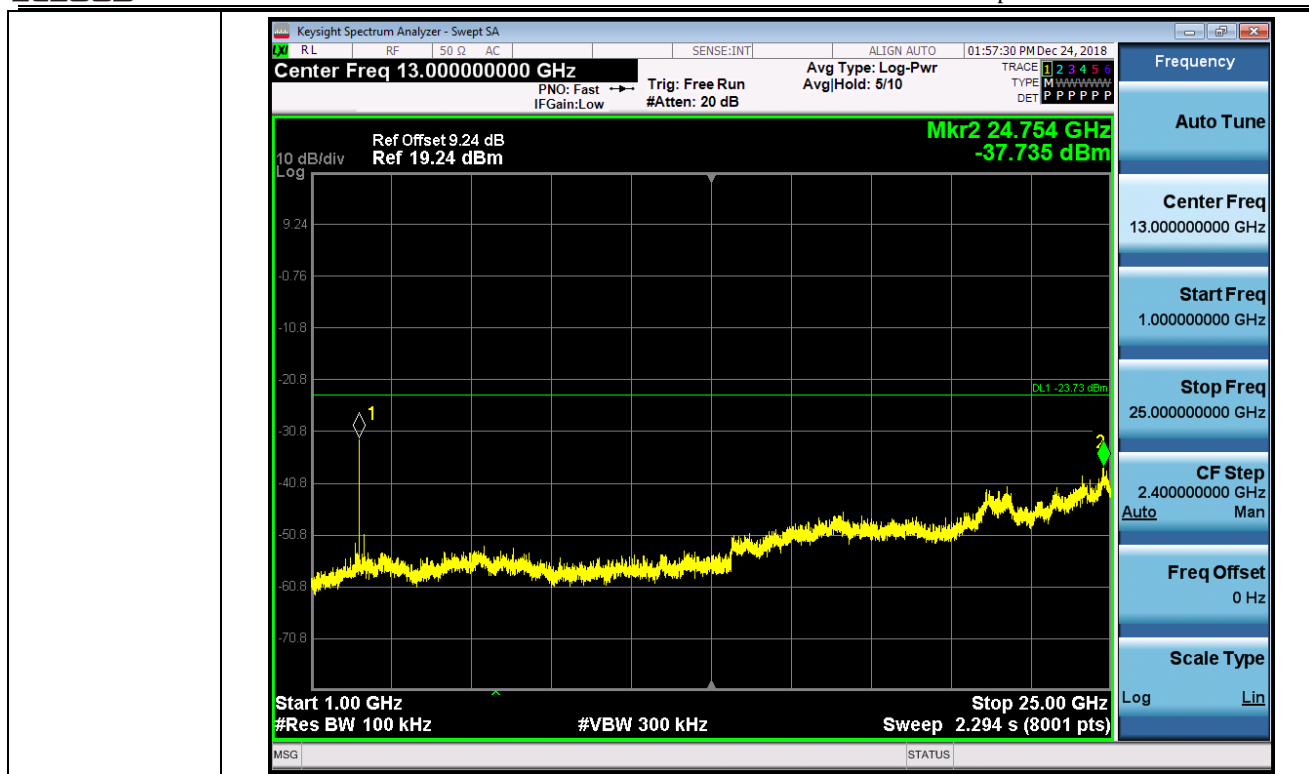



BLE_HCH_Graphs

Pref/BLE/HCH



Puw/BLE/HCH

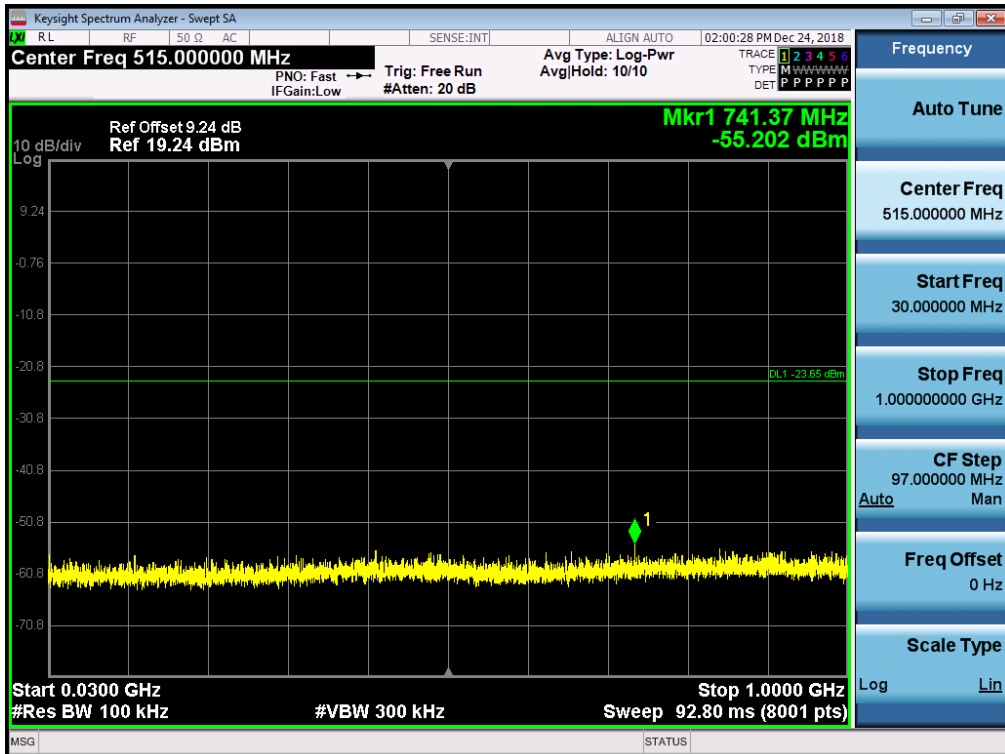

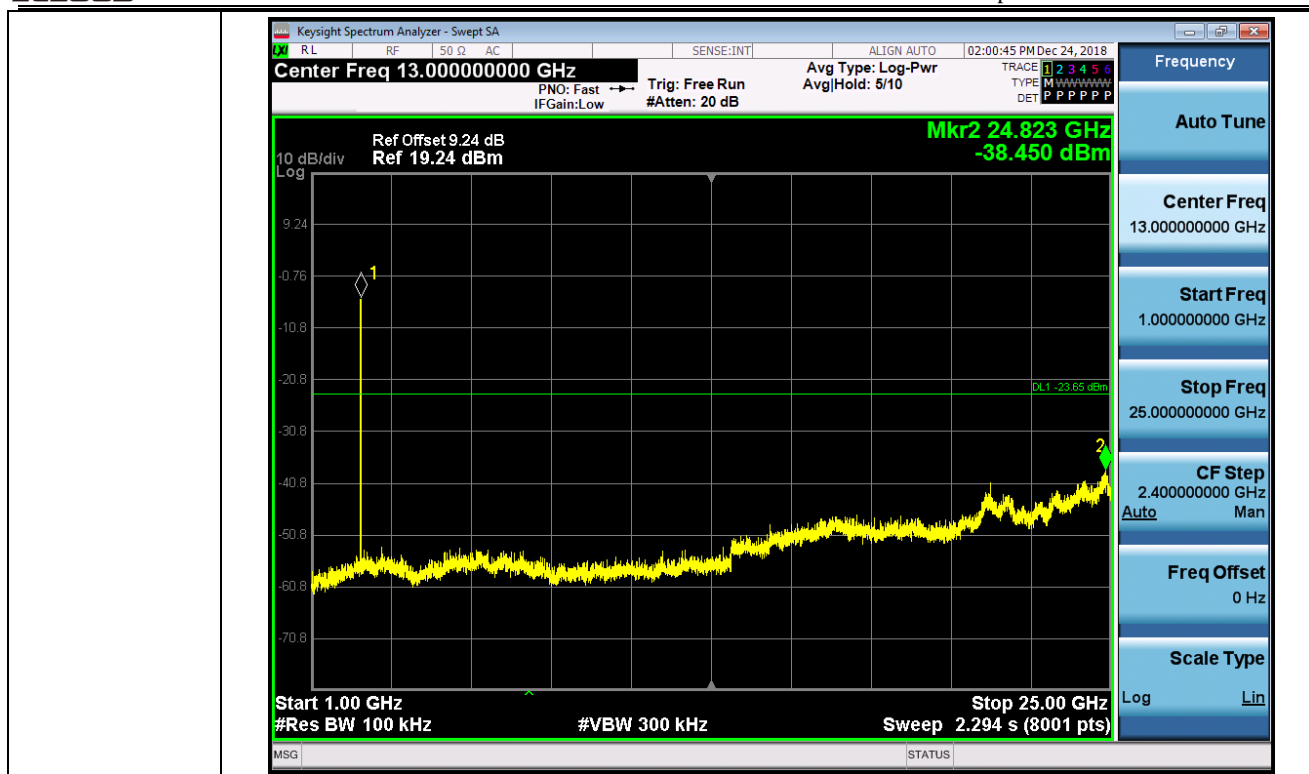

4.5 Radiated Band Edges and Spurious Emission Measurement

4.5.1 Limit of Radiated Band Edges and Spurious Emission

FCC §15.247 (d)

IC RSS-247 5.5


In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The frequency range from 9KHz to 10th harmonic (25GHz) are checked, and no any emissions were found from 18GHz to 25GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.5.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The measurement distance is 3 meter.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement:
 VBW = 10 Hz, when duty cycle is no less than 98 percent.
 VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

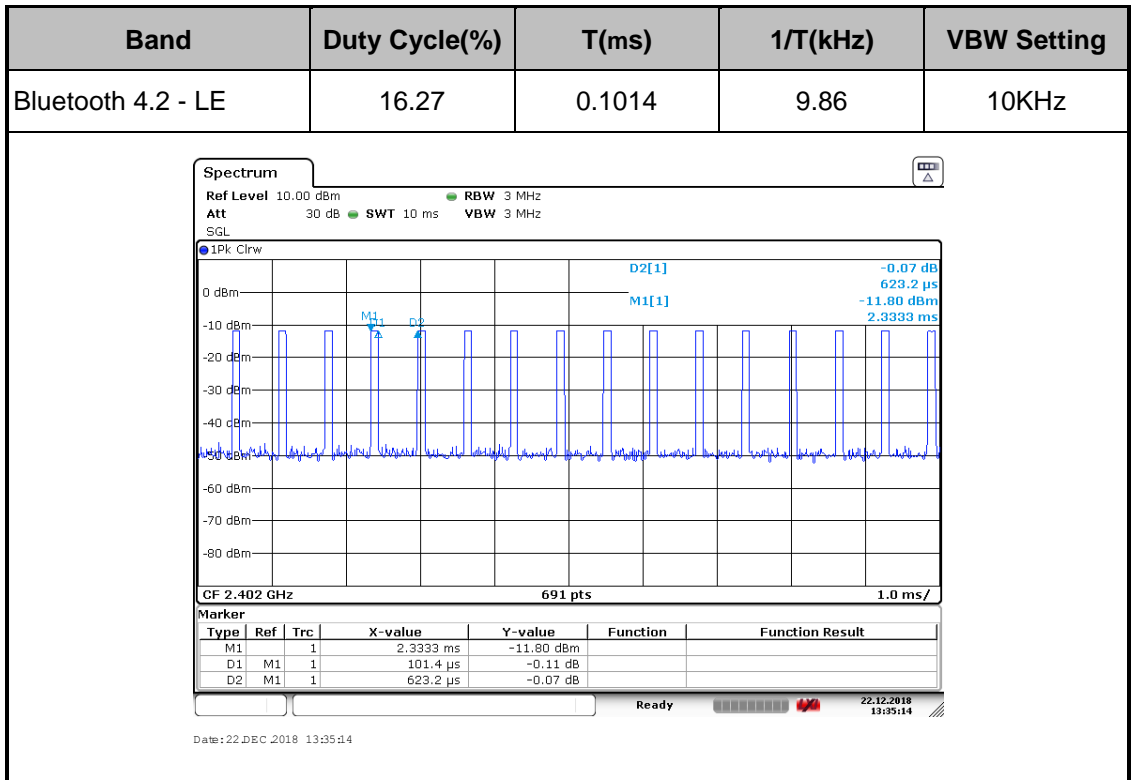

6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


4.5.3 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

4.5.4 Test Result of Radiated Spurious at Band Edges


Low Channel Horizontal:

Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: HORIZONTAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

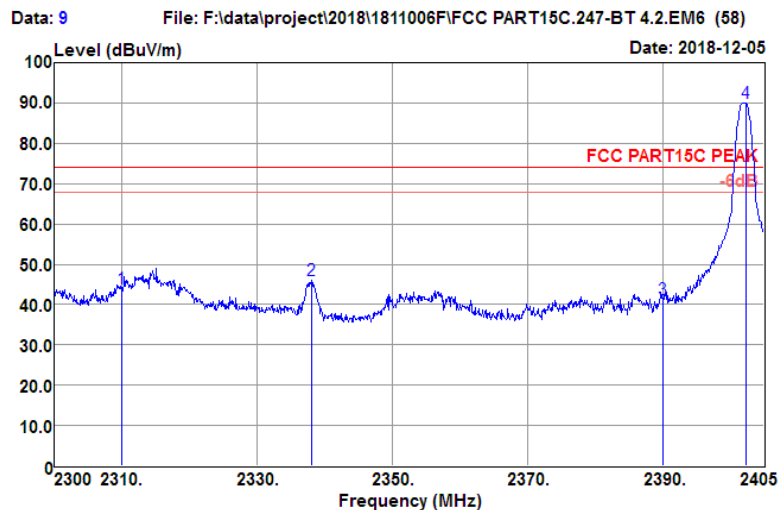

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2310.000	49.45	26.91	3.56	35.87	44.05	74.00	-29.95	Peak
2338.010	51.31	26.98	3.58	35.94	45.93	74.00	-28.07	Peak
2390.000	46.78	27.11	3.64	36.08	41.45	74.00	-32.55	Peak
2402.375	95.28	27.15	3.65	36.11	89.97	74.00	15.97	Peak


Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: HORIZONTAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

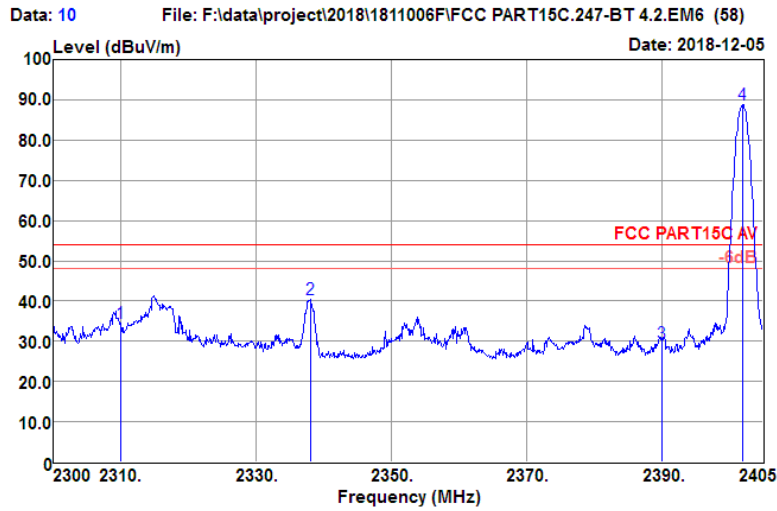

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2310.000	40.06	26.91	3.56	35.87	34.66	54.00	-19.34	Average
2338.010	45.73	26.98	3.58	35.94	40.35	54.00	-13.65	Average
2390.000	34.75	27.11	3.64	36.08	29.42	54.00	-24.58	Average
2401.955	94.19	27.15	3.65	36.11	88.88	54.00	34.88	Average


Low Channel Vertical:

Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: VERTICAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

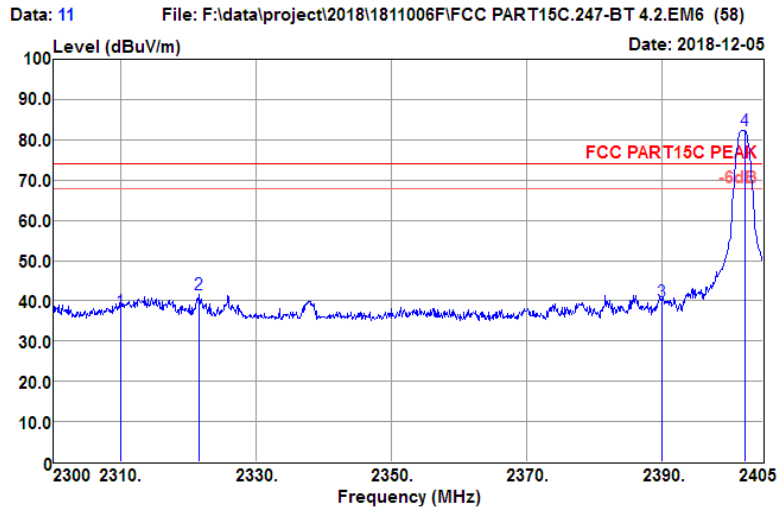

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2310.000	43.00	26.91	3.56	35.87	37.60	74.00	-36.40	Peak
2321.525	47.12	26.94	3.57	35.90	41.73	74.00	-32.27	Peak
2390.000	45.27	27.11	3.64	36.08	39.94	74.00	-34.06	Peak
2402.375	87.65	27.15	3.65	36.11	82.34	74.00	8.34	Peak


Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
-----		-----	
Tested by	: Damon	Power rating:	AC 120V
-----		-----	
EUT	: Floodlight Wired	Pol/Phase	: VERTICAL
-----		-----	
Model No.	: 5W21S8		
-----		-----	
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		
-----		-----	

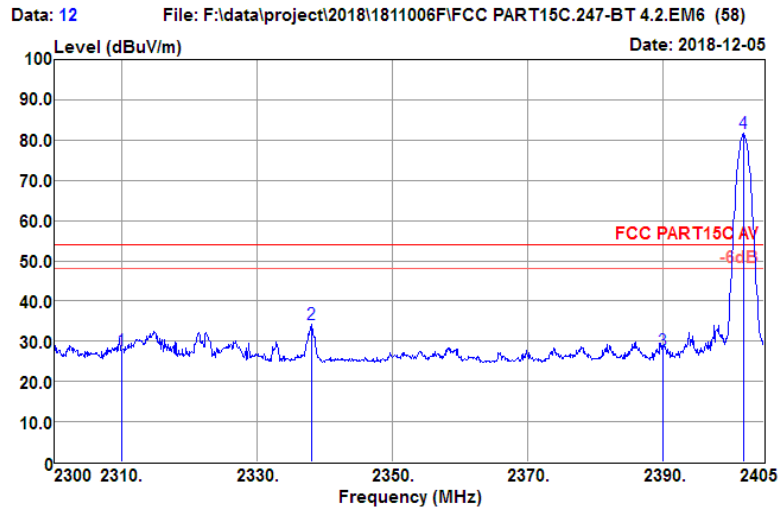

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2310.000	33.24	26.91	3.56	35.87	27.84	54.00	-26.16	Average
2338.115	39.58	26.98	3.59	35.94	34.21	54.00	-19.79	Average
2390.000	33.02	27.11	3.64	36.08	27.69	54.00	-26.31	Average
2402.060	86.89	27.15	3.65	36.11	81.58	54.00	27.58	Average


High Channel Horizontal:

Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: HORIZONTAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

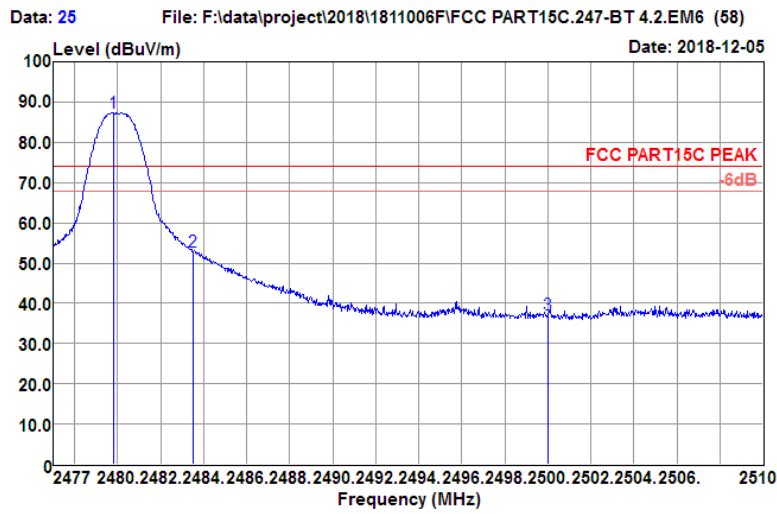

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2479.805	92.66	27.35	3.68	36.32	87.37	74.00	13.37	Peak
2483.500	58.23	27.36	3.68	36.33	52.94	74.00	-21.06	Peak
2500.000	42.62	27.40	3.68	36.37	37.33	74.00	-36.67	Peak


Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: HORIZONTAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

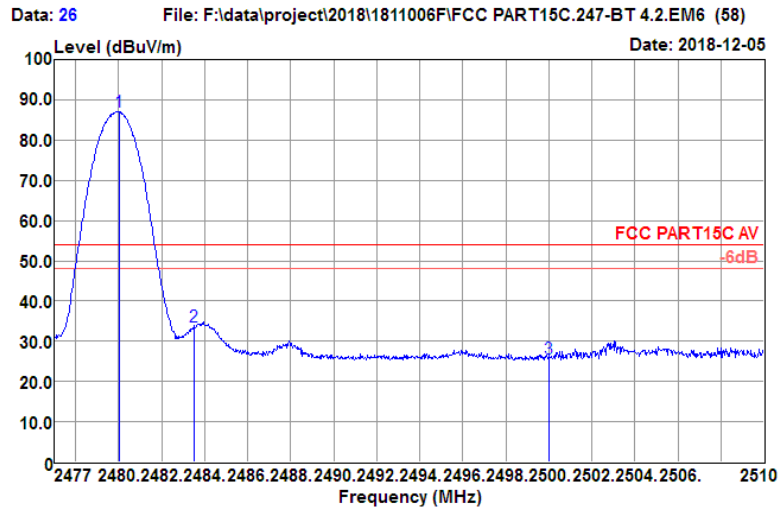

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2480.036	92.29	27.35	3.68	36.32	87.00	54.00	33.00	Average
2483.500	39.02	27.36	3.68	36.33	33.73	54.00	-20.27	Average
2500.000	30.96	27.40	3.68	36.37	25.67	54.00	-28.33	Average


High Channel Vertical:

Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: VERTICAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

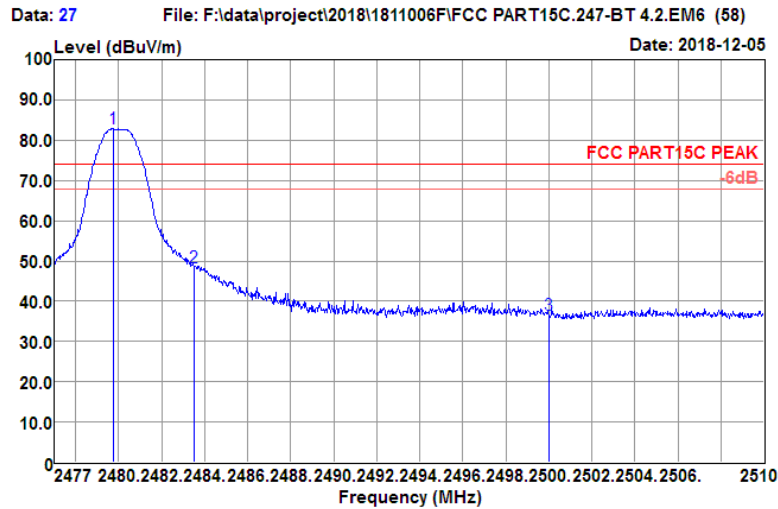

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2479.739	88.14	27.35	3.68	36.32	82.85	74.00	8.85	Peak
2483.500	53.55	27.36	3.68	36.33	48.26	74.00	-25.74	Peak
2500.000	41.87	27.40	3.68	36.37	36.58	74.00	-37.42	Peak

Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: VERTICAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

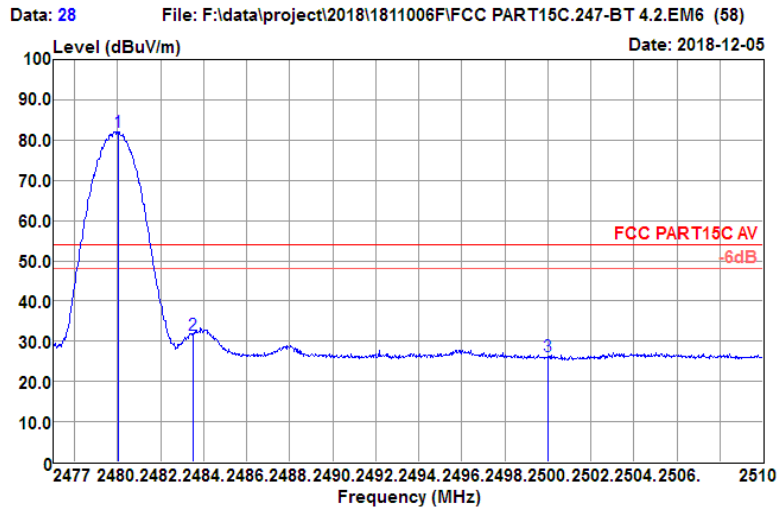


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2480.036	87.34	27.35	3.68	36.32	82.05	54.00	28.05	Average
2483.500	36.88	27.36	3.68	36.33	31.59	54.00	-22.41	Average
2500.000	31.54	27.40	3.68	36.37	26.25	54.00	-27.75	Average

4.5.5 Test Result of Radiated Spurious Emission (1GHz ~ 10th Harmonic)

Low Channel Horizontal:

Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: HORIZONTAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

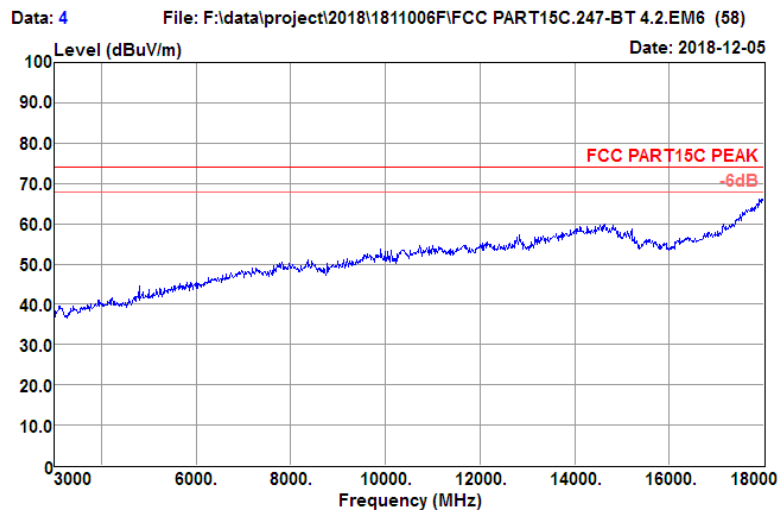


Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%

Tested by	: Damon	Power rating:	AC 120V

EUT	: Floodlight Wired	Pol/Phase	: HORIZONTAL

Model No.	: 5W21S8		

Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

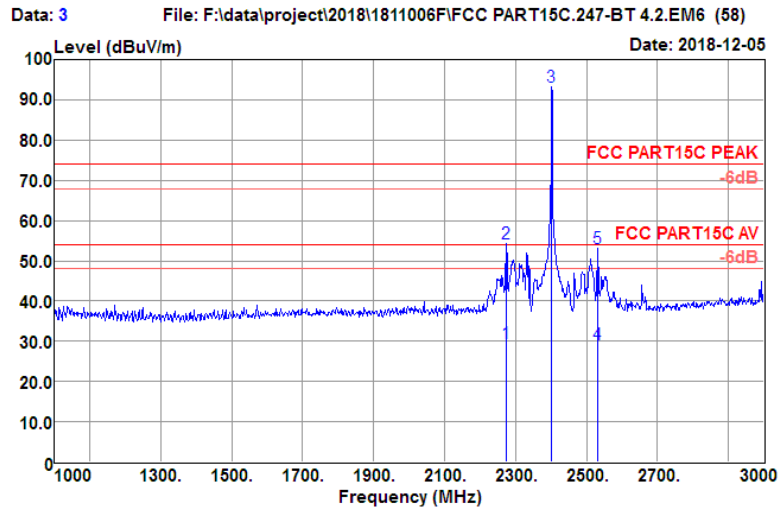

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2274.000	35.10	26.81	3.52	35.77	29.66	54.00	-24.34	Average
2274.000	59.85	26.81	3.52	35.77	54.41	74.00	-19.59	Peak
2402.000	98.43	27.15	3.65	36.11	93.12	74.00	19.12	Peak
2530.000	34.59	27.48	3.70	36.45	29.32	54.00	-24.68	Average
2530.000	58.52	27.48	3.70	36.45	53.25	74.00	-20.75	Peak


Test Site : 3m Chamber Temp/Humi : 19°C/60%

 Tested by : Damon Power rating: AC 120V

 EUT : Floodlight Wired Pol/Phase : HORIZONTAL

 Model No. : 5W21S8


 Test Mode : Bluetooth 4.2-LE CH00(2402MHz)

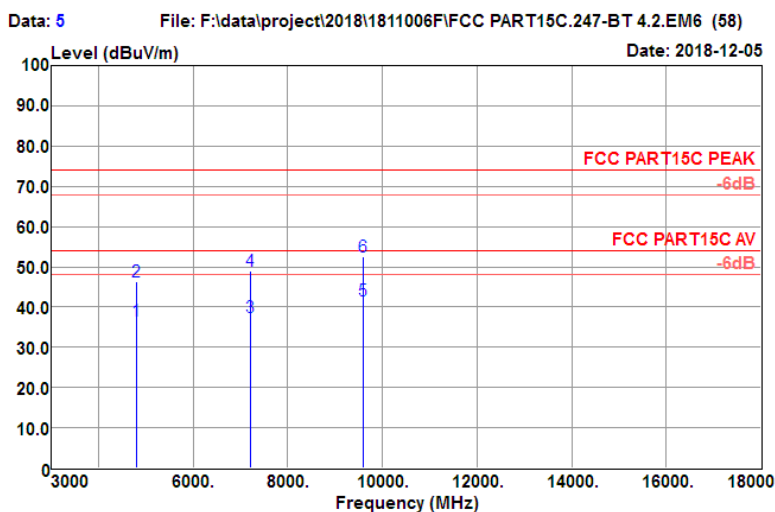

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4804.000	36.09	31.23	5.45	36.27	36.50	54.00	-17.50	Average
4804.000	46.02	31.23	5.45	36.27	46.43	74.00	-27.57	Peak
7206.000	28.88	35.87	6.94	34.25	37.44	54.00	-16.56	Average
7206.000	40.48	35.87	6.94	34.25	49.04	74.00	-24.96	Peak
9608.000	30.28	37.79	7.77	34.13	41.71	54.00	-12.29	Average
9608.000	41.01	37.79	7.77	34.13	52.44	74.00	-21.56	Peak

Low Channel Vertical:

Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight wired	Pol/Phase	: VERTICAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

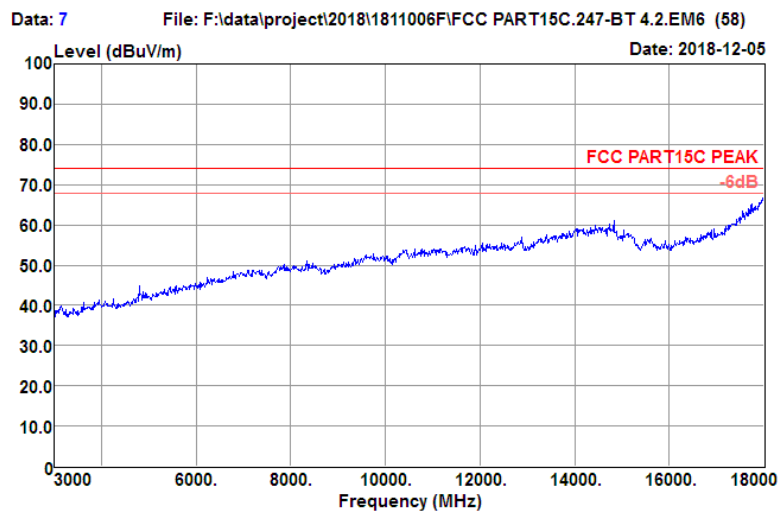


Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%

Tested by	: Damon	Power rating:	AC 120V

EUT	: Floodlight Wired	Pol/Phase	: VERTICAL

Model No.	: 5W21S8		

Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

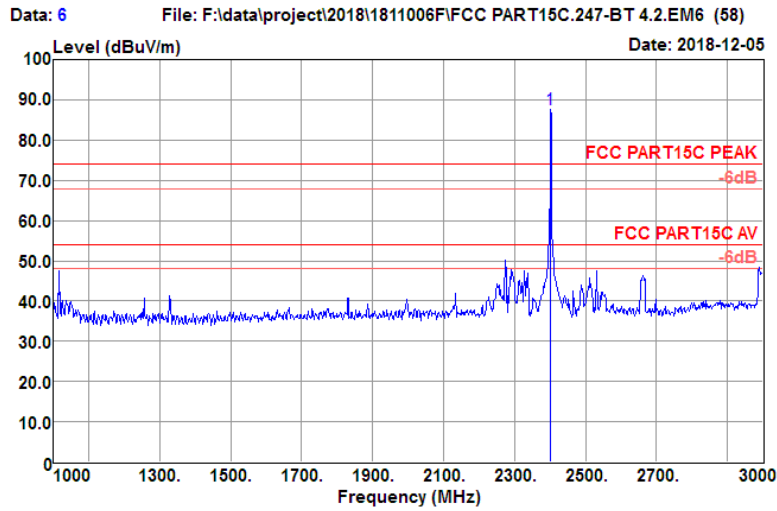

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2402.000	92.92	27.15	3.65	36.11	87.61	74.00	13.61	Peak


Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%

Tested by	: Damon	Power rating:	AC 120V

EUT	: Floodlight Wired	Pol/Phase	: VERTICAL

Model No.	: 5W21S8		


Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

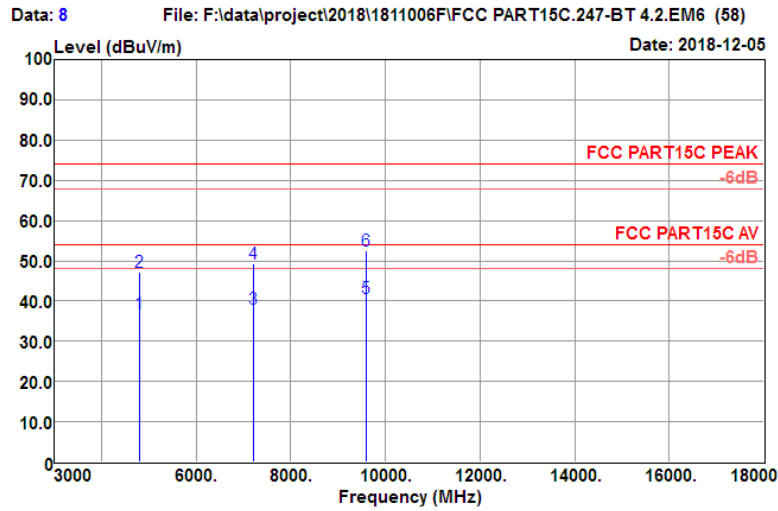


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4804.000	36.37	31.23	5.45	36.27	36.78	54.00	-17.22	Average
4804.000	46.93	31.23	5.45	36.27	47.34	74.00	-26.66	Peak
7206.000	29.43	35.87	6.94	34.25	37.99	54.00	-16.01	Average
7206.000	40.67	35.87	6.94	34.25	49.23	74.00	-24.77	Peak
9608.000	29.39	37.79	7.77	34.13	40.82	54.00	-13.18	Average
9608.000	41.06	37.79	7.77	34.13	52.49	74.00	-21.51	Peak

Middle Channel Horizontal:

Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: HORIZONTAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH19(2440MHz)		

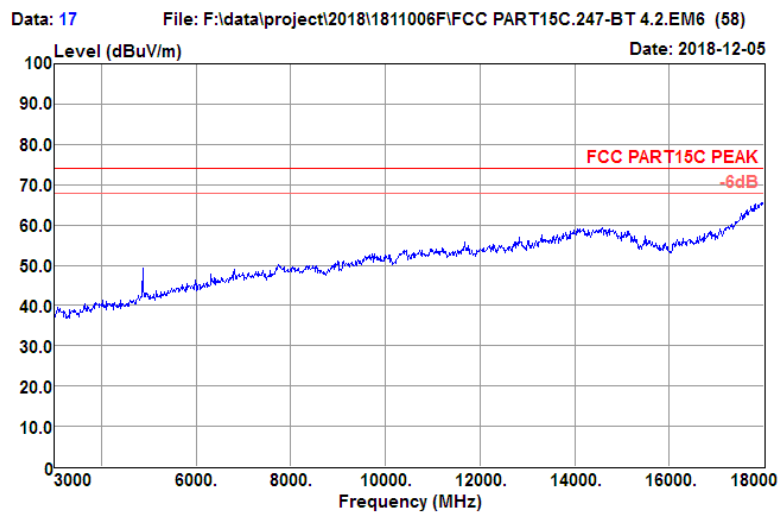


Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
-----		-----	
Tested by	: Damon	Power rating:	AC 120V
-----		-----	
EUT	: Floodlight Wired	Pol/Phase	: HORIZONTAL
-----		-----	
Model No.	: 5W21S8		
-----		-----	
Test Mode	: Bluetooth 4.2-LE CH19(2440MHz)		
-----		-----	

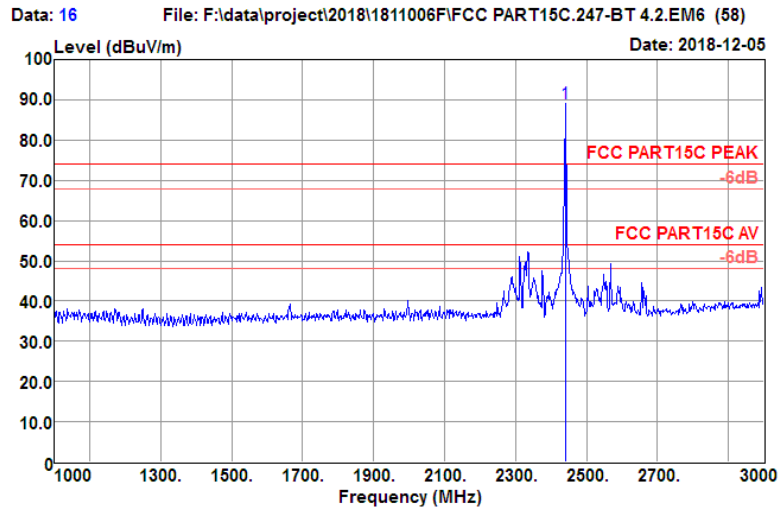

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2440.000	94.38	27.24	3.66	36.21	89.07	74.00	15.07	Peak


Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: HORIZONTAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH19(2440MHz)		

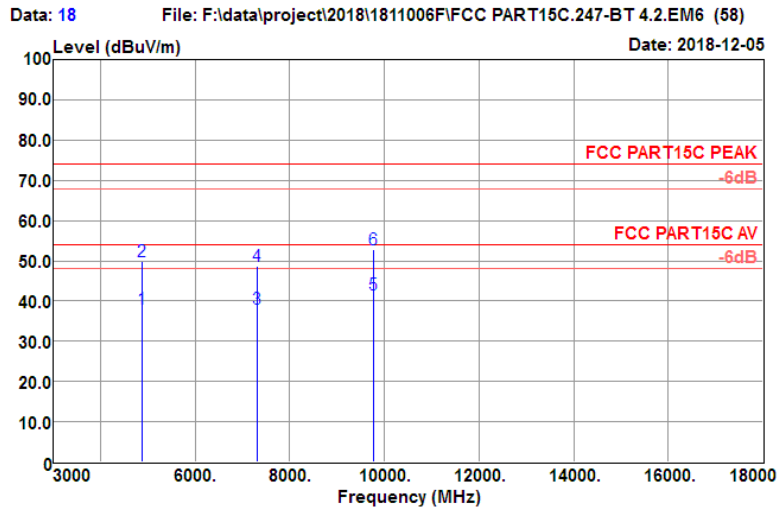


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4880.000	37.56	31.41	5.41	36.24	38.14	54.00	-15.86	Average
4880.000	49.23	31.41	5.41	36.24	49.81	74.00	-24.19	Peak
7320.000	28.90	36.14	7.27	34.35	37.96	54.00	-16.04	Average
7320.000	39.67	36.14	7.27	34.35	48.73	74.00	-25.27	Peak
9760.000	29.72	38.07	7.98	34.19	41.58	54.00	-12.42	Average
9760.000	41.02	38.07	7.98	34.19	52.88	74.00	-21.12	Peak

Middle Channel Vertical:

Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: VERTICAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH19(2440MHz)		

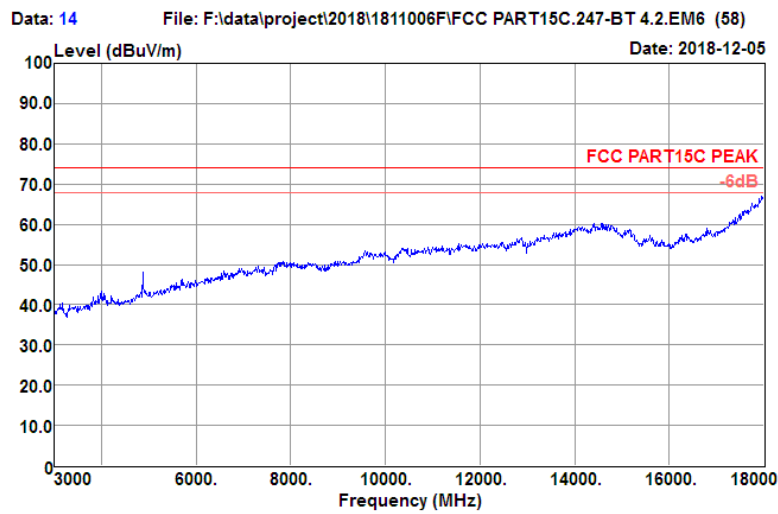

Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
-----		-----	
Tested by	: Damon	Power rating:	AC 120V
-----		-----	
EUT	: Floodlight Wired	Pol/Phase	: VERTICAL
-----		-----	
Model No.	: 5W21S8		
-----		-----	
Test Mode	: Bluetooth 4.2-LE CH19(2440MHz)		
-----		-----	

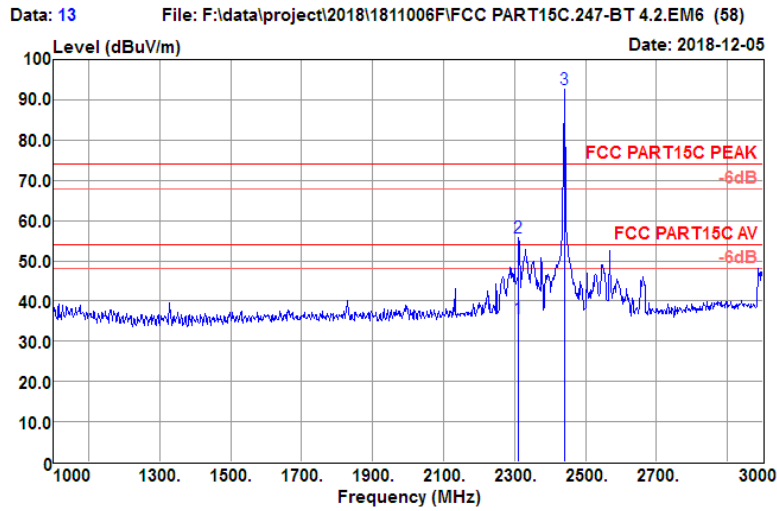

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2312.000	41.01	26.91	3.56	35.87	35.61	54.00	-18.39	Average
2312.000	61.21	26.91	3.56	35.87	55.81	74.00	-18.19	Peak
2440.000	98.08	27.24	3.66	36.21	92.77	74.00	18.77	Peak


Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%

Tested by	: Damon	Power rating:	: AC 120V

EUT	: Floodlight Wired	Pol/Phase	: VERTICAL

Model No.	: 5W21S8		


Test Mode	: Bluetooth 4.2-LE CH19(2440MHz)		

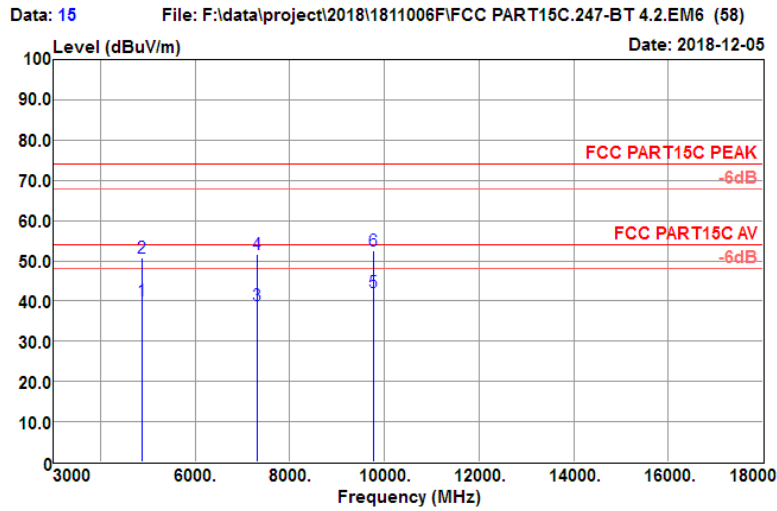


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4880.000	39.49	31.41	5.41	36.24	40.07	54.00	-13.93	Average
4880.000	50.12	31.41	5.41	36.24	50.70	74.00	-23.30	Peak
7320.000	29.88	36.14	7.27	34.35	38.94	54.00	-15.06	Average
7320.000	42.65	36.14	7.27	34.35	51.71	74.00	-22.29	Peak
9760.000	30.20	38.07	7.98	34.19	42.06	54.00	-11.94	Average
9760.000	40.63	38.07	7.98	34.19	52.49	74.00	-21.51	Peak

High Channel Horizontal:

Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: HORIZONTAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

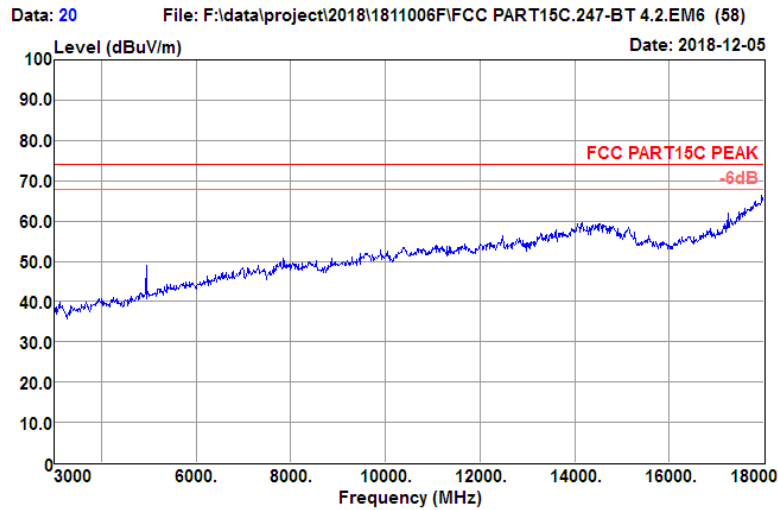


Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: HORIZONTAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

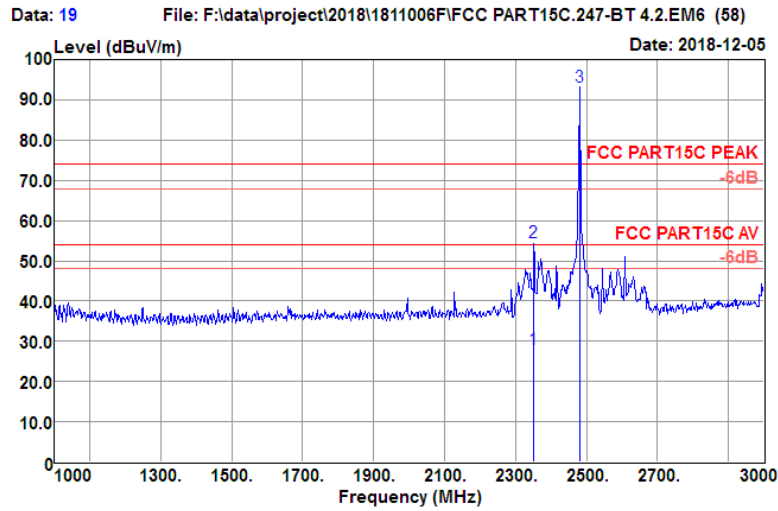

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2352.000	33.45	27.02	3.60	35.98	28.09	54.00	-25.91	Average
2352.000	59.88	27.02	3.60	35.98	54.52	74.00	-19.48	Peak
2480.000	98.41	27.35	3.68	36.32	93.12	74.00	19.12	Peak


Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: HORIZONTAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

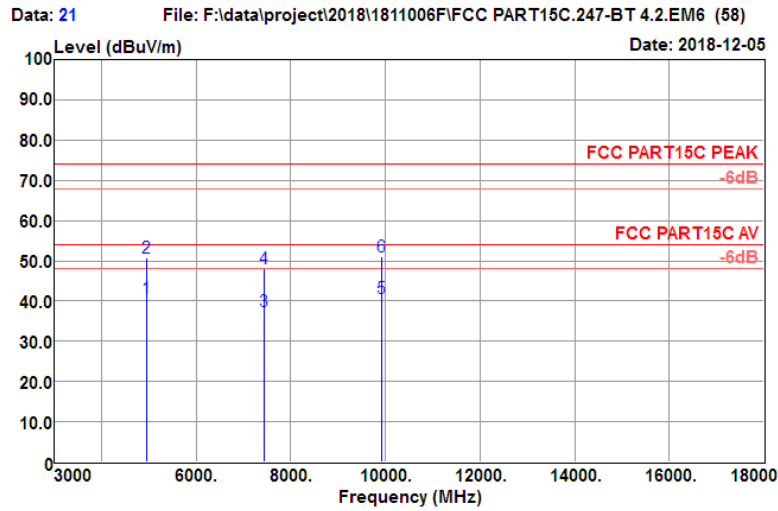


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4960.000	40.04	31.60	5.36	36.21	40.79	54.00	-13.21	Average
4960.000	50.02	31.60	5.36	36.21	50.77	74.00	-23.23	Peak
7440.000	28.11	36.41	7.44	34.47	37.49	54.00	-16.51	Average
7440.000	38.70	36.41	7.44	34.47	48.08	74.00	-25.92	Peak
9920.000	28.43	38.36	8.05	34.26	40.58	54.00	-13.42	Average
9920.000	38.95	38.36	8.05	34.26	51.10	74.00	-22.90	Peak

High Channel Vertical:

Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: VERTICAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

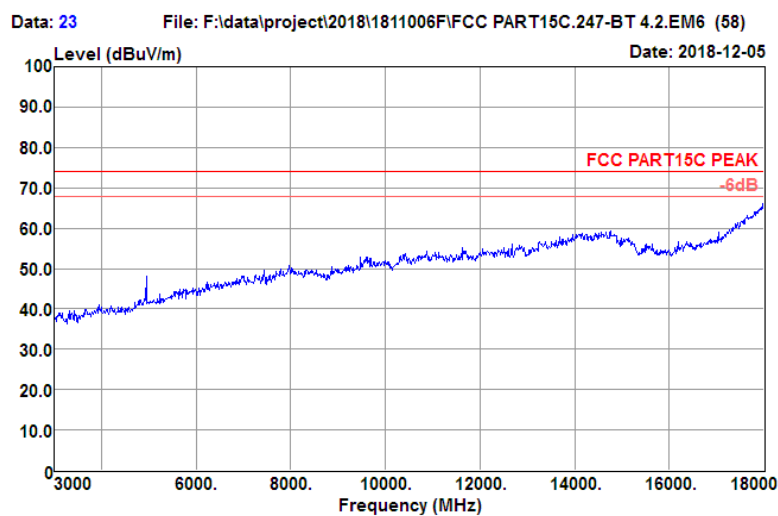


Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
-----		-----	
Tested by	: Damon	Power rating:	AC 120V
-----		-----	
EUT	: Floodlight Wired	Pol/Phase	: VERTICAL
-----		-----	
Model No.	: 5W21S8		
-----		-----	
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		
-----		-----	

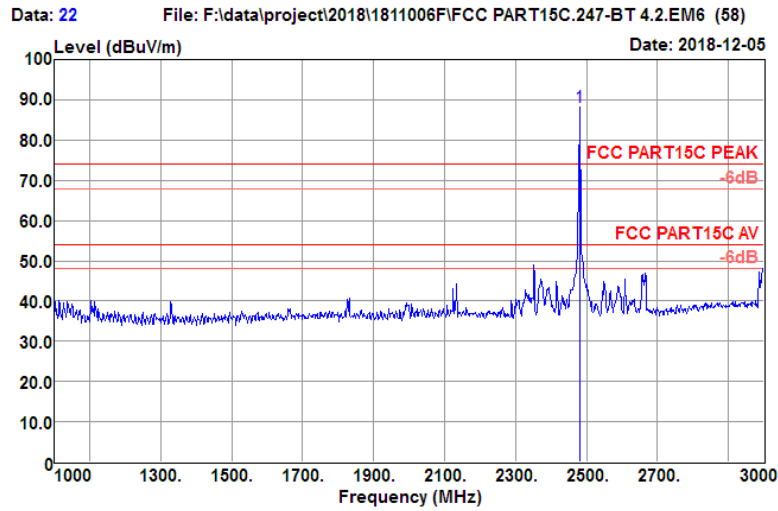

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2480.000	93.42	27.35	3.68	36.32	88.13	74.00	14.13	Peak

Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: VERTICAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

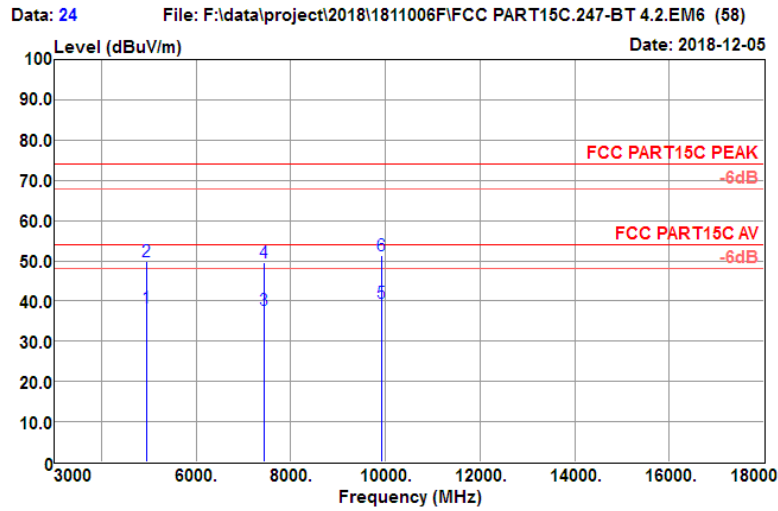


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4960.000	37.52	31.60	5.36	36.21	38.27	54.00	-15.73	Average
4960.000	49.05	31.60	5.36	36.21	49.80	74.00	-24.20	Peak
7440.000	28.43	36.41	7.44	34.47	37.81	54.00	-16.19	Average
7440.000	40.27	36.41	7.44	34.47	49.65	74.00	-24.35	Peak
9920.000	27.37	38.36	8.05	34.26	39.52	54.00	-14.48	Average
9920.000	39.26	38.36	8.05	34.26	51.41	74.00	-22.59	Peak

4.5.6 Test Result of Radiated Spurious Emission (30MHz ~ 1GHz)

Horizontal:


Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: HORIZONTAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

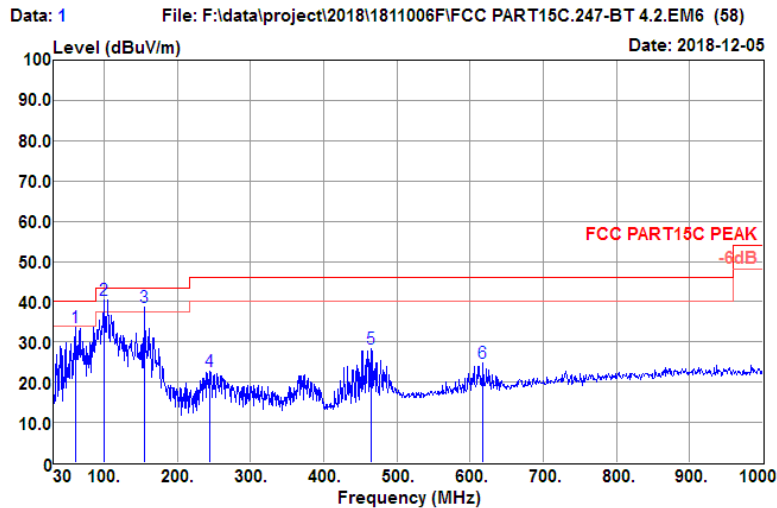

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
60.070	52.14	12.69	1.47	32.55	33.75	40.00	-6.25	QP
99.840	60.71	10.19	1.95	32.44	40.41	43.50	-3.09	QP
155.130	54.51	14.20	2.46	32.51	38.66	43.50	-4.84	QP
243.400	40.82	11.20	3.12	32.54	22.60	46.00	-23.40	QP
464.560	40.65	15.90	4.41	32.52	28.44	46.00	-17.56	QP
617.820	33.71	18.63	5.06	32.71	24.69	46.00	-21.31	QP

Vertical:

Test Site	: 3m Chamber	Temp/Humi	: 19°C/60%
Tested by	: Damon	Power rating:	AC 120V
EUT	: Floodlight Wired	Pol/Phase	: VERTICAL
Model No.	: 5W21S8		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

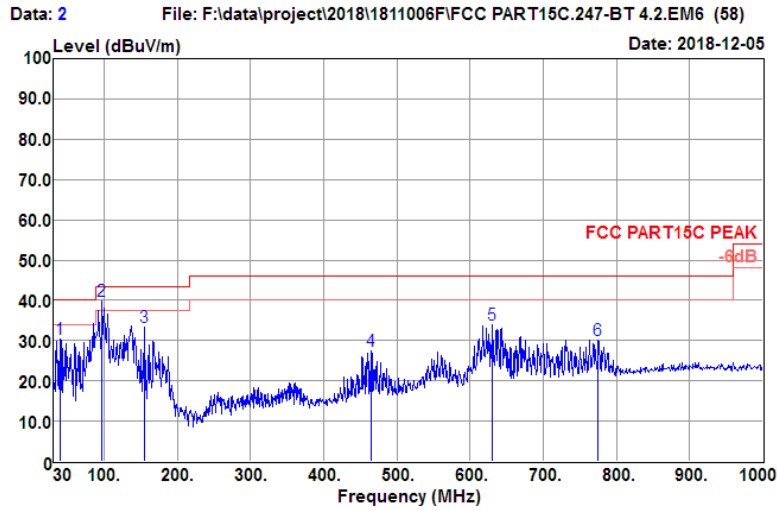

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
39.700	47.76	14.06	1.15	32.56	30.41	40.00	-9.59	QP
96.930	60.50	9.99	1.92	32.45	39.96	43.50	-3.54	QP
154.160	49.09	14.20	2.45	32.51	33.23	43.50	-10.27	QP
464.560	39.62	15.90	4.41	32.52	27.41	46.00	-18.59	QP
630.430	42.90	18.80	5.09	32.72	34.07	46.00	-11.93	QP
774.960	36.49	20.52	5.85	32.68	30.18	46.00	-15.82	QP

4.6 AC Conducted Emission Measurement

4.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


4.6.2 Test Procedures

7. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
8. Connect EUT to the power mains through a line impedance stabilization network (LISN).
9. All the support units are connecting to the other LISN.
10. The LISN provides 50 ohm coupling impedance for the measuring instrument.
11. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
12. Both sides of AC line were checked for maximum conducted interference.
13. The frequency range from 150 kHz to 30 MHz was searched.
14. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

4.6.3 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Damon Zhang	Relative Humidity :	61~63%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link Mode		


Data: 5 File: F:\DATA\2018 DATA\1811006F\FCC.EM6 (8)

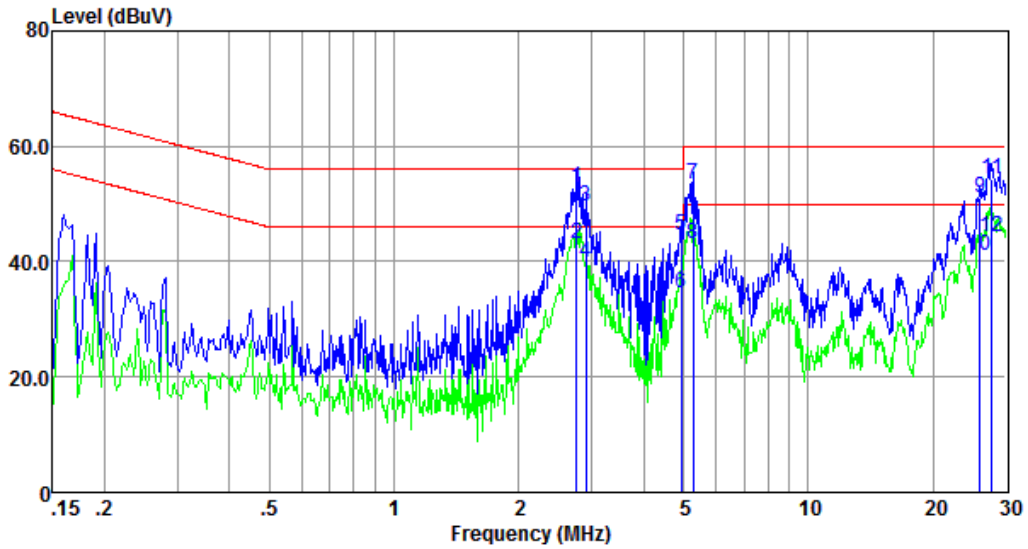

Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
2.765	43.20	9.61	0.03	52.84	56.00	-3.16	QP
2.765	33.50	9.61	0.03	43.14	46.00	-2.86	Average
2.900	40.10	9.61	0.03	49.74	56.00	-6.26	QP
2.900	30.20	9.61	0.03	39.84	46.00	-6.16	Average
4.926	34.90	9.66	0.03	44.59	56.00	-11.41	QP
4.926	24.80	9.66	0.03	34.49	46.00	-11.51	Average
5.277	43.60	9.67	0.03	53.30	60.00	-6.70	QP
5.277	33.40	9.67	0.03	43.10	50.00	-6.90	Average
26.001	41.10	9.85	0.03	50.98	60.00	-9.02	QP
26.001	31.20	9.85	0.03	41.08	50.00	-8.92	Average
27.708	44.30	9.84	0.04	54.18	60.00	-5.82	QP
27.708	34.50	9.84	0.04	44.38	50.00	-5.62	Average

Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Damon Zhang	Relative Humidity :	61~63%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link Mode		

Data: 7 File: F:\DATA\2018 DATA\1811006F\FCC.EM6 (8)

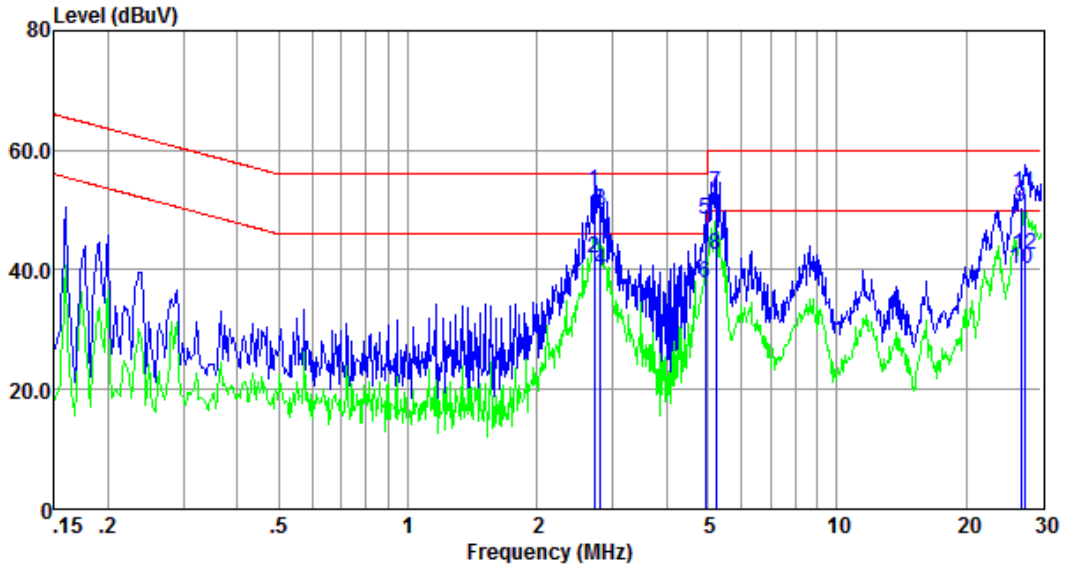

Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
2.721	43.50	9.66	0.03	53.19	56.00	-2.81	QP
2.721	32.10	9.66	0.03	41.79	46.00	-4.21	Average
2.809	40.30	9.66	0.03	49.99	56.00	-6.01	QP
2.809	30.20	9.66	0.03	39.89	46.00	-6.11	Average
4.926	38.70	9.72	0.03	48.45	56.00	-7.55	QP
4.926	28.10	9.72	0.03	37.85	46.00	-8.15	Average
5.221	43.20	9.73	0.03	52.96	60.00	-7.04	QP
5.221	32.80	9.73	0.03	42.56	50.00	-7.44	Average
26.841	40.40	9.96	0.03	50.39	60.00	-9.61	QP
26.841	30.10	9.96	0.03	40.09	50.00	-9.91	Average
27.416	42.80	9.97	0.04	52.81	60.00	-7.19	QP
27.416	32.60	9.97	0.04	42.61	50.00	-7.39	Average

4.7 Antenna Requirements

4.7.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 Antenna Connected Construction

An embedded-in antenna design is used.

4.7.3 Antenna Gain

The antenna peak gain of EUT is -1.8dBi for BLE and -4.17dBi for Lora less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	Keysight	N9010A	MY56070788	2018-03-02	2019-03-01	Conducted
Power Sensor	Keysight	U2021XA	MY56510025	2018-03-02	2019-03-01	Conducted
Power Sensor	Keysight	U2021XA	MY57030005	2018-03-02	2019-03-01	Conducted
Power Sensor	Keysight	U2021XA	MY56510018	2018-03-02	2019-03-01	Conducted
Power Sensor	Keysight	U2021XA	MY56480002	2018-03-02	2019-03-01	Conducted
Thermal Chamber	Sanmtest	SMC-408-CD	2435	2018-07-05	2019-07-04	Conducted
Base Station	R&S	CMW 270	101231	2018-03-17	2019-03-16	Conducted
Signal Generator (Interferer)	Keysight	N5182B	MY56200384	2018-04-10	2019-04-09	Conducted
Signal Generator (Blocker)	Keysight	N5171B	MY56200661	2018-03-15	2019-03-14	Conducted

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV 40	101433	2018-03-14	2019-03-13	Radiation
Amplifier	Sonoma	310	363917	2018-03-06	2019-03-05	Radiation
Amplifier	Schwarzbeck	BBV 9718	327	2018-03-14	2019-03-13	Radiation
Amplifier	Narda	TTA1840-35-HG	2034380	2018-07-18	2019-07-17	Radiation
Broadband Antenna	Schwarzbeck	VULB 9168	9168-757	2017-03-03	2020-03-02	Radiation
Horn Antenna	Schwarzbeck	BBHA 9120 D	1677	2017-03-03	2020-03-02	Radiation
Horn Antenna	COM-POWER	AH-1840	101117	2018-06-20	2021-06-19	Radiation
Test Software	Auidx	E3	6.111221a	N/A	N/A	Radiation
Filter	Micro-Tronics	BRM 50702	G266	N/A	N/A	Radiation

N/A: No Calibration Required

6. Uncertainty of Evaluation

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.64dB
Radiated emission	30MHz ~ 1GMHz	5.05dB
	1GHz ~ 18GHz	5.06 dB
	18GHz ~ 40GHz	3.65dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.