



<b>Prüfbericht-Nr.:</b> <i>Test report No.:</i>	<b>60360350 001</b>	<b>Auftrags-Nr.:</b> <i>Order No.:</i>	168154565	<b>Seite 1 von 33</b> <i>Page 1 of 33</i>	
<b>Kunden-Referenz-Nr.:</b> <i>Client reference No.:</i>	N/A	<b>Auftragsdatum:</b> <i>Order date.:</i>	02.03.2020		
<b>Auftraggeber:</b> <i>Client:</i>	<b>Ring LLC</b> 1523 26th Street, Santa Monica, California 90404, United States				
<b>Prüfgegenstand:</b> <i>Test item:</i>	Floodlight Wired				
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type No.:</i>	5W21S8 (Trademark: Ring)				
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	FCC and IC approval				
<b>Prüfgrundlage:</b> <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 CFR47 FCC Part 15: Subpart B Section 15.107 CFR47 FCC Part 15: Subpart B Section 15.109 CFR47 FCC Part 2: Section 2.1091 RSS-247 Issue 2 February 2017 RSS-Gen Issue 5 April 2018 ICES-003 Issue 6 January 2016 RSS-102 Issue 5 March 2015				
<b>Wareneingangsdatum:</b> <i>Date of receipt:</i>	25.02.2020	Please refer to photo documents			
<b>Prüfmuster-Nr.:</b> <i>Test sample No.:</i>	A001069829-001,002,003				
<b>Prüfzeitraum:</b> <i>Testing period:</i>	23.03.2020 - 18.08.2020				
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass				
<b>geprüft von / tested by:</b>		<b>kontrolliert von / reviewed by:</b>			
					
23.09.2020	Bell Hu / Project Manager	23.09.2020	Winnie Hou / Technical Certifier		
<b>Datum</b> <i>Date</i>	<b>Name/Stellung</b> <i>Name/Position</i>	<b>Unterschrift</b> <i>Signature</i>	<b>Datum</b> <i>Date</i>	<b>Name/Stellung</b> <i>Name/Position</i>	<b>Unterschrift</b> <i>Signature</i>
<b>Sonstiges / Other:</b>					
FCC ID: 2AEUPBHAFM001 IC: 20271-BHAFM001                      HVIN: 5W21S8 FVIN: 1.7.16-56					
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>			<b>Prüfmuster vollständig und unbeschädigt</b> <i>Test item complete and undamaged:</i>		
* Legende:    1 = sehr gut                      2 = gut                      3 = befriedigend                      4 = ausreichend                      5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n)    F(ail) = entspricht nicht o.g. Prüfgrundlage(n)    N/A = nicht anwendbar    N/T = nicht getestet Legend:    1 = very good                      2 = good                      3 = satisfactory                      4 = sufficient                      5 = poor P(ass) = passed a.m. test specifications(s)    F(ail) = failed a.m. test specifications(s)    N/A = not applicable    N/T = not tested					
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

V04

## Test Summary

**5.1.1 ANTENNA REQUIREMENT***RESULT: Pass***5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER (FOR DTSS AND FHSS)***RESULT: Pass***5.1.3 CONDUCTED POWER SPECTRAL DENSITY (FOR DTSS)***RESULT: Pass***5.1.4 6dB BANDWIDTH (FOR DTSS)***RESULT: Pass***5.1.5 99% BANDWIDTH (FOR DTSS AND FHSS)***RESULT: Pass***5.1.6 20dB BANDWIDTH (FOR FHSS)***RESULT: Pass***5.1.7 CARRIER FREQUENCY SEPARATION (FOR FHSS)***RESULT: Pass***5.1.8 NUMBER OF HOPPING FREQUENCY (FOR FHSS)***RESULT: Pass***5.1.9 CHANNEL OCCUPANCY TIME (FOR FHSS)***RESULT: Pass***5.1.10 CONDUCTED SPURIOUS EMISSIONS (FOR DTSS AND FHSS)***RESULT: Pass***5.1.11 RADIATED SPURIOUS EMISSION (FOR DTSS AND FHSS)***RESULT: Pass***5.1.12 CONDUCTED EMISSION ON AC MAINS (FOR DTSS AND FHSS)***RESULT: N/A***5.1.13 RADIATED EMISSION***RESULT: Pass***6.1.1 ELECTROMAGNETIC FIELDS***RESULT: Pass*

## Contents

<b>1</b>	<b>GENERAL REMARKS .....</b>	<b>5</b>
<b>1.1</b>	<b>COMPLEMENTARY MATERIALS .....</b>	<b>5</b>
<b>2</b>	<b>TEST SITES .....</b>	<b>6</b>
<b>2.1</b>	<b>TEST FACILITIES .....</b>	<b>6</b>
<b>2.2</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS.....</b>	<b>6</b>
<b>2.3</b>	<b>TRACEABILITY .....</b>	<b>7</b>
<b>2.4</b>	<b>CALIBRATION .....</b>	<b>7</b>
<b>2.5</b>	<b>MEASUREMENT UNCERTAINTY.....</b>	<b>8</b>
<b>2.6</b>	<b>LOCATION OF ORIGINAL DATA.....</b>	<b>8</b>
<b>2.7</b>	<b>STATUS OF FACILITY USED FOR TESTING.....</b>	<b>8</b>
<b>3</b>	<b>GENERAL PRODUCT INFORMATION .....</b>	<b>9</b>
<b>3.1</b>	<b>PRODUCT FUNCTION AND INTENDED USE.....</b>	<b>9</b>
<b>3.2</b>	<b>RATINGS AND SYSTEM DETAILS .....</b>	<b>9</b>
<b>3.3</b>	<b>INDEPENDENT OPERATION MODES .....</b>	<b>11</b>
<b>3.4</b>	<b>NOISE GENERATING AND NOISE SUPPRESSING PARTS.....</b>	<b>11</b>
<b>3.5</b>	<b>SUBMITTED DOCUMENTS.....</b>	<b>11</b>
<b>4</b>	<b>TEST SET-UP AND OPERATION MODES .....</b>	<b>12</b>
<b>4.1</b>	<b>PRINCIPLE OF CONFIGURATION SELECTION .....</b>	<b>12</b>
<b>4.2</b>	<b>TEST OPERATION AND TEST SOFTWARE.....</b>	<b>12</b>
<b>4.3</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....</b>	<b>12</b>
<b>4.4</b>	<b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....</b>	<b>12</b>
<b>4.5</b>	<b>TEST SETUP DIAGRAM.....</b>	<b>13</b>
<b>5</b>	<b>TEST RESULTS .....</b>	<b>15</b>
<b>5.1</b>	<b>TRANSMITTER REQUIREMENT &amp; TEST SUITES .....</b>	<b>15</b>
<b>5.1.1</b>	<i>Antenna Requirement .....</i>	<i>15</i>
<b>5.1.2</b>	<i>Maximum Peak Conducted Output Power (for DTSS and FHSs) .....</i>	<i>16</i>
<b>5.1.3</b>	<i>Conducted Power Spectral Density (for DTSS).....</i>	<i>18</i>
<b>5.1.4</b>	<i>6dB Bandwidth (for DTSS) .....</i>	<i>19</i>
<b>5.1.5</b>	<i>99% Bandwidth (for DTSS and FHSs).....</i>	<i>20</i>
<b>5.1.6</b>	<i>20dB Bandwidth (for FHSs) .....</i>	<i>21</i>
<b>5.1.7</b>	<i>Carrier Frequency Separation (for FHSs) .....</i>	<i>22</i>
<b>5.1.8</b>	<i>Number of Hopping Frequency (for FHSs) .....</i>	<i>24</i>
<b>5.1.9</b>	<i>Time of Occupancy (for FHSs).....</i>	<i>25</i>
<b>5.1.10</b>	<i>Conducted Spurious Emissions (for DTSS and FHSs) .....</i>	<i>26</i>
<b>5.1.11</b>	<i>Radiated Spurious Emission (for DTSS and FHSs) .....</i>	<i>27</i>
<b>5.1.12</b>	<i>Conducted Emission on AC Mains (for DTSS and FHSs) .....</i>	<i>28</i>
<b>5.1.13</b>	<i>Radiated Emission .....</i>	<i>29</i>
<b>6</b>	<b>SAFETY HUMAN EXPOSURE .....</b>	<b>30</b>
<b>6.1</b>	<b>RADIO FREQUENCY EXPOSURE COMPLIANCE .....</b>	<b>30</b>
<b>6.1.1</b>	<i>Electromagnetic Fields.....</i>	<i>30</i>

7	PHOTOGRAPHS OF THE TEST SET-UP .....	33
8	LIST OF TABLES.....	33

# 1 General Remarks

## 1.1 Report Version History

<b>Primary Version</b>	March 18, 2020	/
<b>Rev 01</b>	Aug 19, 2020	Updated Power data and RF exposure evaluation; Corrected IC and FCC ID information.

## 1.2 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results of DTSS

Appendix C: Test Results of FHSs

Appendix D: Test Results of Radiated

Appendix E: Test Results of Part 15B and ICES 003

## 2 Test Sites

### 2.1 Test Facilities

**TÜV Rheinland (Shenzhen) Co., Ltd.**

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC accredited testing laboratory: CN1260

ISED wireless device testing laboratory: 25069

### 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

**TÜV Rheinland (Shenzhen) Co., Ltd.**

<b>Radio Spectrum Testing (TS8997)</b>					
<b>Equip. No.</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. until</b>
1825795	Signal Analyzer	R & S	FSV 40	101441	20.08.2020
1825798	OSP	R & S	OSP 150	101017	17.12.2020
1825799	Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
1825800	Test Software	R & S	WMS32 (V10.40.10)	N/A	N/A
1825801	Power Meter	R & S	NRP2	107105	17.12.2020
1825802	Wideband Power Sensor	R & S	NRP-Z81	105350	17.12.2020
1826431	Shielding Room 8#	Albatross	SR8	APC17151- SR8	23.07.2020
<b>Unwanted Emission Testing (TS9975)</b>					
<b>Equip. No.</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. until</b>
1826021	EMI Test Receiver	R & S	ESR 7	102021	19.08.2020
1826023	Signal Analyzer	R & S	FSV 40	101439	21.08.2020
1826024	System Controller Interface	R & S	SCI-100	S10010038	N/A
1826025	Filterbank	R & S	Wlan	100759	21.08.2020
1826026	OSP	R & S	OSP 120	102040	N/A
1826028	Pre-amplifier	R & S	SCU08F1	08320031	20.08.2020
1826029	Amplifier	R & S	SCU-18F	180070	20.08.2020
1826030	Amplifier	R & S	SCU40A	100475	20.09.2020
1826031	Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	02.09.2020
1826032	Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	02.09.2020
1826033	Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	02.09.2020
1826034	Active Loop Antenna	Schwarzbeck	FMZB 1513	302	01.09.2020

1826035	Wideband Ridged Horn Antenna (12-18 GHz)	Steatite	QMS-00208	18313	02.09.2020
1826036	Test software	R&S	V10.40.10-EMC32	N/A	N/A
1826037	Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
1826433	3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	06.07.2020
<b>Conducted Emission on AC Mains</b>					
<b>Equip. No.</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. until</b>
1822625	EMI Test Receiver	R&S	ESR3	102428	03.09.2020
1822627	Artificial Mains Network	R&S	ENV216	102333	19.08.2020
<b>Radiated Emission (3m chamber)</b>					
<b>Equip. No.</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cali. until</b>
1822620	3m SAC	ETS	SAC3	CT001632-Q1362	23.08.2021
1825044	EMI Test Receiver	R&S	ESR7	102111	04.01.2021
1825004	Horn Antenna	R&S	HF907	102706	01.09.2020
1825005	Preamplifier	FIT	SCU-18F	180077	19.08.2020
1825042	Trilog-Broadband antenna	SCHWARZBECK	VULB9168	0945	12.09.2020
1825090	EMC Measurement Software	R&S	EMC32(Ver.10.30.01)	N/A	N/A

## 2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	$\pm 2.5$ dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	$\pm 6$ dB
Radiated Emission of Receiver, valid up to 26.5 GHz	$\pm 6$ dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	$\pm 3.70$ dB / $\pm 3.30$ dB
Radiated Emission (3m SAC), 30MHz to 1000MHz	$\pm 4.52$ dB
Radiated Emission (3m SAC), above 1000MHz	$\pm 4.37$ dB
Temperature	$\pm 1$ °C
Humidity	$\pm 5$ %
Voltage (DC)	$\pm 1$ %
Voltage (AC, <10kHz)	$\pm 2$ %

## 2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B & C & D & E of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

## 2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.



### 3 General Product Information

#### 3.1 Product Function and Intended Use

The EUT is a Floodlight Wired, which supports Bluetooth Low Energy and 902-928MHz ISM Band (DTSS + FHSs) wireless technologies.

For details refer to the User Manual, Technical Description and Circuit Diagram.

#### 3.2 Ratings and System Details

**Table 2: Technical Specification of EUT**

General Information of EUT	Value
Kind of Equipment	Floodlight Wired
Type Designation	5W21S8
Trademark	Ring
FCC ID	2AEUPBHAFM001
IC	20271-BHAFM001
HVIN	5W21S8
FVIN	1.7.16-56
PMN	Floodlight Wired
Operating Voltage	AC 100~240V 50/60Hz
Testing Voltage	AC 120V@60Hz
<b>Technical Specification of DTSS#1 (Bluetooth Low Energy)</b>	
Operating Frequency	2402 MHz to 2480 MHz
Type of Modulation	GFSK
Channel Number	40 channels
Channel Separation	2MHz
Antenna Type	Integral antenna
Antenna Gain1 of Bluetooth	-1.8 dBi
<b>Technical Specification of DTSS#2</b>	
Operating Frequency	902.5 MHz to 926.5 MHz
Type of Modulation	LoRa DTS
Channel Number	31 channels
Channel Bandwidth	500 KHz
Channel Separation	800 KHz
Antenna Type	Integral antenna
Antenna Gain2	-4.17 dBi

<b>Technical Specification of FHSs#1</b>	
Operating Frequency	902.2 MHz to 927.8 MHz
Type of Modulation	LoRa FHSS
Channel Number	129 channels
Channel Bandwidth	125 KHz
Channel Separation	200 KHz
Antenna Type	Integral antenna
Antenna Gain2	-4.17 dBi
<b>Technical Specification of FHSs#2</b>	
Operating Frequency	902.2 MHz to 927.8 MHz
Type of Modulation	FSK FHSS
Channel Number	129 channels
Data Rate	50 Kbps
Channel Separation	200 KHz
Antenna Type	Integral antenna
Antenna Gain2	-4.17 dBi
<b>Technical Specification of FHSs#3</b>	
Operating Frequency	902.4 MHz to 927.6 MHz
Type of Modulation	FSK FHSS
Channel Number	64 channels
Data Rate	150 Kbps
Channel Separation	400 KHz
Antenna Type	Integral antenna
Antenna Gain2	-4.17 dBi
<b>Technical Specification of FHSs#4</b>	
Operating Frequency	902.5 MHz to 927.5 MHz
Type of Modulation	FSK FHSS
Channel Number	51 channels
Data Rate	250 Kbps
Channel Separation	500 KHz
Antenna Type	Integral antenna
Antenna Gain2	-4.17 dBi

**Table 3: Operating Frequencies/Channels of EUT**

Technology	Modulation	Channel Number	Channel Separation (MHz)	Channel Bandwidth (MHz)	Data Rate (Kbps)	Low CH (MHz)	Middle CH (MHz)	High CH (MHz)
DTSS #1 (BLE)	GFSK	40	2.0	1	1000	2402.0	2440.0	2480.0
DTSS #2	LoRa DTS	31	0.8	0.5	--	902.5	914.5	926.5
FHSs #1	LoRa FHSS	129	0.2	0.125	-	902.2	915.0	927.8
FHSs #2	FSK FHSS	129	0.2	--	50	902.2	915.0	927.8
FHSs #3	FSK FHSS	64	0.4	--	150	902.4	914.8	927.6
FHSs #4	FSK FHSS	51	0.5	--	250	902.5	915	927.5

### 3.3 Independent Operation Modes

The basic operation modes are:

- A. On
  - 1. Bluetooth Low Energy transmitting mode
    - 1) Low Channel
    - 2) Middle Channel
    - 3) High Channel
  - 2. DTSs transmitting mode
    - 1) Low Channel
    - 2) Middle Channel
    - 3) High Channel
  - 3. FHSs transmitting mode
    - 1) Low Channel
    - 2) Middle Channel
    - 3) High Channel
- B. On, Transmitting on Hopping channel
- C. On, Bluetooth connecting mode
- D. On, DTSs connecting mode
- E. On, FHSs connecting mode
- F. On, Lighting mode

### 3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

### 3.5 Submitted Documents

- FCC/IC Label and Location Info

- User Manual

## 4 Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

**Radio Spectrum:** The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in KDB 558074 D01 DTS Meas Guidance v05r02, ANSI C63.10: 2013 and ANSI C63.4: 2014.

The device was configured to transmit continuously (*i.e.*, with a duty cycle of greater than or equal to 98 %) at the maximum power control level over a random symbol set.

### 4.3 Special Accessories and Auxiliary Equipment

**Table 4: Cables Used during Test**

Description	Manufacturer	Model	Quantity	Length (m)
USB cable	N/A	N/A	N/A	1.0

**Table 5: Auxiliary Equipment Used during Test**

Description	Manufacturer	Model	S/N	Rating
PC	Lenovo	T480	N/A	/

### 4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

## 4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

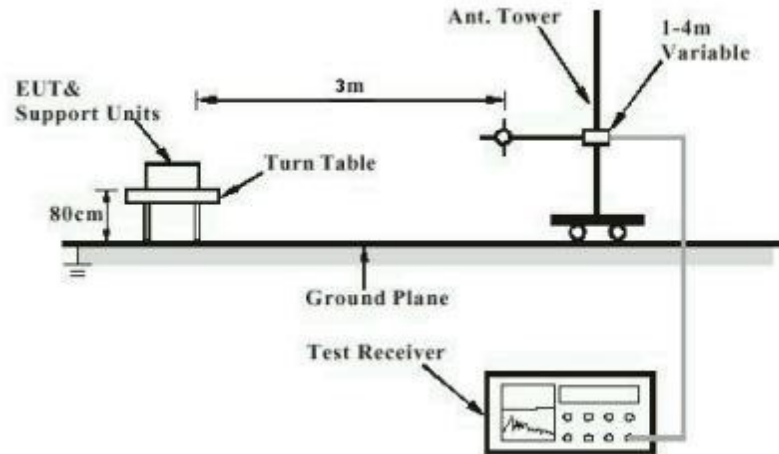


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

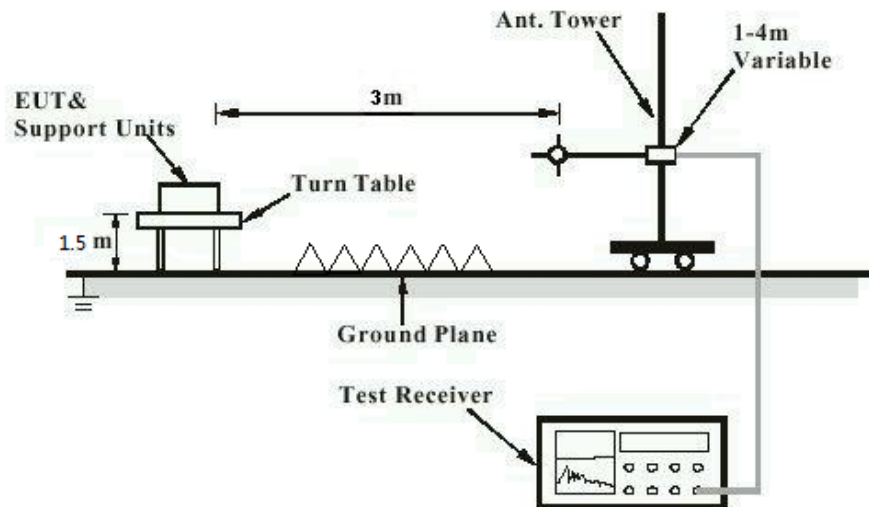


Diagram of Measurement Configuration for Mains Conduction Measurement


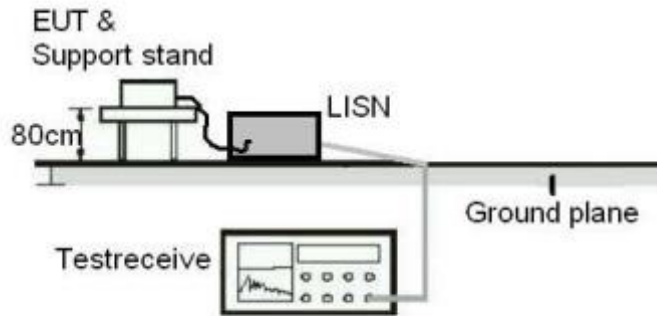


Diagram of Measurement Configuration for Conducted Transmitter Measurement

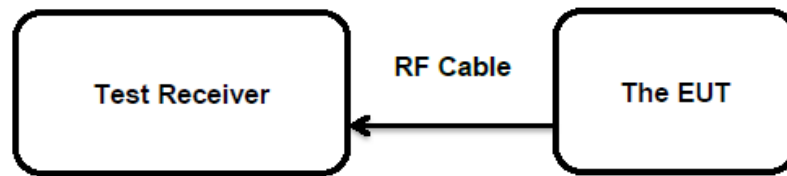

## 5 Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

RESULT:

**Pass**

**Test Specification**

Reference standard : FCC Part 15.247(b)(4) and Part 15.203

The EUT has two internal antennas, which permanently attached and no consideration of replacement.

Therefore, the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

### 5.1.2 Maximum Peak Conducted Output Power (for DTSS and FHSs)

**RESULT:**
**Pass**
**Test Specification**

Reference standard : FCC Part 15.247(b)(1), (2) and (3)  
 RSS-247 Clause 5.4(a), (b) and (d)

Test method : Sub-clause 11.9.1.3 of ANSI C63.10:2013  
 Sub-clause 8.3.1.3 of KDB558074 D01v05r02

Limits : DTSS < 1.0 Watts, FHSs < 0.25 Watts

Test standard	Technology	Frequency (MHz)	Limit (W)	Channel No.
FCC 15.247	DTSS	902-928 2400-2483.5	1.0	--
	FHSs	902-928	1.0	≥ 50
0.25			25 ≤ channels < 50	
RSS-247	DTSS	902-928 2400-2483.5	1.0(e.i.r.p<4.0)	--
	FHSs	902-928	1.0(e.i.r.p<4.0)	≥ 50
0.25(e.i.r.p<1.0)			25 ≤ channels < 50	

Kind of test site : Shielded Room

**Test Setup**

Date of testing : 17.08.2020

Input voltage : AC 120V@60Hz

Operation mode : A

Test channel : Low / Middle / High

Ambient temperature : 25 °C

Relative humidity : 56 %

Atmospheric pressure : 101 kPa

For details refer to following test result.



**Table 6: Test Result of Maximum Peak Conducted Output Power**

Test Mode	Test Channel	Measured Peak Power		Limit (W)
		(dBm)	(W)	
DTSs#1 (BLE)	Low CH	-4.13	0.00039	< 1
	Middle CH	-4.25	0.00038	
	High CH	-4.36	0.00037	
DTSs#2	Low CH	15.14	0.03266	< 1
	Middle CH	15.04	0.03192	
	High CH	14.98	0.03148	
FHSs#1	Low CH	14.32	0.02704	< 1
	Middle CH	14.36	0.02729	
	High CH	14.51	0.02825	
FHSs#2	Low CH	14.15	0.02600	< 1
	Middle CH	14.22	0.02642	
	High CH	14.29	0.02685	
FHSs#3	Low CH	14.35	0.02723	< 1
	Middle CH	14.42	0.02767	
	High CH	14.62	0.02897	
FHSs#4	Low CH	14.46	0.02793	< 1
	Middle CH	14.38	0.02742	
	High CH	14.67	0.02931	

**Note:**

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G) of BLE: -1.8 dBi,
- 3) Antenna gain(G) of DTSs: -4.17 dBi,
- 4) Antenna gain(G) of FHSs: -4.17 dBi,

The Maximum peak conducted output power (e.i.r.p.)= $P_{(\text{Peak power})} + G$ , which is far below the 4 W

### 5.1.3 Conducted Power Spectral Density (for DTSSs)

**RESULT:**
**Pass**
**Test Specification**

Reference standard : FCC Part 15.247(e)  
 RSS-247 Clause 5.2(b)

Test method : Sub-clause 11.10.2 of ANSI C63.10:2013  
 Sub-clause 8.4 of KDB558074 D01v05r02

Limits : < 8 dBm / 3kHz

Kind of test site : Shielded Room

**Test Setup**

Date of testing : Refer to test data

Input voltage : AC 120V@60Hz

Operation mode : A.1, A.2

Test channel : Low / Middle / High

Ambient temperature : 25 °C

Relative humidity : 56 %

Atmospheric pressure : 101 kPa

For details refer to following test result.

**Table 7: Test Result of Power Spectral Density**

Test Mode	Test Channel (MHz)	Measured Peak Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
DTSS#1 (BLE)	Low CH	-17.73	8 dBm / 3kHz
	Middle CH	-18.04	
	High CH	-18.05	
DTSS#2	Low CH	-3.91	
	Middle CH	-3.69	
	High CH	-3.58	

Note: The cable loss is taken into account in results.

For the measurement records, refer to the appendix B.

### 5.1.4 6dB Bandwidth (for DTSSs)

**RESULT:**
**Pass**
**Test Specification**

Reference standard : FCC Part 15.247(a)(2)  
 RSS-247 Clause 5.2(a)

Test method : Sub-clause 8.3.1.1 of KDB558074 D01v05r02  
 Sub-clause 11.9.1.1 of ANSI C63.10:2013

Limits : > 500 KHz

Kind of test site : Shielded Room

**Test Setup**

Date of testing : Refer to test data

Input voltage : AC 120V@60Hz

Operation mode : A.1, A.2

Test channel : Low / Middle / High

Ambient temperature : 25 °C

Relative humidity : 56 %

Atmospheric pressure : 101 kPa

For details refer to following test result.

**Table 8: Test Result of 6dB Bandwidth**

Test Mode	Test Channel	6dB Bandwidth (kHz)	Limit
DTSS#1 (BLE)	Low CH	551.9	> 500KHz
	Middle CH	594.4	
	High CH	606.9	
DTSS#2	Low CH	624.4	
	Middle CH	624.4	
	High CH	624.4	

For the measurement records, refer to the appendix B.

### 5.1.5 99% Bandwidth (for DTSSs and FHSs)

**RESULT:**
**Pass**
**Test Specification**

Test standard : RSS-Gen Clause 6.7  
 Test method : Sub-clause 6.9.3 of ANSI C63.10:2013  
 Kind of test site : Shielded Room

**Test Setup**

Date of testing : Refer to test data  
 Input voltage : AC 120V@60Hz  
 Operation mode : A  
 Test channel : Low / Middle / High  
 Ambient temperature : 25 °C  
 Relative humidity : 56 %  
 Atmospheric pressure : 101 kPa

For details refer to following test result.

**Table 9: Test Result of 99% Bandwidth**

Test Mode	Test Channel	99% Bandwidth (KHz)	Limit
DTSSs#1 (BLE)	Low CH	1036.46	/
	Middle CH	1041.46	
	High CH	1036.46	
DTSSs#2	Low CH	516.98	
	Middle CH	516.98	
	High CH	511.99	
FHSs#1	Low CH	126.75	
	Middle CH	128.00	
	High CH	128.62	
FHSs#2	Low CH	103.40	
	Middle CH	103.90	
	High CH	102.40	
FHSs#3	Low CH	156.09	
	Middle CH	156.72	
	High CH	157.34	
FHSs#4	Low CH	251.62	
	Middle CH	252.87	
	High CH	252.25	

For the measurement records, refer to the appendix B and C.

### 5.1.6 20dB Bandwidth (for FHSs)

**RESULT:**
**Pass**
**Test Specification**

Test standard : FCC Part 15.247(a)(1)(i)  
                   : RSS-247 Clause 5.1(c)  
 Test method : Sub-clause 6.9.2 of ANSI C63.10:2013  
 Limits : < 500KHz  
 Kind of test site : Shielded Room

**Test Setup**

Date of testing : Refer to test data  
 Input voltage : AC 120V@60Hz  
 Operation mode : A.3  
 Test channel : Low / Middle / High  
 Ambient temperature : 25 °C  
 Relative humidity : 56 %  
 Atmospheric pressure : 101 kPa

For details refer to following test result.

**Table 10: Test Result of 20dB Bandwidth**

Test Mode	Test Channel (MHz)	20dB Bandwidth (kHz)	Limit
FHSs#1	Low CH	144.23	< 500KHz
	Middle CH	143.61	
	High CH	144.23	
FHSs#2	Low CH	105.39	
	Middle CH	110.39	
	High CH	107.89	
FHSs#3	Low CH	167.96	
	Middle CH	162.96	
	High CH	161.09	
FHSs#4	Low CH	255.37	
	Middle CH	257.24	
	High CH	255.37	

For the measurement records, refer to the appendix C.

### 5.1.7 Carrier Frequency Separation (for FHSs)

**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(a)(1) RSS-247 Clause 5.1(b)
Test method	: Sub-clause 7.8.2 of ANSI C63.10:2013
Limits	: $\geq 25\text{kHz}$ or 20dB bandwidth, whichever is greater
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: Refer to test data
Input voltage	: AC 120V@60Hz
Operation mode	: B
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For details refer to following test result.

**Table 11: Test Result of Carrier Frequency Separation**

Test Mode	Test Channel	Measured Channel Separation (KHz)	Limit (kHz)
FHSs#1	Low Channel	200.00	≥ 144.23
	Adjacency Channel		
	Middle Channel	199.99	
	Adjacency Channel		
	High Channel	200.00	
	Adjacency Channel		
FHSs#2	Low Channel	200.00	≥ 110.39
	Adjacency Channel		
	Middle Channel	199.99	
	Adjacency Channel		
	High Channel	200.00	
	Adjacency Channel		
FHSs#3	Low Channel	400.00	≥ 167.96
	Adjacency Channel		
	Middle Channel	400.00	
	Adjacency Channel		
	High Channel	400.00	
	Adjacency Channel		
FHSs#4	Low Channel	499.99	≥ 257.24
	Adjacency Channel		
	Middle Channel	500.00	
	Adjacency Channel		
	High Channel	500.00	
	Adjacency Channel		

For the measurement records, refer to the appendix C.

### 5.1.8 Number of Hopping Frequency (for FHSs)

**RESULT:**
**Pass**
**Test Specification**

Test standard : FCC part 15.247(a)(1)(i)  
                   : RSS-247 Clause 5.1(c)  
 Test method : Sub-clause 7.8.3 of ANSI C63.10:2013  
 Limits :  $\geq 50$  hopping frequencies for 20dB BW less than 250kHz  
           :  $\geq 25$  hopping frequencies for 20dB BW greater than 250kHz  
 Kind of test site : Shielded Room

**Test Setup**

Date of testing : Refer to test data  
 Input voltage : AC 120V@60Hz  
 Operation mode : B  
 Ambient temperature : 25 °C  
 Relative humidity : 56 %  
 Atmospheric pressure : 101 kPa

For details refer to following test result.

**Table 12: Test Result of Number of Hopping Frequency**

Test Mode	Frequency Range	Measured Quantity of Hopping Channel	Limit
FHSs#1	902.2 MHz to 927.8 MHz	129	$\geq 50$
FHSs#2	902.2 MHz to 927.8 MHz	129	$\geq 50$
FHSs#3	902.4 MHz to 927.6 MHz	64	$\geq 50$
FHSs#4	902.5 MHz to 927.5 MHz	51	$\geq 25$

For the measurement records, refer to the appendix C.



### 5.1.9 Channel Occupancy Time (for FHSs)

**RESULT:**
**Pass**
**Test Specification**

Test standard : FCC part 15.247(a)(1)(i)  
                   : RSS-247 Clause 5.1(c)  
 Test method : Sub-clause 7.8.4 of ANSI C63.10:2013  
 Limits : < 0.4s  
 Kind of test site : Shielded Room

**Test Setup**

Date of testing : Refer to test data  
 Input voltage : AC 120V@60Hz  
 Operation mode : B  
 Test channel : Low / Middle / High  
 Ambient temperature : 25 °C  
 Relative humidity : 56 %  
 Atmospheric pressure : 101 kPa

Note:

Dwell time = Pulse width x Number of channels in Period

For details refer to following test result.

**Table 13: Test Result of Time of Occupancy**

Test Mode	Test Channel (MHz)	Pulse Width(ms)	Number of Channels	Period (S)	Channel occupancy Time (s)	Limit (s)
FHSs#1	Middle CH	340.0	1	20s	0.340	0.4s
FHSs#2	Middle CH	280.0	1	20s	0.280	0.4s
FHSs#3	Middle CH	279.9	1	20s	0.280	0.4s
FHSs#4	Middle CH	308.8	1	10s	0.309	0.4s

For the measurement records, refer to the appendix C.

**5.1.10 Conducted Spurious Emissions (for DTSS and FHSs)****RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(d) RSS-247 Clause 5.5
Test method	: Sub-clause 8.5 of KDB 558074 D01 v05r02 Sub-clause 11.11 of ANSI C63.10:2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: Refer to test data
Input voltage	: AC 120V@60Hz
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix B and C.

**5.1.11 Radiated Spurious Emission (for DTs and FHSs)****RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Clause 3.3
Test method	: Sub-clause 8.6 of KDB 558074 D01 v05r02 Sub-clause 11.12.1 of ANSI C63.10:2013
Limits	: FCC Part 15.209(a) RSS-Gen Table 5
Kind of test site	: 3m Semi-anechoic Chamber

**Test Setup**

Date of testing	: Refer to test data
Input voltage	: AC 120V@60Hz
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test data
Relative humidity	: Refer to test data
Atmospheric pressure	: 101 kPa

**Remark:**

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix D.

**5.1.12 Conducted Emission on AC Mains (for DTs and FHSs)****RESULT:****N/A****Test Specification**

Test standard	: FCC Part 15.207(a) & FCC Part 15.107(a) RSS-Gen Clause 8.8 & ICES-003
Test method	: Sub-clause 6.2 of ANSI C63.10:2013 Sub-clause 7 of ANSI C63.4:2014
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a) & FCC Part 15.107(a) RSS-Gen Clause 8.8 Table 4 & ICES-003 Table 2
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: Refer to test data
Input voltage	: AC 120V@60Hz
Operation mode	: A to F
Earthing	: Not connected
Ambient temperature	: 24 °C
Relative humidity	: 53 %
Atmospheric pressure	: 101 kPa

For the measurement worst case records, refer to the appendix E.

### 5.1.13 Radiated Emission

**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.109(a) ICES-003
Test method	: Sub-clause 8 of Error! Reference source not found.
Frequency range	: 30 - 6000MHz
Classification	: Class B
Limits	: FCC Part 15.109(a) ICES-003 Table 5 & Table 7
Kind of test site	: 3m Semi-anechoic Chamber

**Test Setup**

Date of testing	: Refer to test data
Input voltage	: AC 120V@60Hz
Operation mode	: F
Earthing	: Not connected
Ambient temperature	: 24 °C
Relative humidity	: 53 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix E.

## 6 Safety Human Exposure

### 6.1 Radio Frequency Exposure Compliance

#### 6.1.1 Electromagnetic Fields

RESULT:

Pass

**Test Specification**

Test standard

: CFR47 FCC Part 2: Section 2.1091  
CFR47 FCC Part 1: Section 1.1310  
FCC KDB Publication 447498 v06, section 7  
RSS-102 Issue 5 March 2015, section 2.5.2

**➤ FCC requirements**

**FCC requirement:** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 20cm normally can be maintained between the user and the device.

**MPE Calculation Method according to KDB 447498 v06**Power Density:  $S_{(mW/cm^2)} = PG/4\pi R^2$  or  $EIRP/4\pi R^2$ 

Where:

S = power density (mW/cm<sup>2</sup>)

P = power input to the antenna (mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (cm)

From the peak RF output power, the minimum mobile separation distance, d=20 cm, as well as the antenna gain (Max. -1.8 dBi for BLE, Max -4.17 dBi for DTSS and FHSs), the RF power density can be calculated as below:

 $S_{(mW/cm^2)} = PG/4\pi R^2$

**a) EUT RF Exposure Evaluation standalone operations**

Test Mode	Measured Peak Power		Antenna Gain (dBi)	Measured e.i.r.p		$S_{(mW/cm^2)} = \frac{PG}{4\pi R^2}$	Limit (mW/cm <sup>2</sup> )
	(dBm)	(mW)		(dBm)	(mW)		
DTSS#1(BLE)	-4.13	0.39	-1.8	-5.93	0.26	0.00005	1.0
DTSS#2	15.14	32.66	-4.17	10.97	12.50	0.00249	0.601
FHSs#1	14.51	28.25	-4.17	10.34	10.81	0.00215	0.601
FHSs#2	14.29	26.85	-4.17	10.12	10.28	0.00205	0.601
FHSs#3	14.62	28.97	-4.17	10.45	11.09	0.00221	0.601
FHSs#4	14.67	29.31	-4.17	10.50	11.22	0.00223	0.601

**b) EUT RF Exposure Evaluation simultaneous transmission operations**

Simultaneous transmission mode	The sum of the ratios	Result
BLE + DTSSs	$0.00005/1 + 0.00249/0.601 < 1$	Pass
BLE + FHSs	$0.00005/1 + 0.00223/0.601 < 1$	Pass

➤ **IC requirements:** The EUT shall comply with the requirement of RSS-102 section 2.5.2.

**Exemption from Routine Evaluation Limits – RF Exposure Evaluation**

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $1.31 \times 10^{-2} f^{0.6834}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz;

- RF exposure evaluation exempted power for BLE: 2.670 W
- RF exposure evaluation exempted power for DTSSs and FHSs: 1.37 W

**a) EUT RF Exposure Evaluation standalone operations:**

Test Mode	Measured Peak Power		Antenna Gain (dBi)	Measured e.i.r.p (mW)	
	(dBm)	(mW)		(dBm)	(mW)
DTSSs#1(BLE)	-4.13	0.39	-1.8	-5.93	0.26
DTSSs#2	15.14	32.66	-4.17	10.97	12.50
FHSs#1	14.51	28.25	-4.17	10.34	10.81
FHSs#2	14.29	26.85	-4.17	10.12	10.28
FHSs#3	14.62	28.97	-4.17	10.45	11.09
FHSs#4	14.67	29.31	-4.17	10.50	11.22

**b) EUT RF Exposure Evaluation simultaneous transmission operations**

Simultaneous transmission mode	The sum of the ratios	Result
BLE + DTSSs	$0.00026/2.67 + 0.0125/1.37 < 1$	Pass
BLE + FHSs	$0.00026/2.67 + 0.0112/1.37 < 1$	Pass

The e.i.r.p. for BLE, DTSSs and FHSs are less than the RF exposure evaluation exempted power. So RF exposure evaluation is not required.

**“RF Radiation Exposure Statement Caution: This Transmitter must be installed to provide a separation distance of at least 20 cm from all persons.”**



## 7 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

## 8 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Technical Specification of EUT .....	9
Table 3: Operating Frequencies/Channels of EUT .....	10
Table 4: Cables Used during Test .....	12
Table 5: Auxiliary Equipment Used during Test .....	12
Table 6: Test Result of Maximum Peak Conducted Output Power.....	17
Table 7: Test Result of Power Spectral Density .....	18
Table 8: Test Result of 6dB Bandwidth .....	19
Table 9: Test Result of 99% Bandwidth .....	20
Table 10: Test Result of 20dB Bandwidth .....	21
Table 11: Test Result of Carrier Frequency Separation .....	23
Table 12: Test Result of Number of Hopping Frequency .....	24
Table 13: Test Result of Time of Occupancy .....	25