

## RF Test Report

Applicant : Ring LLC

Product Type : Video Doorbell 3 Plus (for model : 5UM6E5)  
Video Doorbell 3 (for model : 5AT3S9)

Trade Name : Ring

Model Number : 5UM6E5, 5AT3S9

Applicable Standard : FCC 47 CFR PART 15 SUBPART C  
ANSI C63.10:2013

Received Date : Jul. 07, 2020

Test Period : Jul. 23 ~ Jul. 28, 2020

Issued Date : Aug. 04, 2020

### Issued by

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 33465, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330  
Frequency Range : 9 kHz to 40 GHz  
Test Firm MRA designation number: TW0010

#### Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of A Test Lab Technology Corporation.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.



**Revision History**

| Rev. | Issued Date   | Revisions     | Revised By  |
|------|---------------|---------------|-------------|
| 00   | Aug. 04, 2020 | Initial Issue | Tobey Cheng |
|      |               |               |             |
|      |               |               |             |
|      |               |               |             |

## Verification of Compliance

Applicant : Ring LLC

Product Type : Video Doorbell 3 Plus (for model : 5UM6E5)  
Video Doorbell 3 (for model : 5AT3S9)

Trade Name : Ring

Model Number : 5UM6E5, 5AT3S9

FCC ID : 2AEUPBHARG051

EUT Rated Voltage : AC 8-24 V, 50/60 Hz, 200 mA

Test Voltage : AC 24 V, 60 Hz

Applicable Standard : FCC 47 CFR PART 15 SUBPART C  
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade District,  
Taoyuan City 33465, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190  
Taiwan Accreditation Foundation accreditation number: 1330  
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By  
(Manager)

: Fly Lu  
(Fly Lu)



## TABLE OF CONTENTS

|          |                                                   |           |
|----------|---------------------------------------------------|-----------|
| <b>1</b> | <b>General Information .....</b>                  | <b>5</b>  |
| 1.1.     | Summary of Test Result.....                       | 5         |
| 1.2.     | Measurement Uncertainty.....                      | 6         |
| <b>2</b> | <b>EUT Description .....</b>                      | <b>7</b>  |
| <b>3</b> | <b>Test Methodology .....</b>                     | <b>8</b>  |
| 3.1.     | Mode of Operation.....                            | 8         |
| 3.2.     | EUT Test Step .....                               | 9         |
| 3.3.     | Configuration of Test System Details .....        | 10        |
| 3.4.     | Test Instruments .....                            | 11        |
| 3.5.     | Test Site Environment.....                        | 11        |
| <b>4</b> | <b>Measurement Procedure .....</b>                | <b>12</b> |
| 4.1.     | AC Power Line Conducted Emission Measurement..... | 12        |
| 4.2.     | Radiated Emission Measurement .....               | 14        |
| <b>5</b> | <b>Test Results.....</b>                          | <b>18</b> |
|          | Annex A. Conducted Emission .....                 | 18        |
|          | Annex B. Radiated Emission Measurement .....      | 22        |



# 1 General Information

## 1.1. Summary of Test Result

| Standard     | Item                                    | Result | Remark |
|--------------|-----------------------------------------|--------|--------|
| 15.207       | AC Power Conducted Emission             | PASS   | Note   |
| 15.247(d)    | Transmitter Radiated Emissions          | PASS   | Note   |
| 15.247(b)(3) | Max. Output Power                       | N/A    | N/A    |
| 15.247(a)(2) | 6 dB RF Bandwidth                       | N/A    | N/A    |
| 15.247(e)    | Maximum Power Spectral Density          | N/A    | N/A    |
| 15.247(d)    | Out of Band Conducted Spurious Emission | N/A    | N/A    |
| 15.203       | Antenna Requirement                     | N/A    | N/A    |

Note : Transmitter Radiated Emissions is larger than the original report but not out of 3 dBm. After evaluation above, C2PC is applicable.

After the evaluation, AC Power Conducted and Transmitter Radiated Emissions (Below 1 GHz) need to be re-evaluated.

### Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

| Standard                                      | Description                                                                                                                                                                              |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CFR47, Part 15, Subpart C                     | Intentional Radiators                                                                                                                                                                    |
| ANSI C63. 10: 2013                            | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices                                                                                           |
| KDB 558074 D01 15.247<br>Meas Guidance v05r02 | GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES |



## 1.2. Measurement Uncertainty

| Test Item          | Frequency Range       | Uncertainty (dB) |
|--------------------|-----------------------|------------------|
| Conducted Emission | 150 kHz ~ 30 MHz      | 2.68             |
| Radiated Emission  | 9 kHz ~ 30 MHz        | 2.14             |
|                    | 30 MHz ~ 1000 MHz     | 4.99             |
|                    | 1000 MHz ~ 18000 MHz  | 4.99             |
|                    | 18000 MHz ~ 26500 MHz | 4.23             |
|                    | 26500 MHz ~ 40000 MHz | 4.39             |



## 2 EUT Description

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                    |             |                 |
|-----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-------------|-----------------|
| Applicant                                           | Ring LLC<br>1523 26th Street, Santa Monica CA 90404, United States                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |             |                 |
| Manufacturer                                        | Ring Inc.<br>1523 26th Street, Santa Monica CA 90404, United States                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                    |             |                 |
| Product Type                                        | Video Doorbell 3 Plus (for model : 5UM6E5)<br>Video Doorbell 3 (for model : 5AT3S9)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                    |             |                 |
| Trade Name                                          | Ring                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                    |             |                 |
| Model No.                                           | 5UM6E5, 5AT3S9                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                    |             |                 |
| Difference description of product type/model number | 5UM6E5 : With glance<br>5AT3S9 : Without glance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                    |             |                 |
| FCC ID                                              | 2AEUPBHARG051                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                    |             |                 |
| Class II Permissive Change                          | <p>Due to market demand, model number, 5UM6E5 and serial model number, 5AT3S9 have the following change:</p> <ol style="list-style-type: none"> <li>1. Increase power saving and safety design</li> <li>2. Material of camera lens cover changes</li> <li>3. Increase Fuse and a crystal</li> </ol> <p>The changes above don't affect RF characteristics. The rest design, such as circuit, PCB and so on has not changed.</p> <p>Details:</p> <ol style="list-style-type: none"> <li>1-1 HW changes (2nd XTAL &amp; Discrete circuit change) for power saving</li> <li>1-2 Remove Audio DSP TLV320AIC3021 IC, mainly on camera board for power saving</li> <li>1-3 Camera lens cover changes to HB</li> <li>1-4 Increase Fuse at input of the product for short circuit protection</li> <li>1-5 Increase a crystal for BT, the original crystal is used for both WLAN and BT.</li> </ol> |                    |             |                 |
| Frequency Range                                     | 2402 ~ 2480 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                    |             |                 |
| Modulation Type                                     | GFSK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                    |             |                 |
| Operate Temp. Range                                 | -20 ~ +50 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                    |             |                 |
| Antenna information                                 | Antenna                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Model Number       | Type        | Max. Gain (dBi) |
|                                                     | ANT-0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | RFPCA491914EMLB303 | PCB Antenna | 0.61            |
|                                                     | ANT-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | RFPCA491914EMLB301 | PCB Antenna | 0.72            |
| RF Output Power                                     | ANT-0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                    |             |                 |
|                                                     | LE, GFSK:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 0.00120 W          |             |                 |
|                                                     | 2LE, GFSK:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 0.00119 W          |             |                 |
|                                                     | ANT-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                    |             |                 |
|                                                     | LE, GFSK:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 0.00124 W          |             |                 |
|                                                     | 2LE, GFSK:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 0.00124 W          |             |                 |

### 3 Test Methodology

#### 3.1. Mode of Operation

In the test report use EUT model: 5UM6E5 to operate testing.

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

| Test Mode                            |
|--------------------------------------|
| Mode 1: Transmit mode                |
| Mode 2: LE, GFSK Continuous TX Mode  |
| Mode 3: 2LE, GFSK Continuous TX Mode |

| Final-Test Mode                      |
|--------------------------------------|
| Mode 1: Transmit Mode                |
| Mode 2: LE, GFSK Continuous TX Mode  |
| Mode 3: 2LE, GFSK Continuous TX Mode |

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

Note: 1. The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %.

2. ANT-1 is the worst case.

| Test Mode | ANT-0 | ANT-1 | ANT-0+1 |
|-----------|-------|-------|---------|
| Mode 2    | V     | V     | ---     |
| Mode 3    | V     | V     | ---     |

| Test Mode | Antenna Delivery |
|-----------|------------------|
| Mode 2    | 1TX (Diversity)  |
| Mode 3    | 1TX (Diversity)  |






### 3.2. EUT Test Step

|   |                                                                |
|---|----------------------------------------------------------------|
| 1 | Setup the EUT shown on "Configuration of Test System Details". |
| 2 | Turn on the power of all equipment.                            |
| 3 | Turn on TX function.                                           |
| 4 | EUT run test program.                                          |


| Measurement Software |                    |          |         |
|----------------------|--------------------|----------|---------|
| No.                  | Description        | Software | Version |
| 1                    | Conducted Emission | EZ EMC   | 1.1.4.3 |
| 2                    | Radiated Emission  | EZ EMC   | 1.1.4.4 |

### 3.3. Configuration of Test System Details

#### Conducted Emissions

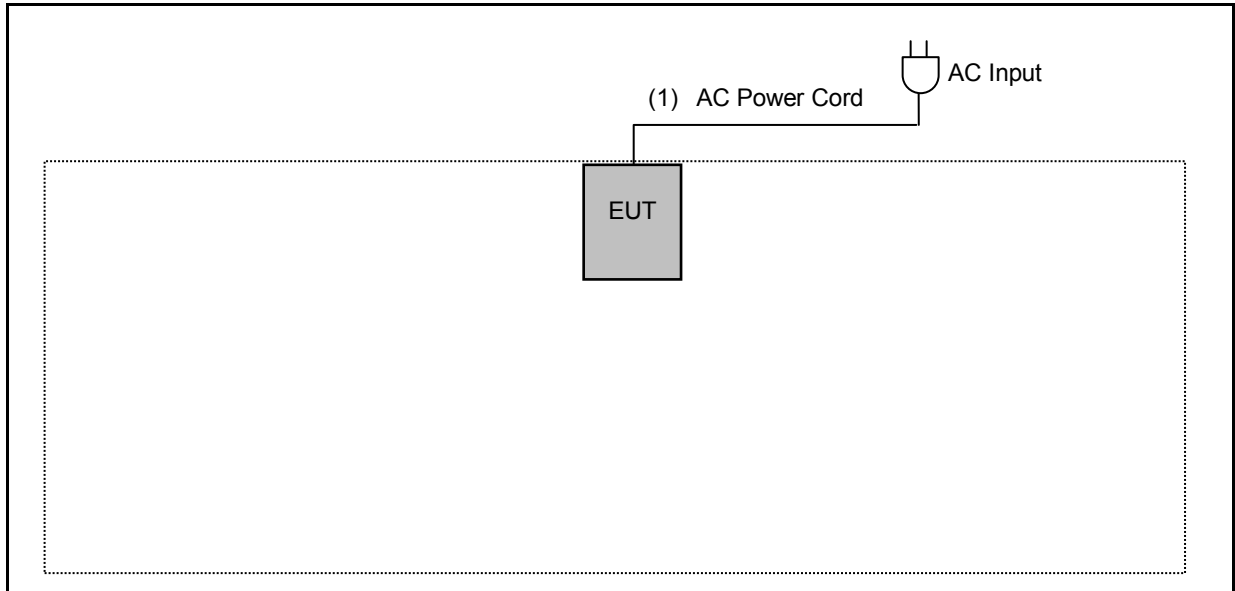

#### Radiated Emission

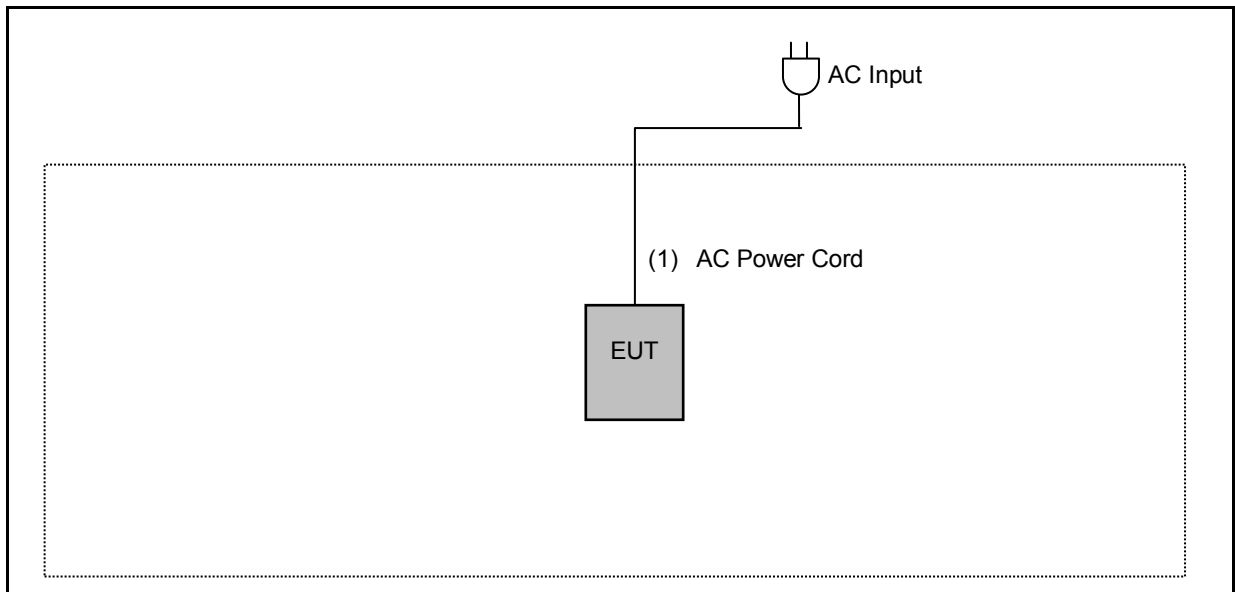

| Devices Description |               |              |              |               |            |
|---------------------|---------------|--------------|--------------|---------------|------------|
|                     | Product       | Manufacturer | Model Number | Serial Number | Power Cord |
| (1)                 | AC Power Cord | BAOHING      | BAOHING      | ---           | ---        |



### 3.4. Test Instruments

For Conducted Emission

Test Period: Jul. 28, 2020

Testing Engineer: Louis Shen

| Equipment     | Manufacturer | Model Number   | Serial Number | Cal. Date  | Cal. Period |
|---------------|--------------|----------------|---------------|------------|-------------|
| Test Receiver | R&S          | ESCI           | 100367        | 05/25/2020 | 1 year      |
| LISN          | R&S          | ENV216         | 101040        | 03/23/2020 | 1 year      |
| LISN          | R&S          | ENV216         | 101041        | 04/06/2020 | 1 year      |
| RF Cable      | Woken        | 00100D1380194M | TE-02-03      | 05/26/2020 | 1 year      |

For Radiated Emissions

Test Period: Jul. 23, 2020

Testing Engineer: JS Liao

| Equipment                           | Manufacturer | Model Number           | Serial Number | Cal. Date  | Cal. Period |
|-------------------------------------|--------------|------------------------|---------------|------------|-------------|
| Spectrum Analyzer<br>(10 Hz~44 GHz) | Keysight     | N9010A                 | MY52221312    | 01/13/2020 | 1 year      |
| Pre Amplifier<br>(100 kHz~1.3 GHz)  | Agilent      | 8447D                  | 2944A11119    | 01/15/2020 | 1 year      |
| Broadband Antenna                   | Schwarzbeck  | VULB9168               | 416           | 10/23/2019 | 1 year      |
| RF Cable                            | EMCI         | EMC104-N-N-6000        | TE01-1        | 02/20/2020 | 1 year      |
| Microwave Cable                     | EMCI         | EMC104-SM-<br>SM-13000 | 170814        | 10/29/2019 | 1 year      |
| Microwave Cable                     | EMCI         | EMC102-KM-<br>KM-14000 | 151001        | 02/20/2020 | 1 year      |

### 3.5. Test Site Environment

| Items            | Required (IEC 60068-1) | Actual |
|------------------|------------------------|--------|
| Temperature (°C) | 15-35                  | 20-30  |
| Humidity (%RH)   | 25-75                  | 45-75  |


## 4 Measurement Procedure

### 4.1. AC Power Line Conducted Emission Measurement

#### ■ Limit

| Frequency (MHz) | Quasi-peak | Average  |
|-----------------|------------|----------|
| 0.15 - 0.5      | 66 to 56   | 56 to 46 |
| 0.50 - 5.0      | 56         | 46       |
| 5.0 - 30.0      | 60         | 50       |

#### ■ Test Setup

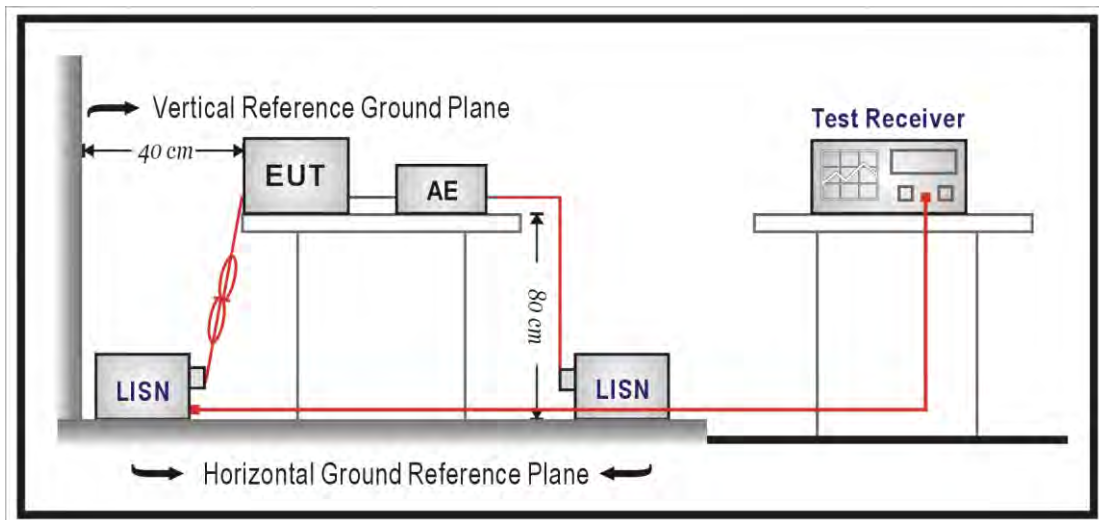

### ■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a  $50 \Omega // 50 \mu\text{H}$  coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a  $50 \Omega // 50 \mu\text{H}$  coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50  $\Omega$  ports of the LISN shall be resistively terminated into 50  $\Omega$  loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

## 4.2. Radiated Emission Measurement

### ■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength ( $\mu\text{V}/\text{m}$ at meter) | Measurement Distance (meters) |
|-----------------|---------------------------------------------------|-------------------------------|
| 0.009 – 0.490   | $2400 / F$ (kHz)                                  | 300                           |
| 0.490 – 1.705   | $24000 / F$ (kHz)                                 | 30                            |
| 1.705 – 30.0    | 30                                                | 30                            |
| 30 - 88         | 100**                                             | 3                             |
| 88-216          | 150**                                             | 3                             |
| 216-960         | 200**                                             | 3                             |
| Above 960       | 500                                               | 3                             |


\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

### ■ Setup

9 kHz ~ 30 MHz

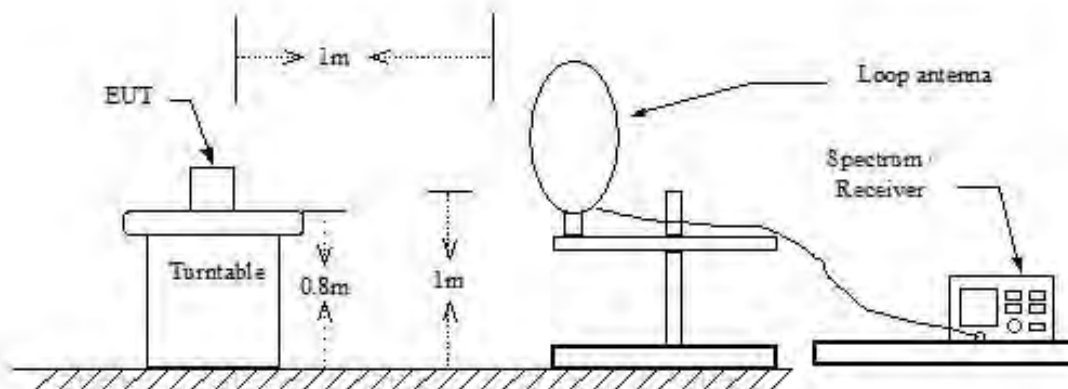

Below 1 GHz

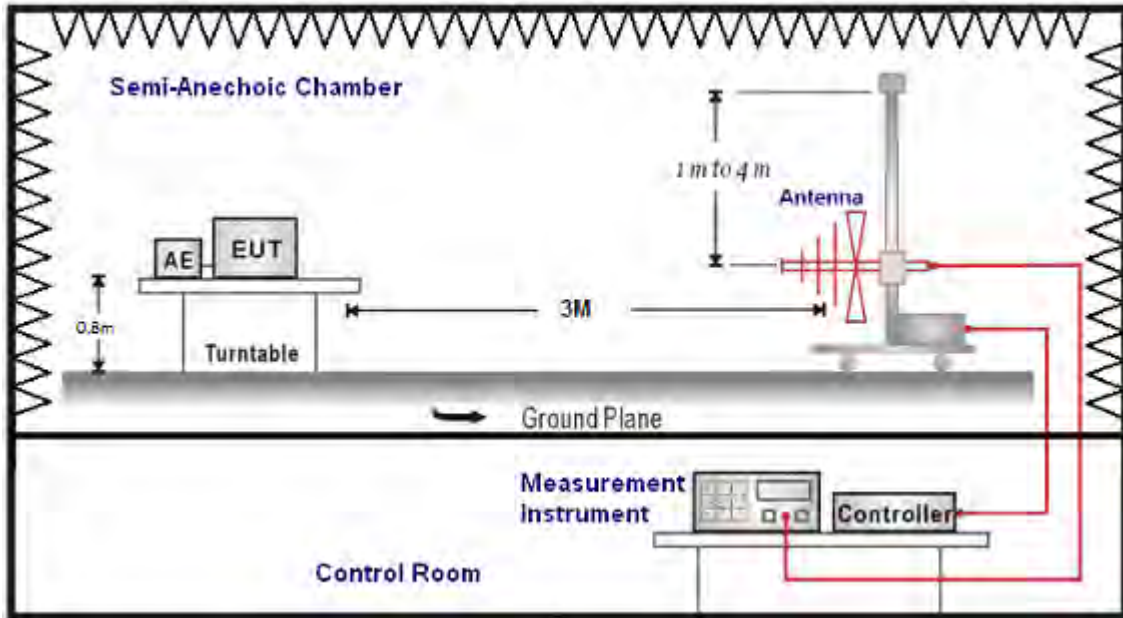

## ■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle  $>0.98$  /  $1/T$  for average measurements when Duty cycle  $<0.98$ . A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter ( $\mu\text{V}/\text{m}$ ).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).





The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10


Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

## 5 Test Results

### Annex A. Conducted Emission

Model Name : 5UM6E5

|              |                    |        |               |
|--------------|--------------------|--------|---------------|
| Standard:    | FCC Part 15.247    | Line:  | L1            |
| Test item:   | Conducted Emission | Power: | AC 24 V/60 Hz |
| Mode:        | Mode 1             |        |               |
| Description: |                    |        |               |

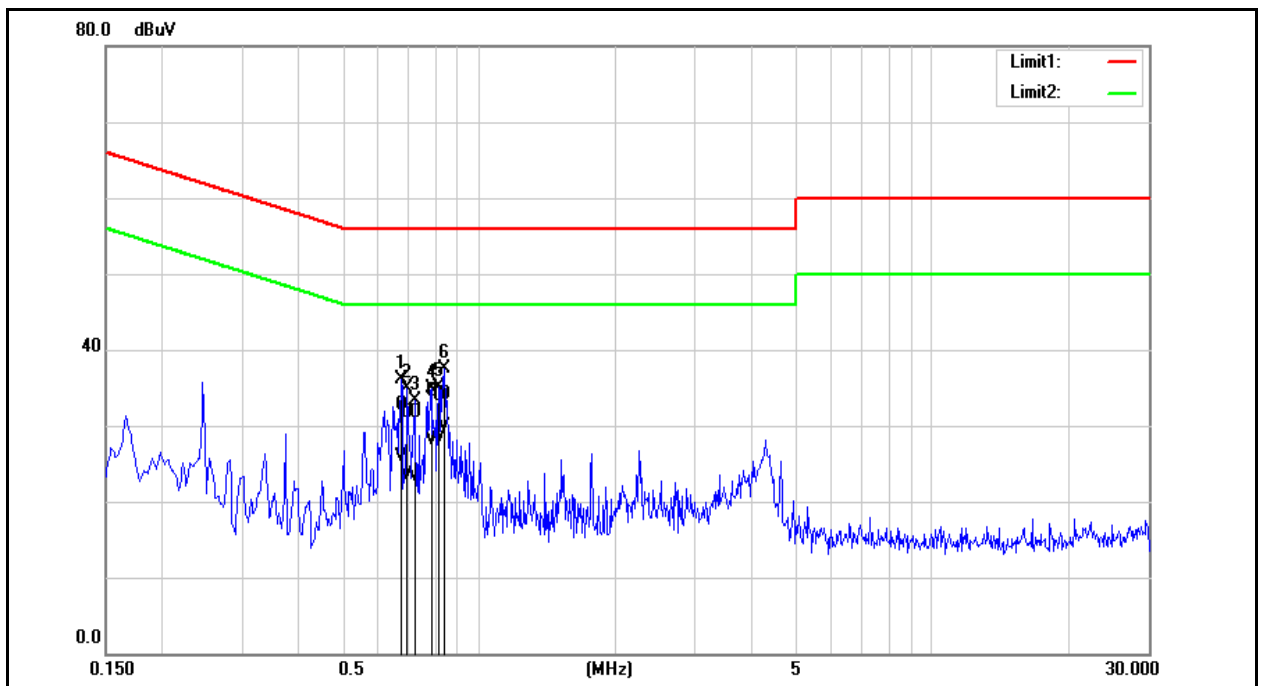


| No. | Frequency (MHz) | QP reading (dBuV) | AVG reading (dBuV) | Correction factor (dB) | QP result (dBuV) | AVG result (dBuV) | QP limit (dBuV) | AVG limit (dBuV) | QP margin (dB) | AVG margin (dB) | Remark |
|-----|-----------------|-------------------|--------------------|------------------------|------------------|-------------------|-----------------|------------------|----------------|-----------------|--------|
| 1   | 0.6740          | 23.02             | 16.13              | 9.71                   | 32.73            | 25.84             | 56.00           | 46.00            | -23.27         | -20.16          | Pass   |
| 2   | 0.6940          | 21.96             | 13.79              | 9.71                   | 31.67            | 23.50             | 56.00           | 46.00            | -24.33         | -22.50          | Pass   |
| 3   | 0.7220          | 22.07             | 13.57              | 9.70                   | 31.77            | 23.27             | 56.00           | 46.00            | -24.23         | -22.73          | Pass   |
| 4   | 0.7860          | 24.73             | 18.41              | 9.71                   | 34.44            | 28.12             | 56.00           | 46.00            | -21.56         | -17.88          | Pass   |
| 5   | 0.8140          | 24.20             | 18.40              | 9.71                   | 33.91            | 28.11             | 56.00           | 46.00            | -22.09         | -17.89          | Pass   |
| 6   | 0.8420          | 24.34             | 20.18              | 9.71                   | 34.05            | 29.89             | 56.00           | 46.00            | -21.95         | -16.11          | Pass   |

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



|              |                    |        |               |
|--------------|--------------------|--------|---------------|
| Standard:    | FCC Part 15.247    | Line:  | N             |
| Test item:   | Conducted Emission | Power: | AC 24 V/60 Hz |
| Mode:        | Mode 1             |        |               |
| Description: |                    |        |               |

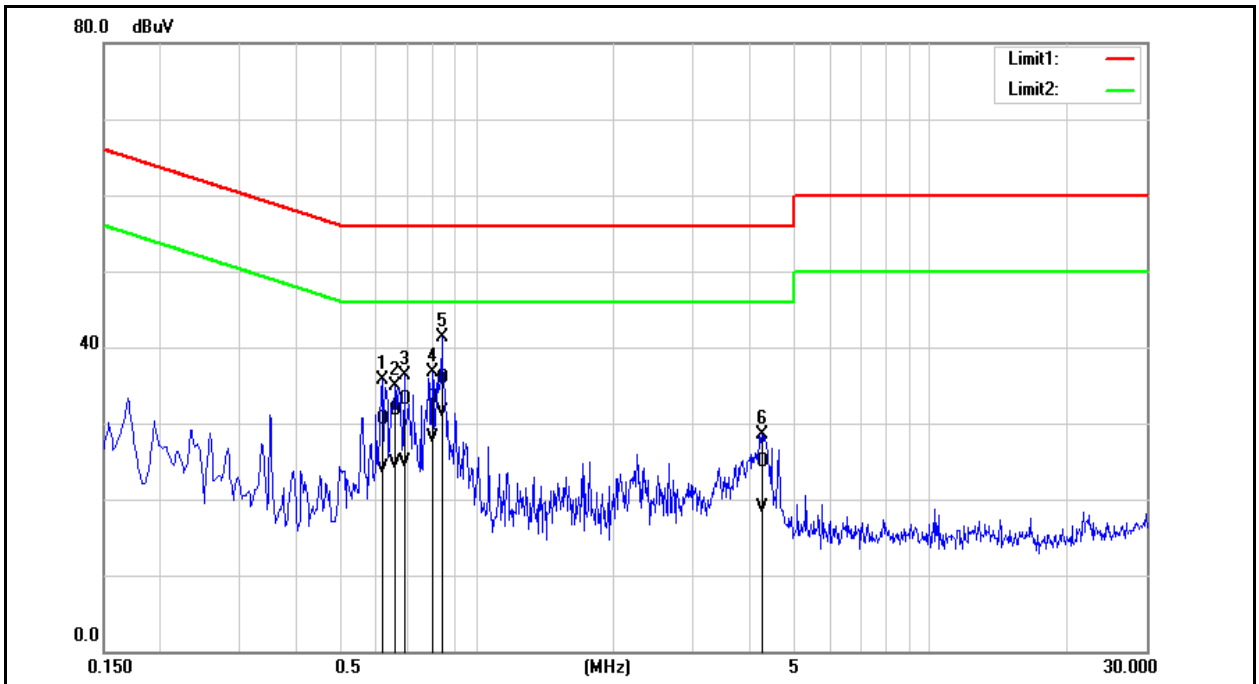


| No. | Frequency (MHz) | QP reading (dBuV) | AVG reading (dBuV) | Correction factor (dB) | QP result (dBuV) | AVG result (dBuV) | QP limit (dBuV) | AVG limit (dBuV) | QP margin (dB) | AVG margin (dB) | Remark |
|-----|-----------------|-------------------|--------------------|------------------------|------------------|-------------------|-----------------|------------------|----------------|-----------------|--------|
| 1   | 0.6180          | 20.77             | 14.48              | 9.70                   | 30.47            | 24.18             | 56.00           | 46.00            | -25.53         | -21.82          | Pass   |
| 2   | 0.6580          | 21.91             | 14.95              | 9.70                   | 31.61            | 24.65             | 56.00           | 46.00            | -24.39         | -21.35          | Pass   |
| 3   | 0.6900          | 23.44             | 15.17              | 9.70                   | 33.14            | 24.87             | 56.00           | 46.00            | -22.86         | -21.13          | Pass   |
| 4   | 0.7980          | 23.52             | 18.42              | 9.70                   | 33.22            | 28.12             | 56.00           | 46.00            | -22.78         | -17.88          | Pass   |
| 5   | 0.8380          | 26.22             | 21.81              | 9.70                   | 35.92            | 31.51             | 56.00           | 46.00            | -20.08         | -14.49          | Pass   |
| 6   | 4.2500          | 15.11             | 9.06               | 9.80                   | 24.91            | 18.86             | 56.00           | 46.00            | -31.09         | -27.14          | Pass   |

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).  
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Model Name : 5AT3S9


|              |                    |        |               |
|--------------|--------------------|--------|---------------|
| Standard:    | FCC Part 15.247    | Line:  | L1            |
| Test item:   | Conducted Emission | Power: | AC 24 V/60 Hz |
| Mode:        | Mode 1             |        |               |
| Description: |                    |        |               |

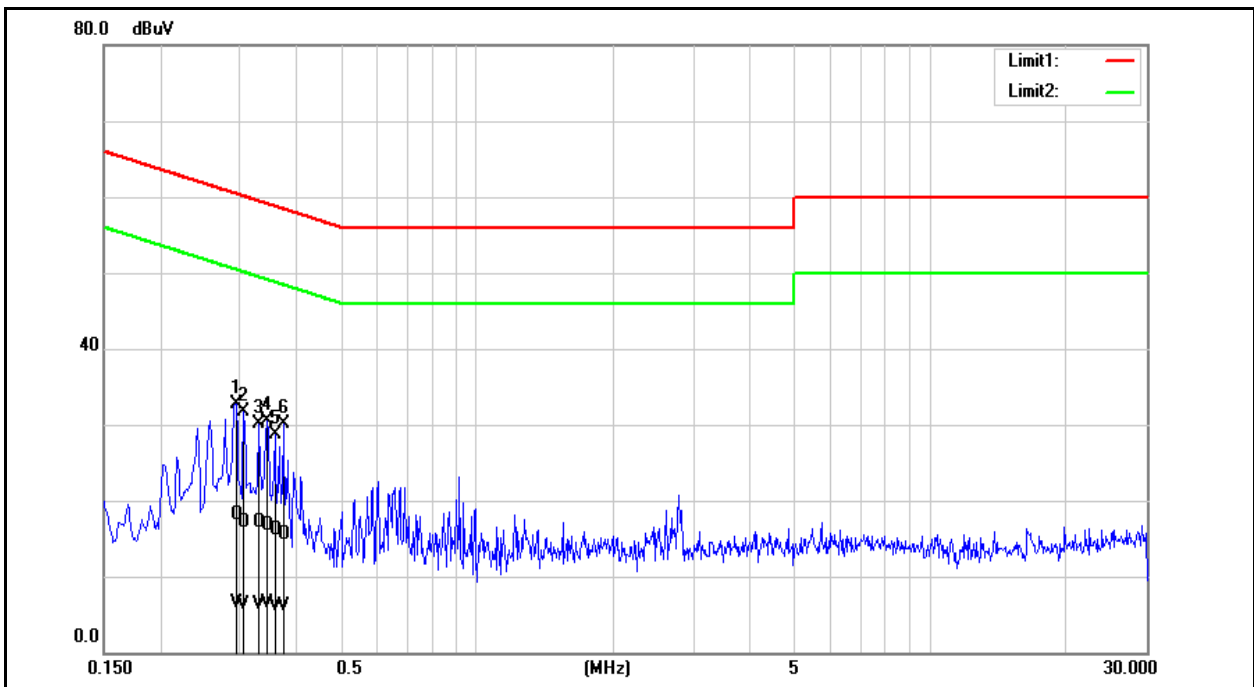

| No. | Frequency (MHz) | QP reading (dBuV) | AVG reading (dBuV) | Correction factor (dB) | QP result (dBuV) | AVG result (dBuV) | QP limit (dBuV) | AVG limit (dBuV) | QP margin (dB) | AVG margin (dB) | Remark |
|-----|-----------------|-------------------|--------------------|------------------------|------------------|-------------------|-----------------|------------------|----------------|-----------------|--------|
| 1   | 0.2940          | 8.42              | -3.23              | 9.71                   | 18.13            | 6.48              | 60.41           | 50.41            | -42.28         | -43.93          | Pass   |
| 2   | 0.3060          | 7.37              | -3.35              | 9.70                   | 17.07            | 6.35              | 60.08           | 50.08            | -43.01         | -43.73          | Pass   |
| 3   | 0.3300          | 7.37              | -3.39              | 9.70                   | 17.07            | 6.31              | 59.45           | 49.45            | -42.38         | -43.14          | Pass   |
| 4   | 0.3460          | 7.05              | -3.20              | 9.70                   | 16.75            | 6.50              | 59.06           | 49.06            | -42.31         | -42.56          | Pass   |
| 5   | 0.3580          | 6.47              | -3.50              | 9.70                   | 16.17            | 6.20              | 58.77           | 48.77            | -42.60         | -42.57          | Pass   |
| 6   | 0.3740          | 5.74              | -3.59              | 9.70                   | 15.44            | 6.11              | 58.41           | 48.41            | -42.97         | -42.30          | Pass   |

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).  
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

|              |                    |        |               |
|--------------|--------------------|--------|---------------|
| Standard:    | FCC Part 15.247    | Line:  | N             |
| Test item:   | Conducted Emission | Power: | AC 24 V/60 Hz |
| Mode:        | Mode 1             |        |               |
| Description: |                    |        |               |

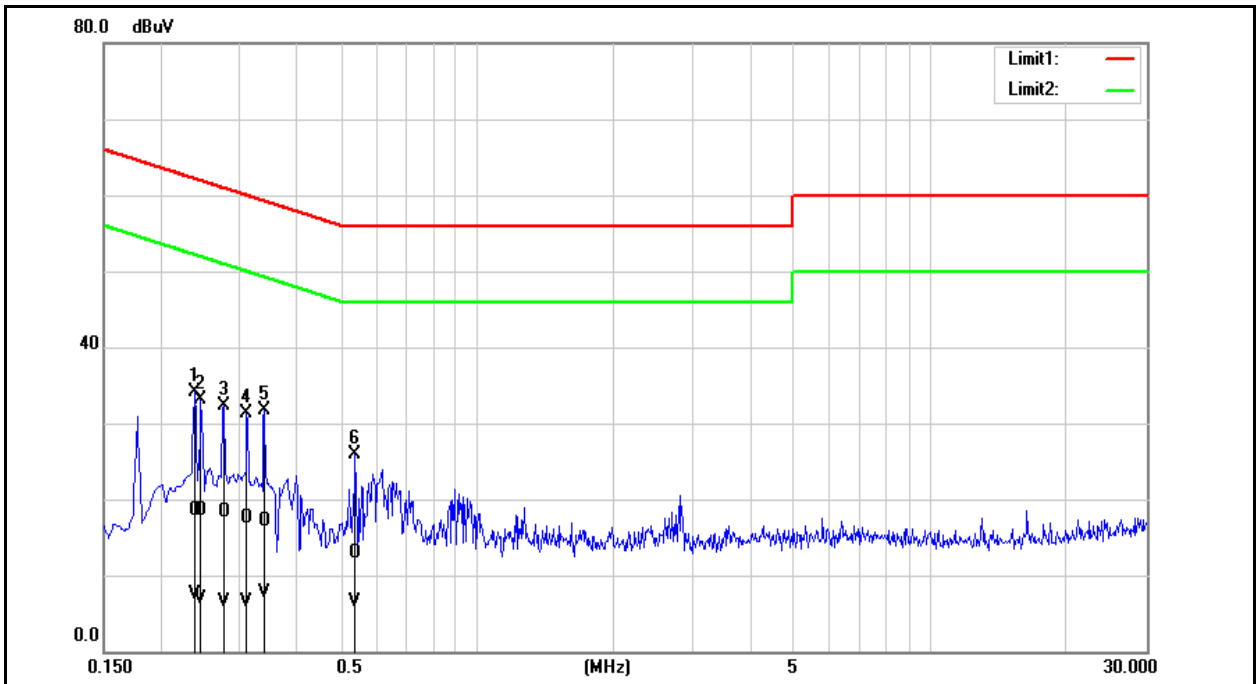

| No. | Frequency (MHz) | QP reading (dBuV) | AVG reading (dBuV) | Correction factor (dB) | QP result (dBuV) | AVG result (dBuV) | QP limit (dBuV) | AVG limit (dBuV) | QP margin (dB) | AVG margin (dB) | Remark |
|-----|-----------------|-------------------|--------------------|------------------------|------------------|-------------------|-----------------|------------------|----------------|-----------------|--------|
| 1   | 0.2380          | 8.81              | -2.14              | 9.69                   | 18.50            | 7.55              | 62.17           | 52.17            | -43.67         | -44.62          | Pass   |
| 2   | 0.2460          | 8.76              | -2.85              | 9.69                   | 18.45            | 6.84              | 61.89           | 51.89            | -43.44         | -45.05          | Pass   |
| 3   | 0.2758          | 8.70              | -3.19              | 9.70                   | 18.40            | 6.51              | 60.94           | 50.94            | -42.54         | -44.43          | Pass   |
| 4   | 0.3100          | 7.83              | -3.28              | 9.69                   | 17.52            | 6.41              | 59.97           | 49.97            | -42.45         | -43.56          | Pass   |
| 5   | 0.3392          | 7.33              | -2.00              | 9.69                   | 17.02            | 7.69              | 59.22           | 49.22            | -42.20         | -41.53          | Pass   |
| 6   | 0.5380          | 3.25              | -3.29              | 9.70                   | 12.95            | 6.41              | 56.00           | 46.00            | -43.05         | -39.59          | Pass   |

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).  
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).




## Annex B. Radiated Emission Measurement

Below 1 GHz

Model Name : 5UM6E5

|              |                 |                |     |
|--------------|-----------------|----------------|-----|
| Standard:    | FCC Part 15.247 | Test Distance: | 3 m |
| Test item:   | Harmonic        |                |     |
| Mode:        | Mode 1          |                |     |
| Ant.Polar.:  | Horizontal      |                |     |
| Description: | LE              |                |     |

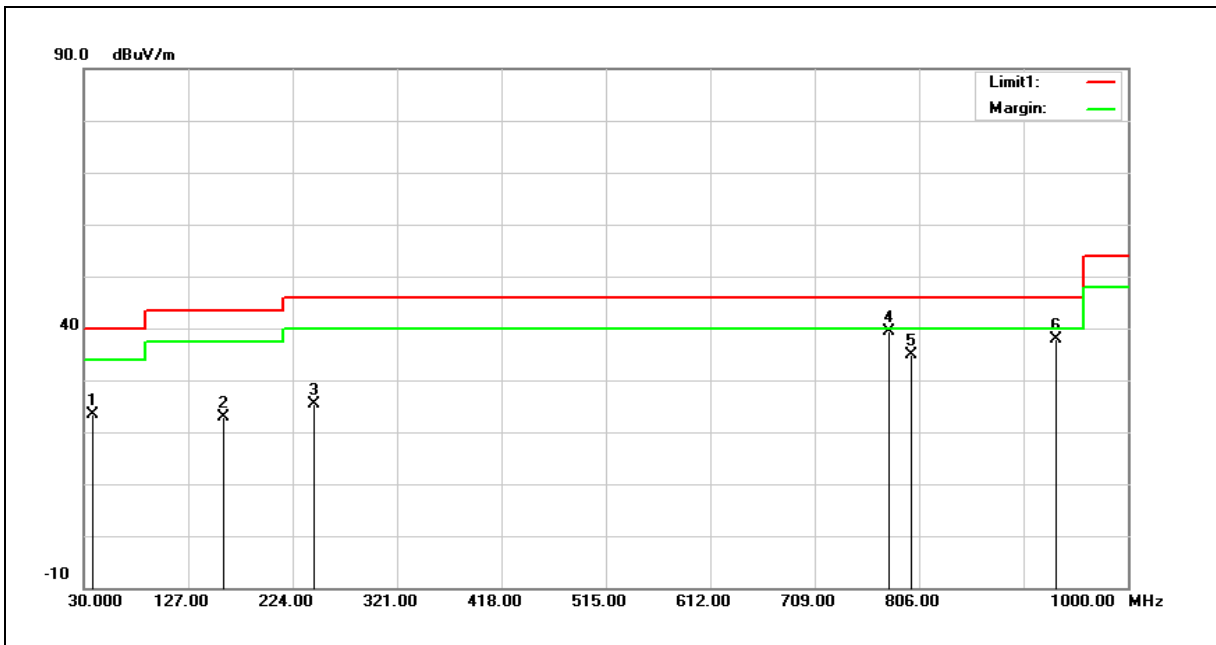

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 38.7300         | 30.39          | -7.07                 | 23.32           | 40.00          | -16.68      | QP     |
| 2   | 159.9800        | 28.31          | -5.41                 | 22.90           | 43.50          | -20.60      | QP     |
| 3   | 243.4000        | 31.47          | -6.11                 | 25.36           | 46.00          | -20.64      | QP     |
| 4   | 777.8700        | 33.89          | 5.55                  | 39.44           | 46.00          | -6.56       | QP     |
| 5   | 799.2100        | 29.10          | 5.81                  | 34.91           | 46.00          | -11.09      | QP     |
| 6   | 933.0700        | 29.38          | 8.56                  | 37.94           | 46.00          | -8.06       | QP     |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


Example:  $23.32 = -7.07 + 30.39$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

4.All amplitude of spurious emissions that are attenuated by more than 20 dB on below 30 MHz.

|              |                 |                |     |
|--------------|-----------------|----------------|-----|
| Standard:    | FCC Part 15.247 | Test Distance: | 3 m |
| Test item:   | Harmonic        |                |     |
| Mode:        | Mode 1          |                |     |
| Ant.Polar.:  | Vertical        |                |     |
| Description: | LE              |                |     |

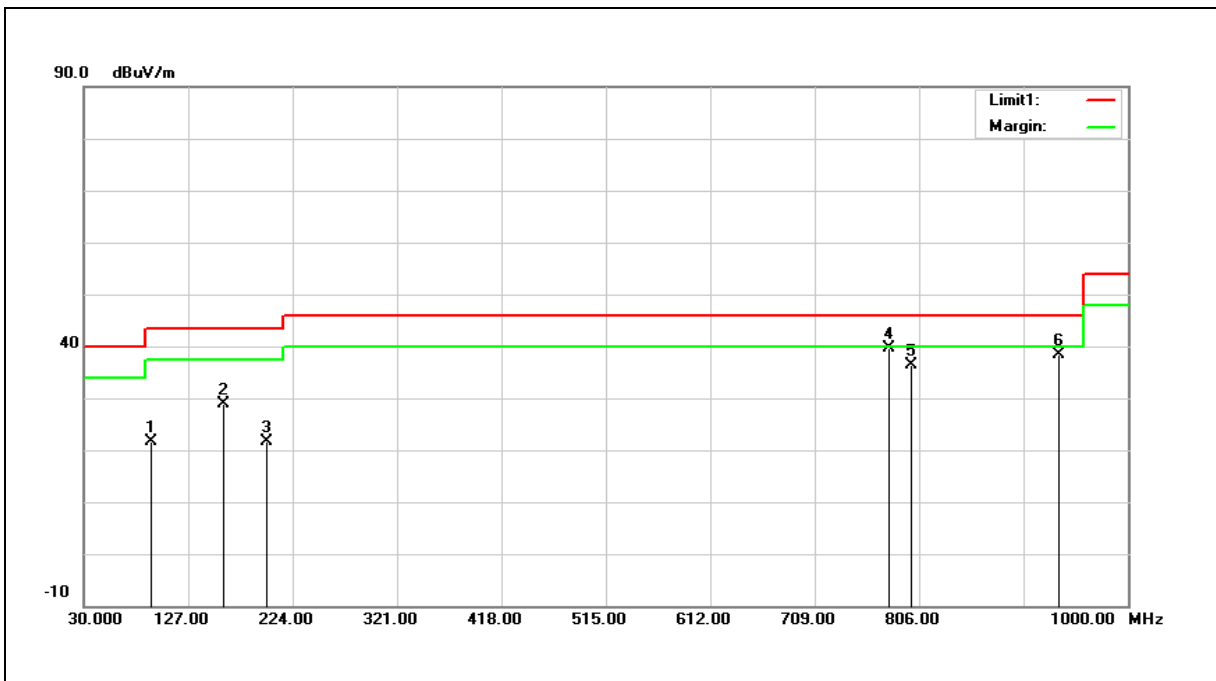

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 92.0800         | 33.45          | -11.78                | 21.67           | 43.50          | -21.83      | QP     |
| 2   | 159.9800        | 34.23          | -5.41                 | 28.82           | 43.50          | -14.68      | QP     |
| 3   | 199.7500        | 29.32          | -7.79                 | 21.53           | 43.50          | -21.97      | QP     |
| 4   | 777.8700        | 34.20          | 5.55                  | 39.75           | 46.00          | -6.25       | QP     |
| 5   | 799.2100        | 30.65          | 5.81                  | 36.46           | 46.00          | -9.54       | QP     |
| 6   | 935.9800        | 29.63          | 8.64                  | 38.27           | 46.00          | -7.73       | QP     |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


Example:  $21.67 = -11.78 + 33.45$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

4.All amplitude of spurious emissions that are attenuated by more than 20 dB on below 30 MHz.

|              |                 |                |     |
|--------------|-----------------|----------------|-----|
| Standard:    | FCC Part 15.247 | Test Distance: | 3 m |
| Test item:   | Harmonic        |                |     |
| Mode:        | Mode 1          |                |     |
| Ant.Polar.:  | Horizontal      |                |     |
| Description: | 2LE             |                |     |

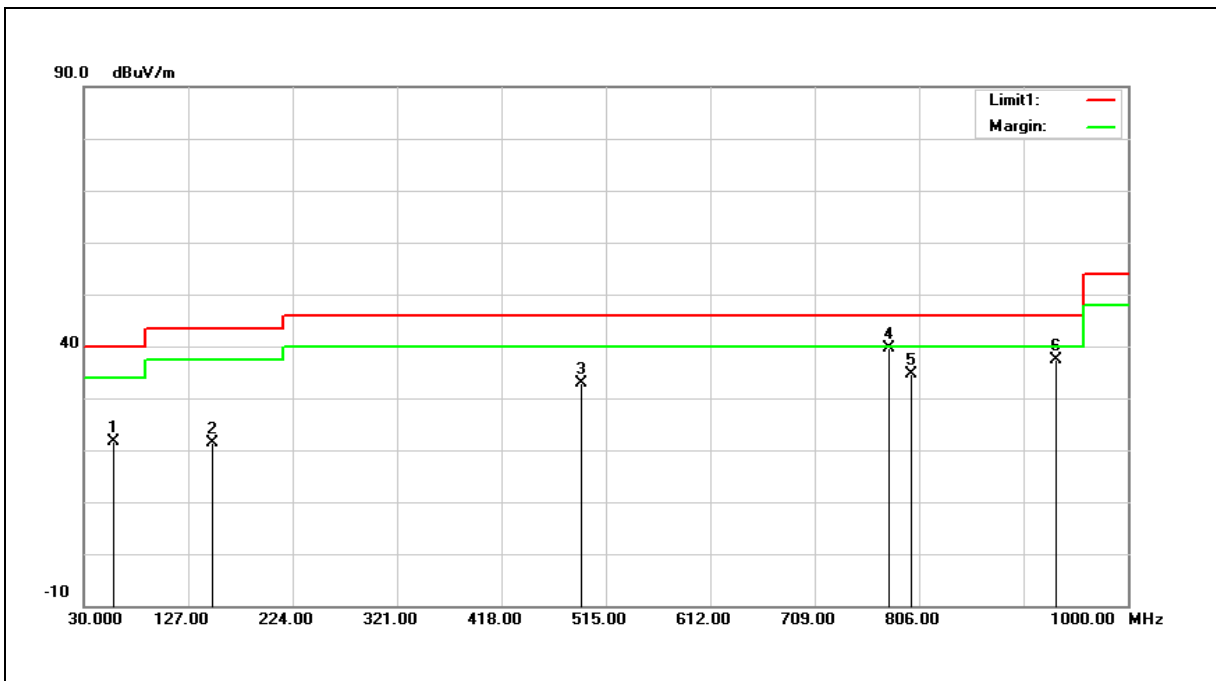

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 58.1300         | 28.04          | -6.35                 | 21.69           | 40.00          | -18.31      | QP     |
| 2   | 149.3100        | 27.09          | -5.79                 | 21.30           | 43.50          | -22.20      | QP     |
| 3   | 492.6900        | 32.99          | -0.22                 | 32.77           | 46.00          | -13.23      | QP     |
| 4   | 777.8000        | 34.14          | 5.55                  | 39.69           | 46.00          | -6.31       | QP     |
| 5   | 799.2300        | 28.72          | 5.81                  | 34.53           | 46.00          | -11.47      | QP     |
| 6   | 933.0000        | 28.78          | 8.56                  | 37.34           | 46.00          | -8.66       | QP     |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.All amplitude of spurious emissions that are attenuated by more than 20 dB on below 30 MHz.





|              |                 |                |     |
|--------------|-----------------|----------------|-----|
| Standard:    | FCC Part 15.247 | Test Distance: | 3 m |
| Test item:   | Harmonic        |                |     |
| Mode:        | Mode 1          |                |     |
| Ant.Polar.:  | Vertical        |                |     |
| Description: | 2LE             |                |     |

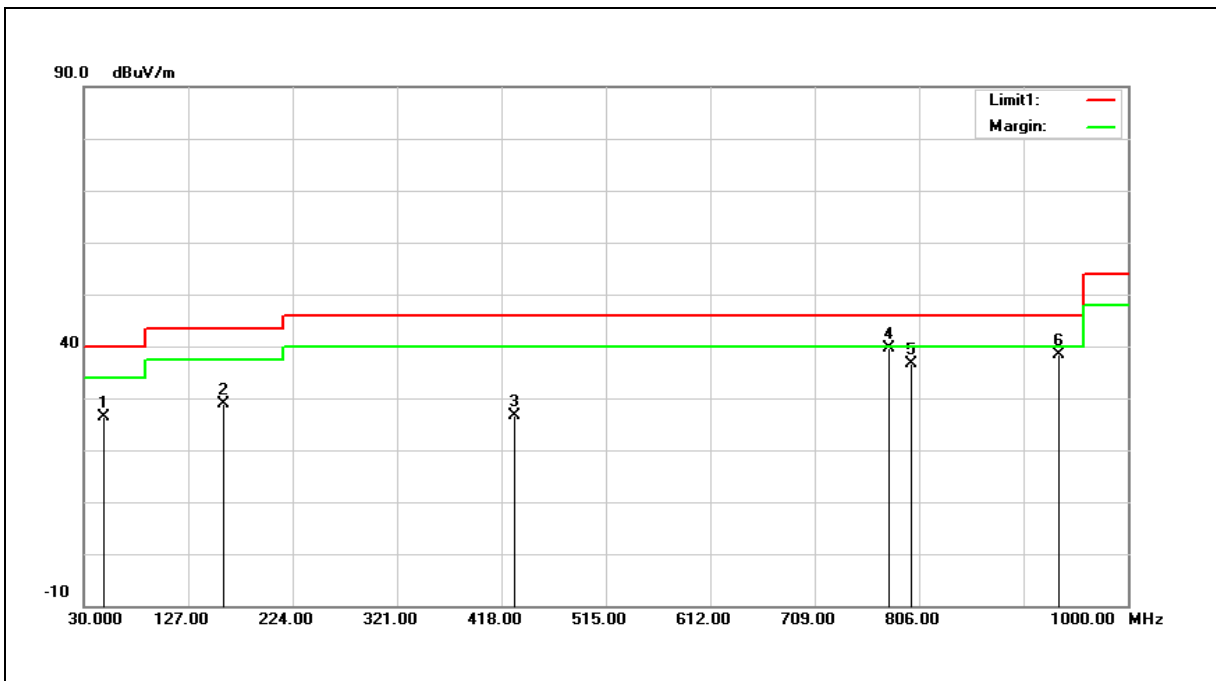

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 48.4300         | 32.62          | -6.18                 | 26.44           | 40.00          | -13.56      | QP     |
| 2   | 159.9000        | 34.17          | -5.41                 | 28.76           | 43.50          | -14.74      | QP     |
| 3   | 430.6100        | 27.81          | -1.25                 | 26.56           | 46.00          | -19.44      | QP     |
| 4   | 777.8300        | 34.10          | 5.55                  | 39.65           | 46.00          | -6.35       | QP     |
| 5   | 799.2600        | 30.92          | 5.81                  | 36.73           | 46.00          | -9.27       | QP     |
| 6   | 936.0000        | 29.72          | 8.64                  | 38.36           | 46.00          | -7.64       | QP     |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.All amplitude of spurious emissions that are attenuated by more than 20 dB on below 30 MHz.



Model Name : 5AT3S9

|              |                 |                |     |
|--------------|-----------------|----------------|-----|
| Standard:    | FCC Part 15.247 | Test Distance: | 3 m |
| Test item:   | Harmonic        |                |     |
| Mode:        | Mode 1          |                |     |
| Ant.Polar.:  | Horizontal      |                |     |
| Description: | LE              |                |     |

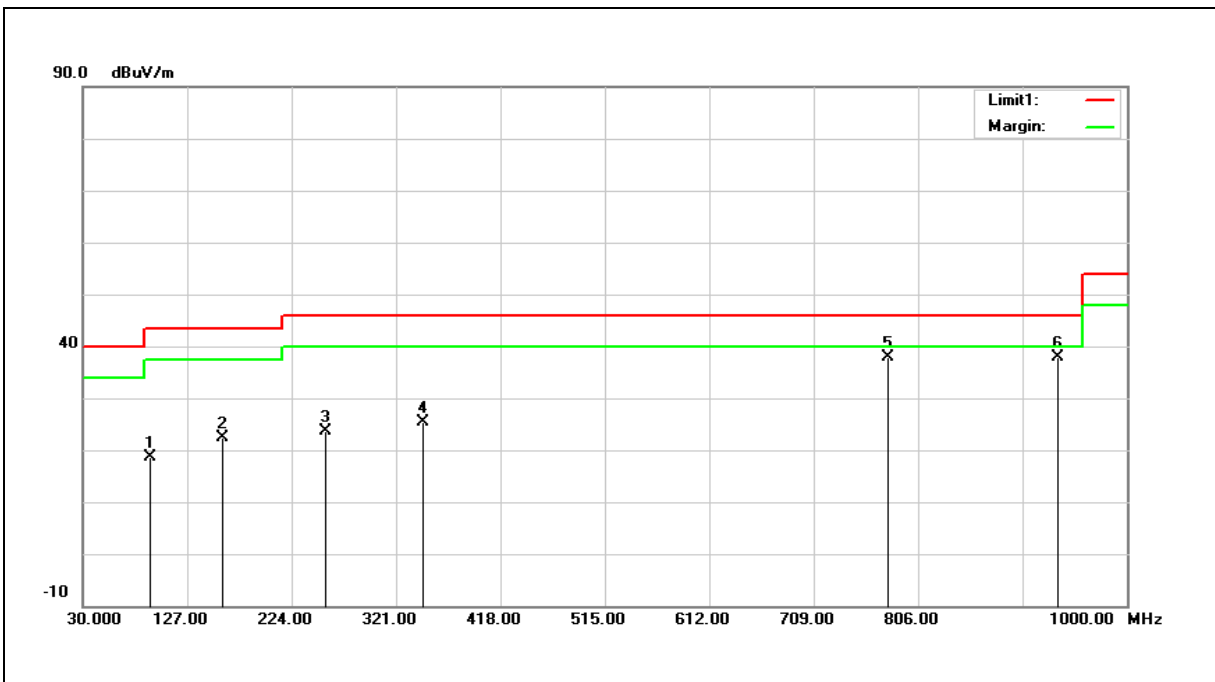

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 93.0500         | 30.20          | -11.67                | 18.53           | 43.50          | -24.97      | QP     |
| 2   | 159.9800        | 27.75          | -5.41                 | 22.34           | 43.50          | -21.16      | QP     |
| 3   | 255.0400        | 29.38          | -5.79                 | 23.59           | 46.00          | -22.41      | QP     |
| 4   | 346.2200        | 28.85          | -3.45                 | 25.40           | 46.00          | -20.60      | QP     |
| 5   | 777.8700        | 32.40          | 5.55                  | 37.95           | 46.00          | -8.05       | QP     |
| 6   | 935.9800        | 29.23          | 8.64                  | 37.87           | 46.00          | -8.13       | QP     |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: 18.53 = -11.67 + 30.20


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

4.All amplitude of spurious emissions that are attenuated by more than 20 dB on below 30 MHz.



|              |                 |                |     |
|--------------|-----------------|----------------|-----|
| Standard:    | FCC Part 15.247 | Test Distance: | 3 m |
| Test item:   | Harmonic        |                |     |
| Mode:        | Mode 1          |                |     |
| Ant.Polar.:  | Vertical        |                |     |
| Description: | LE              |                |     |

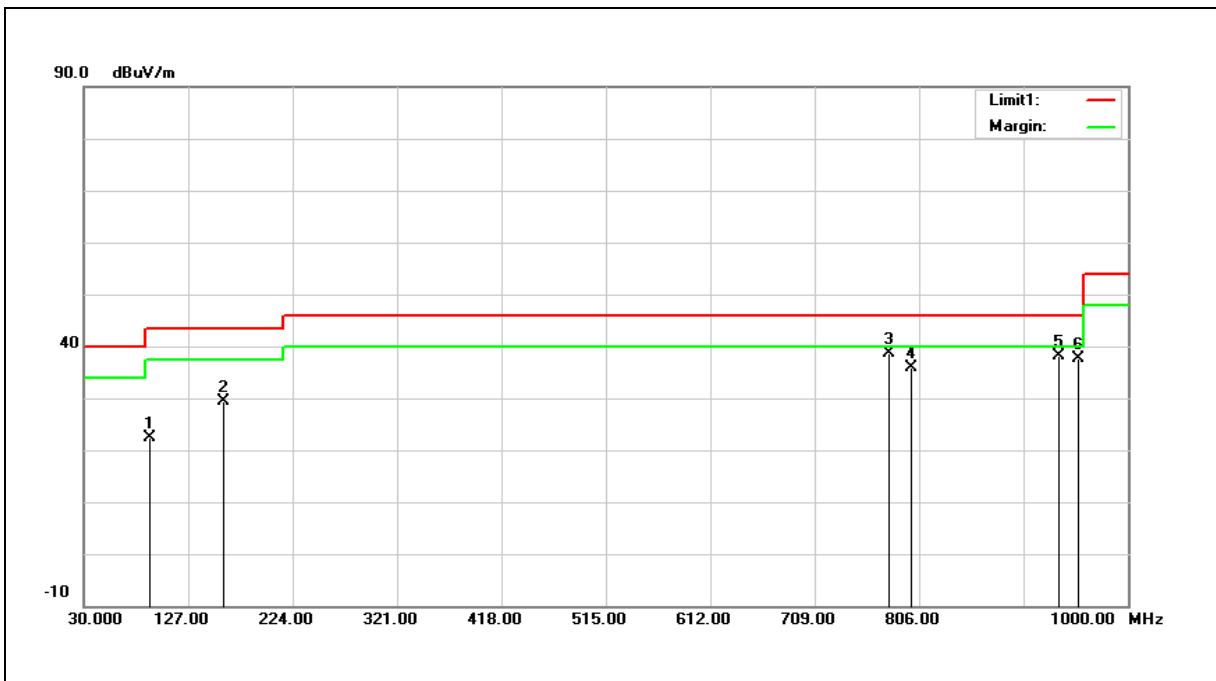

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 91.1100         | 34.18          | -11.90                | 22.28           | 43.50          | -21.22      | QP     |
| 2   | 159.9800        | 34.82          | -5.41                 | 29.41           | 43.50          | -14.09      | QP     |
| 3   | 777.8700        | 33.04          | 5.55                  | 38.59           | 46.00          | -7.41       | QP     |
| 4   | 799.2100        | 30.04          | 5.81                  | 35.85           | 46.00          | -10.15      | QP     |
| 5   | 935.9800        | 29.48          | 8.64                  | 38.12           | 46.00          | -7.88       | QP     |
| 6   | 954.4100        | 28.61          | 9.07                  | 37.68           | 46.00          | -8.32       | QP     |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: 22.28 = -11.90 + 34.18


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

4.All amplitude of spurious emissions that are attenuated by more than 20 dB on below 30 MHz.



|              |                 |                |     |
|--------------|-----------------|----------------|-----|
| Standard:    | FCC Part 15.247 | Test Distance: | 3 m |
| Test item:   | Harmonic        |                |     |
| Mode:        | Mode 1          |                |     |
| Ant.Polar.:  | Horizontal      |                |     |
| Description: | 2LE             |                |     |

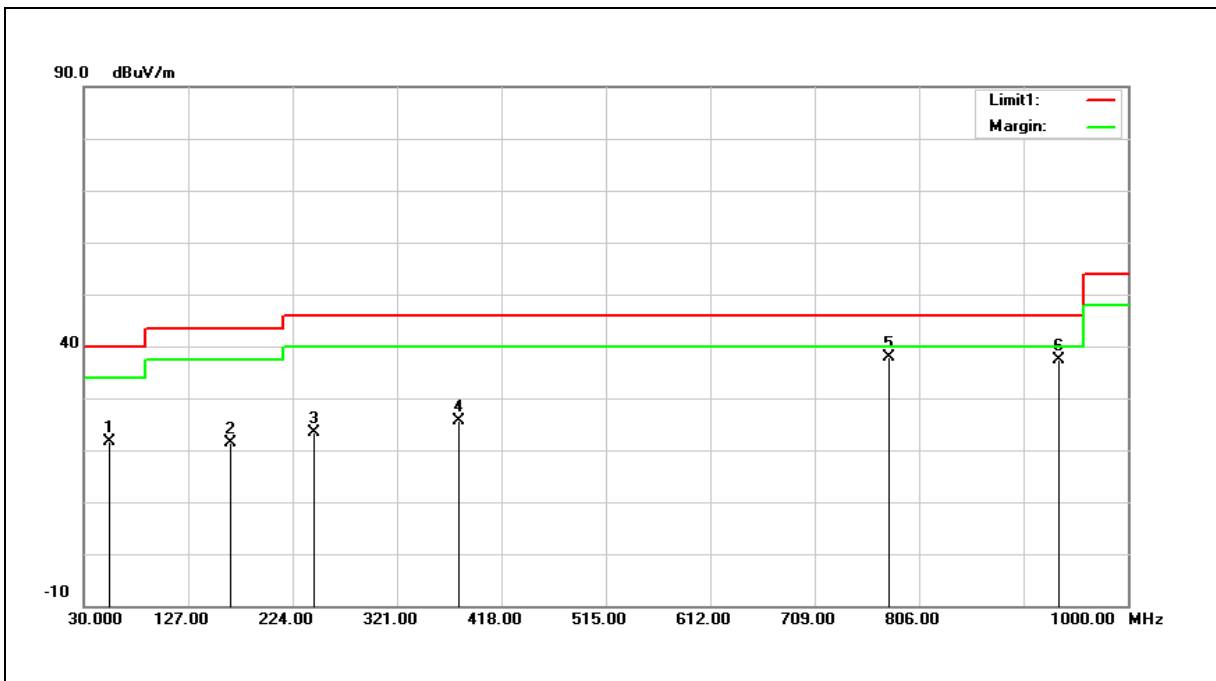

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 54.2500         | 27.92          | -6.18                 | 21.74           | 40.00          | -18.26      | QP     |
| 2   | 165.8000        | 26.98          | -5.65                 | 21.33           | 43.50          | -22.17      | QP     |
| 3   | 244.3700        | 29.52          | -6.10                 | 23.42           | 46.00          | -22.58      | QP     |
| 4   | 378.2300        | 28.27          | -2.66                 | 25.61           | 46.00          | -20.39      | QP     |
| 5   | 777.8200        | 32.22          | 5.55                  | 37.77           | 46.00          | -8.23       | QP     |
| 6   | 935.9100        | 28.85          | 8.64                  | 37.49           | 46.00          | -8.51       | QP     |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

4.All amplitude of spurious emissions that are attenuated by more than 20 dB on below 30 MHz.



|              |                 |                |     |
|--------------|-----------------|----------------|-----|
| Standard:    | FCC Part 15.247 | Test Distance: | 3 m |
| Test item:   | Harmonic        |                |     |
| Mode:        | Mode 1          |                |     |
| Ant.Polar.:  | Vertical        |                |     |
| Description: | 2LE             |                |     |

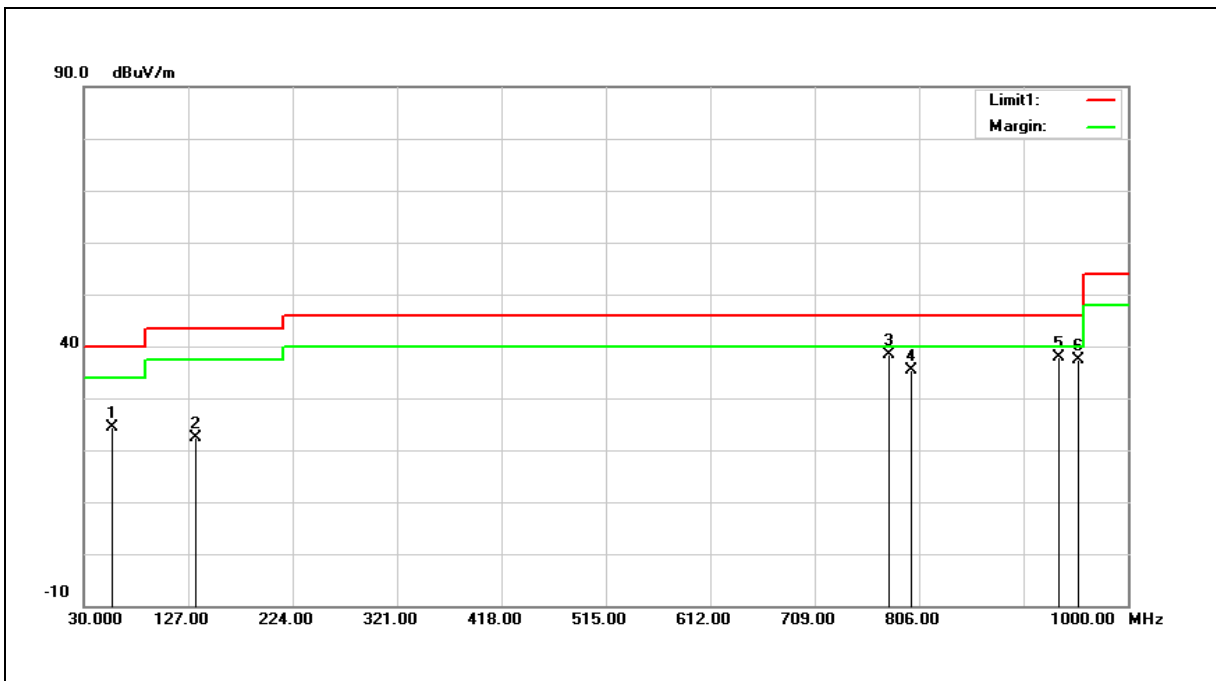

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 56.1900         | 30.76          | -6.26                 | 24.50           | 40.00          | -15.50      | QP     |
| 2   | 133.7900        | 29.27          | -6.94                 | 22.33           | 43.50          | -21.17      | QP     |
| 3   | 777.8500        | 32.76          | 5.55                  | 38.31           | 46.00          | -7.69       | QP     |
| 4   | 799.2300        | 29.69          | 5.81                  | 35.50           | 46.00          | -10.50      | QP     |
| 5   | 935.9500        | 29.29          | 8.64                  | 37.93           | 46.00          | -8.07       | QP     |
| 6   | 954.4500        | 28.26          | 9.07                  | 37.33           | 46.00          | -8.67       | QP     |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

4.All amplitude of spurious emissions that are attenuated by more than 20 dB on below 30 MHz.

---END---