

FCC Test Report

Report No.: RFACXM-WTW-P21060766A-5

FCC ID: 2AEUPBHASG001

Test Model: 5F48E9

Received Date: 2021/7/14

Test Date: 2021/7/16 ~ 2021/9/4

Issued Date: 2021/11/30

Applicant: Ring LLC

Address: 1523 26th Street, Santa Monica CA 90404 USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

FCC Registration / 723255 / TW2022

Designation Number:



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	11
3.4 Description of Support Units	12
3.4.1 Configuration of System under Test	13
3.5 General Description of Applied Standards and References	15
4 Test Types and Results	16
4.1 Radiated Emission and Bandedge Measurement	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement	16
4.1.2 Test Instruments	17
4.1.3 Test Procedures	19
4.1.4 Deviation from Test Standard	20
4.1.5 Test Setup	20
4.1.6 EUT Operating Conditions	21
4.1.7 Test Results	22
4.2 Conducted Emission Measurement	33
4.2.1 Limits of Conducted Emission Measurement	33
4.2.2 Test Instruments	33
4.2.3 Test Procedures	34
4.2.4 Deviation from Test Standard	34
4.2.5 Test Setup	34
4.2.6 EUT Operating Conditions	34
4.2.7 Test Results	35
4.3 6dB Bandwidth Measurement	37
4.3.1 Limits of 6dB Bandwidth Measurement	37
4.3.2 Test Setup	37
4.3.3 Test Instruments	37
4.3.4 Test Procedure	37
4.3.5 Deviation from Test Standard	37
4.3.6 EUT Operating Conditions	37
4.3.7 Test Results	38
4.4 Conducted Output Power Measurement	39
4.4.1 Limits of Conducted Output Power Measurement	39
4.4.2 Test Setup	39
4.4.3 Test Instruments	39
4.4.4 Test Procedures	39
4.4.5 Deviation from Test Standard	39
4.4.6 EUT Operating Conditions	39
4.4.7 Test Results	40
4.5 Power Spectral Density Measurement	41
4.5.1 Limits of Power Spectral Density Measurement	41
4.5.2 Test Setup	41
4.5.3 Test Instruments	41
4.5.4 Test Procedure	41
4.5.5 Deviation from Test Standard	41
4.5.6 EUT Operating Condition	41

4.5.7 Test Results	42
4.6 Conducted Out of Band Emission Measurement.....	43
4.6.1 Limits of Conducted Out of Band Emission Measurement	43
4.6.2 Test Setup.....	43
4.6.3 Test Instruments	43
4.6.4 Test Procedure	43
4.6.5 Deviation from Test Standard	43
4.6.6 EUT Operating Condition	43
4.6.7 Test Results	43
5 Pictures of Test Arrangements.....	45
Appendix – Information of the Testing Laboratories	46

Release Control Record

Issue No.	Description	Date Issued
RFACXM-WTW-P21060766A-5	Original release.	2021/11/30

1 Certificate of Conformity

Product: Amazon Sidewalk Bridge Pro by Ring

Brand: Ring LLC

Test Model: 5F48E9

Sample Status: Engineering sample


Applicant: Ring LLC

Test Date: 2021/7/16 ~ 2021/9/4

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :


Phoenix Huang / Specialist

Date:

2021/11/30

Approved by :



Clark Lin / Technical Manager

Date:

2021/11/30

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -4.91 dB at 0.41563 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -4.6 dB at 59.99 MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is R-N type(F) and R-N type(M) not a standard connector.

Note:

- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Conducted emissions	-	2.5 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.5 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.1 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Amazon Sidewalk Bridge Pro by Ring
Brand	Ring LLC
Test Model	5F48E9
Status of EUT	Engineering sample
Power Supply Rating	DC 6V from battery or DC 53V from POE
Modulation Type	FSK
Modulation Technology	DTS
Transfer Rate	Refer to Note
Operating Frequency	902.5 ~ 926.5 MHz
Number of Channel	31
Output Power	564.937 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. This report is prepared for FCC class II permissive change. The difference compared with the Report No.: RFACXM-WTW-P21060766-5 as the following:

- ◆ Update software of LoRa technology and remove DTS channel spacing 600 kHz mode and Hybrid mode.
- ◆ Change simultaneously transmission condition. (Refer to Note 6).

2. According to above conditions, for LoRa technology all of test items need to be performed and all data was verified to meet the requirements.

3. The LoRa technology information as below table.

Mode	Channel Spacing	Data Rate	Number of Channel	Spec.
DTS	800 kHz	DR13 (SF7): 21.9 kbps DR9 (SF11): 76 kbps	31	DR13 (SF7), DR9 (SF11) / BW: 500kHz

4. The EUT contains certified WWAN (LTE) modular which FCC ID: ZMONL668AM00.

5. The EUT has below radios as following table:

Radio 1	Radio 2	Radio 3	Radio 4
WLAN 2.4GHz+ WLAN 5GHz+ Bluetooth	WWAN (LTE)	GPS	LoRa + FSK

6. Simultaneously transmission condition.

Condition	Technology		
1	WLAN (2.4GHz)	LoRa	Bluetooth
2	WLAN (5GHz)	LoRa	Bluetooth
3	WLAN (2.4GHz)	FSK	Bluetooth
4	WLAN (5GHz)	FSK	Bluetooth
5	LTE	LoRa	Bluetooth
6	LTE	FSK	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

7. The EUT must be supplied with a battery and following below table:

Brand	Model No.	Spec.
WELLTECH ENERGY INC.	5F48E9	6 Vdc, 3100 mAh

8. The antennas provided to the EUT, please refer to the following table:

RF Chain No	Brand	Model	Antenna Net Gain (dBi)	Frequency Range	Antenna Type	Connector Type	Cable Length (mm)
WiFi 0	Inpaq	RFPCA520814IM LB301	8.04	2.4~2.4835 GHz	PIFA	i-pex(MHF)	149
			8.81	5.15~5.85 GHz			
WiFi 1	Inpaq	RFPCA501016IM LB301	8.26	2.4~2.4835 GHz	PIFA	i-pex(MHF)	165
			8.64	5.15~5.85 GHz			
BT	Inpaq	RFPCA520815IM AB301	6.88	2.4~2.4835 GHz	PIFA	i-pex(MHF)	210
LoRa/FSK (Outdoor)	Inpaq	RFDPA563600AF RBX01	5.5	902~928 MHz	Dipole	R-N type(F)	1000
LoRa/FSK (Indoor)	Inpaq	FDPA161500AMU B801	2.8	902~928 MHz	Dipole	R-N type(M)	NA
GPS(L1)	Inpaq	RFPCA621512IM TB301	7.26	1575 MHz	PIFA	i-pex(MHF)	NA
GPS(L5)	Inpaq	RFPCA711620IM TB301	6.06	1176 MHz	PIFA	i-pex(MHF)	NA

Note: For LoRa/FSK Radiated Emission test item the max. gain was selected for the final test .

9. For Radiated Emission test, the EUT was pre-tested under the following modes:

Pre-test Mode	Description
Mode A	Power from POE
Mode B	Power from Battery

In original report, from the above modes, the worst case was found in **Mode A**. Therefore only the test data of the mode was recorded in this report.

10. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

11. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

31 channels are provided for DTS mode:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	902.5	13	912.9	26	923.3
1	903.3	14	913.7	27	924.1
2	904.1	15	914.5	28	924.9
3	904.9	16	915.3	29	925.7
4	905.7	17	916.1	30	926.5
5	906.5	18	916.9		
6	907.3	19	917.7		
7	908.1	20	918.5		
8	908.9	21	919.3		
9	909.7	22	920.1		
10	910.5	23	920.9		
11	911.3	24	921.7		
12	912.1	25	922.5		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission
RE<1G: Radiated Emission below 1GHz
APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Data Rate (kbps)
0 to 30	0, 15, 30	FSK	21.9

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Data Rate (kbps)
0 to 30	30	FSK	21.9

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Data Rate (kbps)
0 to 30	30	FSK	21.9

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Data Rate (kbps)
0 to 30	0, 15, 30	FSK	21.9


Test Condition:

Applicable to	Environmental Conditions	Input Power (System)	Tested by
RE $\geq$ 1G	25deg. C, 75%RH	120Vac, 60Hz	Tom Yang
RE<1G	23~25deg. C, 67~71%RH	120Vac, 60Hz	Sampson Chen, Andy Ho
PLC	26deg. C, 61%RH	120Vac, 60Hz	Sampson Chen
APCM	25deg. C, 60%RH	120Vac, 60Hz	Kevin Ko

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is $\geq 98\%$, duty factor is not required.

Duty cycle = $71.75 \text{ ms} / 72.325 \text{ ms} = 0.992$

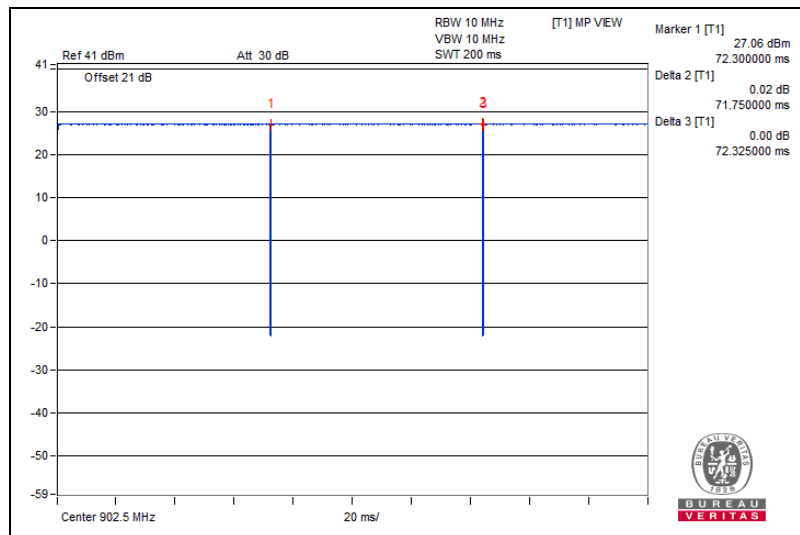

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	Lenovo	20U5S01X00 L14	PF-1ANPYA	NA	Provided by Lab
B.	PoE Adapter	Gospower	G0545-530-060-P SE1000	NA	NA	Supplied by client

Note: 1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	GND Cable	1	2	Yes	0	Provided by Lab
2.	GND Cable	1	2	Yes	0	Provided by Lab
3.	RJ-45 Cable	1	1	No	0	Supplied by client
4.	RJ-45 Cable	1	10	No	0	Provided by Lab
5.	RJ-45 Cable	1	1.5	No	0	Provided by Lab
6.	AC Cable	1	1	No	0	Supplied by client

3.4.1 Configuration of System under Test

For AC Power Conducted Emission test:

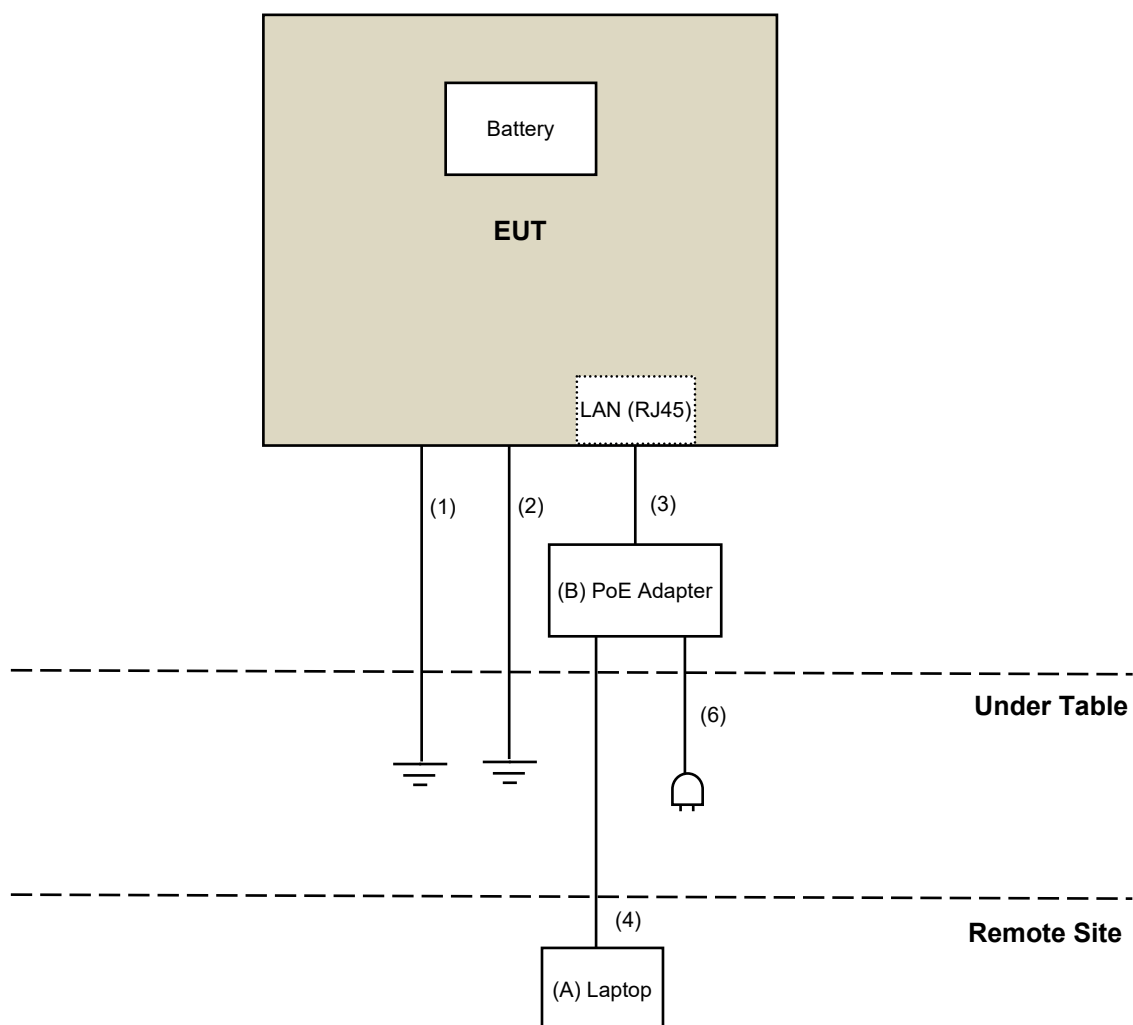

For Radiated Emission test:

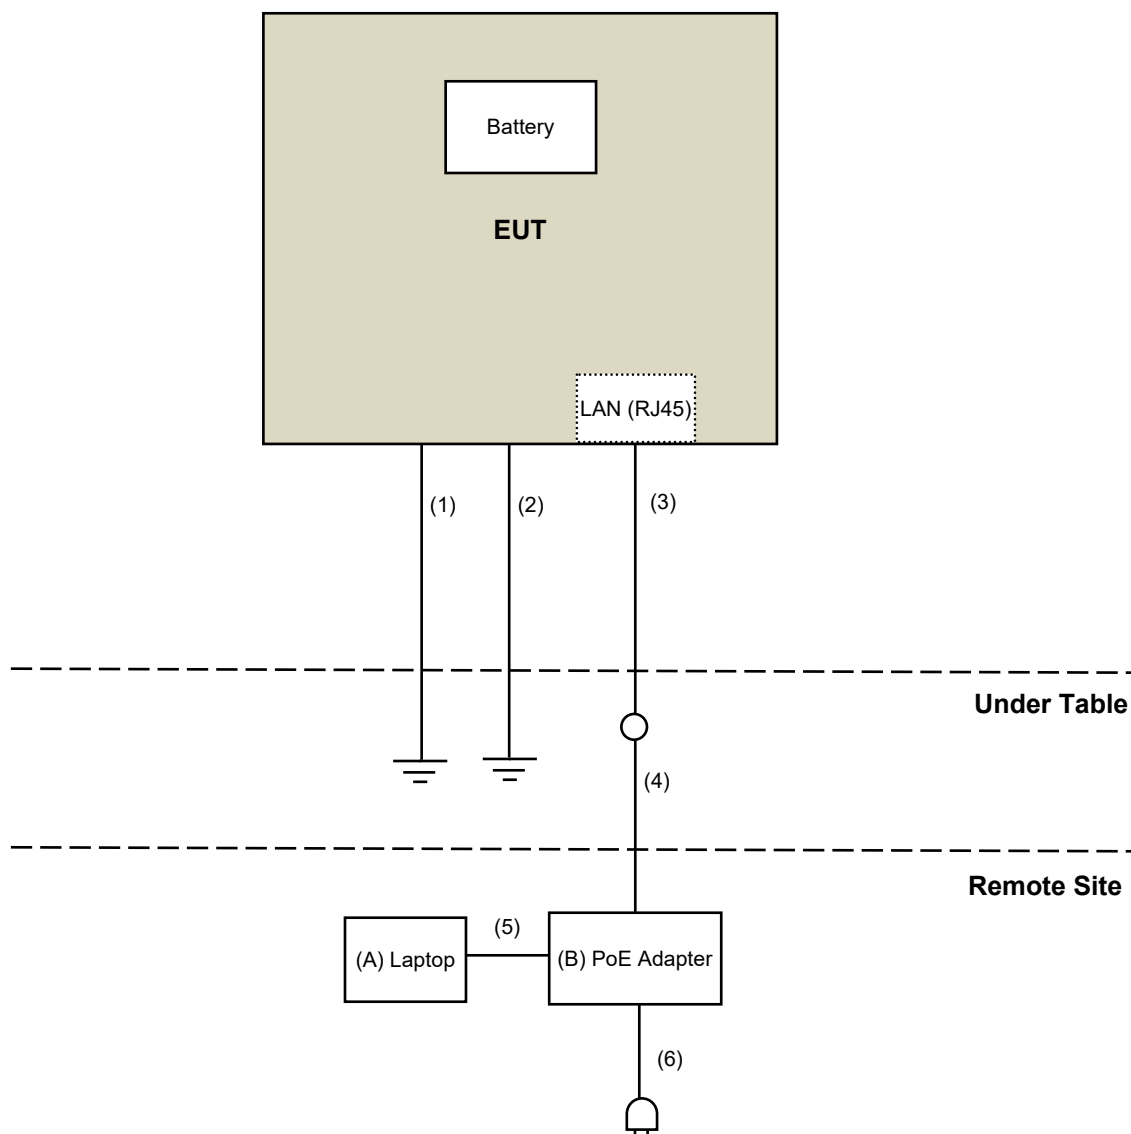

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Radiated Emission test:

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Test Receiver Agilent	N9038A	MY51210202	2020/12/1	2021/11/30
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA
Pre_Amplifier EMCI	EMC001340	980142	2021/5/24	2022/5/23
LOOP ANTENNA Electro-Metrics	EM-6879	264	2021/3/5	2022/3/4
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-001	2021/1/7	2022/1/6
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-002	2021/1/7	2022/1/6
Pre_Amplifier EMCI	EMC330N	980701	2021/3/10	2022/3/9
Trilog Broadband Antenna Schwarzbeck	VULB 9168	9168-406	2020/11/6	2021/11/5
RF Coaxial Cable COMMATE/PEWC	8D	966-4-1	2021/3/17	2022/3/16
RF Coaxial Cable COMMATE/PEWC	8D	966-4-2	2021/3/17	2022/3/16
RF Coaxial Cable COMMATE/PEWC	8D	966-4-3	2021/3/17	2022/3/16
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-03	2021/1/11	2022/1/10
Horn Antenna SCHWARZBECK	BBHA 9120D	9120D-783	2020/11/22	2021/11/21
Pre_Amplifier EMCI	EMC 12630 SE	980638	2021/4/7	2022/4/6
RF Cable-Frequency Range : 1-26.5GHz EMCI	EMC104-SM-SM-1200	160922	2020/12/25	2021/12/24
RF Coaxial Cable EMCI	EMC104-SM-SM-2000	180502	2021/4/26	2022/4/25
RF Coaxial Cable EMCI	EMC104-SM-SM-6000	180418	2021/4/26	2022/4/25

- Note: 1. The test was performed in 966 Chamber No. 4.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Tested Date: 2021/7/16 ~ 2021/9/4

For other test items:

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Spectrum Analyzer R&S	FSV40	101516	2021/3/8	2022/3/7
Power Meter Anritsu	ML2495A	1529002	2021/6/21	2022/6/20
Pulse Power Sensor Anritsu	MA2411B	1339443	2021/5/31	2022/5/30
Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2021/4/13	2022/4/12
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- Note: 1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: 2021/8/26

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

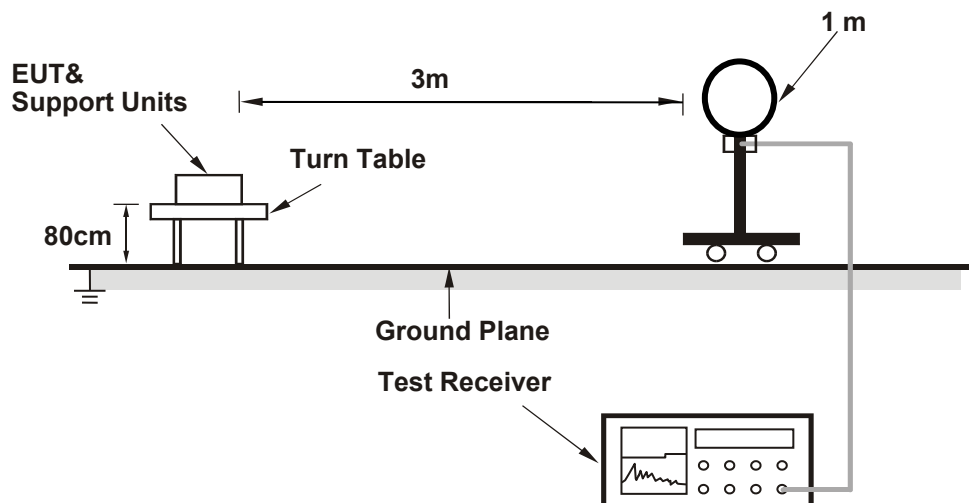

For Radiated emission 30MHz to 1GHz

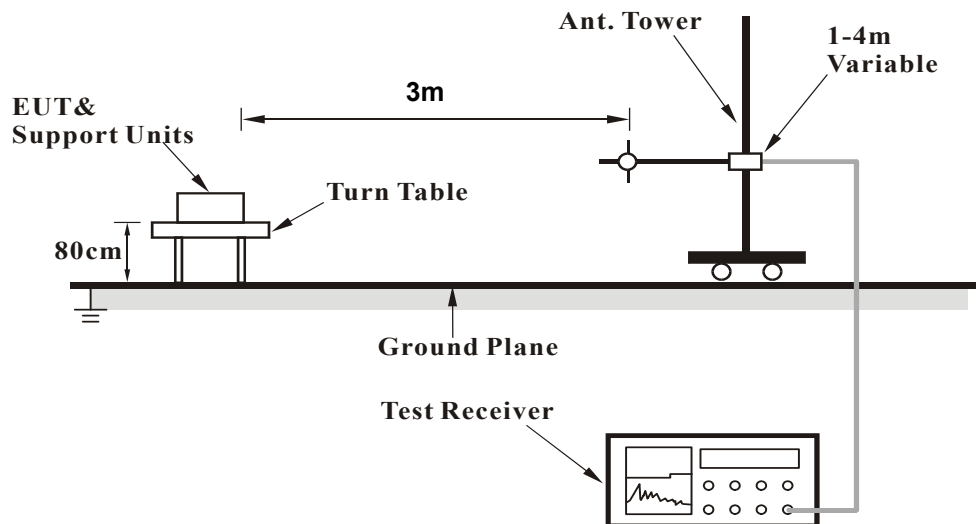

For Radiated emission above 1GHz

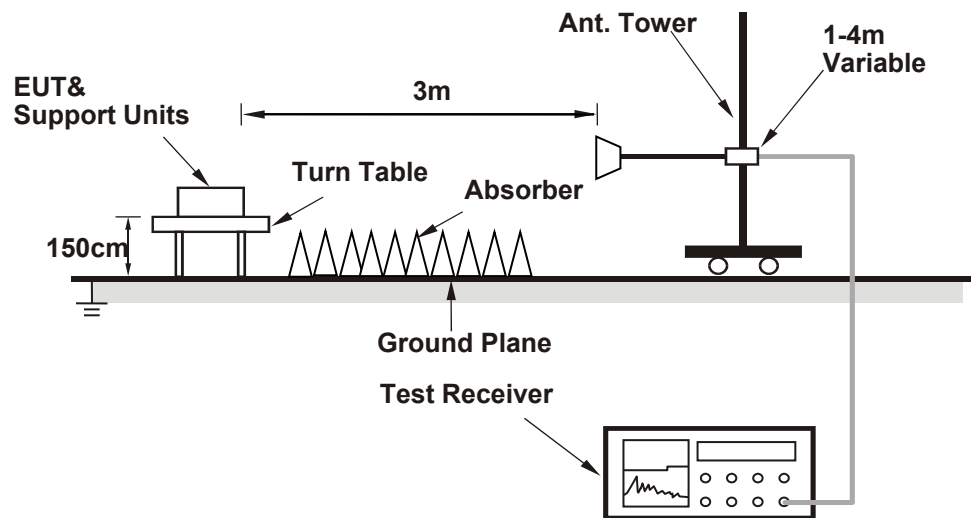

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Controlling software (Run Putty.exe Paste LORA_Test_Command_20210701.txt Command) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results


Bandedge Data:

RF Mode	TX LoRa_DTS	Channel	CH 0 : 902.5 MHz
Frequency Range	900MHz ~ 930MHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	902.00	71.3 QP	83.2	-11.9	1.35 H	348	36.3	35.0
2	*902.50	113.2 QP			1.35 H	348	78.2	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. " * ": Fundamental frequency.

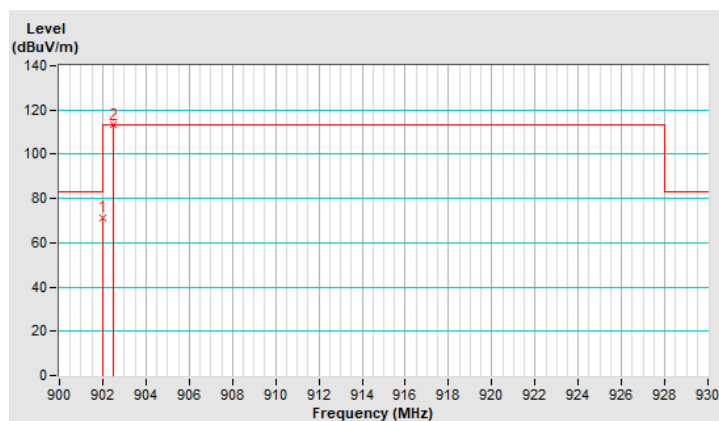


RF Mode	TX LoRa_DTS	Channel	CH 0 : 902.5 MHz
Frequency Range	900MHz ~ 930MHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	902.00	86.2 QP	98.0	-11.8	1.44 V	342	51.2	35.0
2	*902.50	128.0 QP			1.44 V	342	93.0	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. " * ": Fundamental frequency.

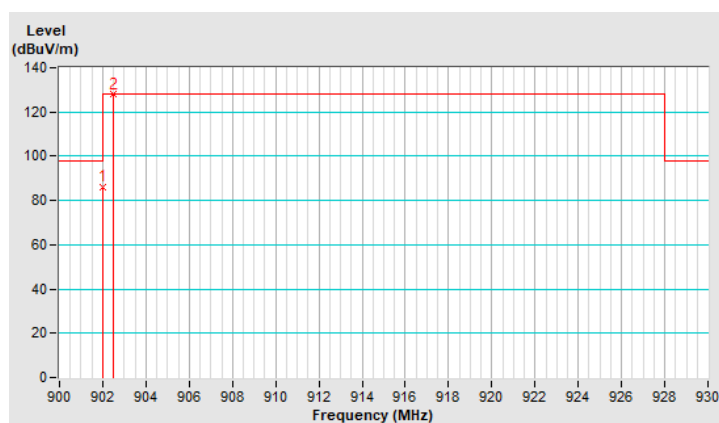


RF Mode	TX LoRa_DTS	Channel	CH 15 : 914.5 MHz
Frequency Range	900MHz ~ 930MHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	902.00	56.7 QP	83.6	-26.9	1.34 H	346	21.7	35.0
2	*914.50	113.6 QP			1.34 H	346	78.3	35.3
3	928.00	57.4 QP	83.6	-26.2	1.34 H	346	21.9	35.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. " * ": Fundamental frequency.

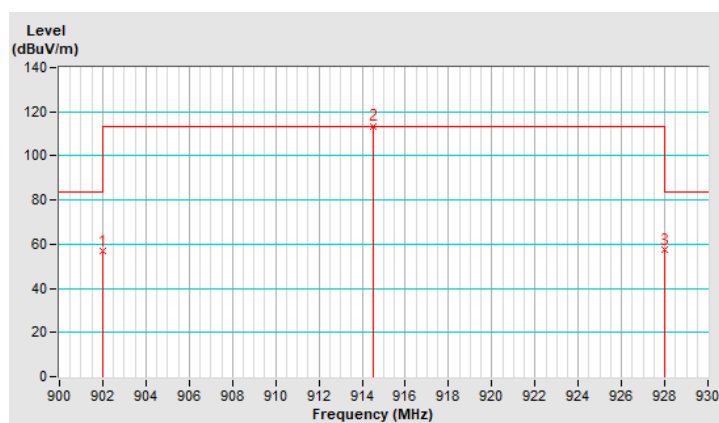


RF Mode	TX LoRa_DTS	Channel	CH 15 : 914.5 MHz
Frequency Range	900MHz ~ 930MHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	902.00	57.5 QP	98.3	-40.8	1.45 V	333	22.5	35.0
2	*914.50	128.3 QP			1.45 V	333	93.0	35.3
3	928.00	59.4 QP	98.3	-38.9	1.45 V	333	23.9	35.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. " * ": Fundamental frequency.

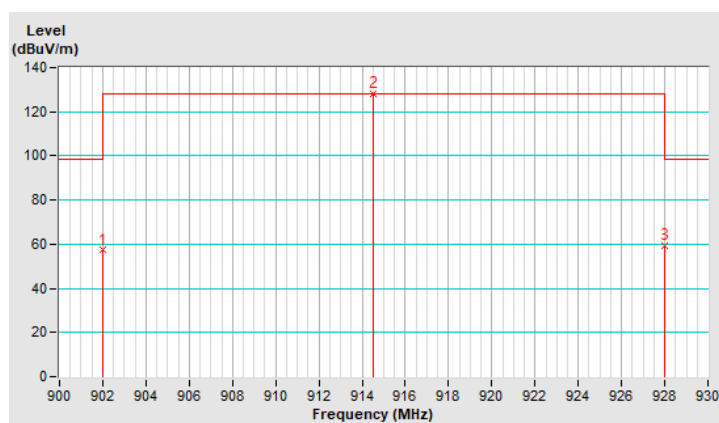


RF Mode	TX LoRa_DTS	Channel	CH 30 : 926.5 MHz
Frequency Range	900MHz ~ 930MHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*926.50	111.6 QP			1.32 H	346	76.1	35.5
2	928.00	57.9 QP	81.6	-23.7	1.32 H	346	22.4	35.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. " * ": Fundamental frequency.

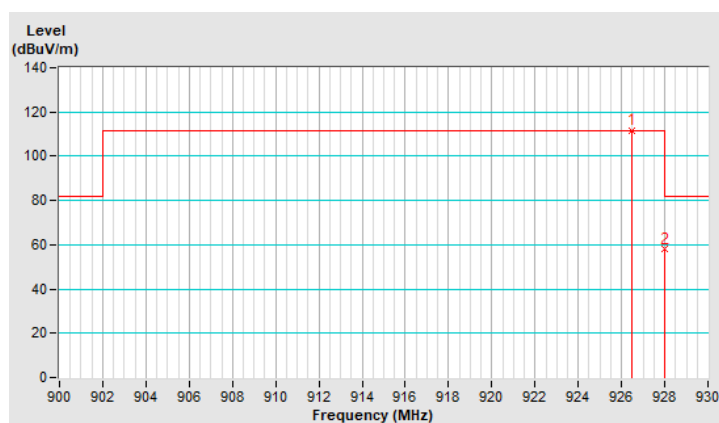


RF Mode	TX LoRa_DTS	Channel	CH 30 : 926.5 MHz
Frequency Range	900MHz ~ 930MHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*926.50	127.9 QP			1.49 V	193	92.4	35.5
2	928.00	66.5 QP	97.9	-31.4	1.49 V	193	31.0	35.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. " * ": Fundamental frequency.

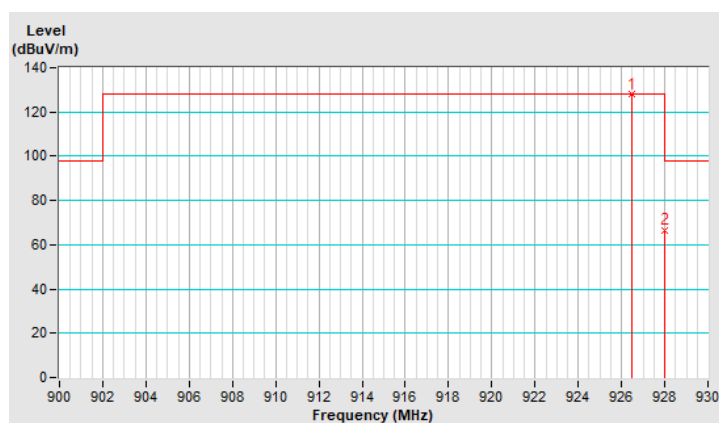

Above 1GHz Data:

RF Mode	TX LoRa_DTS	Channel	CH 0 : 902.5 MHz
Frequency Range	1GHz ~ 10GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2707.50	33.0 PK	74.0	-41.0	1.68 H	151	36.8	-3.8
2	2707.50	21.5 AV	54.0	-32.5	1.68 H	151	25.3	-3.8
3	3610.00	33.1 PK	74.0	-40.9	1.47 H	169	35.4	-2.3
4	3610.00	26.9 AV	54.0	-27.1	1.47 H	169	29.2	-2.3
5	4512.50	36.7 PK	74.0	-37.3	1.66 H	147	36.8	-0.1
6	4512.50	26.0 AV	54.0	-28.0	1.66 H	147	26.1	-0.1
7	5415.00	38.0 PK	74.0	-36.0	3.24 H	130	36.7	1.3
8	5415.00	27.2 AV	54.0	-26.8	3.24 H	130	25.9	1.3
9	8122.50	43.8 PK	74.0	-30.2	1.52 H	8	35.5	8.3
10	8122.50	32.5 AV	54.0	-21.5	1.52 H	8	24.2	8.3
11	9025.00	41.4 PK	74.0	-32.6	1.14 H	37	33.7	7.7
12	9025.00	31.1 AV	54.0	-22.9	1.14 H	37	23.4	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2707.50	34.0 PK	74.0	-40.0	1.63 V	154	37.8	-3.8
2	2707.50	22.0 AV	54.0	-32.0	1.63 V	154	25.8	-3.8
3	3610.00	35.0 PK	74.0	-39.0	1.60 V	23	37.3	-2.3
4	3610.00	29.0 AV	54.0	-25.0	1.60 V	23	31.3	-2.3
5	4512.50	37.2 PK	74.0	-36.8	1.70 V	13	37.3	-0.1
6	4512.50	27.3 AV	54.0	-26.7	1.70 V	13	27.4	-0.1
7	5415.00	38.0 PK	74.0	-36.0	1.76 V	58	36.7	1.3
8	5415.00	30.0 AV	54.0	-24.0	1.76 V	58	28.7	1.3
9	8122.50	43.8 PK	74.0	-30.2	1.49 V	145	35.5	8.3
10	8122.50	32.2 AV	54.0	-21.8	1.49 V	145	23.9	8.3
11	9025.00	41.6 PK	74.0	-32.4	1.44 V	153	33.9	7.7
12	9025.00	31.2 AV	54.0	-22.8	1.44 V	153	23.5	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX LoRa_DTS	Channel	CH 15 : 914.5 MHz
Frequency Range	1GHz ~ 10GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2743.50	32.8 PK	74.0	-41.2	1.71 H	129	36.6	-3.8
2	2743.50	21.6 AV	54.0	-32.4	1.71 H	129	25.4	-3.8
3	3658.00	32.7 PK	74.0	-41.3	1.38 H	181	34.7	-2.0
4	3658.00	26.7 AV	54.0	-27.3	1.38 H	181	28.7	-2.0
5	4572.50	37.6 PK	74.0	-36.4	1.61 H	125	37.7	-0.1
6	4572.50	26.4 AV	54.0	-27.6	1.61 H	125	26.5	-0.1
7	7316.00	37.7 PK	74.0	-36.3	3.19 H	117	30.9	6.8
8	7316.00	26.7 AV	54.0	-27.3	3.19 H	117	19.9	6.8
9	8230.50	43.4 PK	74.0	-30.6	1.50 H	17	35.7	7.7
10	8230.50	32.4 AV	54.0	-21.6	1.50 H	17	24.7	7.7
11	9145.00	41.6 PK	74.0	-32.4	1.09 H	21	33.5	8.1
12	9145.00	31.5 AV	54.0	-22.5	1.09 H	21	23.4	8.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2743.50	34.3 PK	74.0	-39.7	1.57 V	154	38.1	-3.8
2	2743.50	22.5 AV	54.0	-31.5	1.57 V	154	26.3	-3.8
3	3658.00	35.0 PK	74.0	-39.0	1.58 V	24	37.0	-2.0
4	3658.00	29.0 AV	54.0	-25.0	1.58 V	24	31.0	-2.0
5	4572.50	37.2 PK	74.0	-36.8	1.73 V	7	37.3	-0.1
6	4572.50	27.0 AV	54.0	-27.0	1.73 V	7	27.1	-0.1
7	7316.00	37.4 PK	74.0	-36.6	1.72 V	46	30.6	6.8
8	7316.00	29.6 AV	54.0	-24.4	1.72 V	46	22.8	6.8
9	8230.50	43.7 PK	74.0	-30.3	1.50 V	134	36.0	7.7
10	8230.50	32.3 AV	54.0	-21.7	1.50 V	134	24.6	7.7
11	9145.00	41.3 PK	74.0	-32.7	1.42 V	153	33.2	8.1
12	9145.00	30.7 AV	54.0	-23.3	1.42 V	153	22.6	8.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX LoRa_DTS	Channel	CH 30 : 926.5 MHz
Frequency Range	1GHz ~ 10GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2779.50	33.2 PK	74.0	-40.8	1.66 H	116	36.9	-3.7
2	2779.50	21.9 AV	54.0	-32.1	1.66 H	116	25.6	-3.7
3	3706.00	32.9 PK	74.0	-41.1	1.37 H	186	34.8	-1.9
4	3706.00	26.9 AV	54.0	-27.1	1.37 H	186	28.8	-1.9
5	4632.50	37.5 PK	74.0	-36.5	1.63 H	112	37.4	0.1
6	4632.50	26.3 AV	54.0	-27.7	1.63 H	112	26.2	0.1
7	7412.00	37.5 PK	74.0	-36.5	3.21 H	124	30.2	7.3
8	7412.00	26.5 AV	54.0	-27.5	3.21 H	124	19.2	7.3
9	8338.50	43.8 PK	74.0	-30.2	1.49 H	1	36.3	7.5
10	8338.50	32.6 AV	54.0	-21.4	1.49 H	1	25.1	7.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2779.50	34.8 PK	74.0	-39.2	1.57 V	160	38.5	-3.7
2	2779.50	22.9 AV	54.0	-31.1	1.57 V	160	26.6	-3.7
3	3706.00	34.3 PK	74.0	-39.7	1.55 V	39	36.2	-1.9
4	3706.00	28.6 AV	54.0	-25.4	1.55 V	39	30.5	-1.9
5	4632.50	37.1 PK	74.0	-36.9	1.77 V	14	37.0	0.1
6	4632.50	27.0 AV	54.0	-27.0	1.77 V	14	26.9	0.1
7	7412.00	37.8 PK	74.0	-36.2	1.77 V	40	30.5	7.3
8	7412.00	29.8 AV	54.0	-24.2	1.77 V	40	22.5	7.3
9	8338.50	43.8 PK	74.0	-30.2	1.55 V	130	36.3	7.5
10	8338.50	32.1 AV	54.0	-21.9	1.55 V	130	24.6	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.


Below 1GHz Data:

RF Mode	TX LoRa_DTS	Channel	CH 30 : 926.5 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.99	35.4 QP	40.0	-4.6	3.00 H	140	48.5	-13.1
2	102.94	38.6 QP	43.5	-4.9	2.00 H	87	54.7	-16.1
3	152.96	31.9 QP	43.5	-11.6	2.00 H	47	43.9	-12.0
4	262.57	31.2 QP	46.0	-14.8	1.00 H	144	43.5	-12.3
5	279.85	35.4 QP	46.0	-10.6	1.00 H	235	46.8	-11.4
6	728.03	32.9 QP	46.0	-13.1	3.00 H	18	32.8	0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

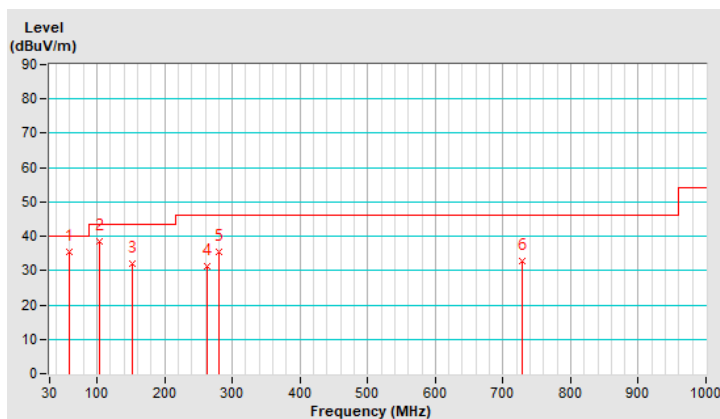


RF Mode	TX LoRa_DTS	Channel	CH 30 : 926.5 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.67	35.1 QP	40.0	-4.9	1.00 V	305	47.5	-12.4
2	59.48	34.3 QP	40.0	-5.7	1.00 V	244	47.4	-13.1
3	101.40	34.5 QP	43.5	-9.0	1.00 V	67	50.8	-16.3
4	151.83	30.0 QP	43.5	-13.5	1.00 V	69	42.0	-12.0
5	281.33	32.1 QP	46.0	-13.9	1.50 V	51	43.4	-11.3
6	784.72	32.9 QP	46.0	-13.1	3.00 V	298	31.6	1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

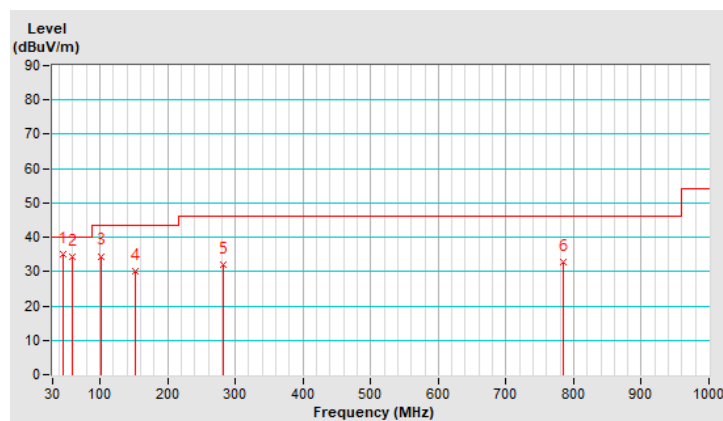

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Test Receiver R&S	ESCS 30	847124/029	2020/10/20	2021/10/19
LISN R&S	ESH3-Z5	848773/004	2020/10/27	2021/10/26
LISN R & S	ESH3-Z5	835239/001	2021/3/26	2022/3/25
50 ohms Terminator	50	3	2020/10/26	2021/10/25
RF Coaxial Cable JYEBO	5D-FB	COCCAB-001	2020/9/26	2021/9/25
Fixed attenuator STI	STI02-2200-10	005	2020/8/29	2021/8/28
Software BVADT	BVADT_Conc_ V7.3.7.4	NA	NA	NA

Note: 1. The test was performed in Conduction 1.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

3. Tested Date: 2021/8/26

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

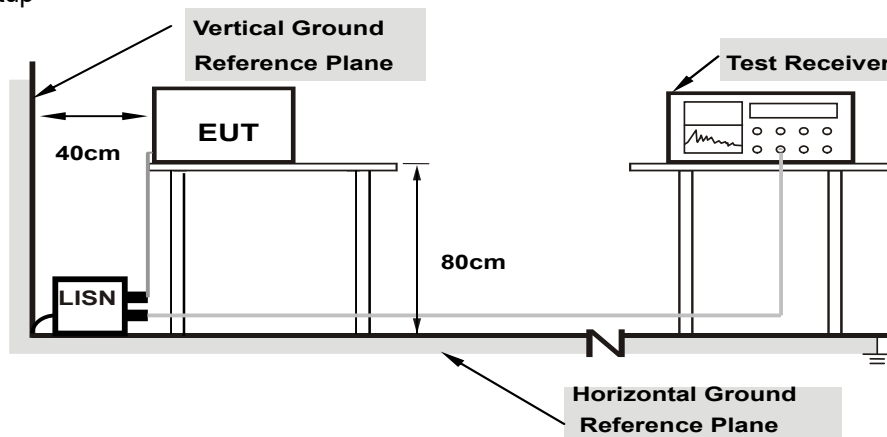

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

RF Mode	TX LoRa_DTS	Channel	CH 30 : 926.5 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	9.96	36.65	25.42	46.61	35.38	64.98	54.98	-18.37	-19.60
2	0.41563	9.99	38.10	32.03	48.09	42.02	57.54	47.54	-9.45	-5.52
3	0.90000	10.02	27.64	22.92	37.66	32.94	56.00	46.00	-18.34	-13.06
4	2.82031	10.11	27.52	20.24	37.63	30.35	56.00	46.00	-18.37	-15.65
5	3.84766	10.16	27.19	21.05	37.35	31.21	56.00	46.00	-18.65	-14.79
6	14.27344	10.79	29.11	25.84	39.90	36.63	60.00	50.00	-20.10	-13.37

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

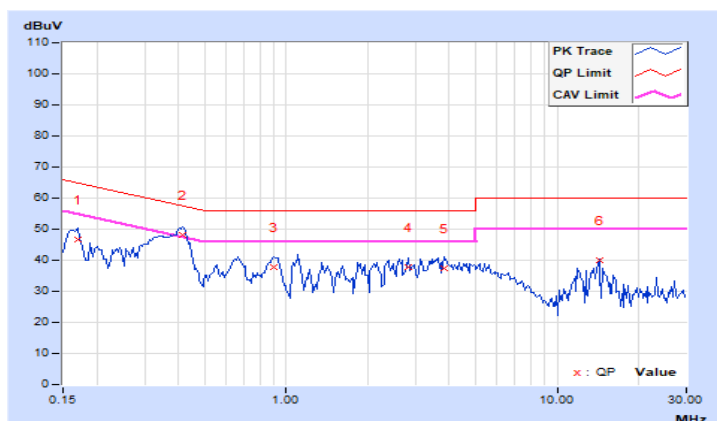


RF Mode	TX LoRa_DTS	Channel	CH 30 : 926.5 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17344	9.93	36.04	27.17	45.97	37.10	64.79	54.79	-18.82	-17.69
2	0.33359	9.96	35.95	30.75	45.91	40.71	59.36	49.36	-13.45	-8.65
3	0.41563	9.96	38.68	32.67	48.64	42.63	57.54	47.54	-8.90	-4.91
4	0.89609	9.99	28.19	23.42	38.18	33.41	56.00	46.00	-17.82	-12.59
5	3.86328	10.11	28.04	21.70	38.15	31.81	56.00	46.00	-17.85	-14.19
6	14.21094	10.60	28.85	25.33	39.45	35.93	60.00	50.00	-20.55	-14.07

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

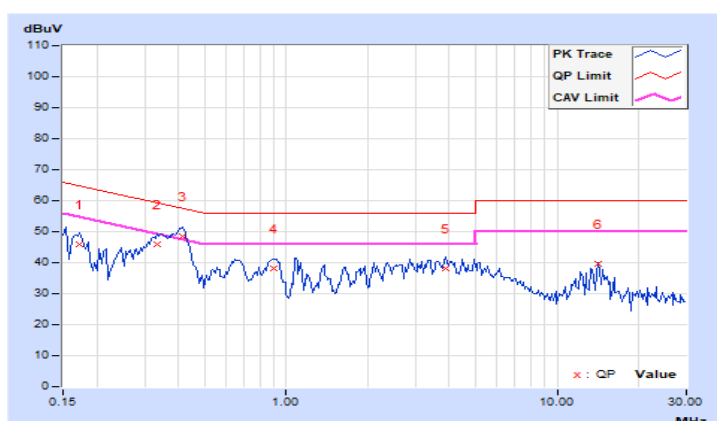


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard


No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	902.5	0.63	0.5	Pass
15	914.5	0.63	0.5	Pass
30	926.5	0.63	0.5	Pass

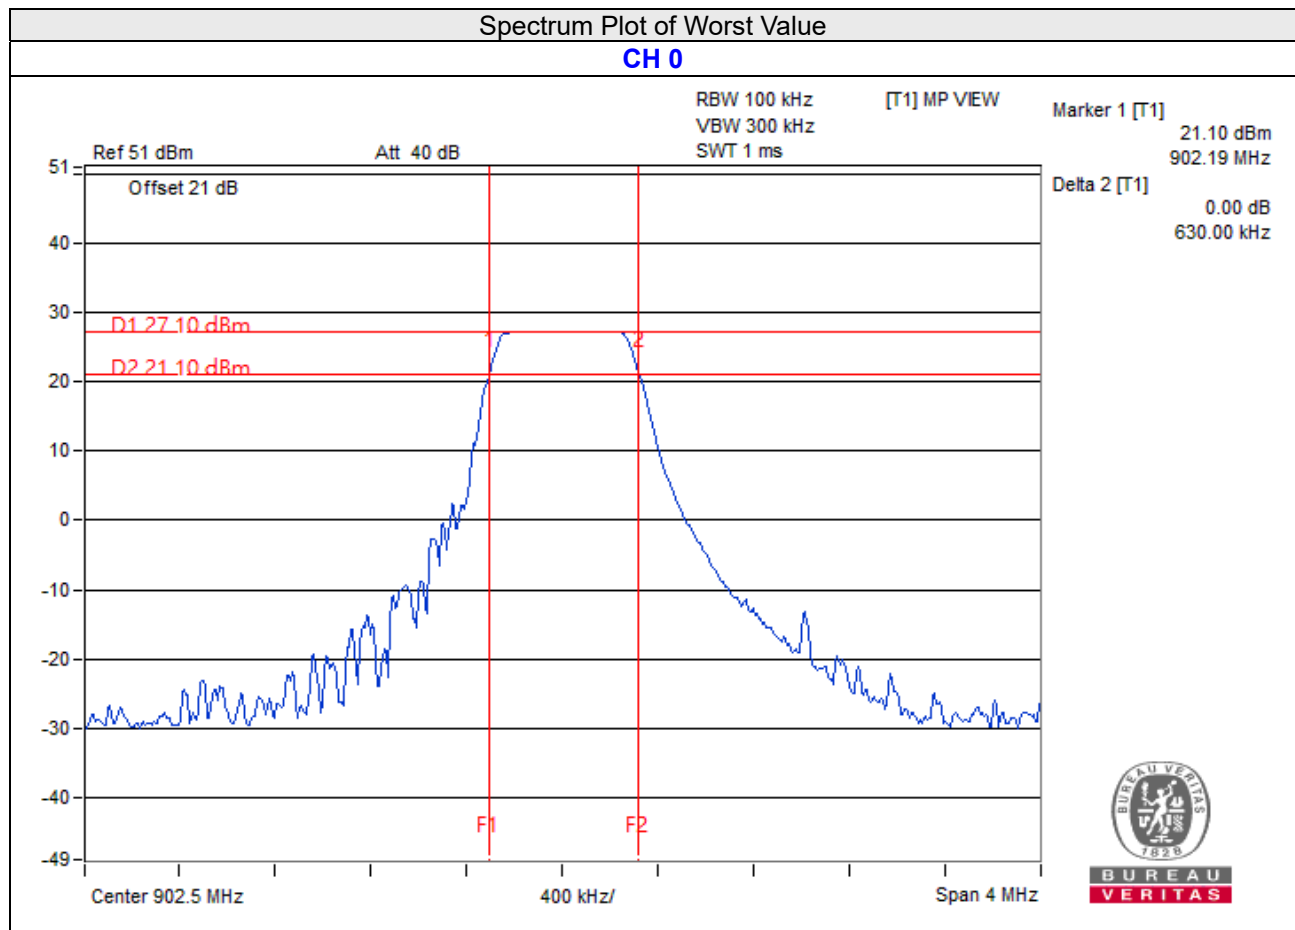


4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 902-928 MHz bands: 1 Watt (30dBm)

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass/Fail
0	902.5	538.27	27.31	30	Pass
15	914.5	559.758	27.48	30	Pass
30	926.5	564.937	27.52	30	Pass

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

4.5.5 Deviation from Test Standard


No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6.

4.5.7 Test Results

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
0	902.5	7.54	8.00	Pass
15	914.5	7.78	8.00	Pass
30	926.5	7.33	8.00	Pass

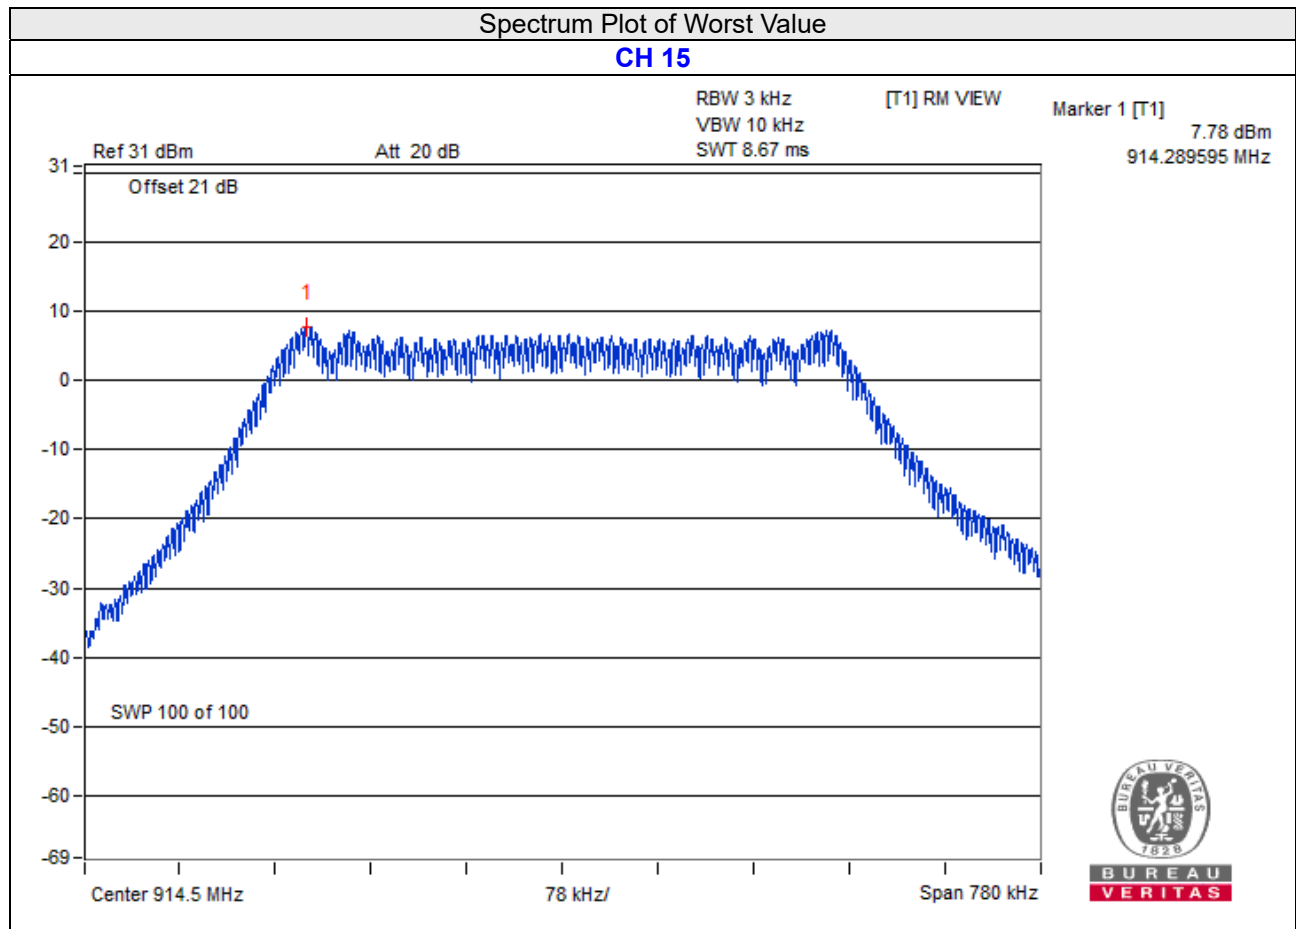


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.


4.6.6 EUT Operating Condition

Same as Item 4.3.6.


4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.


Maximum REF

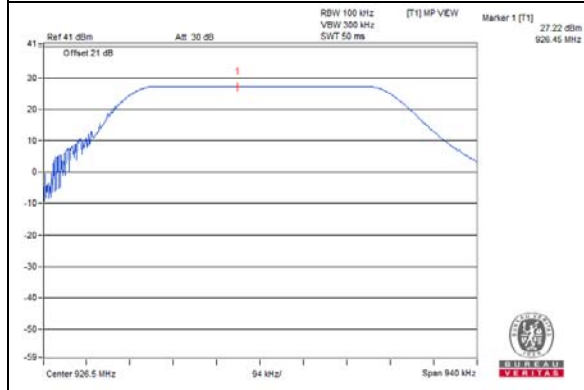


CH 0

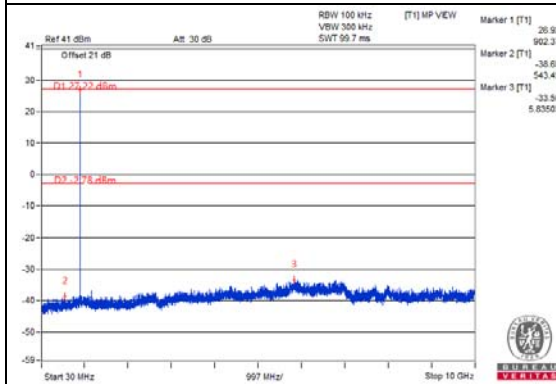

CH 15

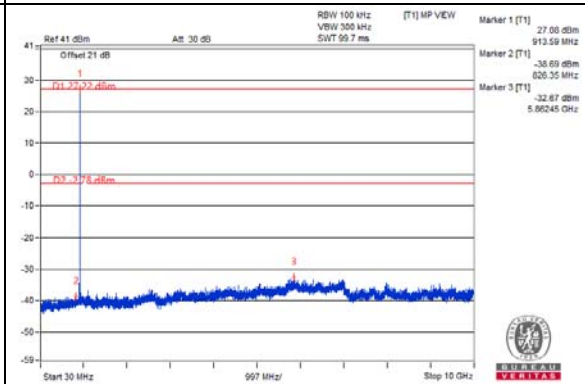


CH 30

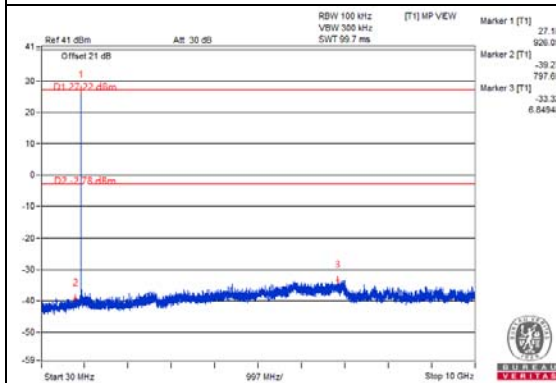


CH 30



CH 0 Band edge

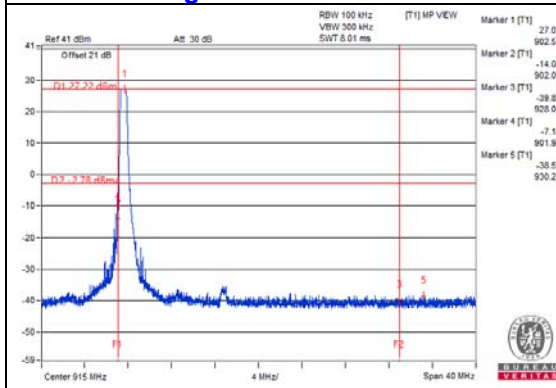

CH 30 Band edge

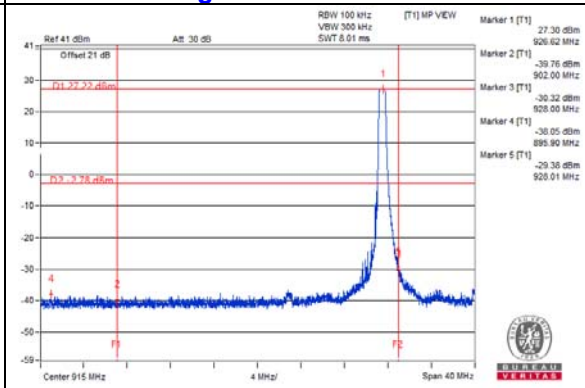

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---