

FCC Test Report

Equipment : IoT Gateway System
Brand Name : Super Micro Computer, Inc
Model No. : SYS-E100-8Q-TDE3/SYS-E100-8QE-TDE3
FCC ID : 2AEVX-E100TDE3
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
FCC Classification : DTS
Applicant : Super Micro Computer, Inc.
Manufacturer : 980 Rock Ave., San Jose, CA, 95131, USA

The product sample received on Jul. 08, 2015 and completely tested on Aug. 21, 2015. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:


Vic Hsiao / Supervisor

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories and Support Equipment	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information	7
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT.....	9
2.1	The Worst Case Modulation Configuration	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Measurement Configuration.....	9
2.4	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	13
3.1	AC Power-line Conducted Emissions	13
3.2	6dB Bandwidth	16
3.3	RF Output Power.....	18
3.4	Power Spectral Density	21
3.5	Transmitter Bandedge Emissions	23
3.6	Transmitter Unwanted Emissions.....	26
4	TEST EQUIPMENT AND CALIBRATION DATA	37

APPENDIX A. TEST PHOTOS

APPENDIX B. PHOTOGRAPHS OF EUT

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.3	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.1986310MHz 37.41 (Margin 16.26dB) - AV 52.78 (Margin 10.89dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	6dB Bandwidth Unit [MHz]: 1.45	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm]: 20.20	Power [dBm]:30	Complied
3.4	15.247(e)	Power Spectral Density	PSD [dBm/100kHz]: -2.72	PSD [dBm/3kHz]:8	Complied
3.5	15.247(d)	Transmitter Bandedge Emissions	Restricted Bands [dBuV/m at 3m]: 2389.968MHz 63.02 (Margin 10.98dB) - PK 52.45 (Margin 1.55dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(d)	Transmitter Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 7320MHz 52.56 (Margin 1.44dB) - AV 62.11 (Margin 13.89dB) - PK	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



SPORTON INTERNATIONAL INC.
TEL : 886-3-327-3456
FAX : 886-3-327-0973

1 General Description

1.1 Information

1.1.1 Product Details

The equipment is IoT Gateway System. There are two sample of EUT. The only difference is that different motherboards. For more detailed features description, please refer to the specifications or user's manual.

Sample No.	Model No.
1	SYS-E100-8Q-TDE3
2	SYS-E100-8QE-TDE3

1.1.2 RF General Information

RF General Information					
Frequency Range (MHz)	Modulation	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)
2400-2483.5	OQPSK	2405-2475	1-16 [16]	1	21.17
Note 1: RF output power specifies that Maximum Peak Conducted Output Power.					

1.1.3 Antenna Information

Antenna Category	
☒	External antenna (dedicated antennas)
☒	Single power level with corresponding antenna(s).
☐	Multiple power level and corresponding antenna(s).

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	Dipole	2.1

1.1.4 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	☐ Production ; ☒ Pre-Production ; ☐ Prototype
Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:
☐	Other:

1.1.5 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
☐ Operated normally mode for worst duty cycle	
☒ Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
☒ 100.00%	0.00

1.1.6 EUT Operational Condition

Supply Voltage	☒ AC mains	☐ DC	
Type of DC Source	☐ From Host System	☒ External AC adapter	☐ Li-ion Battery

1.2 Accessories and Support Equipment

Accessories Information				
AC Adapter	Brand Name	SINPRO	Model Name	IPU15-105
	Power Rating	I/P: 100-240V~47-63Hz , 0.4A ; O/P: 12V  1.25A max		
	Power Cord	1.22 meter, non-shielded cable, with 2 ferrite core		

Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment - RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5540	DoC
2	AC Adapter for Notebook	DELL	HA65NM130	DoC

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2013
- FCC KDB 558074 D01 v03r03

1.4 Testing Location Information

Testing Location				
☒	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL : 886-3-327-0973 FAX : 886-3-327-0973		
Test Condition		Test Site No.	Test Engineer	Test Environment
AC Conduction		CO04-HY	Zeus	21°C / 58%
RF Conducted		TH01-HY	Howard	23°C / 63%
Radiated Emission		03CH02-HY	Joe	23.6°C / 51%

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		±2.3 dB
Emission bandwidth, 6dB bandwidth		±0.6 %
RF output power, conducted		±0.1 dB
Power density, conducted		±0.6 dB
Unwanted emissions, conducted	9 – 150 kHz	±0.4 dB
	0.15 – 30 MHz	±0.4 dB
	30 – 1000 MHz	±0.6 dB
	1 – 18 GHz	±0.5 dB
	18 – 40 GHz	±0.5 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	±2.5 dB
	0.15 – 30 MHz	±2.3 dB
	30 – 1000 MHz	±2.6 dB
	1 – 18 GHz	±3.6 dB
	18 – 40 GHz	±3.8 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±5 %
DC and low frequency voltages		±0.9 %
Time		±1.4 %
Duty Cycle		±0.6 %

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing		
Modulation Mode	Transmit Chains (N _{TX})	RF Output Power (dBm)
O-QPSK	1	21.17
Note 1: RF output power specifies that Maximum Peak Conducted Output Power.		

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Modulation Mode	Test Channel Frequencies (MHz)
O-QPSK	2405, 2440, 2475


2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	Sample 1 & AC Power & Radio link (Zigbee)
2	Sample 2 & AC Power & Radio link (Zigbee)
For operating mode 2 is the worst case and it was record in this test report.	


The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Power Spectral Density, 6 dB Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	O-QPSK
1	Sample 1(Chip 1) & AC Power & Radio link (Zigbee)
2	Sample 1(Chip 2) & AC Power & Radio link (Zigbee)
3	Sample 2(Chip 1) & AC Power & Radio link (Zigbee)
4	Sample 2(Chip 2) & AC Power & Radio link (Zigbee)
For operating mode 3 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
User Position	☒ EUT will be placed in fixed position.		
	☐ EUT will be placed in mobile position and operating multiple positions.		
	☐ EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed three orthogonal planes.		
Operating Mode	Operating Mode Description		
Radiated Emissions (Below 1GHz)	1. Sample 1(Chip 1) & AC Power & Radio link (Zigbee)		
	2. Sample 1(Chip 2) & AC Power & Radio link (Zigbee)		
	3. Sample 2(Chip 1) & AC Power & Radio link (Zigbee)		
	4. Sample 2(Chip 2) & AC Power & Radio link (Zigbee)		
For operating mode 3 is the worst case and it was record in this test report.			
Radiated Emissions (Above 1GHz)	1. Sample 2(Chip 1) & AC Power & Radio link (Zigbee)		
Modulation Mode	O-QPSK		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT	V		


2.4 Test Setup Diagram

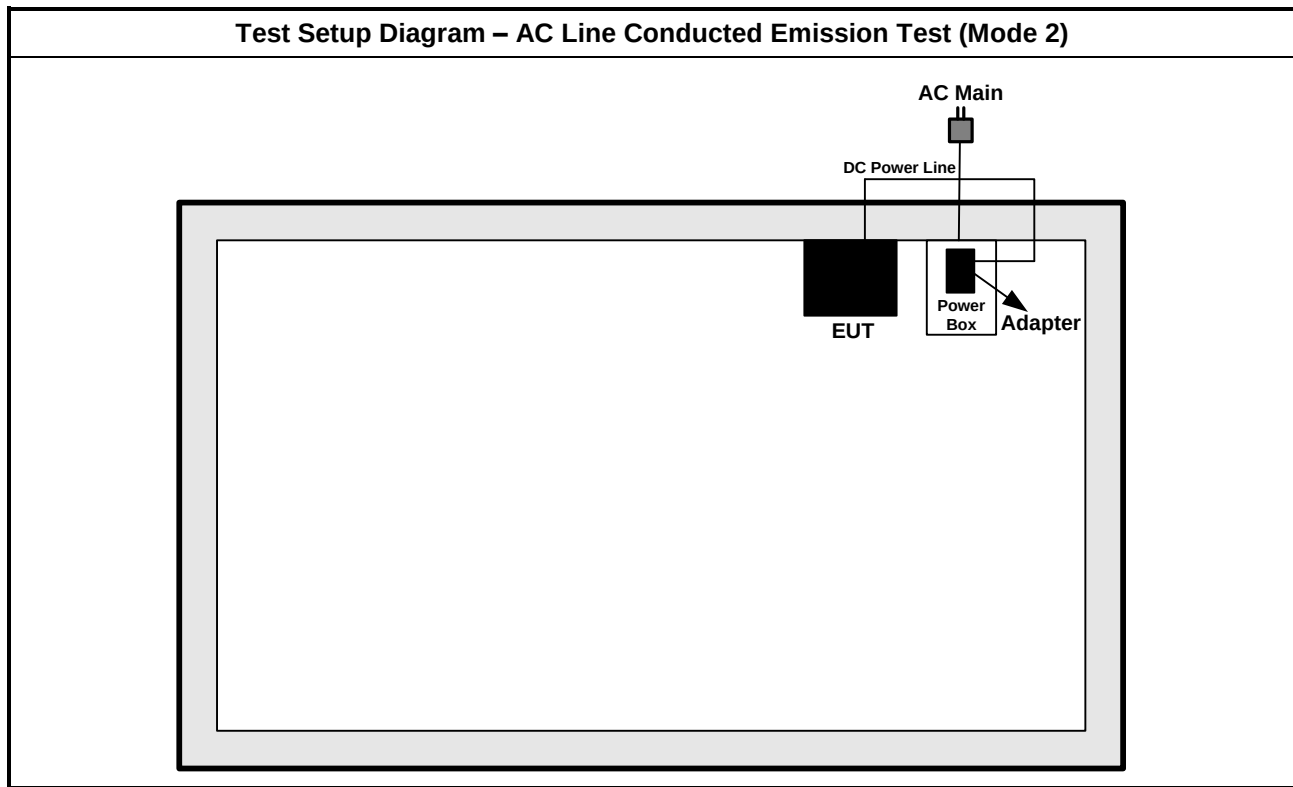

Test Setup Diagram - Radiated Test Below 1GHz (Mode 3)

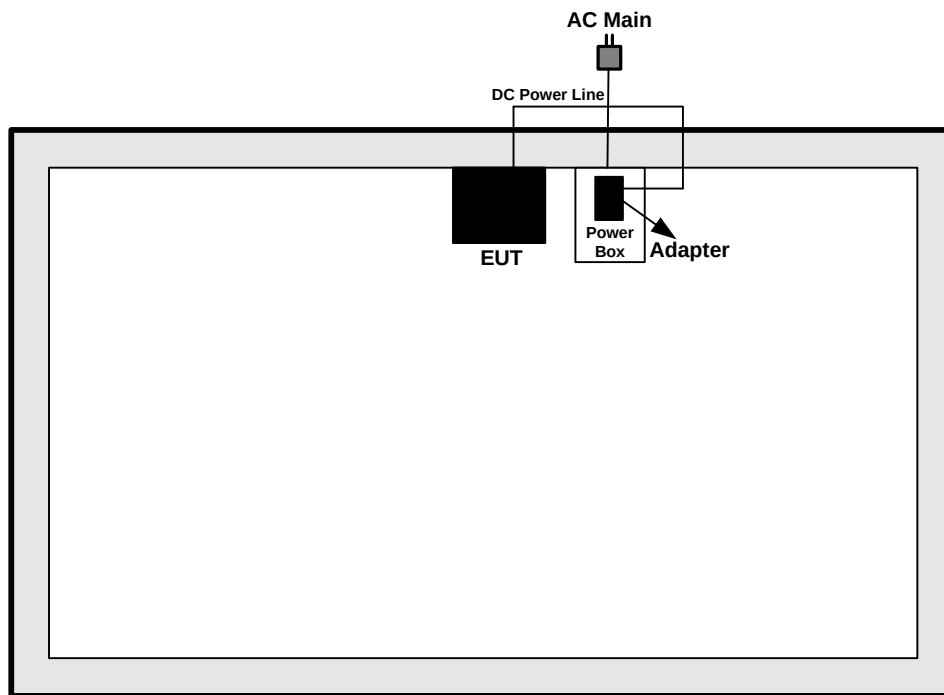

Test Setup Diagram - Radiated Test Above 1GHz (Mode 1)

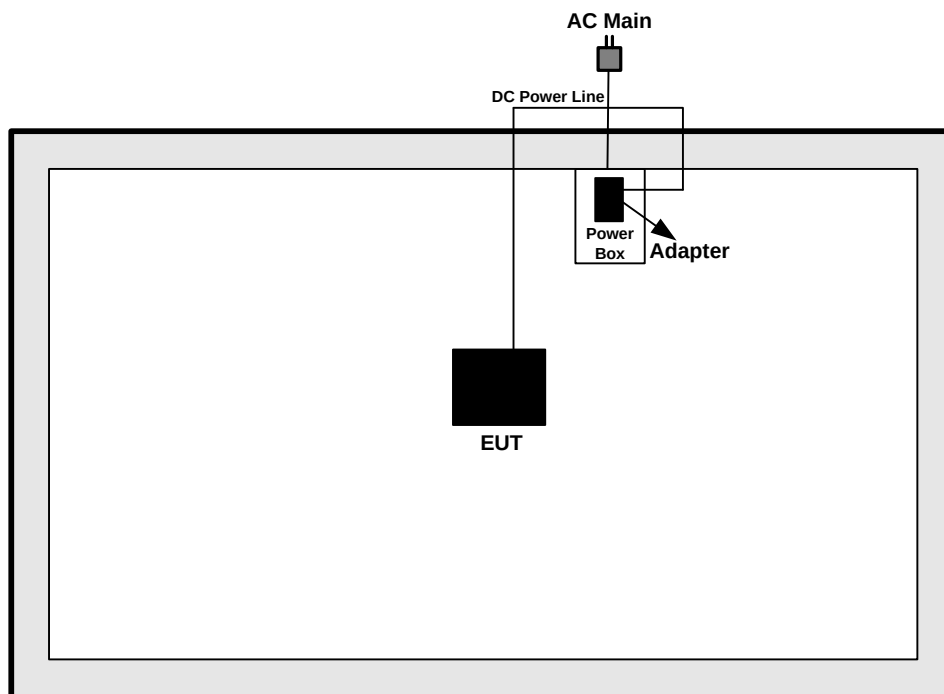

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

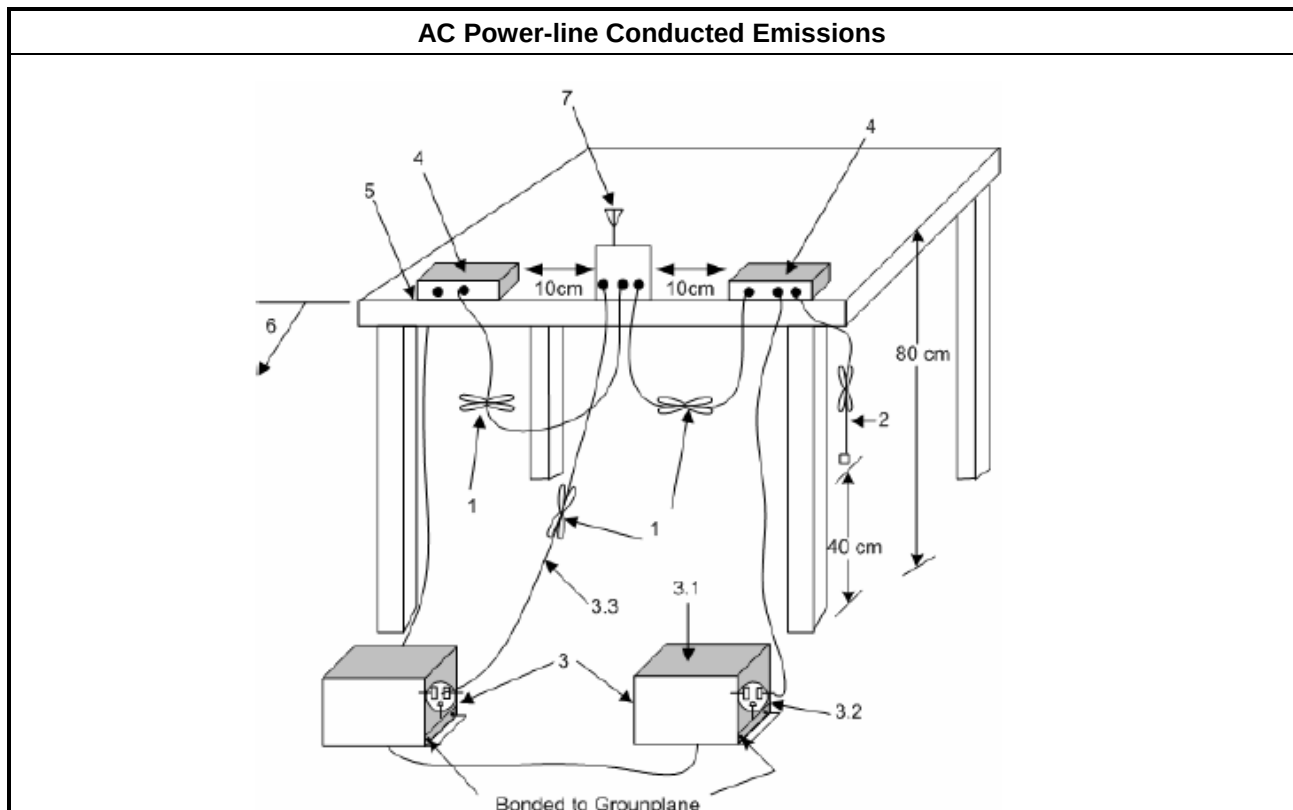


3.1.5 Test Result of AC Power-line Conducted Emissions

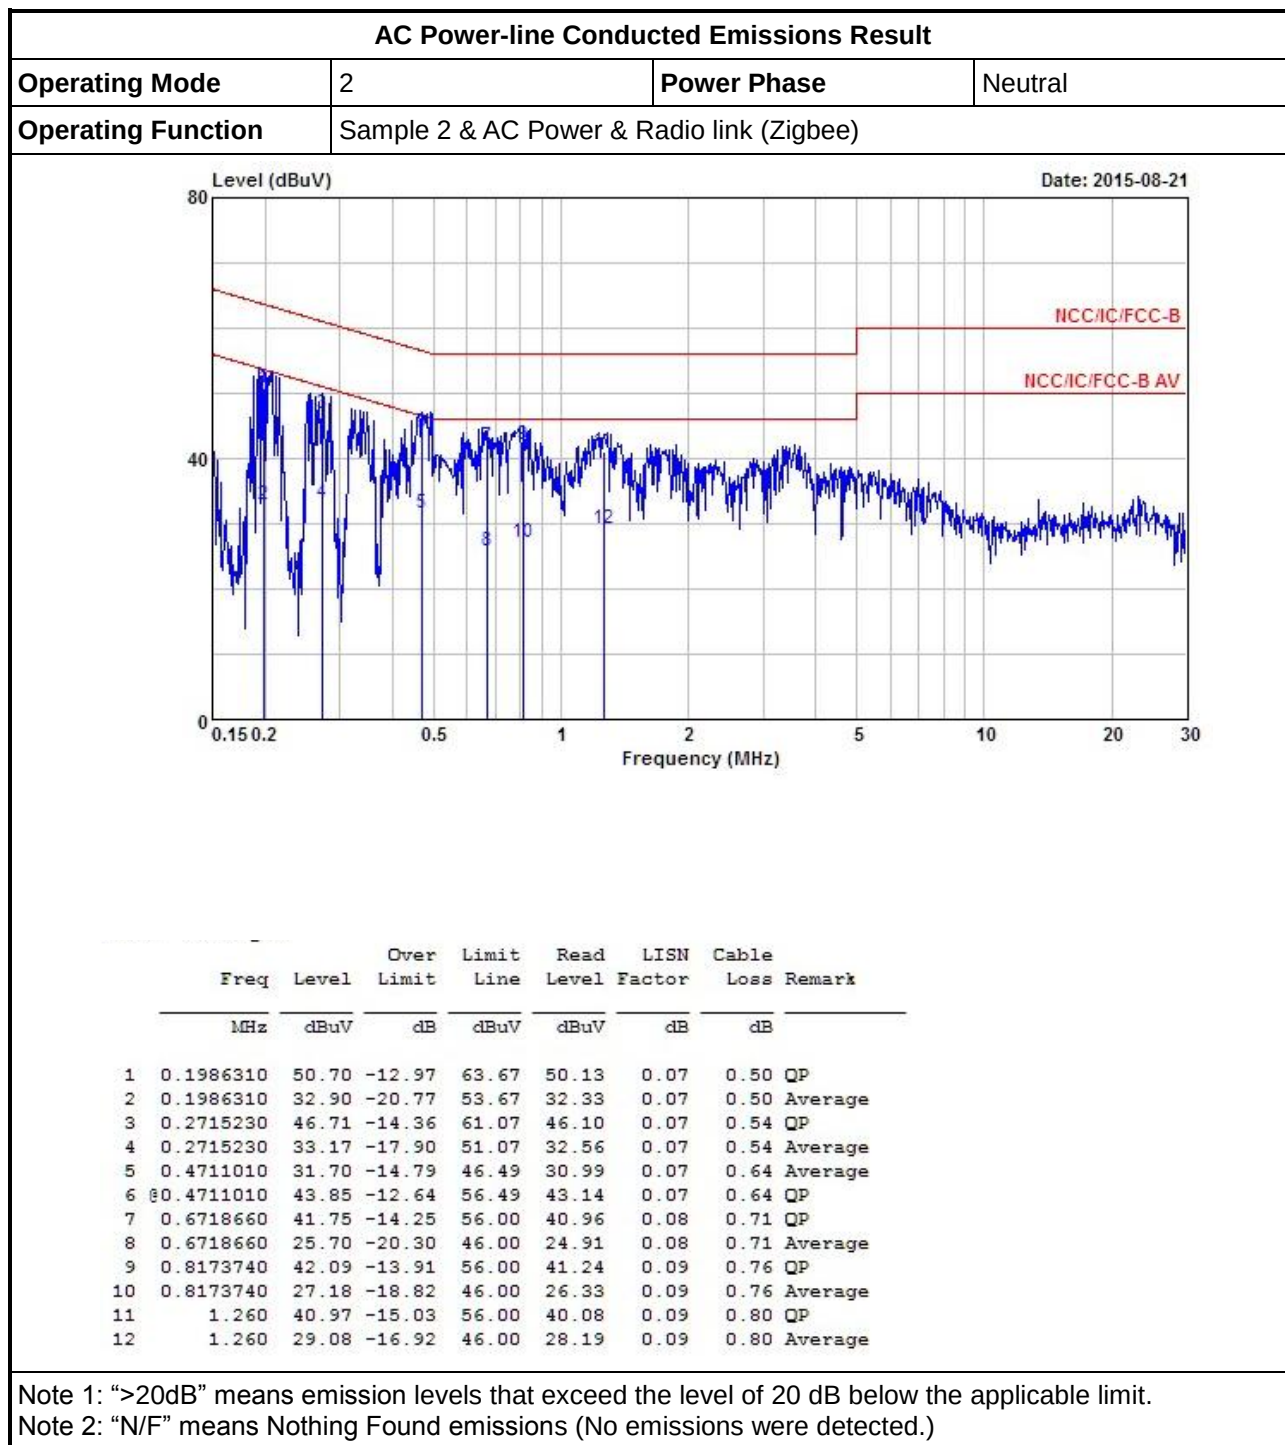

AC Power-line Conducted Emissions Result

Operating Mode	2	Power Phase	Line
Operating Function	Sample 2 & AC Power & Radio link (Zigbee)		

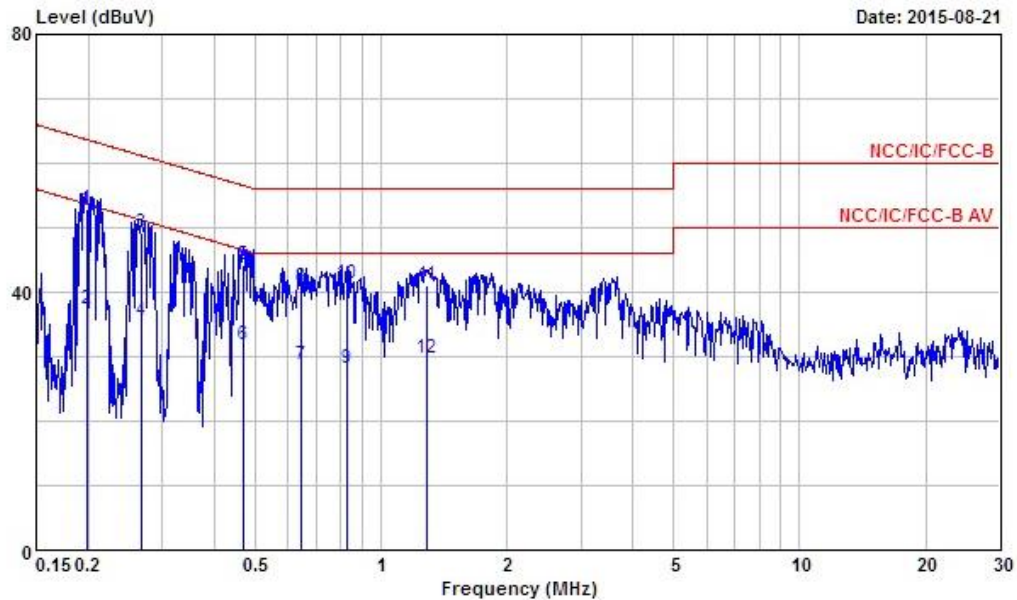

Freq	Level	Over	Limit	Read	LISN	Cable	
MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
		dB	dBuV	dBuV	dB	dB	
1	0.1986310	52.78	-10.89	63.67	52.22	0.06	0.50 QP
2	0.1986310	37.41	-16.26	53.67	36.85	0.06	0.50 Average
3	0.2686610	49.24	-11.92	61.16	48.64	0.06	0.54 QP
4	0.2686610	35.41	-15.75	51.16	34.81	0.06	0.54 Average
5	0.4711010	44.25	-12.24	56.49	43.54	0.07	0.64 QP
6	0.4711010	31.80	-14.69	46.49	31.09	0.07	0.64 Average
7	0.6474040	28.81	-17.19	46.00	28.03	0.08	0.70 Average
8	0.6474040	40.73	-15.27	56.00	39.95	0.08	0.70 QP
9	0.8260820	28.25	-17.75	46.00	27.41	0.08	0.76 Average
10	0.8260820	41.36	-14.64	56.00	40.52	0.08	0.76 QP
11	1.290	41.17	-14.83	56.00	40.28	0.09	0.80 QP
12	1.290	29.85	-16.15	46.00	28.96	0.09	0.80 Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
☒	6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
☒	For the emission bandwidth shall be measured using one of the options below:
☒	Refer as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
☐	Refer as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☒	For conducted measurement.
☐	The EUT supports single transmit chain and measurements performed on this transmit chain.
☒	The EUT supports diversity transmitting and the results on transmit chip 1 is the worst case.


3.2.4 Test Setup

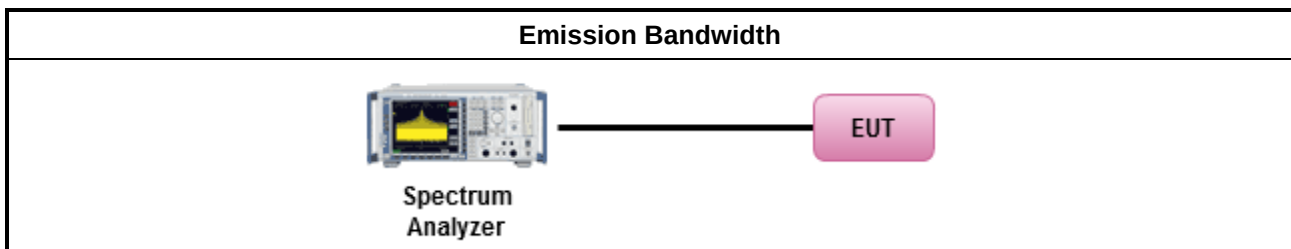

3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result				
Condition			Emission Bandwidth (MHz)	
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth	6dB Bandwidth
O-QPSK	1	2405	2.41	1.45
O-QPSK	1	2440	2.37	1.46
O-QPSK	1	2475	2.37	1.52
Limit			N/A	≥500 kHz
Result			Complied	

Note 1: N_{TX} = Number of Transmit Chains

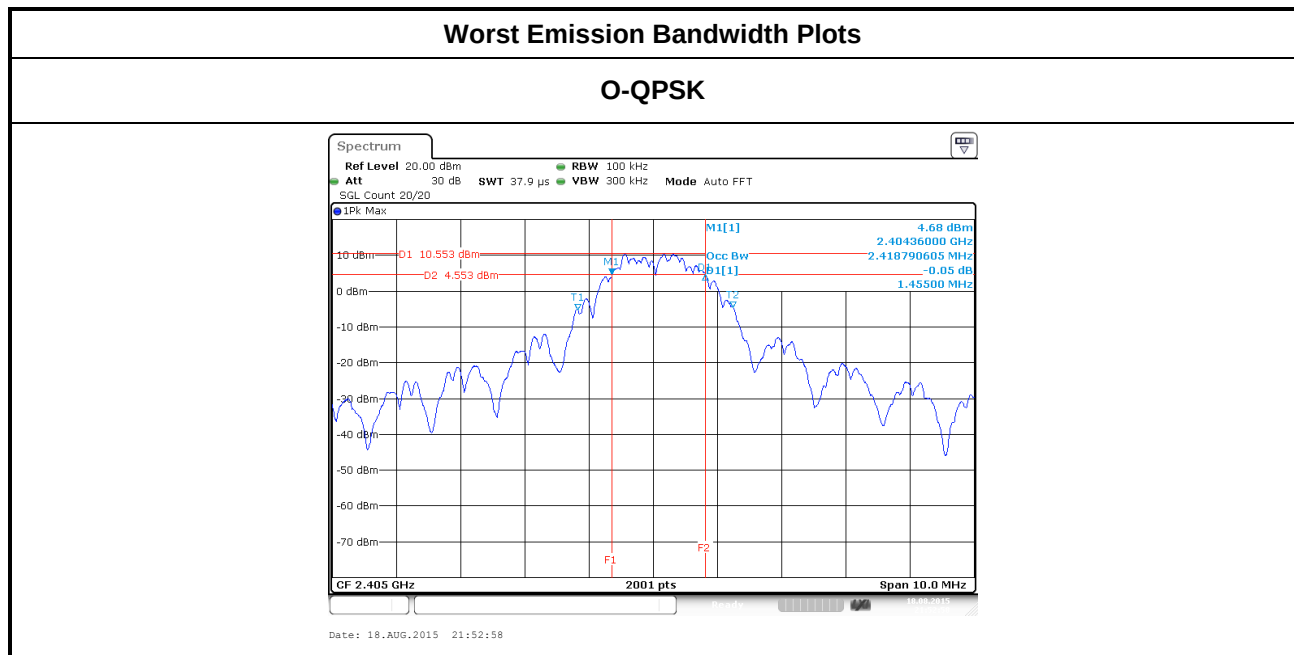

3.3 RF Output Power

3.3.1 RF Output Power Limit

RF Output Power Limit	
Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
☒ 2400-2483.5 MHz Band:	
☒	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
☒	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
☐	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
☐	Smart antenna system (SAS):
☐	Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
☐	Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
☐	Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
☒ 2400-2483.5 MHz Band	
☒	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
☐	Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
☐	Smart antenna system (SAS)
☐	Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
☐	Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
☐	Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
☒	Maximum Peak Conducted Output Power
☐	Refer as FCC KDB 558074, clause 9.1.1 (RBW ≥ EBW method).
☒	Refer as FCC KDB 558074, clause 9.1.2 (peak power meter for VBW ≥ DTS BW).
☒	Maximum Conducted Output Power
	[duty cycle ≥ 98% or external video / power trigger]
☐	Refer as FCC KDB 558074, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
☐	Refer as FCC KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
	RF power meter and average over on/off periods with duty factor or gated trigger
☒	Refer as FCC KDB 558074, clause 9.2.3 Method AVGPM (using an RF average power meter).
☒	For conducted measurement.
☐	The EUT supports single transmit chain and measurements performed on this transmit chain.
☒	The EUT supports diversity transmitting and the results on transmit chip 1 is the worst case.
☐	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
☐	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

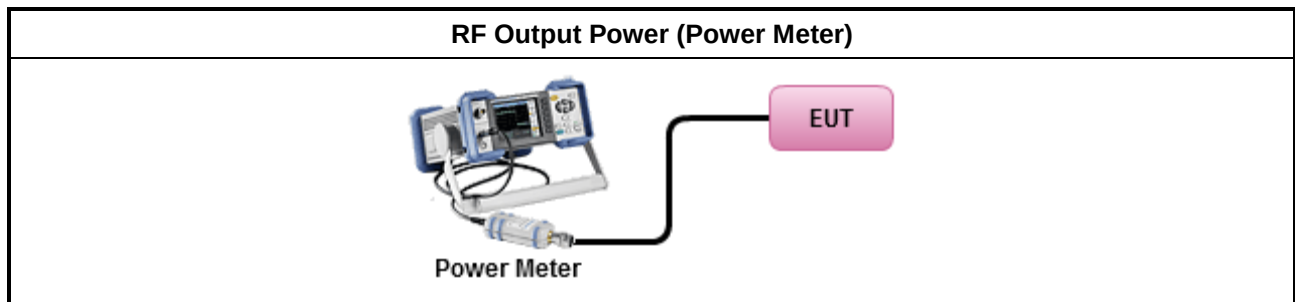

3.3.5 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result							
Condition			RF Output Power (dBm)				
Modulation Mode	N _{TX}	Freq. (MHz)	RF Output Power	Power Limit	Ant. Gain (dBi)	EIRP Power	EIRP Limit
O-QPSK	1	2405	19.53	30.00	2.10	21.63	36.00
O-QPSK	1	2440	20.20	30.00	2.10	22.30	36.00
O-QPSK	1	2475	11.41	30.00	2.10	13.51	36.00
Result			Complied				

3.3.6 Test Result of Maximum Conducted Output Power

Maximum Conducted Output Power							
Condition			RF Output Power (dBm)				
Modulation Mode	N _{TX}	Freq. (MHz)	RF Output Power	Power Limit	Ant. Gain (dBi)	EIRP Power	EIRP Limit
O-QPSK	1	2405	16.82	30.00	2.10	18.92	36.00
O-QPSK	1	2440	17.47	30.00	2.10	19.57	36.00
O-QPSK	1	2475	8.70	30.00	2.10	10.80	36.00
Result			Complied				

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit	
☒	Power Spectral Density (PSD) $\leq$ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures


Test Method	
☒	Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
☒	Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz;detector=peak).. [duty cycle $\geq$ 98% or external video / power trigger]
☒	Refer as FCC KDB 558074, clause 10.3 Method AVGPS-1 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 10.4 Method AVGPS-1 Alt. (slow sweep speed) duty cycle < 98% and average over on/off periods with duty factor
☐	Refer as FCC KDB 558074, clause 10.5 Method AVGPS-2 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 10.6 Method AVGPS-2 Alt. (slow sweep speed)
☒	For conducted measurement.
☐	The EUT supports single transmit chain and measurements performed on this transmit chain.
☒	The EUT supports diversity transmitting and the results on transmit chip 1 is the worst case.
☐	The EUT supports multiple transmit chains using options given below:
☐	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N _{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

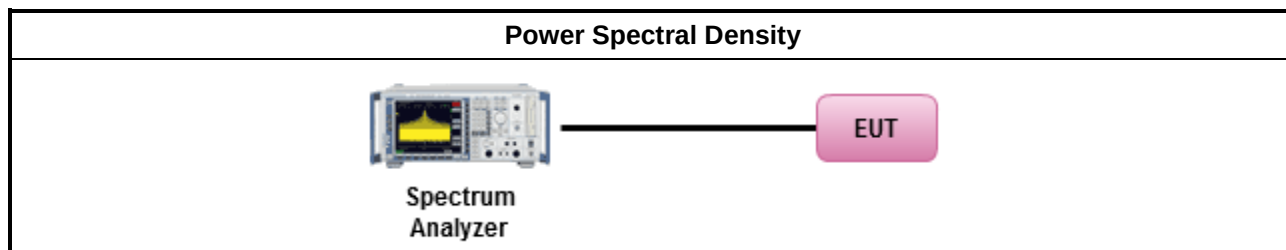


3.4.5 Test Result of Power Spectral Density

Power Spectral Density Result				
Modulation Mode	N _{TX}	Freq. (MHz)	Power Spectral Density (dBm/100kHz)	Power Limit (dBm/3kHz)
O-QPSK	1	2405	-3.11	8.00
O-QPSK	1	2440	-2.72	8.00
O-QPSK	1	2475	-9.62	8.00
Result			Complied	

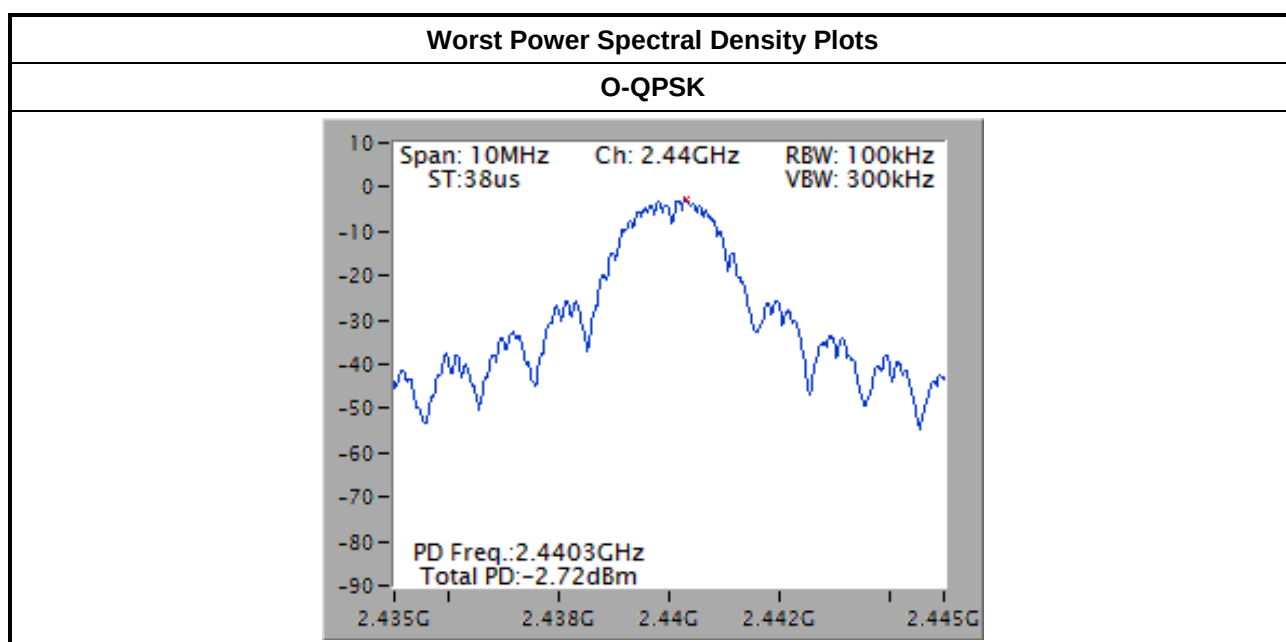

3.5 Transmitter Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

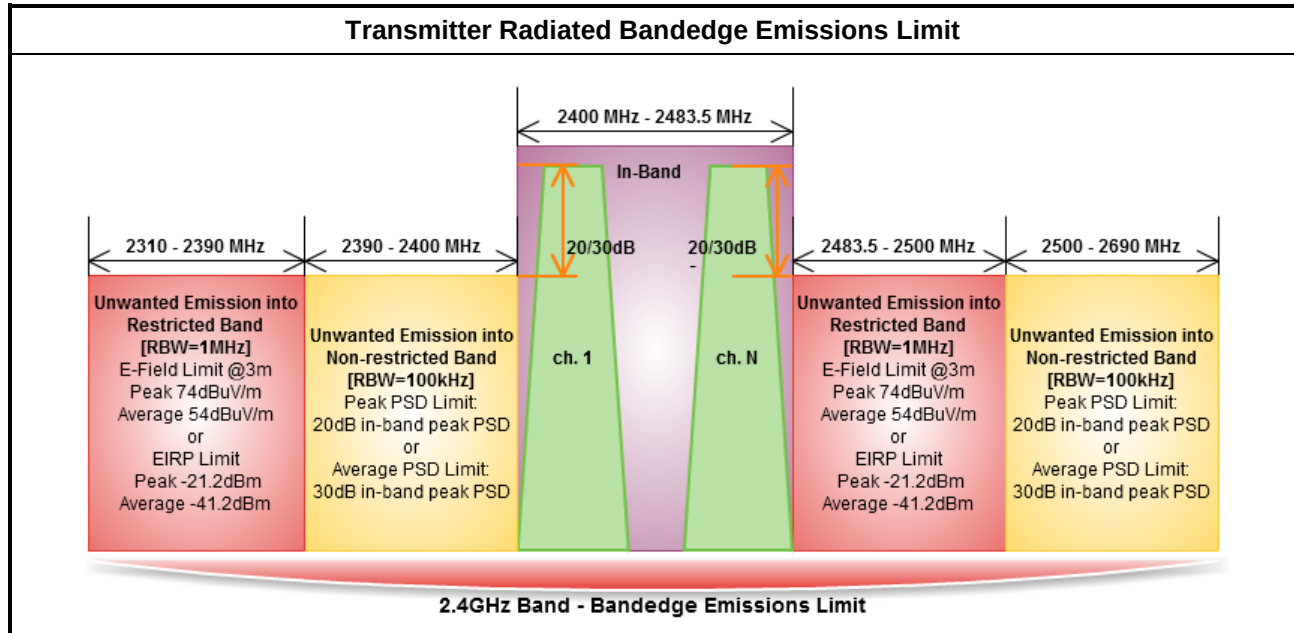


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
☒	The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].
☒	Refer as ANSI C63.10, clause 6.10 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
☒	Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq 98\%$)
☐	Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
☐	Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW $\geq 1/T$).
☐	Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
☐	Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions.
☒	Refer as FCC KDB 558074, clause 12.2.4 measurement procedure peak limit.
☒	For the transmitter bandedge emissions shall be measured using following options below:
☐	Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
☒	Refer as ANSI C63.10, clause 6.10 for band-edge testing.
☐	Refer as ANSI C63.10, clause 6.10.6.2 for marker-delta method for band-edge measurements.
☒	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7.

3.5.4 Test Setup

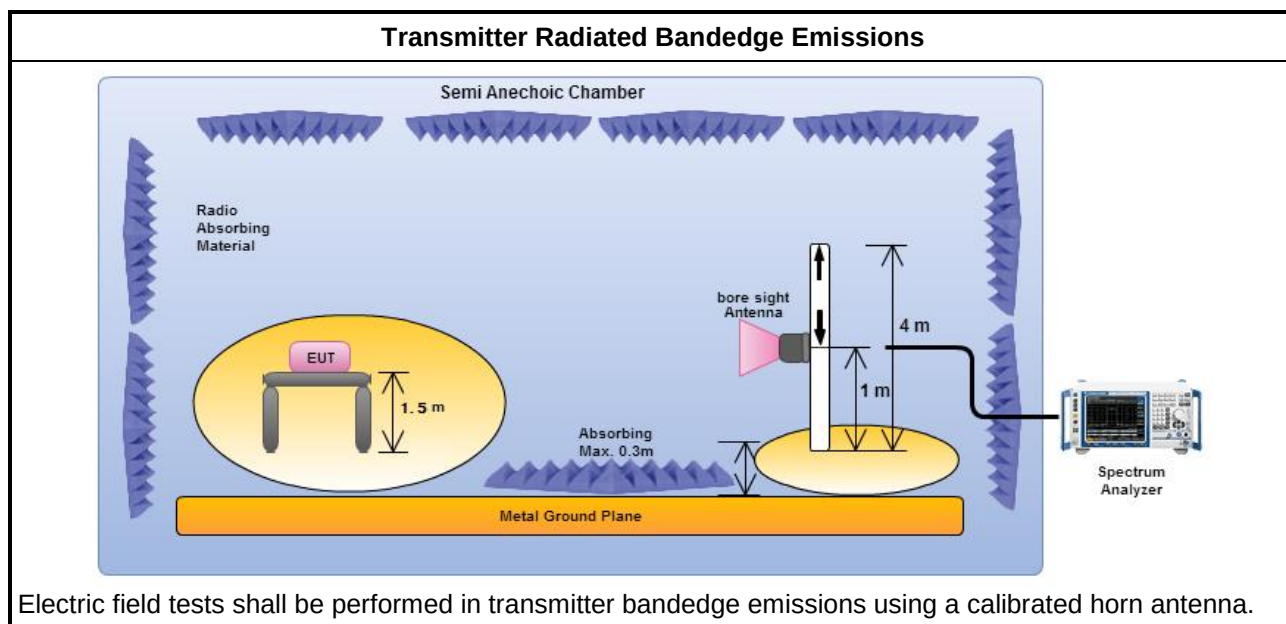

3.5.5 Transmitter Radiated Bandedge Emissions

2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Non-restricted Band)							
Modulation	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
O-QPSK	2405	108.45	2399.964	69.83	38.62	20	V
O-QPSK	2475	103.83	2529.530	63.97	39.86	20	V
Note 1: Measurement worst emissions of receive antenna polarization							

2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Restricted Band)									
Modulation Mode	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
O-QPSK	2405	3	2389.968	63.02	74	2389.968	52.45	54	V
O-QPSK	2475	3	2483.530	63.53	74	2483.530	52.20	54	V
Note 1: Measurement worst emissions of receive antenna polarization.									

3.6 Transmitter Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.



3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
☒	The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
☒	Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq 98\%$)
☐	Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
☐	Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW $\geq 1/T$).
☐	Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
☐	Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions.
☒	Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
☒	Refer as FCC KDB 558074, clause 12.2.3 measurement procedure Quasi-Peak limit.
☒	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
☒	The any unwanted emissions level shall not exceed the fundamental emission level.
☒	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


3.6.4 Test Setup

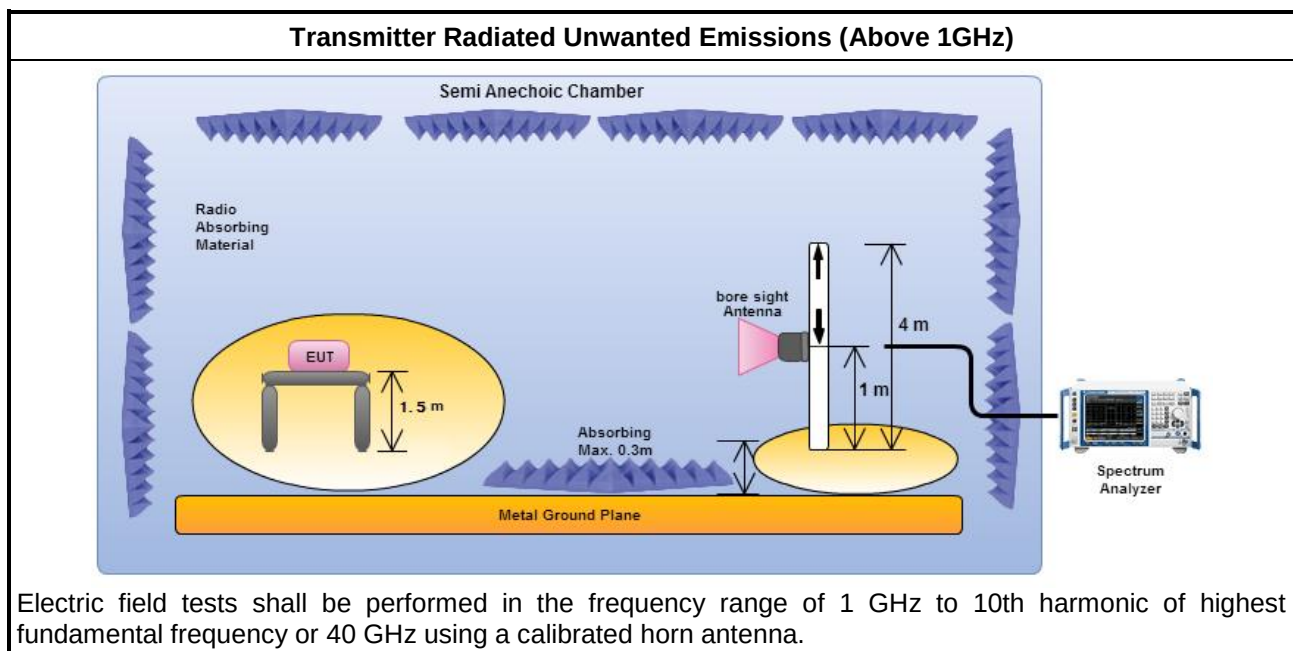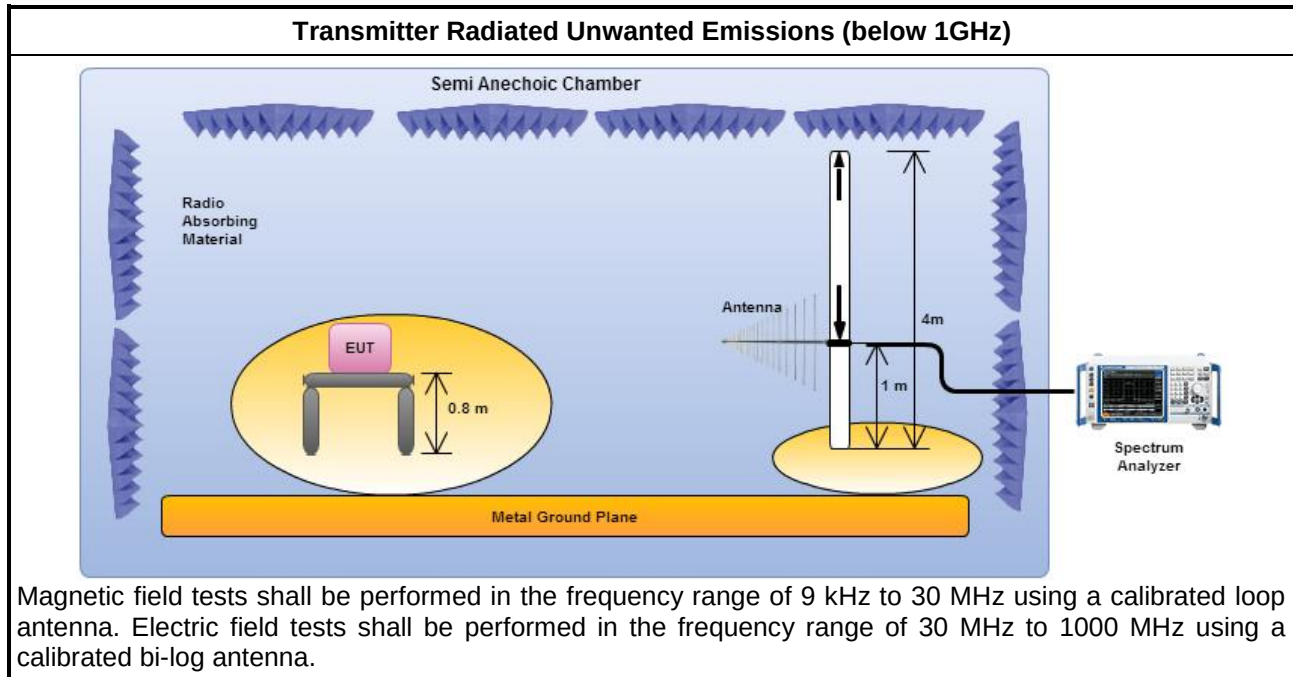

3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

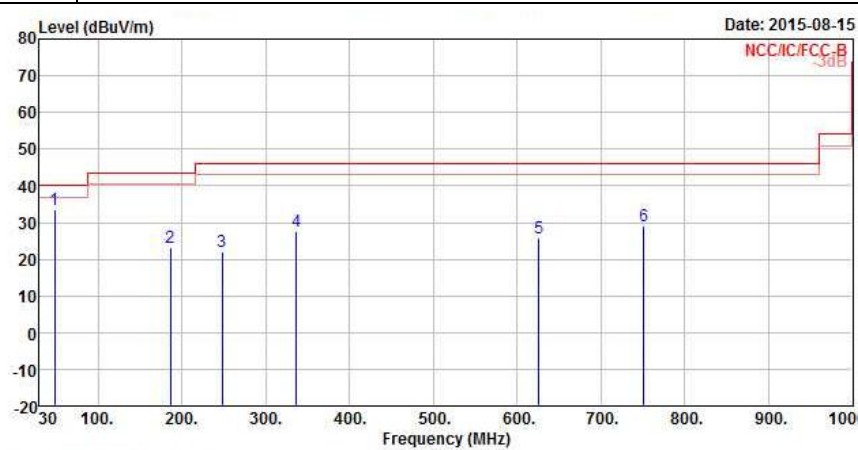Transmitter Radiated Unwanted Emissions (Below 1GHz)																																																																																
Operating Mode	3			Polarization		V																																																																										
Operating Function	Sample 2(Chip 1) & AC Power & Radio link (Zigbee)																																																																															
Level (dBuV/m) Date: 2015-08-15 NCC/IC/FCC-B 3dB  The graph displays the measured level in dBuV/m against frequency in MHz from 30 to 1000 MHz. A red line represents the NCC/IC/FCC-B limit, which is 40 dBuV/m from 30 to 100 MHz, 45 dBuV/m from 100 to 1000 MHz, and 55 dBuV/m above 1000 MHz. Six blue vertical lines indicate measured peaks at 48.430 MHz, 186.170 MHz, 248.250 MHz, 336.520 MHz, 625.580 MHz, and 750.710 MHz. The levels are 33.41, 23.15, 22.23, 27.73, 25.82, and 29.15 dBuV/m respectively, all well below the limit.																																																																																
<table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Cable Factor</th><th>Preamplifier Loss</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>48.430</td><td>33.41</td><td>-6.59</td><td>40.00</td><td>51.29</td><td>8.85</td><td>0.94</td><td>27.67 Peak</td></tr><tr><td>2</td><td>186.170</td><td>23.15</td><td>-20.35</td><td>43.50</td><td>39.88</td><td>8.79</td><td>1.97</td><td>27.49 Peak</td></tr><tr><td>3</td><td>248.250</td><td>22.23</td><td>-23.77</td><td>46.00</td><td>35.24</td><td>11.91</td><td>2.32</td><td>27.24 Peak</td></tr><tr><td>4</td><td>336.520</td><td>27.73</td><td>-18.27</td><td>46.00</td><td>38.87</td><td>13.49</td><td>2.72</td><td>27.35 Peak</td></tr><tr><td>5</td><td>625.580</td><td>25.82</td><td>-20.18</td><td>46.00</td><td>31.72</td><td>18.72</td><td>3.78</td><td>28.40 Peak</td></tr><tr><td>6</td><td>750.710</td><td>29.15</td><td>-16.85</td><td>46.00</td><td>33.78</td><td>19.36</td><td>4.17</td><td>28.16 Peak</td></tr></table>										Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	48.430	33.41	-6.59	40.00	51.29	8.85	0.94	27.67 Peak	2	186.170	23.15	-20.35	43.50	39.88	8.79	1.97	27.49 Peak	3	248.250	22.23	-23.77	46.00	35.24	11.91	2.32	27.24 Peak	4	336.520	27.73	-18.27	46.00	38.87	13.49	2.72	27.35 Peak	5	625.580	25.82	-20.18	46.00	31.72	18.72	3.78	28.40 Peak	6	750.710	29.15	-16.85	46.00	33.78	19.36	4.17	28.16 Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	Remark																																																																								
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																								
1	48.430	33.41	-6.59	40.00	51.29	8.85	0.94	27.67 Peak																																																																								
2	186.170	23.15	-20.35	43.50	39.88	8.79	1.97	27.49 Peak																																																																								
3	248.250	22.23	-23.77	46.00	35.24	11.91	2.32	27.24 Peak																																																																								
4	336.520	27.73	-18.27	46.00	38.87	13.49	2.72	27.35 Peak																																																																								
5	625.580	25.82	-20.18	46.00	31.72	18.72	3.78	28.40 Peak																																																																								
6	750.710	29.15	-16.85	46.00	33.78	19.36	4.17	28.16 Peak																																																																								
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)																																																																																

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	3	Polarization	H
Operating Function	Sample 2(Chip 1) & AC Power & Radio link (Zigbee)		

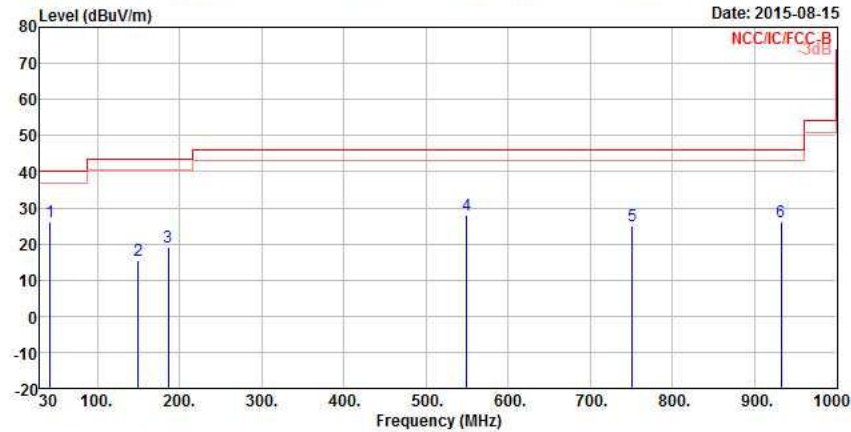


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	42.610	26.28	-13.72	40.00	42.29	10.83	0.89	27.73 Peak
2	149.310	15.55	-27.95	43.50	31.13	10.26	1.76	27.60 Peak
3	186.170	18.99	-24.51	43.50	35.72	8.79	1.97	27.49 Peak
4	549.920	28.06	-17.94	46.00	34.43	18.52	3.53	28.42 Peak
5	750.710	25.11	-20.89	46.00	29.74	19.36	4.17	28.16 Peak
6	932.100	26.22	-19.78	46.00	28.73	20.34	4.67	27.52 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

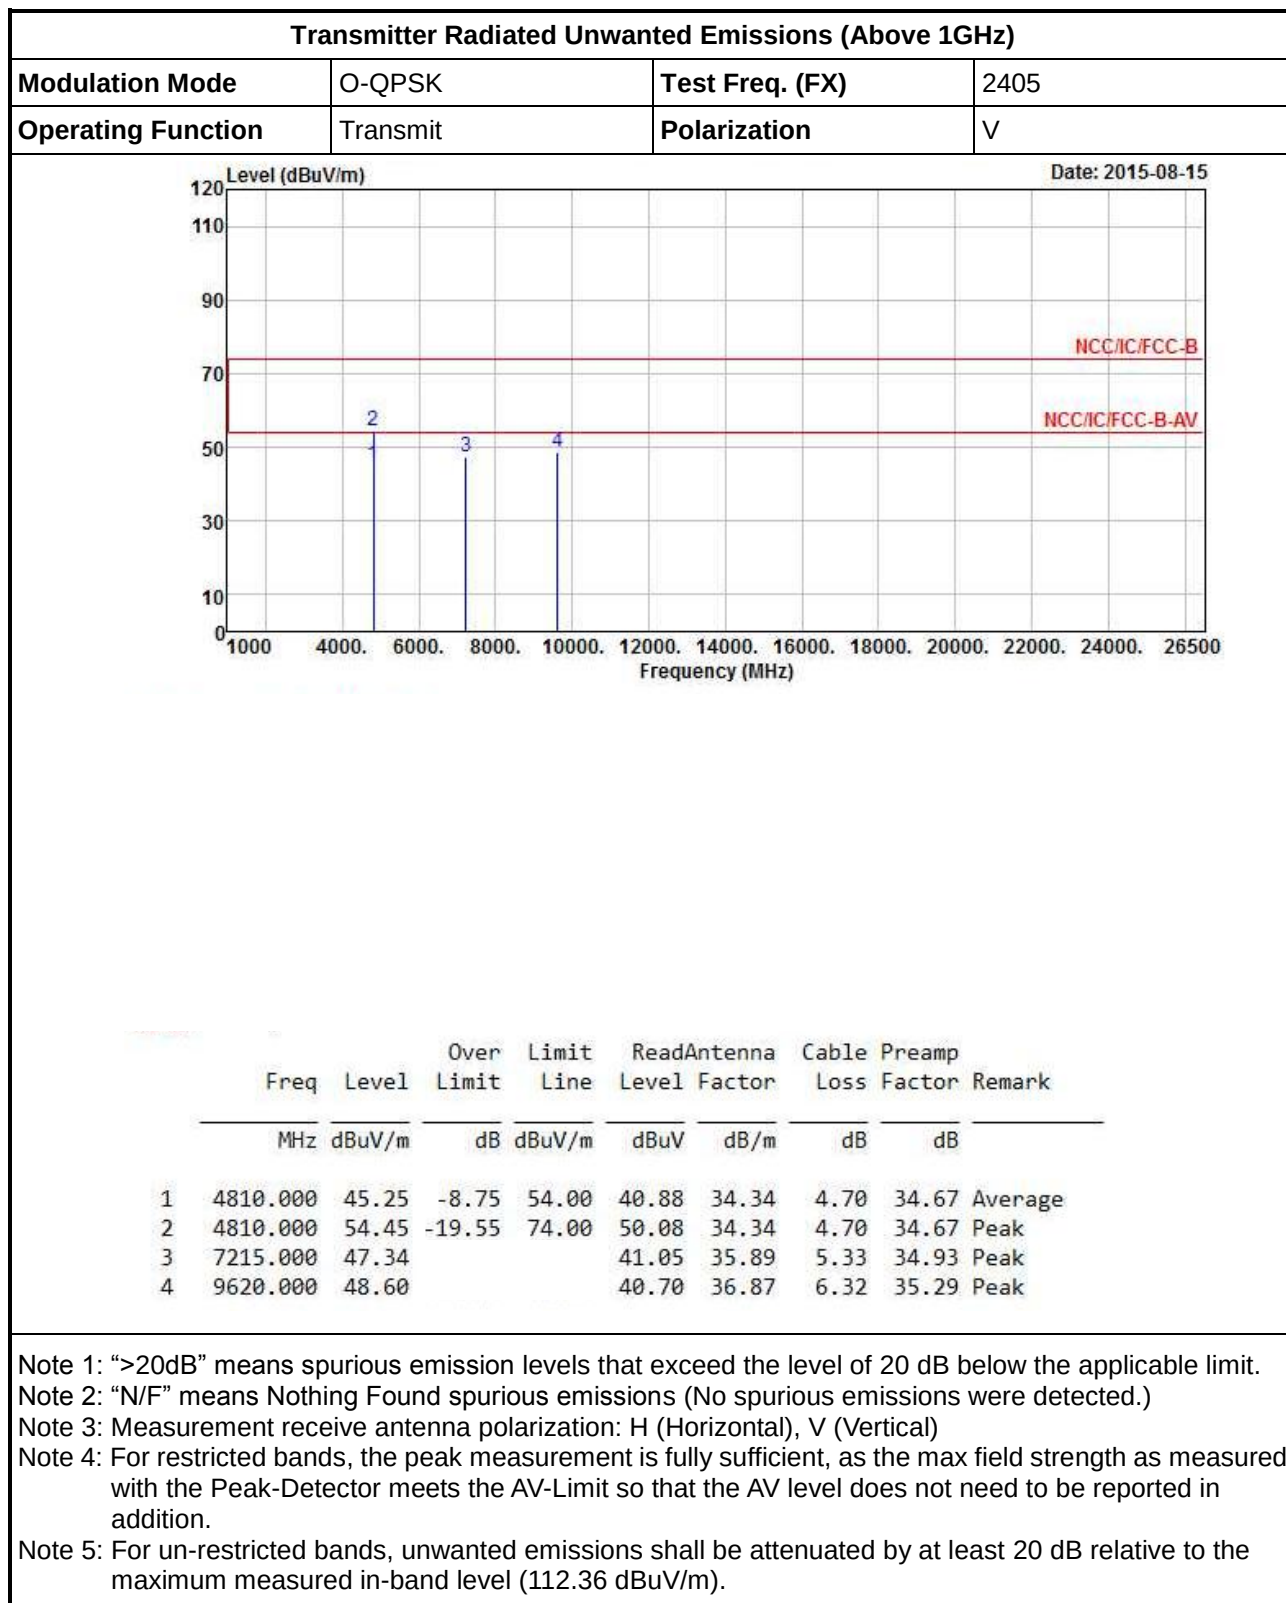

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	O-QPSK	Test Freq. (FX)	2405
Operating Function	Transmit	Polarization	H

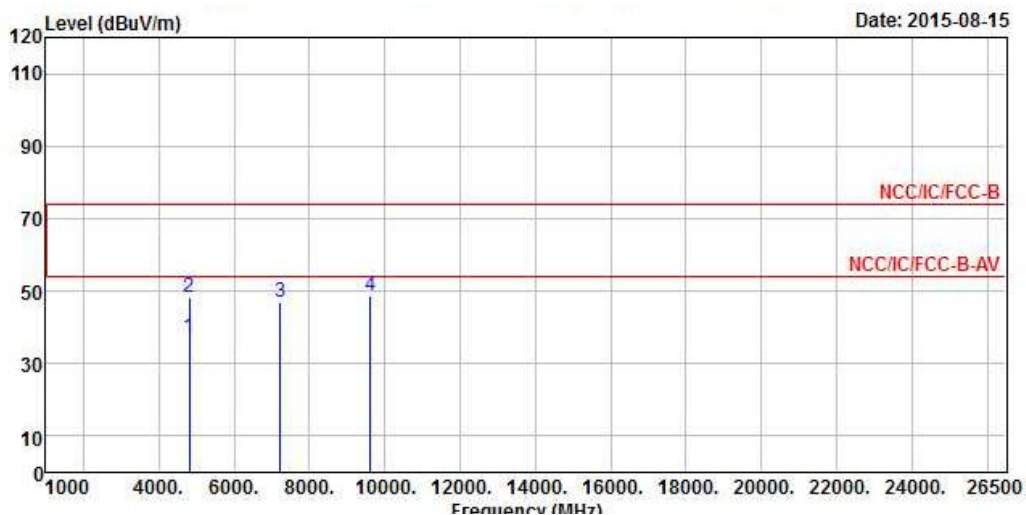

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4810.000	37.13	-16.87	54.00	32.76	34.34	4.70	34.67	Average
2	4810.000	48.17	-25.83	74.00	43.80	34.34	4.70	34.67	Peak
3	7215.000	46.81			40.52	35.89	5.33	34.93	Peak
4	9620.000	48.71			40.81	36.87	6.32	35.29	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (112.36 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	O-QPSK	Test Freq. (FX)	2440
Operating Function	Transmit	Polarization	V

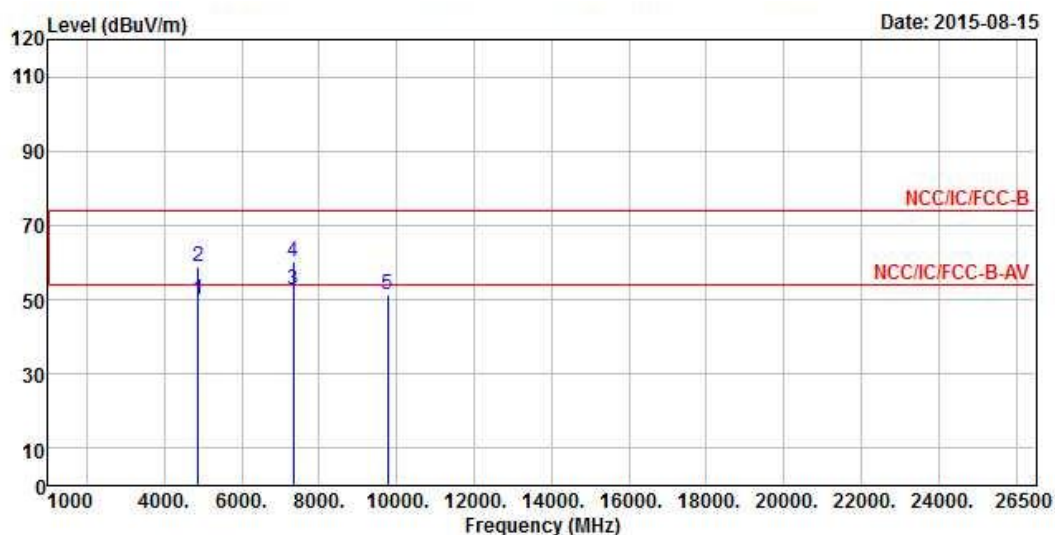

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4880.000	50.02	-3.98	54.00	45.62	34.32	4.73	34.65 Average
2	4880.000	59.00	-15.00	74.00	54.60	34.32	4.73	34.65 Peak
3	7320.000	52.56	-1.44	54.00	46.11	35.93	5.47	34.95 Average
4	7320.000	60.11	-13.89	74.00	53.66	35.93	5.47	34.95 Peak
5	9760.000	51.25			43.15	36.96	6.44	35.30 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (119.93 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	O-QPSK	Test Freq. (FX)	2440
Operating Function	Transmit	Polarization	H

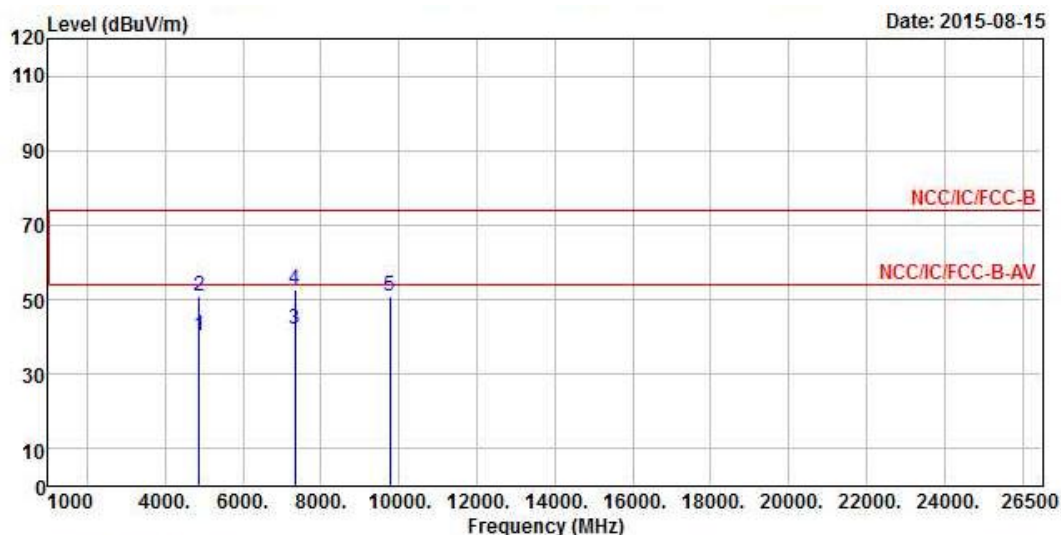

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4880.000	40.11	-13.89	54.00	35.71	34.32	4.73	34.65 Average
2	4880.000	50.85	-23.15	74.00	46.45	34.32	4.73	34.65 Peak
3	7320.000	42.22	-11.78	54.00	35.77	35.93	5.47	34.95 Average
4	7320.000	52.87	-21.13	74.00	46.42	35.93	5.47	34.95 Peak
5	9760.000	50.83			42.73	36.96	6.44	35.30 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (119.93 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	O-QPSK	Test Freq. (FX)	2475
Operating Function	Transmit	Polarization	V

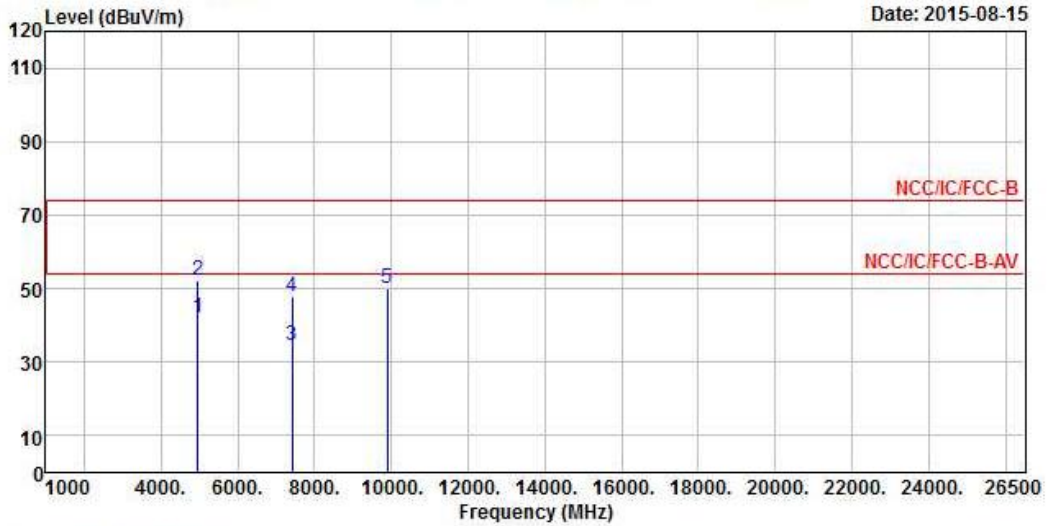

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4950.000	42.25	-11.75	54.00	37.77	34.31	4.79	34.62	Average
2	4950.000	52.26	-21.74	74.00	47.78	34.31	4.79	34.62	Peak
3	7425.000	34.67	-19.33	54.00	28.06	35.97	5.61	34.97	Average
4	7425.000	47.62	-26.38	74.00	41.01	35.97	5.61	34.97	Peak
5	9900.000	50.00			41.73	37.05	6.53	35.31	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (107.48 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	O-QPSK	Test Freq. (FX)	2475
Operating Function	Transmit	Polarization	H

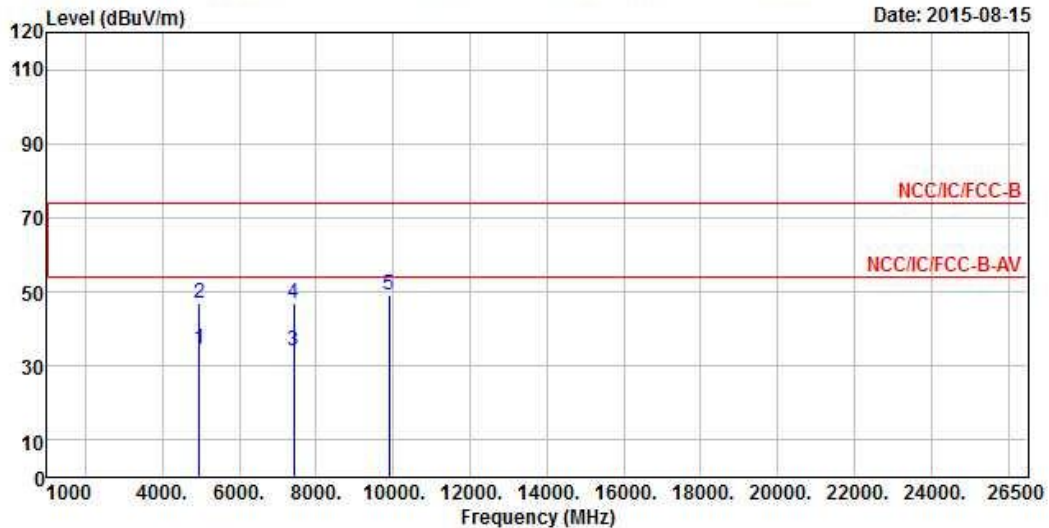

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4950.000	34.47	-19.53	54.00	29.99	34.31	4.79	34.62 Average
2	4950.000	46.88	-27.12	74.00	42.40	34.31	4.79	34.62 Peak
3	7425.000	34.24	-19.76	54.00	27.63	35.97	5.61	34.97 Average
4	7425.000	47.07	-26.93	74.00	40.46	35.97	5.61	34.97 Peak
5	9900.000	49.06			40.79	37.05	6.53	35.31 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (107.48 dBuV/m).

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Apr. 15, 2015	AC Conduction
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 22, 2015	AC Conduction
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	Oct. 31, 2014	AC Conduction
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	NCR	AC Conduction

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101500	9KHz~40GHz	May. 06, 2015	RF Conducted
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jul. 28, 2015	RF Conducted
Power Sensor	Anritsu	MA2411B	0917017	300MHz ~ 40GHz	Feb. 17, 2015	RF Conducted
Power Meter	Anritsu	ML2495A	0949003	300MHz ~ 40GHz	Feb. 17, 2015	RF Conducted

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Oct. 02, 2014	Radiation
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 03, 2015	Radiation
Amplifier	Agilent	8447D	2944A11149	100kHz ~ 1.3GHz	Jul. 24, 2015	Radiation
Amplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	Aug. 28, 2014	Radiation
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 28, 2014	Radiation
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170614	18GHz ~ 40GHz	Dec. 29, 2014	Radiation
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 08, 2014	Radiation
RF Cable-high	SUHNER	SUCOFLEX106	MY17173/4	1GHz ~ 40GHz	Mar. 04, 2015	Radiation
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Sep 20, 2014	Radiation
Turn Table	Chaintek Instruments	3000	MF7802058	0~ 360 degree	N/A	Radiation
Antenna Mast	MF	MF7802	MF780208205	1 ~ 4 m	N/A	Radiation

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz~30 MHz	Feb. 02, 2015	Radiation

Note: Calibration Interval of instruments listed above is two year.