

FCC RADIO TEST REPORT

FCC ID:2AEWY-NL42

Product: Nanoleaf Shapes Hexagon
Trade Name: Nanoleaf
Model Name: NL42
Serial Model: N/A
Report No.: UNIA19112707ER-01

Prepared for

NANOGRID LIMITED
ROOM 1405, 135 BONHAM STRAND TRADE CENTRE,
135 BONHAM STRAND, SHEUNG WAN, Hong Kong

Prepared by

Shenzhen United Testing Technology Co., Ltd.
2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang
Community, Xixiang Str, Bao'an District, Shenzhen, China

TEST RESULT CERTIFICATION

Applicant's name..... : NANOGRID LIMITED
Address..... : ROOM 1405, 135 BONHAM STRAND TRADE CENTRE,
135 BONHAM STRAND, SHEUNG WAN, Hong Kong
Manufacture's Name..... : NANOGRID LIMITED
Address..... : ROOM 1405, 135 BONHAM STRAND TRADE CENTRE,
135 BONHAM STRAND, SHEUNG WAN, Hong Kong

Product description

Product name..... : Nanoleaf Shapes Hexagon
Trade Mark..... : Nanoleaf
Model and/or type reference : NL42
Standards..... : FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013

This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of UNI, this document may be altered or revised by Shenzhen United Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

Date of Test..... :
Date (s) of performance of tests..... : Nov. 27, 2019 ~ Mar. 28, 2020
Date of Issue..... : Mar. 28, 2020
Test Result..... : Pass

Prepared by:

Bob Liao

Bob Liao/Editor

Reviewer:

Kahn Yang
Kahn Yang/Supervisor

Approved & Authorized Signer:

Liuze
Liuze/Manager

Table of Contents

Page

1. TEST SUMMARY.....	5
2. GENERAL INFORMATION.....	6
2.1 GENERAL DESCRIPTION OF EUT.....	6
2.2 Carrier Frequency of Channels.....	7
2.3 Operation of EUT during testing.....	7
2.4 DESCRIPTION OF TEST SETUP.....	7
2.5 MEASUREMENT INSTRUMENTS LIST.....	8
3. CONDUCTED EMISSIONS TEST.....	9
3.1 Conducted Power Line Emission Limit.....	9
3.2 Test Setup.....	9
3.3 Test Procedure.....	9
3.4 Test Result.....	9
4 RADIATED EMISSION TEST.....	12
4.1 Radiation Limit.....	12
4.2 Test Setup.....	12
4.3 Test Procedure.....	13
4.4 Test Result.....	14
5 BAND EDGE.....	28
5.1 Limits.....	28
5.2 Test Procedure.....	28
5.3 Test Result.....	28
6 OCCUPIED BANDWIDTH MEASUREMENT.....	36
6.1 Test Limit.....	36
6.2 Test Procedure.....	36
6.3 Measurement Equipment Used.....	36
6.4 Test Result.....	36
7 POWER SPECTRAL DENSITY TEST.....	45
7.1 Test Limit.....	45
7.2 Test Procedure.....	45
7.3 Measurement Equipment Used.....	45
7.4 Test Result.....	45
8 PEAK OUTPUT POWER TEST.....	54
8.1 Test Limit.....	54
8.2 Test Procedure.....	54
8.3 Measurement Equipment Used.....	54

Table of Contents

Page

8.4 Test Result.....	54
9 OUT OF BAND EMISSIONS TEST.....	55
9.1 Test Limit.....	55
9.2 Test Procedure.....	55
9.3 Test Setup.....	55
9.4 Test Result.....	55
10 ANTENNA REQUIREMENT.....	60
8 PHOTOGRAPH OF TEST.....	61
8.1 Radiated Emission.....	61
8.2 Conducted Emission.....	62

1. TEST SUMMARY

TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	RESULT	
CONDUCTED EMISSIONS TEST	COMPLIANT	FCC Part 15.207
RADIATED EMISSION TEST	COMPLIANT	FCC Part 15.209(a)
BAND EDGE	COMPLIANT	FCC Part 15.247(d)
OCCUPIED BANDWIDTH MEASUREMENT	COMPLIANT	FCC Part 15.247(a)(2)
POWER SPECTRAL DENSITY	COMPLIANT	FCC Part 15.247(e)
PEAK OUTPUT POWER	COMPLIANT	FCC Part 15.247(b)
OUT OF BAND EMISSIONS	COMPLIANT	FCC Part 15.247(d)
ANTENNA REQUIREMENT	COMPLIANT	FCC Part 15.203

TEST FACILITY

Test Firm : Shenzhen United Testing Technology Co., Ltd.
 Address : 2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang Community, Xixiang Str, Bao'an District, Shenzhen, China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

A2LA Certificate Number: 4747.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 21947

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

MEASUREMENT UNCERTAINTY

Measurement Uncertainty	
Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Nanoleaf Shapes Hexagon
Trade Mark	Nanoleaf
Model Name	NL42
Serial No.	N/A
Model Difference	N/A
FCC ID	2AEWY-NL42
Antenna Type	PCB Antenna
Antenna Gain	2.1dBi
Frequency Range	802.11b/g/n20: 2412~2462 MHz 802.11n40: 2422-2452MHz
Number of Channels	802.11b/g/n20: 11CH 802.11n40: 7CH
Modulation Type	CCK, OFDM, DBPSK, DAPSK
Battery	N/A
Power Source	AC 100-240V~50/60Hz

2.2 Carrier Frequency of Channels

Channel List for 802.11b/g/n(20MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	05	2432	07	2442	09	2452
04	2427	06	2437	08	2447		

2.3 Operation of EUT during testing

Operating Mode

The mode is used: Transmitting mode for 802.11b/g/n(20MHz)

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

Transmitting mode for 802.11n(40MHz)

Low Channel: 2422MHz


Middle Channel: 2437MHz

High Channel: 2452MHz

Prototype duty cycle>98%

2.4 DESCRIPTION OF TEST SETUP

Operation of EUT during Conducted testing:



Operation of EUT during Radiation and Above 1GHz Radiation testing:




Table for auxiliary equipment:

Equipment Description	Manufacturer	Model	Calibration Due Date
N/A	N/A	N/A	N/A

2.5 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
Conduction Emissions Measurement					
1	Conducted Emission Test Software	EZ-EMC	Ver.CCS-3A1-CE	N/A	N/A
2	AMN	Schwarzbeck	NNLK8121	8121370	2020.10.15
3	AMN	ETS	3810/2	00020199	2020.10.15
4	AAN	TESEQ	T8-Cat6	38888	2020.10.15
5	Pulse Limiter	CYBRTEK	EM5010	E115010056	2020.05.26
6	EMI Test Receiver	Rohde&Schwarz	ESCI	101210	2020.10.15
Radiated Emissions Measurement					
1	Radiated Emission Test Software	EZ-EMC	Ver.CCS-03A1	N/A	N/A
2	Horn Antenna	Sunol	DRH-118	A101415	2020.10.18
3	Broadband Hybrid Antenna	Sunol	JB1	A090215	2020.11.15
4	PREAMP	HP	8449B	3008A00160	2020.10.21
5	PREAMP	HP	8447D	2944A07999	2020.05.26
6	EMI Test Receiver	Rohde&Schwarz	ESR3	101891	2020.10.15
7	MXA Signal Analyzer	Keysight	N9020A	MY51110104	2020.10.15
8	Active Loop Antenna	Com-Power	AL-310R	10160009	2020.05.28
9	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1680	2020.05.28
10	Horn Antenna	A-INFOMW	LB-180400-KF	J211060660	2020.10.23
11	Loop Antenna	Beijing daze Technology	ZN30401	13015	2020.10.15
12	EM Clamp	Schwarzbeck	MDS21	03350	2020.10.20

3. CONDUCTED EMISSIONS TEST

3.1 Conducted Power Line Emission Limit


For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following

Frequency (MHz)	Maximum RF Line Voltage(dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15~0.50	79	66	66~56*	56~46*
0.50~5.00	73	60	56	46
5.00~30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2 Test Setup

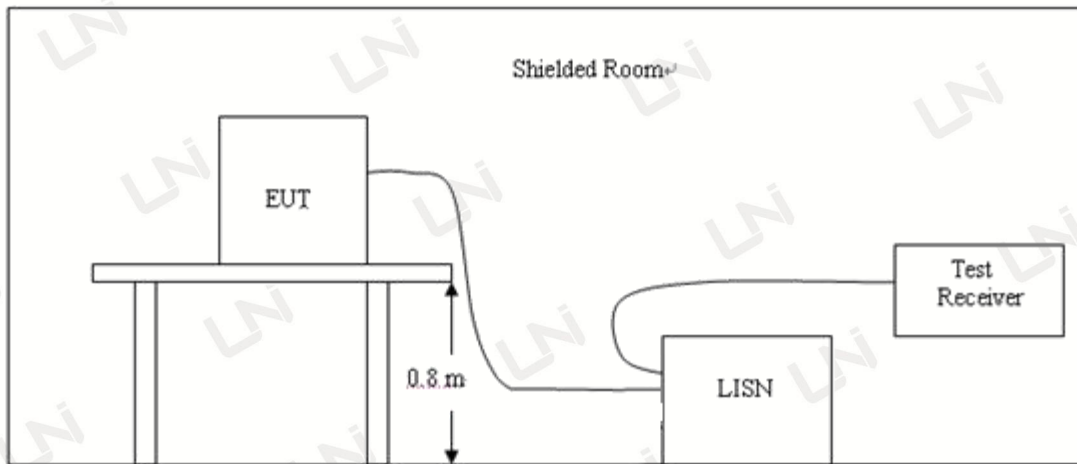

3.3 Test Procedure

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. A wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.


3.4 Test Result

Pass

Remark:

1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.
2. All modes were tested at Low, Middle, and High channel, only the worst result of 802.11b Low Channel was reported as below:


Temperature:	24°C	Relative Humidity:	48%
Test Date:	Dec. 14, 2019	Pressure:	1030hPa
Test Voltage:	AC 120V	Phase:	Line
Test Mode:	Transmitting mode of 802.11b 2412MHz		

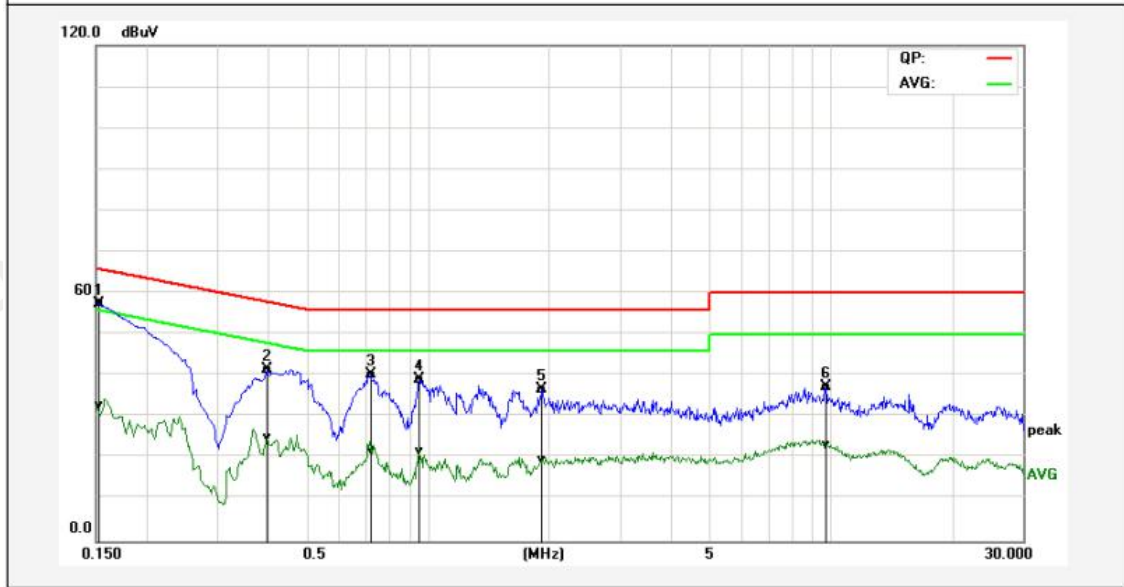

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.1539	48.24	23.14	9.65	57.89	32.79	65.78	55.79	-7.89	-23.00	Pass
2P	0.3980	31.75	15.29	9.82	41.57	25.11	57.89	47.90	-16.32	-22.79	Pass
3P	0.7220	30.50	12.15	9.82	40.32	21.97	56.00	46.00	-15.68	-24.03	Pass
4P	0.9580	29.24	11.77	9.85	39.09	21.62	56.00	46.00	-16.91	-24.38	Pass
5P	1.9220	26.85	9.73	9.88	36.73	19.61	56.00	46.00	-19.27	-26.39	Pass
6P	9.7299	27.57	13.36	9.91	37.48	23.27	60.00	50.00	-22.52	-26.73	Pass

Remark: Factor = Insertion Loss + Cable Loss, Result=Reading + Factor, Margin=Result – Limit.

Temperature:	24°C	Relative Humidity:	48%
Test Date:	Dec. 14, 2019	Pressure:	1030hPa
Test Voltage:	AC 120V	Phase:	Neutral
Test Mode:	Transmitting mode of 802.11b 2412MHz		

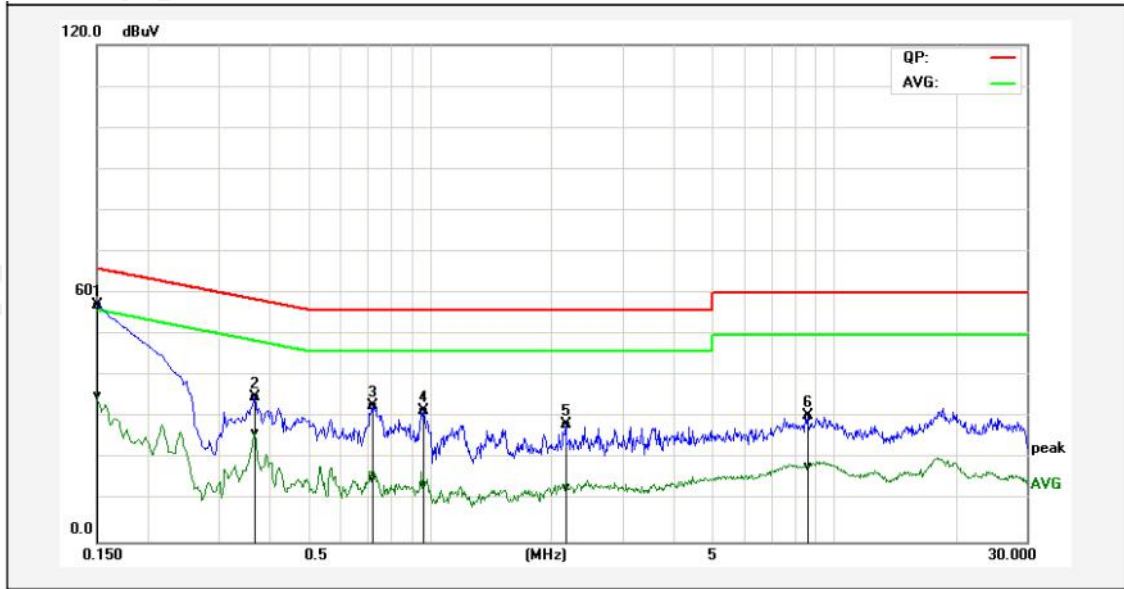

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.1500	47.43	25.48	9.64	57.07	35.12	65.99	56.00	-8.92	-20.88	Pass
2P	0.3700	25.07	16.46	9.82	34.89	26.28	58.50	48.50	-23.61	-22.22	Pass
3P	0.7220	23.05	5.35	9.82	32.87	15.17	56.00	46.00	-23.13	-30.83	Pass
4P	0.9660	21.65	3.64	9.87	31.52	13.51	56.00	46.00	-24.48	-32.49	Pass
5P	2.1700	18.54	3.15	9.90	28.44	13.05	56.00	46.00	-27.56	-32.95	Pass
6P	8.6140	20.35	8.24	9.95	30.30	18.19	60.00	50.00	-29.70	-31.81	Pass

Remark: Factor = Insertion Loss + Cable Loss, Result=Reading + Factor, Margin=Result – Limit.

4 RADIATED EMISSION TEST

4.1 Radiation Limit

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:


Limit calculation and transfer to 3m distance as showed in the following table:

Frequency (MHz)	Limit (dBuV/m)	Distance (m)
0.009-0.490	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	3
0.490-1.705	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	3
1.705-30.0	69.5	3
30-88	40.0	3
88-216	43.5	3
216-960	46.0	3
Above 960	54.0	3


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

4.2 Test Setup


1. Radiated Emission Test-Up Frequency Below 30MHz

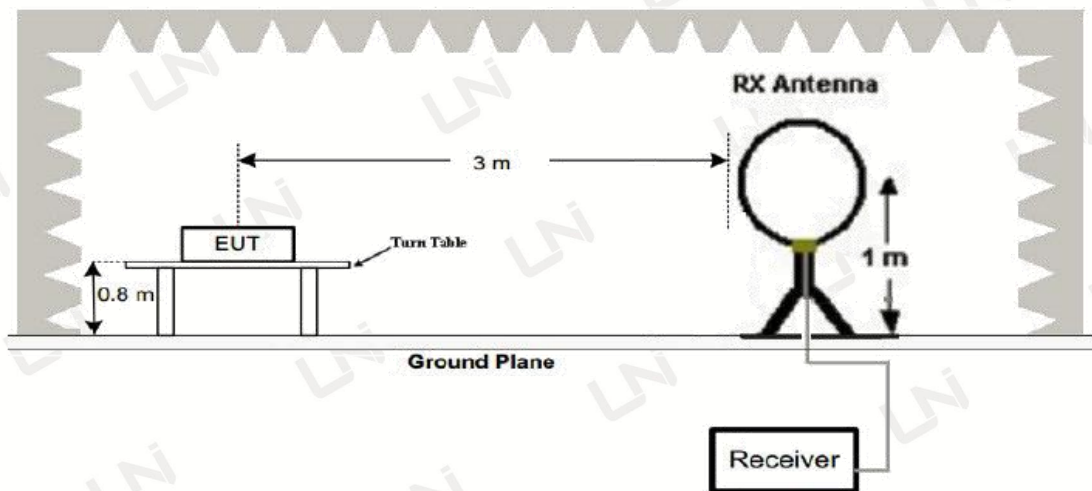

2. Radiated Emission Test-Up Frequency 30MHz~1GHz

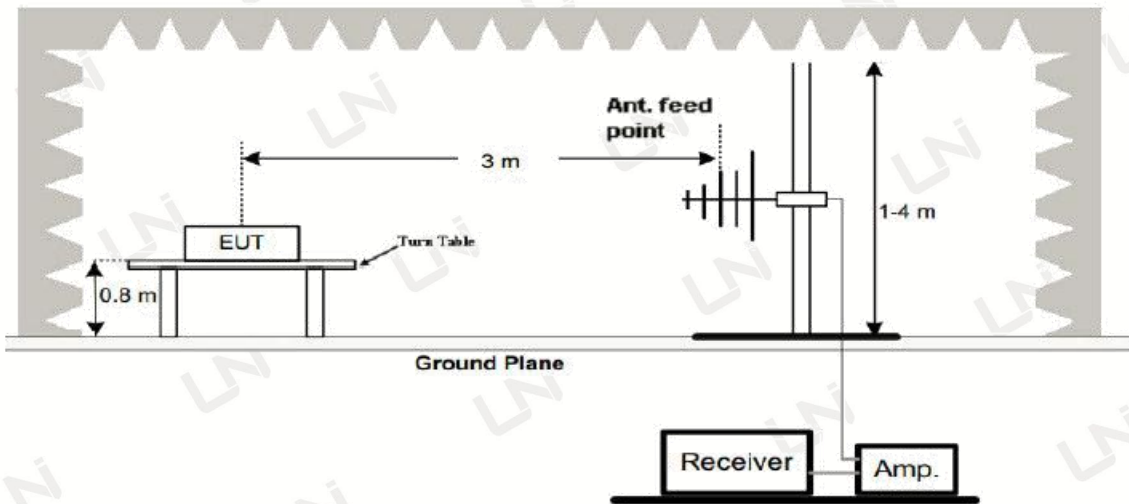

3. Radiated Emission Test-Up Frequency Above 1GHz

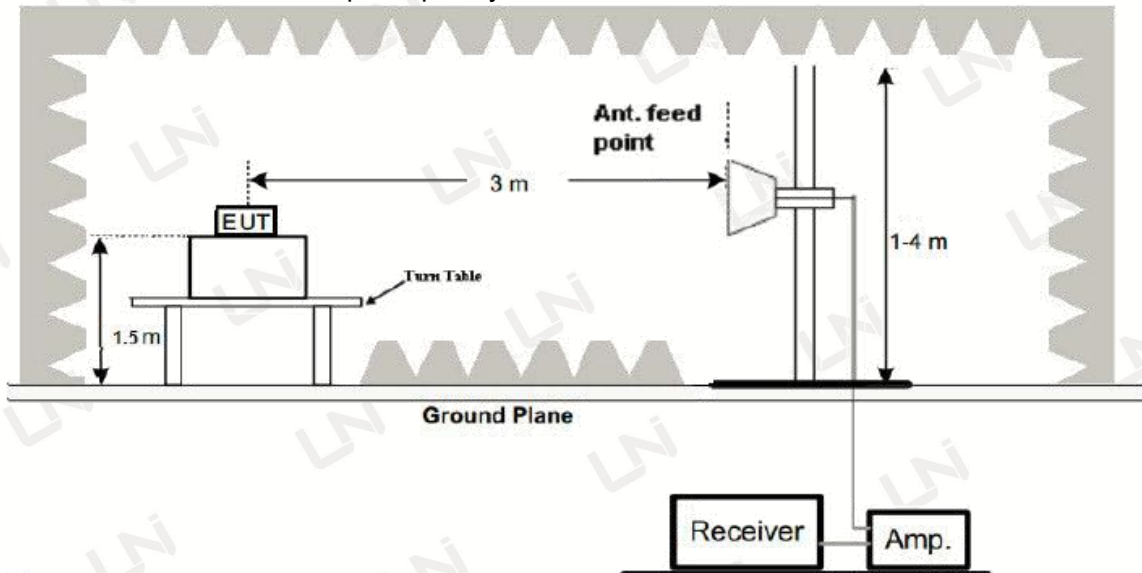

4.3 Test Procedure

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

4.4 Test Result


PASS

Remark:

1. All modes of 802.11b/g/n20/n40 were test at Low, Middle, and High channel, only the worst result of 802.11b High Channel was reported for below 1GHz test.
2. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.

Below 1GHz Test Results:

Temperature:	24°C	Relative Humidity:	48%
Test Date:	Jan. 14, 2020	Pressure:	1030hPa
Test Voltage:	AC 120V	Polarization:	Horizontal
Test Mode:	Transmitting mode of 802.11b 2462MHz		

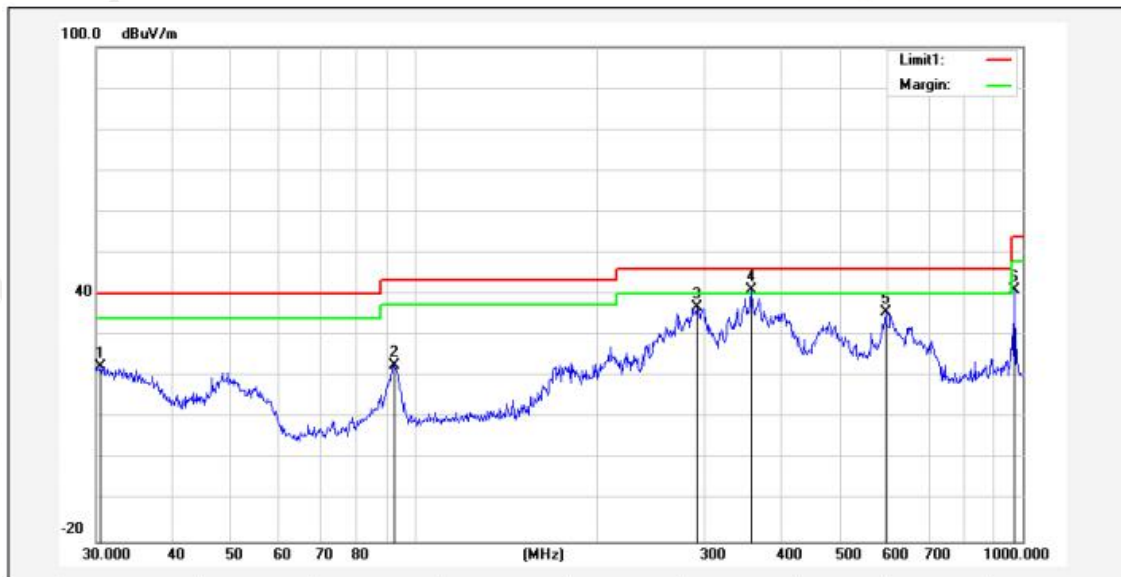

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	30.5306	29.98	-7.56	22.42	40.00	-17.58	120	100	peak
2	92.7872	43.32	-20.65	22.67	43.50	-20.83	150	100	peak
3	291.0360	52.05	-15.11	36.94	46.00	-9.06	270	100	peak
4*	357.9287	54.99	-14.07	40.92	46.00	-5.08	60	100	peak
5	595.1329	45.24	-9.52	35.72	46.00	-10.28	210	100	peak
6	968.9338	47.02	-5.98	41.04	54.00	-12.96	180	100	peak

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

Temperature:	24°C	Relative Humidity:	48%
Test Date:	Jan. 14, 2020	Pressure:	1030hPa
Test Voltage:	AC 120V	Polarization:	Vertical
Test Mode:	Transmitting mode of 802.11b 2462MHz		



No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	49.3594	54.53	-20.32	34.21	40.00	-5.79	120	100	peak
2	176.2686	42.62	-17.94	24.68	43.50	-18.82	140	100	peak
3	259.2338	44.32	-16.63	27.69	46.00	-18.31	300	100	peak
4	297.2241	45.36	-15.03	30.33	46.00	-15.67	60	100	peak
5	407.5145	41.11	-12.82	28.29	46.00	-17.71	120	100	peak
6	631.6884	36.81	-9.59	27.22	46.00	-18.78	240	100	peak

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

Above 1 GHz Test Results:

CH Low of 802.11b Mode (2412MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	62.71	-3.64	59.07	74	-14.93	PK
4824	51.68	-3.64	48.04	54	-5.96	AV
7236	57.92	-0.95	56.97	74	-17.03	PK
7236	47.32	-0.95	46.37	54	-7.63	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	62.35	-3.64	58.71	74	-15.29	PK
4824	50.81	-3.64	47.17	54	-6.83	AV
7236	58.31	-0.95	57.36	74	-16.64	PK
7236	47.26	-0.95	46.31	54	-7.69	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH Middle of 802.11b Mode (2437MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	61.95	-3.51	58.44	74	-15.56	PK
4874	51.06	-3.51	47.55	54	-6.45	AV
7311	57.35	-0.82	56.53	74	-17.47	PK
7311	47.01	-0.82	46.19	54	-7.81	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	61.88	-3.51	58.37	74	-15.63	PK
4874	51.60	-3.51	48.09	54	-5.91	AV
7311	58.31	-0.82	57.49	74	-16.51	PK
7311	47.61	-0.82	46.79	54	-7.21	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH High of 802.11b Mode (2462MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	62.34	-3.43	58.91	74	-15.09	PK
4924	50.46	-3.43	47.03	54	-6.97	AV
7386	57.39	-0.75	56.64	74	-17.36	PK
7386	47.16	-0.75	46.41	54	-7.59	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	62.07	-3.43	58.64	74	-15.36	PK
4924	51.31	-3.43	47.88	54	-6.12	AV
7386	57.86	-0.75	57.11	74	-16.89	PK
7386	47.36	-0.75	46.61	54	-7.39	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range ,that the value more than 20dB below limit is not record in the form.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

CH Low of 802.11g Mode (2412MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	62.02	-3.64	58.38	74	-15.62	PK
4824	51.32	-3.64	47.68	54	-6.32	AV
7236	58.64	-0.95	57.69	74	-16.31	PK
7236	47.25	-0.95	46.30	54	-7.70	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	62.34	-3.64	58.70	74	-15.30	PK
4824	51.51	-3.64	47.87	54	-6.13	AV
7236	57.86	-0.95	56.91	74	-17.09	PK
7236	47.61	-0.95	46.66	54	-7.34	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH Middle of 802.11g Mode (2437MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	62.31	-3.51	58.80	74	-15.20	PK
4874	50.42	-3.51	46.91	54	-7.09	AV
7311	57.64	-0.82	56.82	74	-17.18	PK
7311	47.24	-0.82	46.42	54	-7.58	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	61.54	-3.51	58.03	74	-15.97	PK
4874	50.63	-3.51	47.12	54	-6.88	AV
7311	57.68	-0.82	56.86	74	-17.14	PK
7311	47.39	-0.82	46.57	54	-7.43	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH High of 802.11g Mode (2462MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	61.55	-3.43	58.12	74	-15.88	PK
4924	50.30	-3.43	46.87	54	-7.13	AV
7386	57.89	-0.75	57.14	74	-16.86	PK
7386	47.65	-0.75	46.90	54	-7.10	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	62.03	-3.43	58.60	74	-15.40	PK
4924	50.67	-3.43	47.24	54	-6.76	AV
7386	57.69	-0.75	56.94	74	-17.06	PK
7386	47.26	-0.75	46.51	54	-7.49	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range ,that the value more than 20dB below limit is not record in the form.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

CH Low of 802.11n/H20 Mode (2412MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	61.35	-3.64	57.71	74	-16.29	PK
4824	50.46	-3.64	46.82	54	-7.18	AV
7236	57.69	-0.95	56.74	74	-17.26	PK
7236	47.62	-0.95	46.67	54	-7.33	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	61.59	-3.64	57.95	74	-16.05	PK
4824	49.67	-3.64	46.03	54	-7.97	AV
7236	57.51	-0.95	56.56	74	-17.44	PK
7236	47.69	-0.95	46.74	54	-7.26	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH Middle of 802.11n/H20 Mode (2437MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	61.34	-3.51	57.83	74	-16.17	PK
4874	50.49	-3.51	46.98	54	-7.02	AV
7311	56.87	-0.82	56.05	74	-17.95	PK
7311	47.64	-0.82	46.82	54	-7.18	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	62.13	-3.51	58.62	74	-15.38	PK
4874	50.69	-3.51	47.18	54	-6.82	AV
7311	57.15	-0.82	56.33	74	-17.67	PK
7311	47.63	-0.82	46.81	54	-7.19	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH High of 802.11n/H20 Mode (2462MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
4924	61.49	-3.43	58.06	74	-15.94	PK
4924	50.36	-3.43	46.93	54	-7.07	AV
7386	56.49	-0.75	55.74	74	-18.26	PK
7386	47.62	-0.75	46.87	54	-7.13	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
4924	61.59	-3.43	58.16	74	-15.84	PK
4924	50.36	-3.43	46.93	54	-7.07	AV
7386	57.49	-0.75	56.74	74	-17.26	PK
7386	47.06	-0.75	46.31	54	-7.69	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range ,that the value more than 20dB below limit is not record in the form.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

CH Low of 802.11n/H40 Mode (2422MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	61.38	-3.64	57.74	74	-16.26	PK
4844	50.63	-3.64	46.99	54	-7.01	AV
7266	57.64	-0.95	56.69	74	-17.31	PK
7266	46.85	-0.95	45.90	54	-8.10	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	62.01	-3.64	58.37	74	-15.63	PK
4844	50.31	-3.64	46.67	54	-7.33	AV
7266	57.69	-0.95	56.74	74	-17.26	PK
7266	46.99	-0.95	46.04	54	-7.96	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH Middle of 802.11n/H40 Mode (2437MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	61.32	-3.51	57.81	74	-16.19	PK
4874	50.42	-3.51	46.91	54	-7.09	AV
7311	57.46	-0.82	56.64	74	-17.36	PK
7311	47.31	-0.82	46.49	54	-7.51	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	60.97	-3.51	57.46	74	-16.54	PK
4874	49.65	-3.51	46.14	54	-7.86	AV
7311	57.62	-0.82	56.80	74	-17.20	PK
7311	46.88	-0.82	46.06	54	-7.94	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH High of 802.11n/H40 Mode (2452MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.34	-3.43	58.91	74	-15.09	PK
4904	51.46	-3.43	48.03	54	-5.97	AV
7356	57.62	-0.75	56.87	74	-17.13	PK
7356	47.26	-0.75	46.51	54	-7.49	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	60.87	-3.43	57.44	74	-16.56	PK
4904	50.67	-3.43	47.24	54	-6.76	AV
7356	57.69	-0.75	56.94	74	-17.06	PK
7356	47.95	-0.75	47.20	54	-6.80	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range ,that the value more than 20dB below limit is not record in the form.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

5 BAND EDGE

5.1 Limits

FCC PART 15.247 Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSIC63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 1MHz and VBM to 3MHz to measure the peak field strength and set RMS detector to measure the average radiated field strength. The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 100 KHz and VBW to 300 KHz, to measure the conducted peak band edge.

5.3 Test Result

PASS

Operation Mode: 802.11b Mode TX CH Low (2412MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	55.94	-5.81	50.13	74	-23.87	PK
2310	/	-5.81	/	54	/	AV
2390	63.28	-5.84	57.44	74	-16.56	PK
2390	48.27	-5.84	42.43	54	-11.57	AV
2400	64.13	-5.84	58.29	74	-15.71	PK
2400	50.61	-5.84	44.77	54	-9.23	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Reading result + Factor - Limits

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	54.26	-5.81	48.45	74	-25.55	PK
2310	/	-5.81	/	54	/	AV
2390	63.21	-5.84	57.37	74	-16.63	PK
2390	47.68	-5.84	41.84	54	-12.16	AV
2400	64.31	-5.84	58.47	74	-15.53	PK
2400	50.86	-5.84	45.02	54	-8.98	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Reading result + Factor - Limits

Operation Mode: 802.11b Mode TX CH High (2462MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.34	-5.65	51.69	74	-22.31	PK
2483.5	/	-5.65	/	54	/	AV
2500	55.81	-5.72	50.09	74	-23.91	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin=Reading result+Factor-Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.97	-5.65	51.32	74	-22.68	PK
2483.5	/	-5.65	/	54	/	AV
2500	56.42	-5.72	50.70	74	-23.30	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin=Reading result+Factor-Limits

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	56.49	-5.81	50.68	74	-23.32	PK
2310	/	-5.81	/	54	/	AV
2390	64.07	-5.84	58.23	74	-15.77	PK
2390	48.79	-5.84	42.95	54	-11.05	AV
2400	64.87	-5.84	59.03	74	-14.97	PK
2400	50.27	-5.84	44.43	54	-9.57	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin=Reading result+Factor-Limits

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	55.39	-5.81	49.58	74	-24.42	PK
2310	/	-5.81	/	54	/	AV
2390	64.59	-5.84	58.75	74	-15.25	PK
2390	48.19	-5.84	42.35	54	-11.65	AV
2400	65.34	-5.84	59.50	74	-14.50	PK
2400	49.85	-5.84	44.01	54	-9.99	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin=Reading result+Factor-Limits

Operation Mode: 802.11g Mode TX CH High (2462MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.61	-5.65	51.96	74	-22.04	PK
2483.5	/	-5.65	/	54	/	AV
2500	56.49	-5.72	50.77	74	-23.23	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin=Reading result+Factor-Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.61	-5.65	51.96	74	-22.04	PK
2483.5	/	-5.65	/	54	/	AV
2500	56.29	-5.72	50.57	74	-23.43	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin=Reading result+Factor-Limits

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	56.34	-5.81	50.53	74	-23.47	PK
2310	/	-5.81	/	54	/	AV
2390	62.34	-5.84	56.50	74	-17.50	PK
2390	48.56	-5.84	42.72	54	-11.28	AV
2400	63.21	-5.84	57.37	74	-16.63	PK
2400	49.17	-5.84	43.33	54	-10.67	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin=Reading result+Factor-Limits

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	56.47	-5.81	50.66	74	-23.34	PK
2310	/	-5.81	/	54	/	AV
2390	61.37	-5.84	55.53	74	-18.47	PK
2390	47.59	-5.84	41.75	54	-12.25	AV
2400	63.76	-5.84	57.92	74	-16.08	PK
2400	50.49	-5.84	44.65	54	-9.35	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin=Reading result+Factor-Limits

Operation Mode: 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.46	-5.65	51.81	74	-22.19	PK
2483.5	/	-5.65	/	54	/	AV
2500	56.19	-5.72	50.47	74	-23.53	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin=Reading result+Factor-Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.81	-5.65	52.16	74	-21.84	PK
2483.5	/	-5.65	/	54	/	AV
2500	56.03	-5.72	50.31	74	-23.69	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin=Reading result+Factor-Limits

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	56.42	-5.81	50.61	74	-23.39	PK
2310	/	-5.81	/	54	/	AV
2390	63.59	-5.84	57.75	74	-16.25	PK
2390	48.61	-5.84	42.77	54	-11.23	AV
2400	64.87	-5.84	59.03	74	-14.97	PK
2400	50.41	-5.84	44.57	54	-9.43	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin=Reading result+Factor-Limits						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	56.82	-5.81	51.01	74	-22.99	PK
2310	/	-5.81	/	54	/	AV
2390	64.85	-5.84	59.01	74	-14.99	PK
2390	47.79	-5.84	41.95	54	-12.05	AV
2400	65.41	-5.84	59.57	74	-14.43	PK
2400	50.34	-5.84	44.50	54	-9.50	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin=Reading result+Factor-Limits						

Operation Mode: 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.24	-5.65	51.59	74	-22.41	PK
2483.5	/	-5.65	/	54	/	AV
2500	56.49	-5.72	50.77	74	-23.23	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin=Reading result+Factor-Limits

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.84	-5.65	52.19	74	-21.81	PK
2483.5	/	-5.65	/	54	/	AV
2500	55.79	-5.72	50.07	74	-23.93	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin=Reading result+Factor-Limits

6 OCCUPIED BANDWIDTH MEASUREMENT

6.1 Test Limit

FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

6.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on FCC Part15 C Section 15.247: RBW=100KHz, VBW=300KHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector.

6.3 Measurement Equipment Used


Same as Radiated Emission Measurement

6.4 Test Result


PASS

TX 802.11b Mode			
Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
2412	9.579	>=500KHz	PASS
2437	10.01	>=500KHz	PASS
2462	9.994	>=500KHz	PASS


CH: 2412MHz

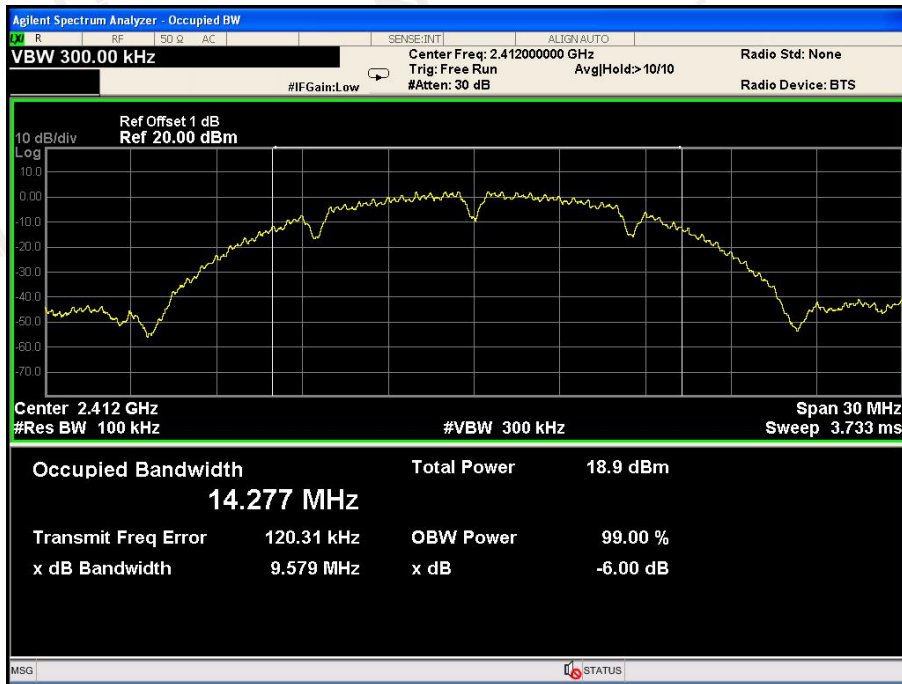

CH: 2437MHz

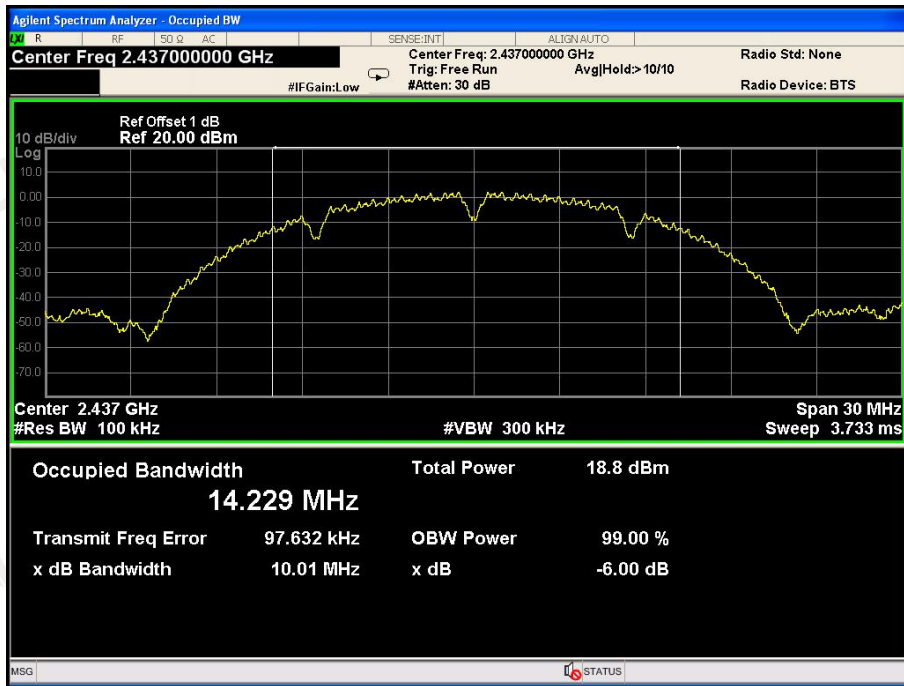


CH: 2462MHz

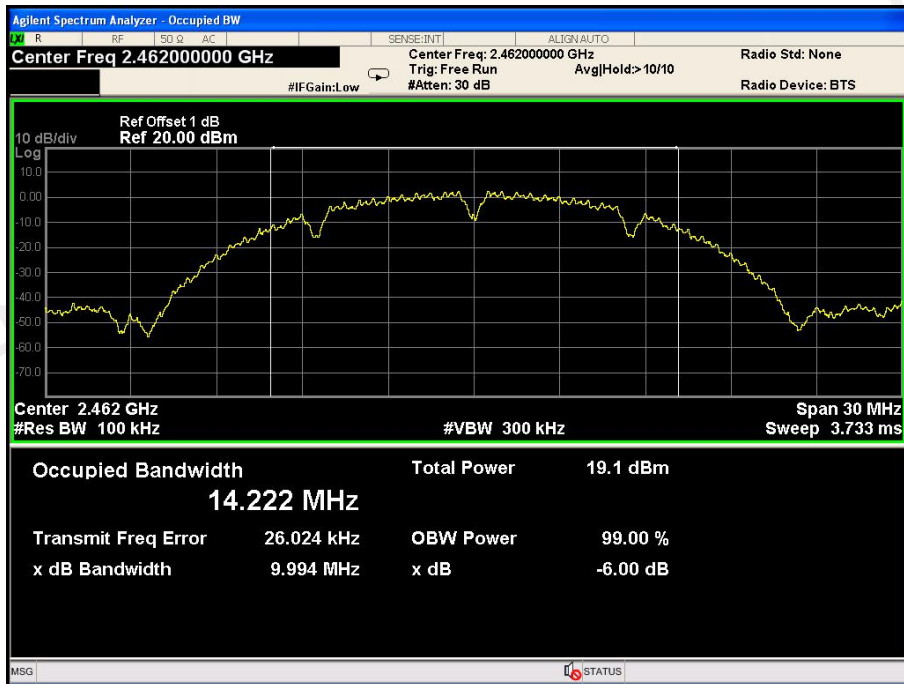


TX 802.11g Mode			
Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
2412	15.09	>=500KHz	PASS
2437	15.10	>=500KHz	PASS
2462	15.10	>=500KHz	PASS


CH: 2412MHz

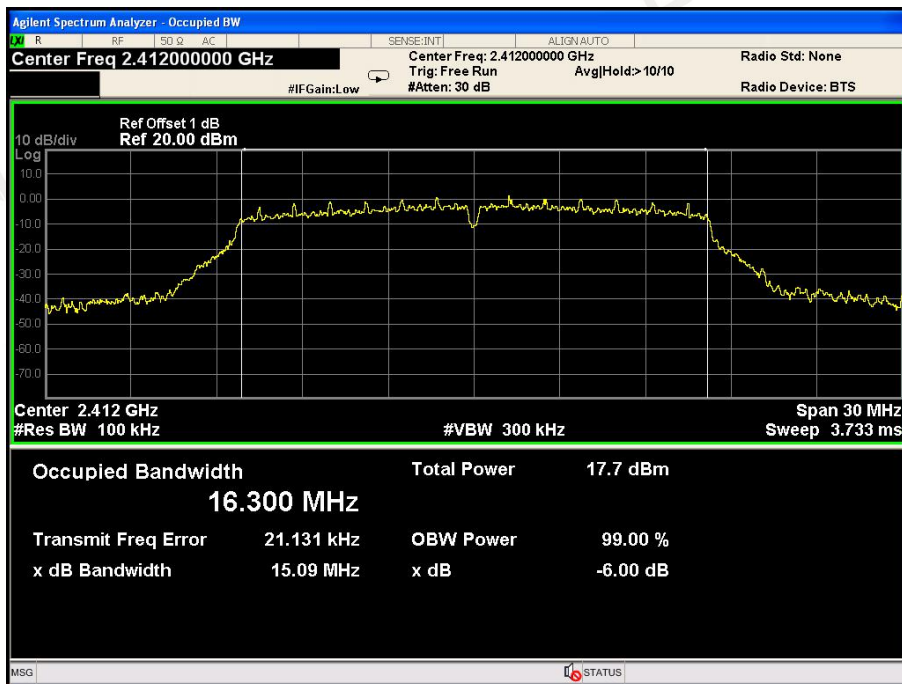

CH: 2437MHz

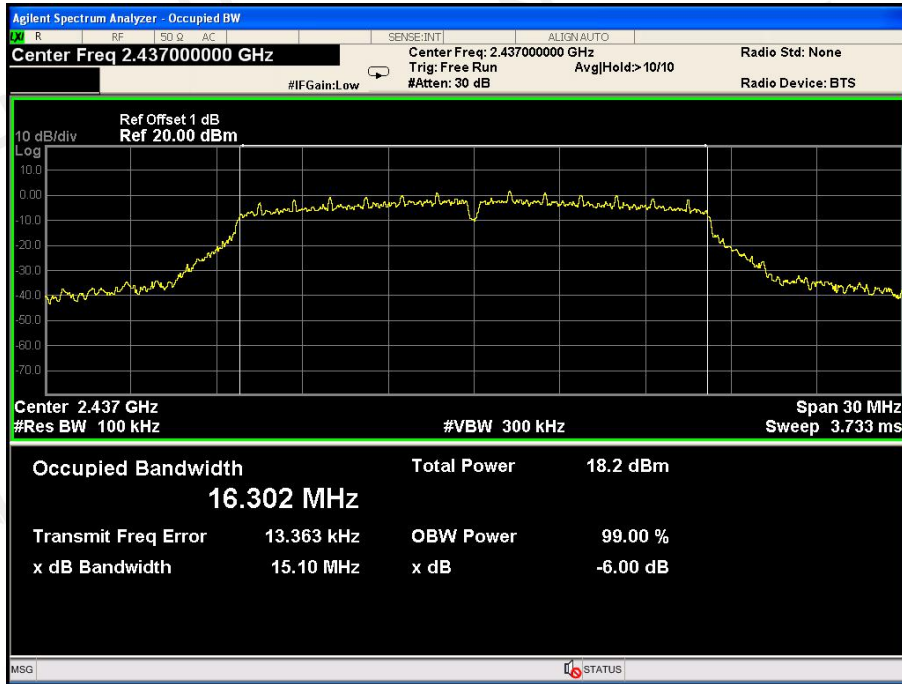


CH: 2462MHz

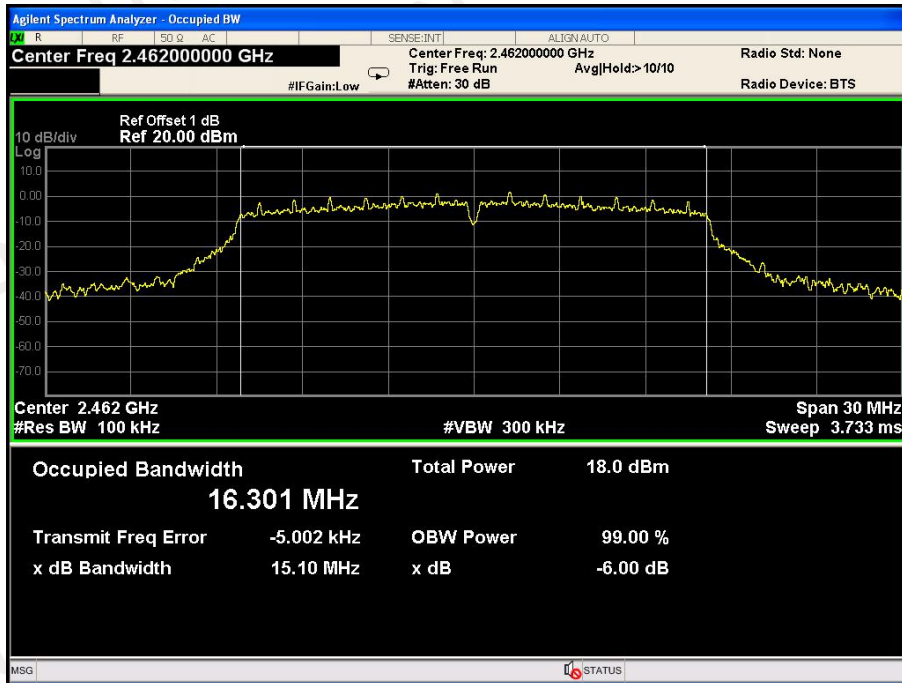


TX 802.11n/HT20 Mode			
Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
2412	15.08	>=500KHz	PASS
2437	15.02	>=500KHz	PASS
2462	15.10	>=500KHz	PASS


CH: 2412MHz

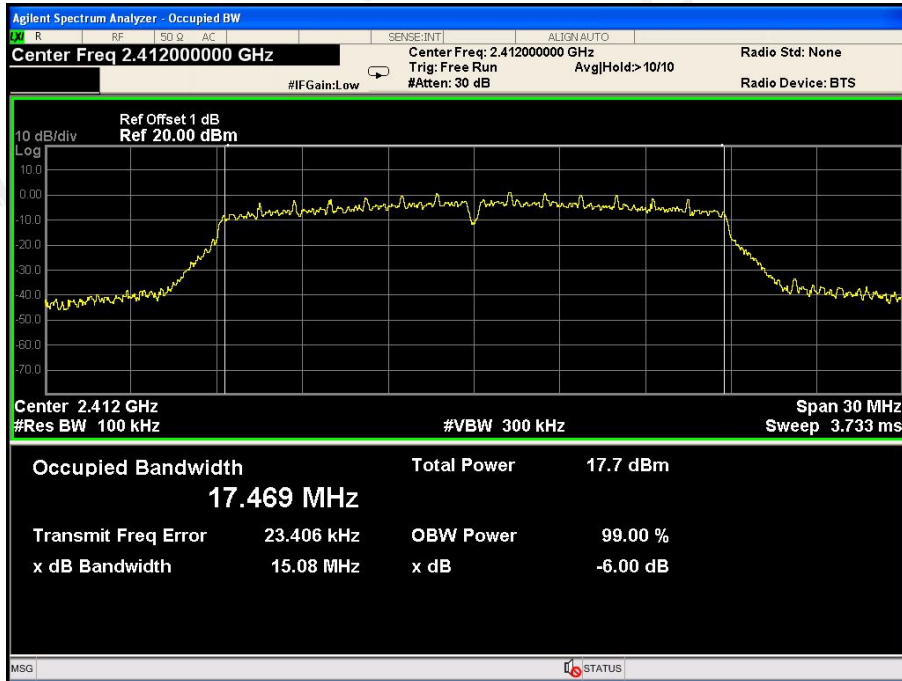

CH: 2437MHz

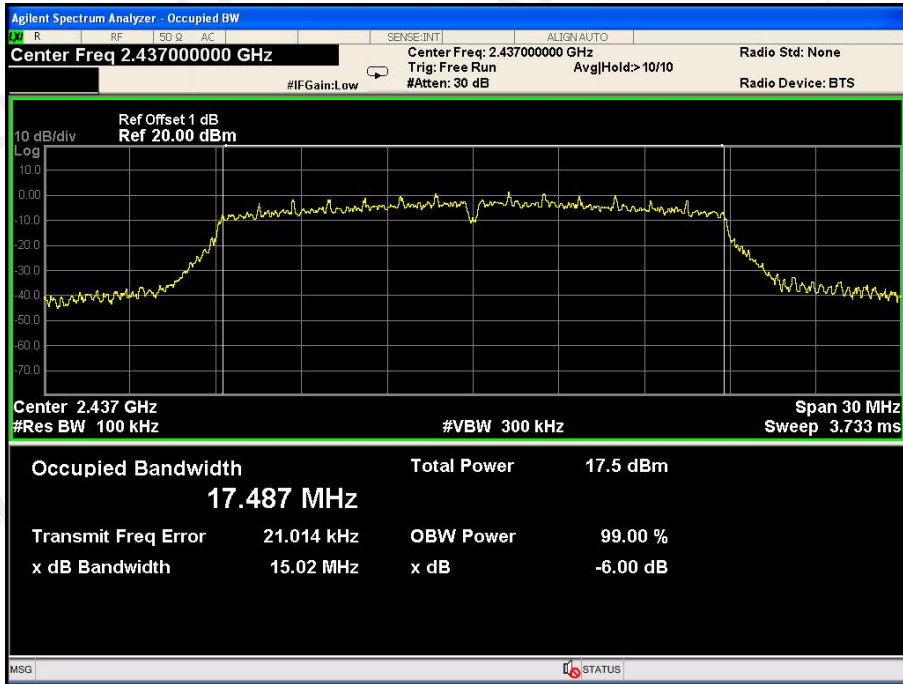


CH: 2462MHz

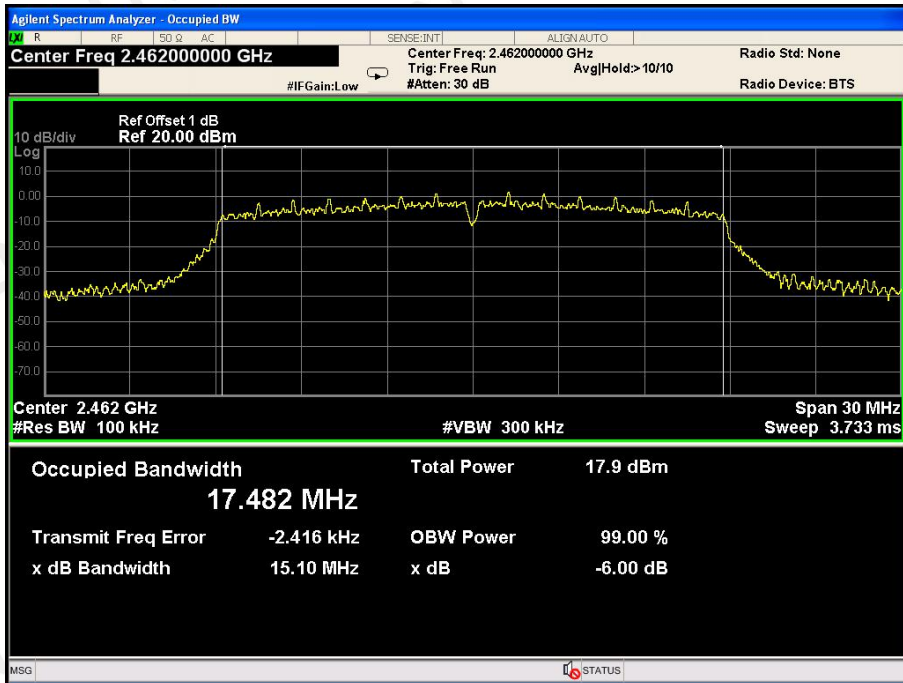


TX 802.11n/HT40 Mode			
Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
2422	32.58	>=500KHz	PASS
2437	33.81	>=500KHz	PASS
2452	33.82	>=500KHz	PASS


CH: 2422MHz

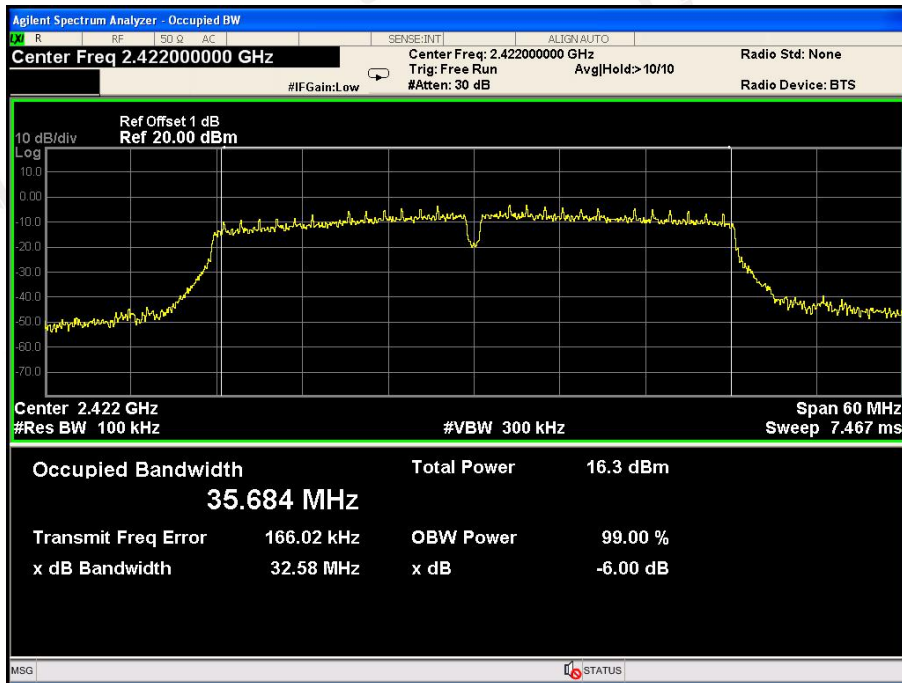

CH: 2437MHz

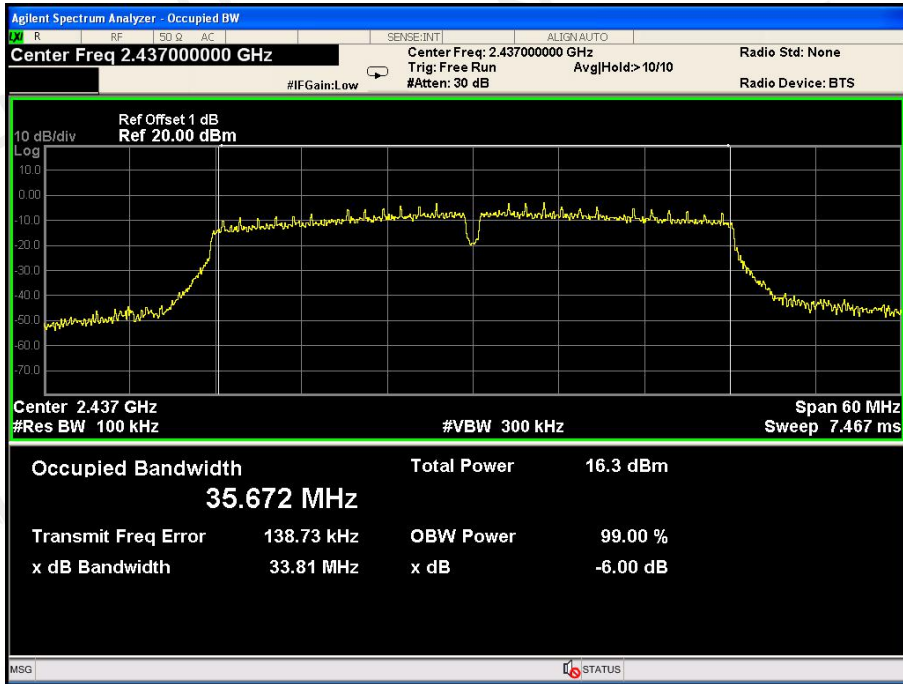

CH: 2452MHz

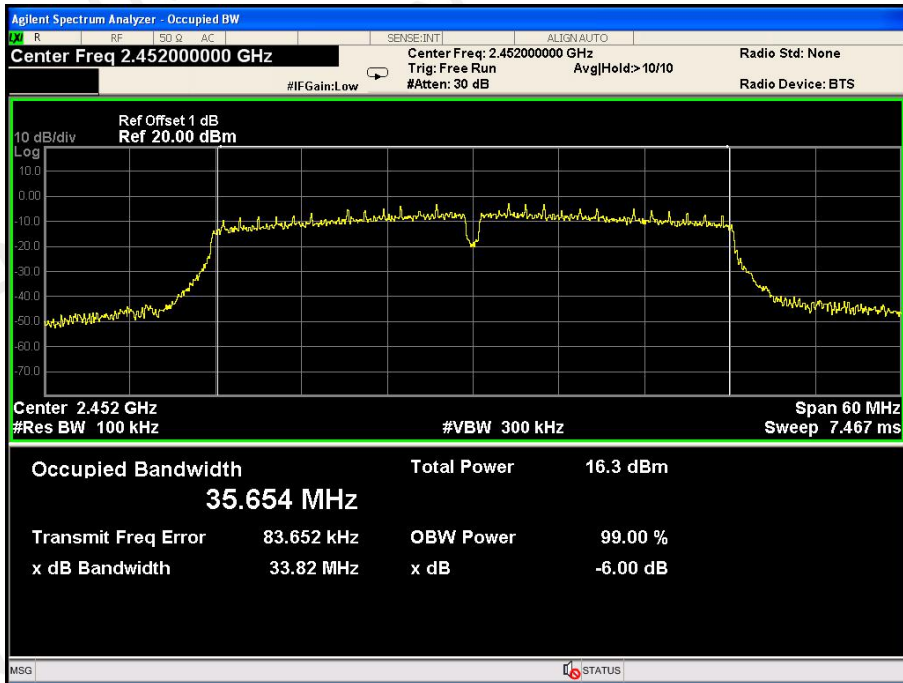

7 POWER SPECTRAL DENSITY TEST

7.1 Test Limit

FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

7.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on FCC Part15 C Section 15.247: RBW=3KHz, VBW=10KHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector.

7.3 Measurement Equipment Used


Same as Radiated Emission Measurement

7.4 Test Result


PASS

TX 802.11b Mode			
Frequency (MHz)	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412	1.776	8	PASS
2437	2.201	8	PASS
2462	2.274	8	PASS


CH: 2412MHz

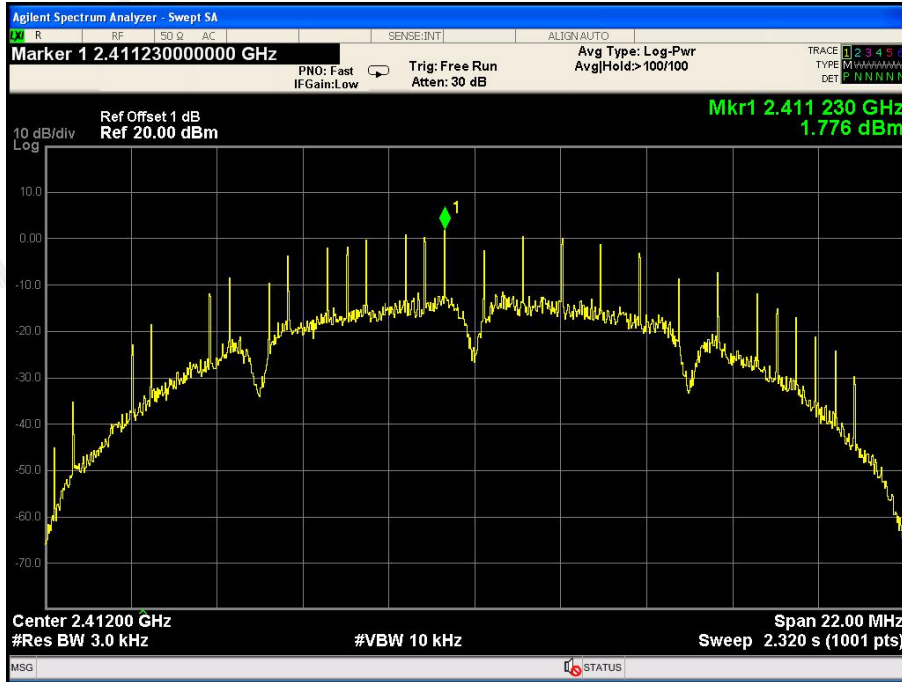

CH: 2437MHz

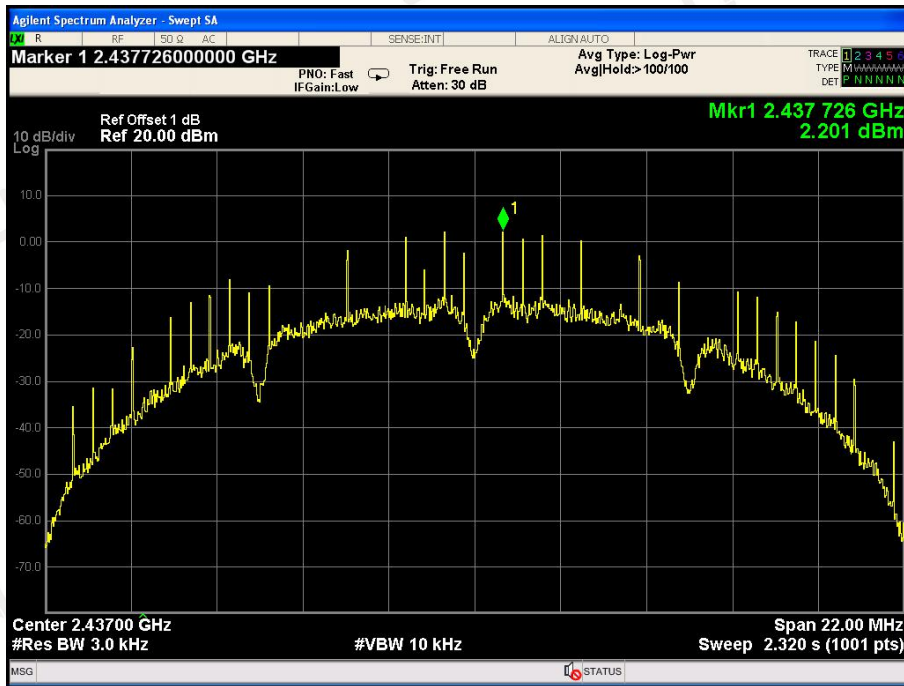


CH: 2462MHz

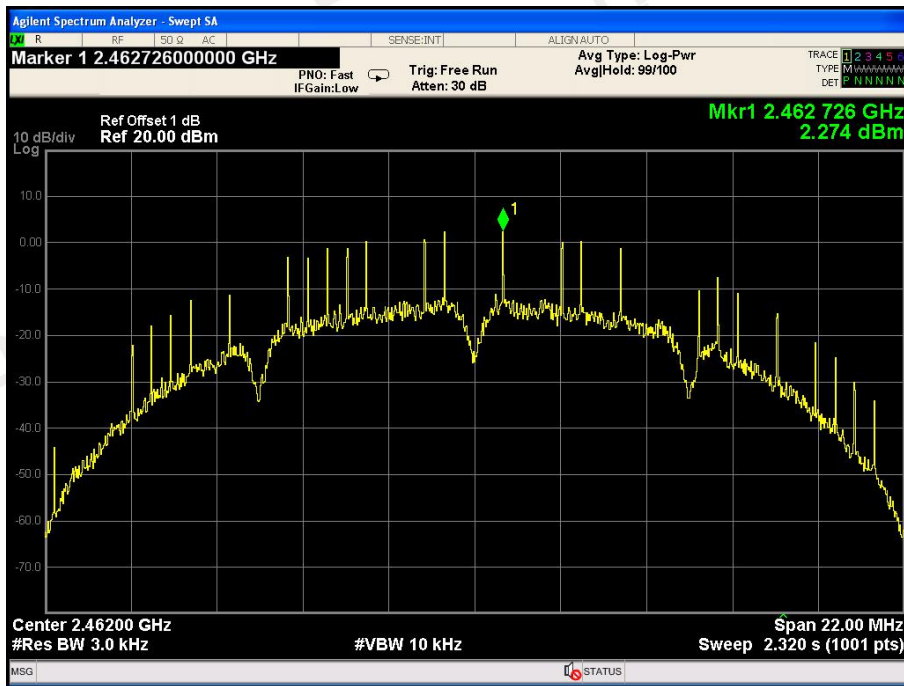


TX 802.11g Mode			
Frequency (MHz)	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412	-13.309	8	PASS
2437	-12.862	8	PASS
2462	-12.767	8	PASS


CH: 2412MHz

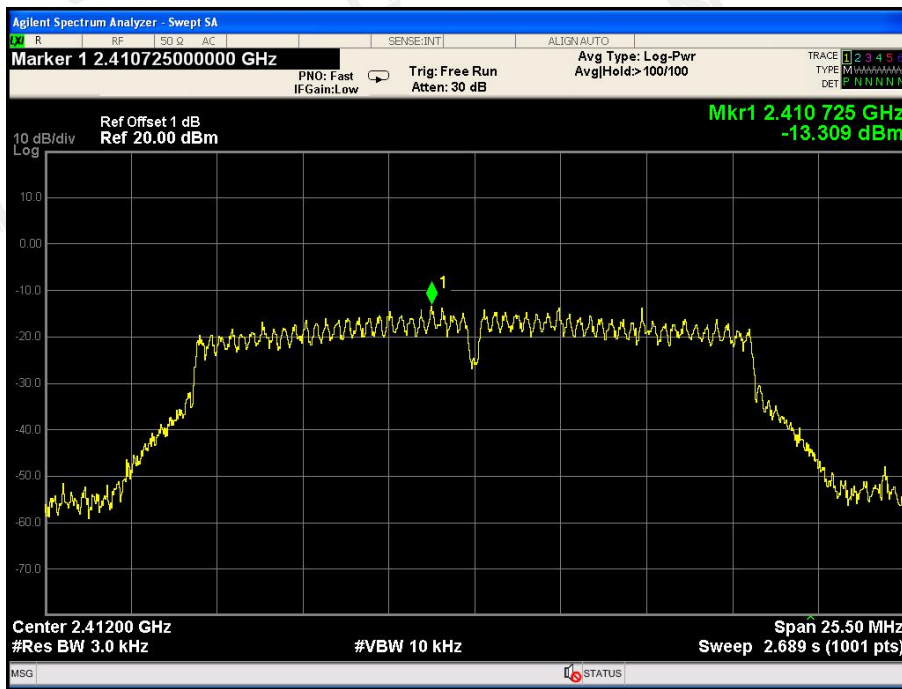

CH: 2437MHz

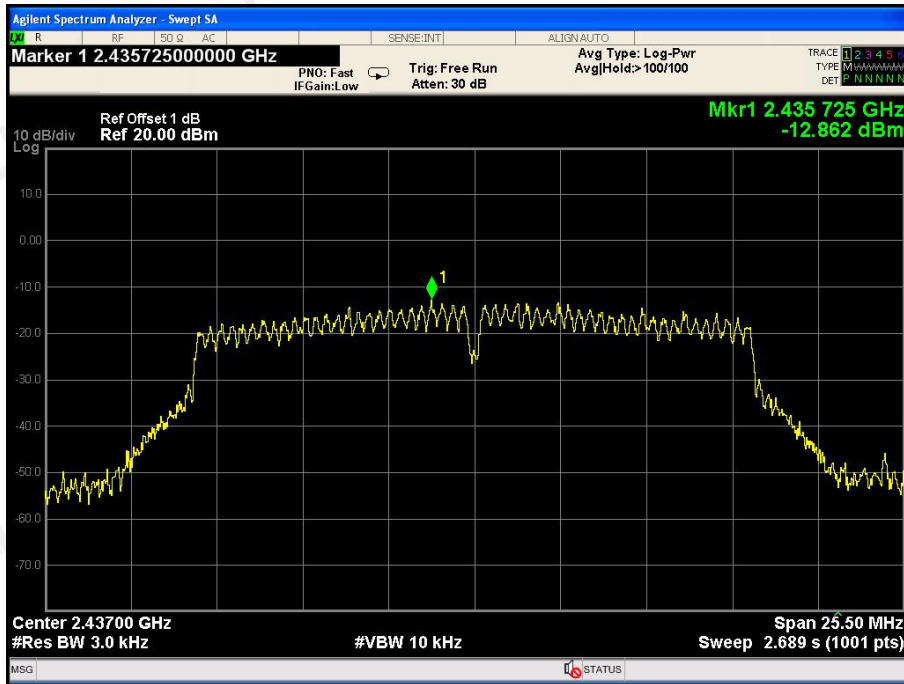


CH: 2462MHz

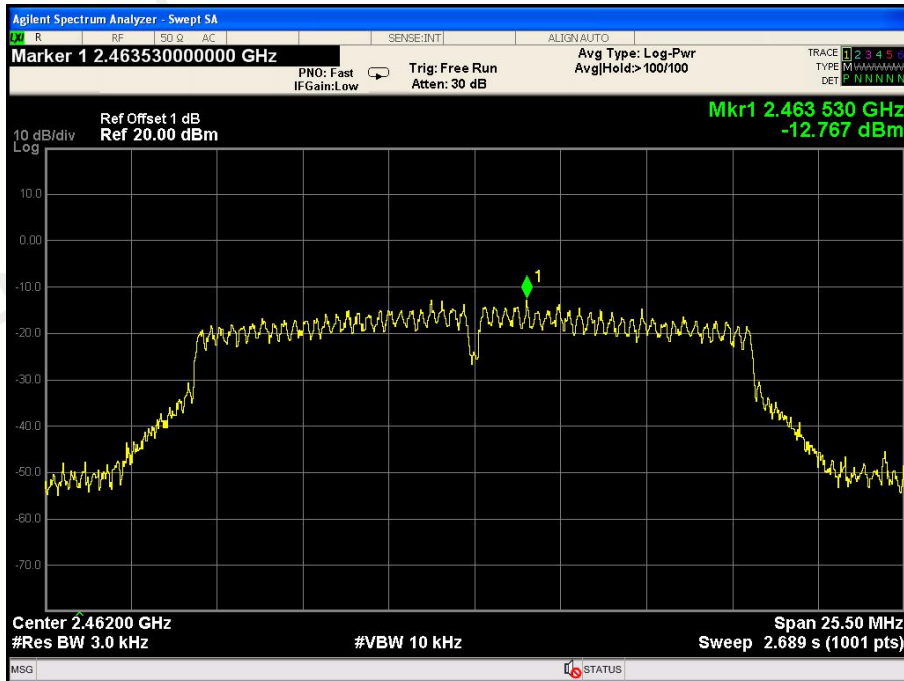


TX 802.11n/HT20 Mode			
Frequency (MHz)	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412	-12.767	8	PASS
2437	-12.376	8	PASS
2462	-12.899	8	PASS


CH: 2412MHz

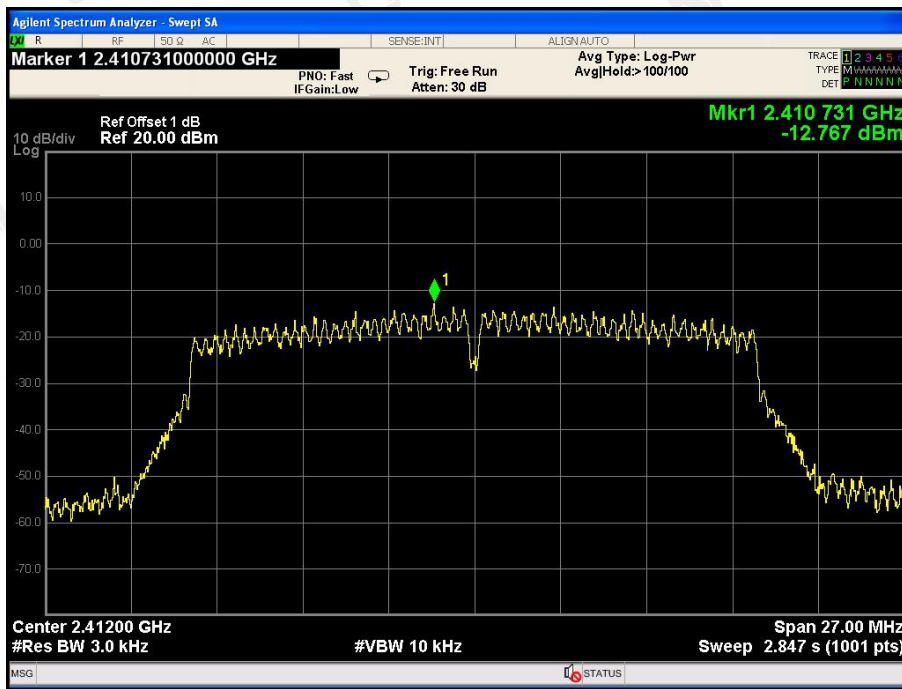

CH: 2437MHz

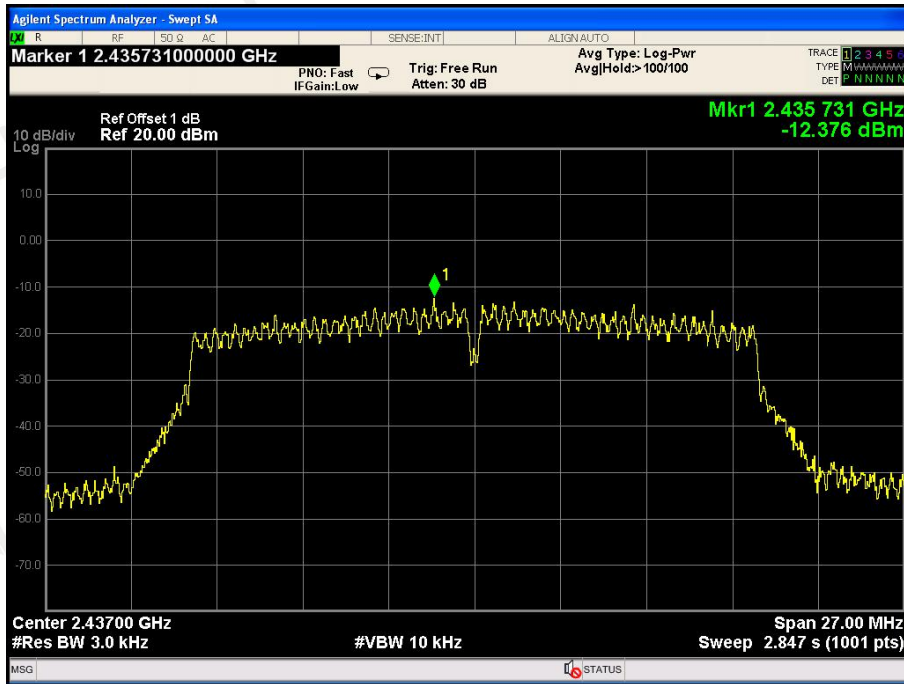


CH: 2462MHz

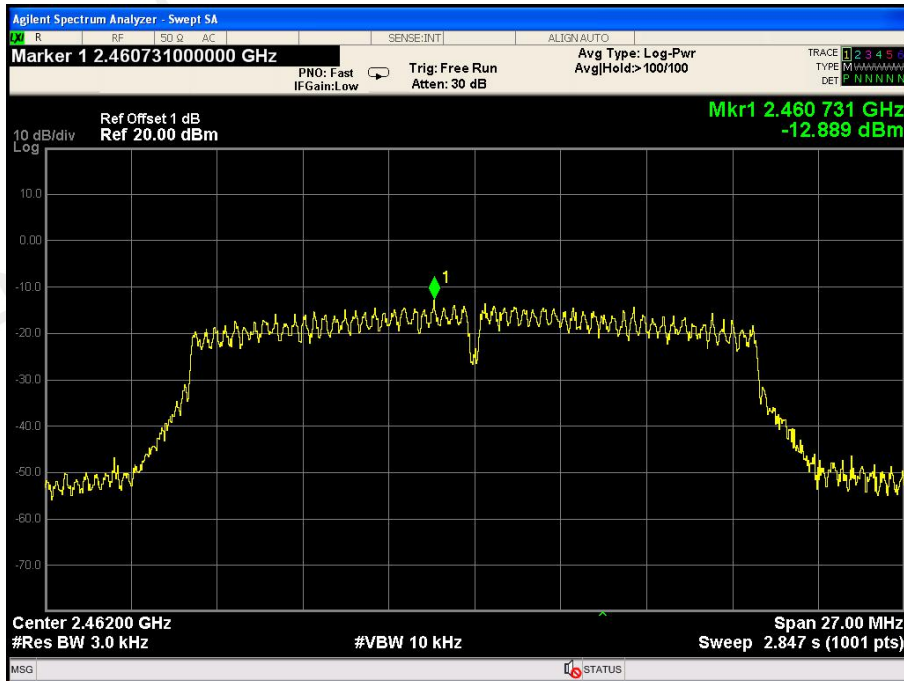


TX 802.11n/HT40 Mode			
Frequency (MHz)	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2422	-16.000	8	PASS
2437	-16.800	8	PASS
2452	-16.605	8	PASS


CH: 2422MHz

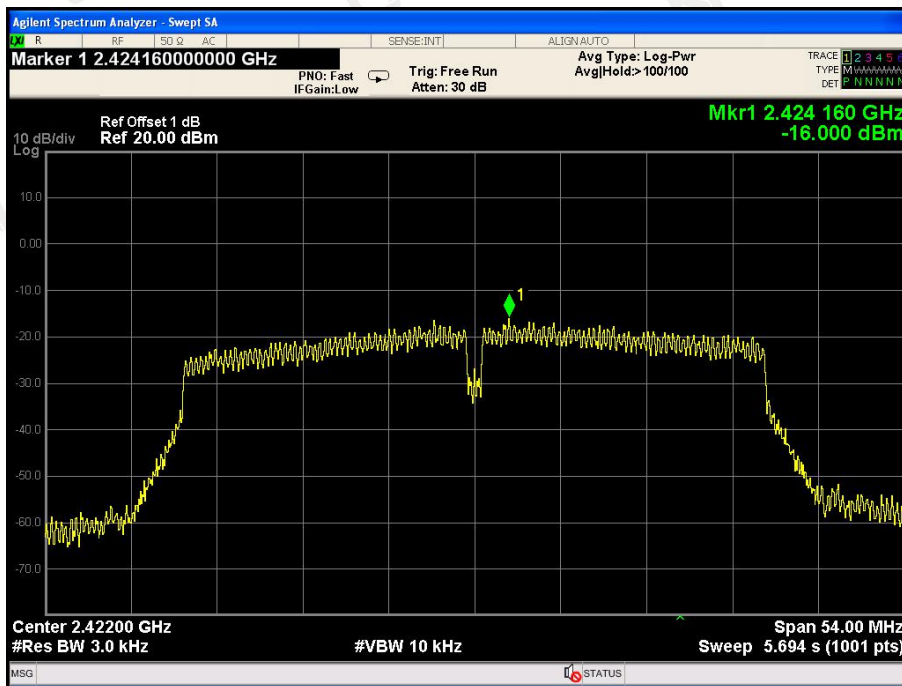

CH: 2437MHz

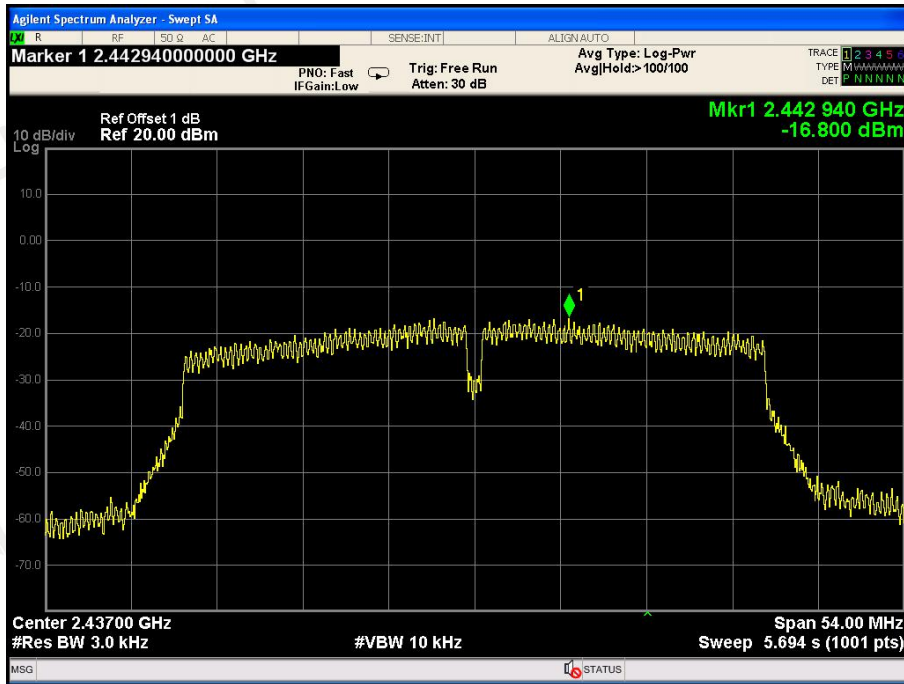

CH: 2452MHz

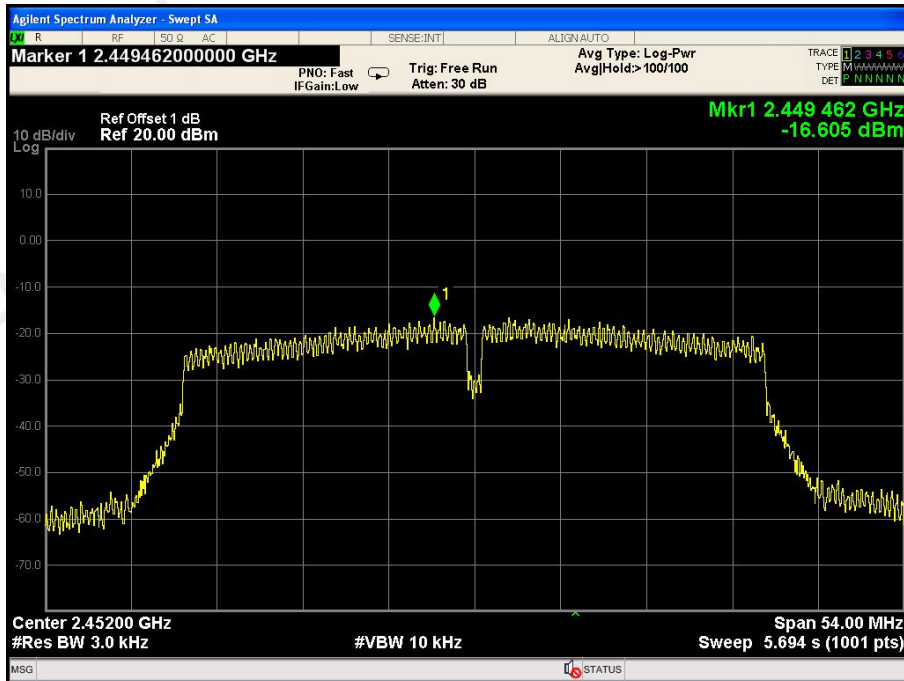

8 PEAK OUTPUT POWER TEST

8.1 Test Limit

FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The EUT was directly connected to the Power meter.

8.3 Measurement Equipment Used

Same as Radiated Emission Measurement

8.4 Test Result

PASS

All the test modes completed for test.

TX 802.11b Mode			
Test Channel	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	LIMIT (dBm)
CH01	2412	14.57	30
CH06	2437	14.54	30
CH11	2462	14.77	30
TX 802.11g Mode			
CH01	2412	12.34	30
CH06	2437	12.57	30
CH11	2462	12.42	30
TX 802.11n20 Mode			
CH01	2412	12.16	30
CH06	2437	12.32	30
CH11	2462	12.35	30
CH03	2422	11.89	30
CH06	2437	12.06	30
CH09	2452	11.92	30

9 OUT OF BAND EMISSIONS TEST


9.1 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

9.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as TX operation and connect directly to the spectrum analyzer.
3. Based on FCC Part15 C Section 15.247: RBW=100KHz, VBW=300KHz.
4. Set detected by the spectrum analyzer with peak detector.


9.3 Test Setup

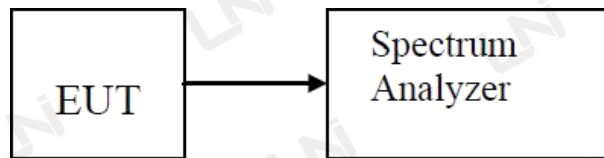

9.4 Test Result

PASS


TX 802.11b Mode
CH: 2412MHz

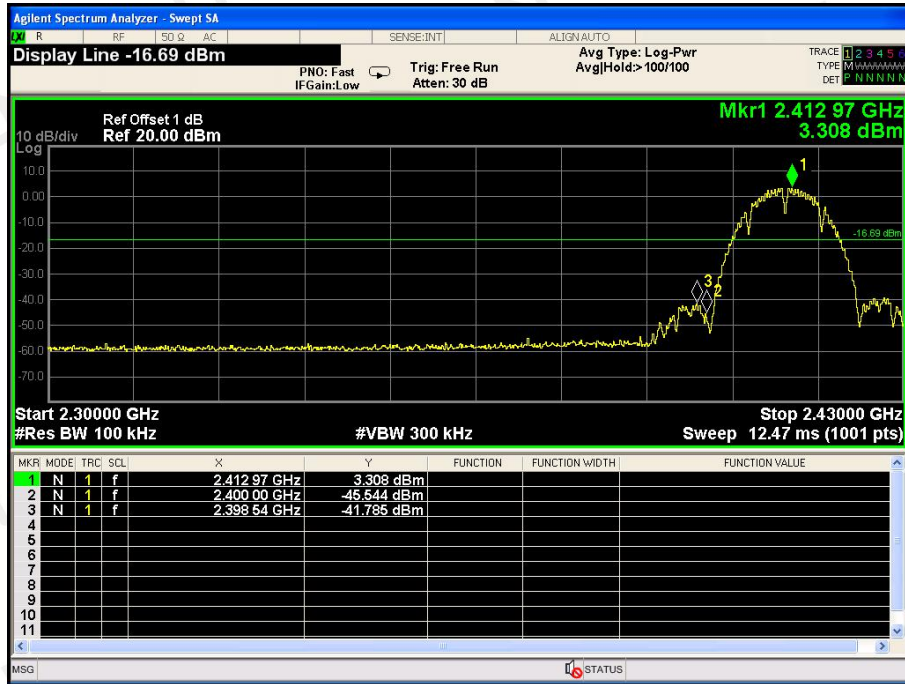

CH: 2462MHz




TX 802.11g Mode
CH: 2412MHz

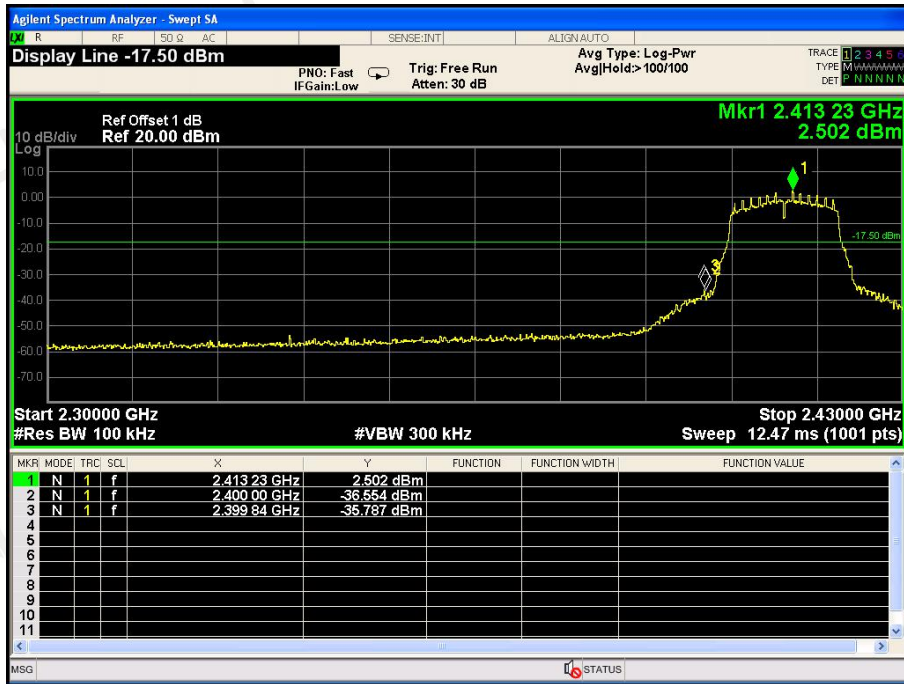

CH: 2462MHz



TX 802.11n/HT20 Mode
CH: 2412MHz

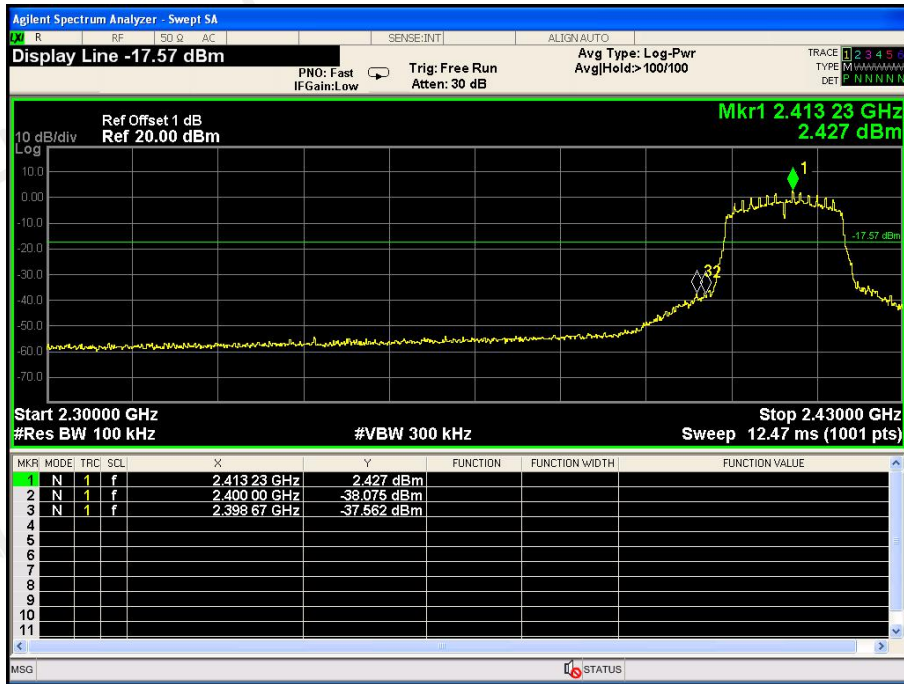

CH: 2462MHz



TX 802.11n/HT40 Mode
CH: 2422MHz



CH: 2452MHz



10 ANTENNA REQUIREMENT


Standard Applicable:

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction


The antenna used is a PCB antenna, using a reverse Internet connector (Provided by non-manufacturers will use the product can not work), considered a special connector accepted by the FCC to comply with rule part 15.203. Please see EUT photos for details, it comply with the standard requirement. The directional gains of antenna used for transmitting is 2.1dBi.

ANTENNA:

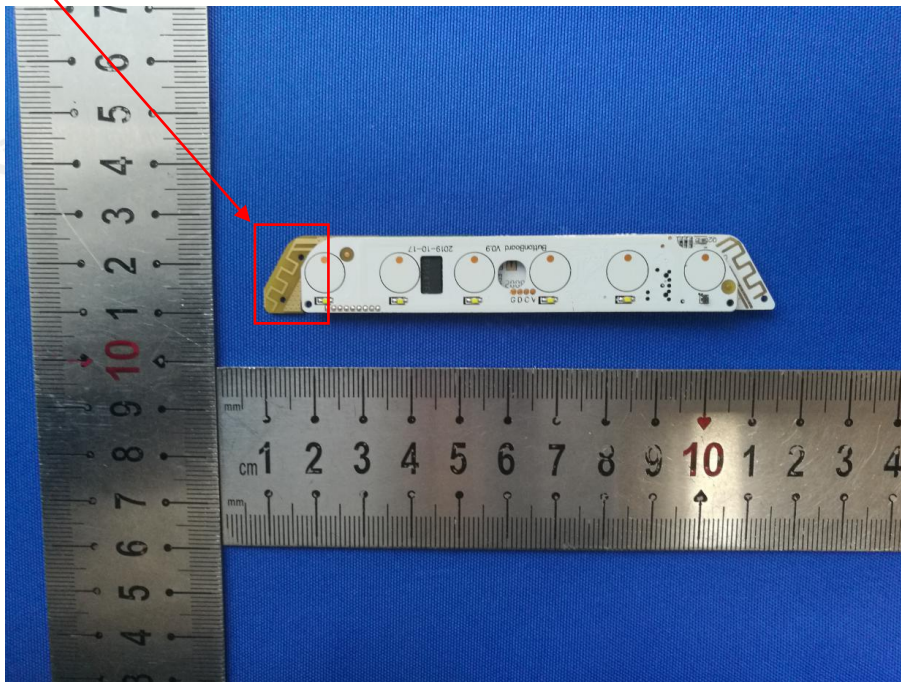

8 PHOTOGRAPH OF TEST

8.1 Radiated Emission

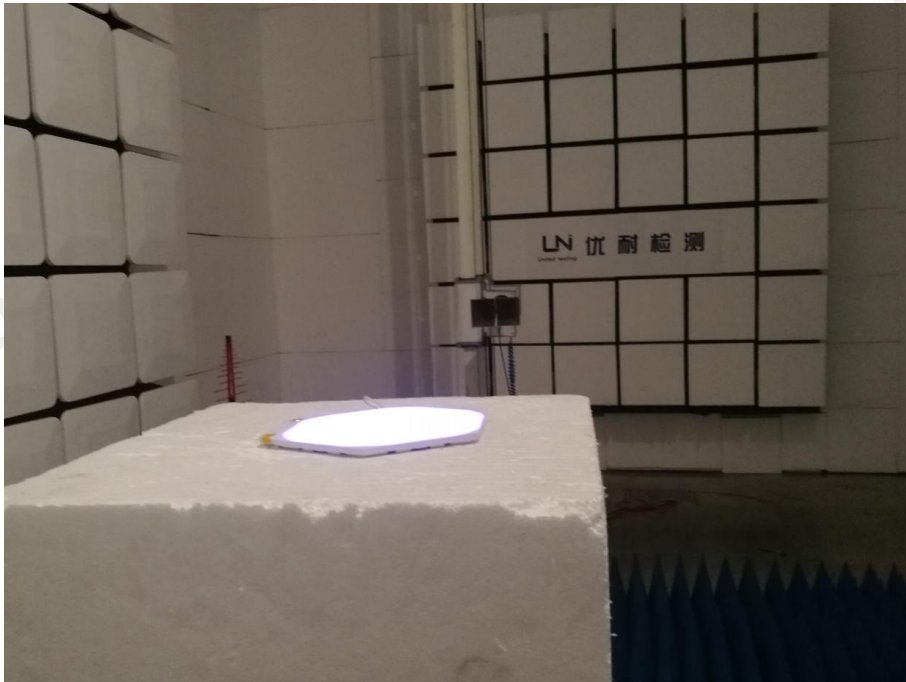

8.2 Conducted Emission



End of Report