

# FCC Radio Test Report

## FCC ID: 2AF2R-HB66TX

### Original Grant

**Report No.** : TB-FCC170523  
**Applicant** : Shenzhen Videotimes Technology Co.,Ltd  
**Equipment Under Test (EUT)**  
**EUT Name** : 2.4GHz Digital Wireless Video Baby Camera  
**Model No.** : HB66TX  
**Series Model No.** : N/A  
**Brand Name** : HelloBaby  
**Receipt Date** : 2019-11-22  
**Test Date** : 2019-11-23 to 2020-01-16  
**Issue Date** : 2020-03-09  
**Standards** : FCC Part 15, Subpart C 15.247  
**Test Method** : ANSI C63.10: 2013  
**Conclusions** : **PASS**

In the configuration tested, the EUT complied with the standards specified above,  
The EUT technically complies with the FCC requirements

**Test/Witness Engineer** :

*Jack*



Jack Deng

**Engineer Supervisor** :

*IVAN SU*

Ivan Su

Ray Lai

**Engineer Manager** :

*Ray Lai*

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

---

---

## Contents

<b>CONTENTS.....</b>	<b>2</b>
<b>1. GENERAL INFORMATION ABOUT EUT .....</b>	<b>5</b>
1.1 Client Information.....	5
1.2 General Description of EUT (Equipment Under Test) .....	5
1.3 Block Diagram Showing the Configuration of System Tested.....	6
1.4 Description of Support Units .....	7
1.5 Description of Test Mode.....	7
1.6 Description of Test Software Setting .....	8
1.7 Measurement Uncertainty .....	8
1.8 Test Facility.....	9
<b>2. TEST SUMMARY .....</b>	<b>10</b>
<b>3. TEST SOFTWARE.....</b>	<b>10</b>
<b>4. TEST EQUIPMENT.....</b>	<b>11</b>
<b>5. CONDUCTED EMISSION TEST .....</b>	<b>12</b>
5.1 Test Standard and Limit.....	12
5.2 Test Setup.....	12
5.3 Test Procedure.....	13
5.4 Deviation From Test Standard.....	13
5.5 EUT Operating Mode .....	13
5.6 Test Data.....	13
<b>6. RADIATED EMISSION TEST .....</b>	<b>14</b>
6.1 Test Standard and Limit.....	14
6.2 Test Setup.....	15
6.3 Test Procedure.....	16
6.4 Deviation From Test Standard.....	17
6.5 EUT Operating Condition .....	17
6.6 Test Data.....	17
<b>7. RESTRICTED BANDS AND BAND-EDGE TEST .....</b>	<b>18</b>
7.1 Test Standard and Limit.....	18
7.2 Test Setup.....	18
7.3 Test Procedure.....	19
7.4 Deviation From Test Standard.....	19
7.5 EUT Operating Condition .....	19
7.6 Test Data.....	19
<b>8. NUMBER OF HOPPING CHANNEL .....</b>	<b>20</b>
8.1 Test Standard and Limit.....	20
8.2 Test Setup.....	20
8.3 Test Procedure.....	20
8.4 Deviation From Test Standard.....	20
8.5 EUT Operating Condition .....	20

---

---

8.6 Test Data.....	20
<b>9. AVERAGE TIME OF OCCUPANCY.....</b>	<b>21</b>
9.1 Test Standard and Limit.....	21
9.2 Test Setup.....	21
9.3 Test Procedure.....	21
9.4 EUT Operating Condition .....	21
9.4 Deviation From Test Standard.....	21
9.5 Test Data.....	21
<b>10. CHANNEL SEPARATION AND BANDWIDTH TEST.....</b>	<b>22</b>
10.1 Test Standard and Limit .....	22
10.2 Test Setup.....	22
10.3 Test Procedure.....	22
10.4 Deviation From Test Standard.....	22
10.5 EUT Operating Condition .....	22
10.6 Test Data.....	22
<b>11. PEAK OUTPUT POWER TEST.....</b>	<b>23</b>
11.1 Test Standard and Limit .....	23
11.2 Test Setup.....	23
11.3 Test Procedure.....	23
11.4 Deviation From Test Standard.....	23
11.5 EUT Operating Condition .....	23
11.6 Test Data.....	23
<b>12. ANTENNA REQUIREMENT.....</b>	<b>24</b>
12.1 Standard Requirement.....	24
12.2 Deviation From Test Standard.....	24
12.3 Antenna Connected Construction.....	24
12.4 Result.....	24
<b>ATTACHMENT A-- CONDUCTED EMISSION TEST DATA .....</b>	<b>25</b>
<b>ATTACHMENT B-- RADIATED EMISSION TEST DATA .....</b>	<b>29</b>
<b>ATTACHMENT C-- RESTRICTED BANDS REQUIREMENT TEST DATA.....</b>	<b>42</b>
<b>ATTACHMENT D-- NUMBER OF HOPPING CHANNEL TEST DATA.....</b>	<b>48</b>
<b>ATTACHMENT E-- AVERAGE TIME OF OCCUPANCY TEST DATA.....</b>	<b>49</b>
<b>ATTACHMENT F-- CHANNEL SEPARATION AND BANDWIDTH TEST DATA.....</b>	<b>51</b>
<b>BANDWIDTH TEST DATA: .....</b>	<b>51</b>
<b>ATTACHMENT G-- PEAK OUTPUT POWER TEST DATA .....</b>	<b>55</b>

---

---

## Revision History

Report No.	Version	Description	Issued Date
TB-FCC170523	Rev.01	Initial issue of report	2020-03-09

# 1. General Information about EUT

## 1.1 Client Information

<b>Applicant</b>	:	Shenzhen Videotimes Technology Co.,Ltd
<b>Address</b>	:	Room 601, Building B, Union Financial Building, No 1 Shihua Road, Fubao Street, Futian Free Trade Zone, Shenzhen, Guangdong, China.
<b>Manufacturer</b>	:	Shenzhen Videotimes Technology Co.,Ltd
<b>Address</b>	:	Room 601, Building B, Union Financial Building, No 1 Shihua Road, Fubao Street, Futian Free Trade Zone, Shenzhen, Guangdong, China.

## 1.2 General Description of EUT (Equipment Under Test)

<b>EUT Name</b>	:	2.4GHz Digital Wireless Video Baby Camera	
<b>Models No.</b>	:	HB66TX	
<b>Model Difference</b>	:	N/A	
<b>Product Description</b>	:	Operation Frequency:	2403.5MHz~2468MHz
	:	Number of Channel:	44 Channels <small>See Note 2</small>
	:	Max Peak Output Power:	19.52dBm
	:	Antenna Gain:	2dBi Monopole Antenna
	:	Modulation Type:	GFSK (2Mbps)
<b>Power Supply</b>	:	DC Voltage Supply from AC/DC Adapter	
<b>Power Rating</b>	:	Adapter 1# (Model:K05S050100U) Input: AC 100-240V~50/60Hz, 0.2A Output: DC 5.0V,1.0A Adapter 2# (Model:CS6E050100FU) Input: AC 100-240V~50/60Hz, 0.2A Output: DC 5.0V,1.0A	
<b>Software Version</b>	:	1.0	
<b>Hardware Version</b>	:	1.0	
<b>Remark</b>	:	The adapter and antenna gain provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.	

**Note:**

(1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

(2) Channel List:

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
<b>00</b>	<b>2403.5</b>	15	2426.0	30	2448.5
01	2405.0	16	2427.5	31	2450.0
02	2406.5	17	2429.0	32	2451.5
03	2408.0	18	2430.5	33	2453.0
04	2409.5	19	2432.0	34	2454.5
05	2411.0	20	2433.5	35	2456.0
06	2412.5	21	2435.0	36	2457.5
07	2414.0	22	2436.5	37	2459.0
08	2415.5	23	2438.0	38	2460.5
09	2417.0	<b>24</b>	<b>2439.5</b>	39	2462.0
10	2418.5	25	2441.0	40	2463.5
11	2420.0	26	2442.5	41	2465.0
12	2421.5	27	2444.0	42	2466.5
13	2423.0	28	2445.5	<b>43</b>	<b>2468.0</b>
14	2424.5	29	2447.0		

**Note:** Test frequencies are lowest channel: 2403.5 MHz, middle channel: 2439.5 MHz and highest channel: 2468 MHz.

(3) The Antenna information about the equipment is provided by the applicant.

### 1.3 Block Diagram Showing the Configuration of System Tested

#### Adapter & TX Mode



#### 1.4 Description of Support Units

The EUT has been tested as an independent unit.

#### 1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+ TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX GFSK Mode
Mode 2	TX Mode(GFSK) Channel 00/24/43

**Note:**

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate. We have pretested all the test modes above.  
According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:  
TX Mode: GFSK (2Mbps)
- (2) The EUT is considered a Mobile unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on X-plane as the normal use. Therefore only the test data of this X-plane was used for radiated emission measurement test.

## 1.6 Description of Test Software Setting

During testing channel power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of Bluetooth mode.

<b>Test Software Version</b>	N/A		
Frequency	2403.5 MHz	2439.5 MHz	2468 MHz
GFSK	DEF	DEF	DEF

## 1.7 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty ( $U_{Lab}$ )
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	$\pm 3.60$ dB $\pm 3.10$ dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	$\pm 4.60$ dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	$\pm 4.20$ dB
Radiated Emission	Level Accuracy: Above 1000MHz	$\pm 4.20$ dB



## 1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

### **CNAS (L5813)**

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

### **A2LA Certificate No.: 4750.01**

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01. FCC Accredited Test Site Number: 854351.

### **IC Registration No.: (11950A-1)**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

## 2. Test Summary

FCC Part 15 Subpart C(15.247)/ RSS 247 Issue 2				
Standard Section		Test Item	Judgment	Remark
FCC	IC			
15.203		Antenna Requirement	PASS	N/A
15.207	RSS-GEN 8.8	Conducted Emission	PASS	N/A
15.205	RSS-Gen 8.10	Restricted Bands	PASS	N/A
15.247(a)(1)	RSS 247 5.1 (b)	Hopping Channel Separation	PASS	N/A
15.247(a)(1)	RSS 247 5.1 (d)	Dwell Time	PASS	N/A
15.247(b)(1)	RSS 247 5.4 (b)	Peak Output Power	PASS	N/A
15.247(b)(1)	RSS 247 5.1 (d)	Number of Hopping Frequency	PASS	N/A
15.247(d)	RSS 247 5.5	Band Edge	PASS	N/A
15.247(c)& 15.209	RSS 247 5.5 &RSS-GEN 8.9	Radiated Spurious Emission	PASS	N/A
15.247(a)	RSS 247 5.1 (a)	99% Occupied Bandwidth & 20dB Bandwidth	PASS	N/A

**Note:** N/A is an abbreviation for Not Applicable.

## 3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
RF Conducted Measurement	MTS-8310	MWRfTest	V2.0.0.0

## 4. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jul. 13, 2019	Jul. 12, 2020
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 13, 2019	Jul. 12, 2020
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 13, 2019	Jul. 12, 2020
LISN	Rohde & Schwarz	ENV216	101131	Jul. 13, 2019	Jul. 12, 2020
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 13, 2019	Jul. 12, 2020
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jul. 13, 2019	Jul. 12, 2020
Spectrum Analyzer	Rohde & Schwarz	FSVR	1311.006K40-10 0945-DH	Feb. 10, 2019	Feb. 09, 2020
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Jan. 27, 2019	Jan. 26, 2020
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar.03, 2019	Mar. 02, 2020
Horn Antenna	ETS-LINDGREN	BBHA 9170	BBHA9170582	Mar.03, 2019	Mar. 02, 2020
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jul. 13, 2019	Jul. 12, 2020
Pre-amplifier	Sonoma	310N	185903	Mar.04, 2019	Mar. 03, 2020
Pre-amplifier	HP	8449B	3008A00849	Mar.03, 2019	Mar. 02, 2020
Pre-amplifier	SKET	LNPA_1840G-50	SK201904032	Jul. 27, 2019	Jul. 26, 2020
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar.03, 2019	Mar. 02, 2020
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 13, 2019	Jul. 12, 2020
Spectrum Analyzer	Rohde & Schwarz	ESCI	100010/007	Jul. 13, 2019	Jul. 12, 2020
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 16, 2019	Sep. 15, 2020
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 16, 2019	Sep. 15, 2020
Analog Signal Generator	Agilent	N5181A	MY50141953	Sep. 16, 2019	Sep. 15, 2020
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO26	Sep. 16, 2019	Sep. 15, 2020
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO29	Sep. 16, 2019	Sep. 15, 2020
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO31	Sep. 16, 2019	Sep. 15, 2020
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO33	Sep. 16, 2019	Sep. 15, 2020

## 5. Conducted Emission Test

### 5.1 Test Standard and Limit

#### 5.1.1 Test Standard

FCC Part 15.207/RSS-GEN 8.8

#### 5.1.2 Test Limit

**Conducted Emission Test Limit**

Frequency	Maximum RF Line Voltage (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50


Notes:

(1) \*Decreasing linearly with logarithm of the frequency.

(2) The lower limit shall apply at the transition frequencies.

(3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 5.2 Test Setup

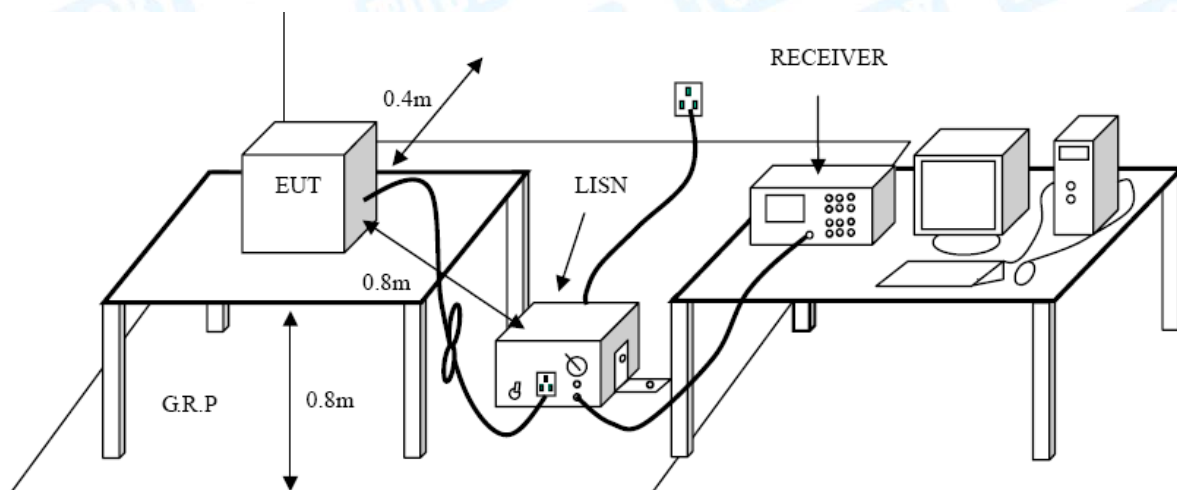

### 5.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

### 5.4 Deviation From Test Standard

No deviation

### 5.5 EUT Operating Mode

Please refer to the description of test mode.

### 5.6 Test Data

Please refer to the Attachment A.

## 6. Radiated Emission Test

### 6.1 Test Standard and Limit

#### 6.1.1 Test Standard

FCC Part 15.209/RSS-GEN 8.9

#### 6.1.2 Test Limit

#### Radiated Emission Limit (9 kHz~1000MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


#### Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Distance Meters(at 3m)	
	Peak	Average
Above 1000	74	54


**Note:**

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m)


6.2 Test Setup

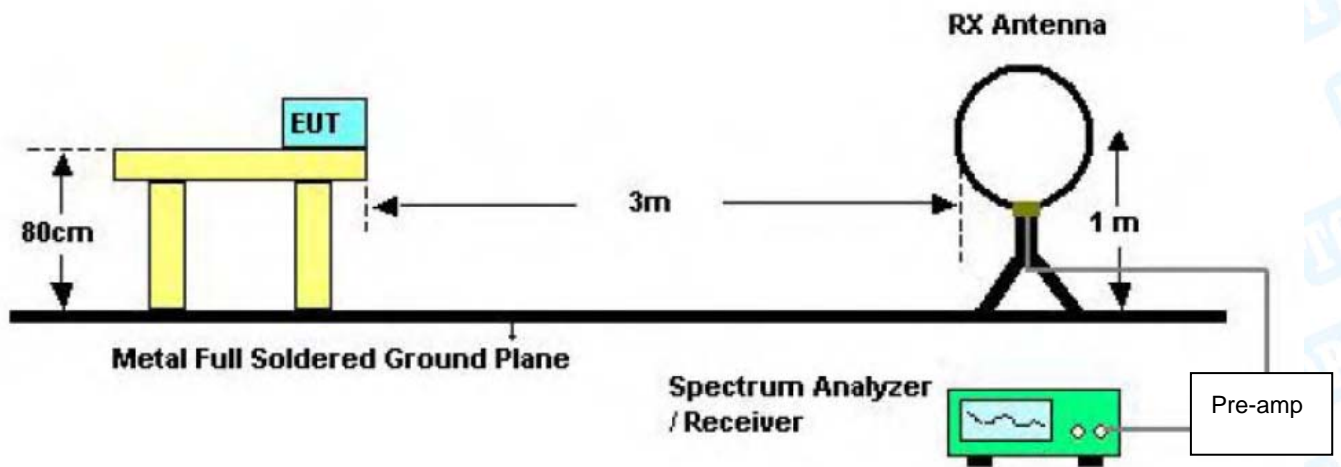

Below 30MHz Test Setup

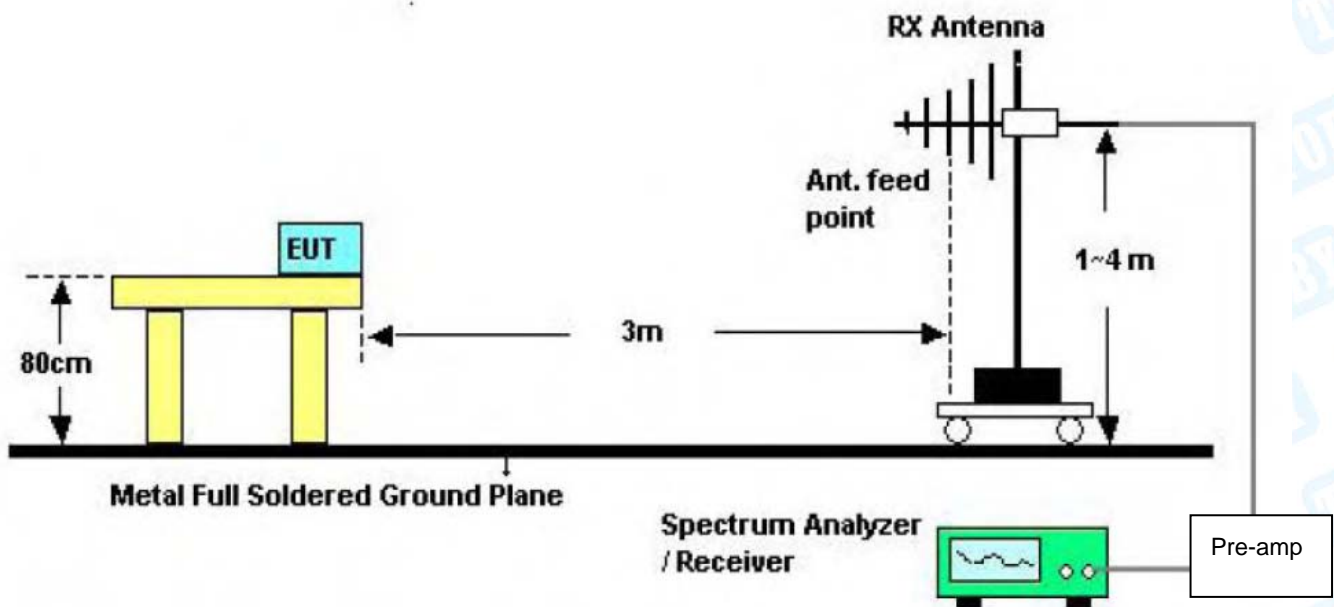

Below 1000MHz Test Setup

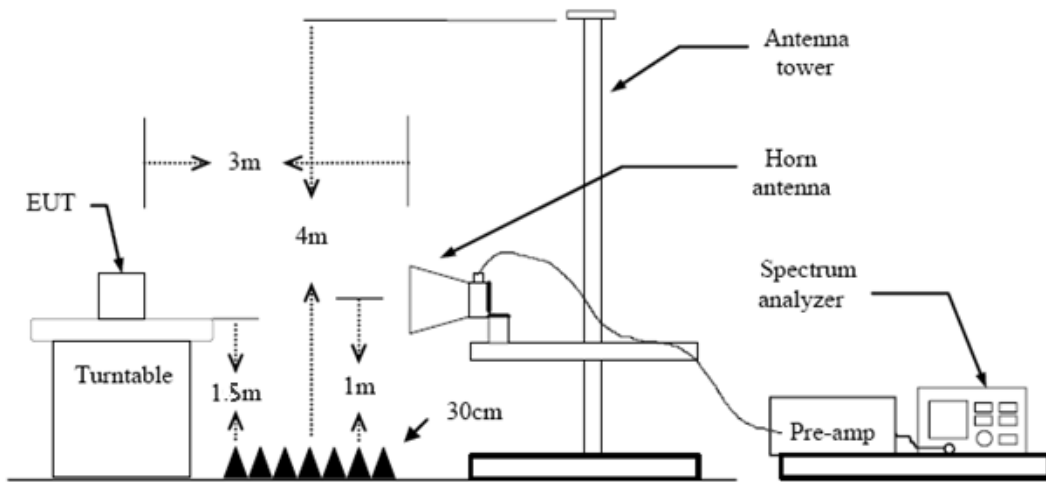

Above 1GHz Test Setup

### 6.3 Test Procedure

- (1) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency Below 1GHz. The EUT was placed on a rotating 0.8m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.



#### 6.4 Deviation From Test Standard

No deviation

#### 6.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

#### 6.6 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Please refer to the Attachment B.

## 7. Restricted Bands and Band-edge test

### 7.1 Test Standard and Limit

#### 7.1.1 Test Standard

FCC Part 15.209&15.205


RSS-GEN 8.9&8.10

#### 7.1.2 Test Limit

Restricted Frequency Band (MHz)	Distance Meters(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

**Note: All restriction bands have been tested, only the worst case is reported.**

### 7.2 Test Setup

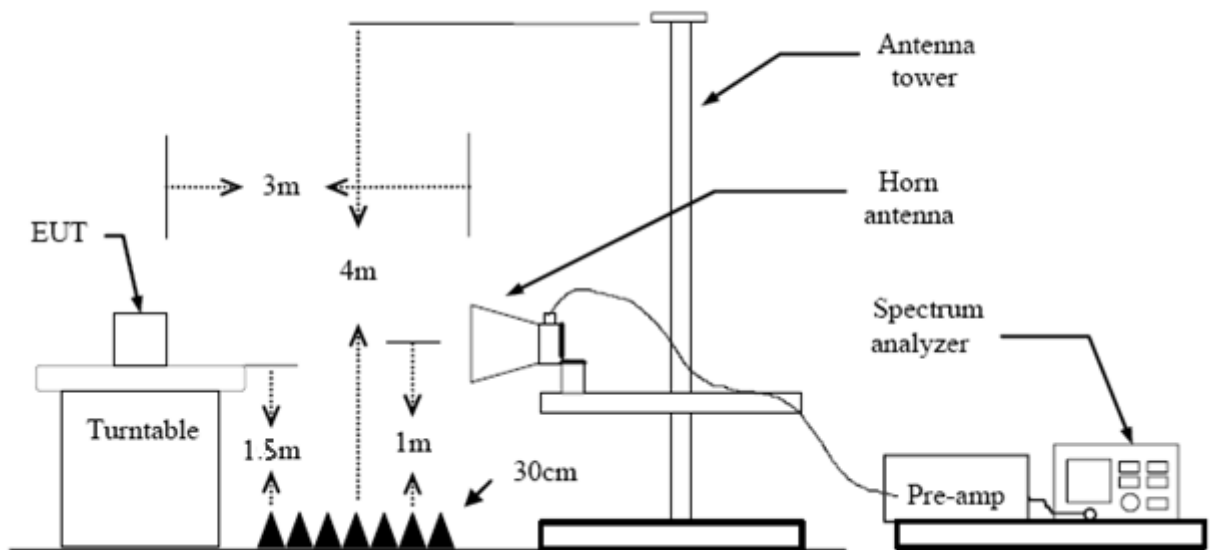

---

### 7.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with AVG Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

### 7.4 Deviation From Test Standard

No deviation

### 7.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

### 7.6 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

All restriction bands have been tested, only the worst case is reported.

Please refer to the Attachment C.

## 8. Number of Hopping Channel

### 8.1 Test Standard and Limit


#### 8.1.1 Test Standard

FCC Part 15.247 (a)(1)

#### 8.1.2 Test Limit

Section	Test Item	Limit
15.247	Number of Hopping Channel	>15

### 8.2 Test Setup



### 8.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100 KHz, VBW=100 KHz, Sweep time= Auto.

### 8.4 Deviation From Test Standard

No deviation

### 8.5 EUT Operating Condition

The EUT was set to the Hopping Mode by the Customer.

### 8.6 Test Data

Please refer to the Attachment D.

## 9. Average Time of Occupancy

### 9.1 Test Standard and Limit


#### 9.1.1 Test Standard

FCC Part 15.247 (a)(1) / RSS 247 5.1(d)

#### 9.1.2 Test Limit

Test Item	Limit
Average Time of Occupancy	0.4 sec

### 9.2 Test Setup



### 9.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100KHz, VBW=300KHz.
- (3) Use video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for packet transmitting.
- (8) Measure the maximum time duration of one single pulse.

### 9.4 EUT Operating Condition

The average time of occupancy on any channel within the Period can be calculated with formulas:

The Dwell Time = Burst Width \* Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation:  $0.4 [s] * \text{hopping number} = 0.4 [s] * 20 [ch] = 8.0 [s*ch]$ ;

The burst width, which is directly measured, refers to the duration on one channel hop.

The maximum number of hopping channels in 8.0s  $= 3 * (8.0 / 0.24) = 100$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

The EUT was set to the Hopping Mode by the Customer.

### 9.4 Deviation From Test Standard

No deviation

### 9.5 Test Data

Please refer to the Attachment E.

## 10. Channel Separation and Bandwidth Test

### 10.1 Test Standard and Limit


#### 10.1.1 Test Standard

FCC Part 15.247/RSS 247 5.1(b)

#### 10.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Bandwidth	$\leq 1$ MHz (20dB bandwidth)	2400~2483.5
Channel Separation	$>25$ KHz or $>$ two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

### 10.2 Test Setup



### 10.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:  
Channel Separation: RBW=100 kHz, VBW=100 kHz.  
Bandwidth: RBW=30 kHz, VBW=100 kHz.
- (3) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (4) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:30 kHz, and Video Bandwidth:100 kHz. Sweep Time set auto.

### 10.4 Deviation From Test Standard

No deviation

### 10.5 EUT Operating Condition

The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Bandwidth Test.

### 10.6 Test Data

Please refer to the Attachment F.

## 11. Peak Output Power Test

### 11.1 Test Standard and Limit


#### 11.1.1 Test Standard

FCC Part 15.247 (b) (1)/RSS 247 5.4(b)

#### 11.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125 mW(21dBm)	2400~2483.5

### 11.2 Test Setup



### 11.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:  
 Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.  
 RBW=3 MHz, VBW=3 MHz for bandwidth more than 1MHz.

### 11.4 Deviation From Test Standard

No deviation

### 11.5 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

### 11.6 Test Data

Please refer to the Attachment G.

---

---

## 12. Antenna Requirement

### 12.1 Standard Requirement

#### 12.1.1 Standard

FCC Part 15.203

#### 12.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 12.2 Deviation From Test Standard

No deviation

### 12.3 Antenna Connected Construction

The gains of the antenna used for transmitting is 2dBi, and the antenna connector is de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

### 12.4 Result


The EUT antenna is a Monopole Antenna. It complies with the standard requirement.

Antenna Type
<input checked="" type="checkbox"/> Permanent attached antenna
<input type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna



## Attachment A-- Conducted Emission Test Data


<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Terminal:</b>	Line		
<b>Test Mode:</b>	Adapter(K05S050100G) + TX GFSK Mode 2403.5MHz		
<b>Remark:</b>	All channels have been tested and Shows only the worst channels.		

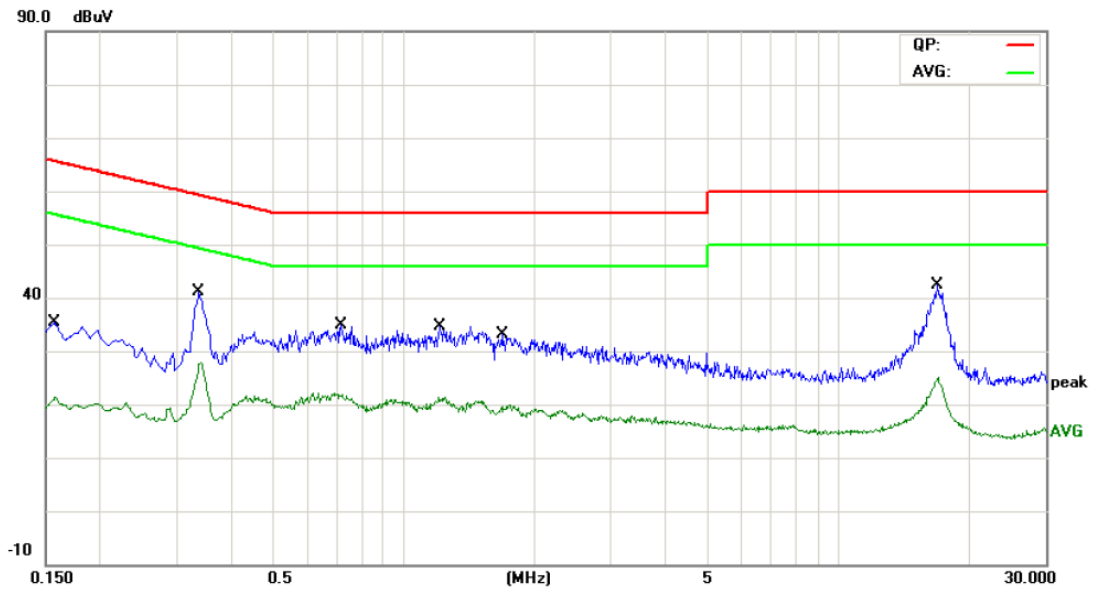

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1580	20.18	9.77	29.95	65.56	-35.61	QP
2		0.1580	9.04	9.77	18.81	55.56	-36.75	AVG
3		0.3379	25.47	9.83	35.30	59.25	-23.95	QP
4	*	0.3379	17.26	9.83	27.09	49.25	-22.16	AVG
5		0.7180	18.75	9.79	28.54	56.00	-27.46	QP
6		0.7180	11.25	9.79	21.04	46.00	-24.96	AVG
7		1.2140	17.80	9.67	27.47	56.00	-28.53	QP
8		1.2140	10.52	9.67	20.19	46.00	-25.81	AVG
9		1.6820	15.78	9.85	25.63	56.00	-30.37	QP
10		1.6820	8.28	9.85	18.13	46.00	-27.87	AVG
11		16.9260	23.21	9.84	33.05	60.00	-26.95	QP
12		16.9260	13.78	9.84	23.62	50.00	-26.38	AVG

Emission Level= Read Level+ Correct Factor


<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Terminal:</b>	Neutral		
<b>Test Mode:</b>	Adapter(K05S050100G) + TX GFSK Mode 2403.5MHz		
<b>Remark:</b>	All channels have been tested and Shows only the worst channels.		

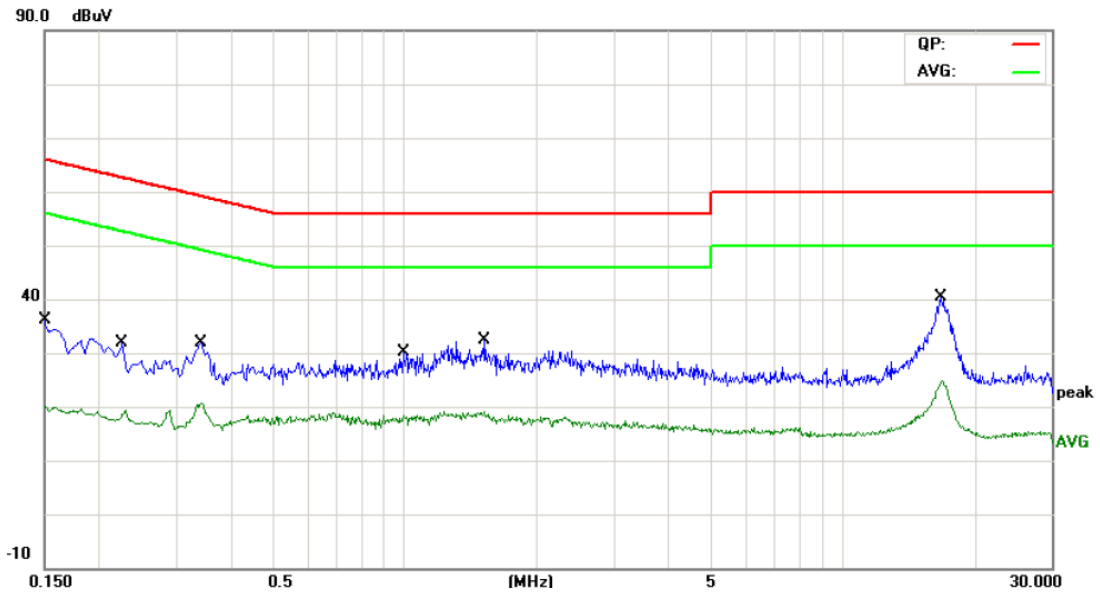

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	19.85	9.60	29.45	65.99	-36.54	QP
2		0.1500	8.61	9.60	18.21	55.99	-37.78	AVG
3		0.2260	14.16	9.63	23.79	62.59	-38.80	QP
4		0.2260	7.91	9.63	17.54	52.59	-35.05	AVG
5		0.3420	18.37	9.73	28.10	59.15	-31.05	QP
6		0.3420	10.88	9.73	20.61	49.15	-28.54	AVG
7		0.9940	13.04	9.62	22.66	56.00	-33.34	QP
8		0.9940	7.63	9.62	17.25	46.00	-28.75	AVG
9		1.5220	15.08	9.82	24.90	56.00	-31.10	QP
10		1.5220	8.12	9.82	17.94	46.00	-28.06	AVG
11		16.8300	22.83	9.77	32.60	60.00	-27.40	QP
12	*	16.8300	13.84	9.77	23.61	50.00	-26.39	AVG

Emission Level= Read Level+ Correct Factor


<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Terminal:</b>	Line		
<b>Test Mode:</b>	Adapter(CS6E050100FU) + TX GFSK Mode 2403.5MHz		
<b>Remark:</b>	All channels have been tested and Shows only the worst channels.		

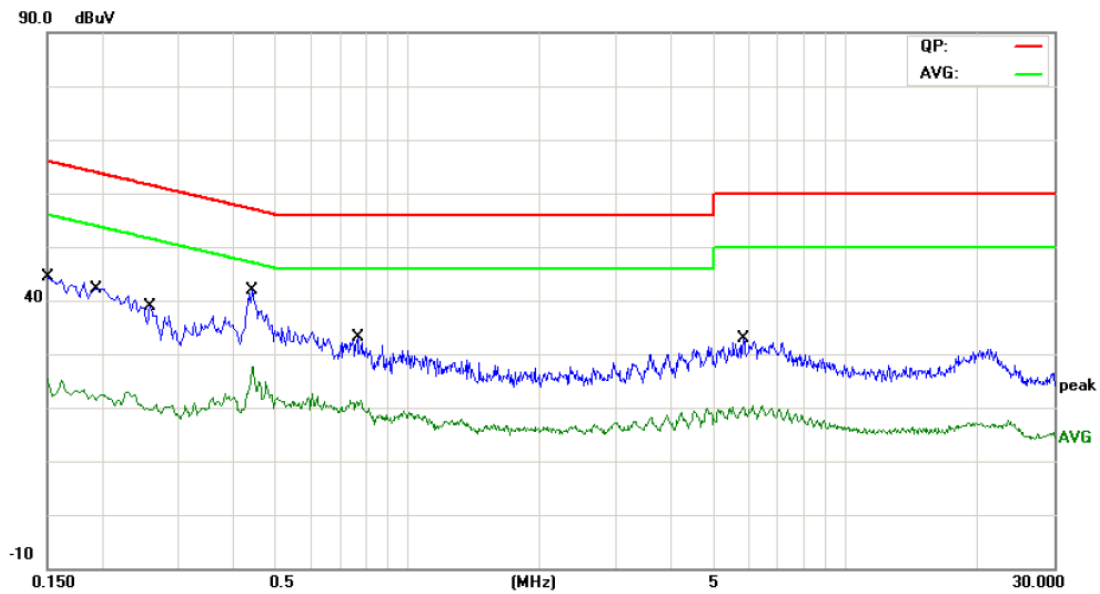

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	29.68	9.75	39.43	65.99	-26.56	QP
2		0.1500	12.85	9.75	22.60	55.99	-33.39	AVG
3		0.1940	26.25	9.78	36.03	63.86	-27.83	QP
4		0.1940	10.43	9.78	20.21	53.86	-33.65	AVG
5		0.2580	21.66	9.81	31.47	61.49	-30.02	QP
6		0.2580	9.02	9.81	18.83	51.49	-32.66	AVG
7	*	0.4420	25.75	9.89	35.64	57.02	-21.38	QP
8		0.4420	14.53	9.89	24.42	47.02	-22.60	AVG
9		0.7700	18.49	9.77	28.26	56.00	-27.74	QP
10		0.7700	10.84	9.77	20.61	46.00	-25.39	AVG
11		5.8460	16.16	9.84	26.00	60.00	-34.00	QP
12		5.8460	9.86	9.84	19.70	50.00	-30.30	AVG

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Terminal:</b>	Neutral		
<b>Test Mode:</b>	Adapter(CS6E050100FU) + TX GFSK Mode 2403.5MHz		
<b>Remark:</b>	All channels have been tested and Shows only the worst channels.		

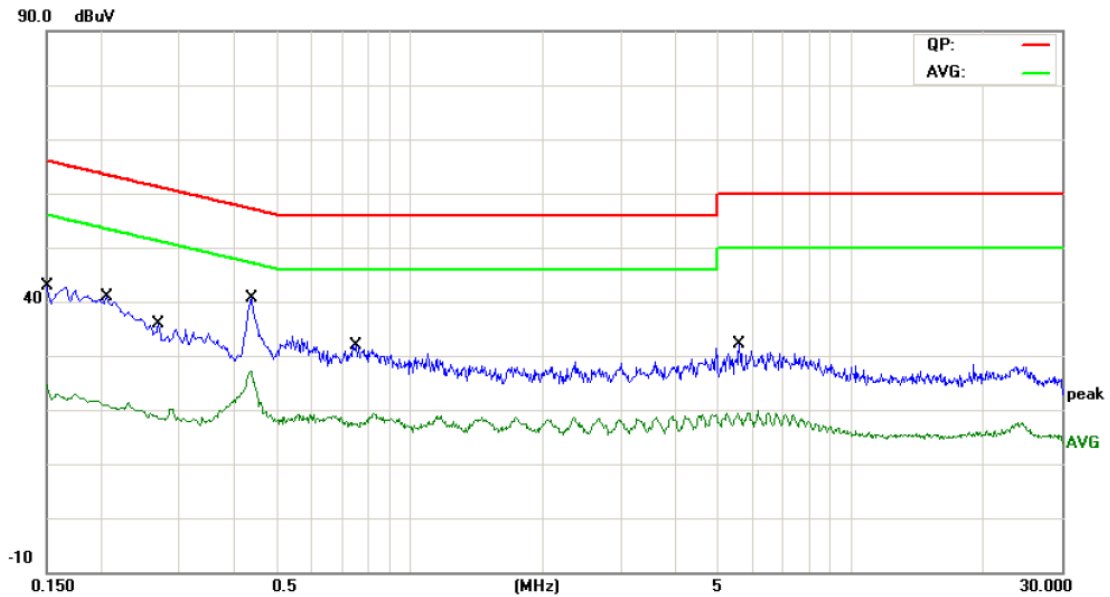

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	29.67	9.75	39.42	65.99	-26.57	QP
2		0.1500	13.06	9.75	22.81	55.99	-33.18	AVG
3		0.2060	25.63	9.78	35.41	63.36	-27.95	QP
4		0.2060	10.26	9.78	20.04	53.36	-33.32	AVG
5		0.2700	20.09	9.82	29.91	61.12	-31.21	QP
6		0.2700	7.74	9.82	17.56	51.12	-33.56	AVG
7		0.4380	25.59	9.88	35.47	57.10	-21.63	QP
8	*	0.4380	16.74	9.88	26.62	47.10	-20.48	AVG
9		0.7580	16.14	9.78	25.92	56.00	-30.08	QP
10		0.7580	6.94	9.78	16.72	46.00	-29.28	AVG
11		5.5700	12.79	9.85	22.64	60.00	-37.36	QP
12		5.5700	8.25	9.85	18.10	50.00	-31.90	AVG

Emission Level= Read Level+ Correct Factor

## Attachment B-- Radiated Emission Test Data


### 9KHz~30MHz

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

### 30MHz~1GHz

<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	Adapter(K05S050100G) + TX GFSK Mode 2403.5MHz		
<b>Remark:</b>	Only worse case is reported		

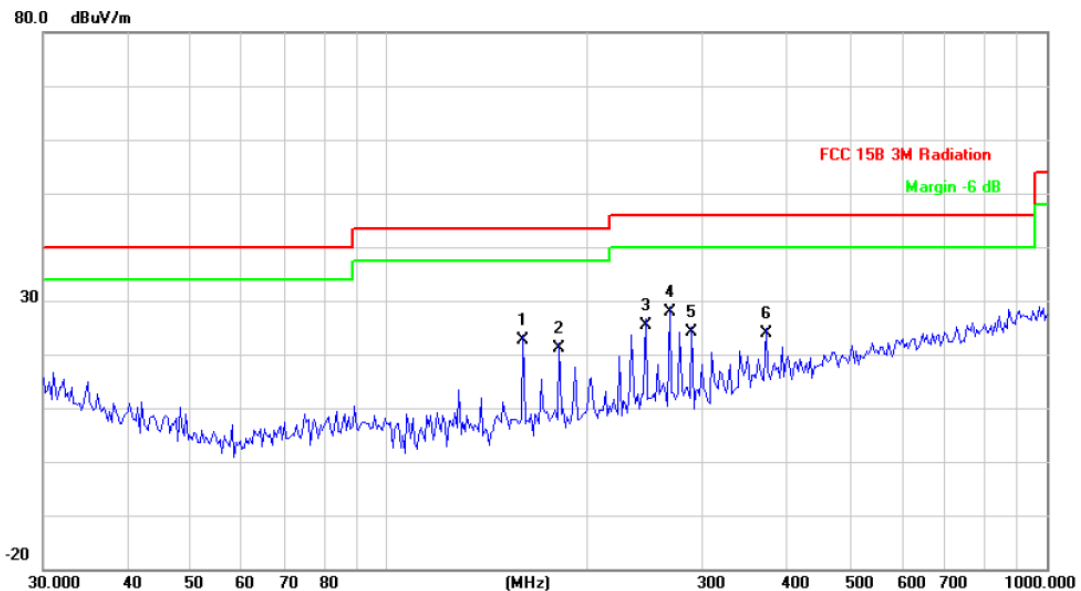


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		160.3456	43.37	-20.84	22.53	43.50	-20.97	QP
2		181.9202	41.29	-20.06	21.23	43.50	-22.27	QP
3		245.9509	42.74	-17.27	25.47	46.00	-20.53	QP
4	*	267.5455	44.64	-16.68	27.96	46.00	-18.04	QP
5		289.0021	40.38	-16.23	24.15	46.00	-21.85	QP
6		374.6225	37.15	-13.26	23.89	46.00	-22.11	QP

\*:Maximum data    x:Over limit    !:over margin

**Emission Level= Read Level+ Correct Factor**

<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	Adapter(K05S050100G) + TX GFSK Mode 2403.5MHz		
<b>Remark:</b>	Only worse case is reported		

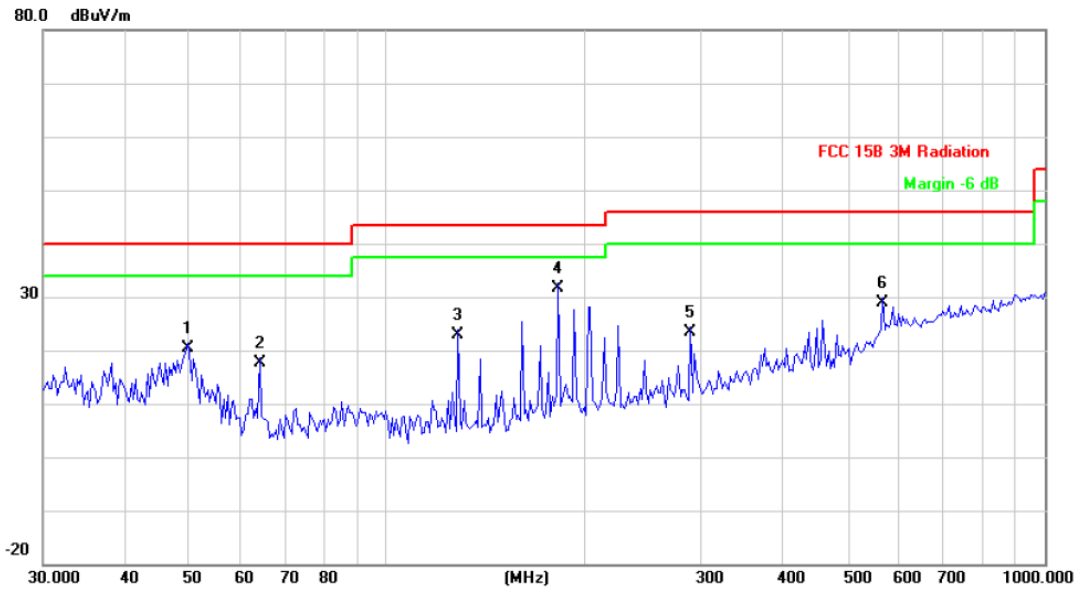


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		49.7068	43.69	-23.25	20.44	40.00	-19.56	QP
2		63.9828	41.66	-24.09	17.57	40.00	-22.43	QP
3		128.1130	45.26	-22.42	22.84	43.50	-20.66	QP
4	*	181.9202	51.75	-20.06	31.69	43.50	-11.81	QP
5		289.0021	39.53	-16.23	23.30	46.00	-22.70	QP
6		566.6223	37.55	-8.60	28.95	46.00	-17.05	QP

\*:Maximum data    x:Over limit    !:over margin

**Emission Level= Read Level+ Correct Factor**

<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	Adapter(CS6E050100FU) + TX GFSK Mode 2403.5MHz		
<b>Remark:</b>	Only worse case is reported		

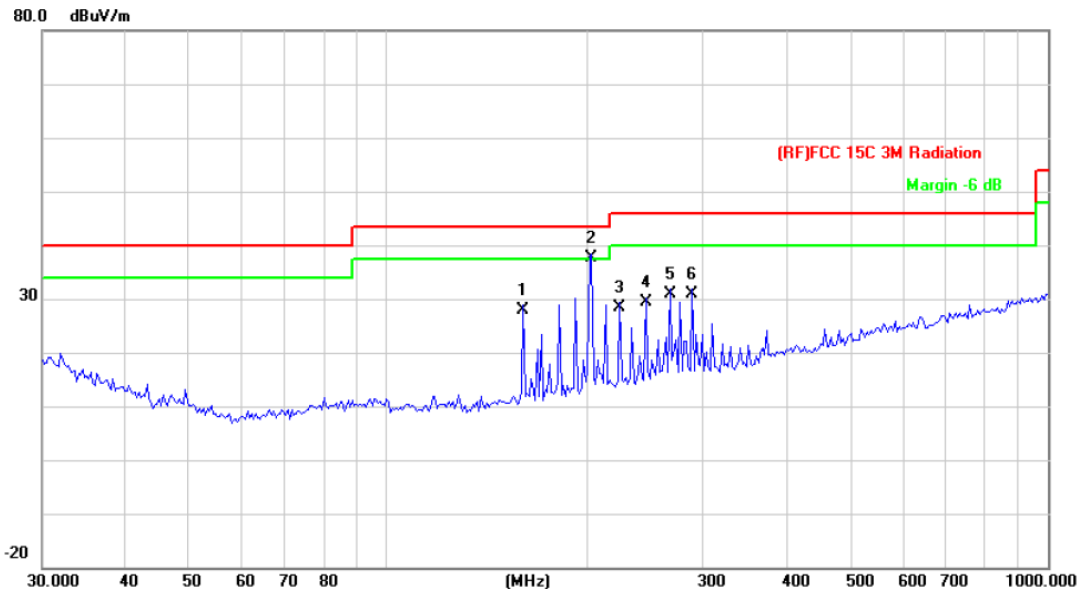


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detecto
1		160.3456	48.78	-20.84	27.94	43.50	-15.56	QP
2	*	203.5226	57.26	-19.70	37.56	43.50	-5.94	QP
3		224.5193	46.84	-18.50	28.34	46.00	-17.66	QP
4		245.9509	46.54	-17.27	29.27	46.00	-16.73	QP
5		267.5455	47.61	-16.68	30.93	46.00	-15.07	QP
6		289.0021	47.10	-16.23	30.87	46.00	-15.13	QP

\*:Maximum data    x:Over limit    !:over margin

**Emission Level= Read Level+ Correct Factor**

<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	Adapter(CS6E050100FU) + TX GFSK Mode 2403.5MHz		
<b>Remark:</b>	Only worse case is reported		

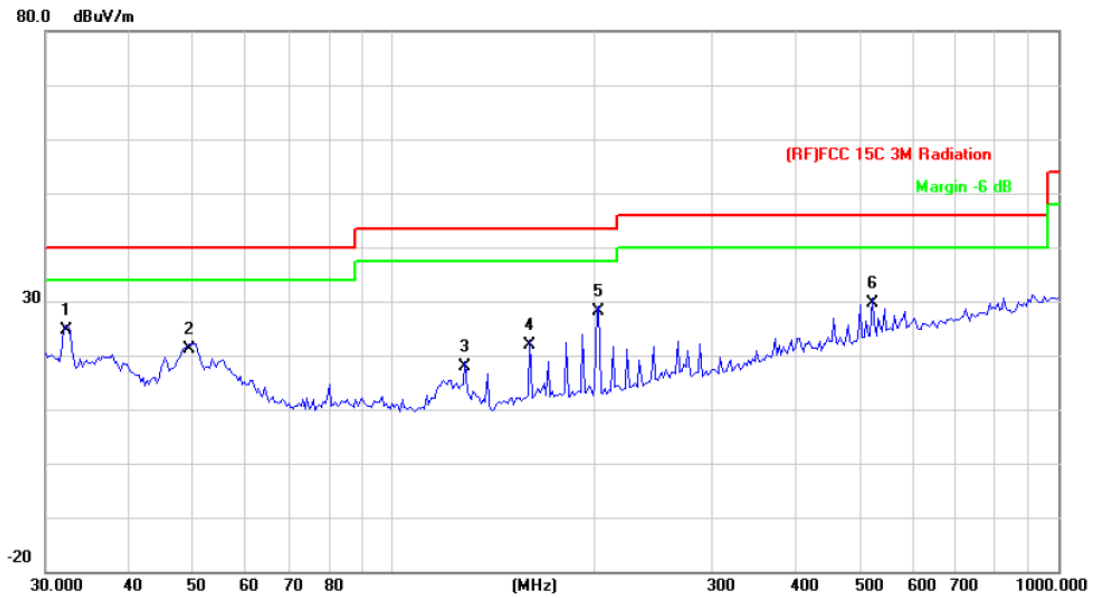

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	32.1795	39.32	-14.65	24.67	40.00	-15.33	QP
2		49.3594	44.36	-23.13	21.23	40.00	-18.77	QP
3		128.1130	40.29	-22.42	17.87	43.50	-25.63	QP
4		160.3456	42.76	-20.84	21.92	43.50	-21.58	QP
5		203.5228	47.71	-19.70	28.01	43.50	-15.49	QP
6		524.5541	39.12	-9.60	29.52	46.00	-16.48	QP

\*:Maximum data    x:Over limit    !:over margin

**Emission Level= Read Level+ Correct Factor**



**Above 1GHz (Only worse case is reported)**

<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX GFSK Mode 2403.5MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		4804.078	42.40	22.22	64.62	74.00	-9.38	peak
2	*	4807.030	29.71	22.22	51.93	54.00	-2.07	AVG

**Emission Level= Read Level+ Correct Factor**

<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%																																								
<b>Test Voltage:</b>	AC 120V/60Hz																																										
<b>Ant. Pol.</b>	Vertical																																										
<b>Test Mode:</b>	TX GFSK Mode 2403.5MHz																																										
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.																																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>4805.080</td> <td>48.06</td> <td>15.57</td> <td>63.63</td> <td>74.00</td> <td>-10.37</td> <td>peak</td> </tr> <tr> <td>2</td> <td>*</td> <td>4809.440</td> <td>34.44</td> <td>15.58</td> <td>50.02</td> <td>54.00</td> <td>-3.98</td> <td>AVG</td> </tr> </tbody> </table>								No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over				MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	1		4805.080	48.06	15.57	63.63	74.00	-10.37	peak	2	*	4809.440	34.44	15.58	50.02	54.00	-3.98	AVG
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over																																				
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector																																			
1		4805.080	48.06	15.57	63.63	74.00	-10.37	peak																																			
2	*	4809.440	34.44	15.58	50.02	54.00	-3.98	AVG																																			
<b>Emission Level= Read Level+ Correct Factor</b>																																											

<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX GFSK Mode 2439.5MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4876.660	49.29	15.89	65.18	74.00	-8.82	peak
2	*	4883.320	35.36	15.92	51.28	54.00	-2.72	AVG

**Emission Level= Read Level+ Correct Factor**

<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX GFSK Mode 2439.5MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4876.220	35.83	15.89	51.72	54.00	-2.28	AVG
2		4877.900	48.86	15.90	64.76	74.00	-9.24	peak

**Emission Level= Read Level+ Correct Factor**

<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX GFSK Mode 2468MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		4933.340	49.38	16.15	65.53	74.00	-8.47	peak
2	*	4937.460	35.90	16.17	52.07	54.00	-1.93	AVG

**Emission Level= Read Level+ Correct Factor**



<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%																																								
<b>Test Voltage:</b>	AC 120V/60Hz																																										
<b>Ant. Pol.</b>	Vertical																																										
<b>Test Mode:</b>	TX GFSK Mode 2468MHz																																										
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.																																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th>Detector</th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>4932.300</td> <td>49.98</td> <td>16.15</td> <td>66.13</td> <td>74.00</td> <td>-7.87</td> <td>peak</td> </tr> <tr> <td>2</td> <td>*</td> <td>4933.200</td> <td>35.99</td> <td>16.15</td> <td>52.14</td> <td>54.00</td> <td>-1.86</td> <td>AVG</td> </tr> </tbody> </table>								No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector			MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		1		4932.300	49.98	16.15	66.13	74.00	-7.87	peak	2	*	4933.200	35.99	16.15	52.14	54.00	-1.86	AVG
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector																																			
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB																																				
1		4932.300	49.98	16.15	66.13	74.00	-7.87	peak																																			
2	*	4933.200	35.99	16.15	52.14	54.00	-1.86	AVG																																			
<b>Emission Level= Read Level+ Correct Factor</b>																																											

**Conducted Emission Test Data**

<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Test Mode:</b>	TX GFSK Mode		
<b>Remark:</b>	This report only shall the worst case mode.		



**2403.5 MHz**

**0.03GHz-26.5GHz**

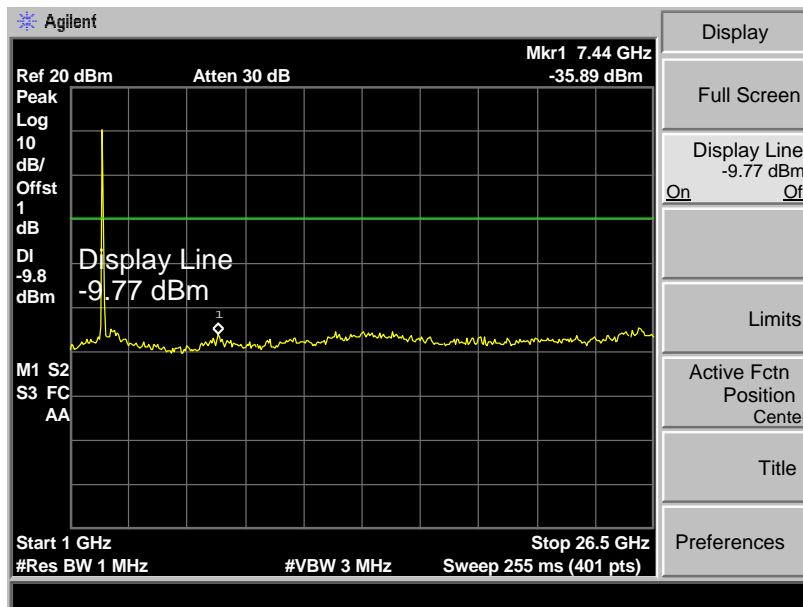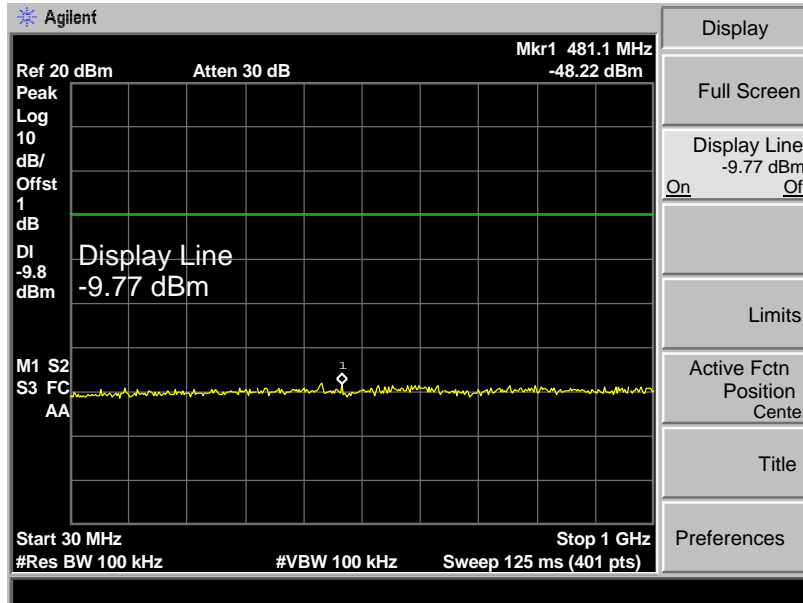


2439.5 MHz

0.03GHz-26.5GHz

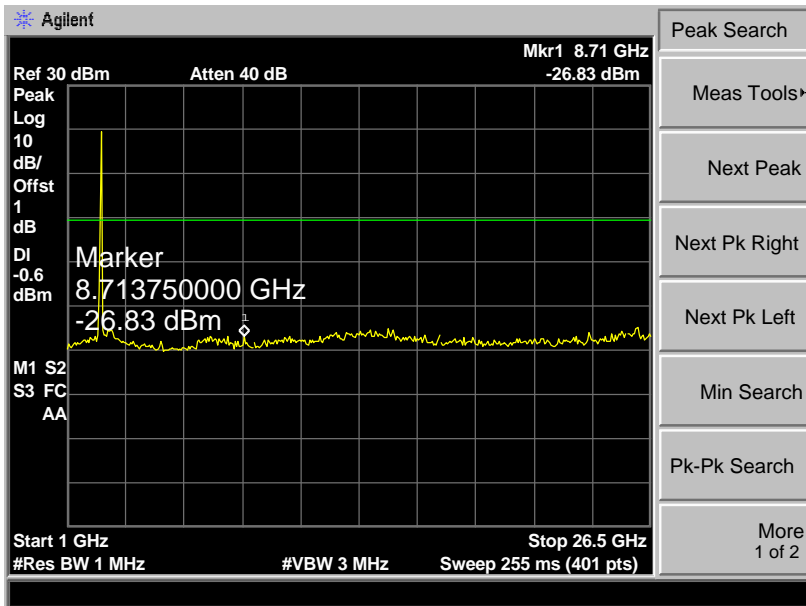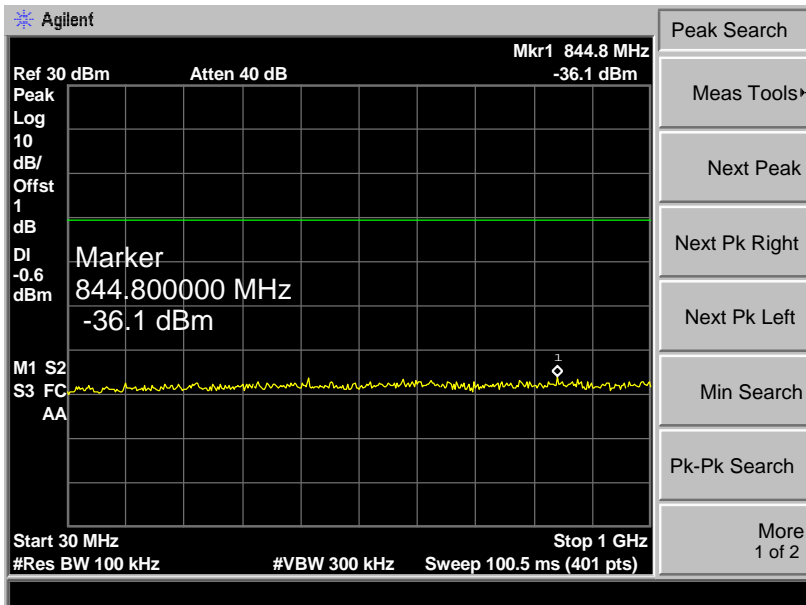




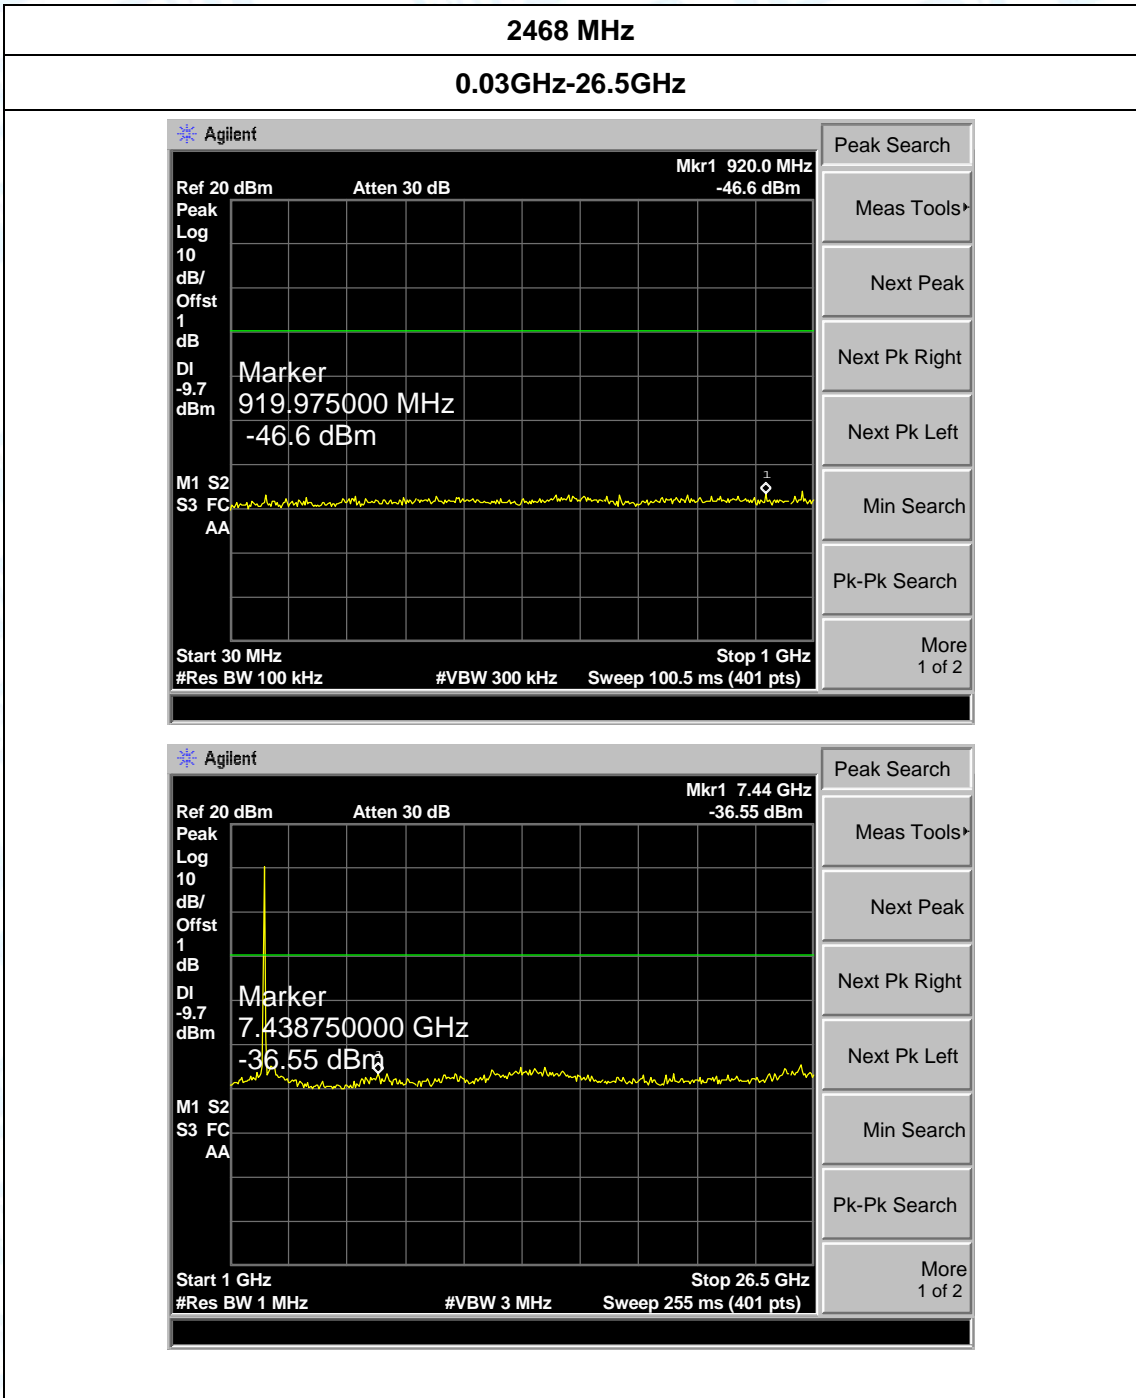

## Attachment C-- Restricted Bands Requirement Test Data

### (1) Radiation Test


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2403.5MHz		
Remark:	Only worse case is reported		

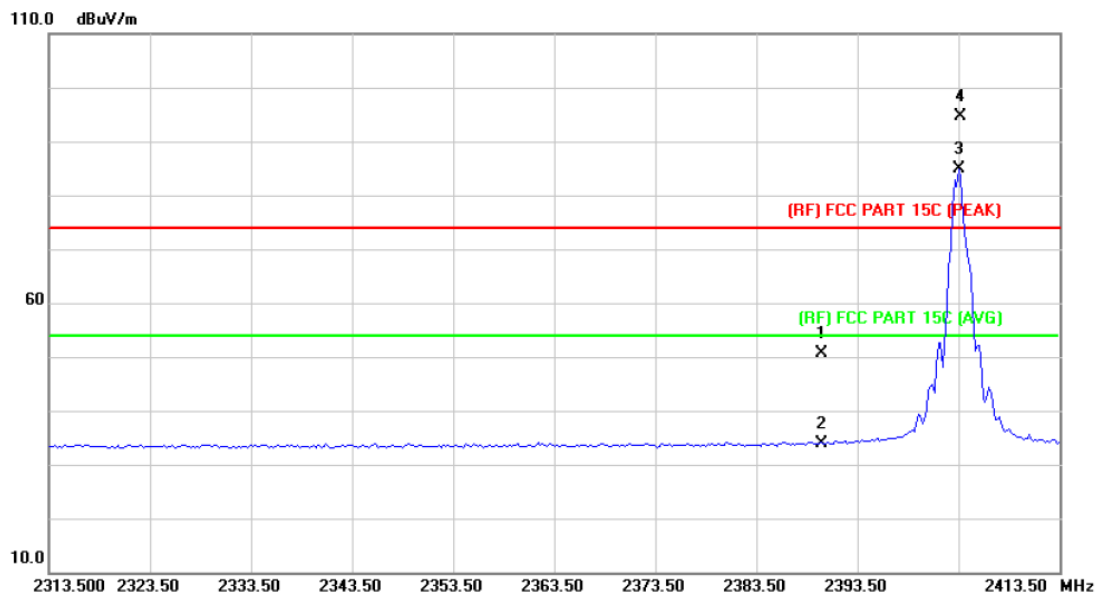

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		2390.000	47.65	2.91	50.56	74.00	-23.44	peak
2		2390.000	31.08	2.91	33.99	54.00	-20.01	AVG
3	*	2403.500	81.99	2.96	84.95	Fundamental Frequency		AVG
4	X	2403.700	91.72	2.96	94.68	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX GFSK Mode 2403.5MHz		
<b>Remark:</b>	Only worse case is reported		

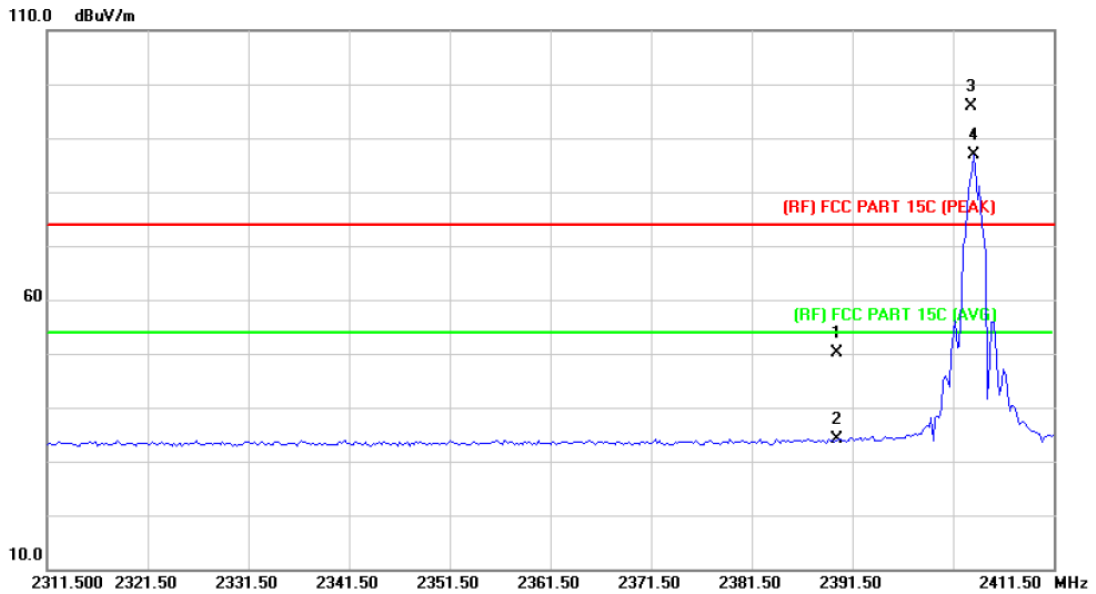

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	47.29	2.91	50.20	74.00	-23.80	peak
2		2390.000	31.21	2.91	34.12	54.00	-19.88	AVG
3	X	2403.300	92.91	2.96	95.87	Fundamental Frequency		peak
4	*	2403.500	84.04	2.96	87.00	Fundamental Frequency		AVG

**Emission Level= Read Level+ Correct Factor**


<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX GFSK Mode 2468 MHz		
<b>Remark:</b>	Only worse case is reported		

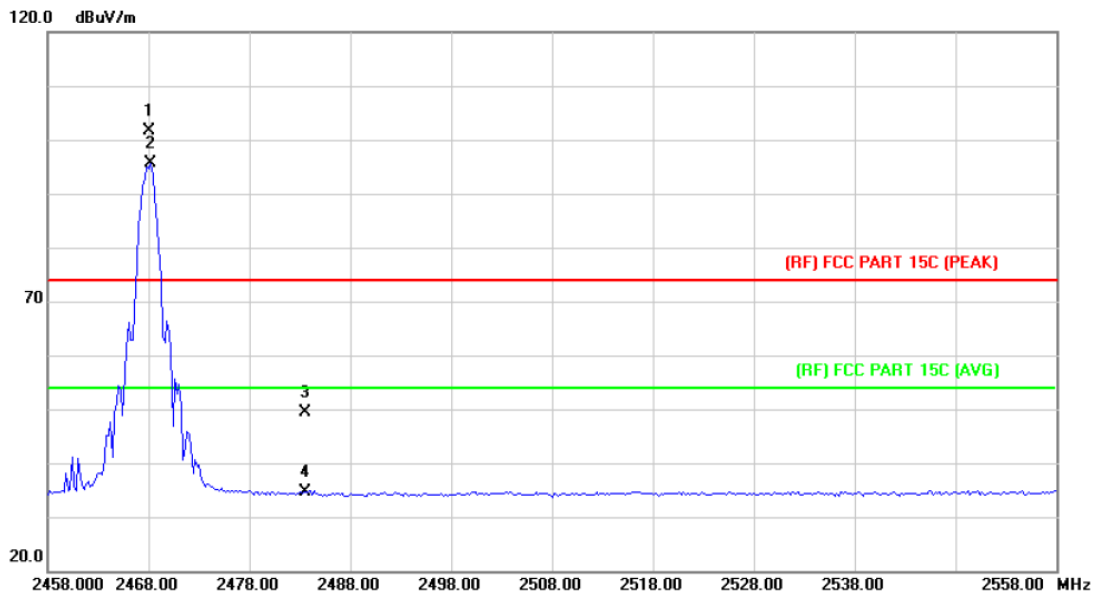

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2468.000	98.43	3.32	101.75	Fundamental Frequency		peak
2	*	2468.200	92.40	3.32	95.72	Fundamental Frequency		AVG
3		2483.500	46.07	3.40	49.47	74.00	-24.53	peak
4		2483.500	31.33	3.40	34.73	54.00	-19.27	AVG

Emission Level= Read Level+ Correct Factor

<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX GFSK Mode 2468 MHz		
<b>Remark:</b>	Only worse case is reported		


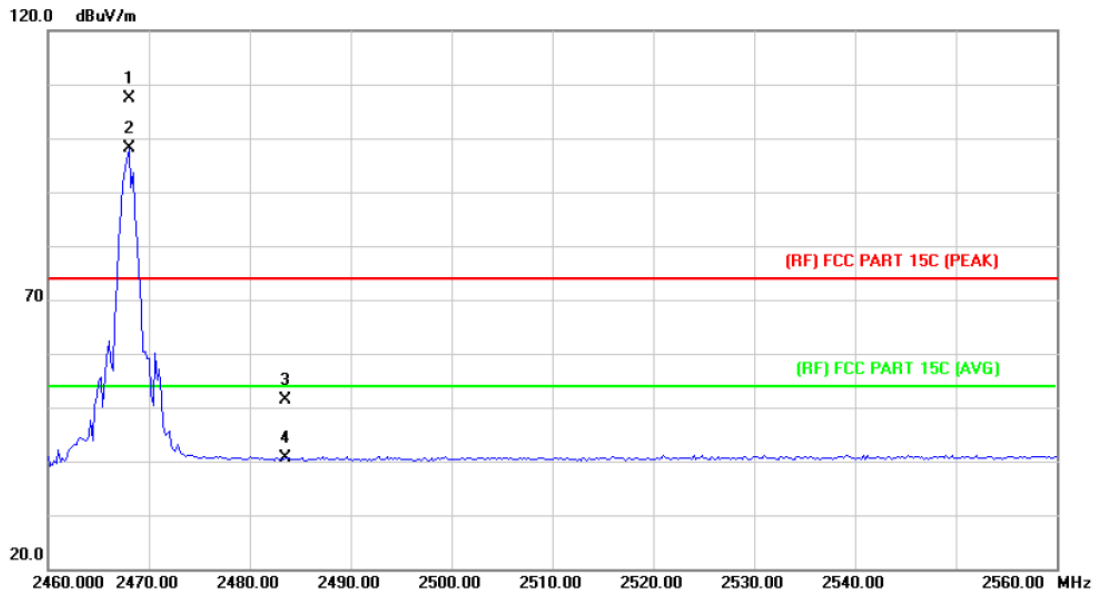


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2468.000	103.96	3.32	107.28	Fundamental Frequency		peak
2	*	2468.000	94.87	3.32	98.19	Fundamental Frequency		AVG
3		2483.500	47.92	3.40	51.32	74.00	-22.68	peak
4		2483.500	37.14	3.40	40.54	54.00	-13.46	AVG



Emission Level= Read Level+ Correct Factor

**(2) Conducted Band Edge Test**

<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Test Mode:</b>	TX GFSK Mode 2403.5MHz/2468 MHz		
<b>Remark:</b>	Only worse case is reported		

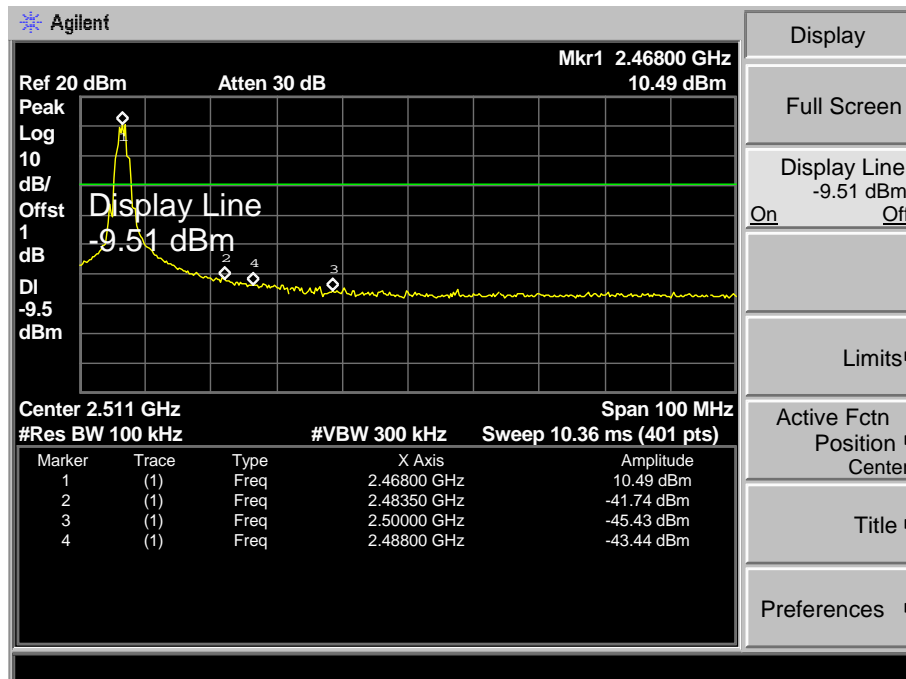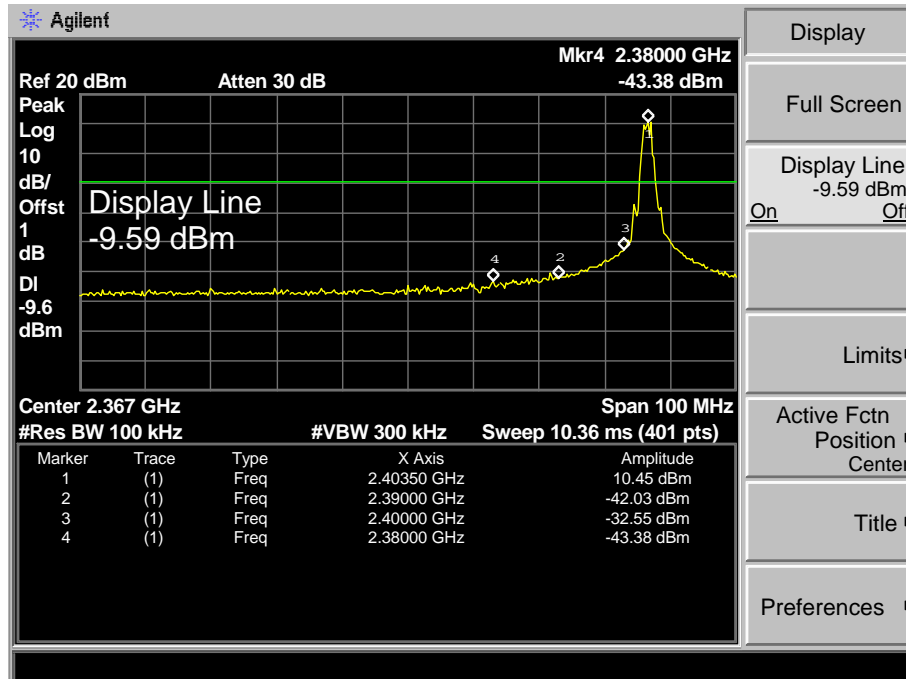


<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Test Mode:</b>	GFSK Hopping Mode		
<b>Remark:</b>	Only worse case is reported		

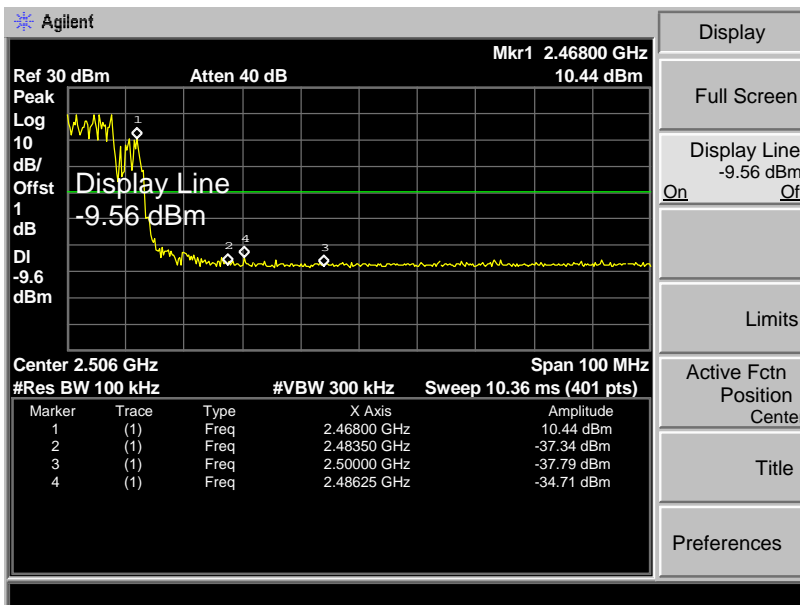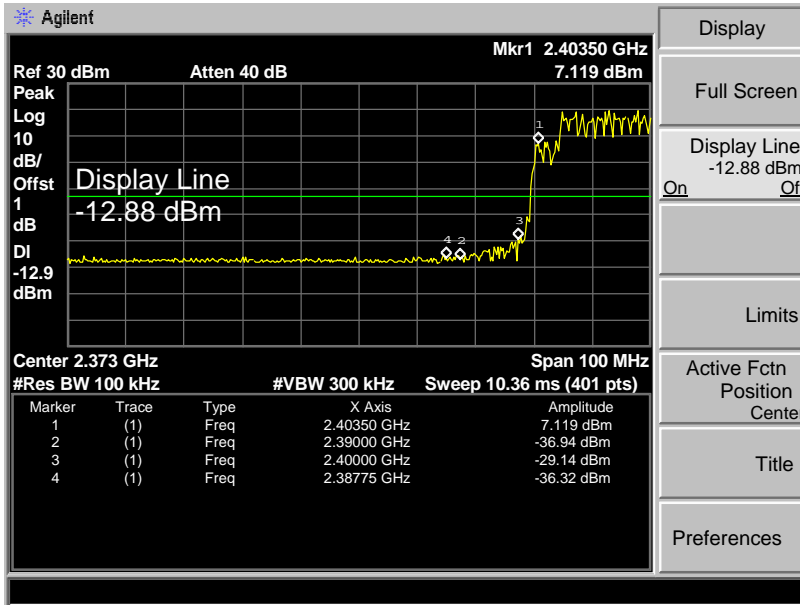

## Attachment D-- Number of Hopping Channel Test Data

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	Hopping Mode		
Remark:	The number of total hopping frequencies up to 44 and only 20 channels will hopping at the same time.		
Frequency Range	Test Mode	Quantity of Hopping Channel	Limit
2403.5MHz~2468MHz	GFSK	44	>15

### GFSK Mode

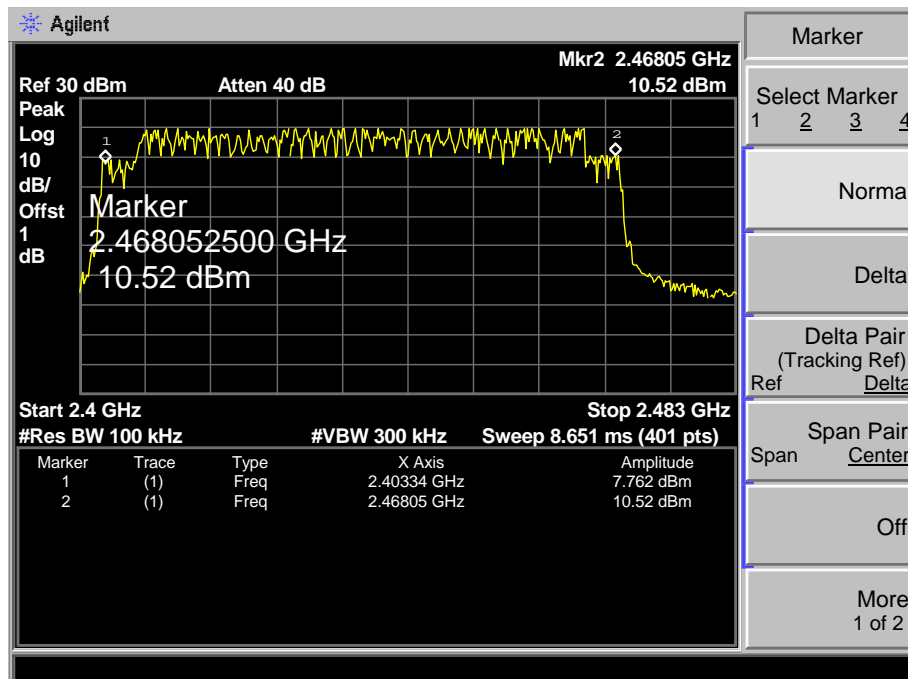



## Attachment E-- Average Time of Occupancy Test Data

<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%			
<b>Test Voltage:</b>	AC 120V/60Hz					
<b>Test Mode:</b>	Hopping Mode (GFSK)					
<b>Remark:</b>	The number of total hopping frequencies up to 44.					
Test Mode	Channel (MHz)	Reading Time (ms)	Total hops (N)	Test Result (ms)	Limit (ms)	Result
GFSK	2439.5	3.6192	94	340.20	400	PASS

The Dwell Time = Burst Width \* Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation:  $0.4 [s] * hopping\ number = 0.4 [s] * 44 [ch] = 17.6[s*ch]$ ;


The burst width, which is directly measured, refers to the duration on one channel hop.

The maximum number of hopping channels in 17.6s is 94.

Reading Time= $0.9048ms*4=3.6192$


### GFSK Hopping Mode

2439.5 MHz

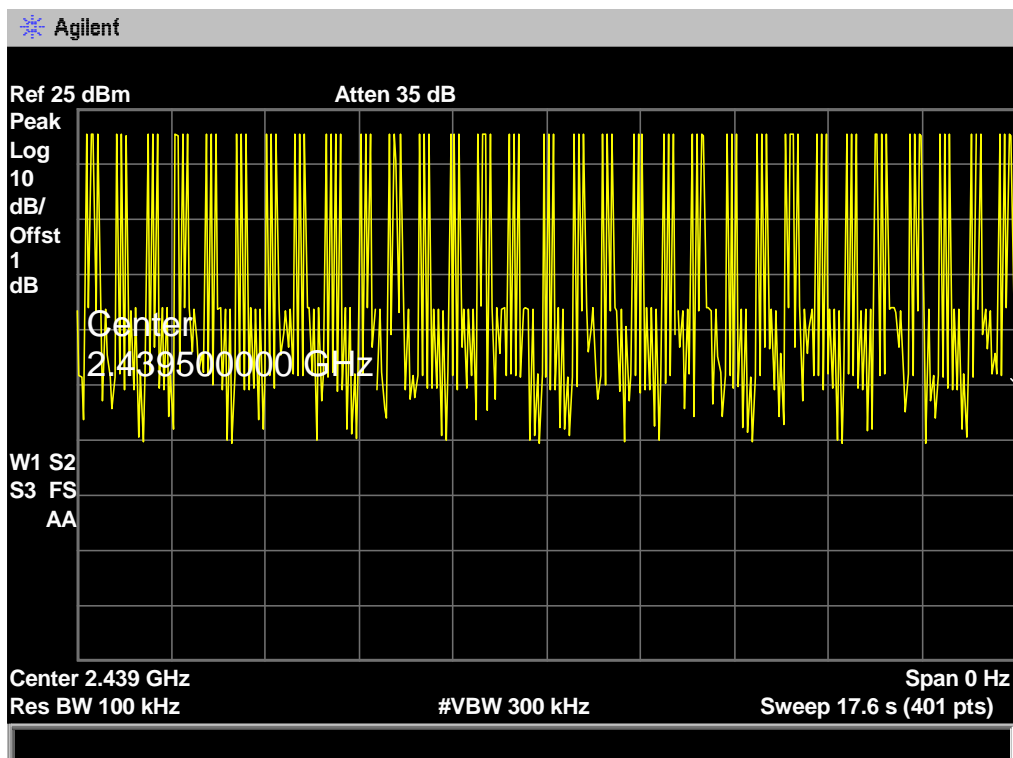


**GFSK Hopping Mode**

2439.5 MHz

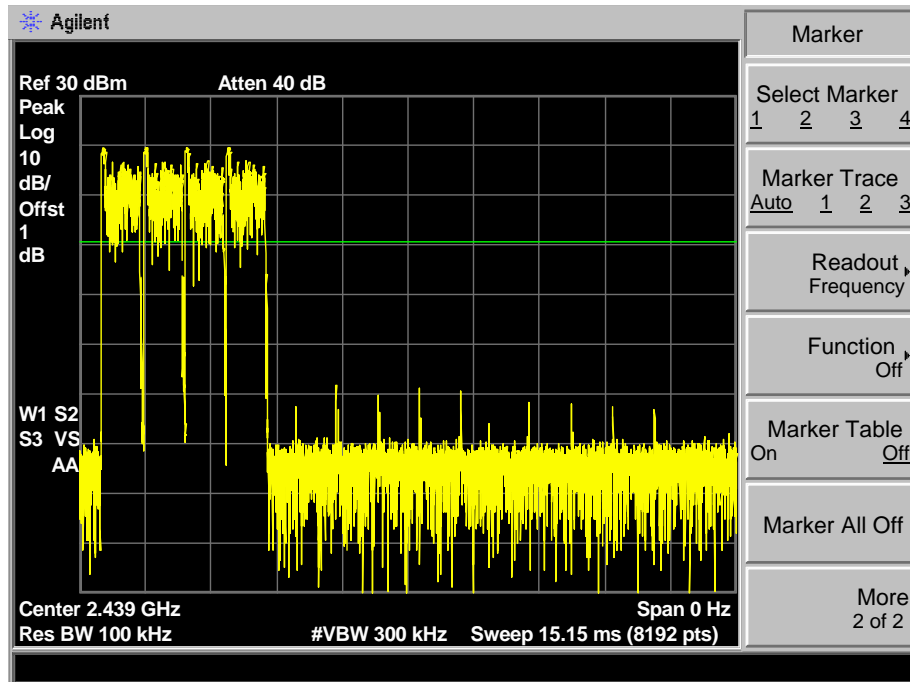

**GFSK Hopping Mode**

2439.5 MHz

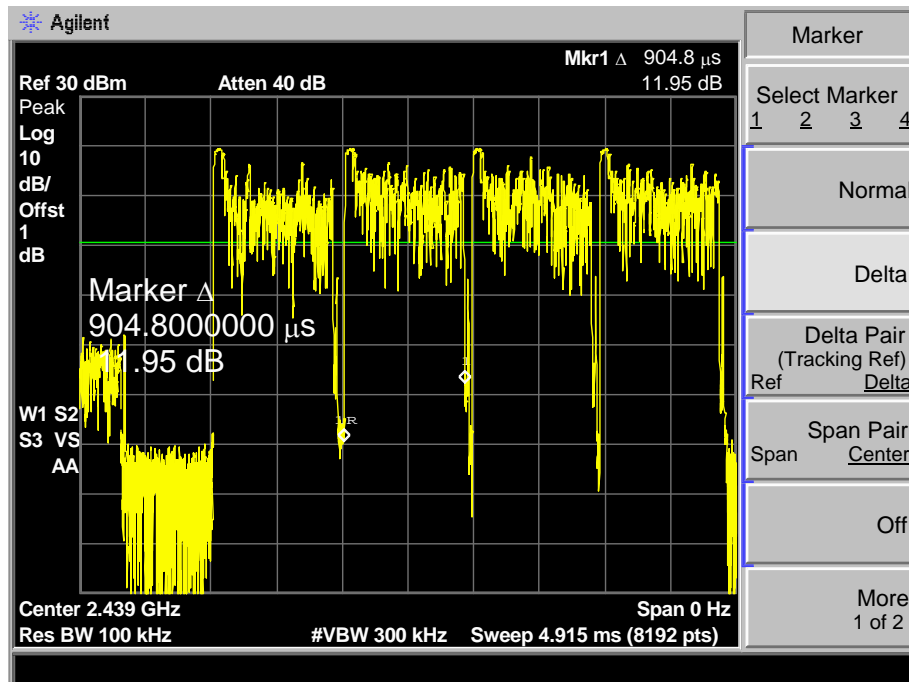


# Attachment F-- Channel Separation and Bandwidth Test Data

## Bandwidth Test Data:

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX Mode (GFSK)		
Channel frequency (MHz)	99% OBW (kHz)	20dB Bandwidth (kHz)	20dB Bandwidth *2/3 (kHz)
2403.5	2064.3	2138	1425.33
2439.5	2075.9	2148	1432.00
2468.0	2097.7	2145	1430.00


### GFSK TX Mode

#### 2403.5 MHz

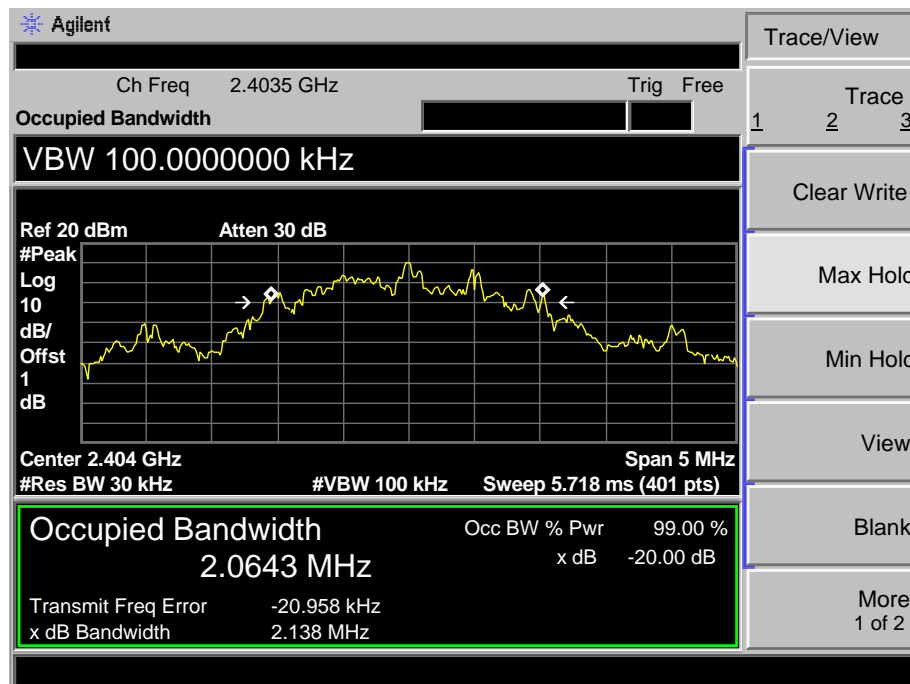


**GFSK TX Mode**

**2439.5 MHz**

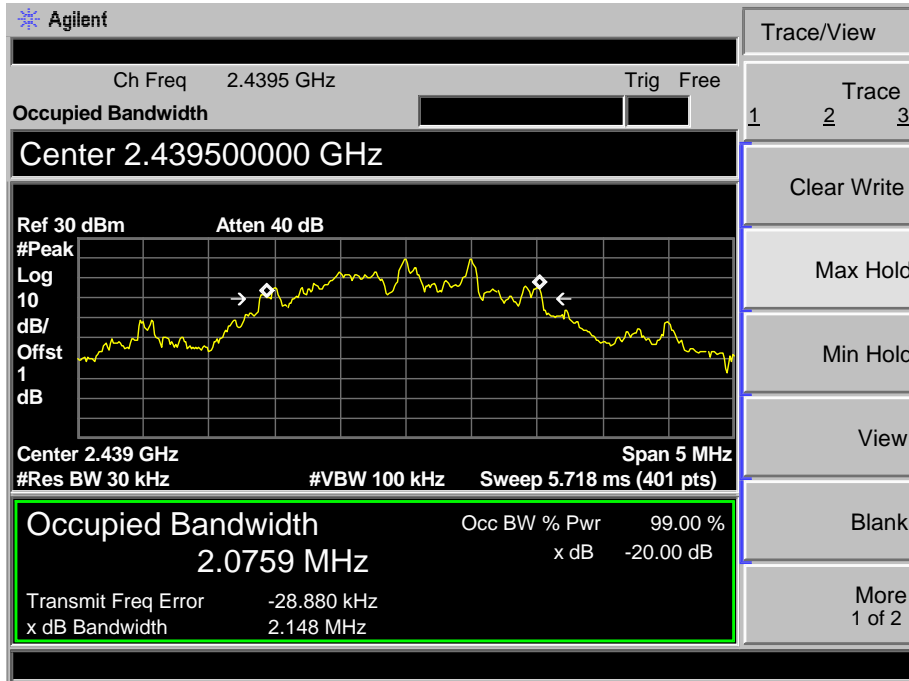


**GFSK TX Mode**

**2468 MHz**

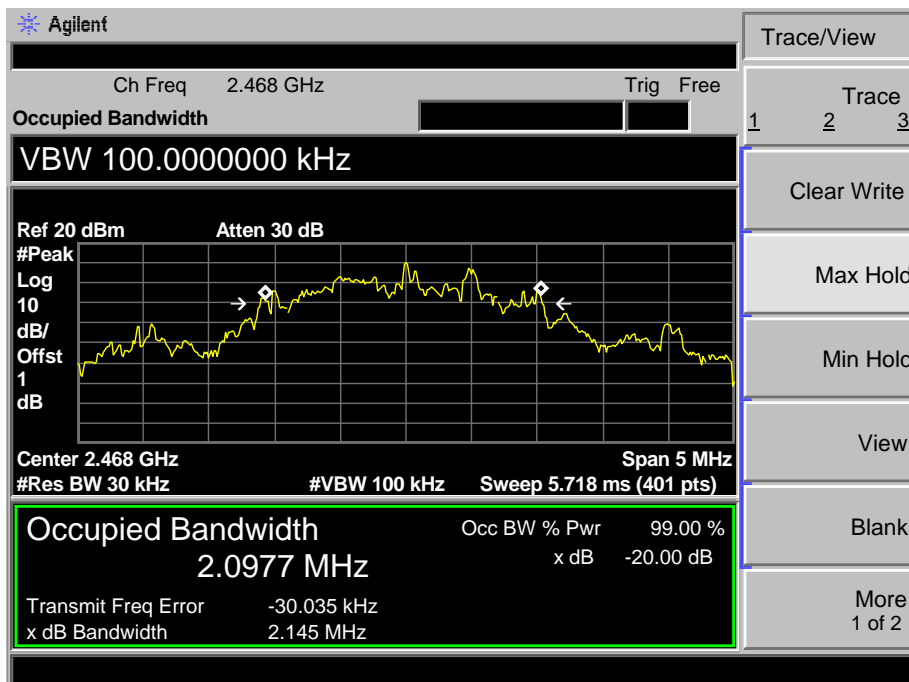


**Channel Separation Test data:**


<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Test Mode:</b>	Hopping Mode (GFSK)		
<b>Remark:</b>	We test all channel and worse case recorded in the report.		
Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit (kHz)	
2403.5	1500.0	1425.33	
2439.5	1537.5	1432.00	
2468.0	1500.0	1430.00	

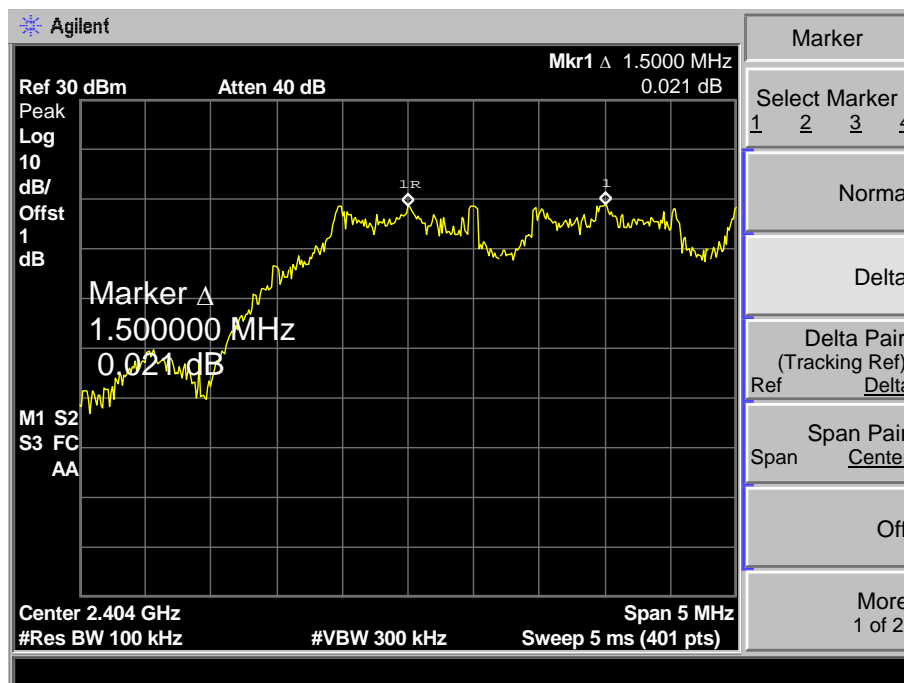**GFSK Hopping Mode**
**2403.5 MHz**


**2439.5MHz**

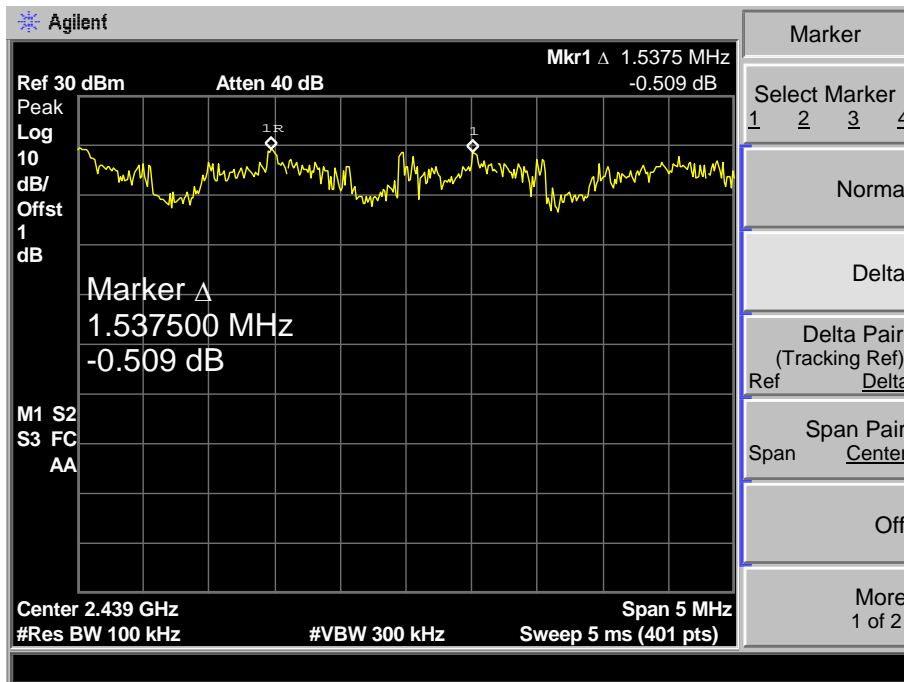

**2468MHz**

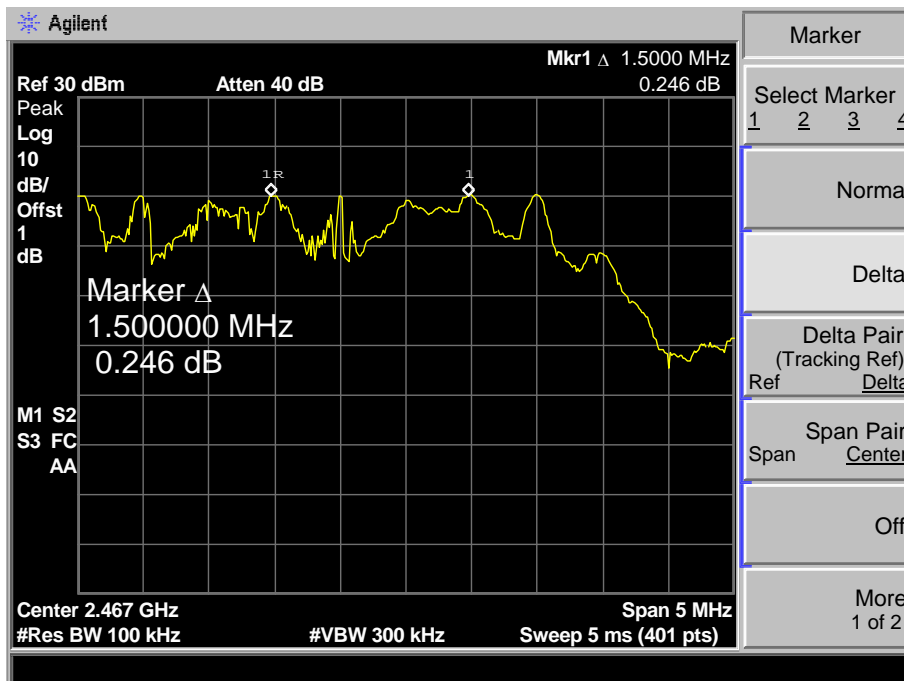


## Attachment G-- Peak Output Power Test Data

<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Test Mode:</b>	TX Mode (GFSK)		
Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)	
2403.5	10.27	21	
2439.5	19.52		
2468.0	10.34		
<b>GFSK TX Mode</b>			
<b>2403.5 MHz</b>			
<p>The screenshot shows an Agilent spectrum analyzer interface. The main display area shows a yellow trace with a peak at 2.4038250 GHz and 10.27 dBm. The interface includes a grid, a peak search marker, and various measurement and search buttons on the right side. The top left corner shows 'Agilent' and 'Ref 20 dBm Atten 30 dB'. The top right corner shows 'Mkr1 2.4038250 GHz 10.27 dBm'. The bottom left corner shows 'Center 2.404 GHz #Res BW 3 MHz'. The bottom right corner shows 'Span 5 MHz Sweep 5 ms (401 pts)'. The right side of the interface has a vertical menu with buttons: 'Peak Search', 'Meas Tools', 'Next Peak', 'Next Pk Right', 'Next Pk Left', 'Min Search', 'Pk-Pk Search', and 'More 1 of 2'.</p>			


**GFSK TX Mode**

**2439.5 MHz**

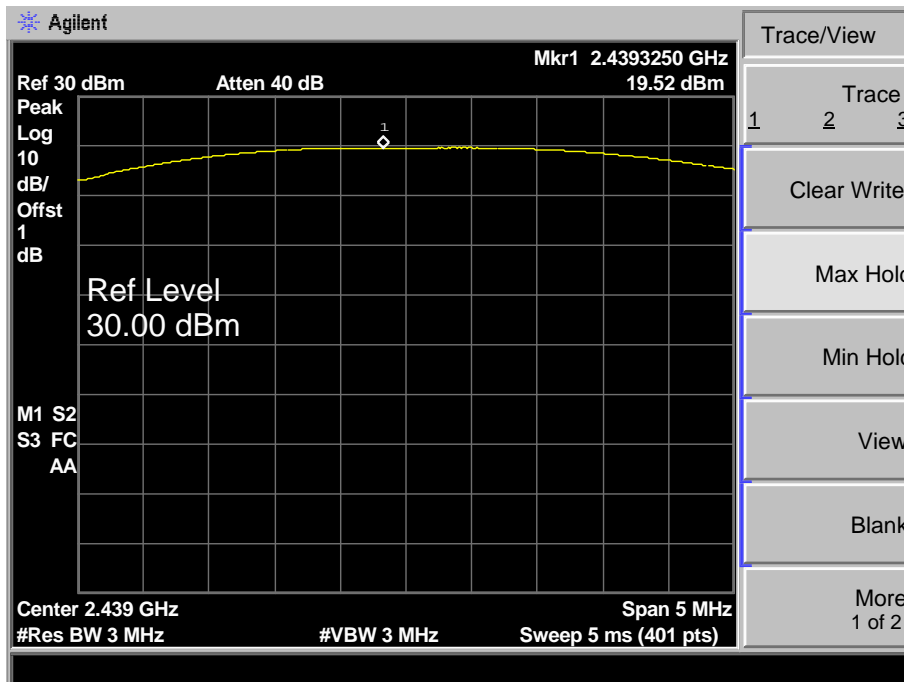

**GFSK TX Mode**

**2468.0 MHz**

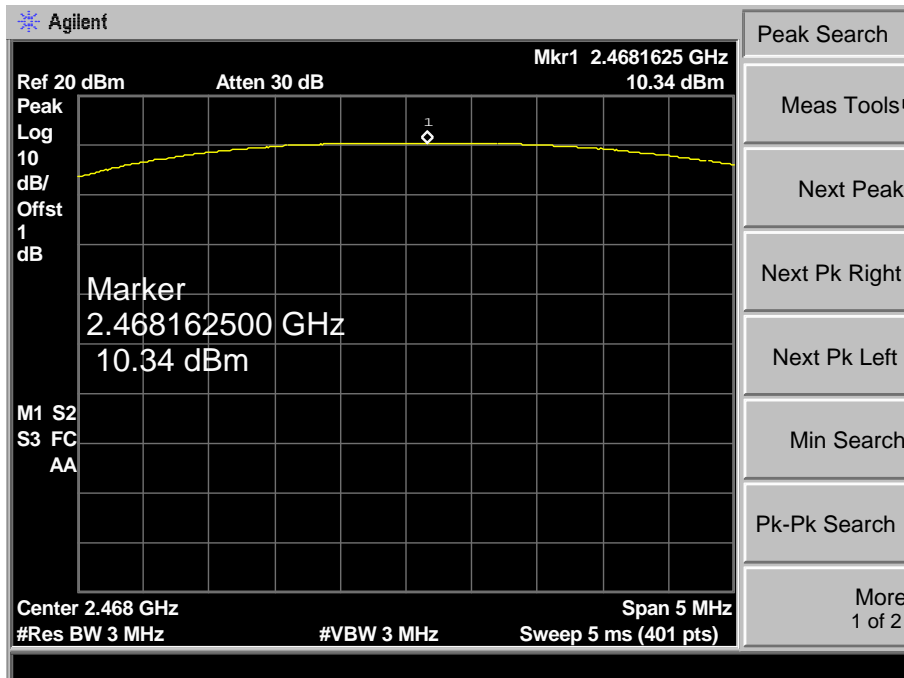

-----END OF REPORT-----