

RF MEASUREMENT REPORT

FCC ID: 2AF5PR14
Applicant: MTRLC LLC
Product: AX6000 Dual-band WiFi Router
Model No.: R14
FCC Classification: Unlicensed National Information Infrastructure (NII)
FCC Rule Part(s): Part 15 Subpart E (Section 15.407)
Result: Complies
Received Date: 2022-12-30
Test Date: 2023-01-04 ~ 2023-03-23

Reviewed By:

Vincent Yu

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2301RSU001-U2	V01	Initial Report	2023-03-24	Valid


CONTENTS

Description	Page
1. General Information	6
1.1. Applicant	6
1.2. Manufacturer.....	6
1.3. Testing Facility	6
1.4. Product Information	7
1.5. Radio Specification under Test.....	7
1.6. Working Frequencies.....	8
1.7. Antenna Details	9
2. Test Configuration	10
2.1. Test Mode	10
2.2. Test System Connection Diagram	10
2.3. Test System Details	11
2.4. Test Software	11
2.5. Applied Standards	11
2.6. Test Environment Condition.....	11
3. Antenna Requirements	12
4. Measuring Instrument	13
5. Decision Rules and Measurement Uncertainty	14
5.1. Decision Rules.....	14
5.2. Measurement Uncertainty	14
6. Test Result.....	15
6.1. Summary	15
6.2. 26dB & 99% Bandwidth Measurement.....	16
6.2.1. Test Limit.....	16
6.2.2. Test Procedure	16
6.2.3. Test Setting	16
6.2.4. Test Setup.....	17
6.2.5. Test Result	17
6.3. 6dB Bandwidth Measurement	18
6.3.1. Test Limit.....	18
6.3.2. Test Procedure	18
6.3.3. Test Setting	18
6.3.4. Test Setup.....	18

6.3.5.	Test Result	18
6.4.	Output Power Measurement.....	19
6.4.1.	Test Limit.....	19
6.4.2.	Test Procedure	19
6.4.3.	Test Setting	19
6.4.4.	Test Setup.....	19
6.4.5.	Test Result	19
6.5.	Transmit Power Control Measurement.....	20
6.5.1.	Test Limit.....	20
6.5.2.	Test Procedure	20
6.5.3.	Test Setting	20
6.5.4.	Test Setup.....	20
6.5.5.	Test Result	20
6.6.	Power Spectral Density Measurement	21
6.6.1.	Test Limit.....	21
6.6.2.	Test Procedure	21
6.6.3.	Test Setting	21
6.6.4.	Test Setup.....	22
6.6.5.	Test Result	22
6.7.	Frequency Stability Measurement	23
6.7.1.	Test Limit.....	23
6.7.2.	Test Procedure	23
6.7.3.	Test Setup.....	24
6.7.4.	Test Result	24
6.8.	Radiated Spurious Emission Measurement	25
6.8.1.	Test Limit.....	25
6.8.2.	Test Procedure	25
6.8.3.	Test Setting	25
6.8.4.	Test Setup.....	27
6.8.5.	Test Result	28
6.9.	Radiated Restricted Band Edge Measurement	29
6.9.1.	Test Limit.....	29
6.9.2.	Test Procedure	31
6.9.3.	Test Setting	31
6.9.4.	Test Setup.....	32
6.9.5.	Test Result	32
6.10.	AC Conducted Emissions Measurement.....	33
6.10.1.	Test Limit.....	33

6.10.2. Test Setup.....	33
6.10.3. Test Result.....	33
Appendix A – Test Result.....	34
A.1 Duty Cycle Test Result.....	34
A.2 26dB & 99% Bandwidth Test Result	37
A.3 6dB Bandwidth Test Result.....	63
A.4 Output Power Test Result	70
A.5 Power Spectral Density Test Result.....	74
A.6 Frequency Stability Test Result.....	166
A.7 Radiated Spurious Emission Test Result.....	167
A.8 Radiated Restricted Band Edge Test Result.....	267
A.9 AC Conducted Emissions Test Result	459
Appendix B – Test Setup Photograph	461
Appendix C – EUT Photograph	462

1.4. Product Information

Product Name	AX6000 Dual-band WiFi Router
Model No.	R14
EUT Identification No.	3412-R14-10-0008, 3412-R14-10-0012, 20230210suple#01
Wi-Fi Specification	802.11a/b/g/n/ac/ax
Antenna Information	See Section 1.7
Accessory	
Adapter	Model: RD1202000-CS5-154MG Input: 100-240V ~ 50/60Hz 1.0A Max Output: 12V  2.0A
Note: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification under Test

Frequency Range	For 802.11a/n-HT20/ac-VHT20/ax-HE20: 5180~5240MHz, 5260~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40/ax-HE40: 5190~5230MHz, 5270~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80/ax-HE80: 5210MHz, 5290MHz, 5530MHz, 5610 MHz, 5690MHz, 5775MHz For 802.11ac-VHT160/ax-HE160: 5250MHz, 5570MHz
Type of Modulation	802.11a/n/ac: OFDM 802.11ax: OFDMA
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 600Mbps 802.11ac: up to 1733.4Mbps 802.11ax: up to 4804Mbps

1.6. Working Frequencies

802.11a/n-HT20/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

802.11n-HT40/ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

802.11ac-VHT160/ax-HE160

Channel	Frequency	Channel	Frequency	Channel	Frequency
50	5250 MHz	114	5570 MHz	--	--

1.7. Antenna Details

Antenna Type	Frequency Range (MHz)	N _{ANT}	Antenna Gain (dBi)				Max. Antenna Gain (dBi)	Directional Gain (dBi)
			Ant 1	Ant 2	Ant 3	Ant 4		
Dipole	2400 ~ 2483.5	4	2.14	2.38	2.77	4.15	4.15	7.64
	5150 ~ 5250	4	4.94	5.30	4.26	3.81	5.30	7.40
	5250 ~ 5350	4	5.07	4.96	3.78	3.21	5.07	7.05
	5470 ~ 5725	4	3.73	2.81	2.29	2.28	3.73	6.20
	5725 ~ 5850	4	4.28	2.31	2.55	3.66	4.28	7.31

Remark: The directional gain is measured which follows the procedure of KDB 662911 D03. The antenna report is provided for this application.

2. Test Configuration


2.1. Test Mode

Mode 1: Transmit by 802.11a (6Mbps) _CDD_4T1S
Mode 2: Transmit by 802.11n-HT20 (MCS0) _CDD_4T1S
Mode 3: Transmit by 802.11n-HT40 (MCS0) _CDD_4T1S
Mode 4: Transmit by 802.11ac-VHT20 (MCS0) _CDD_4T1S
Mode 5: Transmit by 802.11ac-VHT40 (MCS0) _CDD_4T1S
Mode 6: Transmit by 802.11ac-VHT80 (MCS0) _CDD_4T1S
Mode 7: Transmit by 802.11ac-VHT160 (MCS0) _CDD_4T1S
Mode 8: Transmit by 802.11ax-HE20 (MCS0) _CDD_4T1S
Mode 9: Transmit by 802.11ax-HE40 (MCS0) _CDD_4T1S
Mode 10: Transmit by 802.11ax-HE80 (MCS0) _CDD_4T1S
Mode 11: Transmit by 802.11 ax-HE160 (MCS0) _CDD_4T1S

Note: All modes of operation and data rates were investigated, so all RF test requirements was executed at the worst data rate.

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

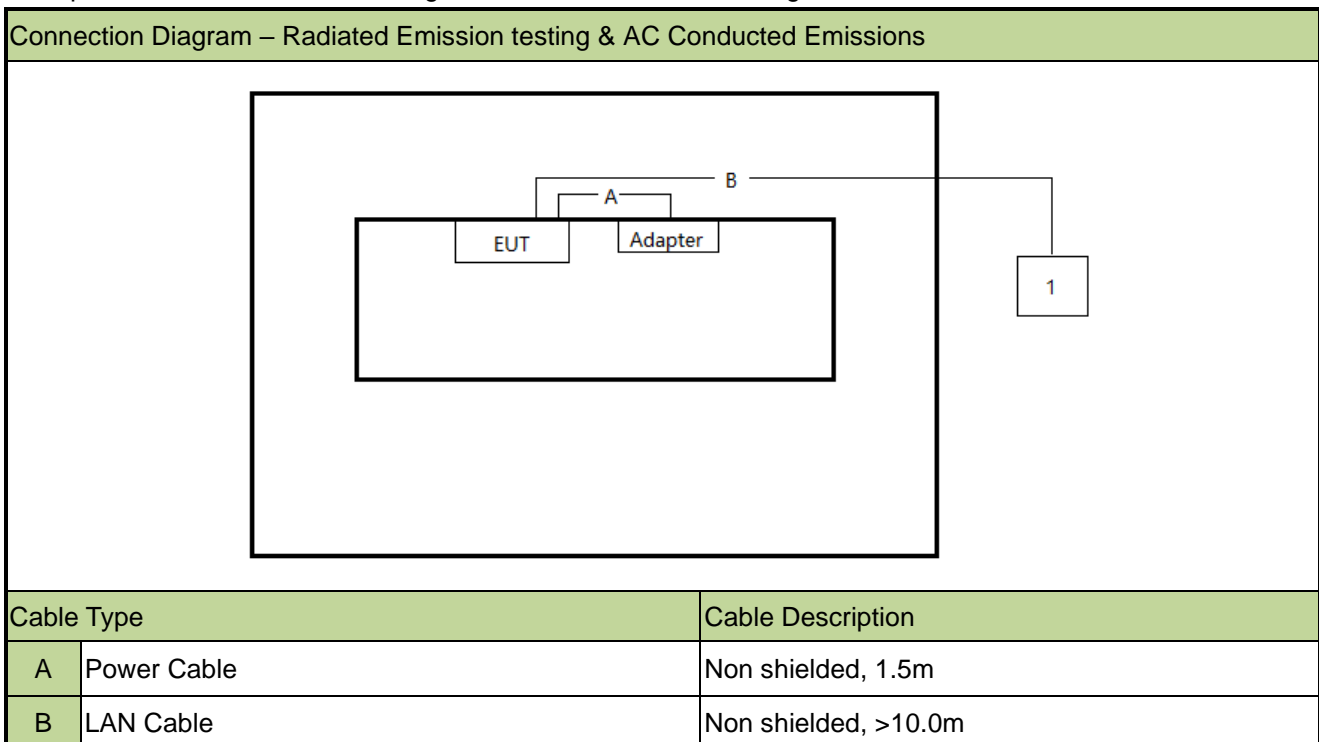

2.3. Test System Details

Product		Manufacturer	Model No.
1	Notebook	HP	ZHAN99 G1

2.4. Test Software

The test utility software used during testing was “QA Tool”, and the version was 2.88.

2.5. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.407
- KDB 789033 D02v02r01
- KDB 662911 D01v02r01
- ANSI C63.10-2013

2.6. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

Conclusion:

This device complies with the requirement of §15.203. Please refer to EUT internal photo for detailed information.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Last Cali. Date	Cali. Due Date	Test Site
Signal Analyzer	Agilent	N9010A	MRTSUE06195	1 year	2023-12-20	NS-AC1/NS-TR2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06292	1 year	2023-10-18	NS-AC1
Anechoic Chamber	BOOMWAVE	NS-AC1	MRTSUE06496	1 year	2023-07-23	NS-AC1
Preamplifier	EMCI	EMC184045SE	MRTSUE06641	1 year	2023-01-13	NS-AC1
				1 year	2024-01-12	
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06572	1 year	2023-04-01	NS-AC1
Horn Antenna	ETS	3117	MRTSUE06257	1 year	2023-09-18	NS-AC1
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06573	1 year	2023-06-21	NS-AC1
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06574	1 year	2023-07-11	NS-AC1
EMI Test Receiver	R&S	ESR3	MRTSUE06575	1 year	2023-06-19	NS-AC1
Signal Analyzer	Keysight	N9020A	MRTSUE10065	1 year	2023-12-20	NS-AC1/NS-TR2
Thermohygrometer	testo	608-H1	MRTSUE11020	1 year	2023-05-15	NS-AC1
Thermohygrometer	testo	608-H1	MRTSUE11104	1 year	2023-05-03	NS-AC1
EMI Test Receiver	R&S	ESL3	MRTSUE06576	1 year	2023-06-19	NS-SR2
Two-Line V-Network	R&S	ENV216	MRTSUE06577	1 year	2023-07-03	NS-SR2
Thermohygrometer	testo	608-H1	MRTSUE11106	1 year	2023-05-03	NS-SR2
Shielding Room	BOOMWAVE	NS-SR2	MRTSUE06551	5 years	2024-06-03	NS-SR2
Attenuator	MVE	MVE2213	MRTSUE11062	1 year	2023-06-09	NS-TR2
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2023-09-29	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2023-06-04	WZ-AC2
Thermohygrometer	Mingle	ETH529	MRTSUE06170	1 year	2023-11-27	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2023-10-13	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2023-05-08	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2023-04-21	WZ-AC2
Preamplifier	EMCI	EMC051845SE	MRTSUE06987	1 year	2023-09-08	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11038	1 year	2023-11-01	WZ-AC2

Note: The test site with "WZ" code is in the MRT Suzhou laboratory, the test site with "NS" code is in the MRT Shenzhen Laboratory.

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_T-E-TAC-2	1.02	RE Antenna & Turntable
Agilent Power Panel	V 3.9	Power
Agilent Power Analyzer/Agilent Power Panel	V R03.09.00	Power
Controller_MF 7802	1.02	RE Antenna & Turntable

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.15dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)	26dB Bandwidth	Conducted	Pass
15.407(e)	6dB Bandwidth		Pass
15.407(a)(1)(ii), (2), (3)(i)	Maximum Conducted Output Power		Pass
15.407(h)(1)	Transmit Power Control		Pass
15.407(a)(1)(ii), (2), (3)(i), (12)	Peak Power Spectral Density		Pass
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions		Pass
15.205, 15.209 15.407(b)(8), (9), (10)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Remark:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- EUT supports one configuration only in 802.11ax full RU mode.
- The test results shown in the following sections represent the worst-case emissions.

6.2. 26dB & 99% Bandwidth Measurement

6.2.1. Test Limit

N/A

6.2.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)1) (26dB Bandwidth)

KDB 789033 D02v02r01- Section II)D) (99% Bandwidth)

6.2.3. Test Setting


26dB Bandwidth

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 1% to 5% of the OBW
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times to 5 times the OBW
5. Detector = peak
6. Trace mode = max hold
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument.

6.2.4. Test Setup

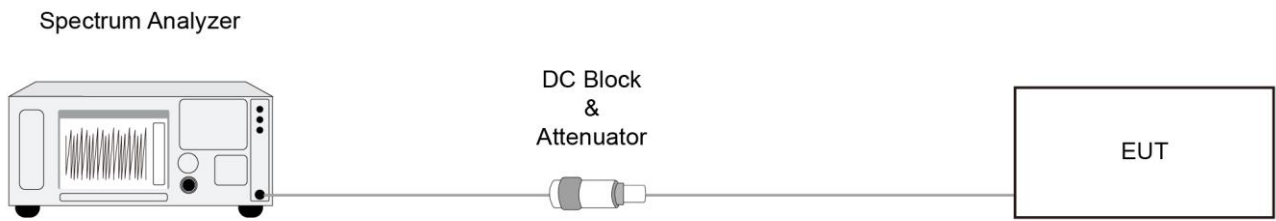

6.2.5. Test Result

Refer to Appendix A.2.

6.3. 6dB Bandwidth Measurement

6.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.3.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)2)

6.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.4. Test Setup

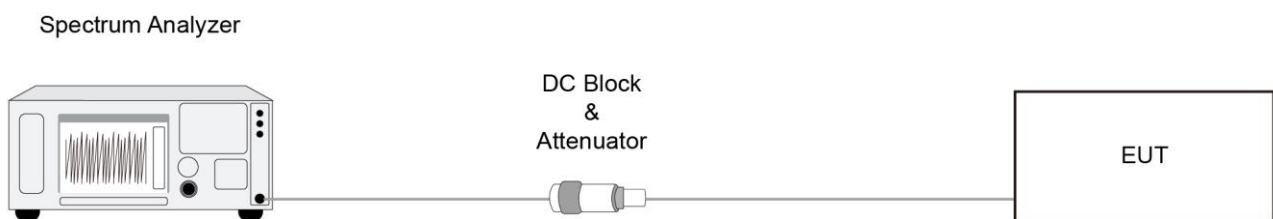

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Output Power Measurement

6.4.1. Test Limit

For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

6.4.2. Test Procedure


KDB 789033D02v02r01- Section II)E)3)b) Method PM-G

6.4.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.4.4. Test Setup

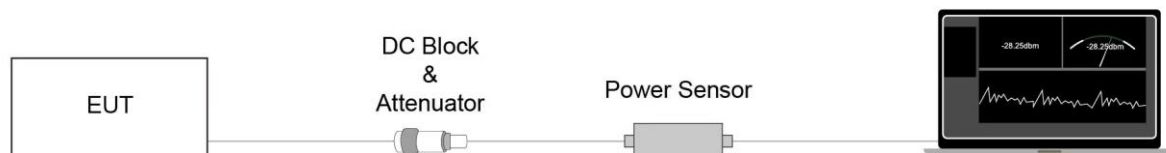

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Transmit Power Control Measurement

6.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm.


6.5.2. Test Procedure

KDB 789033 D02v01- Section II)E)3)b) Method PM-G

6.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.5.4. Test Setup

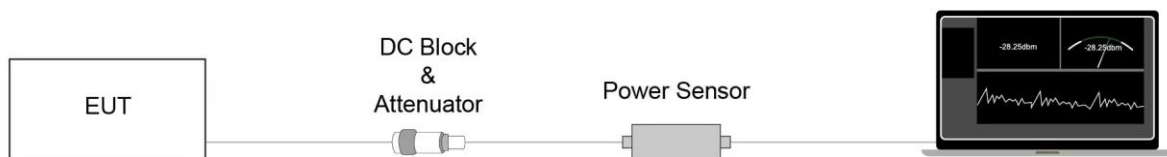

6.5.5. Test Result

Device supports TPC mechanism, details refer to the operational description.

6.6. Power Spectral Density Measurement

6.6.1. Test Limit

For the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


6.6.2. Test Procedure

KDB 789033 D02v02r01-Section II(F)

6.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz (510kHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz)
4. VBW = 3 × RBW
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
11. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

6.6.4. Test Setup

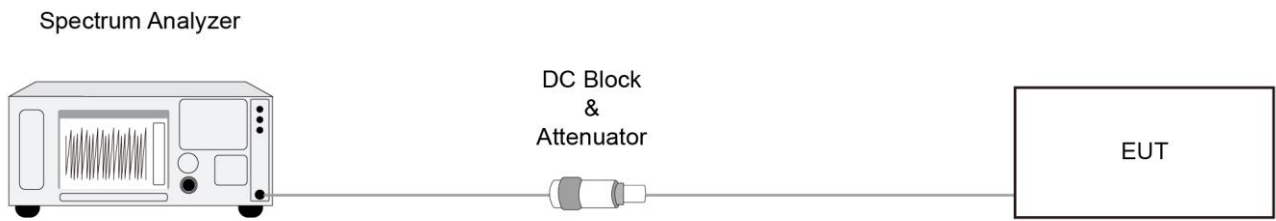

6.6.5. Test Result

Refer to Appendix A.5.

6.7. Frequency Stability Measurement

6.7.1. Test Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.7.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.7.3. Test Setup

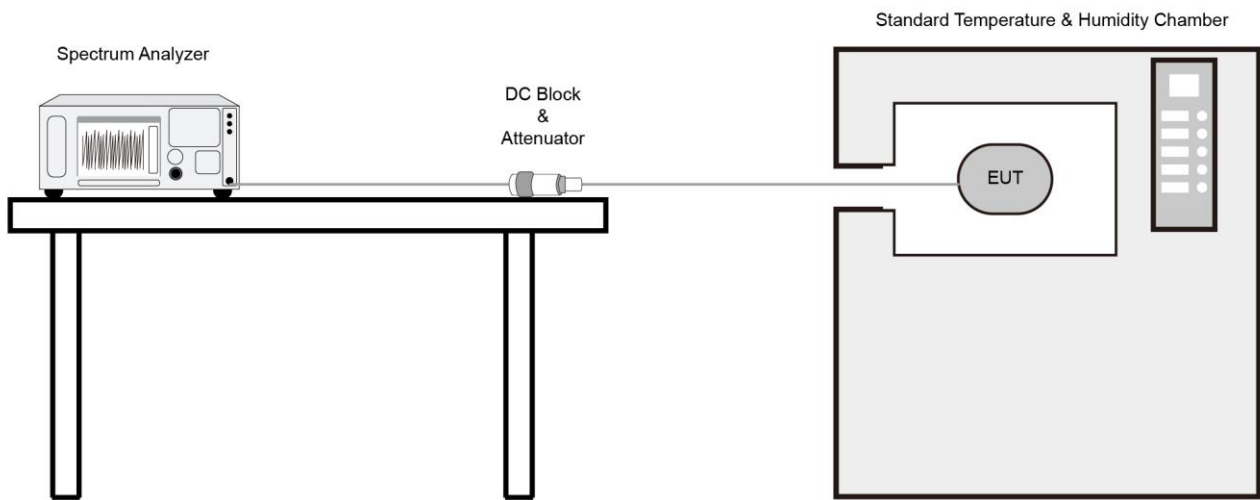

6.7.4. Test Result

Refer to Appendix A.6.

6.8. Radiated Spurious Emission Measurement

6.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure

KDB 789033 D02v02r01- Section II)G)

6.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.8.4. Test Setup

Below 1GHz Test Setup:

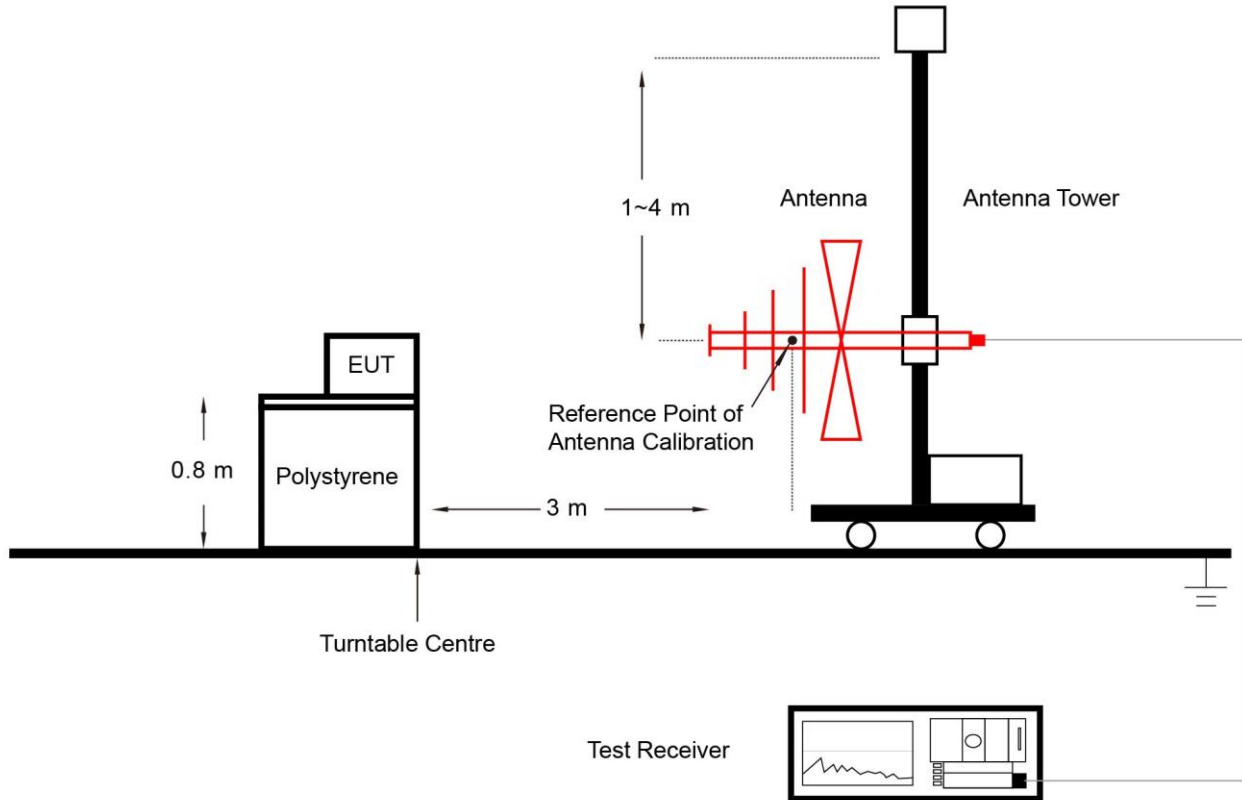

Above 1GHz Test Setup:

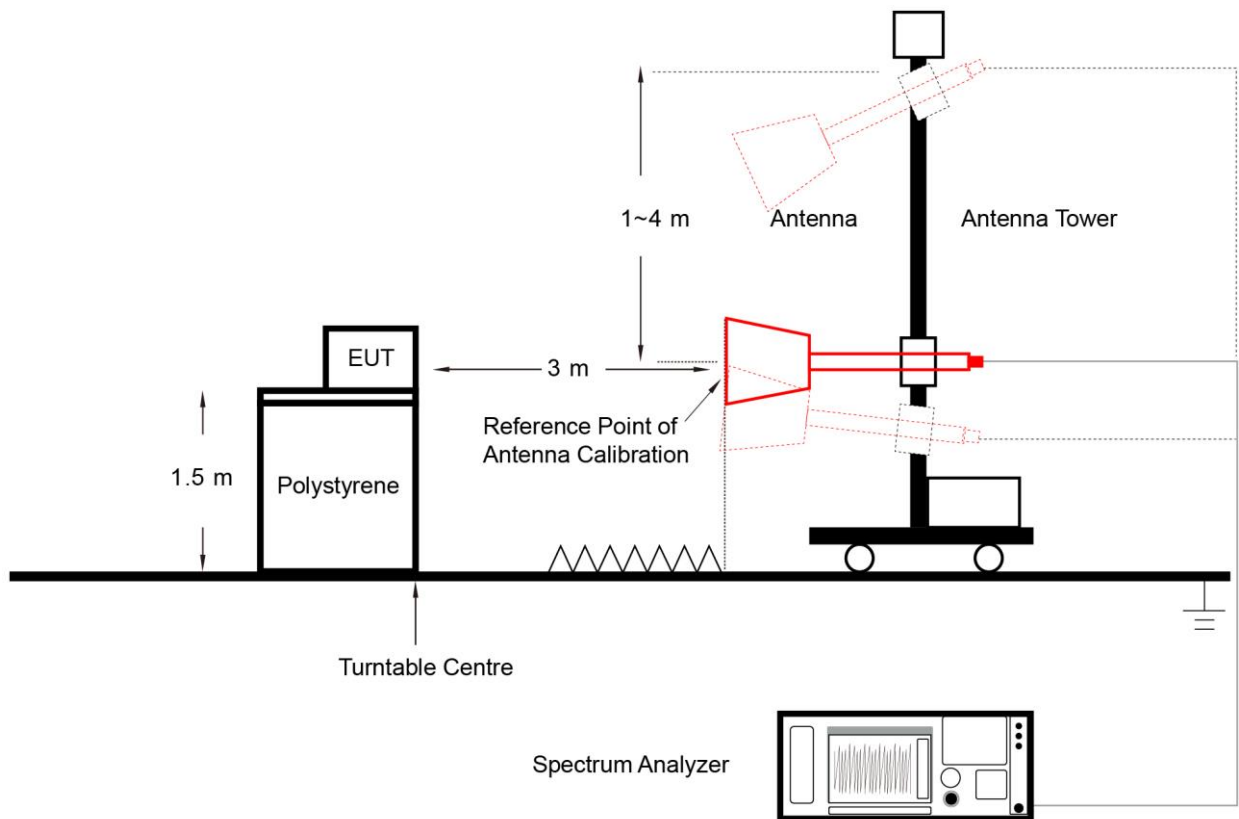

6.8.5. Test Result

Refer to Appendix A.7.

6.9. Radiated Restricted Band Edge Measurement

6.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.9.2. Test Procedure

KDB 789033 D02v02r01- Section II)G)

6.9.3. Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.9.4. Test Setup

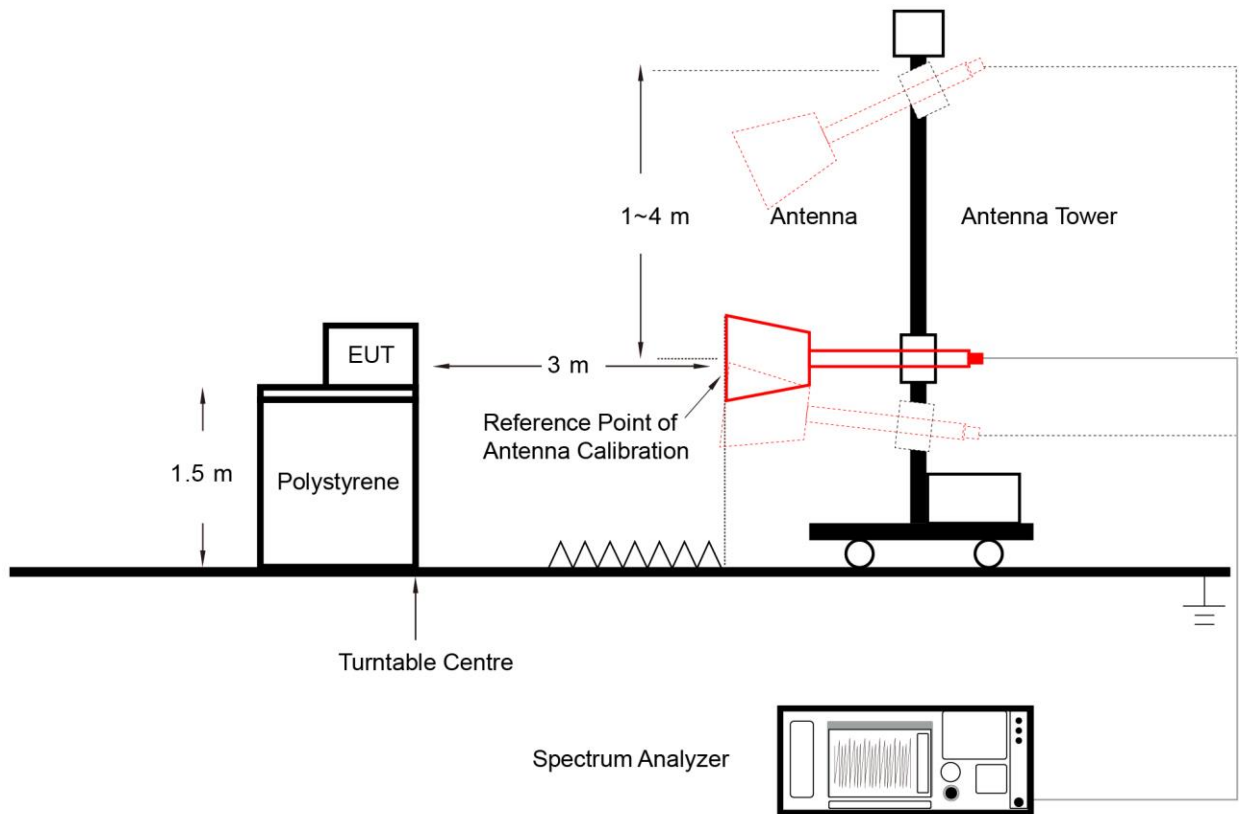

6.9.5. Test Result

Refer to Appendix A.8.

6.10. AC Conducted Emissions Measurement


6.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

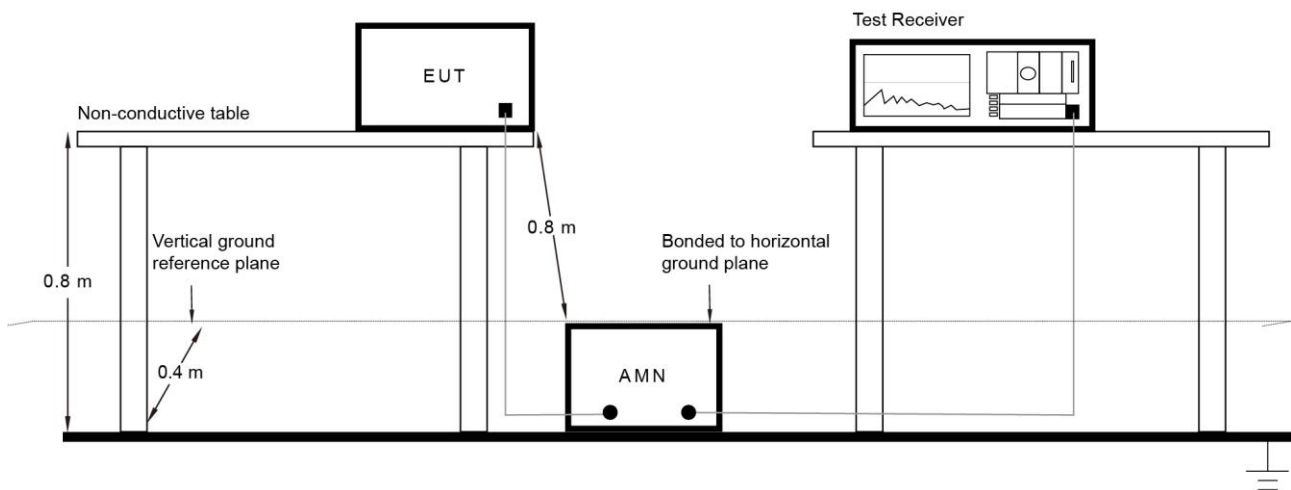

6.10.3. Test Result

Refer to Appendix A.9.

Appendix A – Test Result


A.1 Duty Cycle Test Result

Test Site	NS-TR2	Test Engineer	Summer Tang
Test Date	2023/01/04 ~ 2023/01/10		


Test Mode	Duty Cycle
802.11a	96.07%
802.11n-HT20	95.81%
802.11n-HT40	91.94%
802.11ac-VHT20	95.86%
802.11ac-VHT40	92.16%
802.11ac-VHT80	85.04%
802.11ac-VHT160	76.51%
802.11ax-HE20	94.76%
802.11ax-HE40	90.61%
802.11ax-HE80	83.85%
802.11ax-HE160	83.90%

Duty Cycle (T = Transmission Duration)


802.11a (T = 1.395ms)

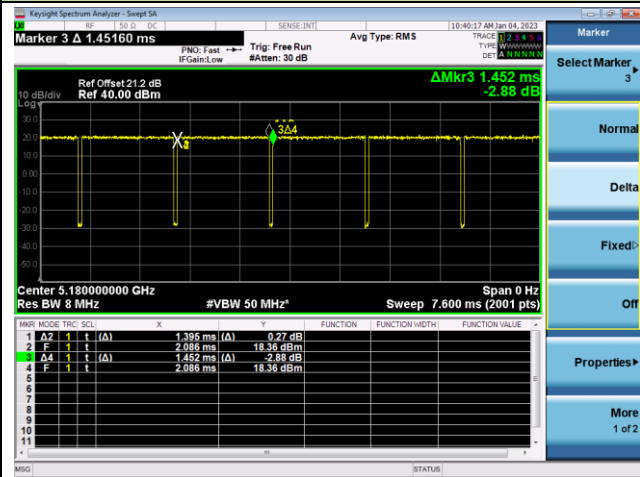


802.11n-HT20 (T = 1.303ms)

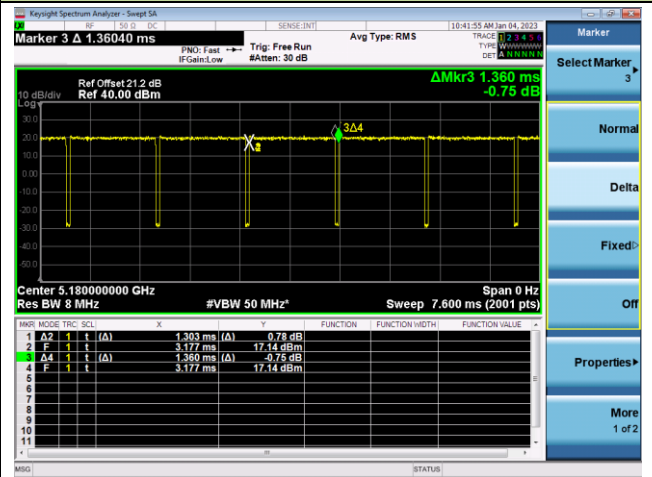


802.11n-HT40 (T = 647.1us)

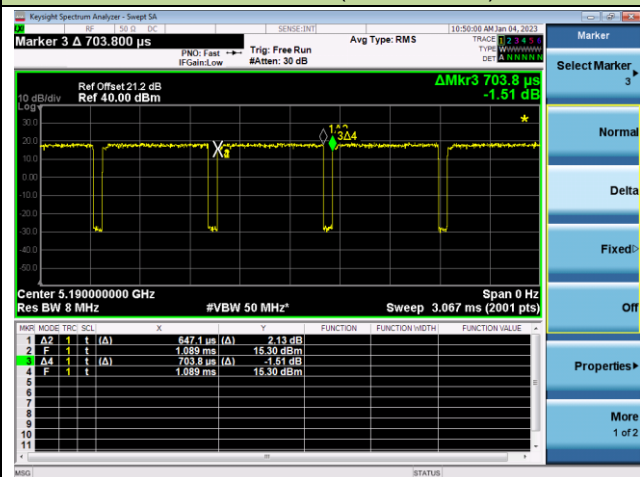


802.11ac-VHT20 (T = 1.319ms)

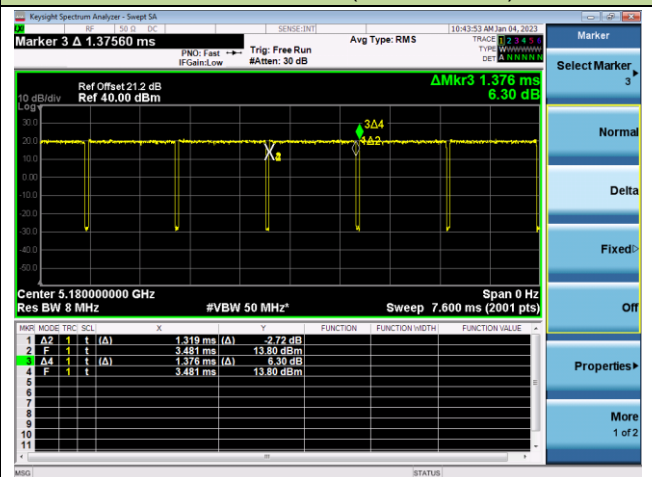

802.11ac-VHT40 (T = 656.1us)

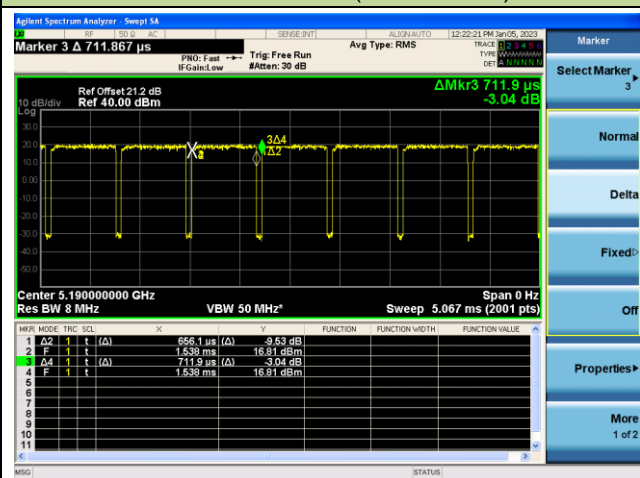


802.11ac-VHT80 (T = 324.0us)

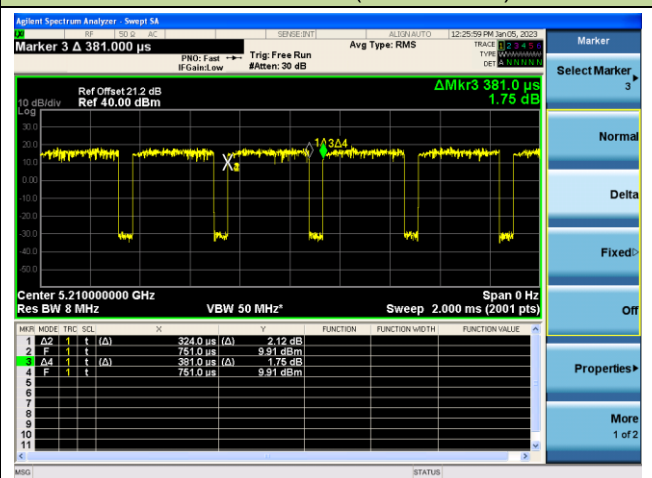


Duty Cycle (T = Transmission Duration)


802.11ac-VHT160 (T = 184.0u s)

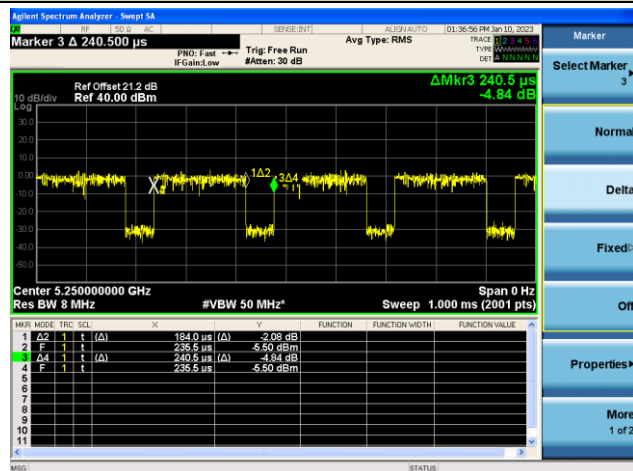


802.11ax-HE20 (T = 1.030ms)

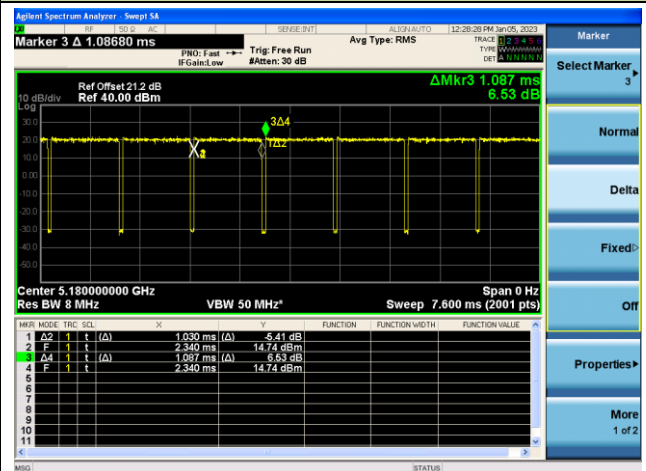


802.11ax-HE40 (T = 547.4us)

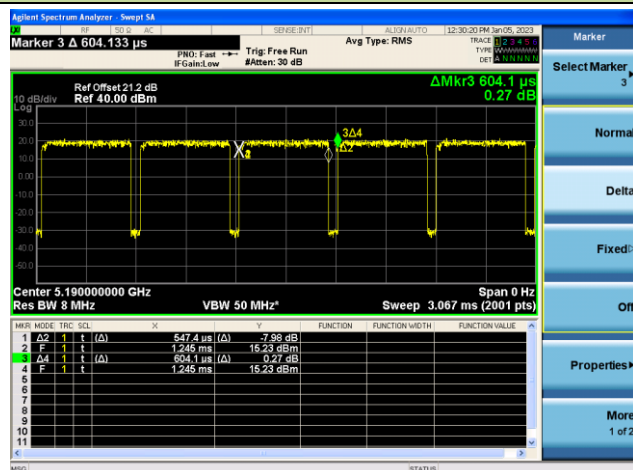

802.11ax-HE80 (T = 296.0us)

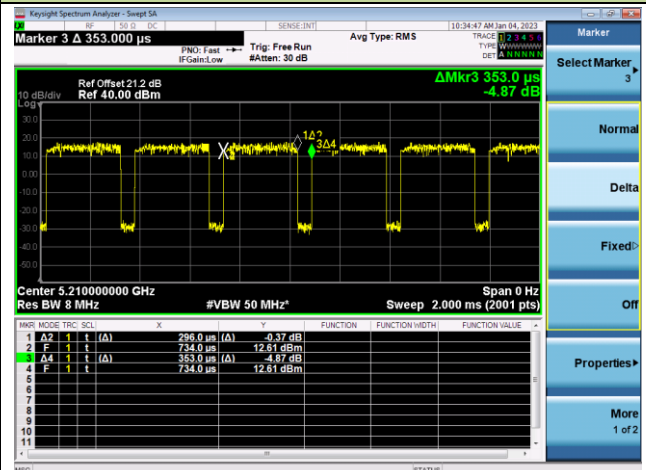

802.11ax-HE160 (T = 296.0us)

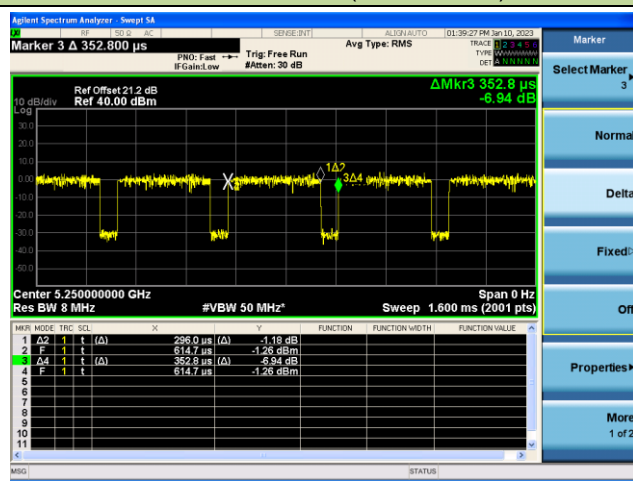

A.2 26dB & 99% Bandwidth Test Result

Test Site	NS-TR2	Test Engineer	Summer Tang
Test Date	2023/01/11 ~2023/01/14		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	6Mbps	36	5180	26.95	16.919
11a	6Mbps	44	5220	21.11	16.643
11a	6Mbps	48	5240	20.25	16.691
11a	6Mbps	52	5260	20.78	16.574
11a	6Mbps	60	5300	27.60	16.888
11a	6Mbps	64	5320	27.47	16.808
11a	6Mbps	100	5500	27.78	16.897
11a	6Mbps	116	5580	21.02	16.581
11a	6Mbps	140	5700	25.31	16.881
11a	6Mbps	144	5720	21.54	16.621
11a	6Mbps	149	5745	36.55	18.362
11a	6Mbps	157	5785	39.46	19.069
11a	6Mbps	165	5825	39.53	18.836
11n-HT20	MCS0	36	5180	28.01	18.034
11n-HT20	MCS0	44	5220	22.04	17.803
11n-HT20	MCS0	48	5240	20.49	17.815
11n-HT20	MCS0	52	5260	22.02	17.809
11n-HT20	MCS0	60	5300	27.87	18.044
11n-HT20	MCS0	64	5320	27.10	18.059
11n-HT20	MCS0	100	5500	27.33	18.046
11n-HT20	MCS0	116	5580	22.14	17.812
11n-HT20	MCS0	140	5700	23.91	17.883
11n-HT20	MCS0	144	5720	21.54	17.798
11n-HT20	MCS0	149	5745	37.72	20.252
11n-HT20	MCS0	157	5785	39.62	18.945
11n-HT20	MCS0	165	5825	39.92	19.923

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11n-HT40	MCS0	38	5190	42.99	36.207
11n-HT40	MCS0	46	5230	39.83	36.099
11n-HT40	MCS0	54	5270	39.60	36.075
11n-HT40	MCS0	62	5310	42.06	36.217
11n-HT40	MCS0	102	5510	44.13	36.190
11n-HT40	MCS0	110	5550	40.21	35.943
11n-HT40	MCS0	134	5670	41.69	36.311
11n-HT40	MCS0	142	5710	40.20	36.158
11n-HT40	MCS0	151	5755	52.26	36.375
11n-HT40	MCS0	159	5795	71.99	37.197
11ac-VHT20	MCS0	36	5180	27.59	17.984
11ac-VHT20	MCS0	44	5220	21.89	17.797
11ac-VHT20	MCS0	48	5240	20.52	17.819
11ac-VHT20	MCS0	52	5260	21.53	17.773
11ac-VHT20	MCS0	60	5300	28.12	18.014
11ac-VHT20	MCS0	64	5320	27.19	18.012
11ac-VHT20	MCS0	100	5500	27.07	18.021
11ac-VHT20	MCS0	116	5580	21.62	17.801
11ac-VHT20	MCS0	140	5700	26.54	18.004
11ac-VHT20	MCS0	144	5720	21.59	17.784
11ac-VHT20	MCS0	149	5745	37.05	19.201
11ac-VHT20	MCS0	157	5785	39.89	19.258
11ac-VHT20	MCS0	165	5825	38.94	19.696
11ac-VHT40	MCS0	38	5190	48.65	36.251
11ac-VHT40	MCS0	46	5230	40.15	36.076
11ac-VHT40	MCS0	54	5270	40.24	36.125
11ac-VHT40	MCS0	62	5310	42.04	36.190
11ac-VHT40	MCS0	102	5510	44.11	36.136
11ac-VHT40	MCS0	110	5550	40.07	36.075
11ac-VHT40	MCS0	134	5670	42.34	36.230
11ac-VHT40	MCS0	142	5710	40.64	36.099
11ac-VHT40	MCS0	151	5755	52.43	36.486
11ac-VHT40	MCS0	159	5795	77.59	37.993


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11ac-VHT80	MCS0	42	5210	95.06	75.405
11ac-VHT80	MCS0	58	5290	97.58	75.490
11ac-VHT80	MCS0	106	5530	98.97	75.332
11ac-VHT80	MCS0	122	5610	79.35	75.172
11ac-VHT80	MCS0	138	5690	79.54	75.177
11ac-VHT80	MCS0	155	5775	80.21	75.303
11ac-VHT160	MCS0	50	5250	160.70	153.61
11ac-VHT160	MCS0	114	5570	161.90	154.01
11ax-HE20	MCS0	36	5180	28.10	19.204
11ax-HE20	MCS0	44	5220	22.29	19.133
11ax-HE20	MCS0	48	5240	19.94	18.962
11ax-HE20	MCS0	52	5260	21.51	19.061
11ax-HE20	MCS0	60	5300	27.13	19.138
11ax-HE20	MCS0	64	5320	27.20	19.209
11ax-HE20	MCS0	100	5500	26.48	19.159
11ax-HE20	MCS0	116	5580	21.67	19.008
11ax-HE20	MCS0	140	5700	24.69	19.086
11ax-HE20	MCS0	144	5720	21.74	19.050
11ax-HE20	MCS0	149	5745	37.37	20.195
11ax-HE20	MCS0	157	5785	39.06	19.894
11ax-HE20	MCS0	165	5825	39.94	20.180


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11ax-HE40	MCS0	38	5190	39.54	37.710
11ax-HE40	MCS0	46	5230	39.59	37.598
11ax-HE40	MCS0	54	5270	39.22	37.581
11ax-HE40	MCS0	62	5310	45.25	37.639
11ax-HE40	MCS0	102	5510	39.47	37.780
11ax-HE40	MCS0	110	5550	39.42	37.563
11ax-HE40	MCS0	134	5670	41.49	37.692
11ax-HE40	MCS0	142	5710	39.30	37.509
11ax-HE40	MCS0	151	5755	60.78	37.967
11ax-HE40	MCS0	159	5795	77.33	38.356
11ax-HE80	MCS0	42	5210	81.98	77.029
11ax-HE80	MCS0	58	5290	81.14	77.025
11ax-HE80	MCS0	106	5530	82.09	76.931
11ax-HE80	MCS0	122	5610	80.07	76.980
11ax-HE80	MCS0	138	5690	80.16	76.545
11ax-HE80	MCS0	155	5775	79.96	76.939
11ax-HE160	MCS0	50	5250	161.10	155.49
11ax-HE160	MCS0	114	5570	161.00	155.58


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	F _H (MHz)	Limit (MHz)
802.11a	6Mbps	48	5240	5248.346	< 5250
11n-HT20	MCS0	48	5240	5248.908	< 5250
11n-HT40	MCS0	46	5230	5248.050	< 5250
802.11ac-VHT20	MCS0	48	5240	5248.910	< 5250
802.11ac-VHT40	MCS0	46	5230	5248.038	< 5250
802.11ac-VHT80	MCS0	42	5210	5247.703	< 5250
802.11ax-HE20	MCS0	48	5240	5249.481	< 5250
802.11ax-HE40	MCS0	46	5230	5248.799	< 5250
802.11ax-HE80	MCS0	42	5210	5248.515	< 5250


Note: $F_H = \text{Centre frequency} + 99\% \text{ OBW} / 2$


For example, 802.11a 5240MHz, $F_H = 5240 \text{ MHz} + 16.691 \text{ MHz} / 2 = 5248.346 \text{ MHz}$.

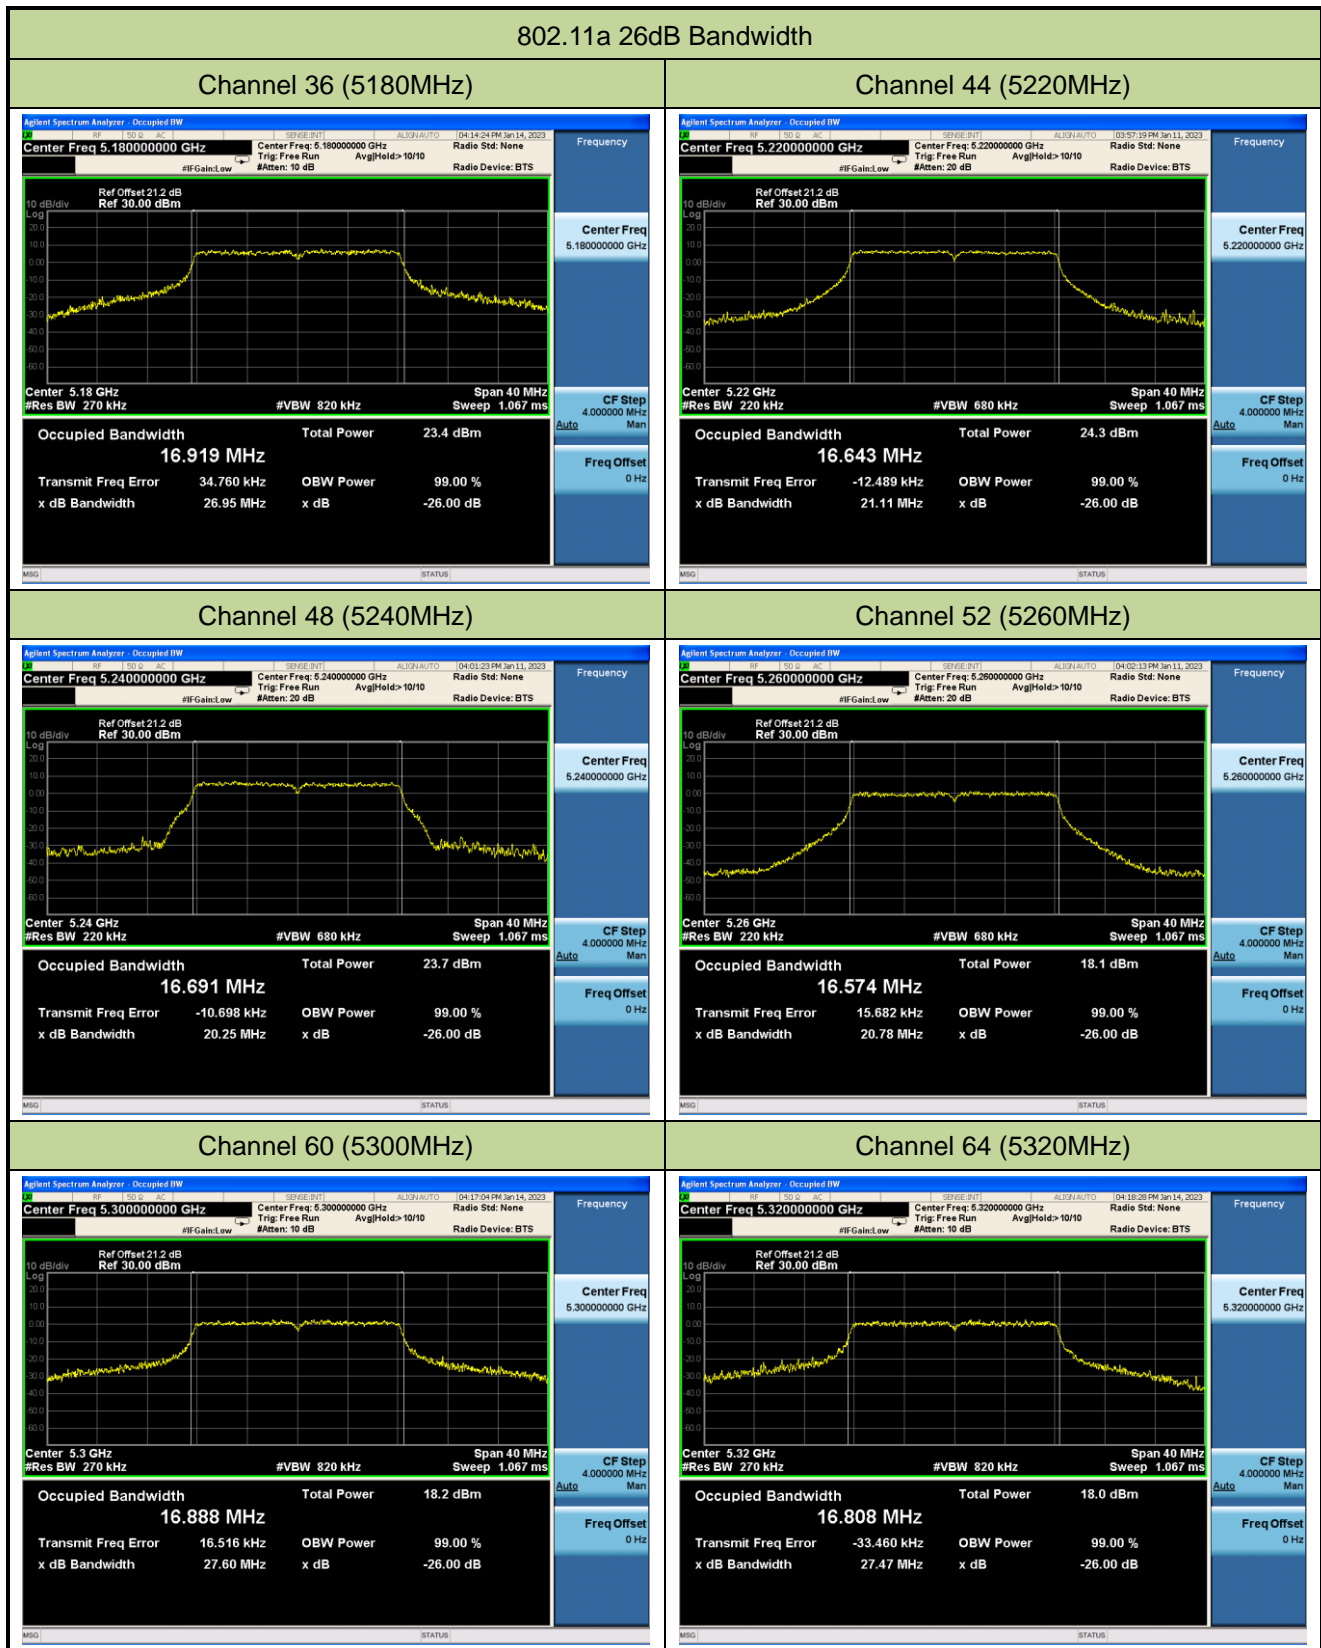


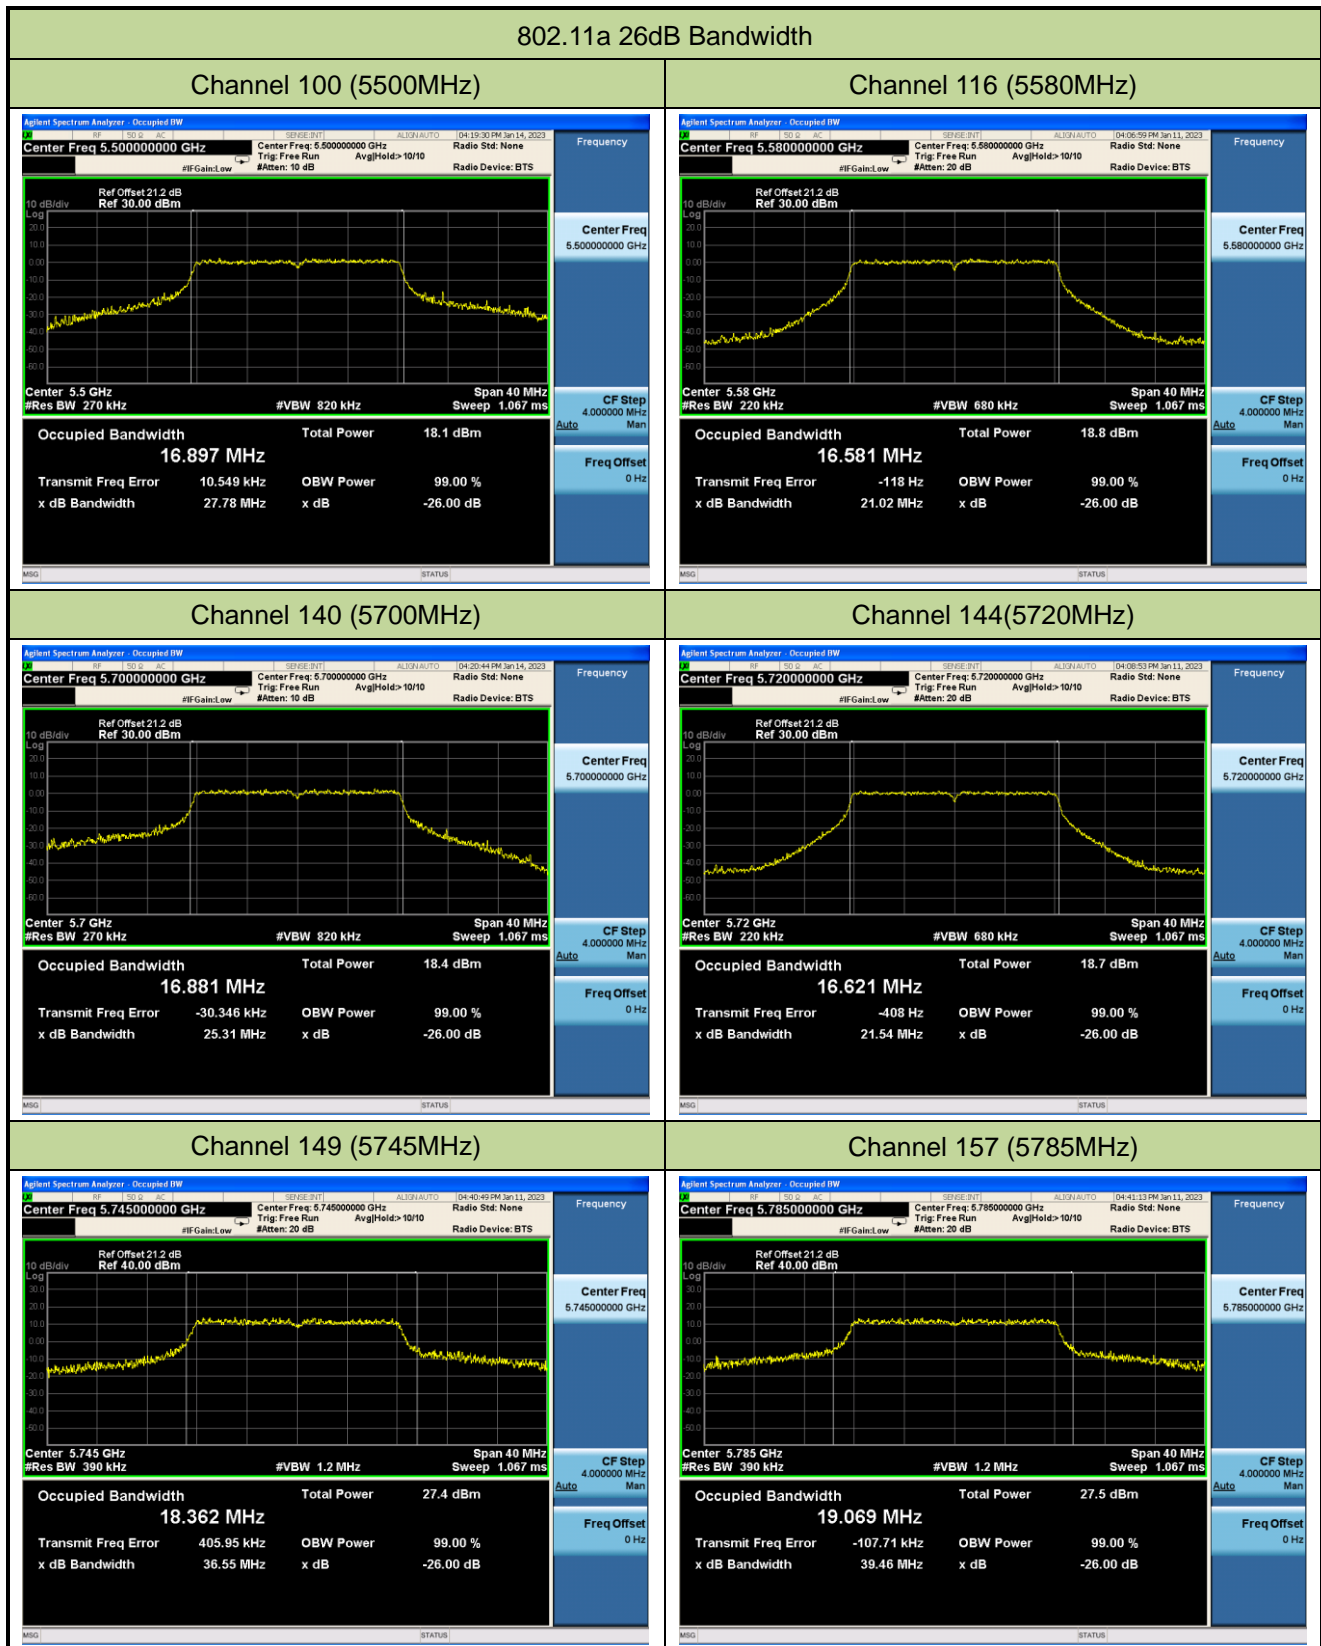

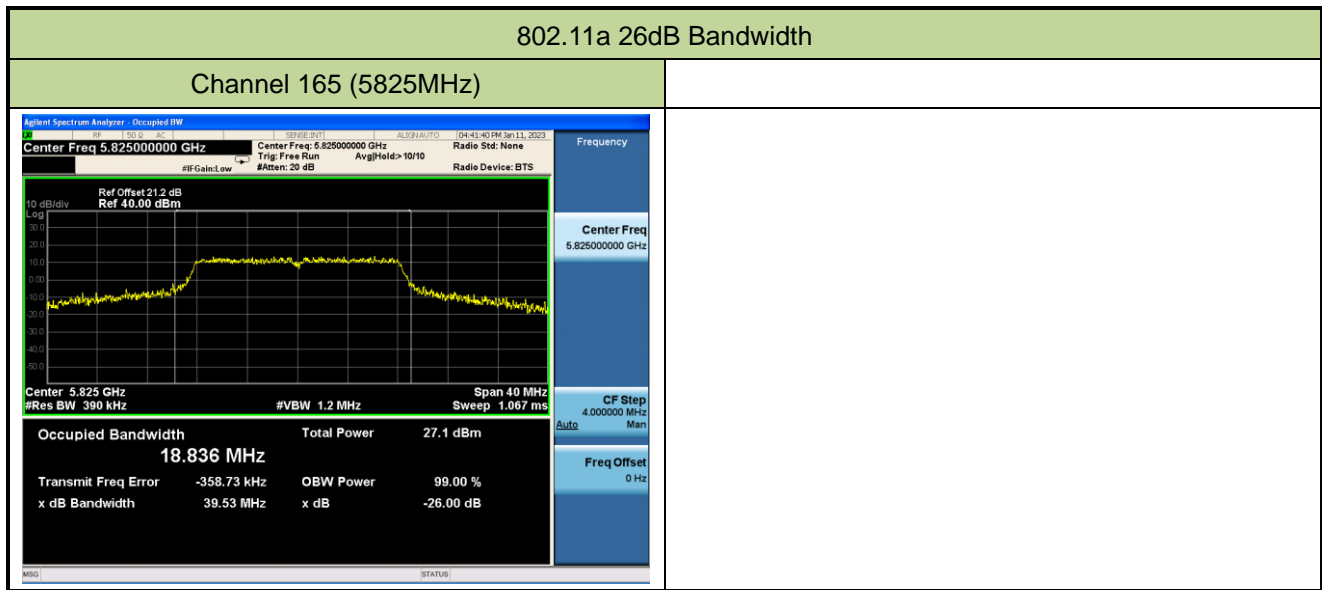

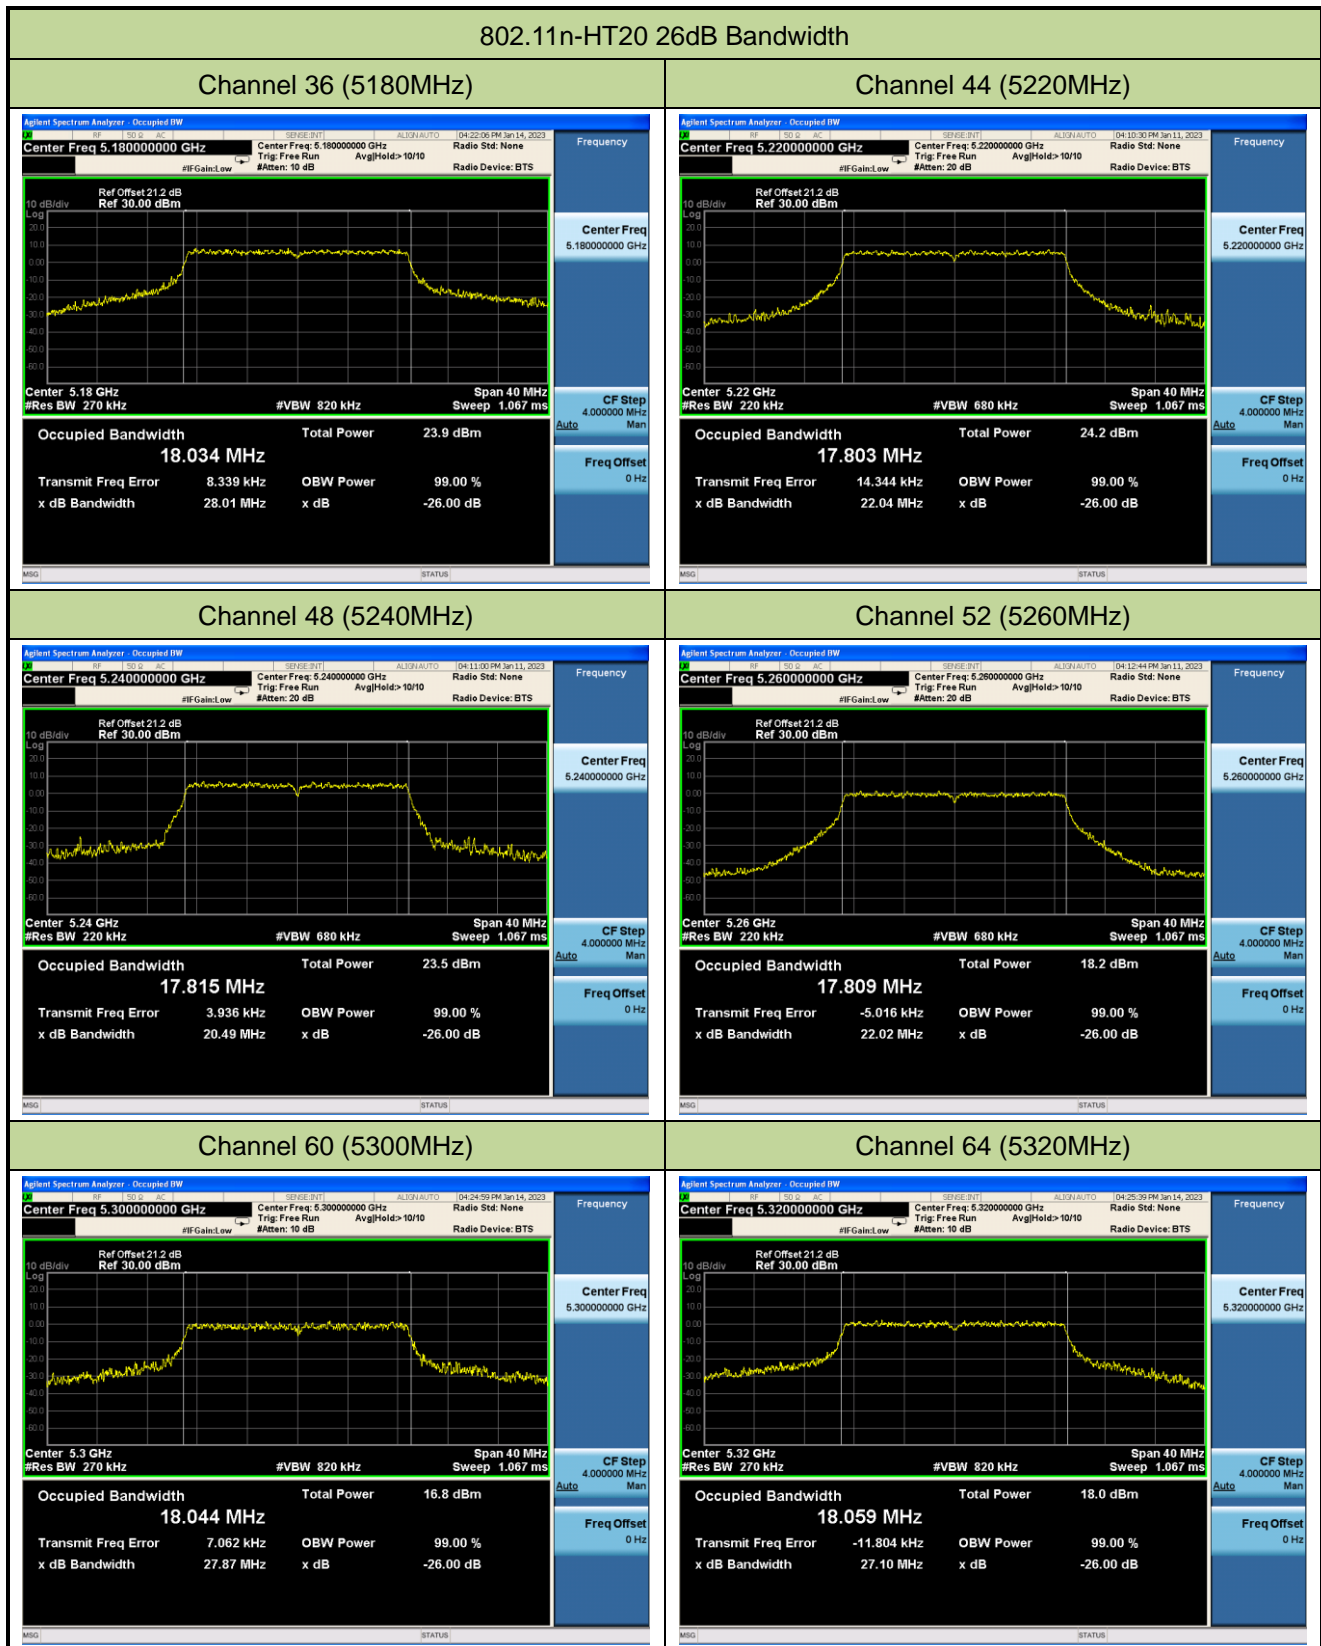


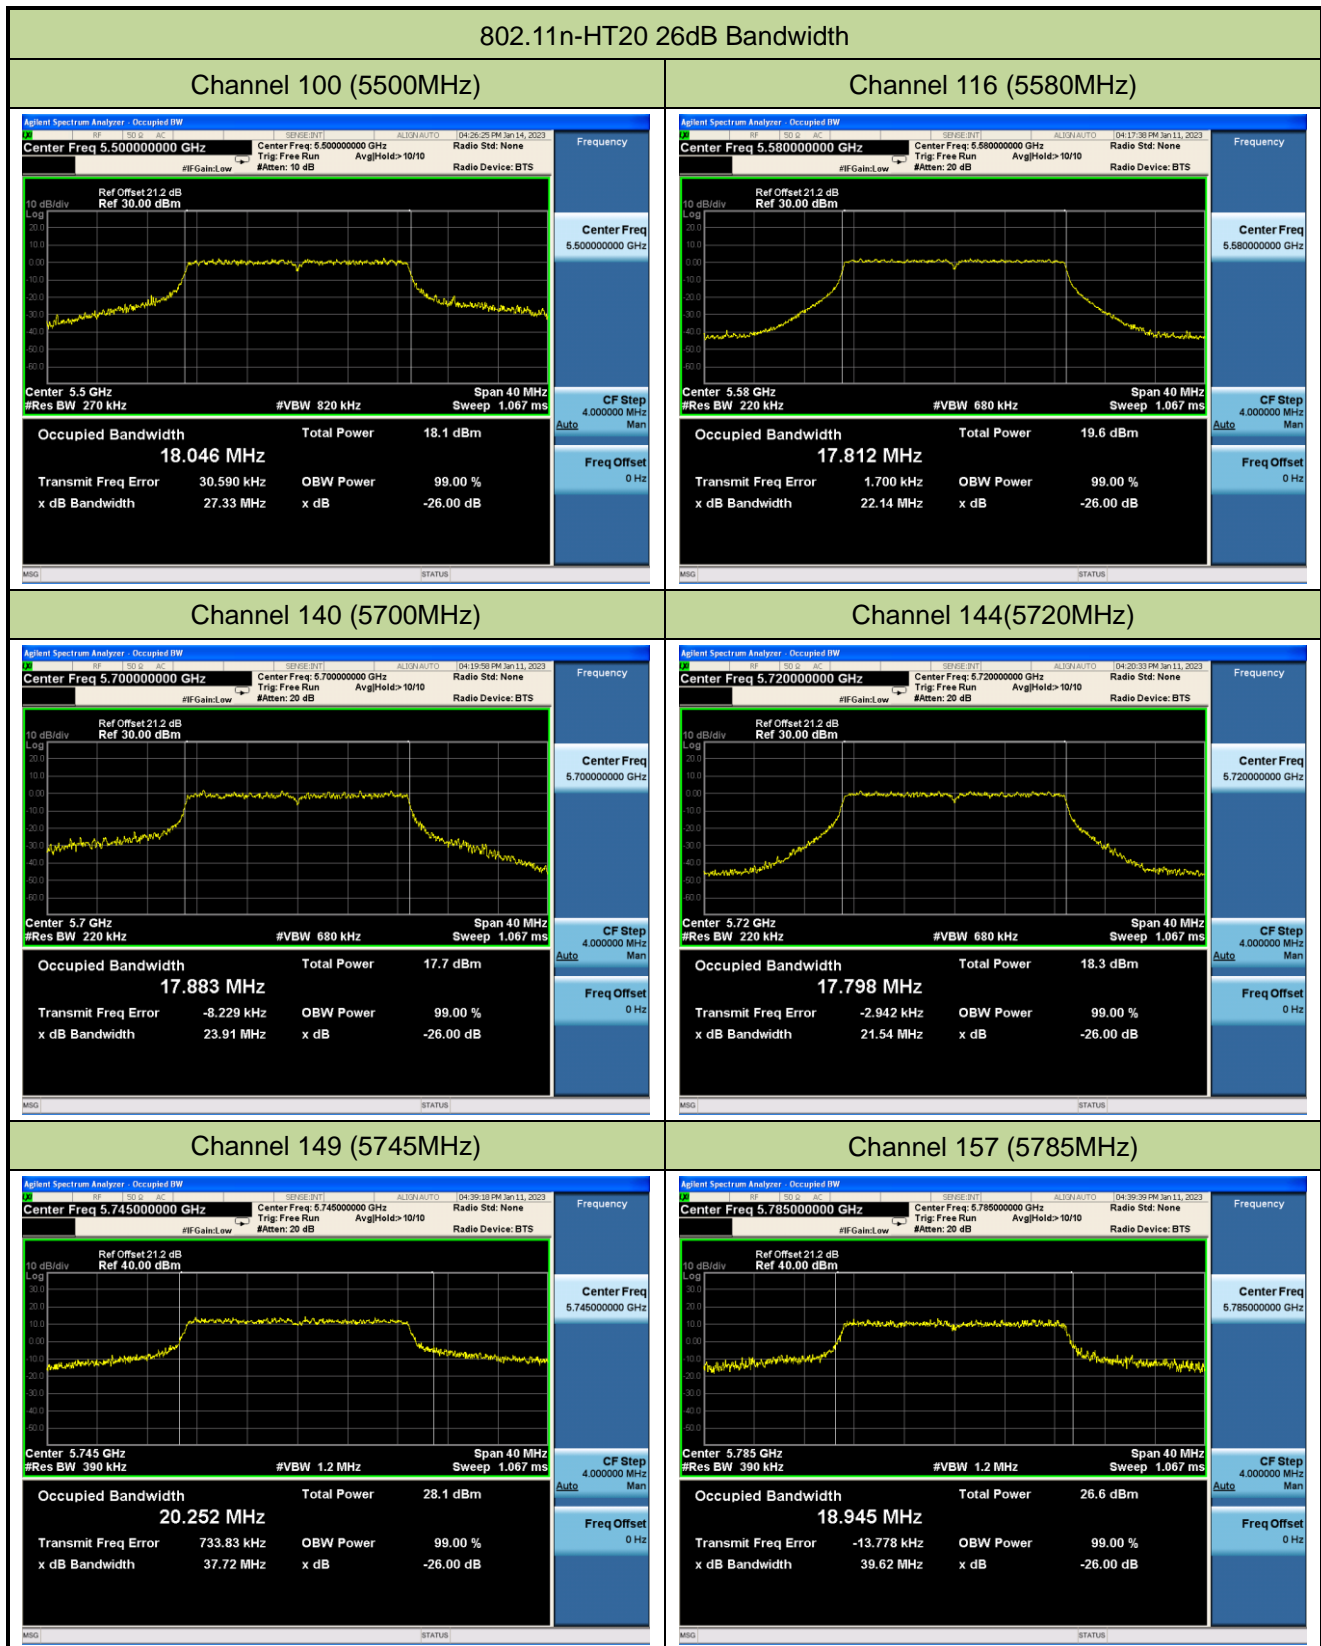

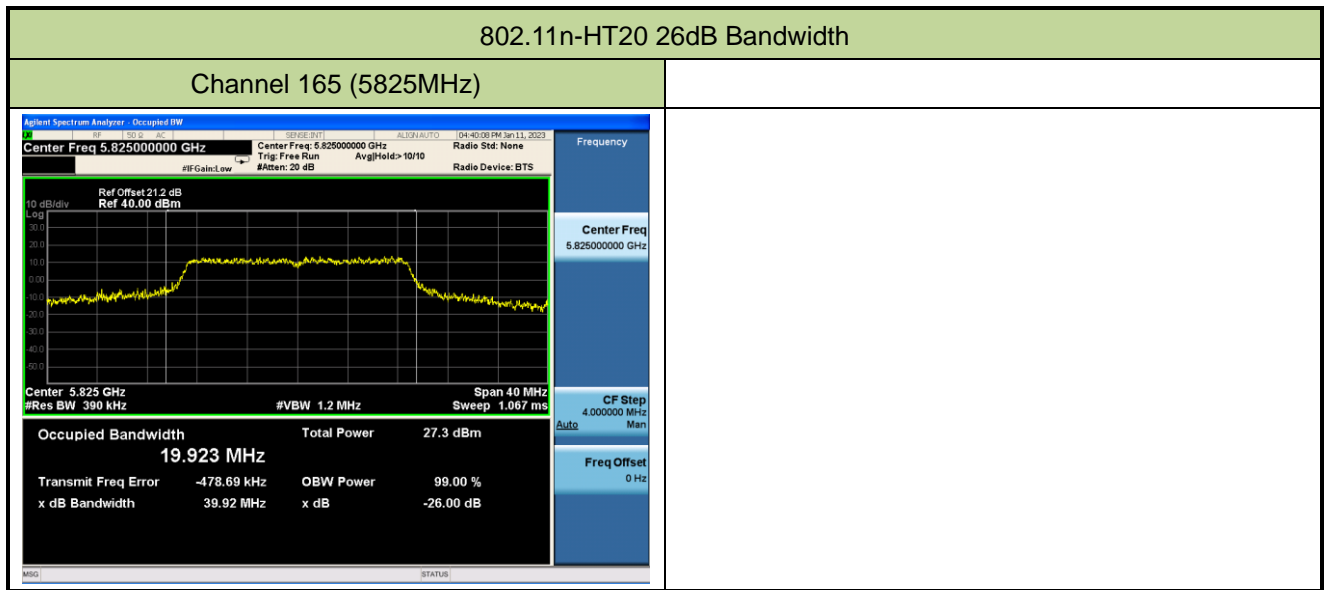


802.11n-HT40 26dB Bandwidth


Channel 38 (5190MHz)

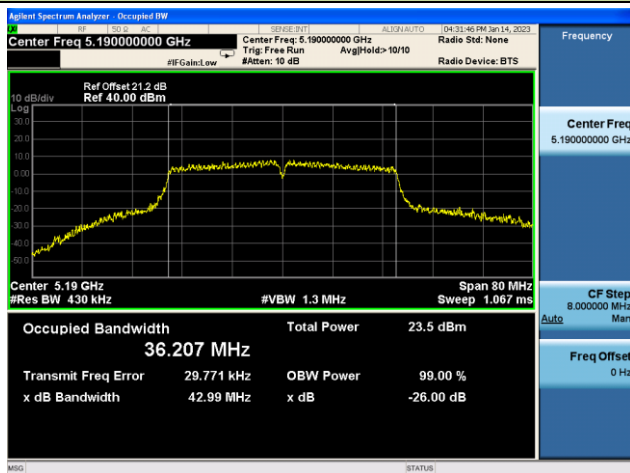


Channel 46 (5230MHz)

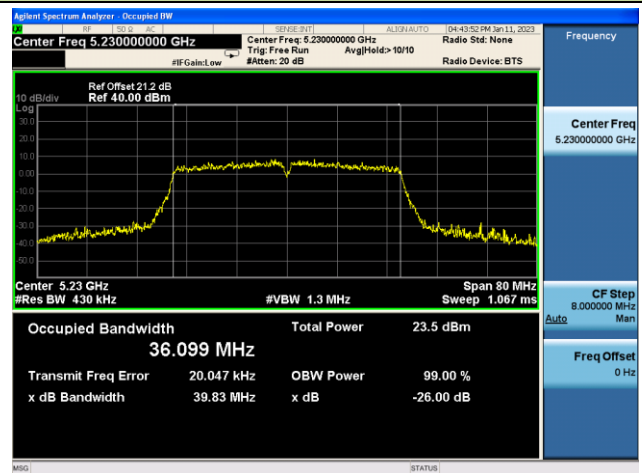


Channel 54 (5270MHz)

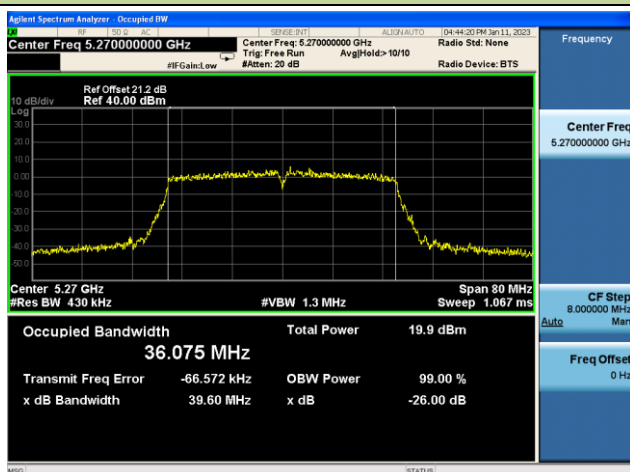


Channel 62 (5310MHz)

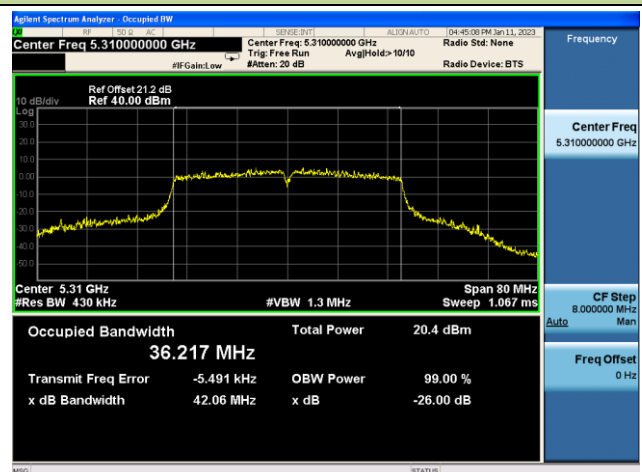


Channel 102 (5510MHz)

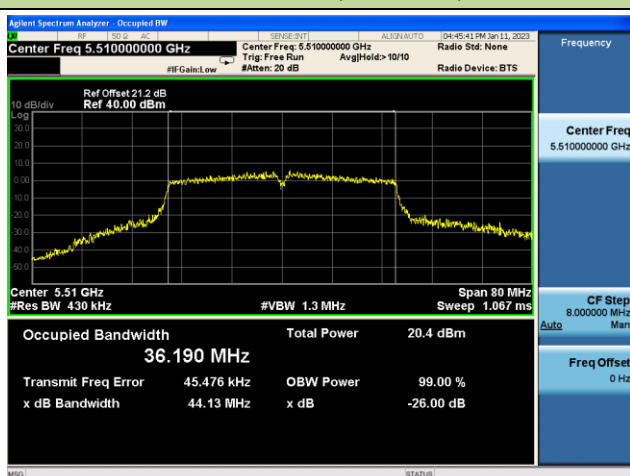


Channel 110 (5550MHz)

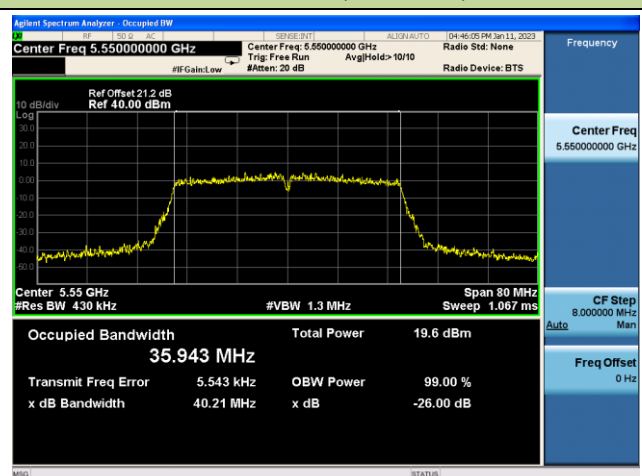

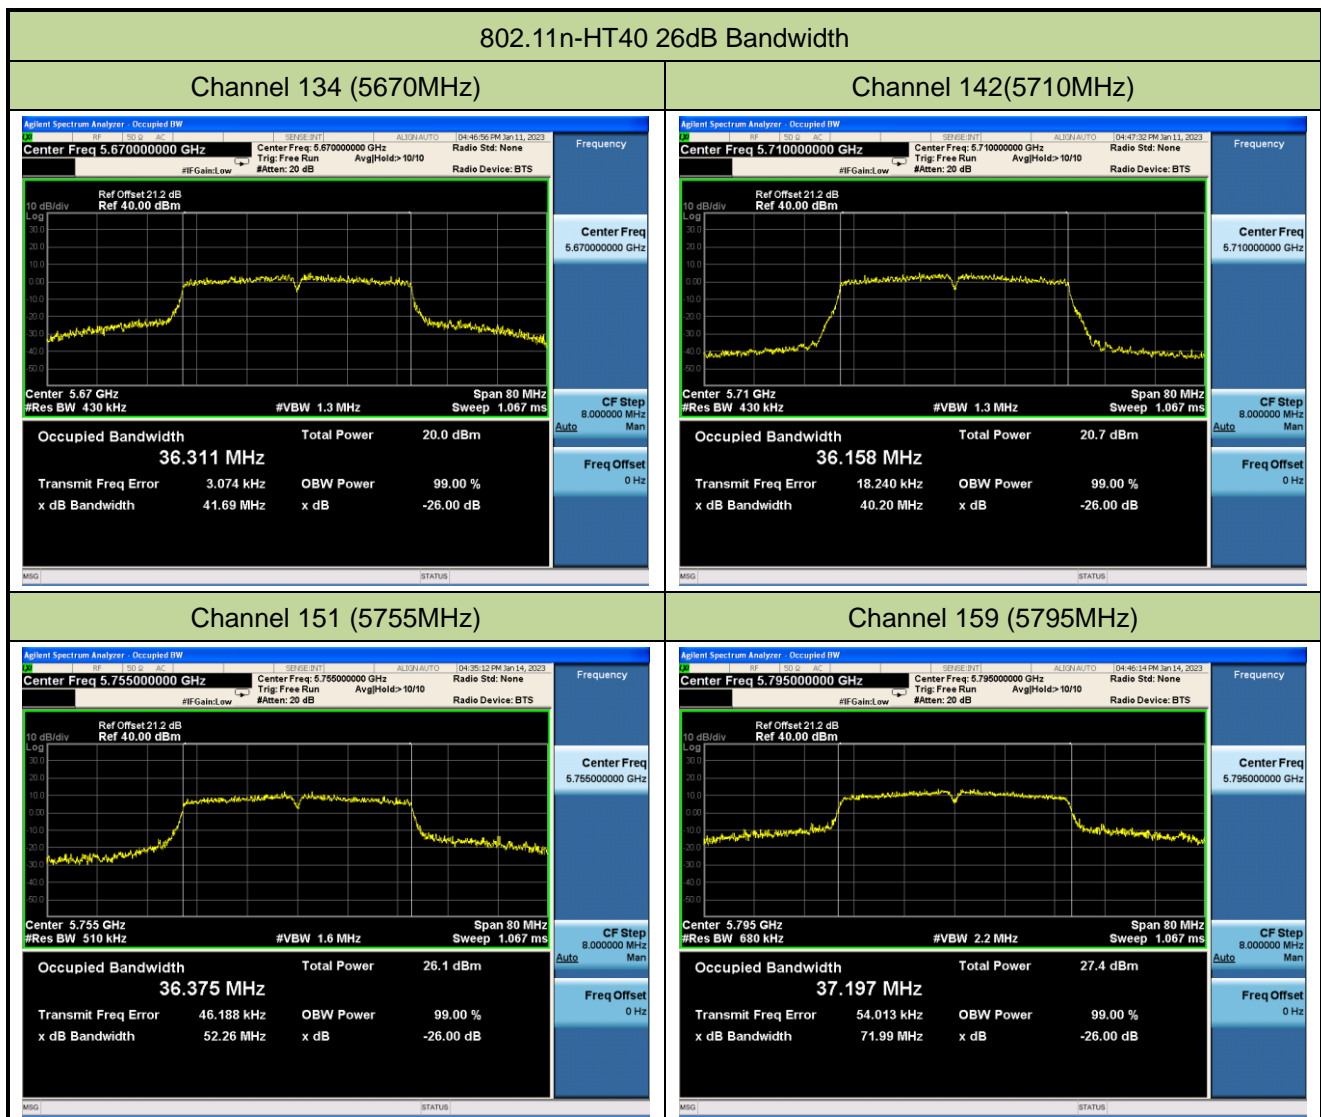


802.11ac-VHT20 26dB Bandwidth


Channel 36 (5180MHz)

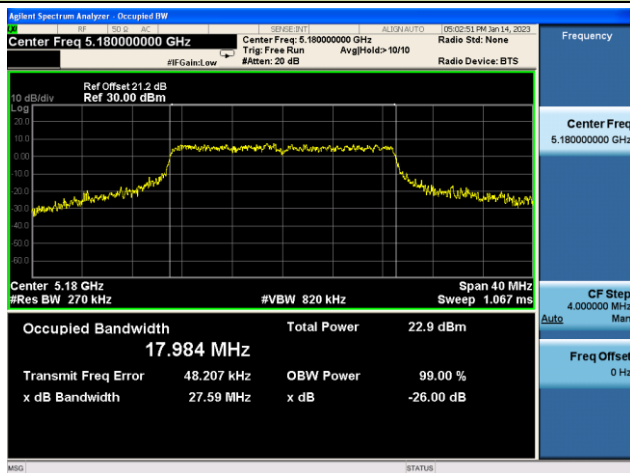


Channel 44 (5220MHz)

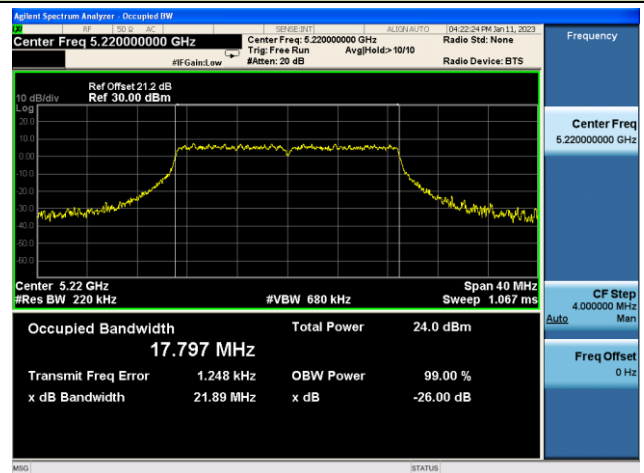


Channel 48 (5240MHz)

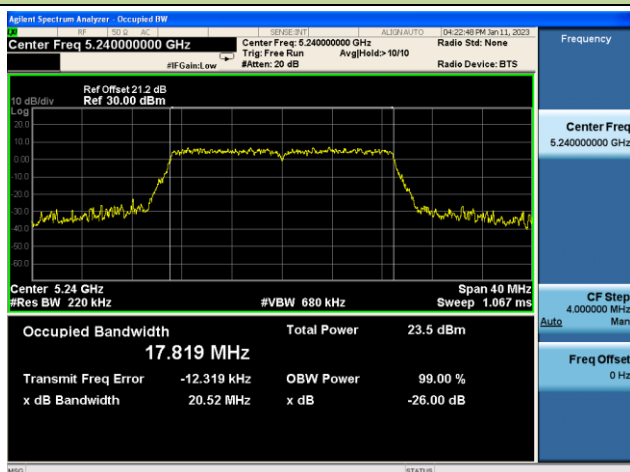

Channel 52 (5260MHz)

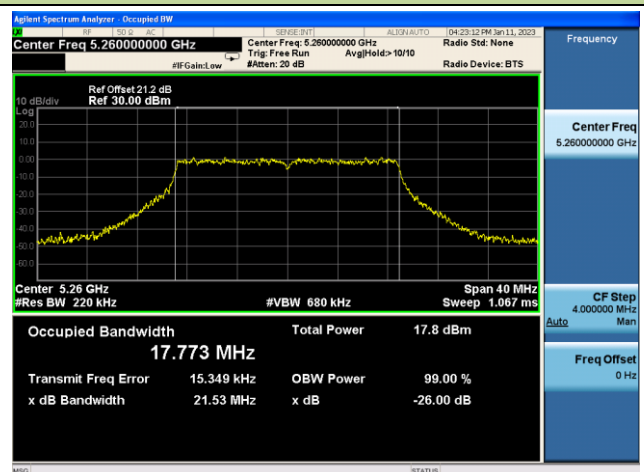

Channel 60 (5300MHz)

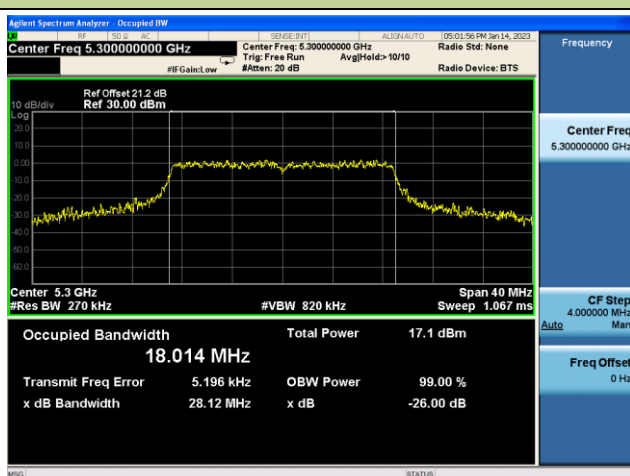

Channel 64 (5320MHz)

