ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

Applicant:	Immedia Semiconductor LLC. 100 Riverpark Drive, Suite 125 North Reading, MA 01864, United States of America
Manufacturer:	Immedia Semiconductor LLC. 100 Riverpark Drive, Suite 125 North Reading, MA 01864, United States of America
Product Name:	Outdoor camera
Brand Name:	blink
Model No.:	BCM00500U
Model Difference:	N/A
Report Number:	TERF2303000737E2
FCC ID	2AF77-H2211810
Date of EUT Received:	March 28, 2023
Date of Test:	April 11, 2023～May 2, 2023
Issue Date:	May 9, 2023

Approved By Arno Hsieh

Arno Hsieh

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Central RF Lab The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT comply with FCC rule part §15.247.

The results of this report relate only to the sample identified in this report.

Revision History

Report Number	Revision	Description	Issue Date	Revised By	Remark
TERF2303000737E2	00	Original	May 9, 2023	Violetta Tang	

Note:

1、The remark "*" indicates modification of the report upon requests from certification body.

Table of Contents

1 GENERAL INFORMATION

1.1 Product Description

Product Name:	Outdoor camera
Brand Name:	blink
Model No.:	BCM00500U
Model Difference:	N/A
Hardware Version:	PVT
Firmware Version:	N/A
EUT Series No.:	TE_SP_20230402993
Power Supply:	3V
Test Software (Name/Version)	Tera Term V4.106

1.2 RF Specification

Radio Technology:	802.11ah
Frequency Range:	902 MHz – 928 MHz
Modulation type:	OFDM
Transmit Power:	OFDM 1M：18.65 dBm (Peak) OFDM 2M：20.10 dBm (Peak)

1.3 Antenna Designation

Antenna Type	Supplier	Antenna Part No.	Freq. (MHz)	Peak Antenna Gain (dBi)
Inverted F	Immedia Semiconductor LLC.	BCM00500U	902~928	-2.10

Note: Antenna information is provided by the applicant.

1.4 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247
FCC KDB 558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10:2013

1.5 Test Facility

Laboratory	Test Site Address	Test Site Name	FCC Designation number	IC CAB identifier
SGS Taiwan Ltd. Central RF Lab. (TAF code 3702)	No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan.	SAC 1	TW0027	TW3702
		SAC 2		
		SAC 3		
		Conduction 1		
		Conducted 1		
		Conducted 2		
		Conducted 3		
		Conducted 4		
		Conducted 5		
		Conducted 6		
	No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333	Conduction C	TW0028	
		SAC C		
		SAC D		
		SAC G		
		Conducted A		
		Conducted B		
		Conducted C		
		Conducted D		
		Conducted E		
		Conducted F		
		Conducted G		

Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.

1.6 Special Accessories

There are no special accessories used while test was conducted.

1.7 Equipment Modifications

There was no modification incorporated into the EUT.

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.3 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

2.4.1 Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz

Radiated emission below 30MHz is measured in a 9m*6m*6m semi-anechoic chamber, the measurements correspond to those obtained at an open-field test site.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

2.4.2 For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

2.5 Test Configuration

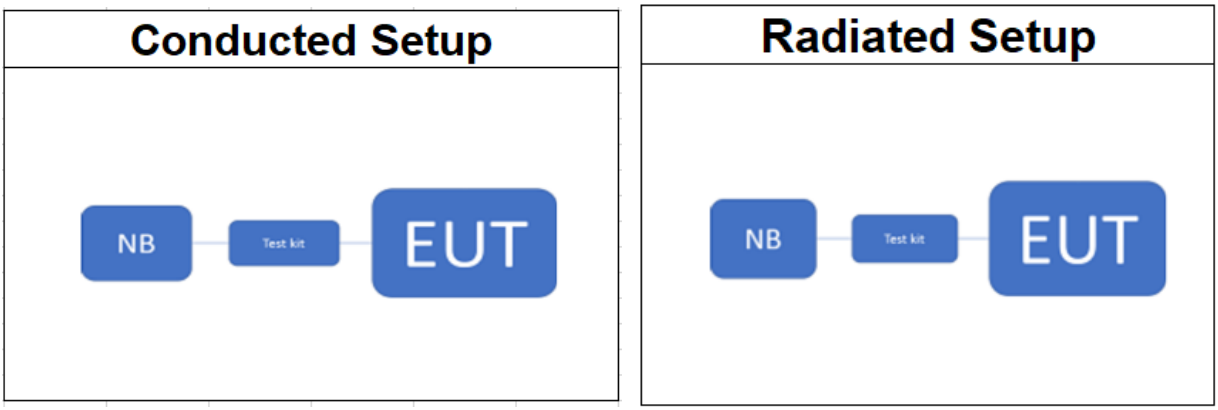

2.6 Control Unit(s)

Conducted Emission Test Site: Conducted D					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Notebook	Lenovo	L420	S0011721	N/A	N/A

Radiated Emission Test Site: SAC D					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Notebook	Lenovo	L480	P0002332	N.C.R	N.C.R

3 SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	NA
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	Emission Bandwidth	Compliant
§15.247(d) §15.205 §15.209	Radiated & Conducted Band Edge and Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant

4 DESCRIPTION OF TEST MODES

4.1 Operating Frequencies

	OFDM 1M		OFDM 2M	
	CH	Freq. (MHz)	CH	Freq. (MHz)
Channel List	1	919.5	1	919
	2	920.5	2	921
	3	921.5	3	923
	4	922.5	4	925
	5	923.5		
	6	924.5		
	7	925.5		
	8	926.5		

4.2 The Worst Test Modes and Channel Details

1. The EUT has been tested under operating condition.
2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
3. The field strength of radiation emission was measured as the EUT positioned in different orthogonal planes (E1/E2/H) based on actual usage of the EUT to pre-scan the emissions for determining the worst case scenario.
4. Investigation has been done on all the possible configurations for searching the worst case.

CONDUCTED TEST			
MODE	AVAILABLE FREQUENCY (MHz)	AVAILABLE FREQUENCY (MHz)	Data Rate
OFDM 1M	902 to 928	919.5, 923.5, 926.5	MCS0
OFDM 2M	902 to 928	919, 923, 925	MCS0

RADIATED EMISSION TEST (BELOW 1 GHz)			
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	DATA RATE (Mbps)
OFDM 1M	902 to 928	923.5	MCS0
OFDM 2M	902 to 928	923.0	MCS0

RADIATED EMISSION TEST (ABOVE 1 GHz)			
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	DATA RATE (Mbps)
OFDM 1M	902 to 928	919.5,923.5,926.5	MCS0
OFDM 2M	902 to 928	919.0,923.0,925.0	MCS0

Note:

The field strength of radiated emission was measured as the EUT positioned in different orthogonal planes (E1/E2/H) based on actual usage of the EUT to pre-scan the emissions for determining the worst case scenario.

5 MEASUREMENT UNCERTAINTY

Test Items	Uncertainty		
AC Power Line Conducted Emission	+/-	2.32	dB
Output Power measurement	+/-	1	dB
Emission Bandwidth	+/-	1.53	Hz
Undesignable radiated emission measurement	+/-	1.68	dB
Peak Power Density	+/-	2.16	dB
Temperature	+/-	0.7	°C
Humidity	+/-	3	%
DC / AC Power Source	+/-	1	%

Radiated Spurious Emission Measurement Uncertainty				
Polarization: Vertical	**+/-**	**2.8**	**dB**	9kHz~30MHz
	+/-	**4.82**	**dB**	30MHz - 1000MHz
	+/-	**4.37**	**dB**	1GHz - 18GHz
	+/-	**4.21**	**dB**	18GHz - 40GHz
Polarization: Horizontal	**+/-**	**2.8**	**dB**	9kHz~30MHz
	+/-	**4.54**	**dB**	30MHz - 1000MHz
	+/-	**4.37**	**dB**	1GHz - 18GHz
	+/-	**4.21**	**dB**	18GHz - 40GHz

Note:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

6 MEASUREMENT EQUIPMENT USED

6.1 Emission from AC power line

N/A

6.2 Conducted Measurement

Conducted Emission Test Site: Conducted D					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	KEYSIGHT	N9010B	MY59071573	05/16/2022	05/15/2023
Power Meter	Anritsu	ML2496A	1804002	04/27/2022	04/26/2023
Power Sensor	Anritsu	MA2411B	1726105	04/27/2022	04/26/2023
Power Sensor	Anritsu	MA2411B	1726106	04/27/2022	04/26/2023
DC Power Supply	Agilent	E3640A	MY53140006	05/16/2022	05/15/2023
Attenuator	Woken	WATT-218FS-10	RF18	11/16/2022	11/15/2023
Attenuator	Woken	WATT-218FS-10	RF19	11/16/2022	11/15/2023
DC Block	PASTERNACK	PE8210	RF158	11/16/2022	11/15/2023

6.3 Radiated Measurement

Radiated Emission Test Site: SAC D					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Broadband Antenna	SCHWARZBECK	VULB 9168	9168-617	12/19/2022	12/18/2023
Horn Antenna	Schwarzbeck	BBHA9170	184	12/30/2022	12/29/2023
Horn Antenna	Schwarzbeck	BBHA9170	185	08/22/2022	08/21/2023
Horn Antenna	Schwarzbeck	BBHA9120D	1341	05/31/2022	05/30/2023
Loop Antenna	ETS.LINDGREN	6502	143303	05/14/2022	05/13/2023
3m Site NSA	SGS	966 chamber D	N/A	04/30/2022	04/29/2023
Test Software	audix	e3	E3 20923 SGS Ver.9 (C)	N.C.R	N.C.R
Pre-Amplifier	EMC Instruments	EMC18405SEE	980881	10/25/2022	10/24/2023
Pre-Amplifier	EMC Instruments	EMC9135	980234	11/16/2022	11/15/2023
Pre-Amplifier	EMC Instruments	EMC12630SE	980273	11/16/2022	11/15/2023
DC Power Supply	Agilent	E3640A	MY53130054	09/29/2022	09/28/2023
Coaxial Cable	Huber+Suhner	RG 214/U	W21.01	11/16/2022	11/15/2023
Coaxial Cable	Huber Suhner	EMC106-SM-SM-7200	150703	11/16/2022	11/15/2023
Coaxial Cable	Huber Suhner	SUCOFLEX 104	MY17413/4	11/16/2022	11/15/2023

NOTE: *N.C.R refers to Not Calibrated Required.*

7 CONDUCTED EMISSION TEST

7.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range MHz	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note 1.The lower limit shall apply at the transition frequencies 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

7.2 EUT Setup:

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

7.3 Test Setup

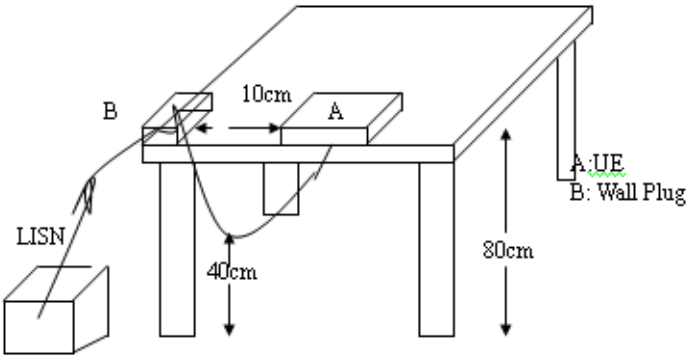

7.4 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all phases of power being supplied by given UE are completed

7.5 Measurement Result:

N/A; Powered from AA batteries.

8 PEAK OUTPUT POWER MEASUREMENT

8.1 Standard Applicable:

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

8.2 Test Setup

8.2.1 Duty Cycle

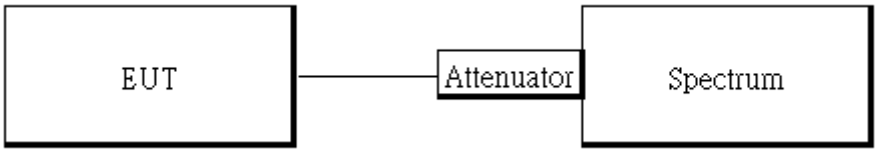

8.2.2 Output Power

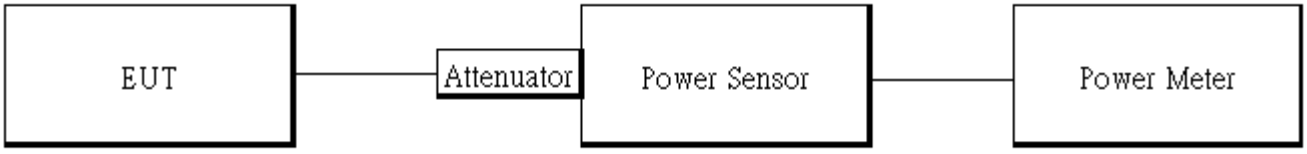

8.3 Measurement Procedure:

8.3.1 Duty Cycle

1. Place the EUT on the table and set it in transmitting mode.
2. Set span = Zero
3. RBW = 8MHz, VBW = 8MHz,
4. Detector = Peak

8.3.2 Output Power

1. Place the EUT on the table and set it in transmitting mode.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
4. Record the max. Reading as observed from Power Meter.
5. Repeat above procedures until all test default channel measured was complete.

8.4 Duty Factor:

	Duty Cycle (%) = Ton / (Ton+Toff)	Duty Factor (dB) =10*log (1/Duty Cycle)	1/T (kHz)	VBW setting (kHz)
OFDM 1M	100.00	0.00	0.33	0.01
OFDM 2M	100.00	0.00	0.33	0.01

OFDM_1M_LowCH-919.5

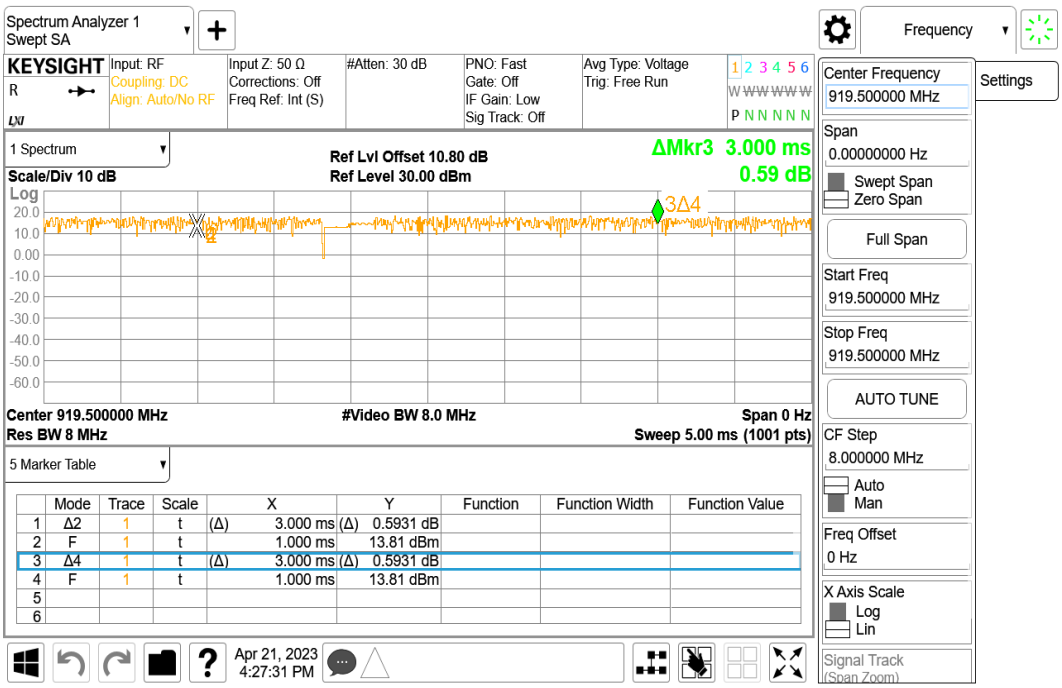

OFDM_2M_LowCH-919

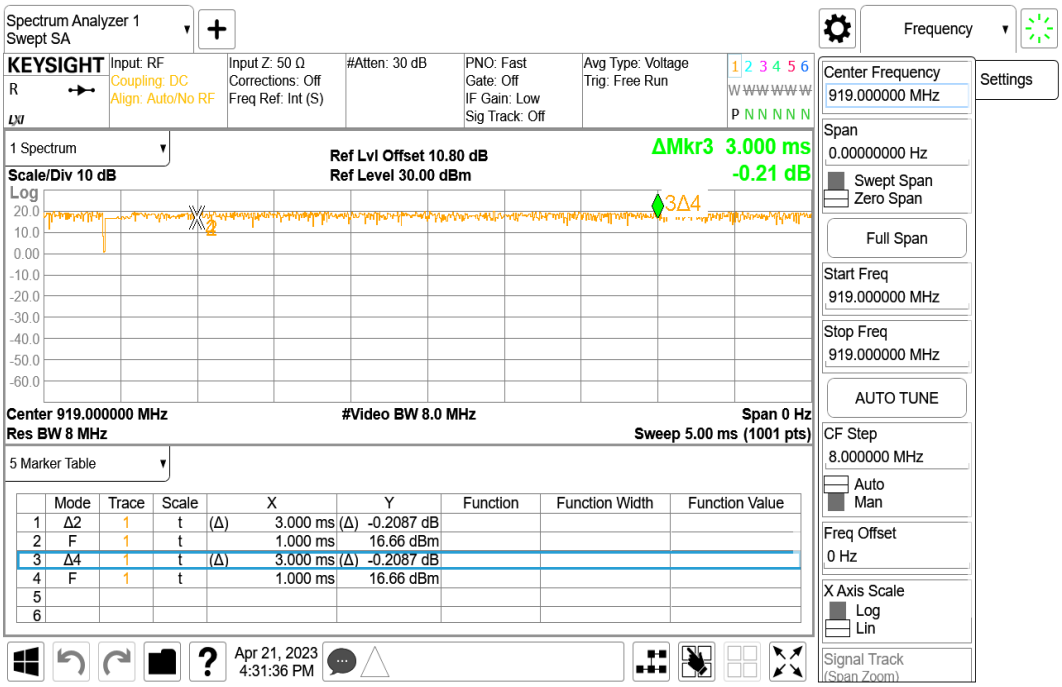

8.5 Output Power:

8.5.1 Peak & Avg

OFDM 1M mode:

CH	Frequency (MHz)	Power set	Peak Power Output (dBm)	Required Limit (dBm)
Low	919.5	11	**18.65**	30
Mid	923.5	11	18.52	30
High	926.5	11	18.39	30
CH	**Frequency (MHz)**	**Power set**	**Max. Avg. Output include tune up tolerance Power (dBm)**	**Required Limit (dBm)**
Low	919.5	11	11.34	30
Mid	923.5	11	11.28	30
High	926.5	11	11.08	30

**Note: Measured by power meter, cable loss 10.8 dB + Duty cycle factor has been offseted to the power meter for Avg. power and cable loss has been offseted for Peak power measurement.*

OFDM 2M mode:

CH	Frequency (MHz)	Power set	Peak Power Output (dBm)	Required Limit (dBm)
Low	919	13	**20.10**	30
Mid	923	13	19.91	30
High	925	13	19.87	30
CH	**Frequency (MHz)**	**Power set**	**Max. Avg. Output include tune up tolerance Power (dBm)**	**Required Limit (dBm)**
Low	919	13	13.55	30
Mid	923	13	13.49	30
High	925	13	13.46	30

**Note: Measured by power meter, cable loss 10.8 dB + Duty cycle factor has been offseted to the power meter for Avg. power and cable loss has been offseted for Peak power measurement.*

9 EMISSION BANDWIDTH MEASUREMENT

9.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz .

9.2 Test Setup

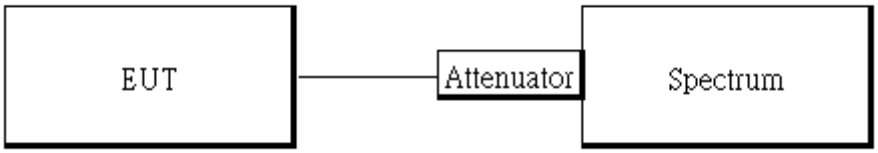

9.3 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

9.3.1 FCC measurements

1. The testing follows the Measurement Procedure of the KDB 558074 D01.
2. Set the spectrum analyzer as
   RBW= 100 kHz ,
   VBW = 3 X RBW,
   Span= 2 to 5 times of the OBW,
   Sweep=auto, Detector = Peak, and Max hold.
3. Mark the upper and lower frequencies of -6dB.
4. Repeat above procedures until all test default channel is completed.

9.4 Measurement Result:

OFDM 1M mode

Frequency (MHz)	6dB BW (MHz)	Required BW (MHz)	Result
919.5	0.802	≧ 0.5	PASS
923.5	0.8017	≧ 0.5	PASS
926.5	0.7969	≧ 0.5	PASS

OFDM 2M mode

Frequency (MHz)	6dB BW (MHz)	Required BW (MHz)	Result
919	1.796	≧ 0.5	PASS
923	1.8	≧ 0.5	PASS
925	1.789	≧ 0.5	PASS

OBW_OFDM 1M_LowCH-919.5MHz

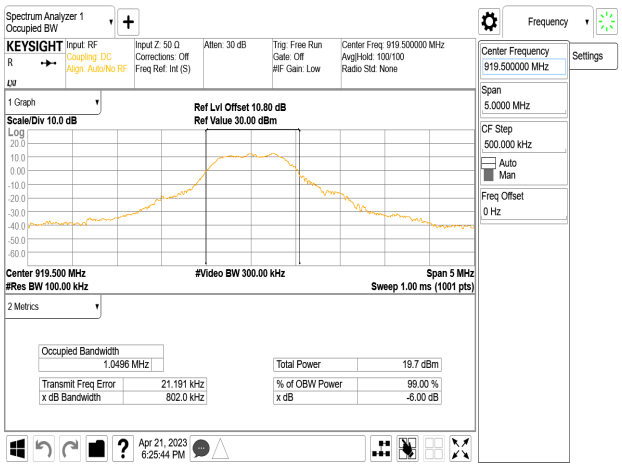

OBW_OFDM 2M_LowCH-919MHz

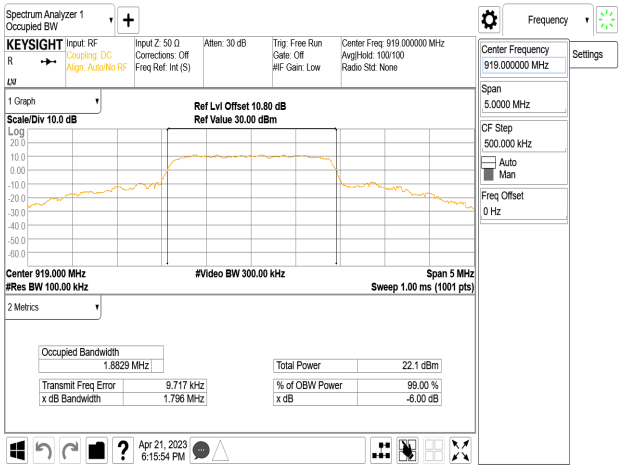

OBW_OFDM 1M_MidCH-923.5MHz

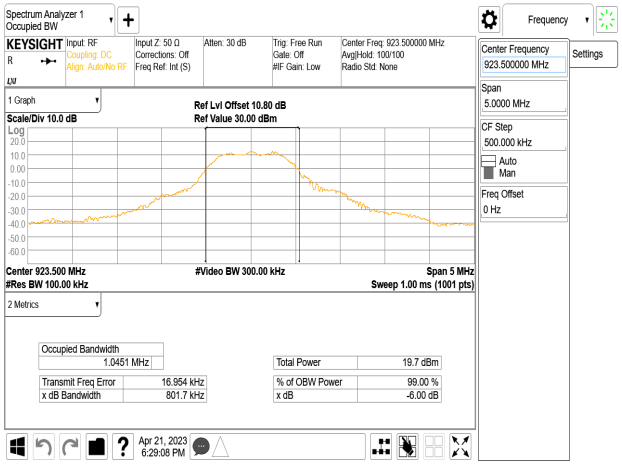

OBW_OFDM 2M_MidCH-923MHz

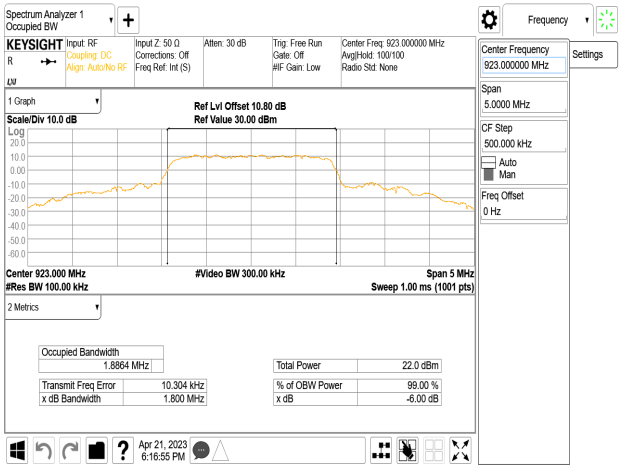

OBW_OFDM 1M_HighCH-926.5MHz

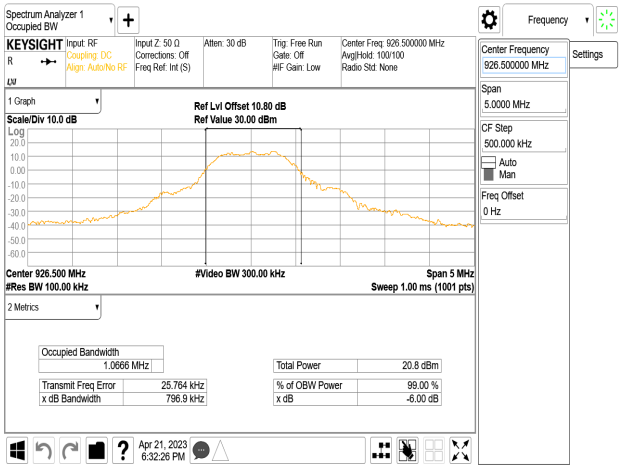

OBW_OFDM 2M_HighCH-925MHz

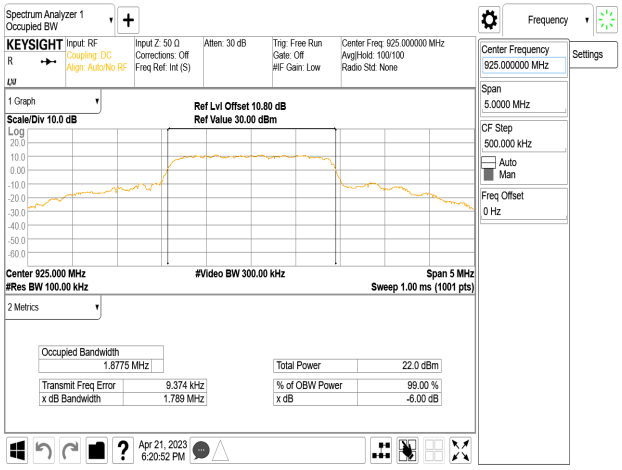

10 CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

10.2 Test Setup

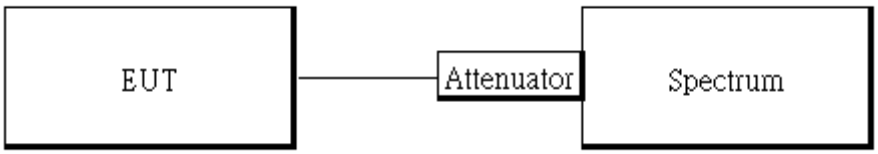

10.3 Measurement Procedure

10.3.1 Reference Level of Emission Limit:

1. Set analyzer center frequency to DTS channel center frequency.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
3. Set the span to 1.5 times the DTS channel bandwidth.
4. Set the RBW = 100kHz & VBW = 300 kHz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.

10.3.2 Conducted Band Edge:

1. To connect Antenna Port of EUT to Spectrum.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
6. Set DL as the limit = reading on marker of reference level measurement – 20dBm
7. Mark the highest readings of the emissions outside of 2400MHz~2483.5MHz.
8. Repeat above procedures until all default test channel (low and high) was complete.

10.3.3 Conducted Spurious Emission:

1. To connect Antenna Port of EUT to Spectrum.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
3. Set RBW = 100 kHz & VBW=300 kHz, Detector =Peak, Sweep = Auto
4. Allow trace to fully stabilize.
5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
6. Repeat above procedures until all default test channel measured were complete.

10.4 Measurement Result

OFDM 1M_Reference Level of Limit

Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
919.5	12.64	-7.36
923.5	12.52	-7.48
926.5	13.67	-6.33

NOTE: cable loss as 10.8dB that offsets in the spectrum

OFDM 2M_Reference Level of Limit

Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
919	11.18	-8.82
923	11.09	-8.91
925	10.97	-9.03

NOTE: cable loss as 10.8dB that offsets in the spectrum

Reference Level_OFDM 1M_LowCH-919.5MHz

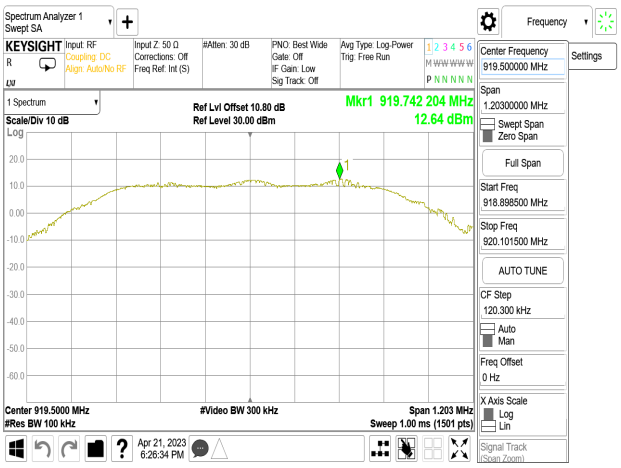

Reference Level_OFDM 2M_LowCH-919MHz

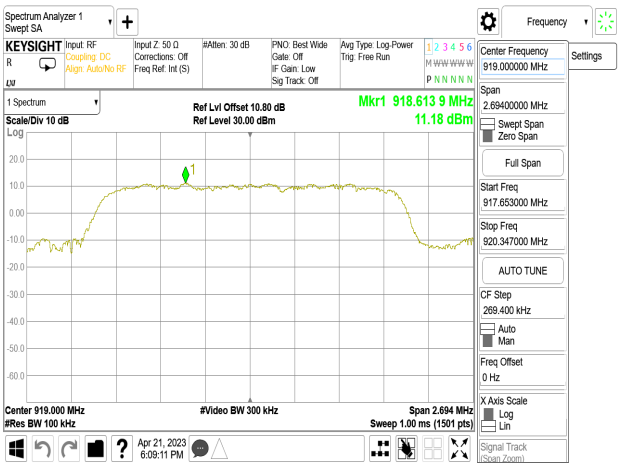

Reference Level_OFDM 1M_MidCH-923.5MHz

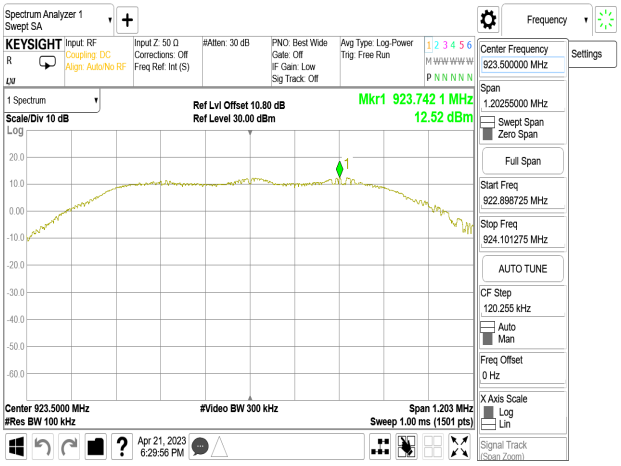

Reference Level_OFDM 2M_MidCH-923MHz

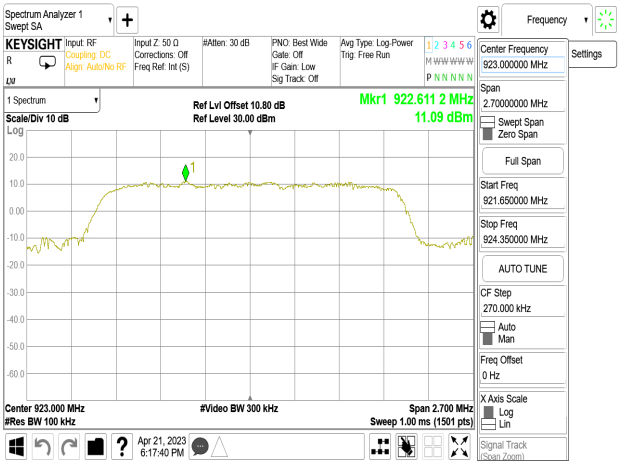

Reference Level_OFDM 1M_HighCH-926.5MHz

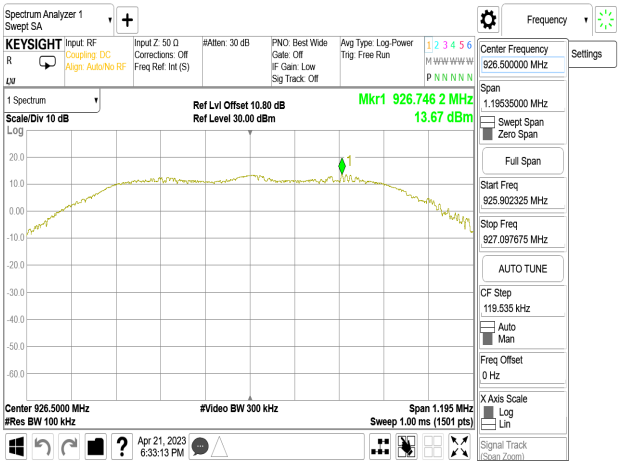

Reference Level_OFDM 2M_HighCH-925MHz

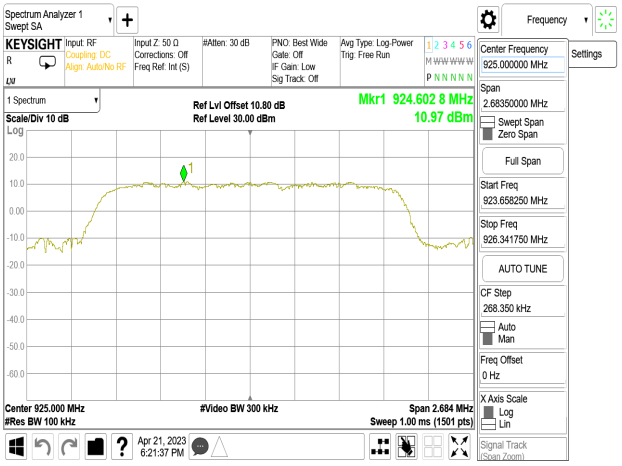

Band Edge_OFDM 1M_LowCH-919.5MHz

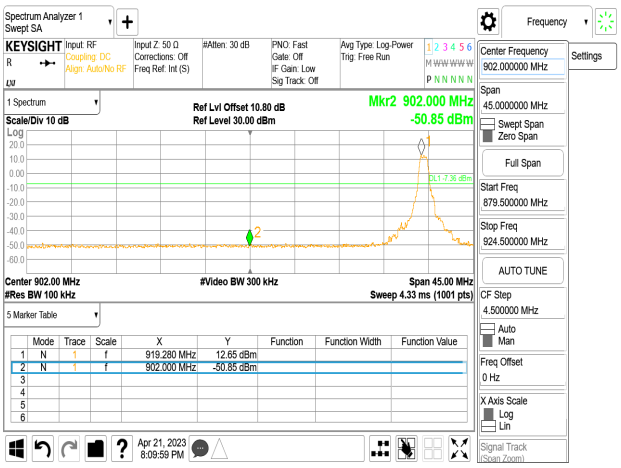

Band Edge_OFDM 2M_HighCH-925MHz

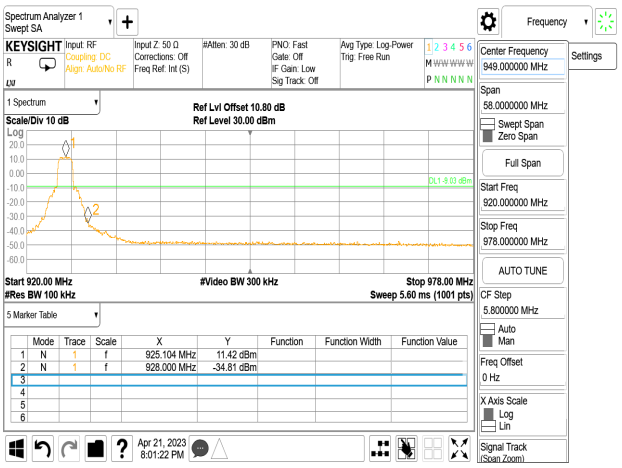

Band Edge_OFDM 1M_HighCH-926.5MHz

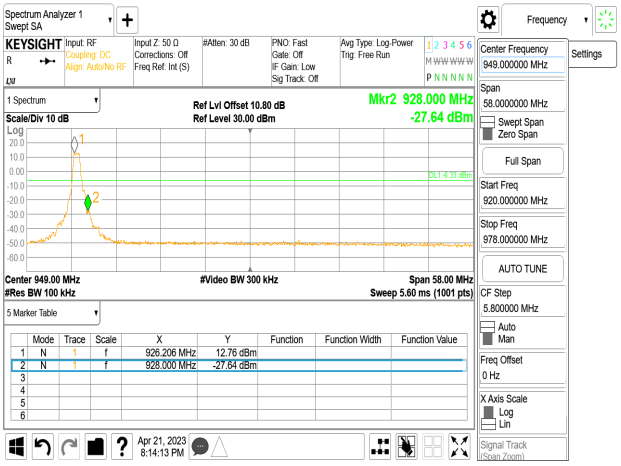

Spurious Emission_OFDM 1M_LowCH-919.5MHz

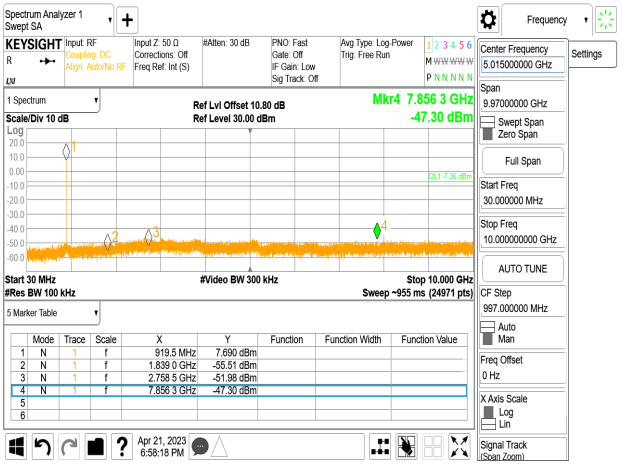

Band Edge_OFDM 2M_LowCH-919MHz

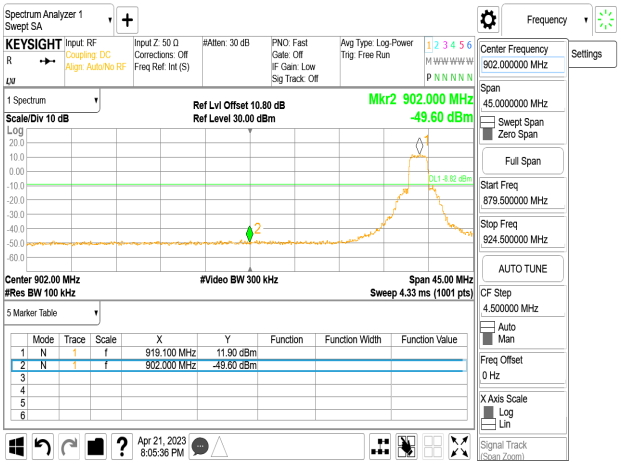

Spurious Emission_OFDM 1M_MidCH-923.5MHz

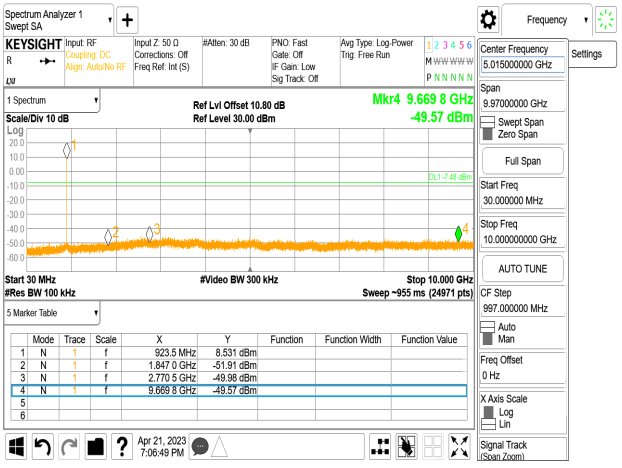

Spurious Emission_OFDM 1M_HighCH-926.5MHz

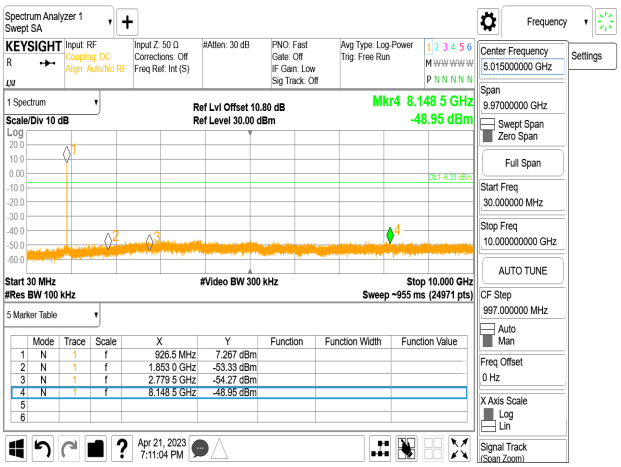

Spurious Emission_OFDM 2M_HighCH-925MHz

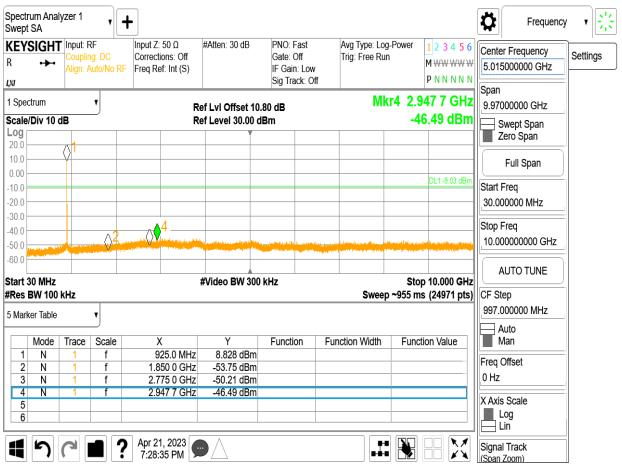

Spurious Emission_OFDM 2M_LowCH-919MHz

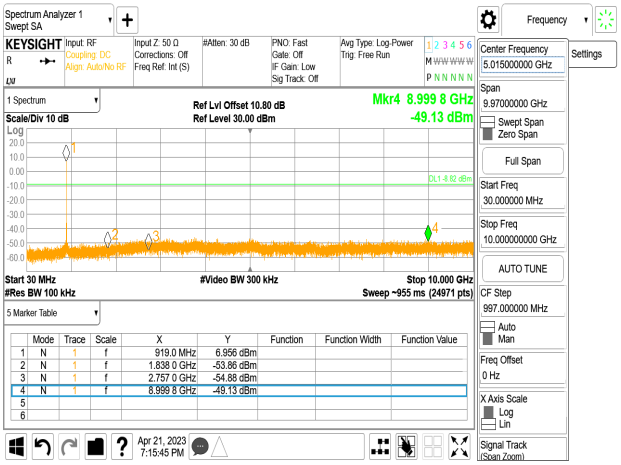

Spurious Emission_OFDM 2M_MidCH-923MHz

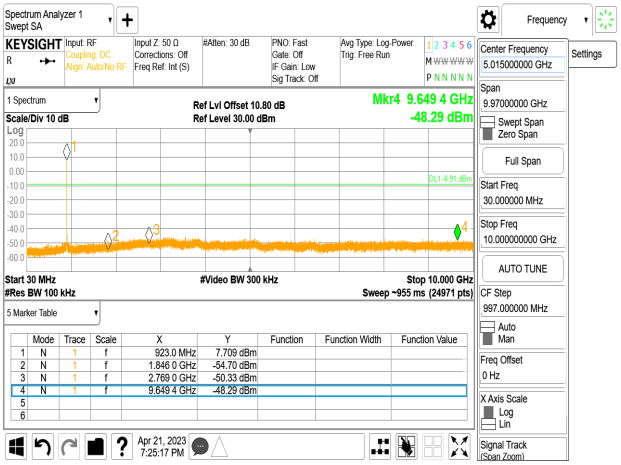

11 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

11.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1) for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note: The lower limit shall apply at the transition frequencies.

11.2 Test Setup

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz.

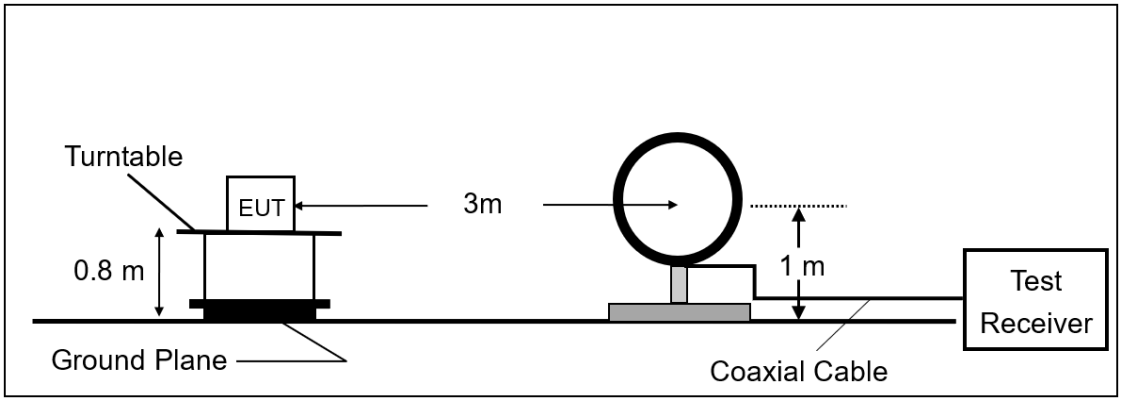

(B) Radiated Emission Test Set-Up, Frequency From 30MHz to 1000MHz.

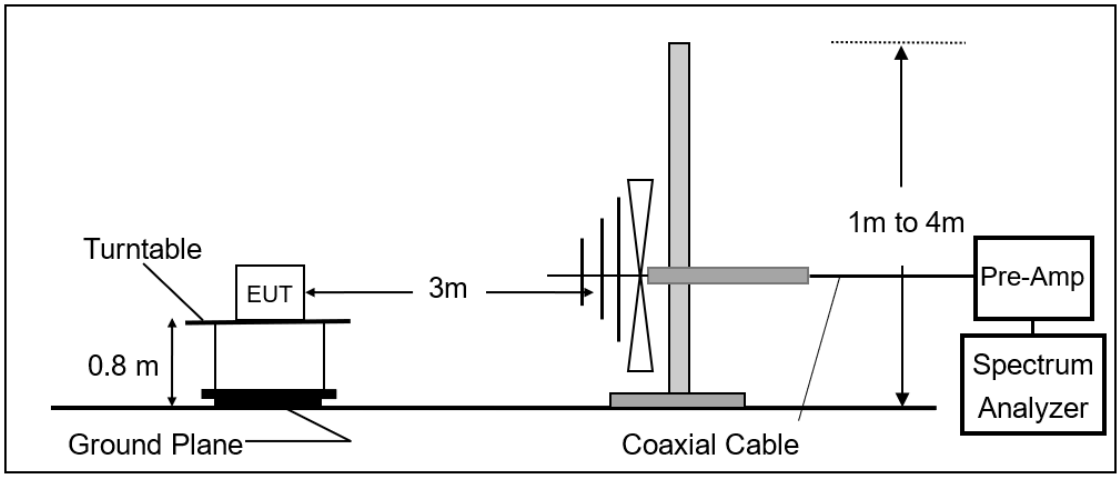

(C) Radiated Emission Test Set-Up, Frequency Above 1GHz.

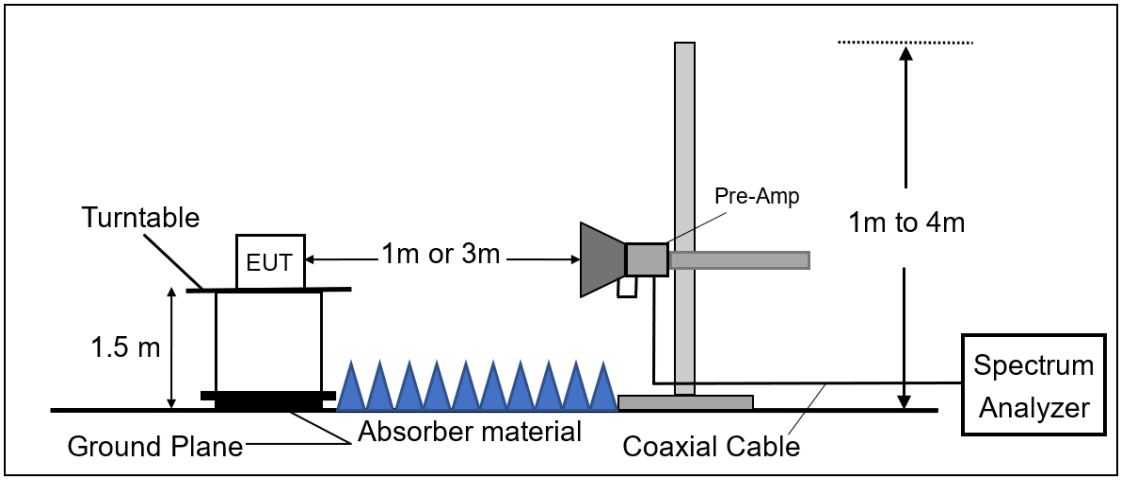

11.3 Measurement Procedure

1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
5. Set the spectrum analyzer as RBW=100 kHz and VBW=300 kHz for Peak Detector (PK) at frequency between 30MHz and 1 GHz.
6. Use receiver mode as RBW=120 kHz for Quasi-peak (QP) at frequency between 30MHz and 1 GHz.
7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Maximum Emission Measurements at frequency above 1 GHz.
8. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Emission Measurements at frequency above 1 GHz.
9. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
10. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
12. Repeat above procedures until all default test channel measured were complete.

11.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where *FS = Field Strength* *CL = Cable Attenuation Factor (Cable Loss)*
RA = Reading Amplitude *AG = Amplifier Gain*
AF = Antenna Factor

*The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)*

Actual FS(dBμV/m) = SPA. Reading level(dBμV) + Factor(dB)

Factor(dB) = Antenna Factor(dBμV/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

11.5 Test Results of Radiated Spurious Emissions from 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

11.6 Measurement Result:

11.6.1 Radiated Band Edge Measurement Result

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 1M	Test Date	:2023-04-20
Test Frequency	:919.5 MHz	Temp./Humi.	:20.5/69
Test Mode	:Bandedge	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Howard Huang

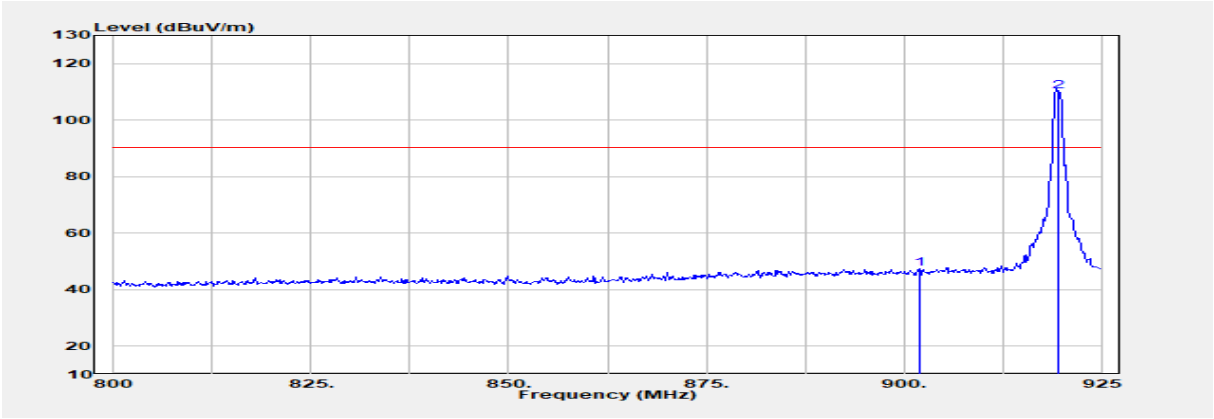

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
902.000	Peak	53.33	-5.82	47.51	90.25	-42.74
919.500	Peak	115.44	-5.19	110.25	90.25	-

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 1M	Test Date	:2023-04-20
Test Frequency	:919.5 MHz	Temp./Humi.	:20.5/69
Test Mode	:Bandedge	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Howard Huang

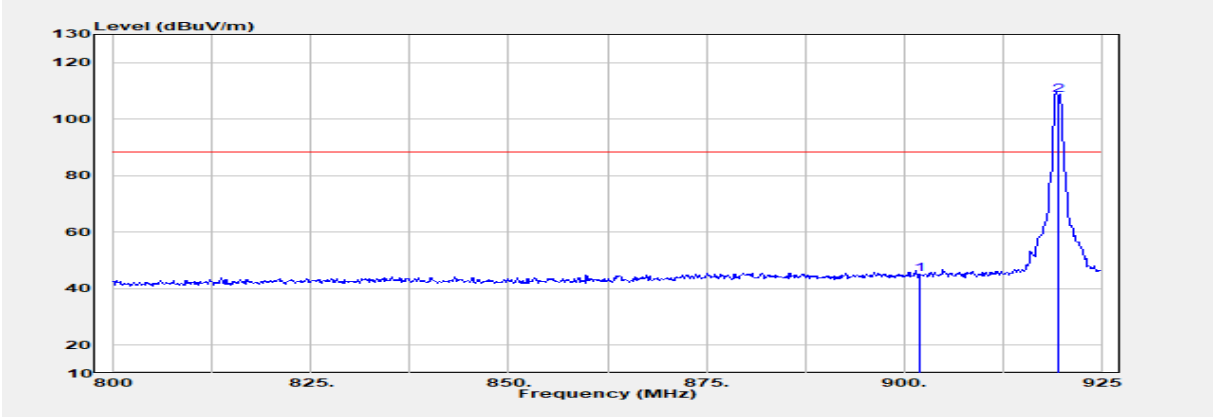

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
902.000	Peak	51.01	-5.82	45.19	88.41	-43.22
919.500	Peak	113.59	-5.19	108.41	88.41	-

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 1M	Test Date	:2023-04-21
Test Frequency	:923.5 MHz	Temp./Humi.	:21.5/61
Test Mode	:Bandedge	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Howard Huang

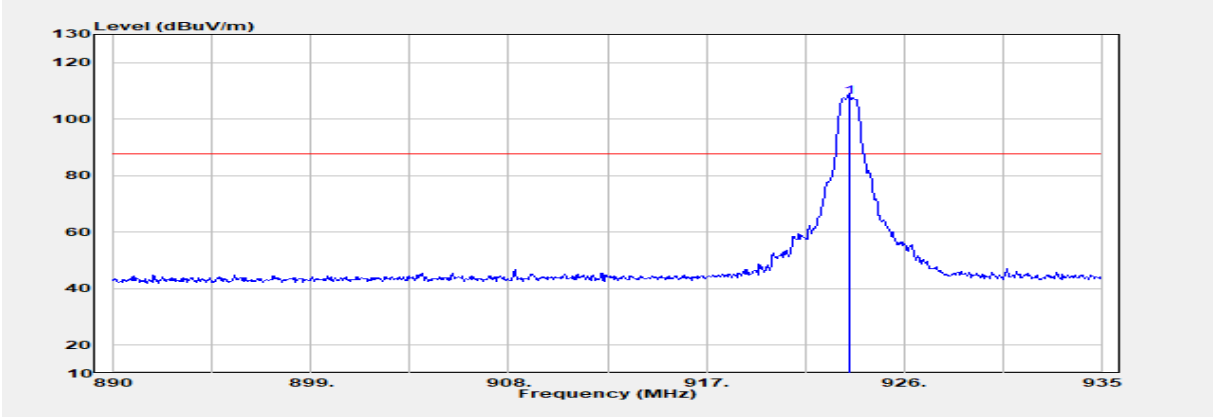

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
923.500	Peak	112.80	-4.97	107.83	87.83	-

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 1M	Test Date	:2023-04-21
Test Frequency	:923.5 MHz	Temp./Humi.	:21.5/61
Test Mode	:Bandedge	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Howard Huang

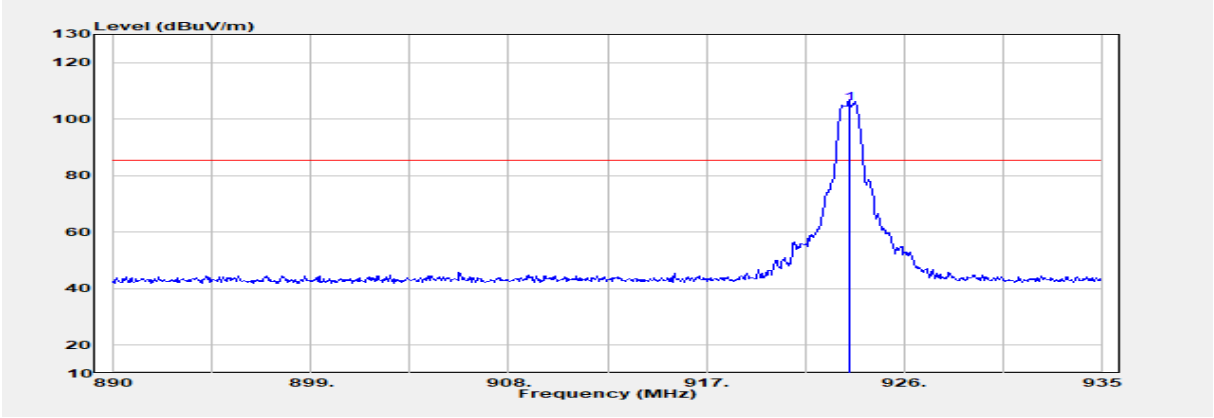

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
923.500	Peak	110.44	-4.97	105.47	85.47	-

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 1M	Test Date	:2023-04-27
Test Frequency	:926.5 MHz	Temp./Humi.	:23.8/61
Test Mode	:Bandedge	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Howard Huang

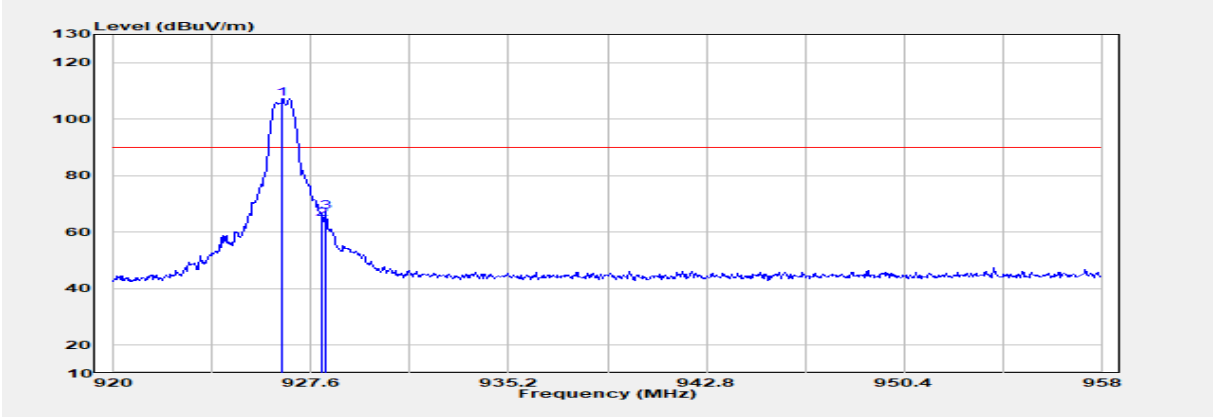

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
926.500	Peak	112.12	-4.87	107.25	87.25	-
928.000	Peak	69.38	-4.86	64.53	87.25	-22.72
928.170	Peak	72.19	-4.86	67.34	87.25	-19.91

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 1M	Test Date	:2023-04-27
Test Frequency	:926.5 MHz	Temp./Humi.	:23.8/61
Test Mode	:Bandedge	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Howard Huang

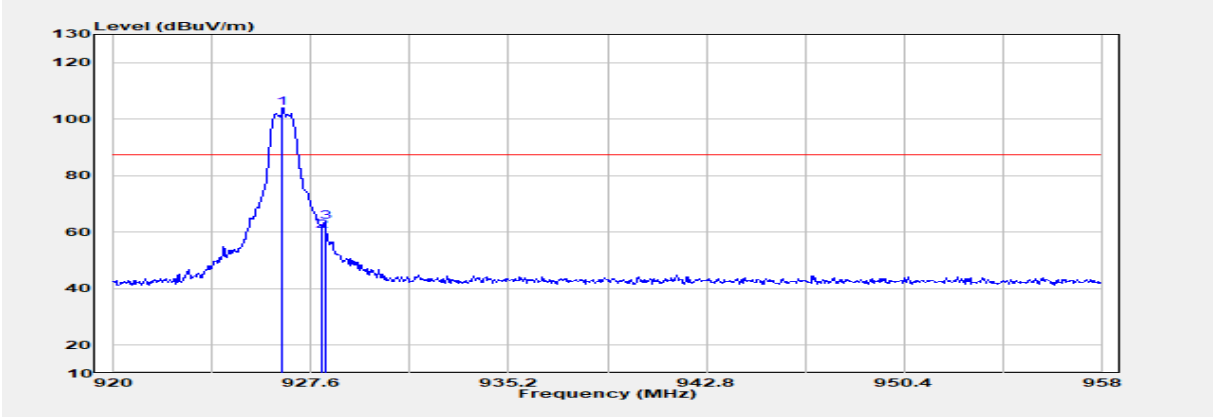

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
926.500	Peak	108.76	-4.87	103.89	83.89	-
928.000	Peak	65.35	-4.86	60.50	83.89	-23.40
928.132	Peak	68.63	-4.86	63.78	83.89	-20.12

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 2M	Test Date	:2023-04-12
Test Frequency	:919.0 MHz	Temp./Humi.	:22.9/64
Test Mode	:Bandedge	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Howard Huang

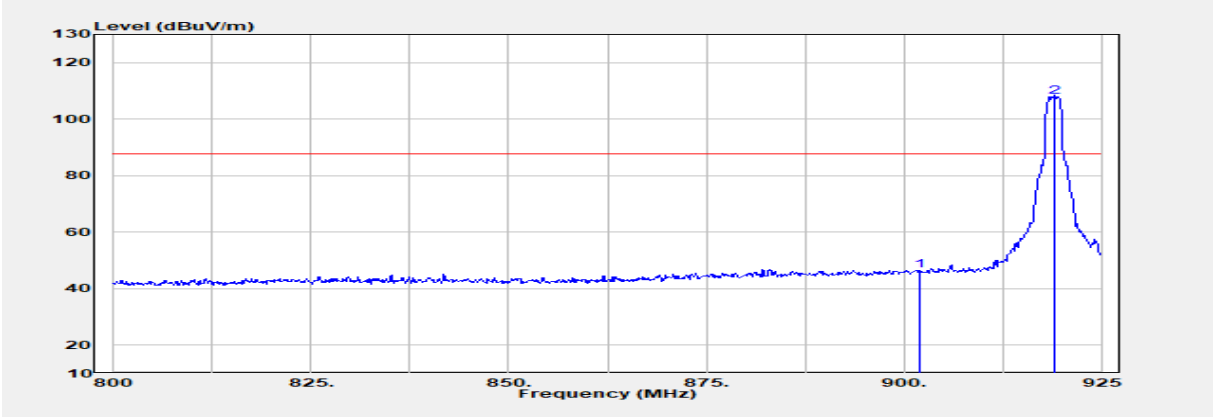

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
902.000	Peak	52.09	-5.82	46.27	87.79	-41.52
919.000	Peak	112.99	-5.20	107.79	87.79	-

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 2M	Test Date	:2023-04-12
Test Frequency	:919.0 MHz	Temp./Humi.	:22.9/64
Test Mode	:Bandedge	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Howard Huang

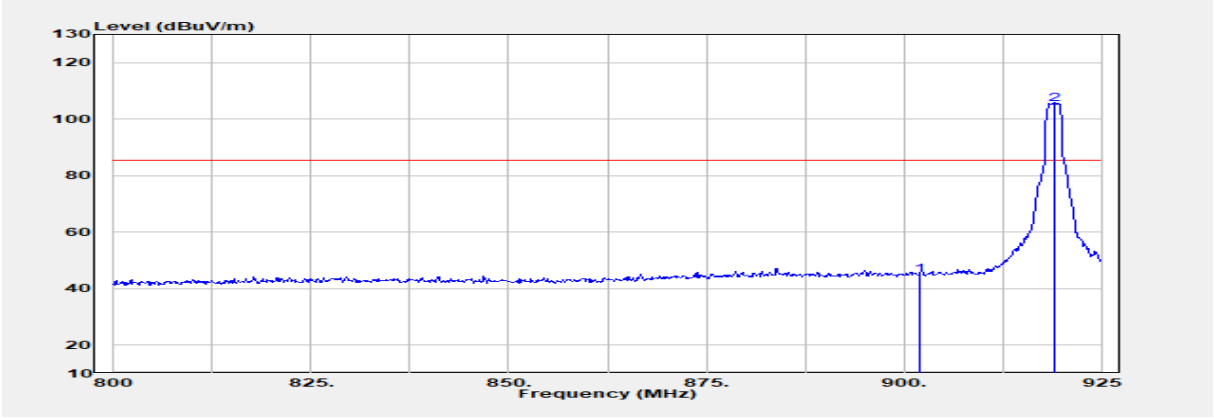

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
902.000	Peak	50.72	-5.82	44.90	85.35	-40.45
919.000	Peak	110.55	-5.20	105.35	85.35	-

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 2M	Test Date	:2023-04-12
Test Frequency	:923.0 MHz	Temp./Humi.	:22.9/64
Test Mode	:Bandedge	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Howard Huang

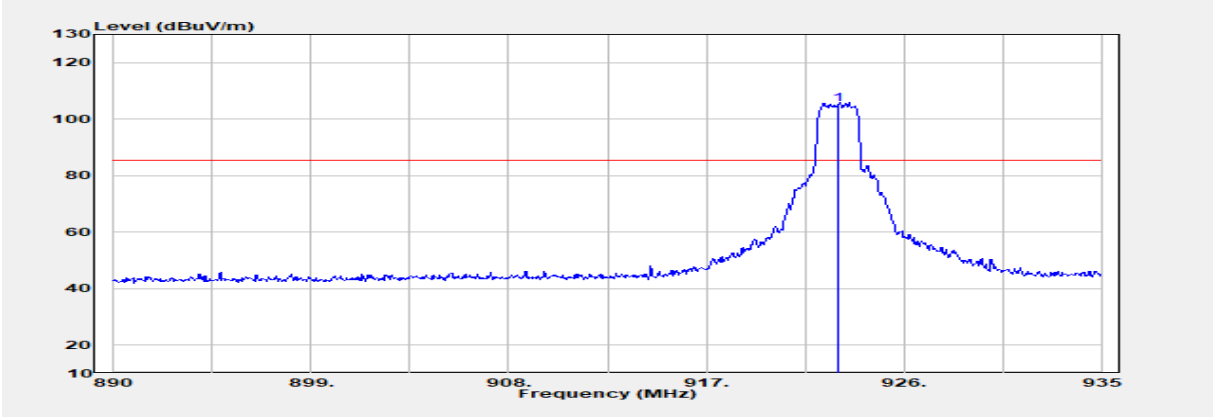

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
923.000	Peak	110.29	-5.00	105.29	85.29	-

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 2M	Test Date	:2023-04-12
Test Frequency	:923.0 MHz	Temp./Humi.	:22.9/64
Test Mode	:Bandedge	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Howard Huang

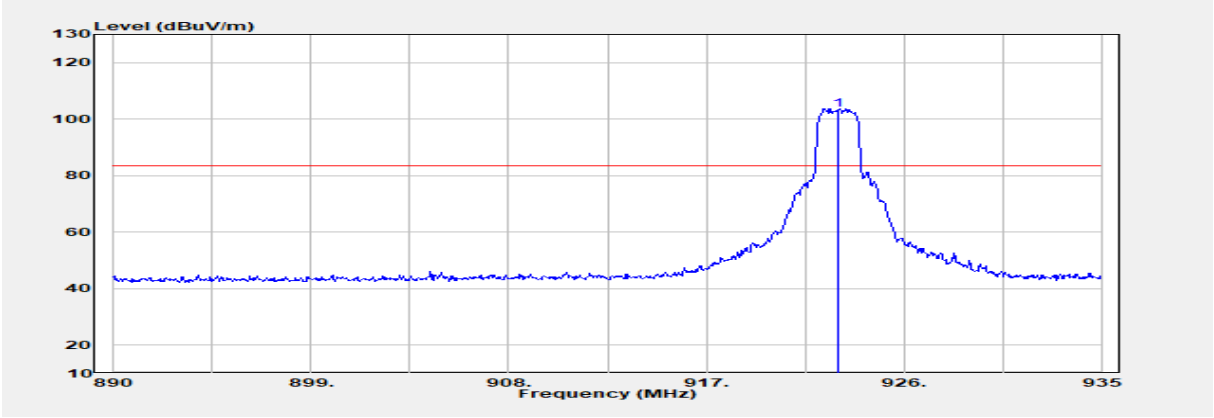

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
923.000	Peak	108.42	-5.00	103.42	83.42	-

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 2M	Test Date	:2023-04-12
Test Frequency	:925.0 MHz	Temp./Humi.	:22.9/64
Test Mode	:Bandedge	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Howard Huang

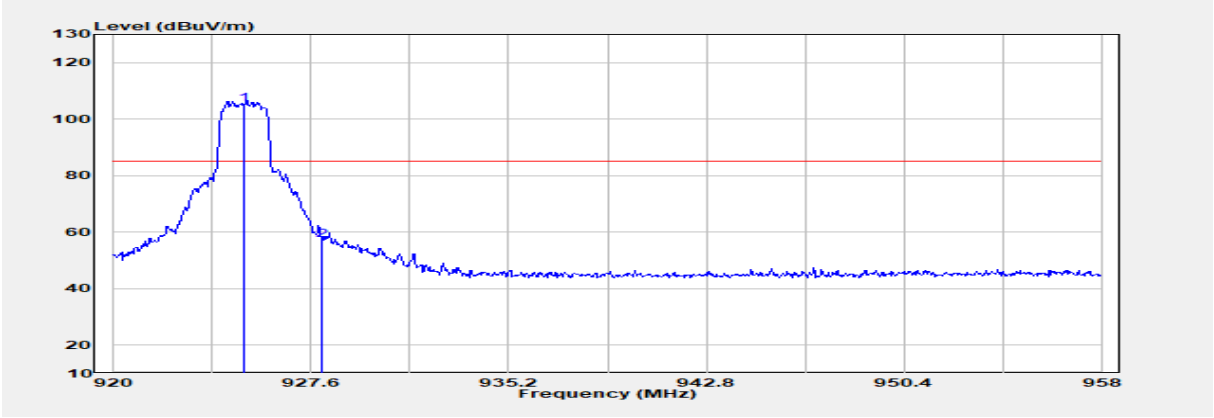

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
925.000	Peak	110.06	-4.88	105.18	85.18	-
928.000	Peak	61.92	-4.86	57.06	85.18	-28.12

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 2M	Test Date	:2023-04-12
Test Frequency	:925.0 MHz	Temp./Humi.	:22.9/64
Test Mode	:Bandedge	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Howard Huang

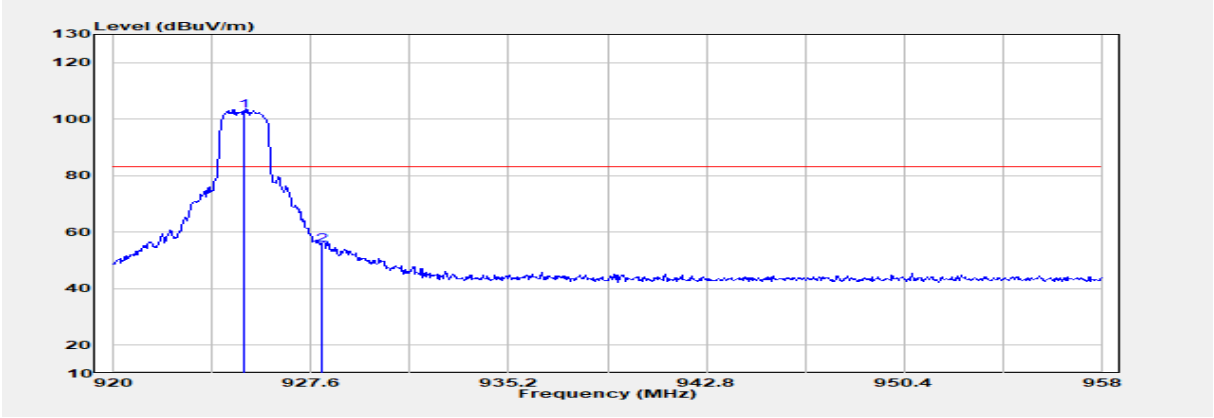

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
925.000	Peak	108.00	-4.88	103.12	83.12	-
928.000	Peak	60.36	-4.86	55.50	83.12	-27.62

11.6.2 Radiated Spurious Emission

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 1M	Test Date	:2023-04-11
Test Frequency	:923.5 MHz	Temp./Humi.	:20.5/69
Test Mode	:Tx	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Howard Huang

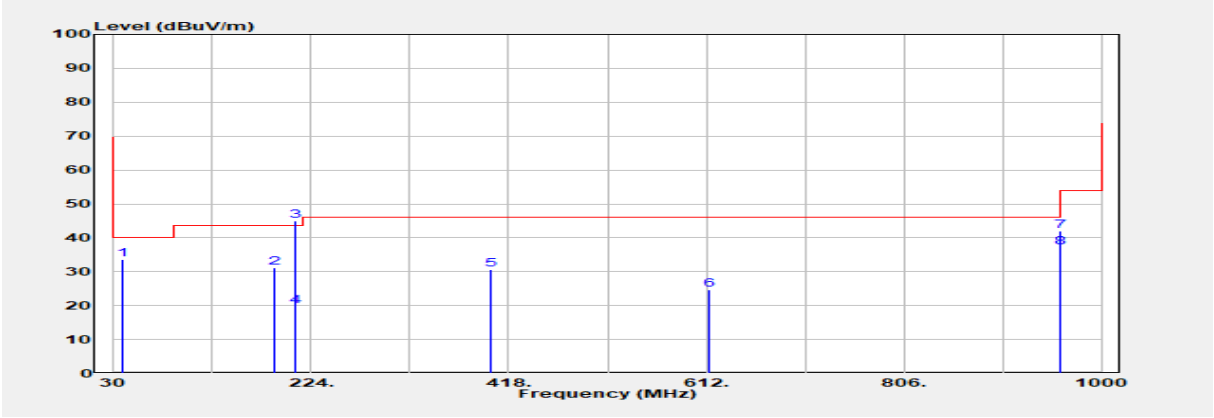

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
37.760	Peak	52.42	-18.82	33.60	40.00	-6.40
187.140	Peak	49.99	-18.83	31.16	43.50	-12.34
208.480	Peak	64.93	-20.08	44.85	43.50	-
208.480	QP	39.90	-20.08	19.82	43.50	-23.68
399.570	Peak	44.38	-13.65	30.73	46.00	-15.27
614.000	Peak	33.47	-8.73	24.74	46.00	-21.26
960.000	Peak	46.36	-4.43	41.94	46.00	-
960.000	QP	41.50	-4.43	37.07	46.00	-8.93

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 1M	Test Date	:2023-04-11
Test Frequency	:923.5 MHz	Temp./Humi.	:20.5/69
Test Mode	:Tx	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Howard Huang

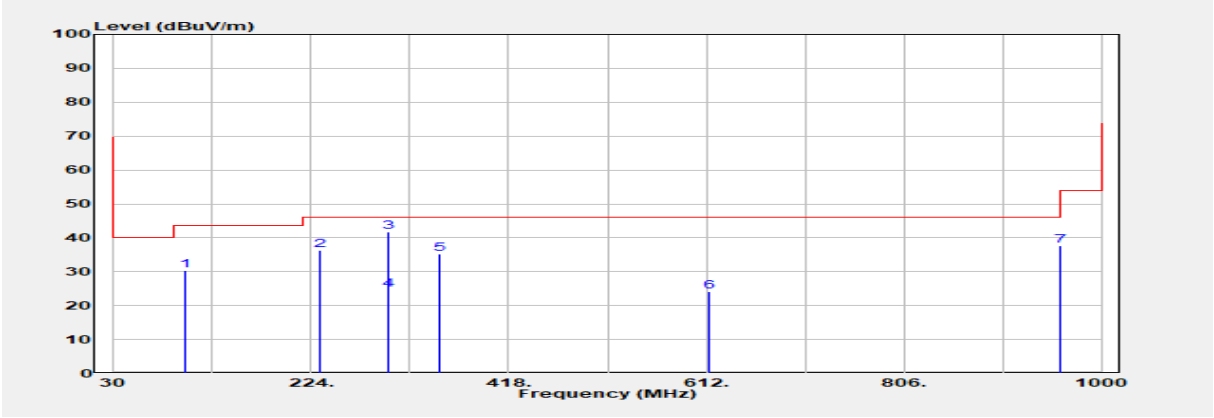

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
99.840	Peak	51.71	-21.44	30.27	43.50	-13.23
232.730	Peak	55.19	-18.94	36.25	46.00	-9.75
299.660	Peak	57.90	-16.16	41.74	46.00	-
299.660	QP	40.70	-16.16	24.54	46.00	-21.46
350.100	Peak	50.19	-14.94	35.25	46.00	-10.75
614.000	Peak	32.96	-8.73	24.22	46.00	-21.78
960.000	Peak	41.98	-4.43	37.56	46.00	-8.44

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 2M	Test Date	:2023-04-11
Test Frequency	:923.0 MHz	Temp./Humi.	:20.5/69
Test Mode	:Tx	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Howard Huang

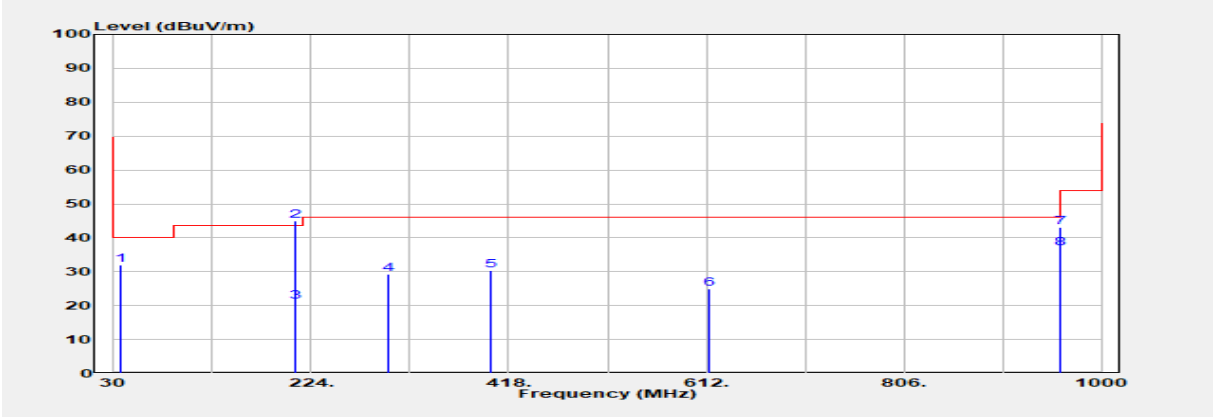

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
36.790	Peak	51.03	-19.02	32.01	40.00	-7.99
207.510	Peak	64.98	-20.06	44.93	43.50	-
207.510	QP	41.20	-20.06	21.14	43.50	-22.36
299.660	Peak	45.42	-16.16	29.26	46.00	-16.74
399.570	Peak	44.02	-13.65	30.38	46.00	-15.62
614.000	Peak	33.66	-8.73	24.92	46.00	-21.08
960.000	Peak	47.51	-4.43	43.08	46.00	-
960.000	QP	41.30	-4.43	36.87	46.00	-9.13

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 2M	Test Date	:2023-04-11
Test Frequency	:923.0 MHz	Temp./Humi.	:20.5/69
Test Mode	:Tx	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Howard Huang

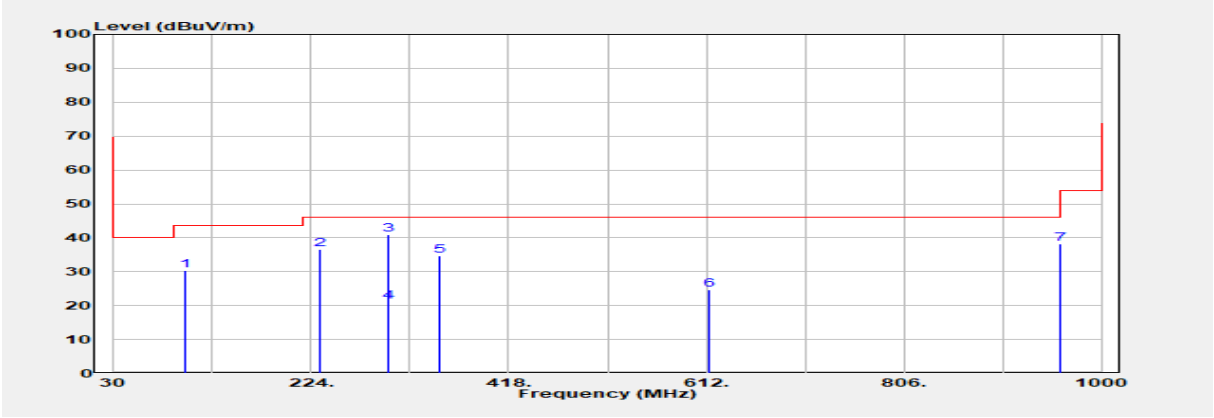

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
99.840	Peak	51.79	-21.44	30.34	43.50	-13.16
232.730	Peak	55.54	-18.94	36.60	46.00	-9.40
299.660	Peak	57.08	-16.16	40.92	46.00	-
299.660	QP	37.40	-16.16	21.24	46.00	-24.76
350.100	Peak	49.55	-14.94	34.61	46.00	-11.39
614.000	Peak	33.28	-8.73	24.55	46.00	-21.45
960.000	Peak	42.55	-4.43	38.12	46.00	-7.88

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 1M	Test Date	:2023-04-25
Test Frequency	:919.5 MHz	Temp./Humi.	:24.2/60
Test Mode	:Tx	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Howard Huang

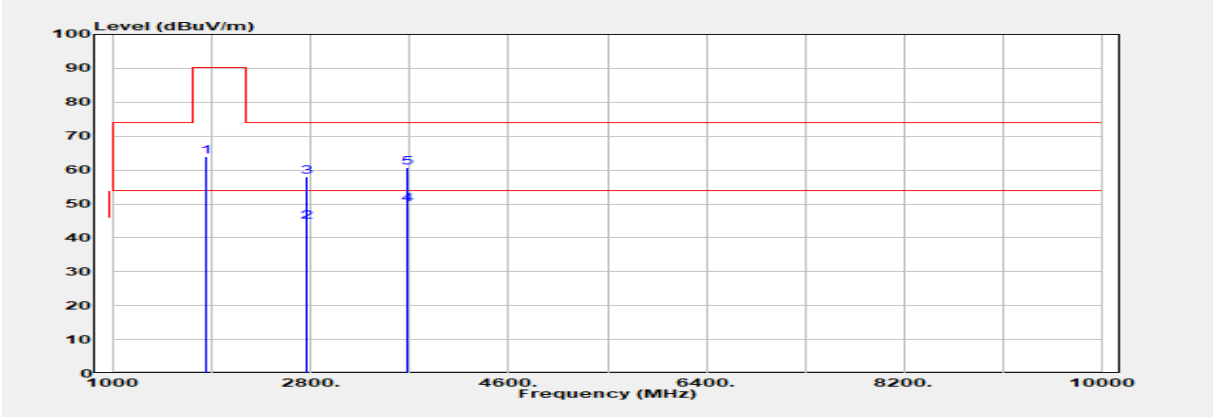

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
1839.000	Peak	73.33	-9.50	63.83	90.25	-26.42
2758.500	Average	51.09	-6.30	44.79	54.00	-9.21
2758.500	Peak	64.20	-6.30	57.89	74.00	-16.11
3678.000	Average	54.50	-4.53	49.97	54.00	-4.03
3678.000	Peak	65.29	-4.53	60.76	74.00	-13.24

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 1M	Test Date	:2023-04-25
Test Frequency	:919.5 MHz	Temp./Humi.	:24.2/60
Test Mode	:Tx	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Howard Huang

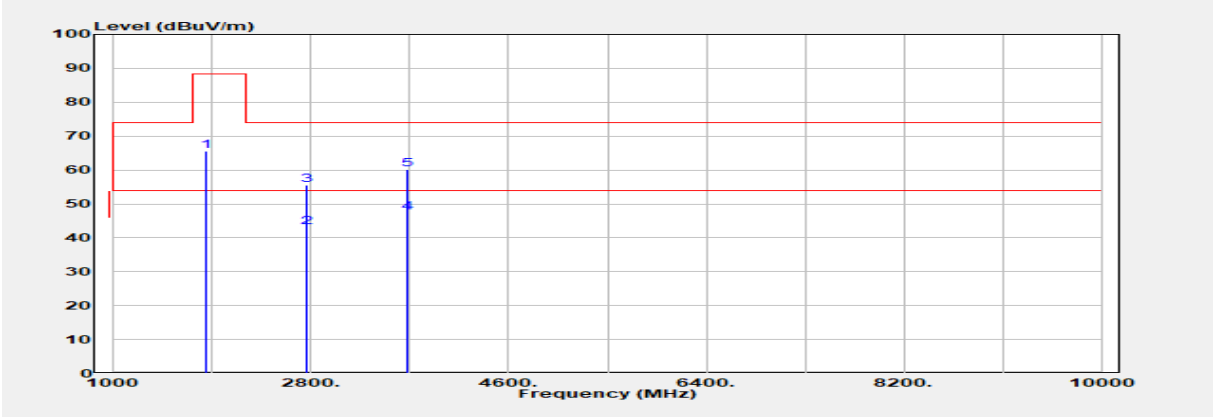

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
1839.000	Peak	75.04	-9.50	65.54	88.41	-22.87
2758.500	Average	49.48	-6.30	43.18	54.00	-10.82
2758.500	Peak	61.77	-6.30	55.47	74.00	-18.53
3678.000	Average	51.92	-4.53	47.39	54.00	-6.61
3678.000	Peak	64.70	-4.53	60.17	74.00	-13.83

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 1M	Test Date	:2023-04-25
Test Frequency	:923.5 MHz	Temp./Humi.	:24.2/60
Test Mode	:Tx	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Howard Huang

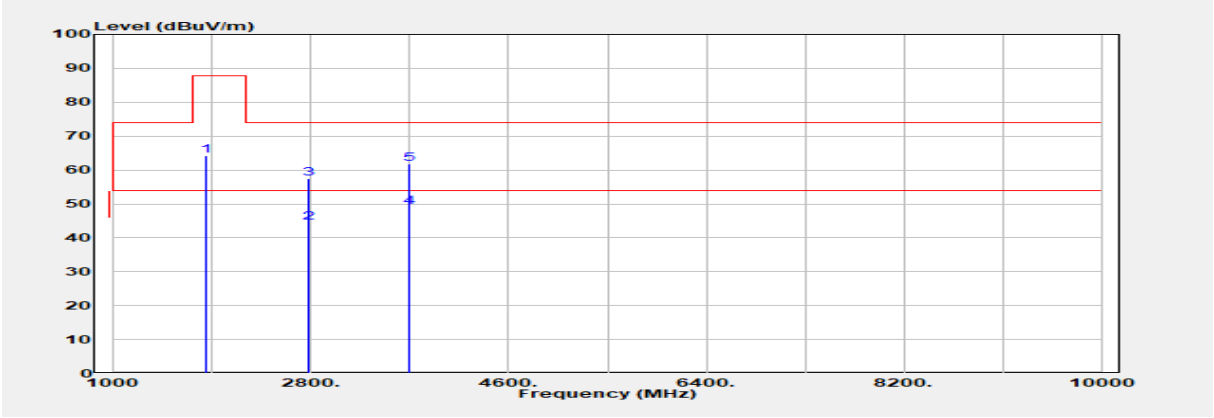

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
1847.000	Peak	73.61	-9.45	64.17	87.83	-23.66
2770.500	Average	50.75	-6.32	44.43	54.00	-9.57
2770.500	Peak	63.79	-6.32	57.47	74.00	-16.53
3694.000	Average	53.61	-4.46	49.15	54.00	-4.85
3694.000	Peak	66.31	-4.46	61.84	74.00	-12.16

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 1M	Test Date	:2023-04-25
Test Frequency	:923.5 MHz	Temp./Humi.	:24.2/60
Test Mode	:Tx	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Howard Huang

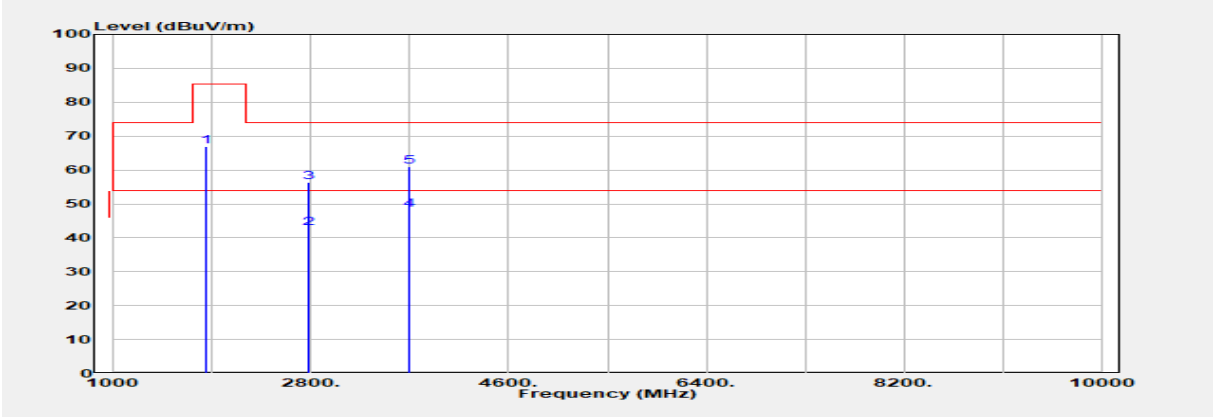

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
1847.000	Peak	76.27	-9.45	66.82	85.47	-18.65
2770.500	Average	49.27	-6.32	42.95	54.00	-11.05
2770.500	Peak	62.59	-6.32	56.27	74.00	-17.73
3694.000	Average	52.61	-4.46	48.15	54.00	-5.85
3694.000	Peak	65.32	-4.46	60.85	74.00	-13.15

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 1M	Test Date	:2023-04-25
Test Frequency	:926.5 MHz	Temp./Humi.	:24.2/60
Test Mode	:Tx	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Howard Huang

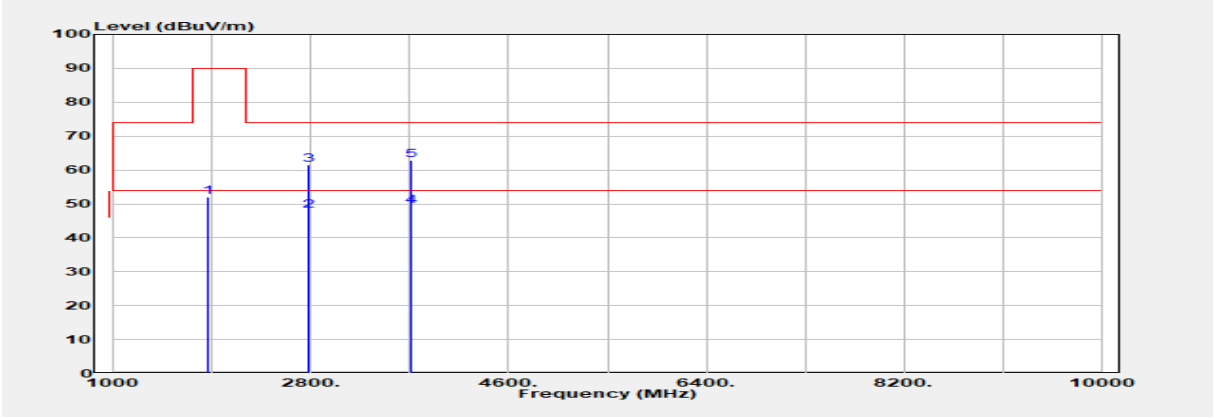

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
1853.000	Peak	61.55	-9.43	52.12	87.25	-35.13
2779.500	Average	54.27	-6.33	47.94	54.00	-6.06
2779.500	Peak	67.97	-6.33	61.63	74.00	-12.37
3706.000	Average	53.86	-4.41	49.45	54.00	-4.55
3706.000	Peak	67.17	-4.41	62.76	74.00	-11.24

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 1M	Test Date	:2023-04-25
Test Frequency	:926.5 MHz	Temp./Humi.	:24.2/60
Test Mode	:Tx	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Howard Huang

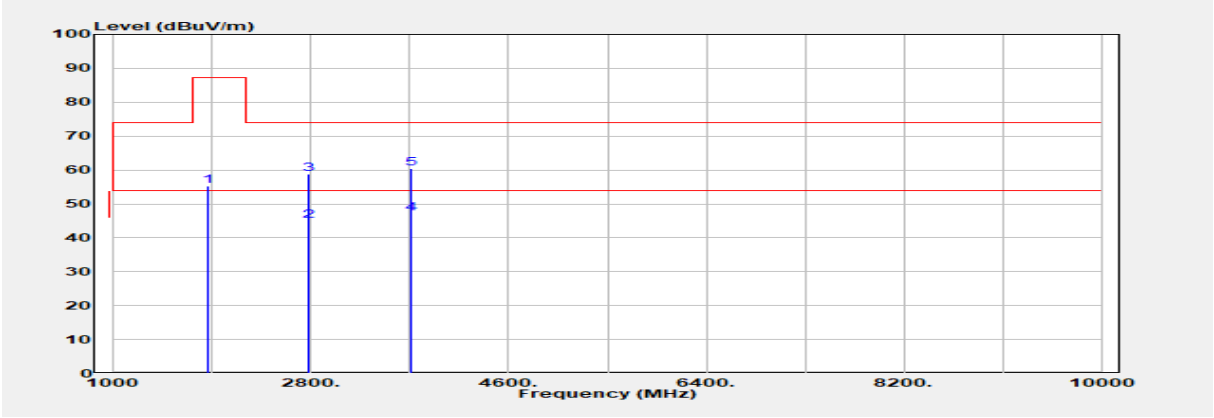

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
1853.000	Peak	64.64	-9.43	55.21	83.89	-28.68
2779.500	Average	51.20	-6.33	44.87	54.00	-9.13
2779.500	Peak	65.08	-6.33	58.75	74.00	-15.25
3706.000	Average	51.57	-4.41	47.16	54.00	-6.84
3706.000	Peak	64.84	-4.41	60.43	74.00	-13.57

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 2M	Test Date	:2023-04-27
Test Frequency	:919.0 MHz	Temp./Humi.	:23.8/59
Test Mode	:Tx	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Howard Huang

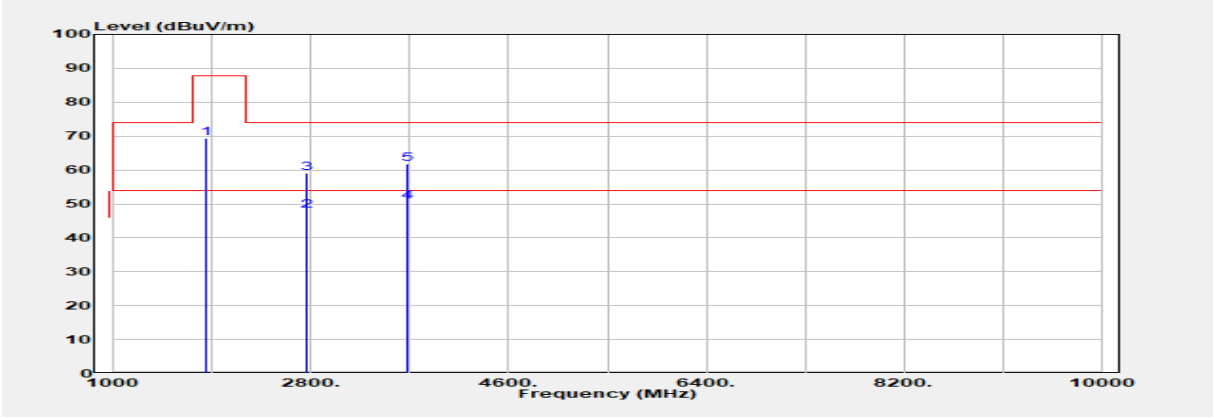

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
1838.000	Peak	78.81	-9.51	69.31	87.79	-18.48
2757.000	Average	54.27	-6.30	47.97	54.00	-6.03
2757.000	Peak	65.50	-6.30	59.20	74.00	-14.80
3676.000	Average	55.19	-4.54	50.65	54.00	-3.35
3676.000	Peak	66.29	-4.54	61.75	74.00	-12.25

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 2M	Test Date	:2023-04-27
Test Frequency	:919.0 MHz	Temp./Humi.	:23.8/59
Test Mode	:Tx	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Howard Huang

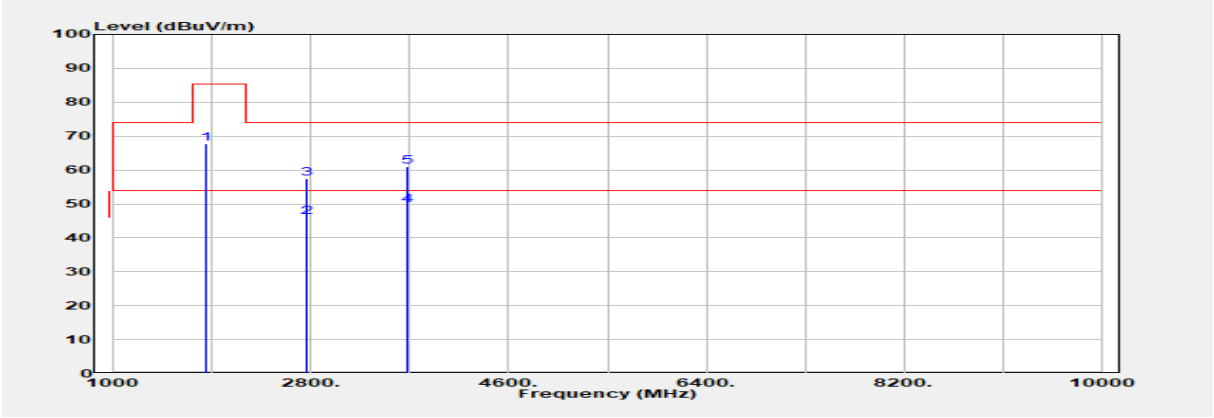

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
1838.000	Peak	77.37	-9.51	67.86	85.35	-17.49
2757.000	Average	52.35	-6.30	46.05	54.00	-7.95
2757.000	Peak	63.62	-6.30	57.32	74.00	-16.68
3676.000	Average	54.25	-4.54	49.71	54.00	-4.29
3676.000	Peak	65.41	-4.54	60.87	74.00	-13.13

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 2M	Test Date	:2023-04-27
Test Frequency	:923.0 MHz	Temp./Humi.	:23.8/59
Test Mode	:Tx	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Howard Huang

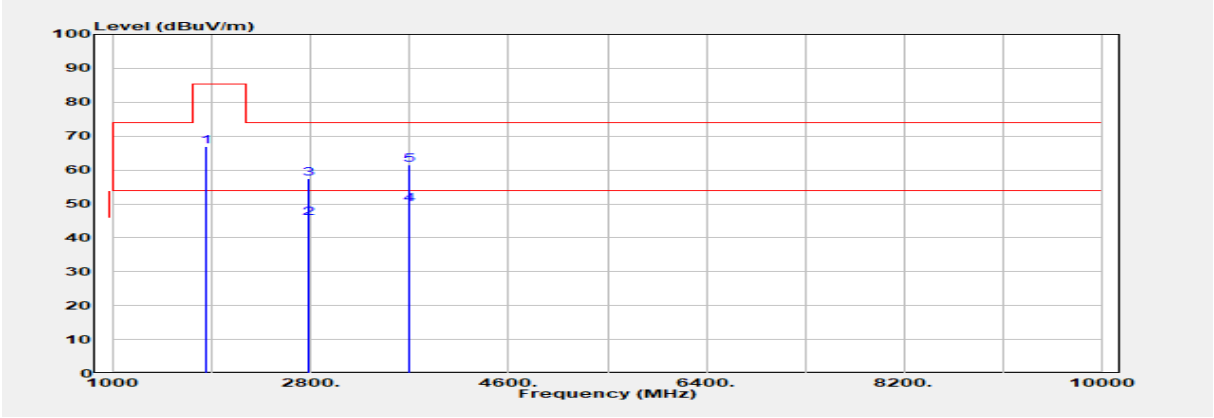

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
1846.000	Peak	76.26	-9.45	66.80	85.29	-18.49
2769.000	Average	52.13	-6.32	45.81	54.00	-8.19
2769.000	Peak	63.71	-6.32	57.39	74.00	-16.61
3692.000	Average	54.35	-4.47	49.87	54.00	-4.13
3692.000	Peak	65.93	-4.47	61.46	74.00	-12.54

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 2M	Test Date	:2023-04-27
Test Frequency	:923.0 MHz	Temp./Humi.	:23.8/59
Test Mode	:Tx	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Howard Huang

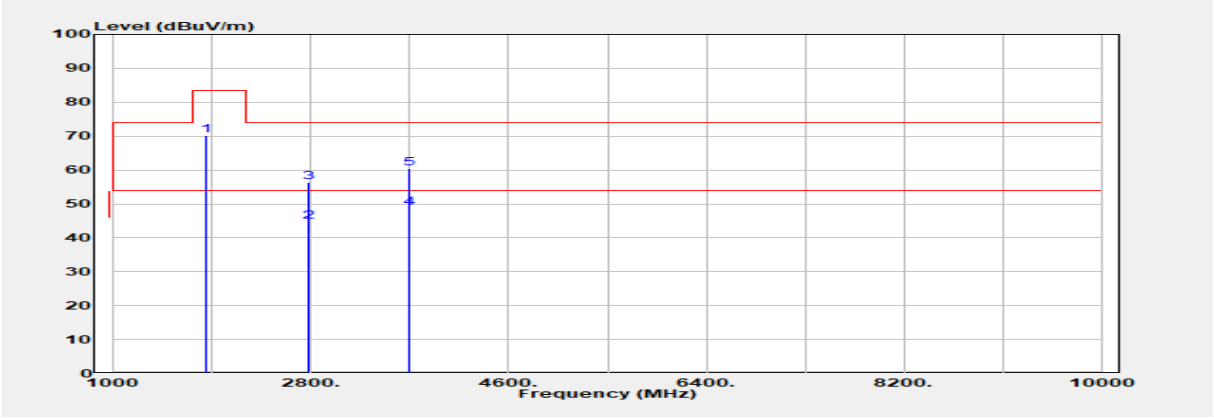

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
1846.000	Peak	79.74	-9.45	70.29	83.42	-13.13
2769.000	Average	51.08	-6.32	44.77	54.00	-9.23
2769.000	Peak	62.68	-6.32	56.37	74.00	-17.63
3692.000	Average	53.35	-4.47	48.87	54.00	-5.13
3692.000	Peak	65.01	-4.47	60.53	74.00	-13.47

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 2M	Test Date	:2023-04-27
Test Frequency	:925.0 MHz	Temp./Humi.	:23.8/59
Test Mode	:Tx	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Howard Huang

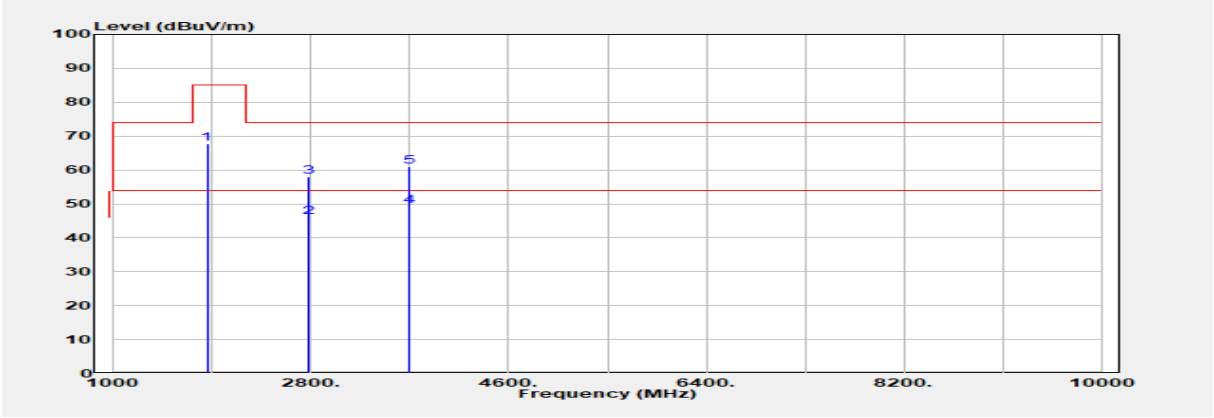

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
1850.000	Peak	77.05	-9.43	67.62	85.18	-17.56
2775.000	Average	52.52	-6.32	46.19	54.00	-7.81
2775.000	Peak	64.44	-6.32	58.11	74.00	-15.89
3700.000	Average	53.74	-4.44	49.30	54.00	-4.70
3700.000	Peak	65.53	-4.44	61.09	74.00	-12.91

Report Number	:TERF2303000737E2	Test Site	:SAC D
Operation Mode	:OFDM 2M	Test Date	:2023-04-27
Test Frequency	:925.0 MHz	Temp./Humi.	:23.8/59
Test Mode	:Tx	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Howard Huang

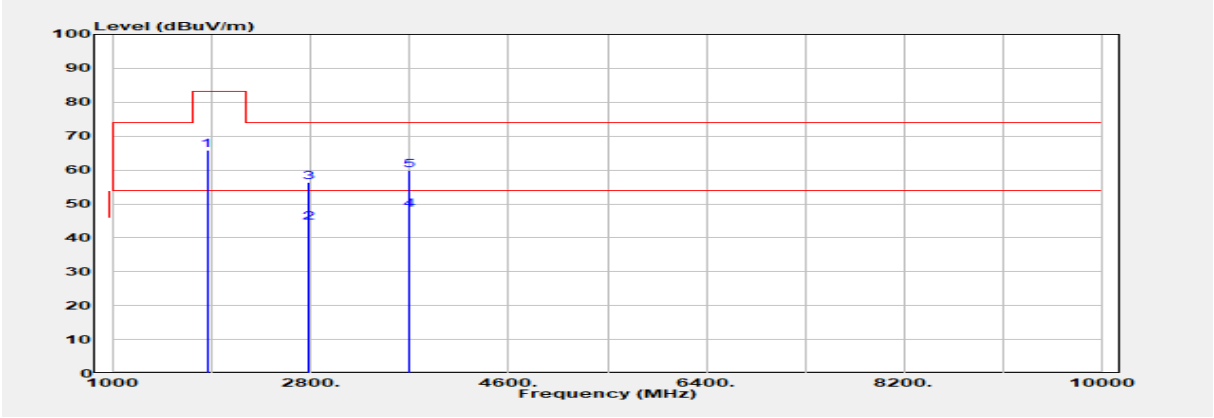

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
1850.000	Peak	75.35	-9.43	65.92	83.12	-17.20
2775.000	Average	50.80	-6.32	44.48	54.00	-9.52
2775.000	Peak	62.64	-6.32	56.32	74.00	-17.68
3700.000	Average	52.71	-4.44	48.27	54.00	-5.73
3700.000	Peak	64.43	-4.44	59.99	74.00	-14.01

12 POWER SPECTRAL DENSITY

12.1 Standard Applicable:

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

12.2 Test Setup

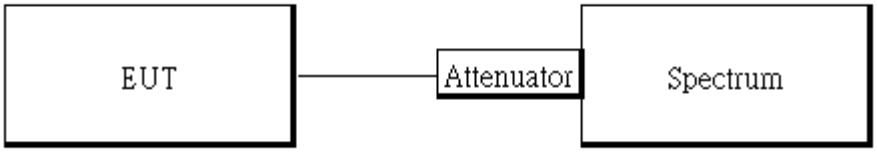

12.3 Measurement Procedure:

1. Set analyzer center frequency to DTS channel center frequency.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
3. Set the span to 1.5 times the DTS channel bandwidth.
4. Set the RBW = 3 kHz. & the VBW = 10 kHz
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.

12.4 Measurement Result:

OFDM 1M_Reference Level of Limit

Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
919.5	12.64	-7.36
923.5	12.52	-7.48
926.5	13.67	-6.33

NOTE: cable loss as 10.8dB that offsets in the spectrum

OFDM 2M_Reference Level of Limit

Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
919	11.18	-8.82
923	11.09	-8.91
925	10.97	-9.03

NOTE: cable loss as 10.8dB that offsets in the spectrum

PSD_OFDM 1M_LowCH-919.5MHz

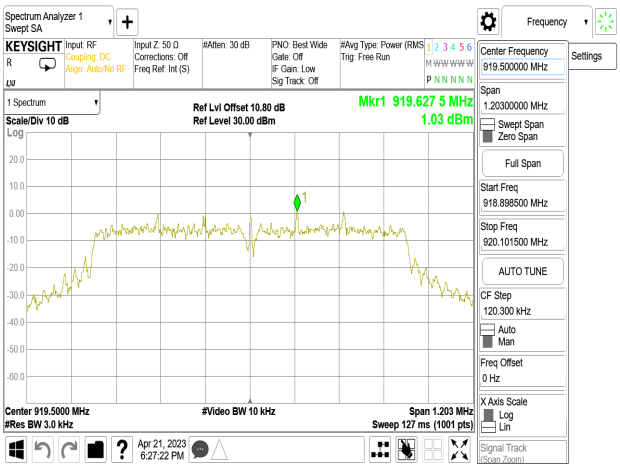

PSD_OFDM 2M_LowCH-919MHz

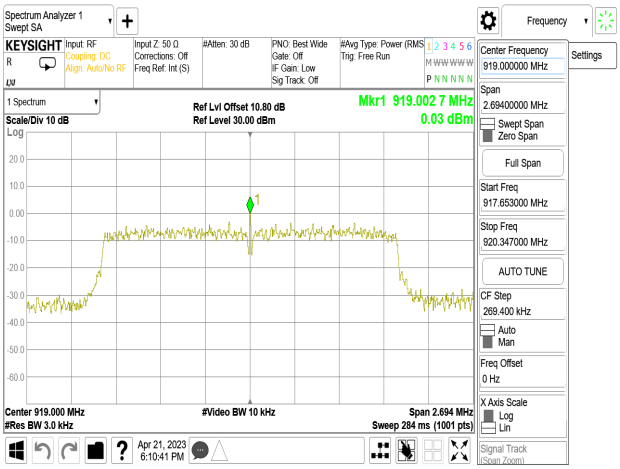

PSD_OFDM 1M_MidCH-923.5MHz

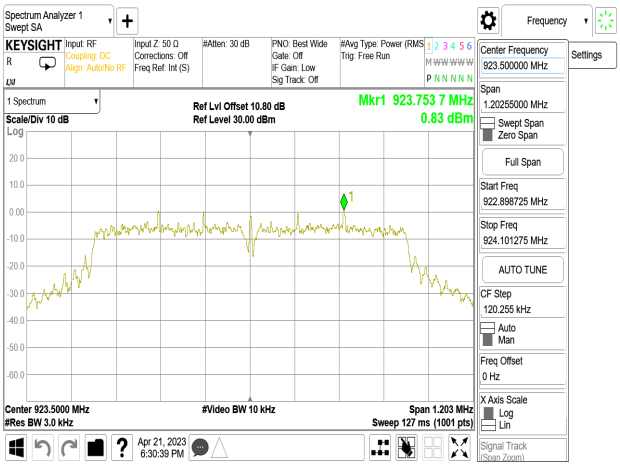

PSD_OFDM 2M_MidCH-923MHz

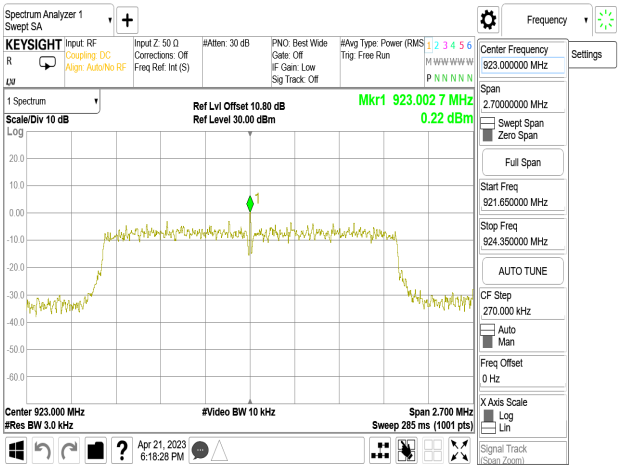

PSD_OFDM 1M_HighCH-926.5MHz

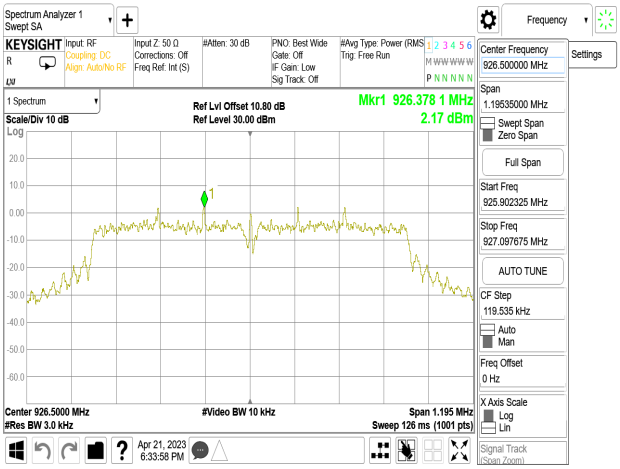

PSD_OFDM 2M_HighCH-925MHz

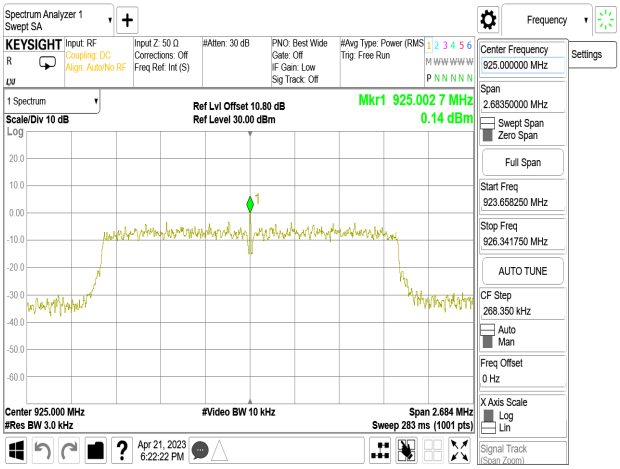

13 ANTENNA REQUIREMENT

13.1 Standard Applicable:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

13.2 Antenna Connected Construction:

The antenna complies with this requirement and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~