



# FCC TEST REPORT

**Test report  
On Behalf of  
Shenzhen Nayin Technology Co., Ltd.  
For  
Bluetooth Headset  
Model No.: P08**

**FCC ID: 2AF8QP08**

**Prepared for :** Shenzhen Nayin Technology Co., Ltd.  
6F, Building A, De Bao Li Industrial park, Ji Hua Road No.312, Bantian,  
Longguang District, Shenzhen City, China

**Prepared By :** Shenzhen HUAKE Testing Technology Co., Ltd.  
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,  
Bao'an District, Shenzhen City, China

**Date of Test:** Sep. 30, 2018 ~ Oct. 29, 2018

**Date of Report:** Oct. 29, 2018

**Report Number:** HK1810101231E



### TEST RESULT CERTIFICATION

**Applicant's name** ..... : Shenzhen Nayin Technology Co., Ltd.  
Address ..... : 6F, Building A, De Bao Li Industrial park, Ji Hua Road No.312,  
Bantian, Longguang District, Shenzhen City, China

**Manufacture's Name** ..... : Shenzhen Nayin Technology Co., Ltd.  
Address ..... : 6F, Building A, De Bao Li Industrial park, Ji Hua Road No.312,  
Bantian, Longguang District, Shenzhen City, China

**Product description**

Trade Mark: N/A  
Product Name ..... : Bluetooth Headset  
Model and/or type reference : P08  
Series Model ..... : P09, P10, P11, P12, P13, P14, P15, P16, P17, P18, P19, P20  
Difference Description ..... : All the same except for the appearance color  
**Standards** ..... : FCC Rules and Regulations Part 15 Subpart C Section 15.249  
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** ..... :  
Date (s) of performance of tests ..... : Sep. 30, 2018 ~ Oct. 29, 2018  
Date of Issue ..... : Oct. 29, 2018  
Test Result ..... : **Pass**

Testing Engineer : Gary Qian  
(Gary Qian)

Technical Manager : Eden Hu  
(Eden Hu)

Authorized Signatory : Jason Zhou  
(Jason Zhou)



<b>TABLE OF CONTENTS</b>	<b>PAGE</b>
1 . TEST SUMMARY	4
2 . GENERAL INFORMATION	5
2.1 . GENERAL DESCRIPTION OF EUT	5
2.2 . CARRIER FREQUENCY OF CHANNELS	6
2.3 . OPERATION OF EUT DURING TESTING	6
2.4 . DESCRIPTION OF TEST SETUP	7
2.5. EQUIPMENT USED IN EUT SYSTEM	7
2.6. MEASUREMENT INSTRUMENTS LIST	8
3 . CONDUCTED EMISSIONS TEST	9
3.1. LIMITS OF LINE CONDUCTED EMISSION TEST	9
3.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	9
3.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	10
3.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	10
3.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	10
4. RADIATED EMISSION TEST	11
4.1TEST LIMIT	11
4.2. MEASUREMENT PROCEDURE	12
4.3. TEST SETUP	14
4.4. TEST RESULT	16
5. BAND EDGE	58
5.1. MEASUREMENT PROCEDURE	58
5.2 TEST SETUP	58
5.3 RADIATED TEST RESULT	59
6. OCCUPIED BANDWIDTH MEASUREMENT	67
6.1. MEASUREMENT PROCEDURE	67
6.2. TEST SET-UP	67
6.3. LIMITS AND MEASUREMENT RESULTS	67
7. ANTENNA REQUIREMENT	80
8. PHOTOGRAPH OF TEST	81
9. PHOTOGRAPHS OF EUT	85



## 1. TEST SUMMARY

### 1.1. TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	RESULT
CONDUCTED EMISSIONS TEST	N/A
RADIATED EMISSION TEST	COMPLIANT
BAND EDGE	COMPLIANT
OCCUPIED BANDWIDTH MEASUREMENT	COMPLIANT
ANTENNA REQUIREMENT	COMPLIANT

Note: N/A means it's not applicable to this item.

### 1.2. TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address : 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park,  
Fuhai Street, Bao'an District, Shenzhen City, China

Designation Number: : CN1229

Test Firm Registration Number : 616276

### 1.3. MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2



## 2. GENERAL INFORMATION

### 2.1. GENERAL DESCRIPTION OF EUT

<b>Operation Frequency</b>	2.402 GHz to 2.480GHz
<b>Bluetooth Version</b>	V5.0
<b>Modulation</b>	BR <input checked="" type="checkbox"/> GFSK, EDR <input checked="" type="checkbox"/> π /4-DQPSK, <input checked="" type="checkbox"/> 8DPSK BLE <input type="checkbox"/> GFSK
<b>Number of channels</b>	79 for BR/EDR
<b>Hardware Version</b>	V1
<b>Software Version</b>	V1
<b>Antenna Designation</b>	Ceramic Antenna
<b>Antenna Gain</b>	3.4dBi
<b>Power Supply</b>	DC 3.7V by battery
Note:1.The USB port only used for charging and can't be used to transfer data with PC. 2. The EUT doesn't support BLE. 3.The EUT comprises left and right channel earphone,both have been tested and test data of left and right earphone recorded in this report.	



## 2.2. CARRIER FREQUENCY OF CHANNELS

### BR/EDR Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402MHz
	1	2403MHz
	:	:
	38	2440 MHz
	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

## 2.3. OPERATION OF EUT DURING TESTING

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link(Hopping mode)

Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.




## 2.4. DESCRIPTION OF TEST SETUP

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)

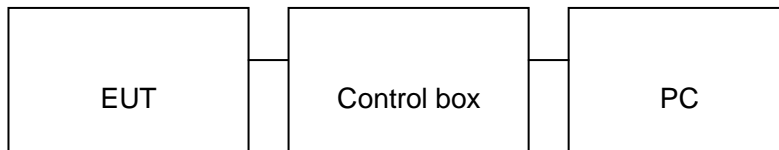

## 2.5. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Bluetooth Headset	Nayin	P08	EUT
2	Battery	HHX	501023	Accessory
3	PC	APPLE	A1465	A.E
4	Control box	AIROHA	N/A	A.E
5	USB Cable	N/A	0.5m unshielded	A.E
7	IPOD	APPLE	A1367	A.E

**2.6. MEASUREMENT INSTRUMENTS LIST****TEST EQUIPMENT OF RADIATED EMISSION TEST**

Item	Equipment	Manufacturer	Model No.	Lab Equipment No.	Last Cal.	Cal. Interval
1.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
2.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2017	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
4.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2017	1 Year
5.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2017	1 Year
6.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Dec. 28, 2017	1 Year
7.	Broad-band Horn Antenna	A-INFOMW	LB-180400-KF	HKE-031	Dec. 28, 2017	1 Year
8.	Pre-amplifier	EMCI	EMC051845SE	HKE-015	Dec. 28, 2017	1 Year
9.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2017	1 Year
10.	Filter (2.4-2.483GHz)	Micro-tronics	087	--	N/A	N/A
11.	Radiation Cable 1	MXT	HK1	R05	N/A	N/A
12.	Radiation Cable 2	MXT	HK1	R06	N/A	N/A



### 3. CONDUCTED EMISSIONS TEST


#### 3.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

#### 3.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

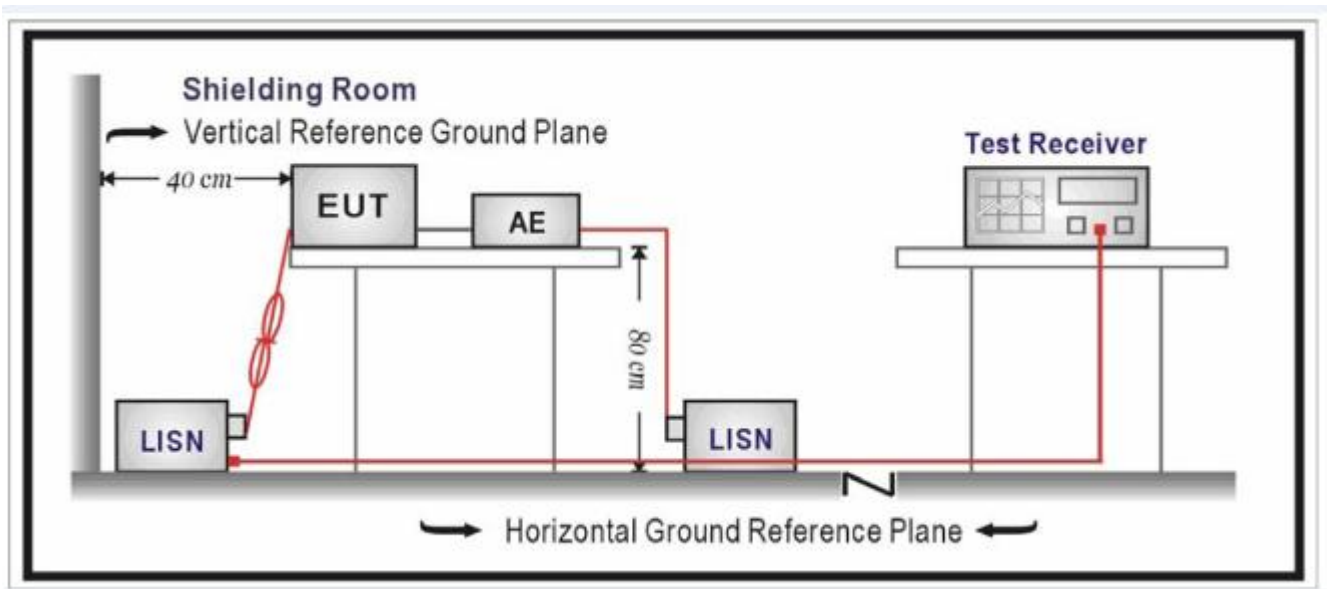



### 3.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10-2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### 3.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less  $-2\text{dB}$  to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

### 3.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

N/A

Note: The BT function of EUT doesn't work when charging.



## 4. RADIATED EMISSION TEST

### 4.1 TEST LIMIT

#### Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

#### Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		$\mu$ V/m	dB( $\mu$ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB( $\mu$ V)/m (Peak) 54.0 dB( $\mu$ V)/m (Average)	

Remark: (1) Emission level  $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$ .  
(2) The smaller limit shall apply at the cross point between two frequency bands.  
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



## 4.2. MEASUREMENT PROCEDURE

1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)




The following table is the setting of spectrum analyzer and receiver.


<b>Spectrum Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	Fundamental: 2.4~2.483GHz RBW 1.5MHz/ VBW 5MHz for Peak, RBW 1.5MHz/ VBW 10Hz for Average Harmonics: 1GHz~25GHz RBW 1MHz/ VBW 3MHz for Peak, RBW 1MHz/ VBW 10Hz for Average
<b>Receiver Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

### 4.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

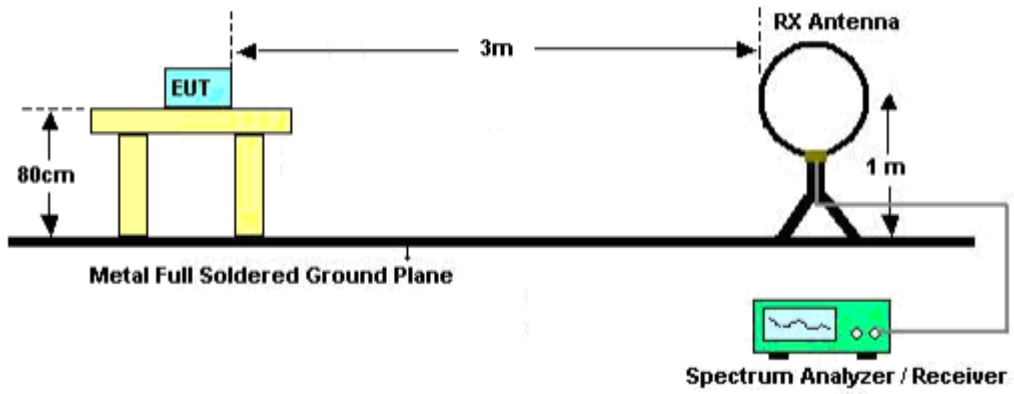


RADIATED EMISSION TEST SETUP 30MHz-1000MHz

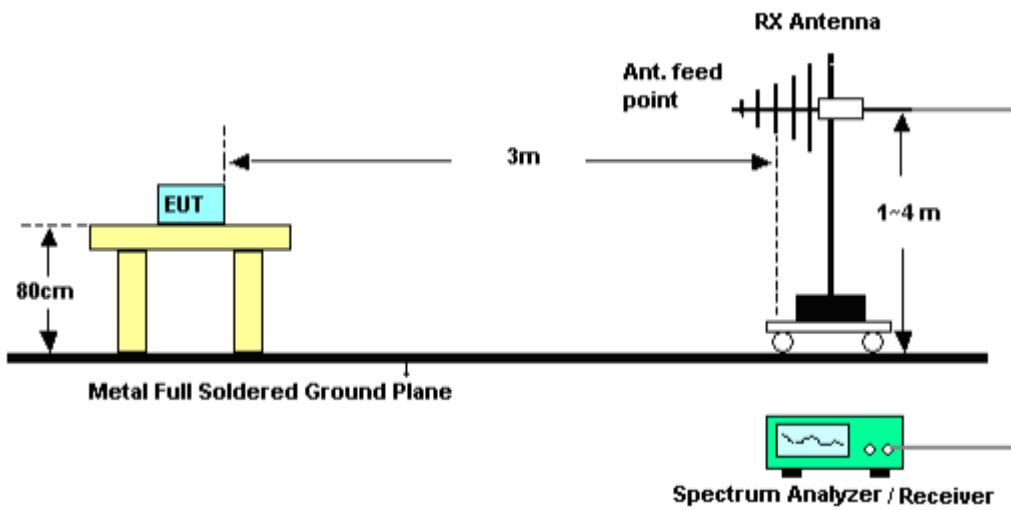



### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

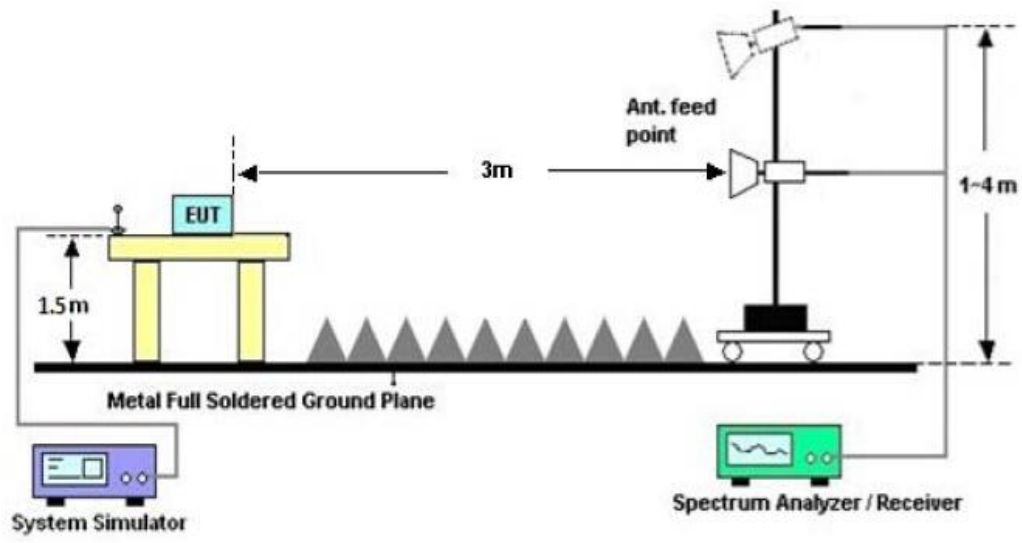



**4.4. TEST RESULT**

**FOR BR/EDR**

Right


(Worst modulation: GFSK)

**RADIATED EMISSION BELOW 30MHz**

No emission found between lowest internal used/generated frequencies to 30MHz.

**RADIATED EMISSION BELOW 1GHz**

**RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL**

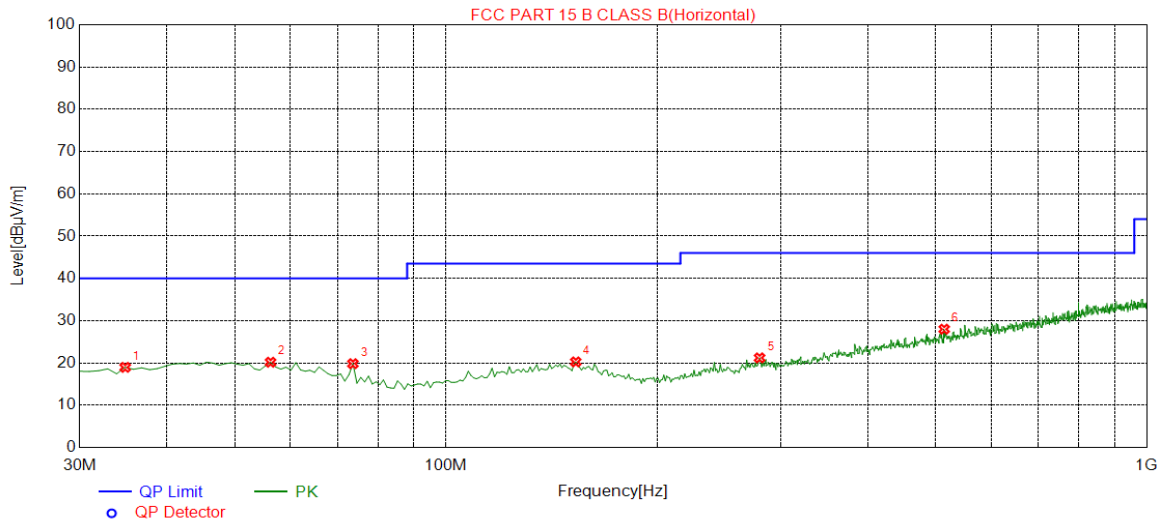


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.8500	18.96	13.44	40.00	21.04	200	210	Horizontal
2	56.1900	20.17	13.84	40.00	19.83	200	120	Horizontal
3	73.6500	19.83	11.07	40.00	20.17	100	130	Horizontal
4	153.190	20.25	14.25	43.50	23.25	100	150	Horizontal
5	280.260	21.20	15.35	46.00	24.80	200	260	Horizontal
6	514.030	27.99	21.18	46.00	18.01	100	110	Horizontal

**RESULT: PASS**





RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

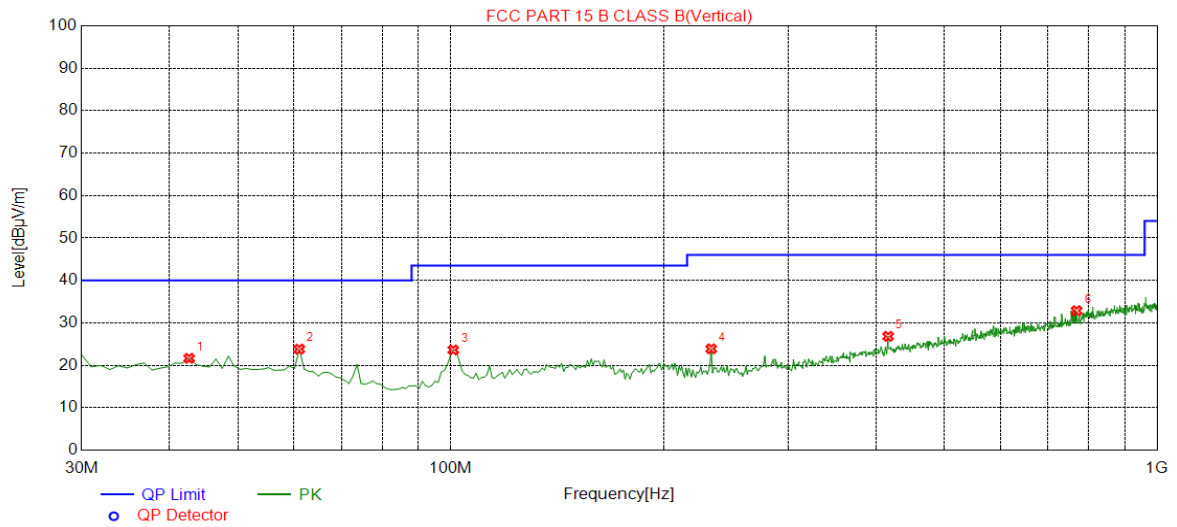

Suspected Data List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	42.6100	21.65	14.56	40.00	18.35	100	260	Vertical
2	61.0400	23.82	13.36	40.00	16.18	100	10	Vertical
3	100.810	23.62	10.94	43.50	19.88	150	70	Vertical
4	233.700	23.88	13.53	46.00	22.12	200	60	Vertical
5	416.060	26.82	19.03	46.00	19.18	200	250	Vertical
6	769.140	32.87	26.06	46.00	13.13	200	350	Vertical


**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

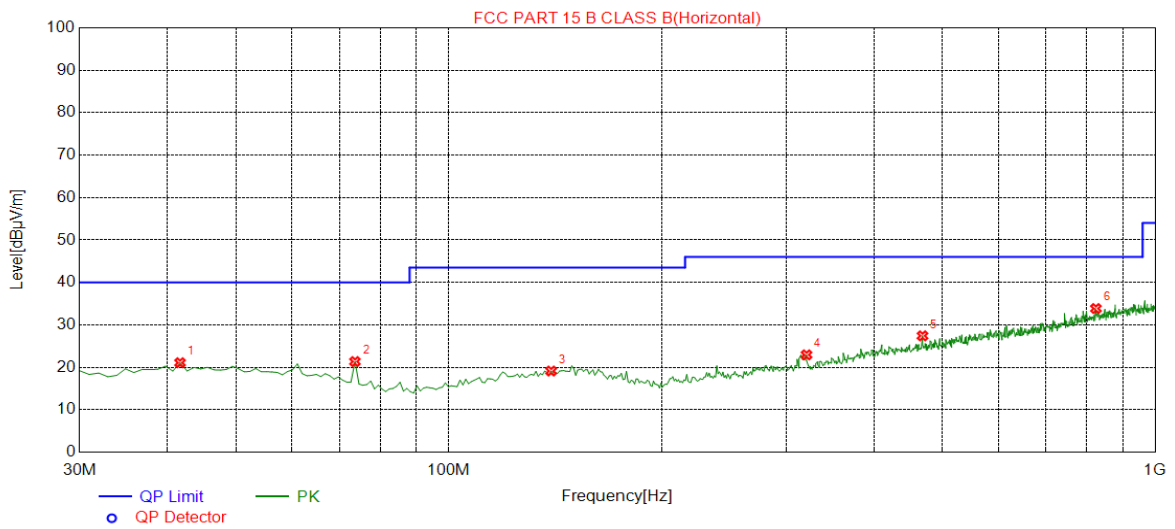


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	41.6400	21.08	14.59	40.00	18.92	100	110	Horizontal
2	73.6500	21.35	11.07	40.00	18.65	100	240	Horizontal
3	139.610	19.12	14.21	43.50	24.38	100	330	Horizontal
4	321.000	22.94	15.72	46.00	23.06	100	120	Horizontal
5	468.440	27.42	20.20	46.00	18.58	100	50	Horizontal
6	824.430	33.85	27.16	46.00	12.15	100	20	Horizontal

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

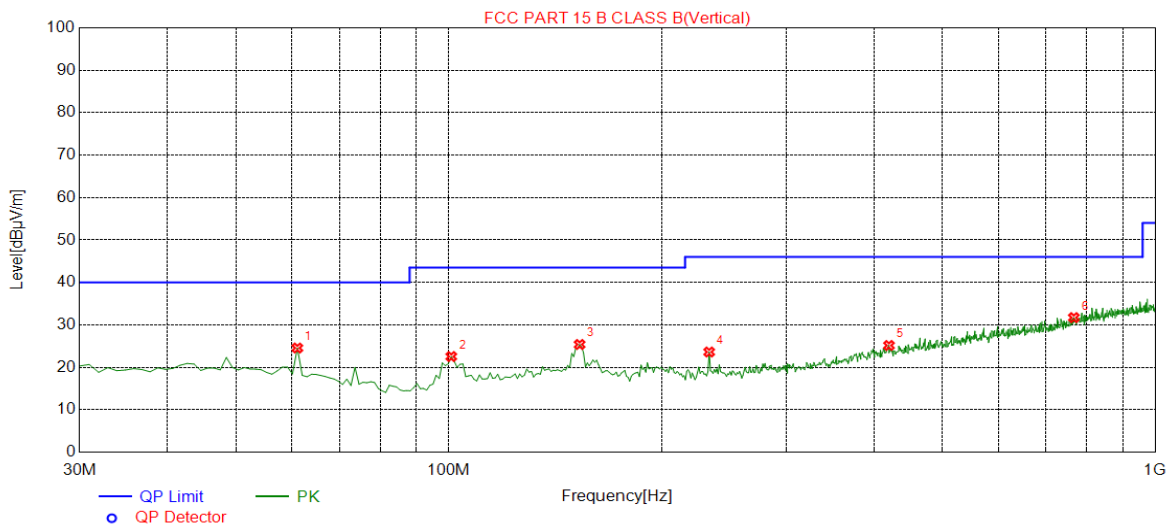

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	61.0400	24.55	13.36	40.00	15.45	150	320	Vertical
2	100.810	22.54	10.94	43.50	20.96	200	70	Vertical
3	153.190	25.38	14.25	43.50	18.12	200	200	Vertical
4	233.700	23.61	13.53	46.00	22.39	200	190	Vertical
5	419.940	25.15	19.12	46.00	20.85	150	120	Vertical
6	767.200	31.71	26.01	46.00	14.29	150	280	Vertical


**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.



### RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

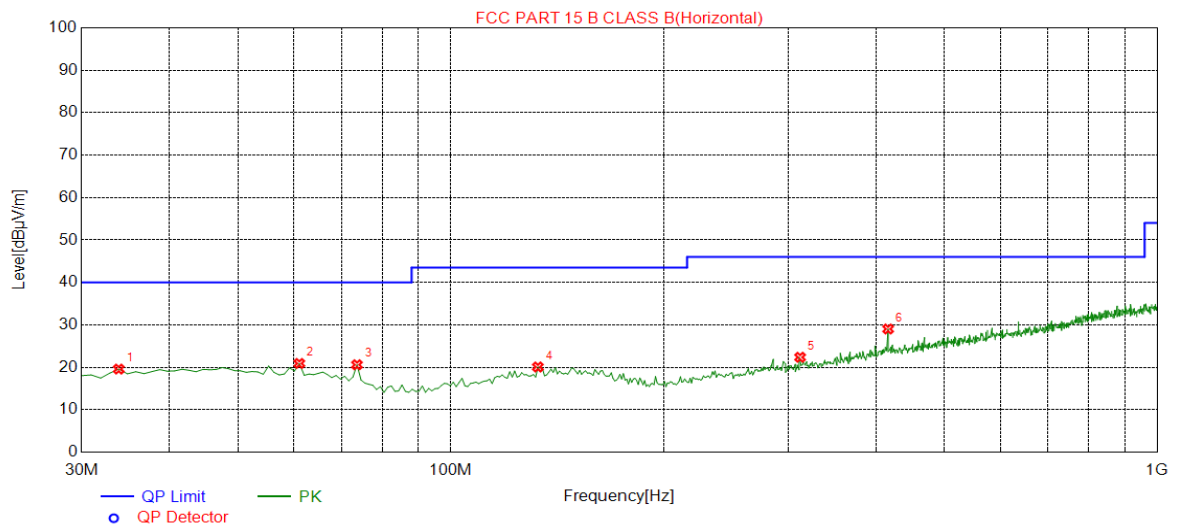


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.8800	19.58	13.27	40.00	20.42	100	110	Horizontal
2	61.0400	20.91	13.36	40.00	19.09	100	340	Horizontal
3	73.6500	20.60	11.07	40.00	19.40	150	310	Horizontal
4	132.820	20.08	13.76	43.50	23.42	100	30	Horizontal
5	312.270	22.37	15.40	46.00	23.63	200	10	Horizontal
6	416.060	29.03	19.03	46.00	16.97	150	140	Horizontal

**RESULT: PASS**



RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

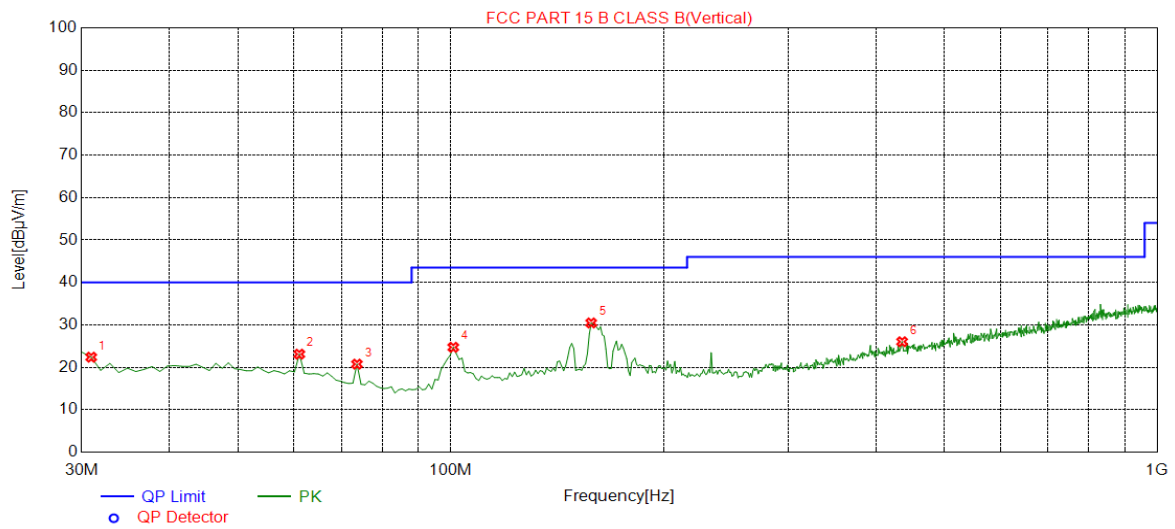

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30.9700	22.39	12.76	40.00	17.61	100	10	Vertical
2	61.0400	23.10	13.36	40.00	16.90	150	80	Vertical
3	73.6500	20.75	11.07	40.00	19.25	150	20	Vertical
4	100.810	24.72	10.94	43.50	18.78	100	10	Vertical
5	158.040	30.45	14.26	43.50	13.05	100	30	Vertical
6	435.460	26.03	19.45	46.00	19.97	150	50	Vertical

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



Left


(Worst modulation: GFSK)

**RADIATED EMISSION BELOW 30MHz**

No emission found between lowest internal used/generated frequencies to 30MHz.

**RADIATED EMISSION BELOW 1GHz**

**RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL**

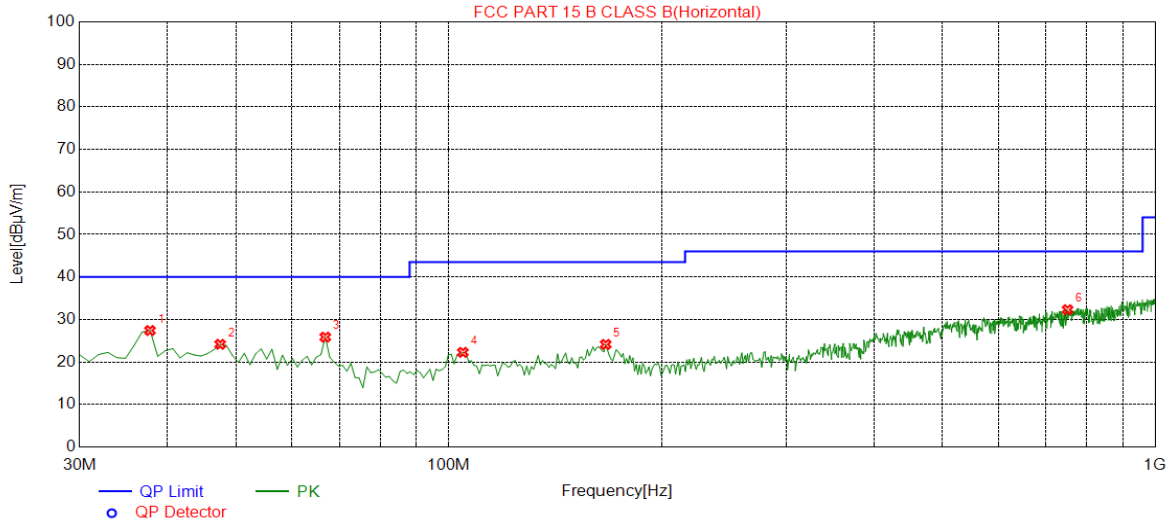


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	37.7600	27.40	14.11	40.00	12.60	200	360	Horizontal
2	47.4600	24.16	14.42	40.00	15.84	150	10	Horizontal
3	66.8600	25.85	12.37	40.00	14.15	200	140	Horizontal
4	104.690	22.27	11.34	43.50	21.23	100	10	Horizontal
5	166.770	24.14	13.59	43.50	19.36	150	350	Horizontal
6	751.680	32.30	25.64	46.00	13.70	200	280	Horizontal

**RESULT: PASS**



### RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

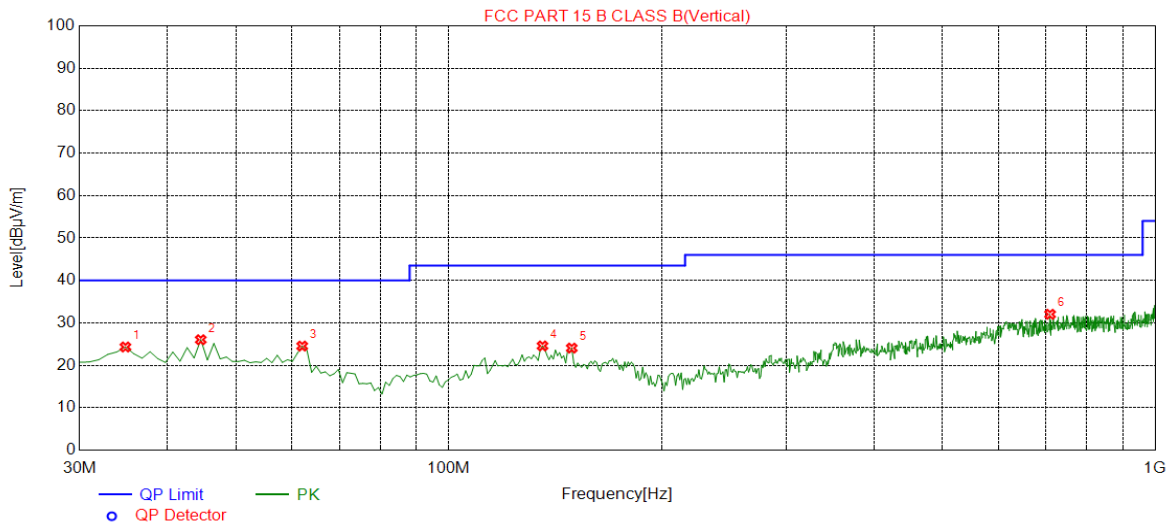

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.8500	24.32	13.44	40.00	15.68	150	220	Vertical
2	44.5500	26.03	14.50	40.00	13.97	100	330	Vertical
3	62.0100	24.53	13.20	40.00	15.47	200	200	Vertical
4	135.730	24.57	13.95	43.50	18.93	100	10	Vertical
5	149.310	24.06	14.25	43.50	19.44	150	0	Vertical
6	709.970	32.03	24.67	46.00	13.97	150	280	Vertical


### RESULT: PASS

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

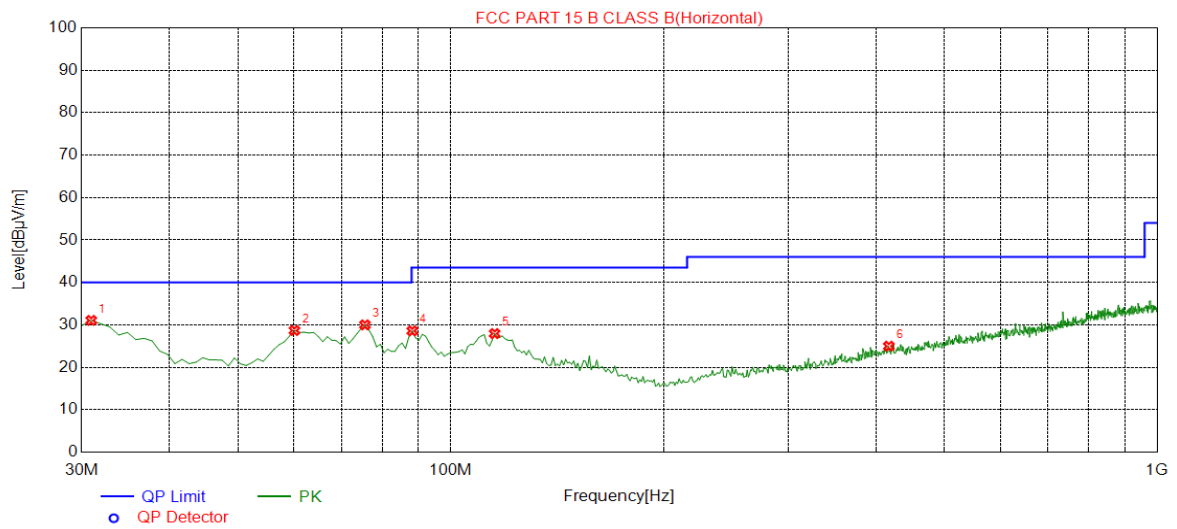


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30.9700	31.06	12.76	40.00	8.94	150	350	Horizontal
2	60.0700	28.67	13.53	40.00	11.33	150	20	Horizontal
3	75.5900	30.00	10.65	40.00	10.00	150	30	Horizontal
4	88.2000	28.59	9.77	43.50	14.91	200	240	Horizontal
5	115.360	27.95	12.43	43.50	15.55	200	90	Horizontal
6	417.030	24.98	19.05	46.00	21.02	200	70	Horizontal

RESULT: PASS





RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

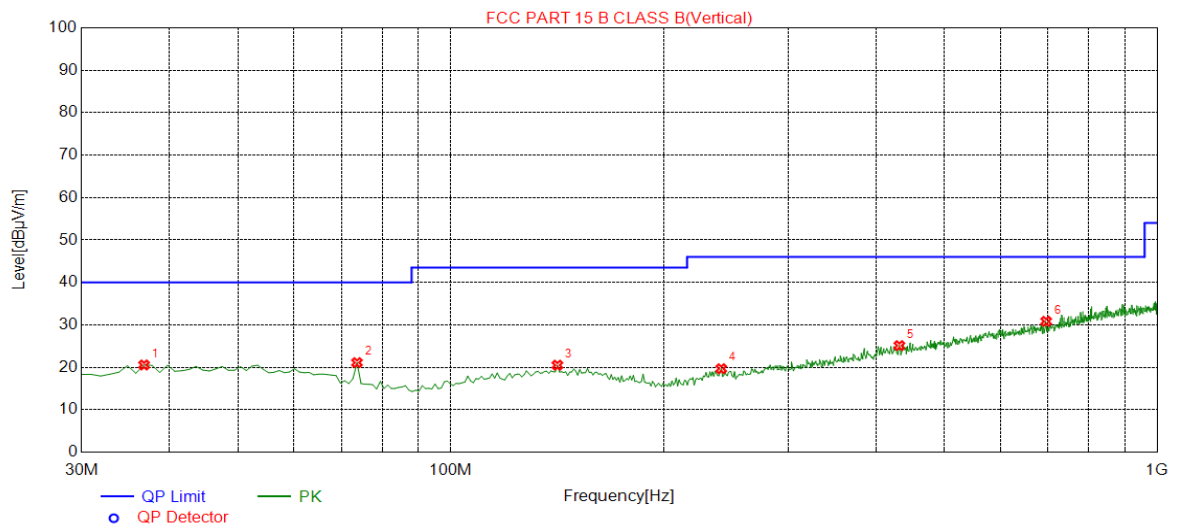

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	36.7900	20.55	13.89	40.00	19.45	200	130	Vertical
2	73.6500	21.11	11.07	40.00	18.89	150	180	Vertical
3	141.550	20.50	14.24	43.50	23.00	200	350	Vertical
4	241.460	19.67	13.99	46.00	26.33	150	50	Vertical
5	431.580	25.11	19.37	46.00	20.89	200	330	Vertical
6	696.390	30.84	24.37	46.00	15.16	100	340	Vertical


**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

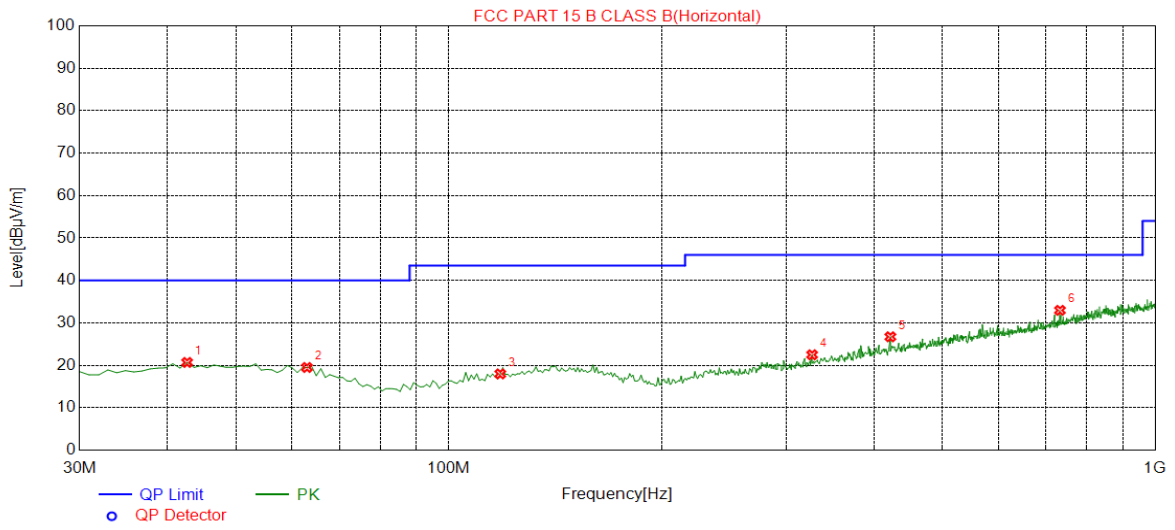


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	42.6100	20.68	14.56	40.00	19.32	200	10	Horizontal
2	62.9800	19.49	13.03	40.00	20.51	200	180	Horizontal
3	118.270	17.98	12.72	43.50	25.52	200	290	Horizontal
4	326.820	22.48	15.94	46.00	23.52	100	80	Horizontal
5	421.880	26.72	19.16	46.00	19.28	150	350	Horizontal
6	733.250	32.95	25.22	46.00	13.05	200	360	Horizontal

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

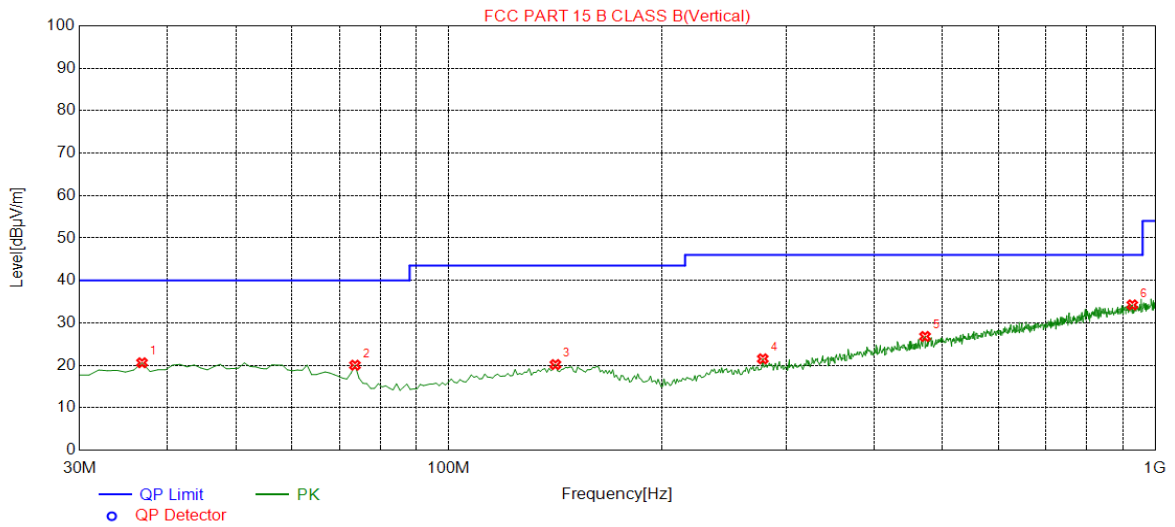

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	36.7900	20.60	13.89	40.00	19.40	100	60	Vertical
2	73.6500	20.03	11.07	40.00	19.97	100	10	Vertical
3	141.550	20.18	14.24	43.50	23.32	200	310	Vertical
4	278.320	21.53	15.22	46.00	24.47	150	140	Vertical
5	472.320	26.80	20.29	46.00	19.20	200	260	Vertical
6	928.220	34.24	28.50	46.00	11.76	150	250	Vertical

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.



**RADIATED EMISSION ABOVE 1GHz**


**FOR BR/EDR**

**Right**

**(Worst modulation: GFSK)**

**For Fundamental**

**RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL**

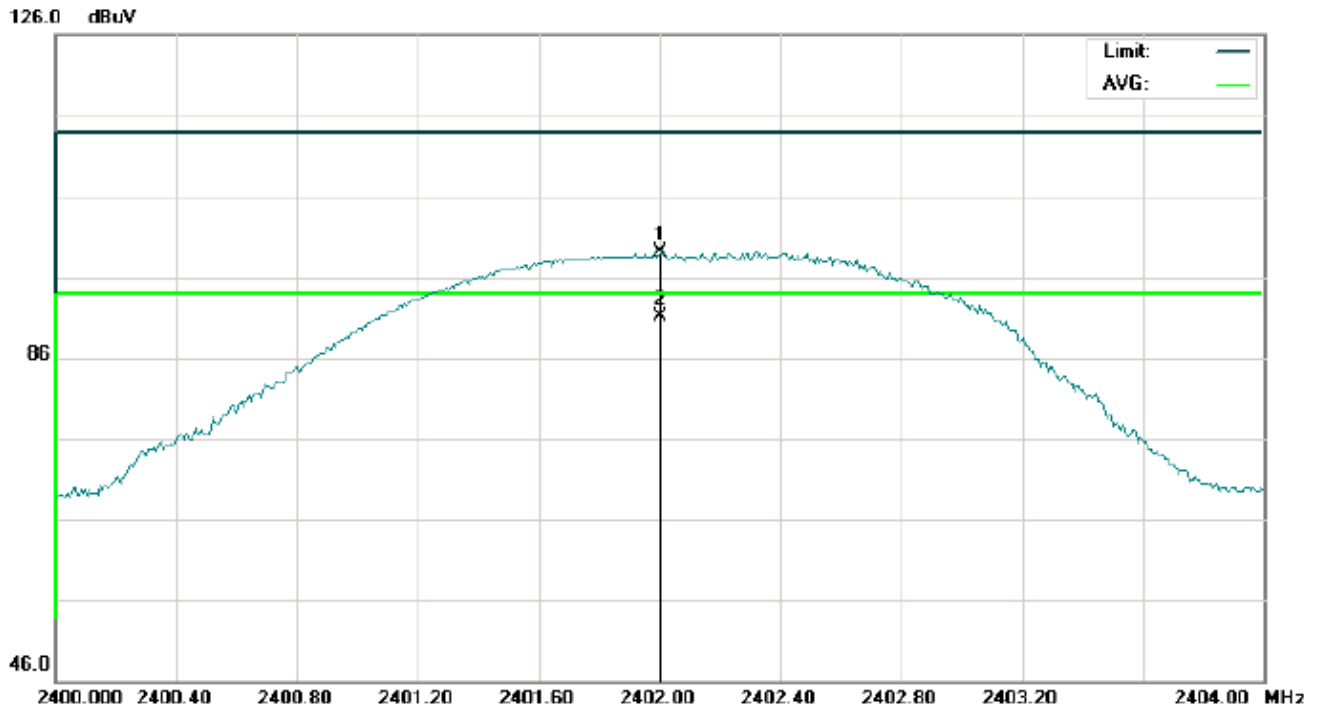


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		cm	degree	
1		2402.000	85.61	13.46	99.07	114.00	-14.93	peak			
2	*	2402.000	77.63	13.46	91.09	94.00	-2.91	AVG	100	145	

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

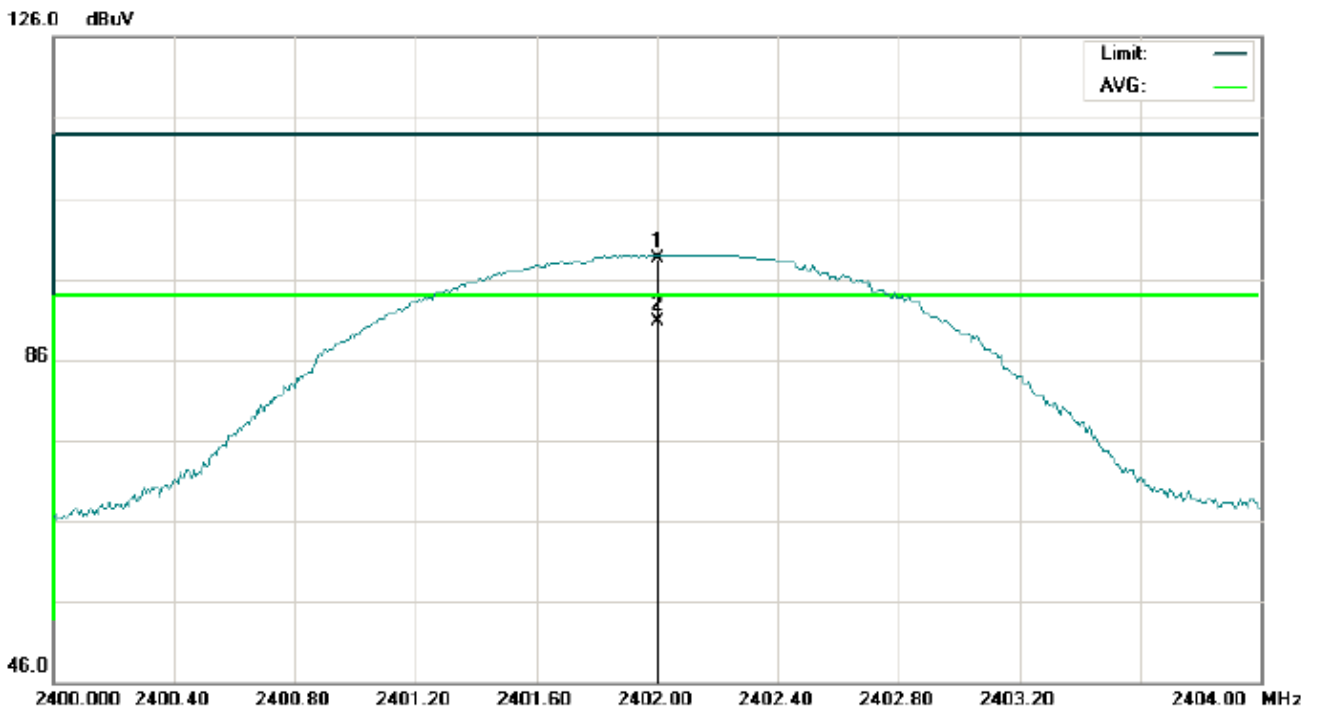


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		cm	degree	
1		2402.000	85.12	13.46	98.58	114.00	-15.42	peak			
2	*	2402.000	77.21	13.46	90.67	94.00	-3.33	AVG	100	314	

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

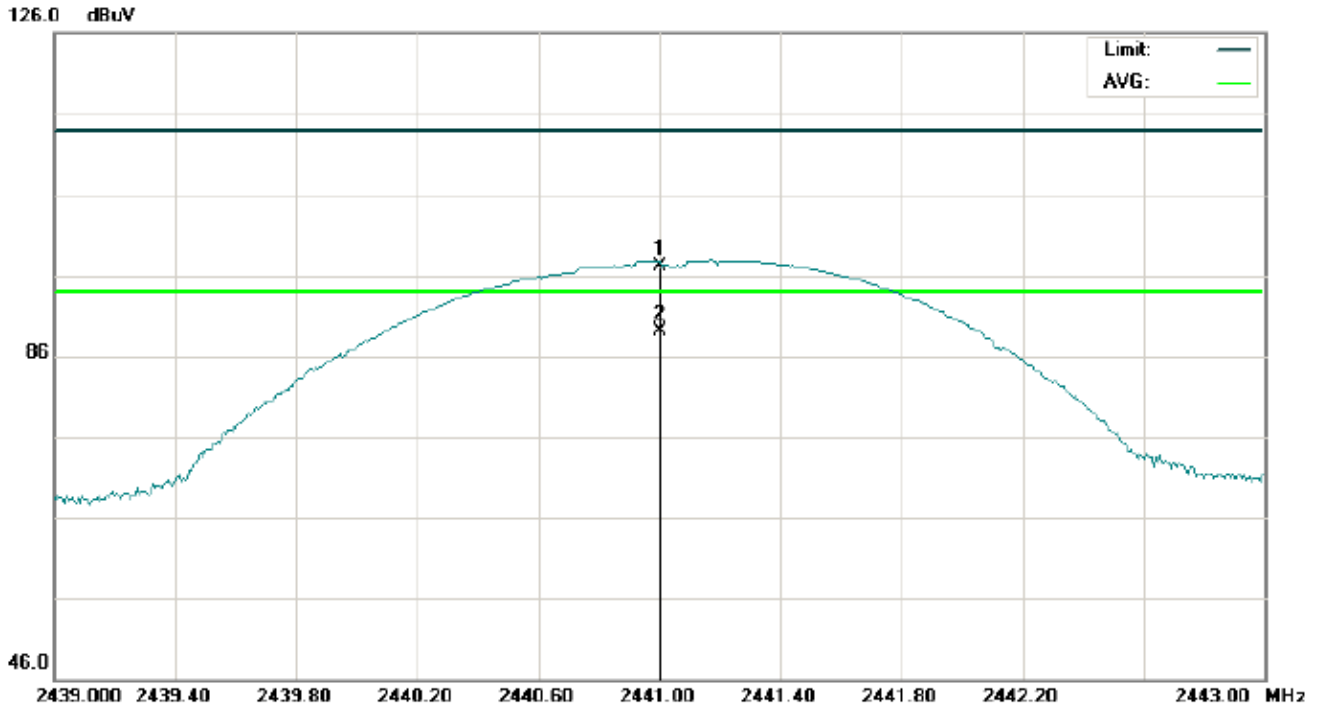


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		cm	degree	
1		2441.000	83.24	13.88	97.12	114.00	-16.88	peak			
2	*	2441.000	75.26	13.88	89.14	94.00	-4.86	AVG	100	141	

RESULT: PASS



RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

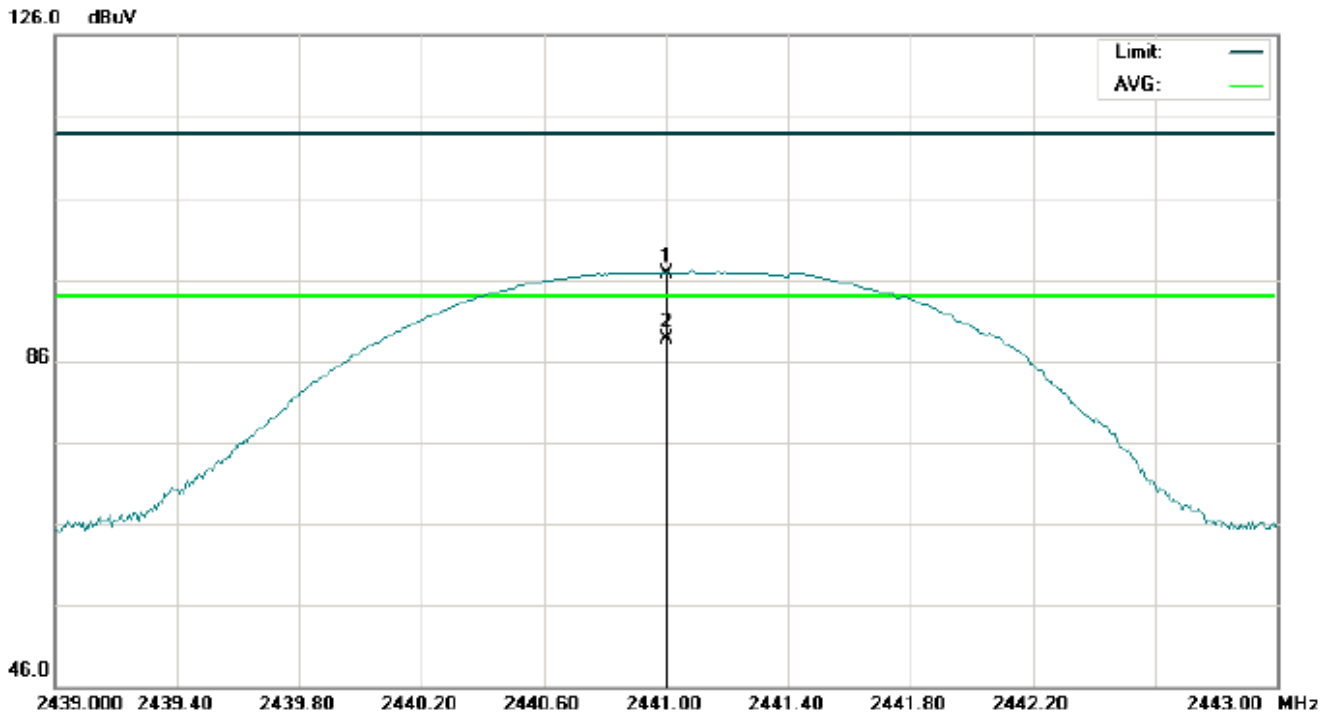


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		cm	degree	
1		2441.000	82.76	13.88	96.64	114.00	-17.36	peak			
2	*	2441.000	74.78	13.88	88.66	94.00	-5.34	AVG	100	329	

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

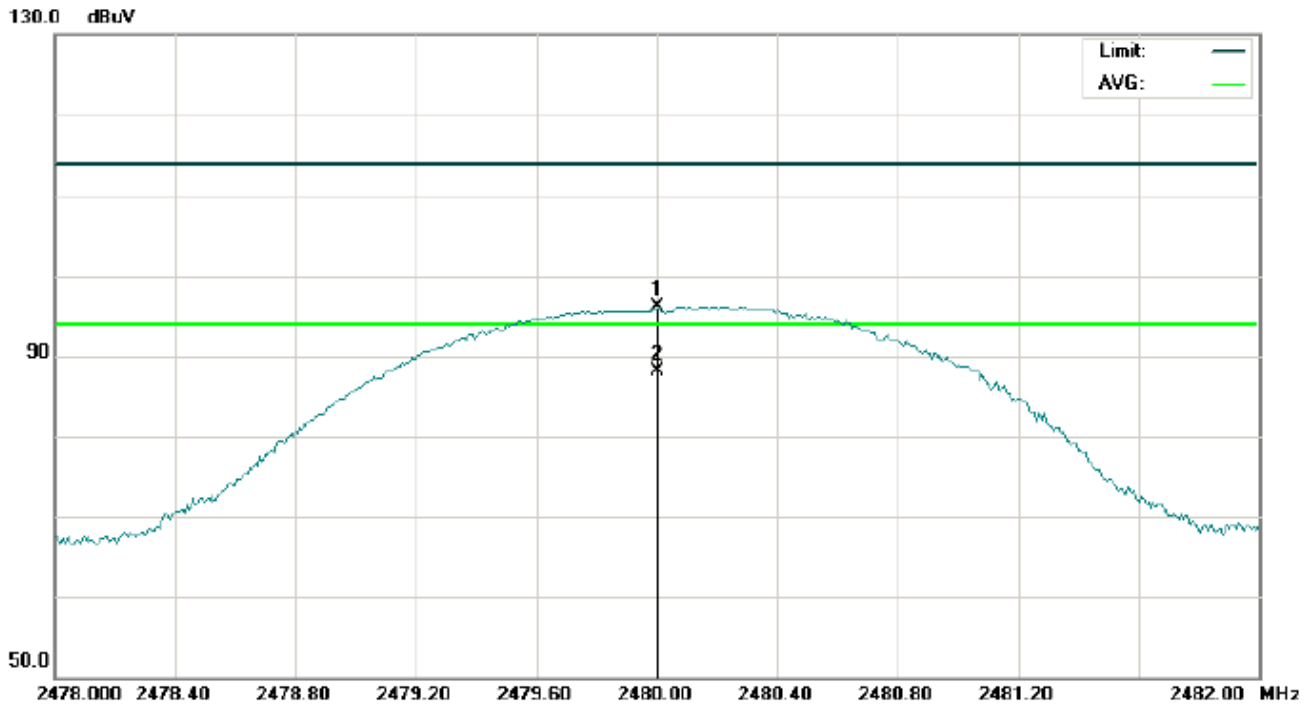


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		cm	degree	
1		2480.000	82.04	14.11	96.15	114.00	-17.85	peak			
2	*	2480.000	74.05	14.11	88.16	94.00	-5.84	AVG	100	169	

**RESULT: PASS**





RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

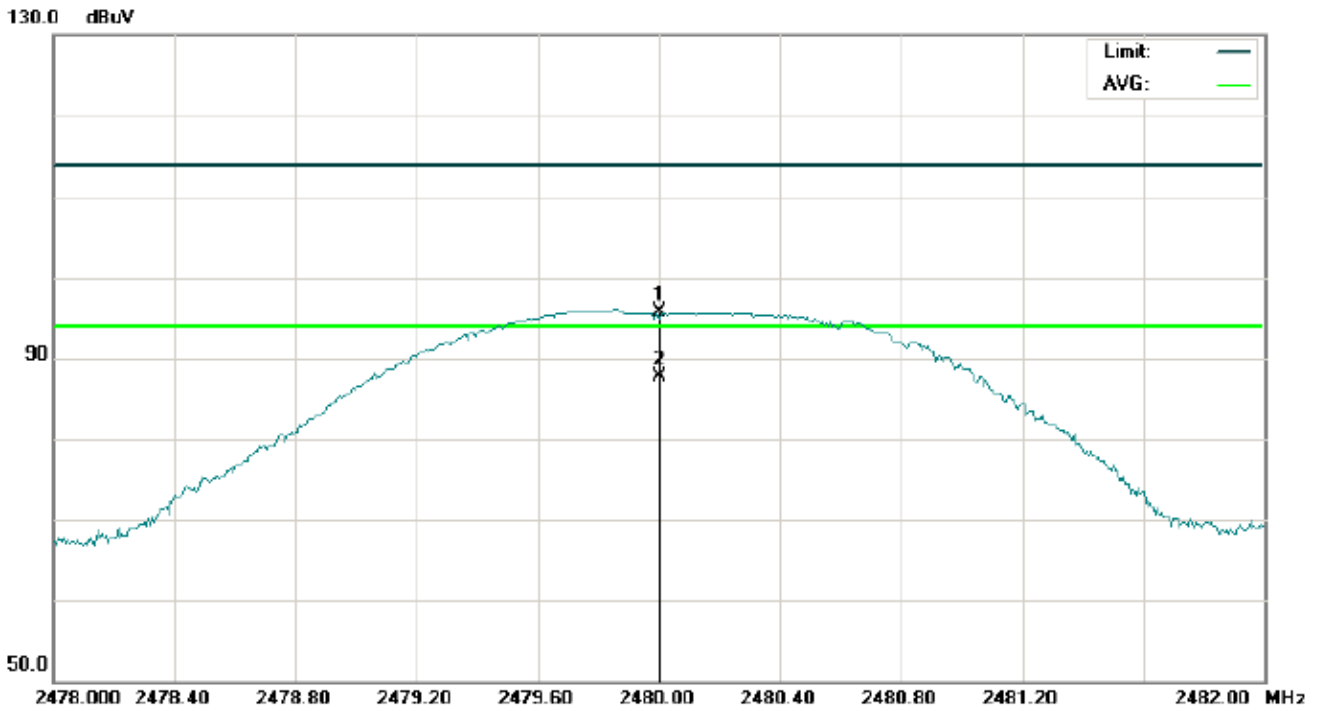

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		cm	degree	
1		2480.000	81.55	14.11	95.66	114.00	-18.34	peak			
2	*	2480.000	73.54	14.11	87.65	94.00	-6.35	AVG	100	317	

**RESULT: PASS**

**Note:** Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

**Field strength of the fundamental signal****1Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	85.61	13.46	99.07	114	-14.93	Horizontal
2402	85.12	13.46	98.58	114	-15.42	Vertical
2441	83.24	13.88	97.12	114	-16.88	Horizontal
2441	82.76	13.88	96.64	114	-17.36	Vertical
2480	82.04	14.11	96.15	114	-17.85	Horizontal
2480	81.55	14.11	95.66	114	-18.34	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	77.63	13.46	91.09	94	-2.91	Horizontal
2402	77.21	13.46	90.67	94	-3.33	Vertical
2441	75.26	13.88	89.14	94	-4.86	Horizontal
2441	74.78	13.88	88.66	94	-5.34	Vertical
2480	74.05	14.11	88.16	94	-5.84	Horizontal
2480	73.54	14.11	87.65	94	-6.35	Vertical

**2Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	85.18	13.46	98.64	114	-15.36	Horizontal
2402	84.71	13.46	98.17	114	-15.83	Vertical
2441	82.82	13.88	96.70	114	-17.30	Horizontal
2441	82.31	13.88	96.19	114	-17.81	Vertical
2480	81.55	14.11	95.66	114	-18.34	Horizontal
2480	81.13	14.11	95.24	114	-18.76	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	73.68	13.46	87.14	94	-6.86	Horizontal
2402	73.19	13.46	86.65	94	-7.35	Vertical
2441	71.78	13.88	85.66	94	-8.34	Horizontal
2441	71.41	13.88	85.29	94	-8.71	Vertical
2480	69.30	14.11	83.41	94	-10.59	Horizontal
2480	68.98	14.11	83.09	94	-10.91	Vertical

**3Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	84.74	13.46	98.20	114	-15.80	Horizontal
2402	84.22	13.46	97.68	114	-16.32	Vertical
2441	82.36	13.88	96.24	114	-17.76	Horizontal
2441	81.89	13.88	95.77	114	-18.23	Vertical
2480	81.07	14.11	95.18	114	-18.82	Horizontal
2480	80.69	14.11	94.80	114	-19.20	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	73.27	13.46	86.73	94	-7.27	Horizontal
2402	72.74	13.46	86.20	94	-7.80	Vertical
2441	71.35	13.88	85.23	94	-8.77	Horizontal
2441	70.92	13.88	84.80	94	-9.20	Vertical
2480	68.80	14.11	82.91	94	-11.09	Horizontal
2480	68.49	14.11	82.60	94	-11.40	Vertical




**Left**  
**(Worst modulation: GFSK)**

**For Fundamental**

**RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL**

126.0 dBuV

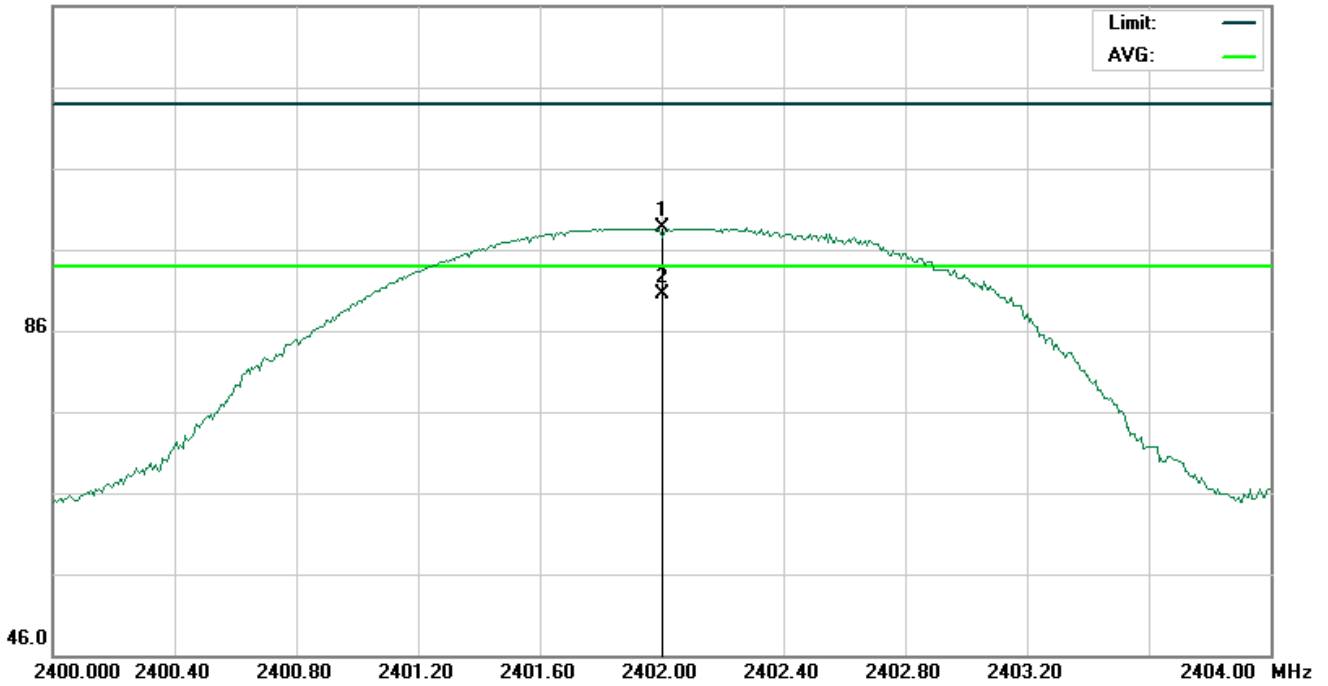


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV	dBuV	dBuV	dB		cm	degree	
1		2402.000	85.15	13.46	98.61	114.00	-15.39	peak			
2	*	2402.000	77.07	13.46	90.53	94.00	-3.47	AVG	100	105	

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

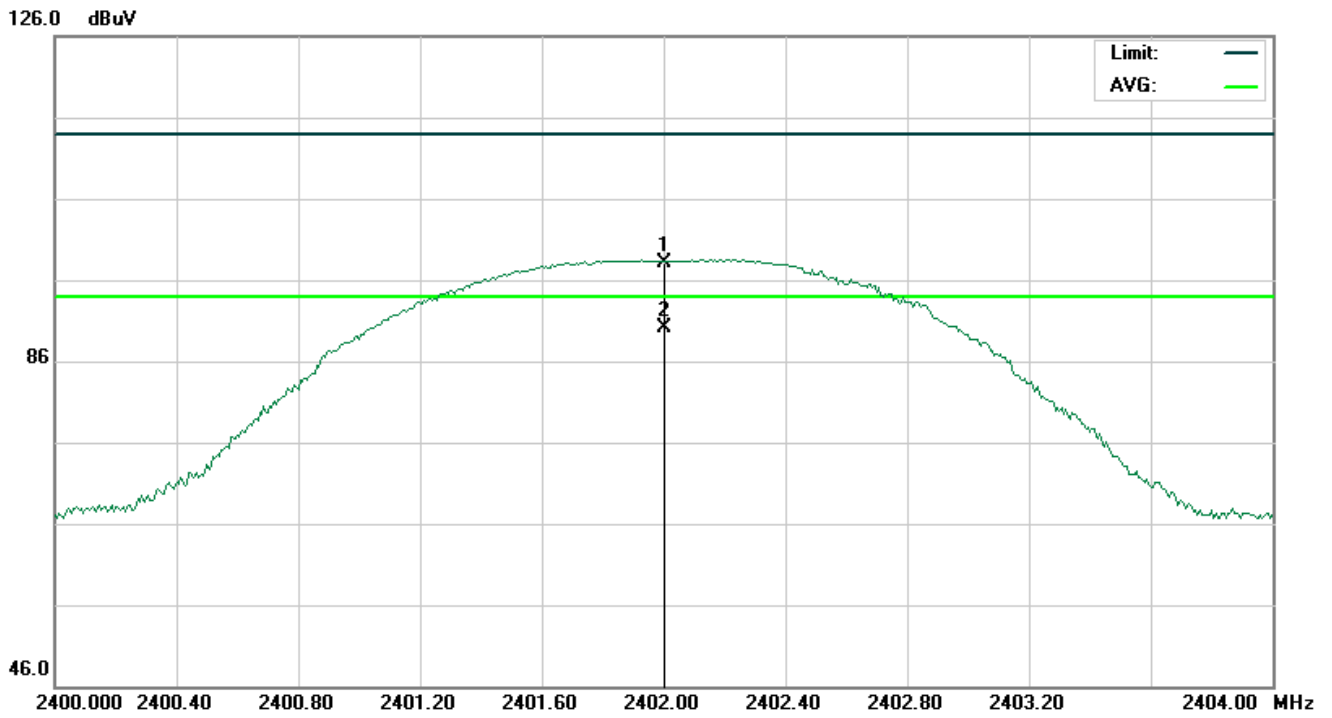


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV	dBuV	dBuV	dB		cm	degree	
1		2402.000	84.73	13.46	98.19	114.00	-15.81	peak			
2	*	2402.000	76.55	13.46	90.01	94.00	-3.99	AVG	100	213	

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

126.0 dBuV

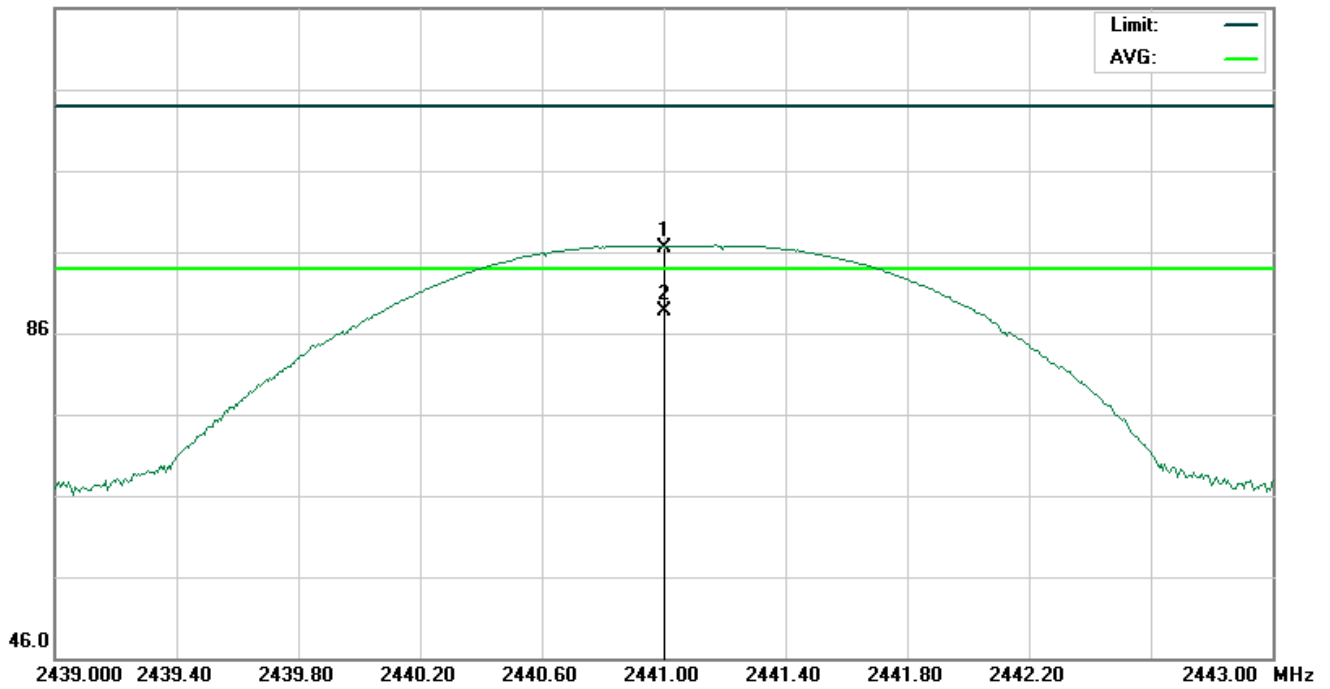


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV	dBuV	dBuV	dB		cm	degree	
1		2441.000	82.70	13.88	96.58	114.00	-17.42	peak			
2	*	2441.000	74.80	13.88	88.68	94.00	-5.32	AVG	100	76	

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

126.0 dBuV

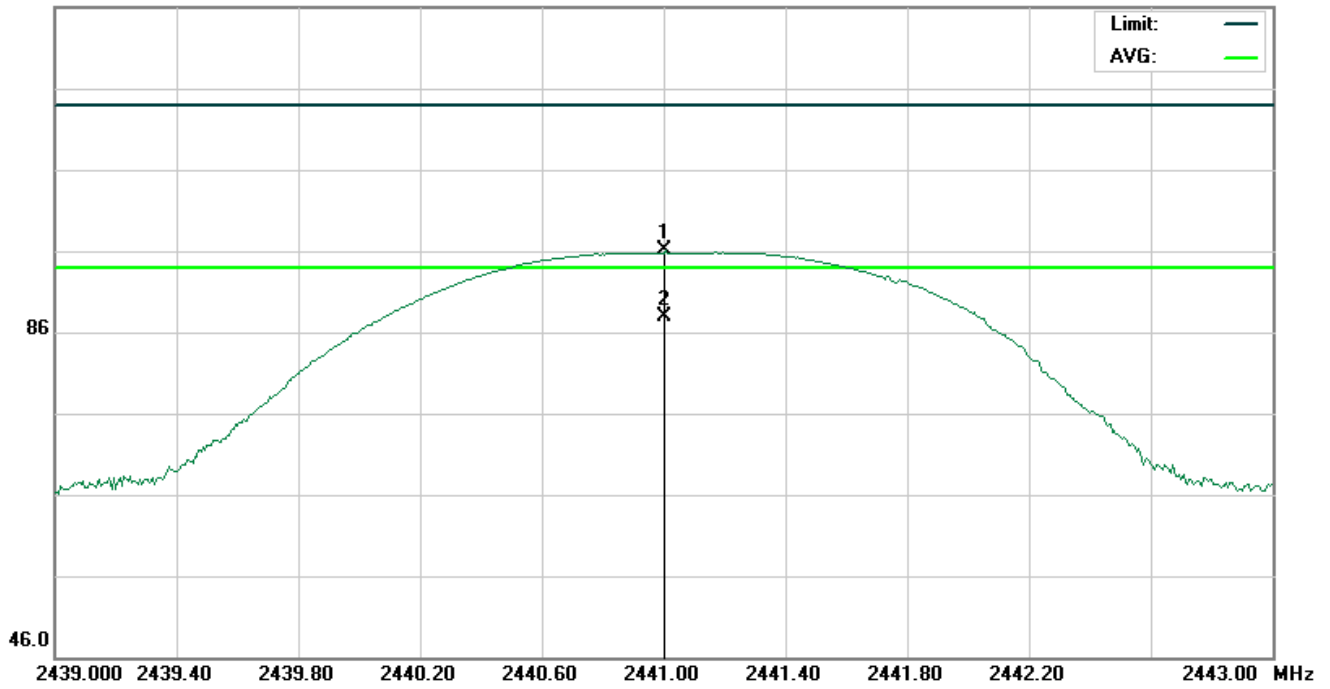


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV	dBuV	dBuV	dB		cm	degree	
1		2441.000	82.23	13.88	96.11	114.00	-17.89	peak			
2	*	2441.000	74.11	13.88	87.99	94.00	-6.01	AVG	100	231	

**RESULT: PASS**





RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

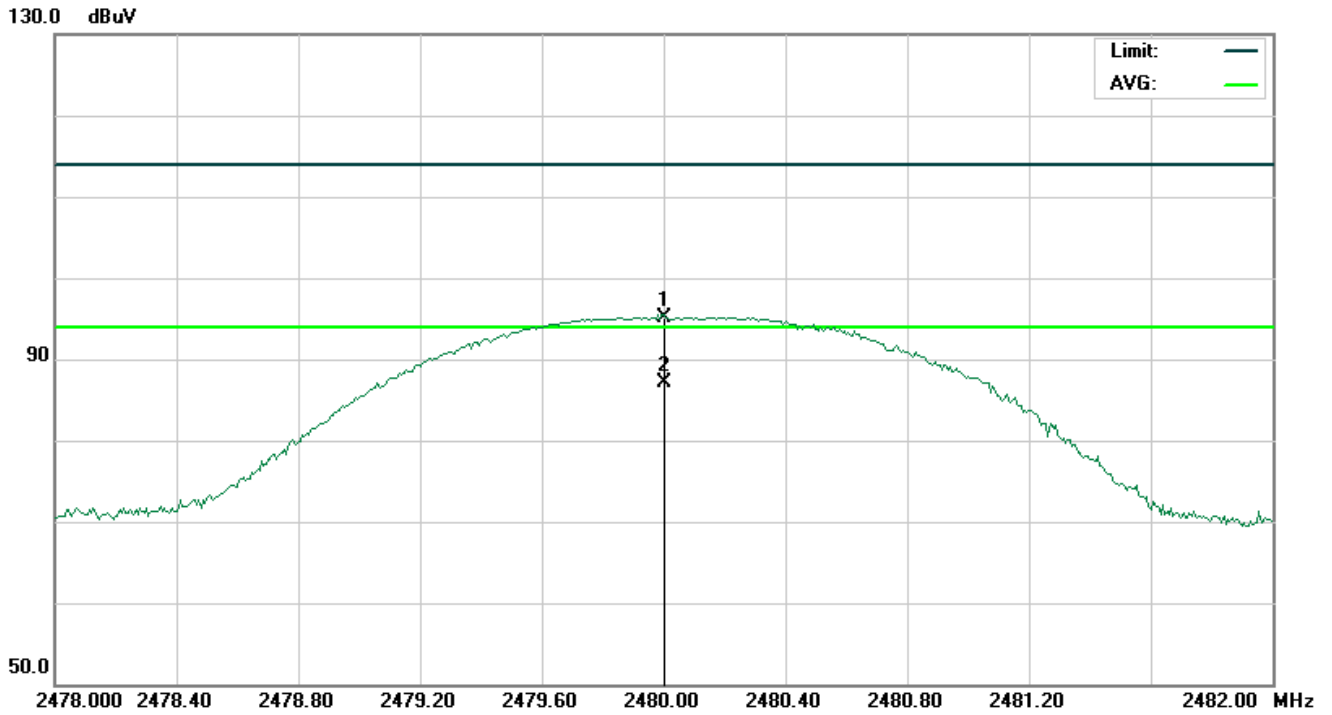


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV	dBuV	dBuV	dB		cm	degree	
1		2480.000	81.02	14.11	95.13	114.00	-18.87	peak			
2	*	2480.000	73.08	14.11	87.19	94.00	-6.81	AVG	100	155	

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

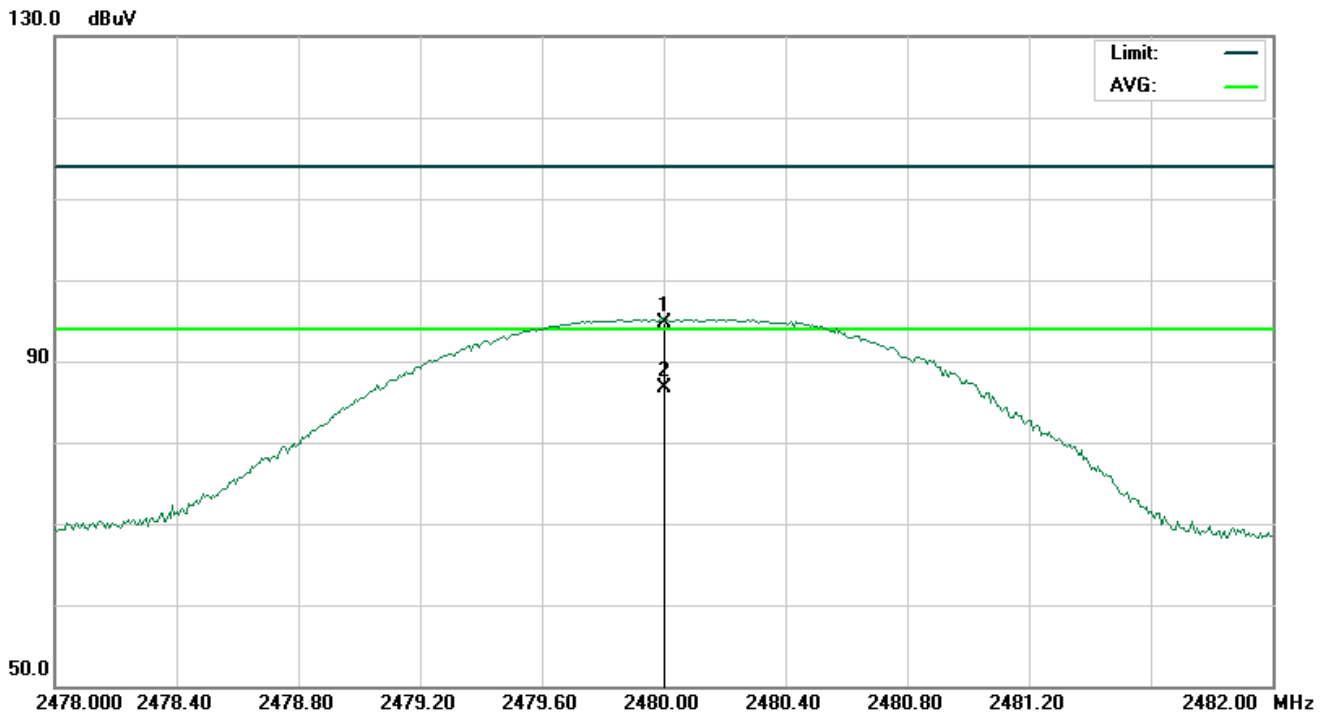

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV	dBuV	dBuV	dB		cm	degree	
1		2480.000	80.55	14.11	94.66	114.00	-19.34	peak			
2	*	2480.000	72.55	14.11	86.66	94.00	-7.34	AVG	100	213	

**RESULT: PASS**

**Note:** Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

**Field strength of the fundamental signal****1Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	85.15	13.46	98.61	114	-15.39	Horizontal
2402	84.73	13.46	98.19	114	-15.81	Vertical
2441	82.70	13.88	96.58	114	-17.42	Horizontal
2441	82.23	13.88	96.11	114	-17.89	Vertical
2480	81.02	14.11	95.13	114	-18.87	Horizontal
2480	80.55	14.11	94.66	114	-19.34	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	77.07	13.46	90.53	94	-3.47	Horizontal
2402	76.55	13.46	90.01	94	-3.99	Vertical
2441	74.80	13.88	88.68	94	-5.32	Horizontal
2441	74.11	13.88	87.99	94	-6.01	Vertical
2480	73.08	14.11	87.19	94	-6.81	Horizontal
2480	72.55	14.11	86.66	94	-7.34	Vertical

**2Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	84.70	13.46	98.16	114	-15.84	Horizontal
2402	84.26	13.46	97.72	114	-16.28	Vertical
2441	82.27	13.88	96.15	114	-17.85	Horizontal
2441	81.81	13.88	95.69	114	-18.31	Vertical
2480	80.55	14.11	94.66	114	-19.34	Horizontal
2480	80.06	14.11	94.17	114	-19.83	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	76.75	13.46	90.21	94	-3.79	Horizontal
2402	76.32	13.46	89.78	94	-4.22	Vertical
2441	74.31	13.88	88.19	94	-5.81	Horizontal
2441	73.76	13.88	87.64	94	-6.36	Vertical
2480	72.61	14.11	86.72	94	-7.28	Horizontal
2480	72.05	14.11	86.16	94	-7.84	Vertical

**3Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	84.27	13.46	97.73	114	-16.27	Horizontal
2402	83.83	13.46	97.29	114	-16.71	Vertical
2441	81.77	13.88	95.65	114	-18.35	Horizontal
2441	81.38	13.88	95.26	114	-18.74	Vertical
2480	80.14	14.11	94.25	114	-19.75	Horizontal
2480	79.56	14.11	93.67	114	-20.33	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	76.26	13.46	89.72	94	-4.28	Horizontal
2402	75.87	13.46	89.33	94	-4.67	Vertical
2441	73.86	13.88	87.74	94	-6.26	Horizontal
2441	73.28	13.88	87.16	94	-6.84	Vertical
2480	72.13	14.11	86.24	94	-7.76	Horizontal
2480	71.57	14.11	85.68	94	-8.32	Vertical




**FOR BR/EDR**

**Right**

**(Worst modulation: GFSK)**

**For Harmonics**

**RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL**

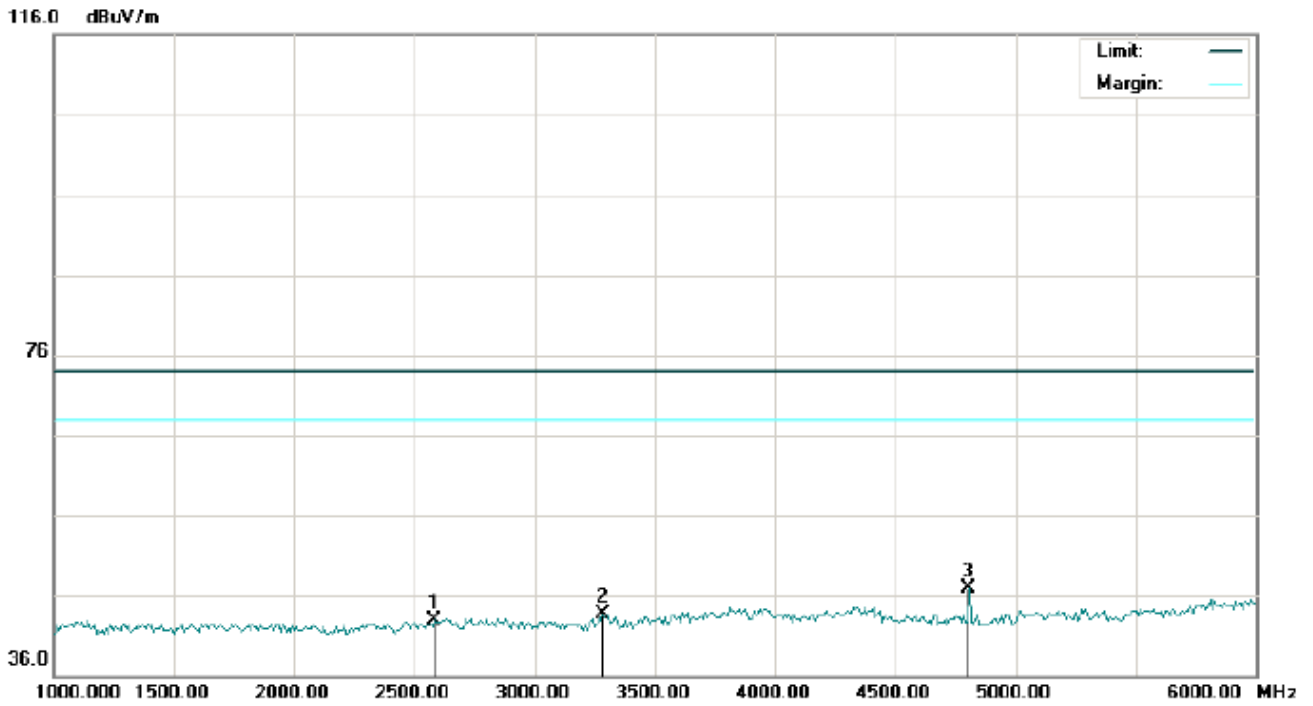


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2583.333	32.37	10.63	43.00	74.00	-31.00	peak			
2		3283.333	31.80	11.91	43.71	74.00	-30.29	peak			
3	*	4804.000	39.21	7.69	46.90	74.00	-27.10	peak			

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

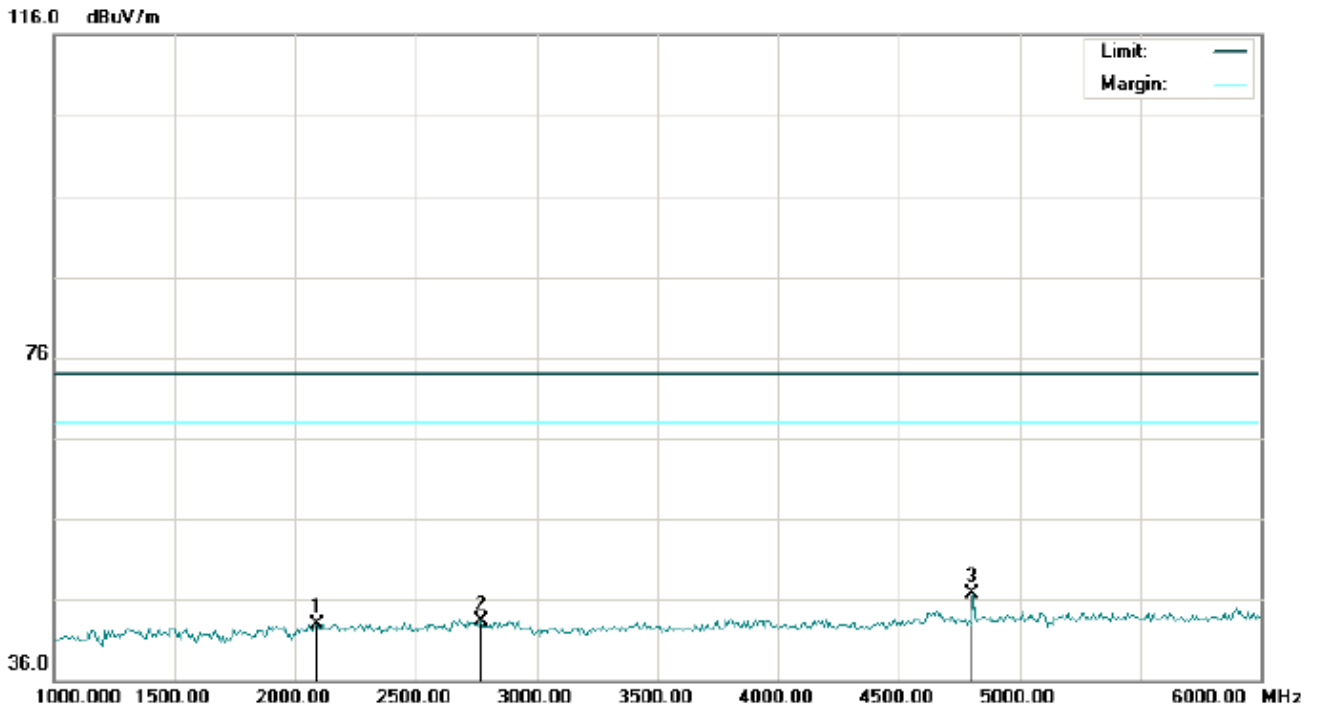


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2091.667	32.88	9.98	42.86	74.00	-31.14	peak			
2		2766.667	32.22	11.08	43.30	74.00	-30.70	peak			
3	*	4804.000	39.05	7.69	46.74	74.00	-27.26	peak			

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

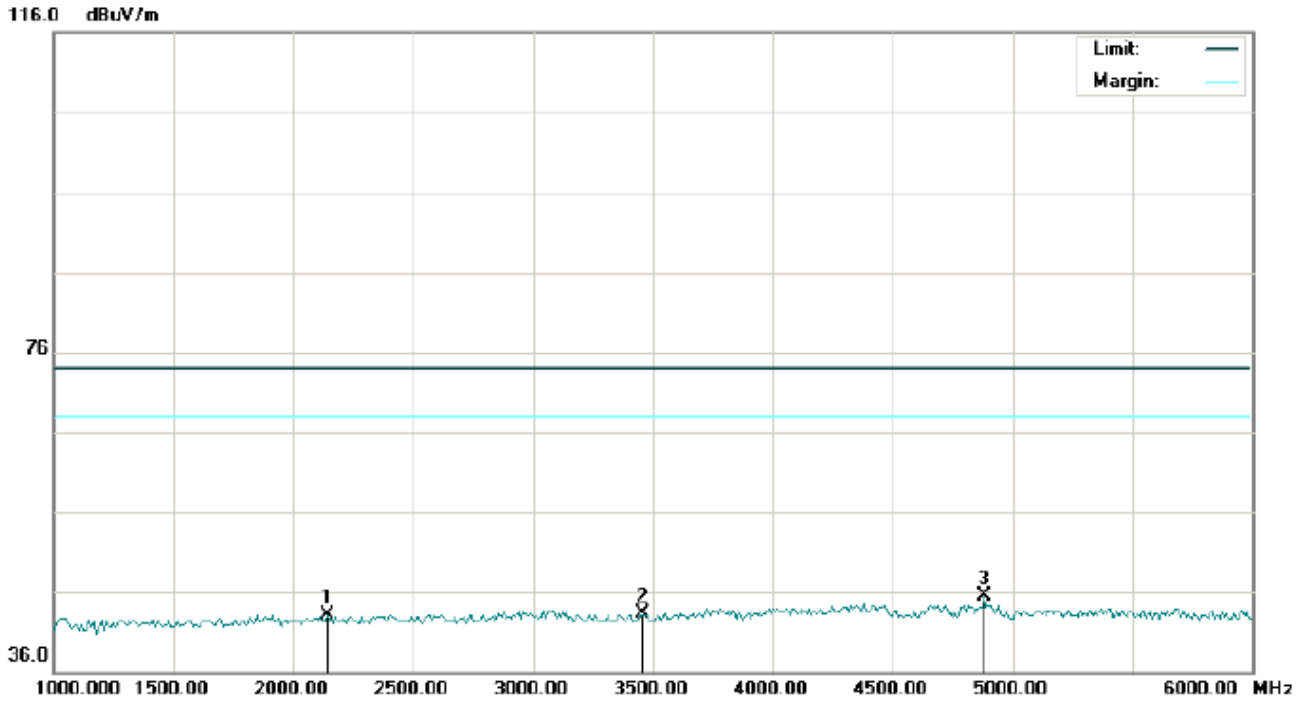


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2141.667	33.00	10.04	43.04	74.00	-30.96	peak			
2		3458.333	31.13	12.07	43.20	74.00	-30.80	peak			
3	*	4882.000	37.66	7.89	45.55	74.00	-28.45	peak			

**RESULT: PASS**





RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

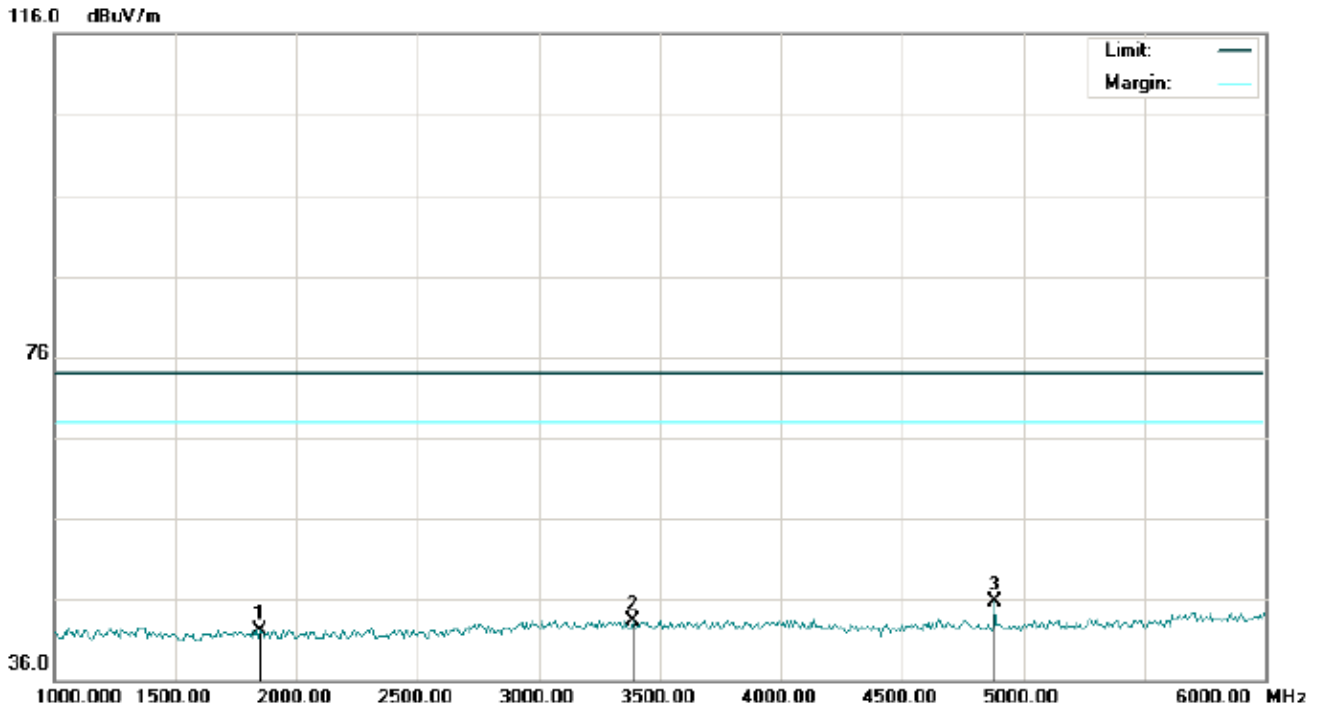


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1850.000	33.87	8.30	42.17	74.00	-31.83	peak			
2		3391.667	31.28	12.01	43.29	74.00	-30.71	peak			
3	*	4882.000	37.89	7.89	45.78	74.00	-28.22	peak			

RESULT: PASS



RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

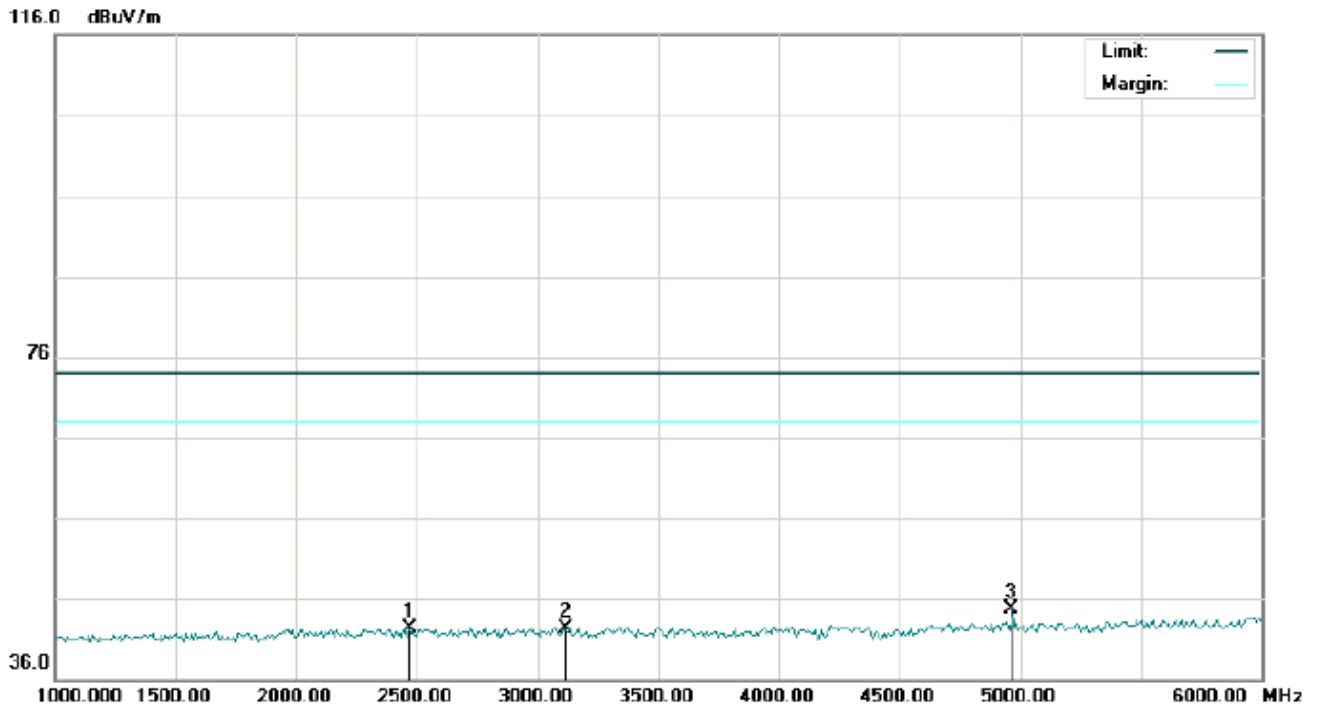


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2466.667	31.84	10.39	42.23	74.00	-31.77	peak			
2		3116.667	30.55	11.75	42.30	74.00	-31.70	peak			
3	*	4960.000	36.60	8.09	44.69	74.00	-29.31	peak			

RESULT: PASS



RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

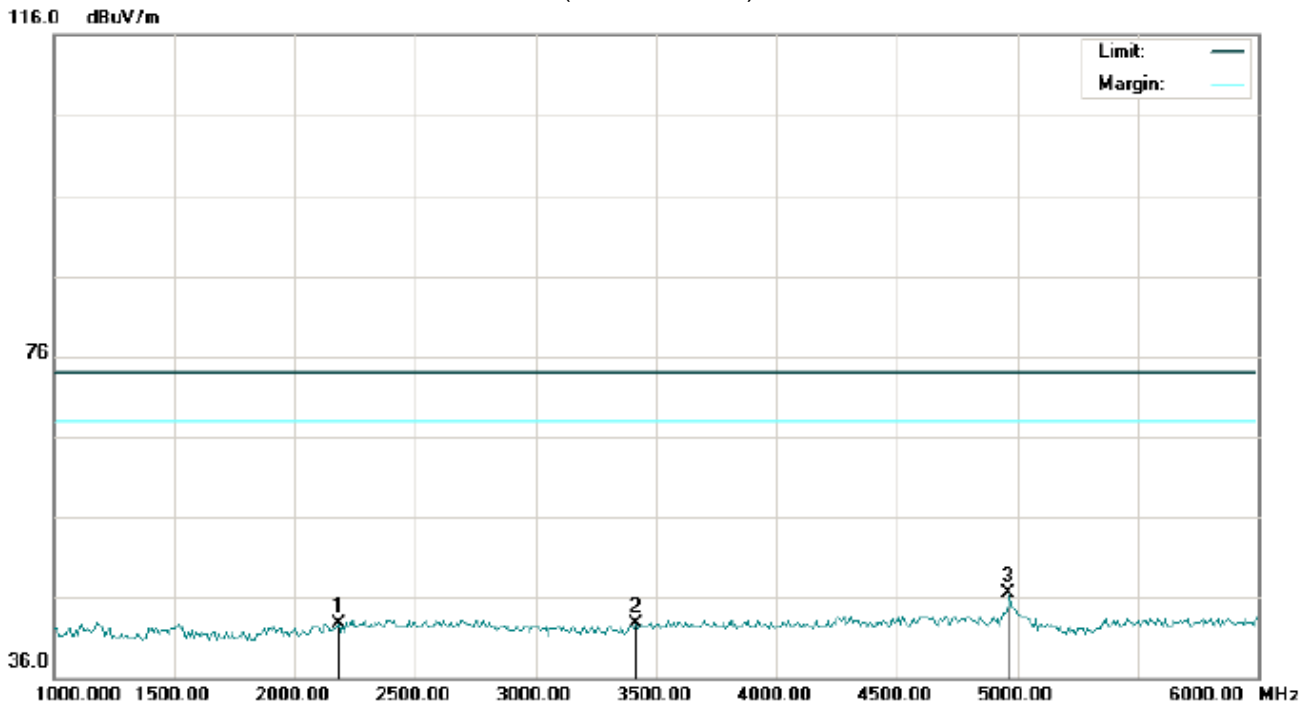

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2183.333	32.58	10.08	42.66	74.00	-31.34	peak			
2		3416.667	30.70	12.03	42.73	74.00	-31.27	peak			
3	*	4960.000	38.41	8.09	46.50	74.00	-27.50	peak			

**RESULT: PASS**

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.


The "Factor" value can be calculated automatically by software of measurement system.



**Left**  
**(Worst modulation: GFSK)**

**For Harmonics**

**RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL**

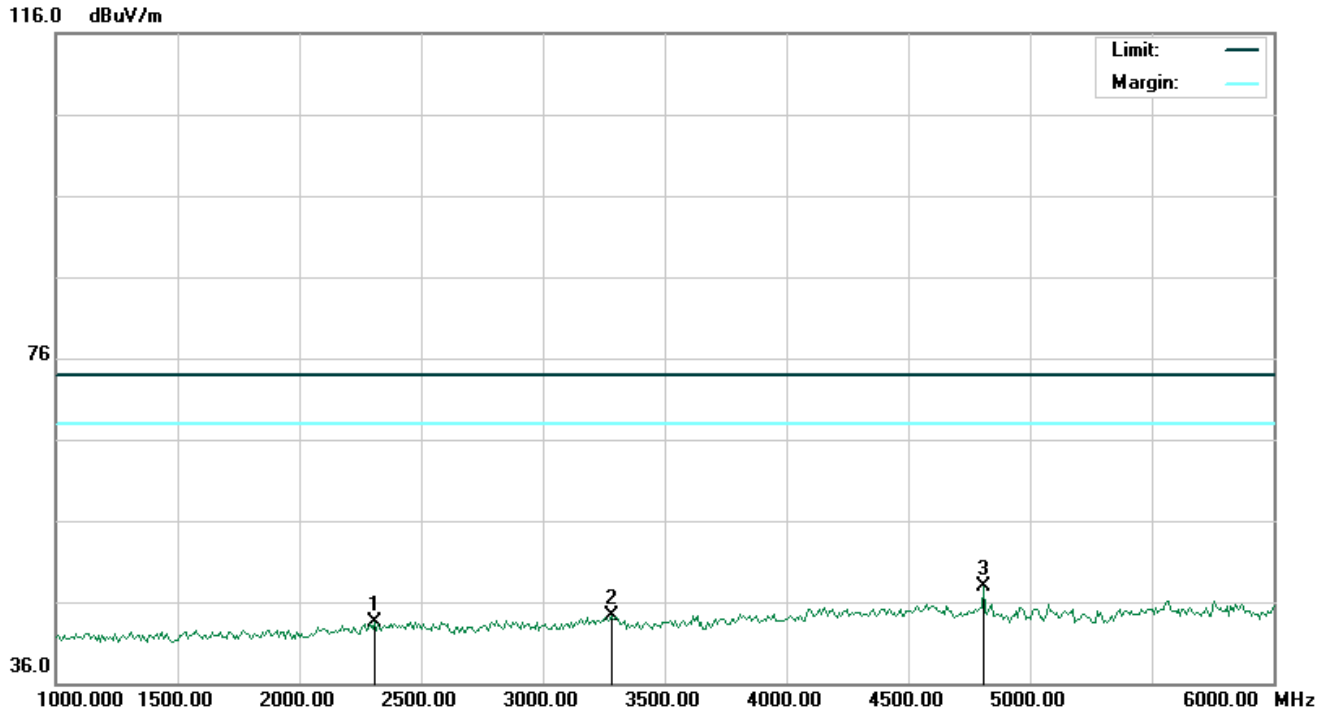


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2308.333	33.25	10.22	43.47	74.00	-30.53	peak			
2		3283.333	32.30	11.91	44.21	74.00	-29.79	peak			
3	*	4804.000	40.21	7.69	47.90	74.00	-26.10	peak			

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

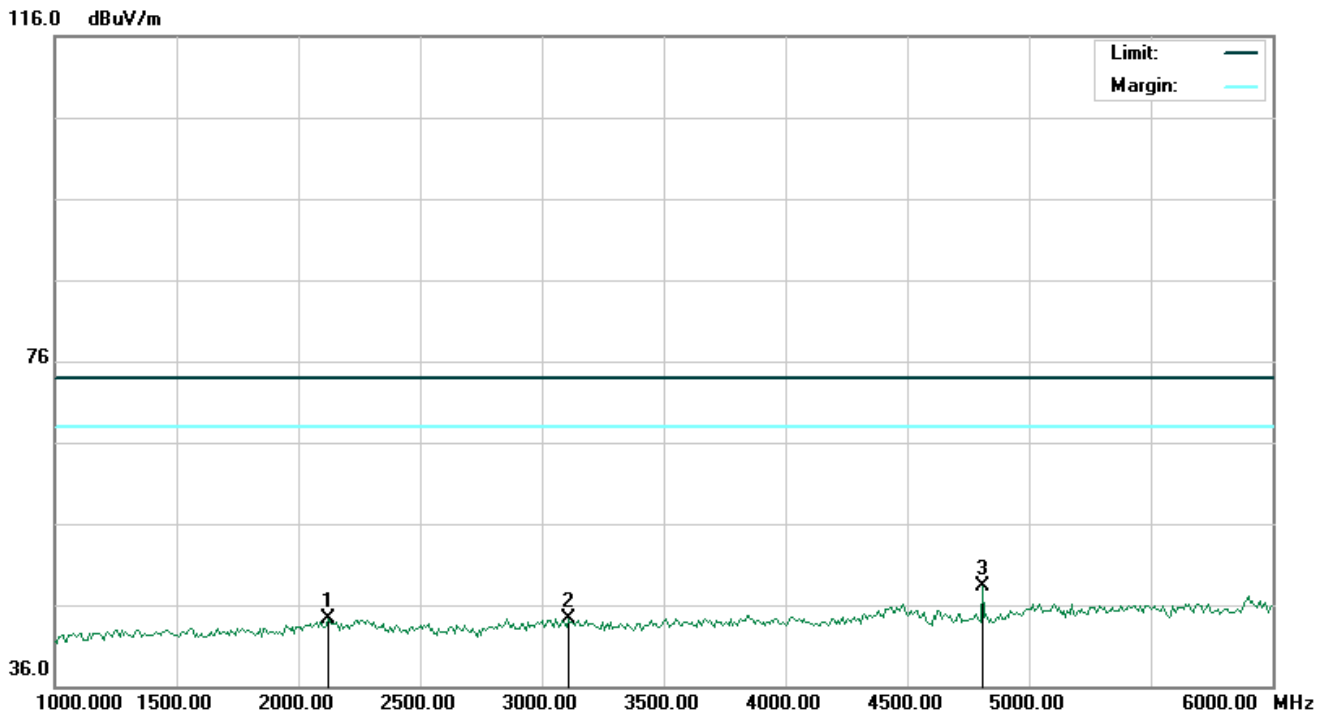


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2125.000	34.36	10.02	44.38	74.00	-29.62	peak			
2		3108.333	32.56	11.74	44.30	74.00	-29.70	peak			
3	*	4804.000	40.55	7.69	48.24	74.00	-25.76	peak			

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

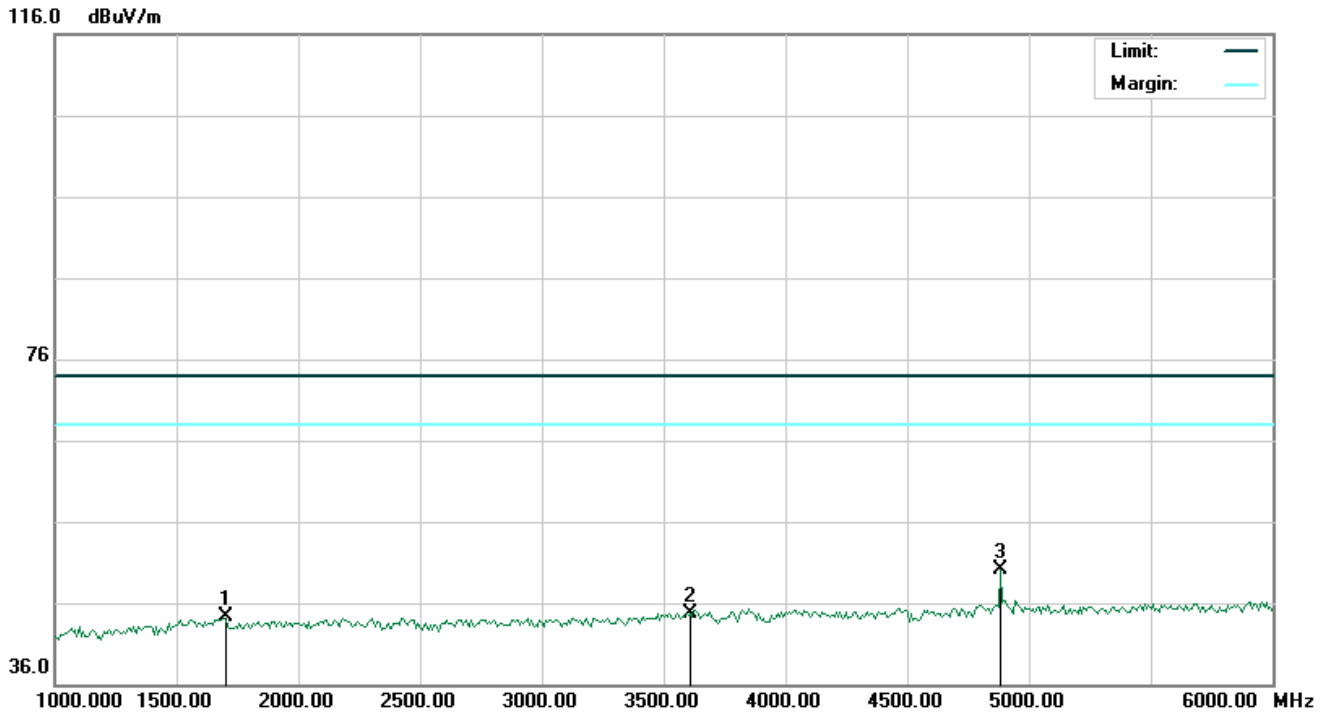


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1691.667	37.56	6.64	44.20	74.00	-29.80	peak			
2		3608.333	32.00	12.78	44.78	74.00	-29.22	peak			
3	*	4882.000	42.16	7.89	50.05	74.00	-23.95	peak			

RESULT: PASS



RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

116.0 dBuV/m

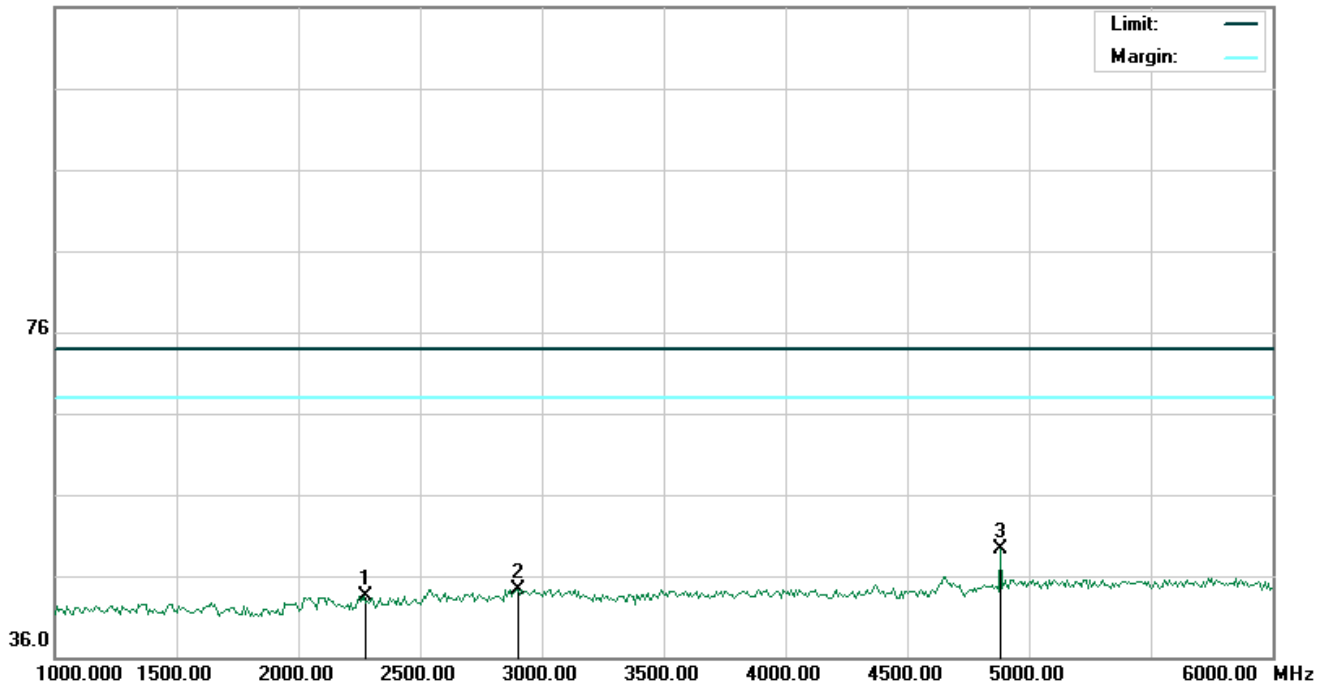


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2266.667	33.33	10.17	43.50	74.00	-30.50	peak			
2		2900.000	32.95	11.40	44.35	74.00	-29.65	peak			
3	*	4882.000	41.39	7.89	49.28	74.00	-24.72	peak			

RESULT: PASS



RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

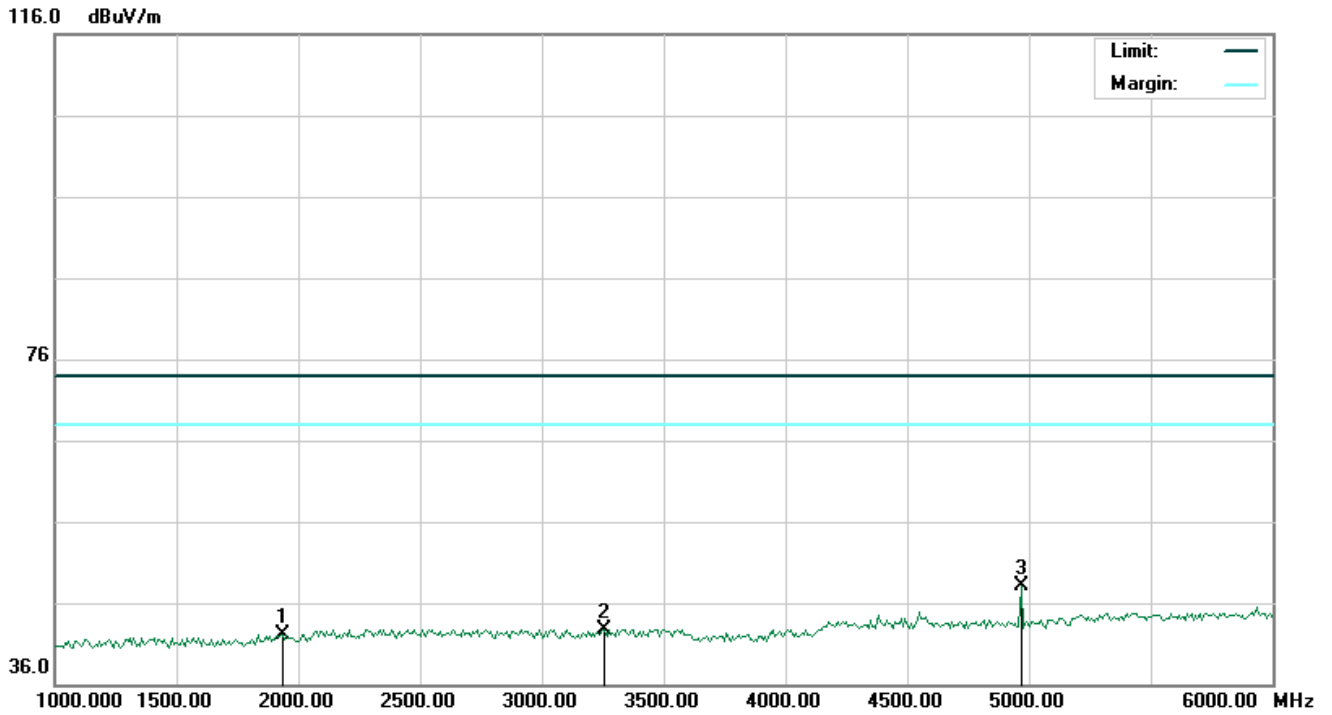


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1933.333	33.01	9.18	42.19	74.00	-31.81	peak			
2		3258.333	30.91	11.88	42.79	74.00	-31.21	peak			
3	*	4960.000	40.10	8.09	48.19	74.00	-25.81	peak			

RESULT: PASS





RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

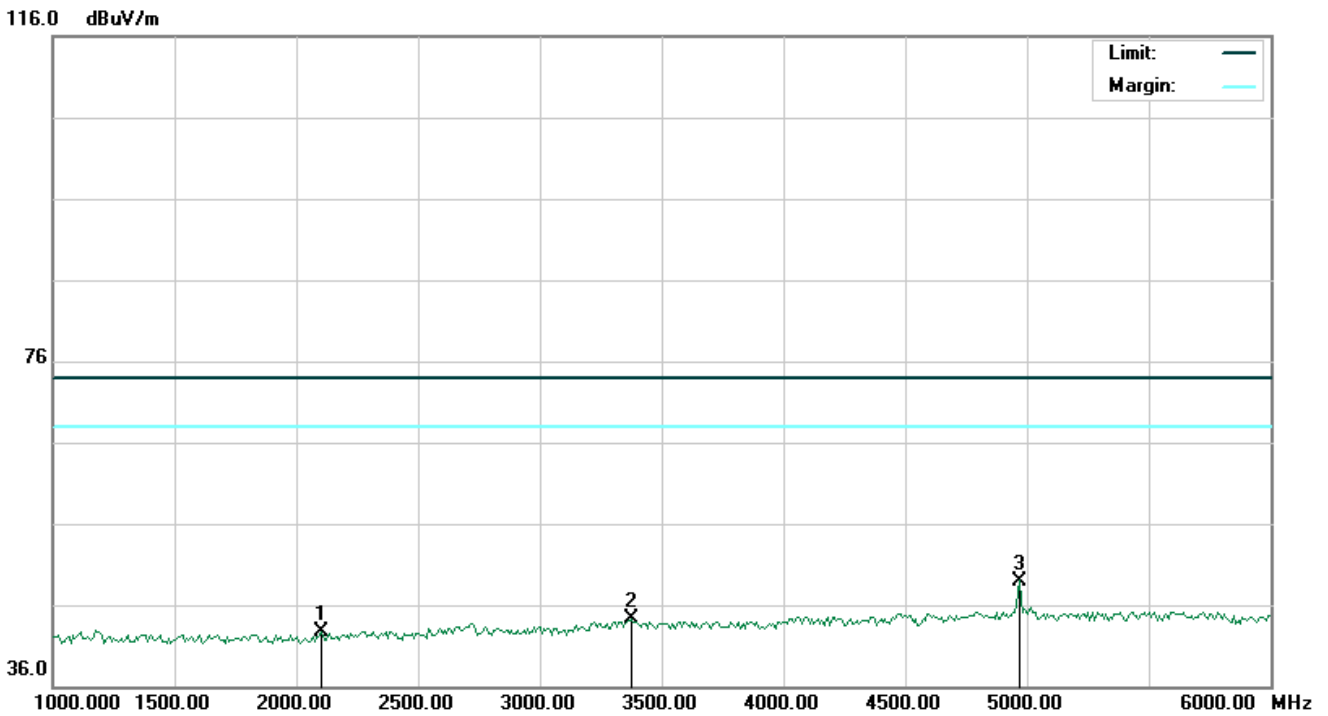

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2100.000	32.68	9.99	42.67	74.00	-31.33	peak			
2		3375.000	32.29	11.99	44.28	74.00	-29.72	peak			
3	*	4960.000	40.91	8.09	49.00	74.00	-25.00	peak			

**RESULT: PASS**

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

## 5. BAND EDGE


### 5.1. MEASUREMENT PROCEDURE

1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

Start frequency(MHz)	Stop frequency(MHz)
2200	2405
2478	2500

### 5.2 TEST SETUP


RADIATED EMISSION TEST SETUP

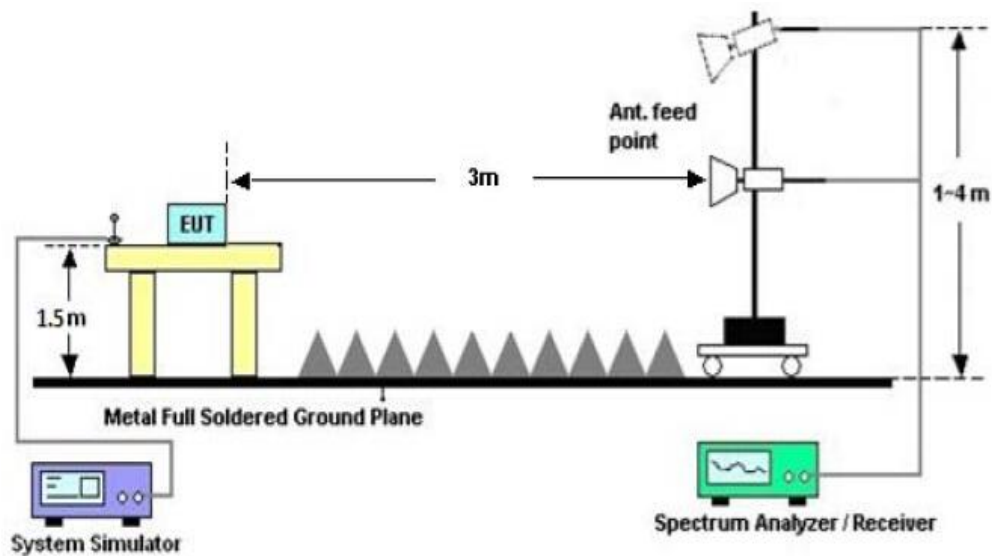



**5.3 RADIATED TEST RESULT  
FOR BR/EDR  
Right  
(Worst modulation: GFSK)**


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

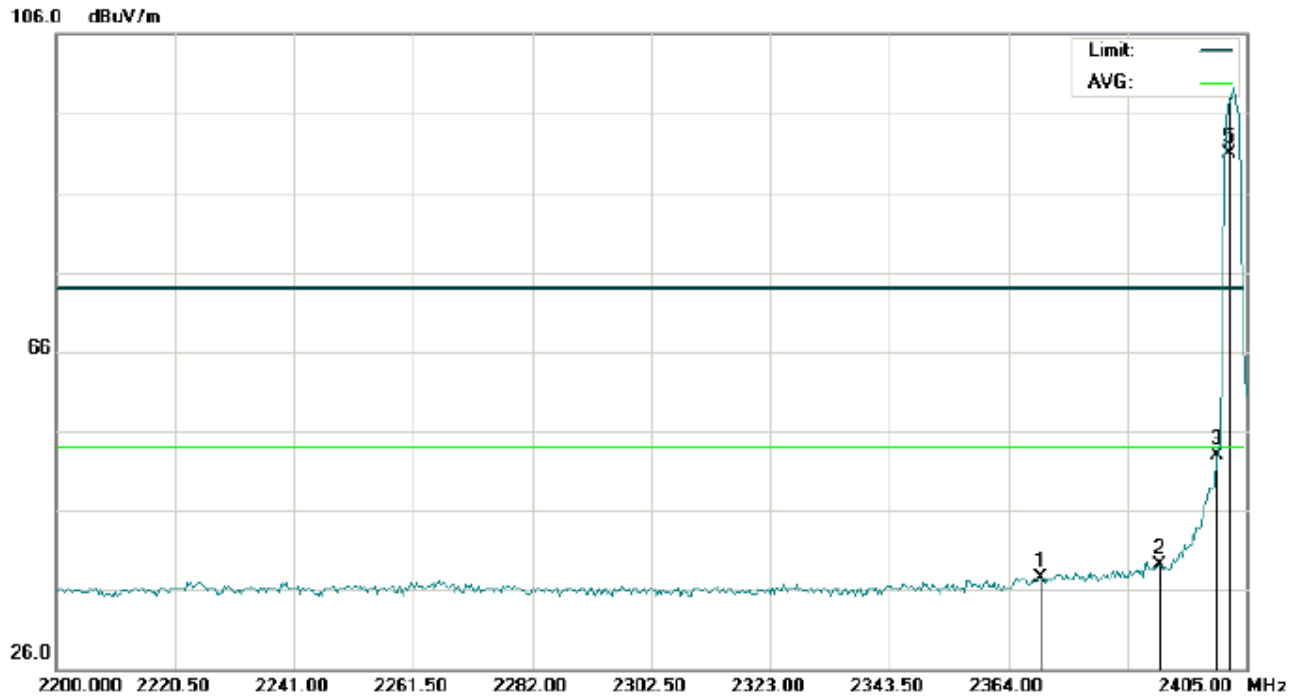

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2369.467	24.09	13.46	37.55	74.00	-36.45	peak			
2		2390.000	25.67	13.46	39.13	74.00	-34.87	peak			
3		2400.000	39.44	13.46	52.90	74.00	-21.10	peak			
4	X	2402.000	85.46	13.46	98.92	74.00	24.92	peak			
5	*	2402.000	77.47	13.46	90.93	54.00	36.93	AVG	100	126	




TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

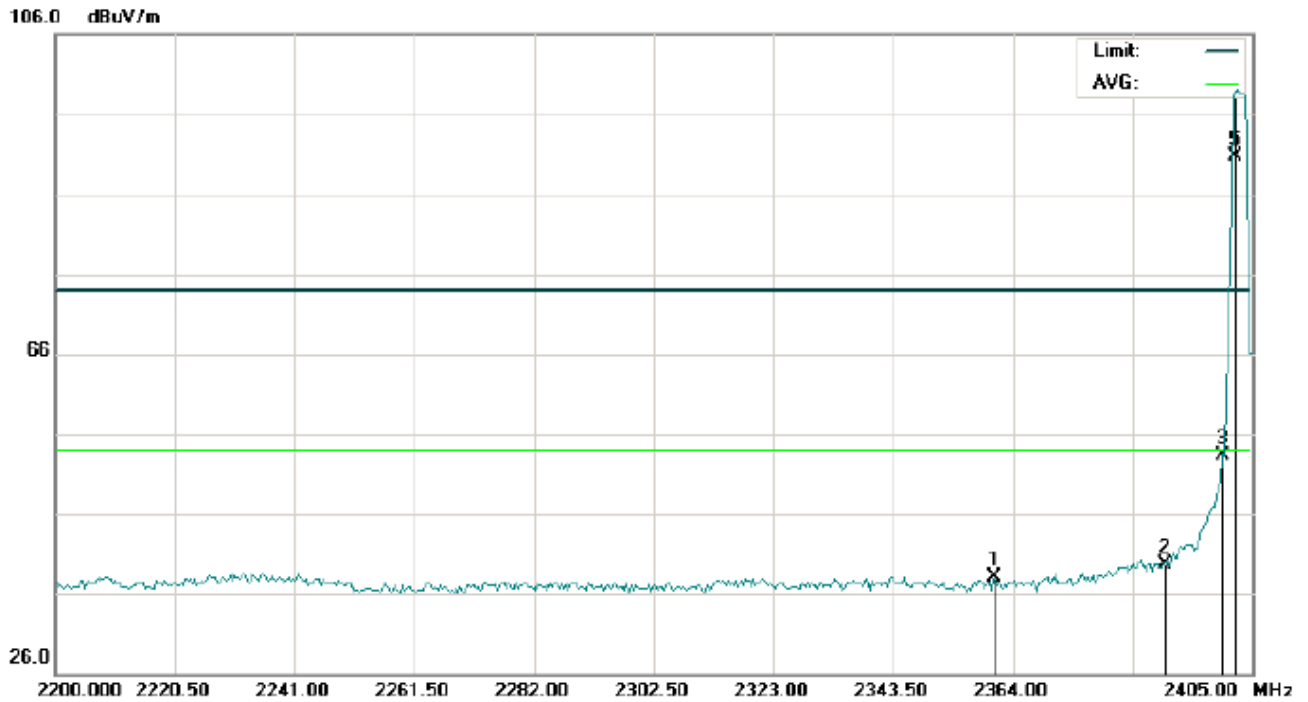

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2360.925	24.56	13.46	38.02	74.00	-35.98	peak			
2		2390.000	26.17	13.46	39.63	74.00	-34.37	peak			
3		2400.000	39.94	13.46	53.40	74.00	-20.60	peak			
4	X	2402.000	85.05	13.46	98.51	74.00	24.51	peak			
5	*	2402.000	77.17	13.46	90.63	54.00	36.63	AVG	100	329	




TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

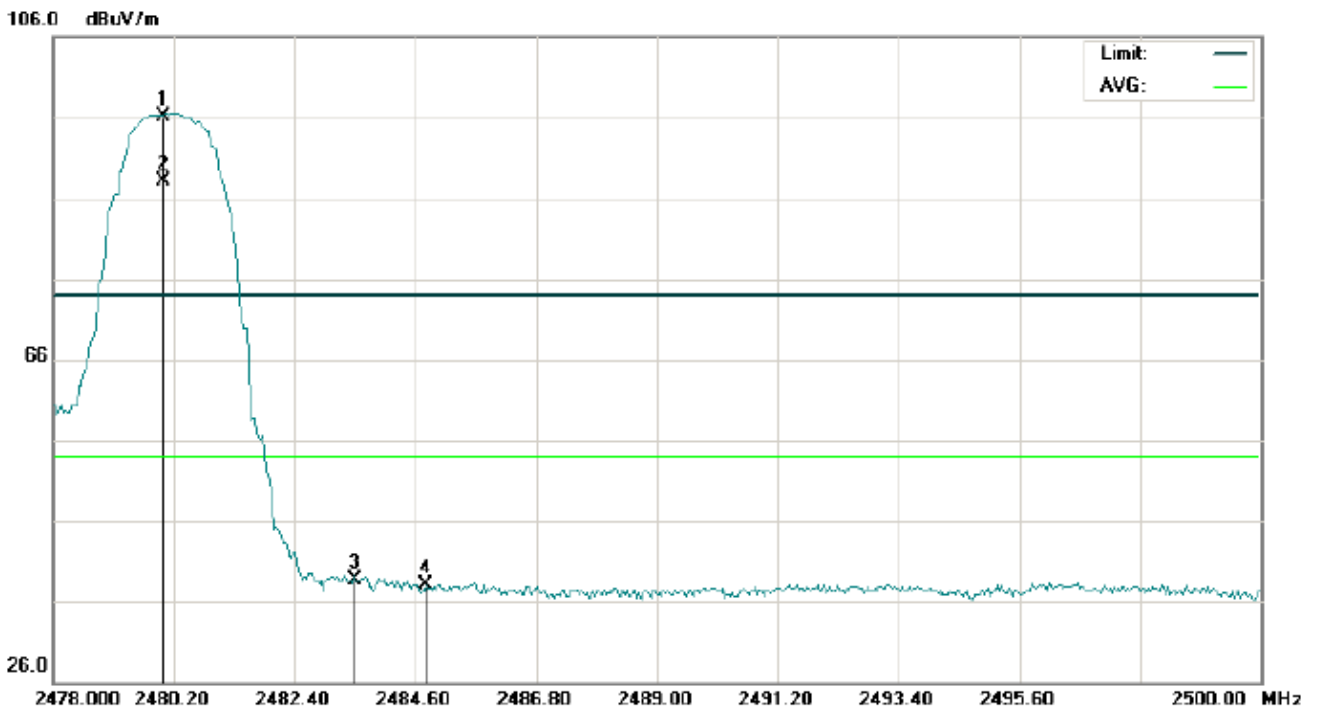

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1	X	2480.000	81.92	14.11	96.03	74.00	22.03	peak			
2	*	2480.000	73.96	14.11	88.07	54.00	34.07	AVG	100	134	
3		2483.500	24.66	14.13	38.79	74.00	-35.21	peak			
4		2484.783	23.99	14.14	38.13	74.00	-35.87	peak			



TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

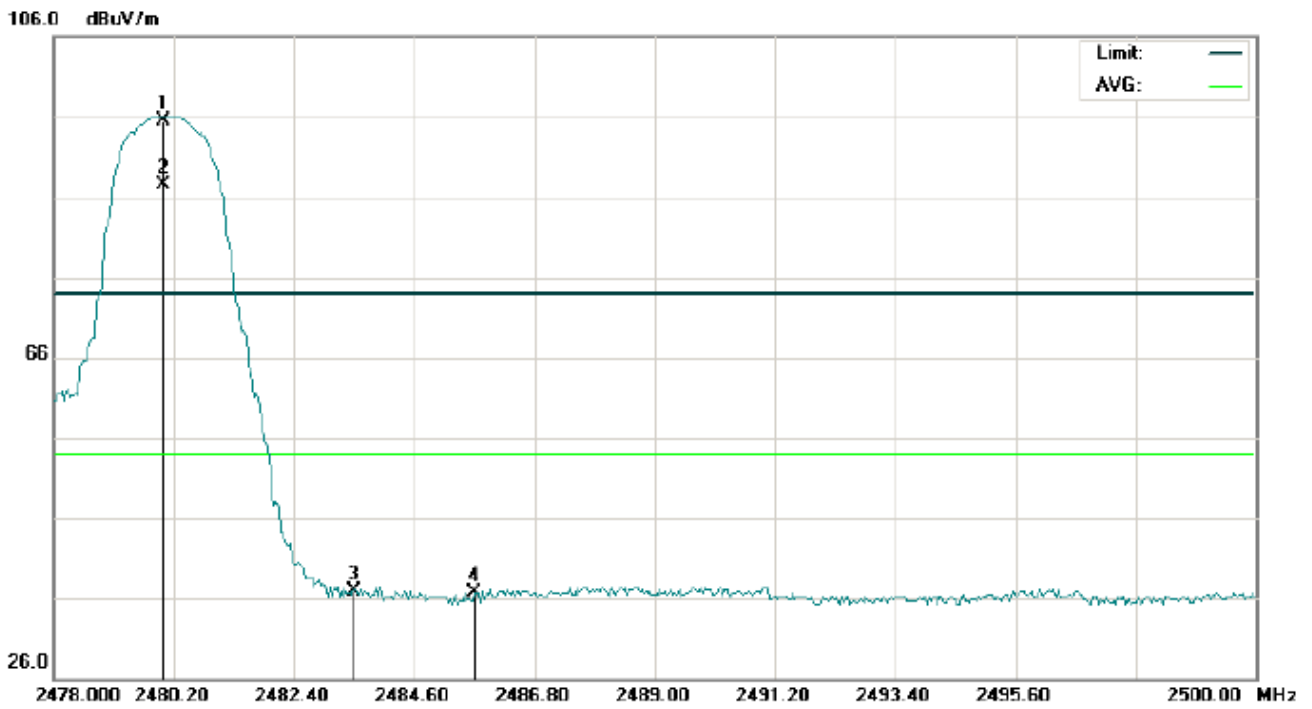

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	X	2480.000	81.41	14.11	95.52	74.00	21.52	peak			
2	*	2480.000	73.36	14.11	87.47	54.00	33.47	AVG	100	321	
3		2483.500	22.72	14.13	36.85	74.00	-37.15	peak			
4		2485.700	22.63	14.14	36.77	74.00	-37.23	peak			

**RESULT: PASS**

**Note:** Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The “Factor” value can be calculated automatically by software of measurement system.


Hopping on mode and Hopping off mode have been tested, but only worst case reported.



Left

(Worst modulation: GFSK)


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

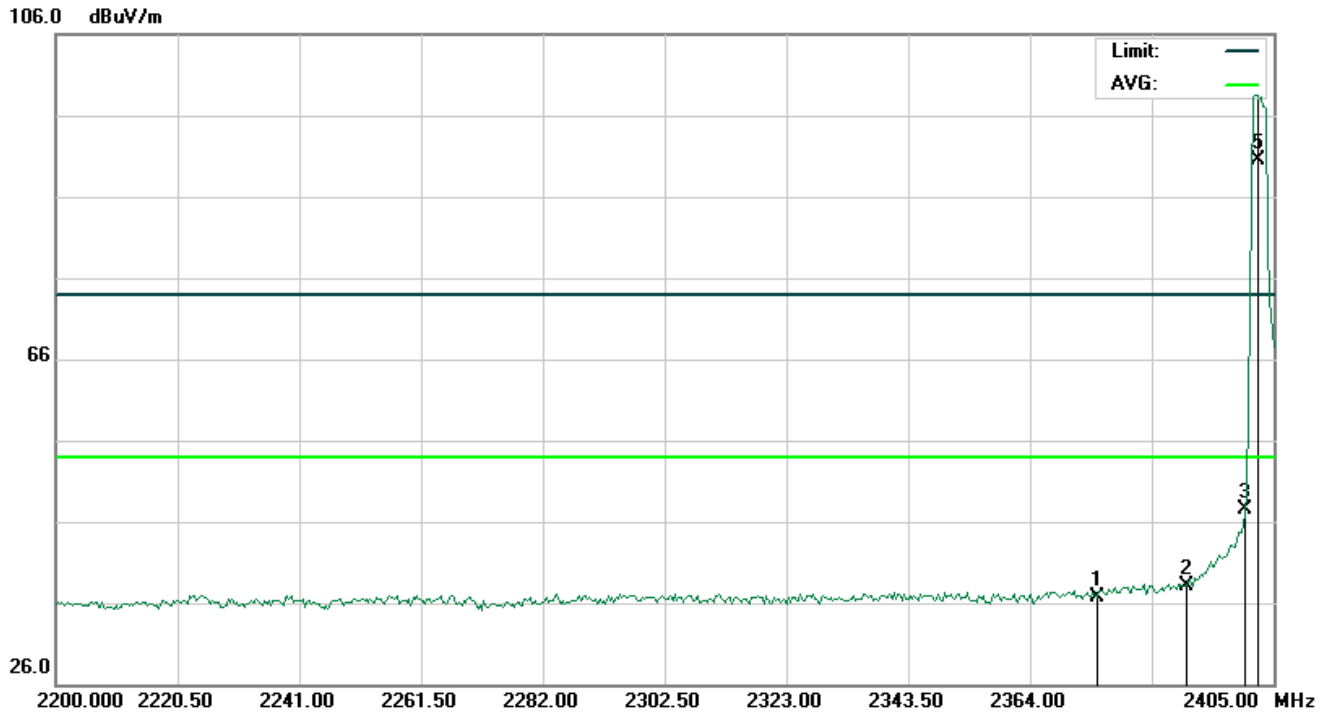

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2375.275	23.29	13.46	36.75	74.00	-37.25	peak			
2		2390.000	24.67	13.46	38.13	74.00	-35.87	peak			
3		2400.000	33.94	13.46	47.40	74.00	-26.60	peak			
4	X	2402.000	85.09	13.46	98.55	74.00	24.55	peak			
5	*	2402.000	76.95	13.46	90.41	54.00	36.41	AVG	100	120	



TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

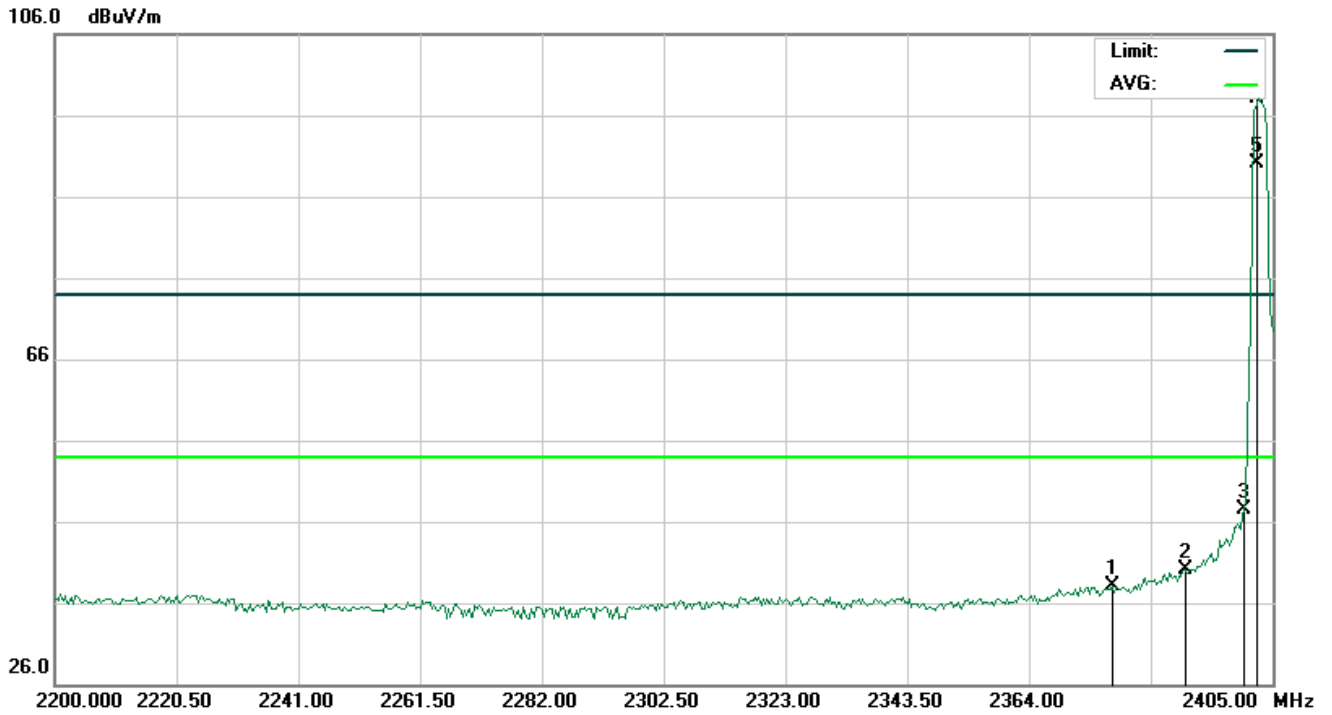


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2378.008	24.62	13.46	38.08	74.00	-35.92	peak			
2		2390.000	26.67	13.46	40.13	74.00	-33.87	peak			
3		2400.000	33.94	13.46	47.40	74.00	-26.60	peak			
4	X	2402.000	84.56	13.46	98.02	74.00	24.02	peak			
5	*	2402.000	76.61	13.46	90.07	54.00	36.07	AVG	100	227	






TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

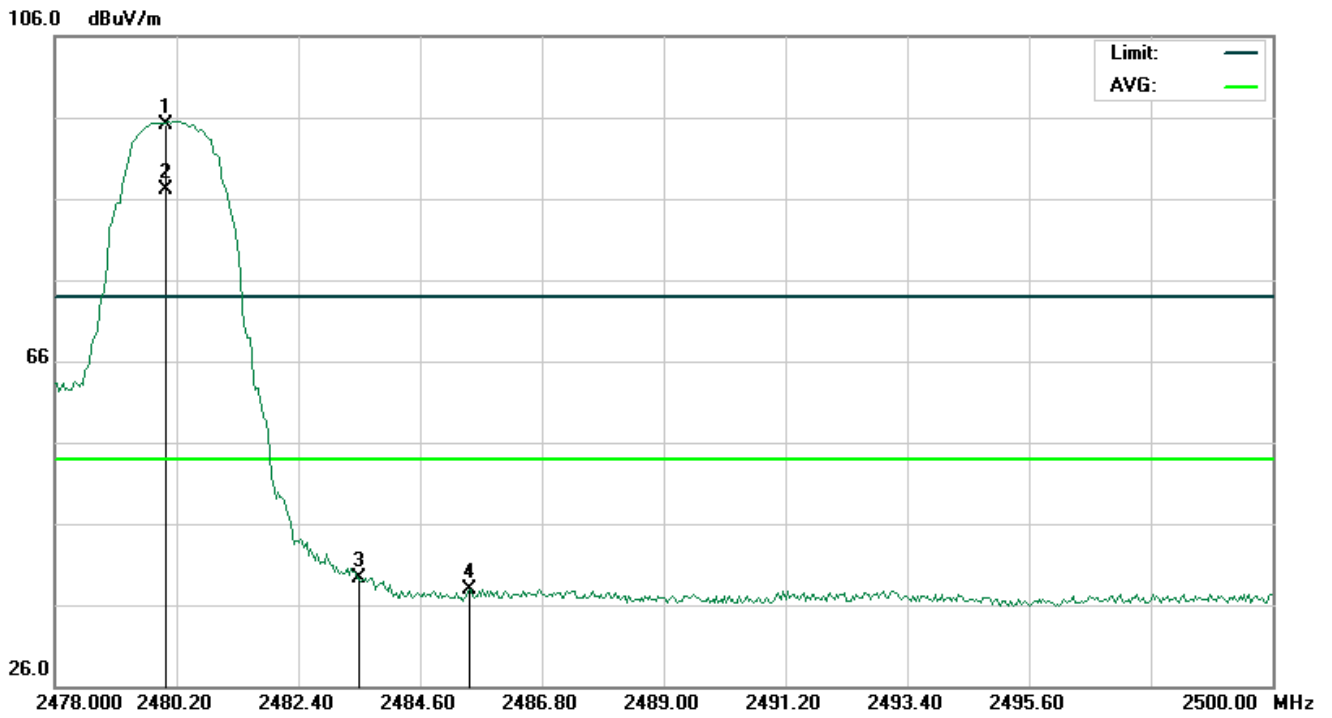

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	X	2480.000	80.90	14.11	95.01	74.00	21.01	peak			
2	*	2480.000	72.95	14.11	87.06	54.00	33.06	AVG	100	122	
3		2483.500	25.16	14.13	39.29	74.00	-34.71	peak			
4		2485.480	23.68	14.14	37.82	74.00	-36.18	peak			



TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

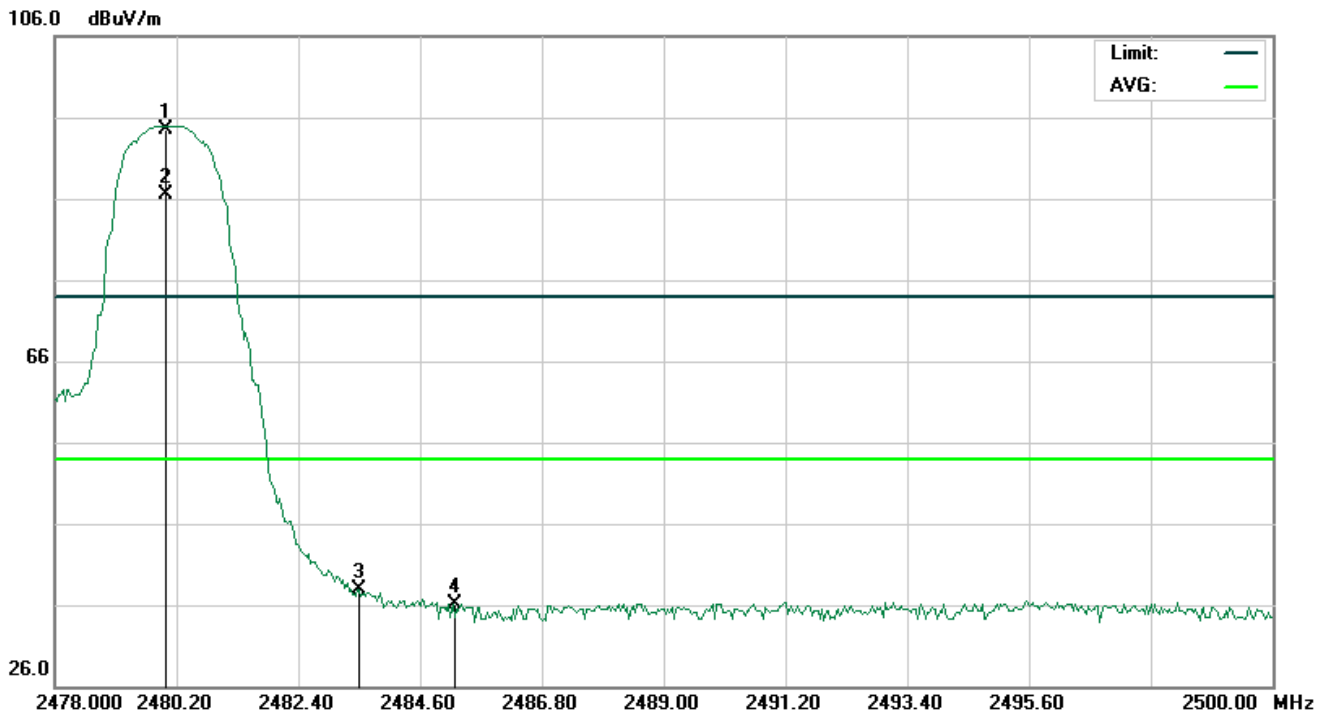

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	X	2480.000	80.36	14.11	94.47	74.00	20.47	peak			
2	*	2480.000	72.42	14.11	86.53	54.00	32.53	AVG	100	226	
3		2483.500	23.72	14.13	37.85	74.00	-36.15	peak			
4		2485.187	22.05	14.14	36.19	74.00	-37.81	peak			

**RESULT: PASS**

**Note:** Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


Hopping on mode and Hopping off mode have been tested, but only worst case reported.

## 6. OCCUPIED BANDWIDTH MEASUREMENT

### 6.1. MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
 $RBW \geq 1\%$  of the 20 dB bandwidth,  $VBW \geq 3RBW$ ; Sweep = auto; Detector function = peak
3. Set SPA Trace 1 Max hold, then View.

### 6.2. TEST SET-UP

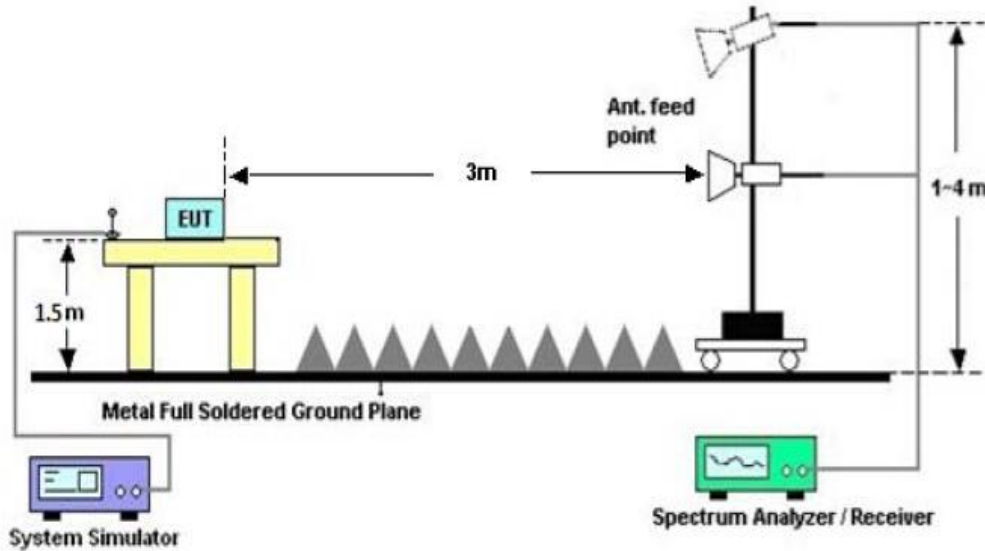


### 6.3. LIMITS AND MEASUREMENT RESULTS FOR BR/EDR

Right


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	0.959	1.105	PASS
	Middle Channel	0.954	1.105	PASS
	High Channel	0.961	1.093	PASS



TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

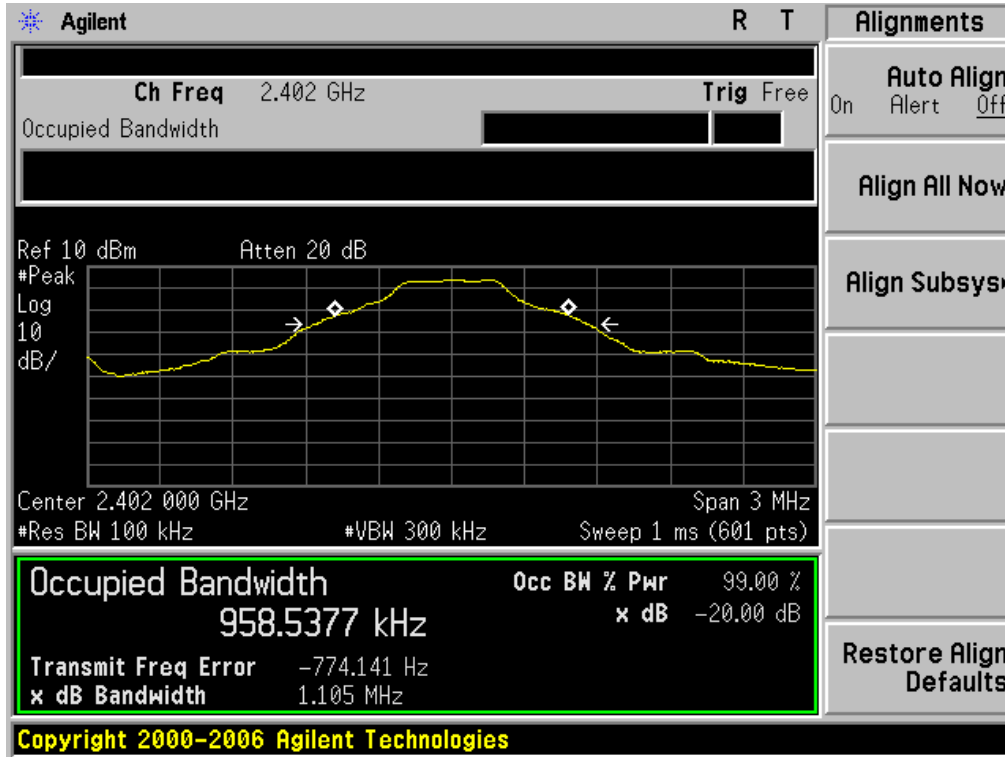


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

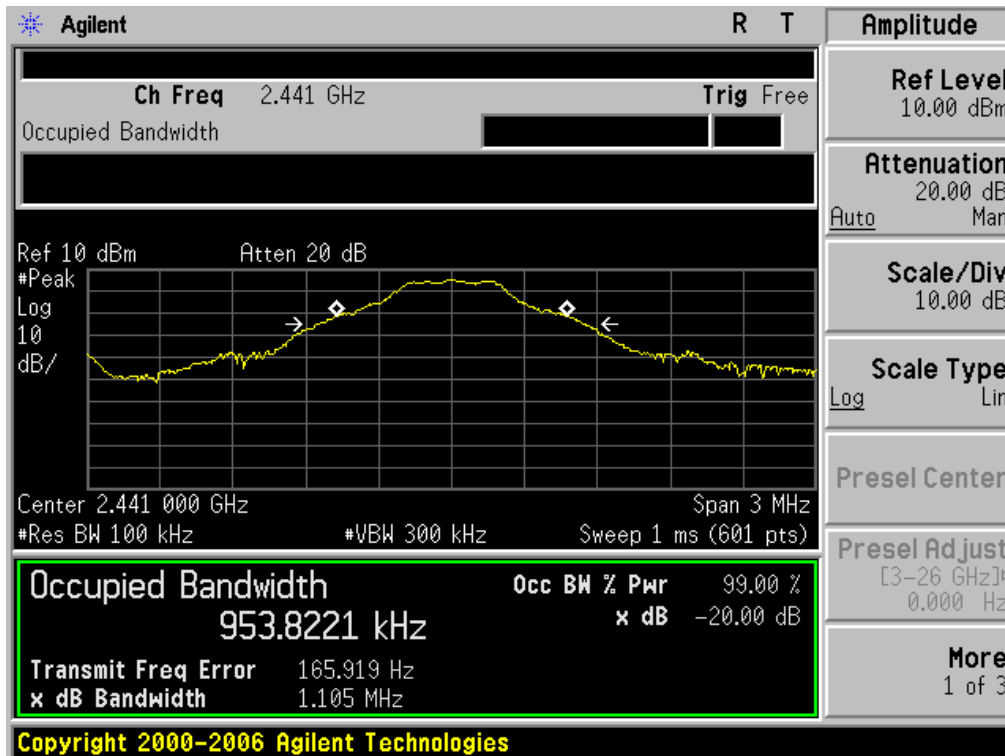




TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

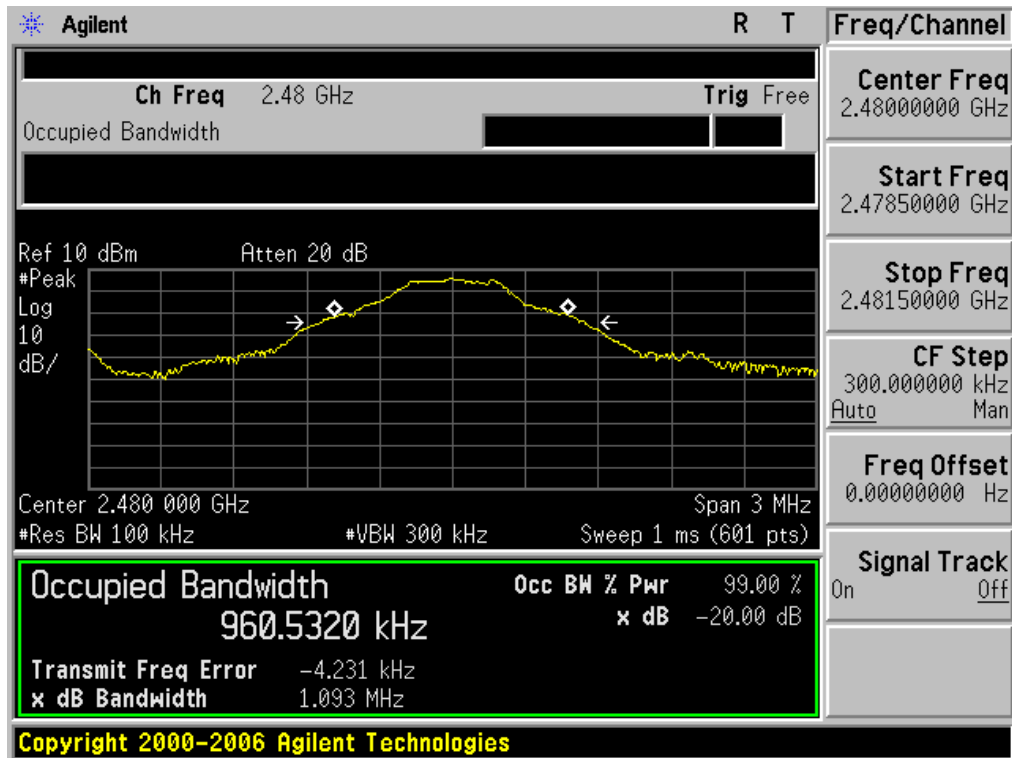




BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.223	1.369	PASS
	Middle Channel	1.223	1.368	PASS
	High Channel	1.214	1.358	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

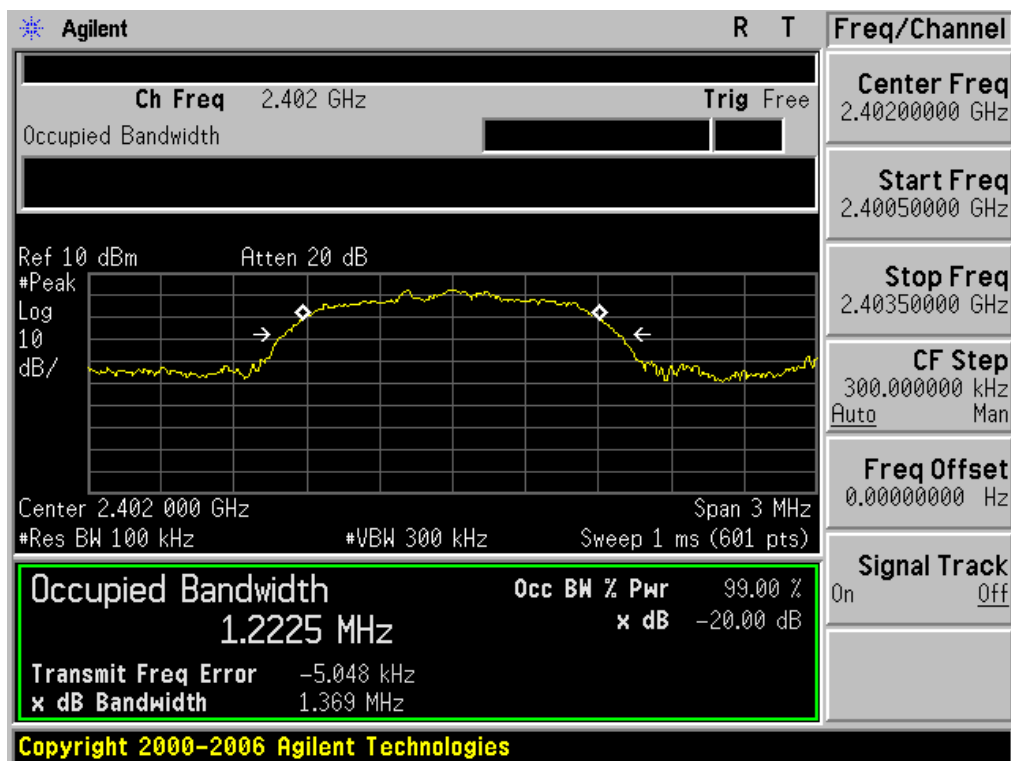




### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

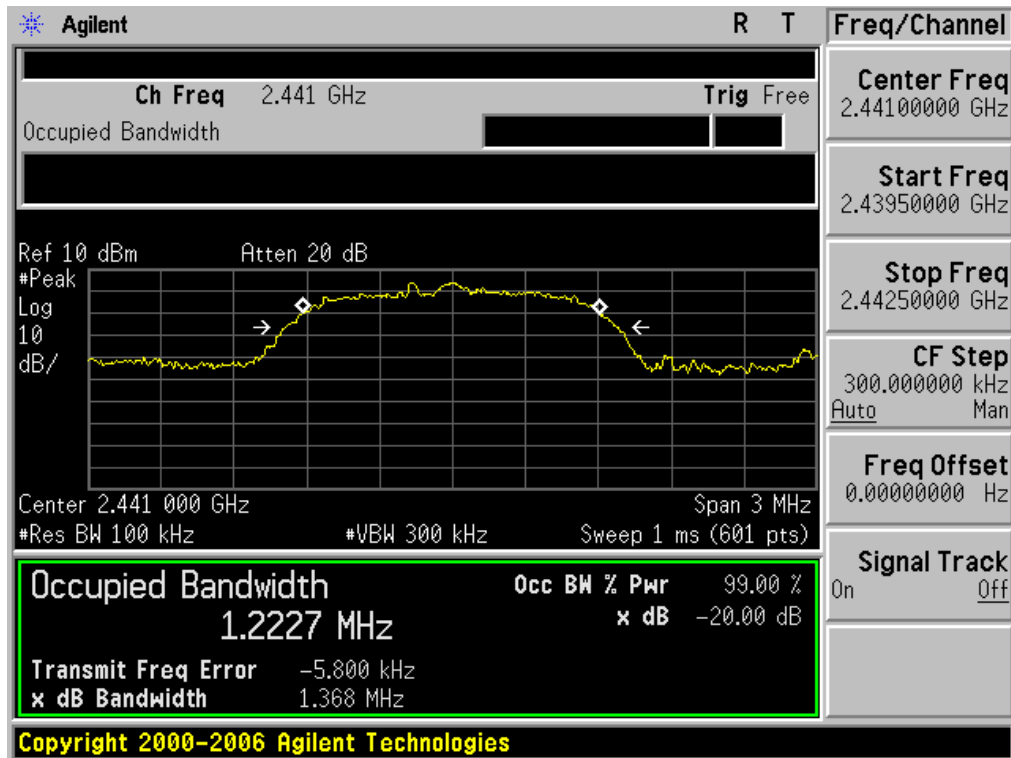


### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

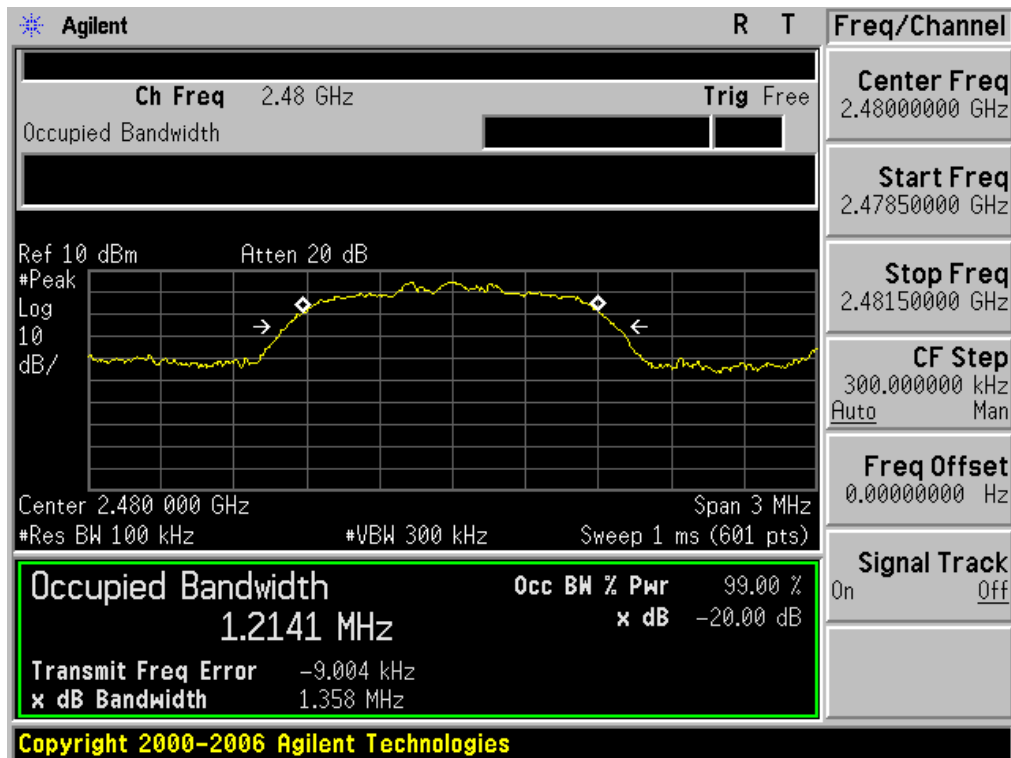



BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.234	1.383	PASS
	Middle Channel	1.244	1.389	PASS
	High Channel	1.224	1.379	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

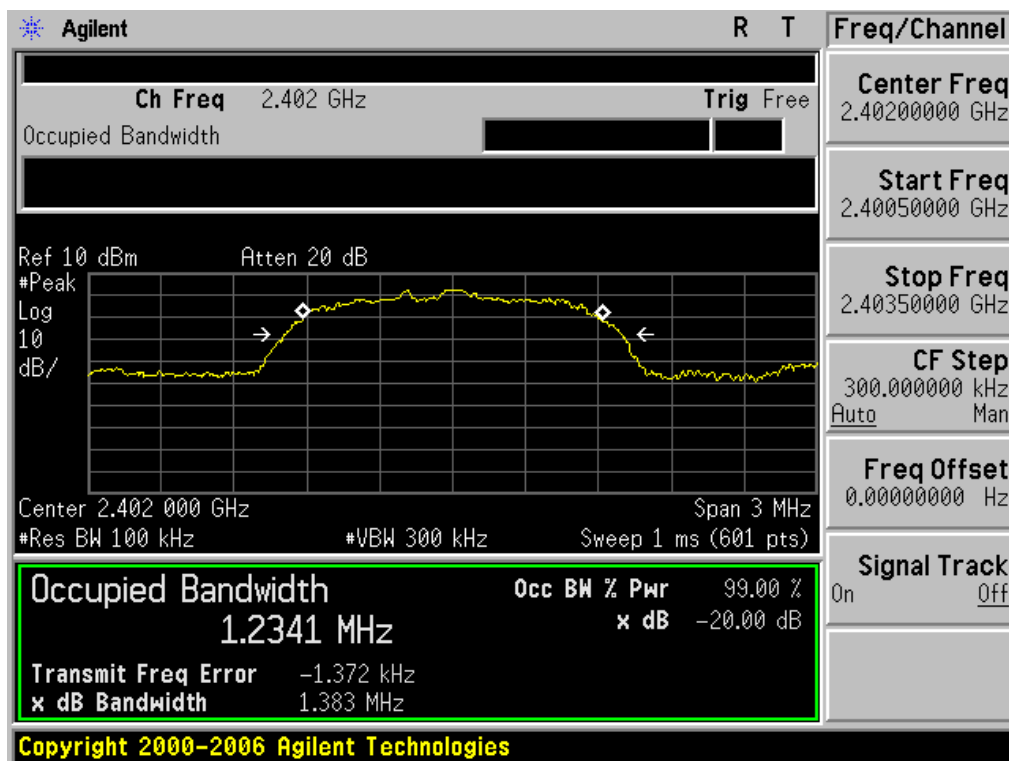






TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

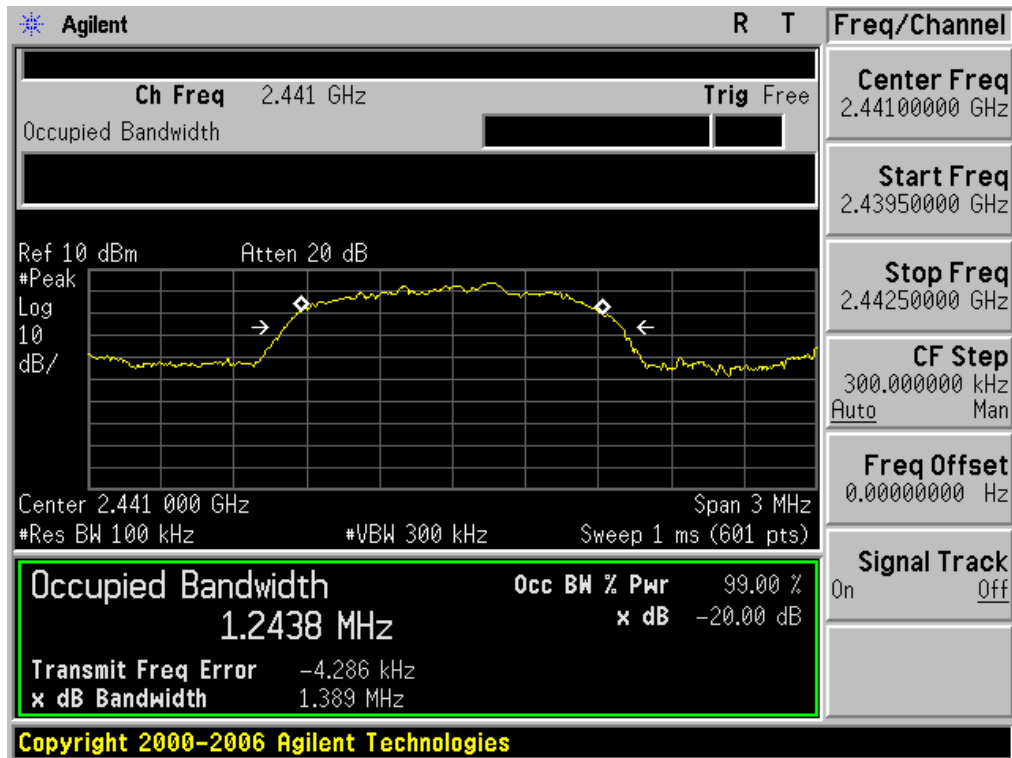

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

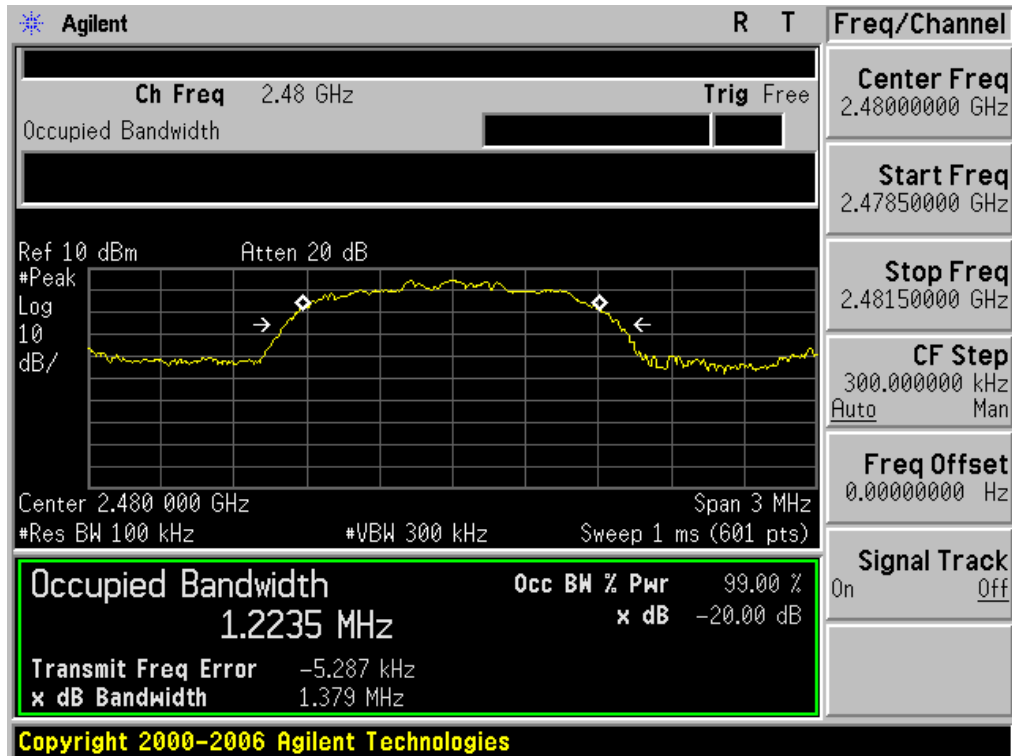




Left


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	0.975	1.103	PASS
	Middle Channel	0.969	1.120	PASS
	High Channel	0.979	1.110	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

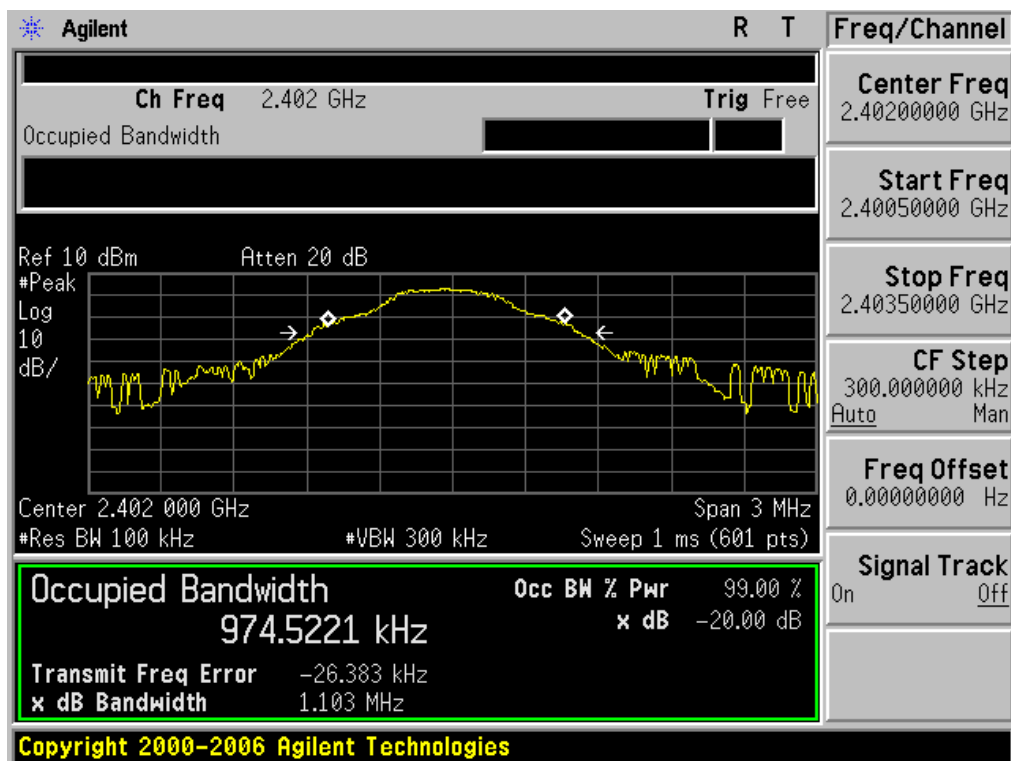




TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

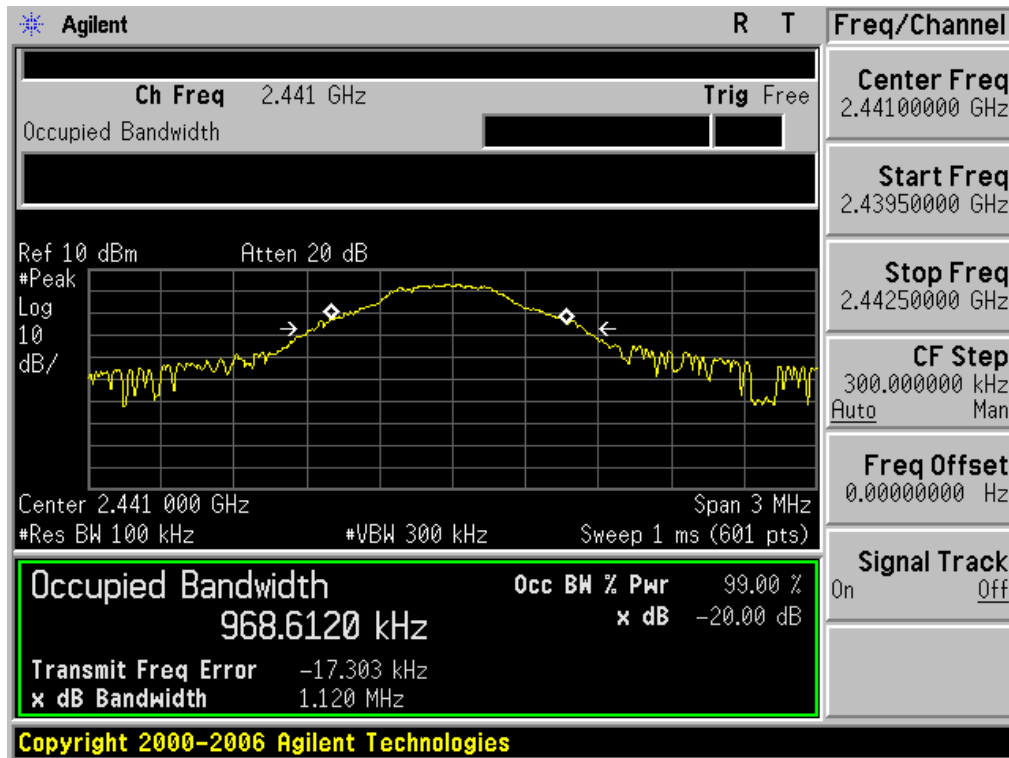


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

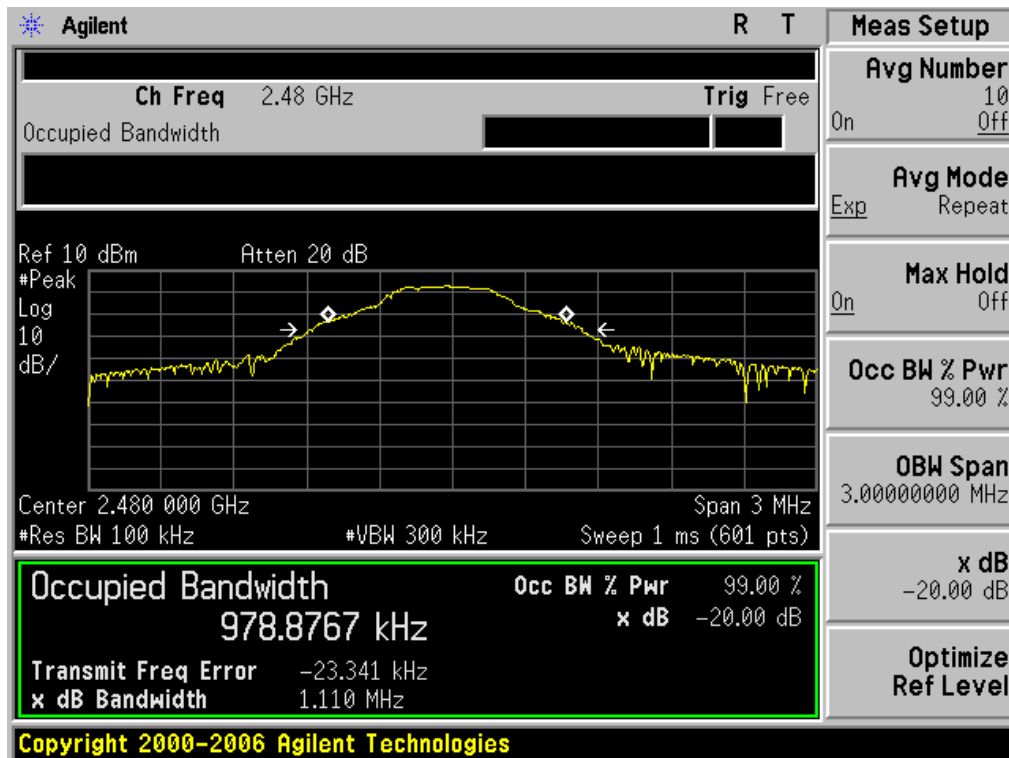




BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.236	1.405	PASS
	Middle Channel	1.236	1.399	PASS
	High Channel	1.246	1.419	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

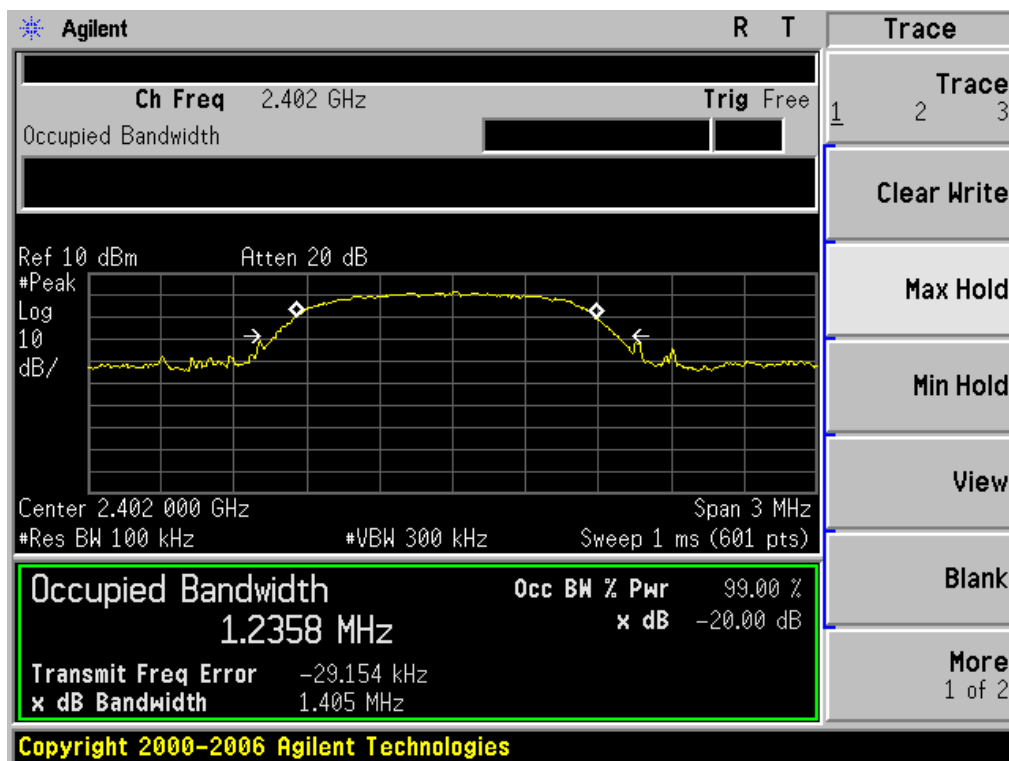




### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

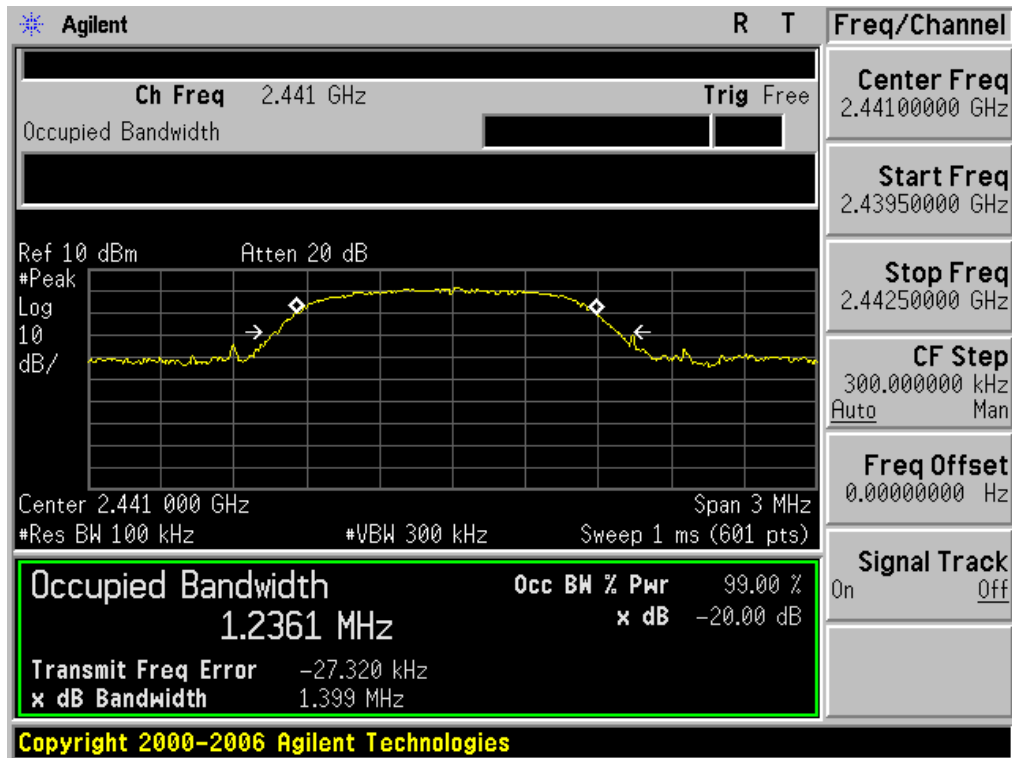


### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

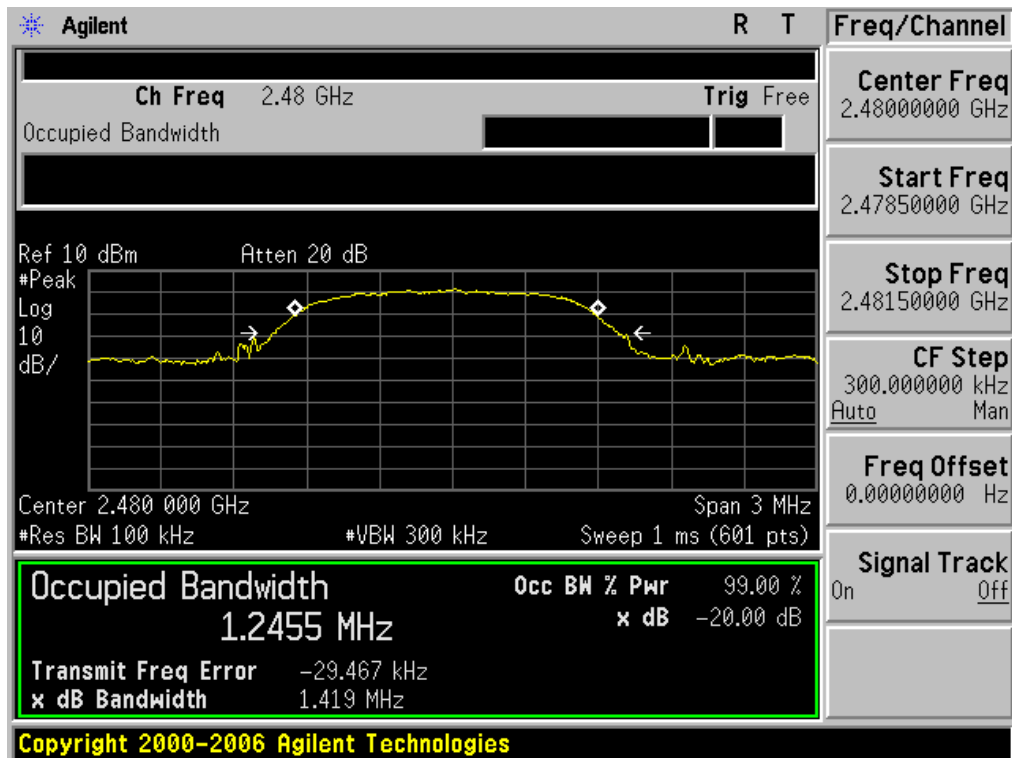




BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.241	1.406	PASS
	Middle Channel	1.242	1.414	PASS
	High Channel	1.254	1.422	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

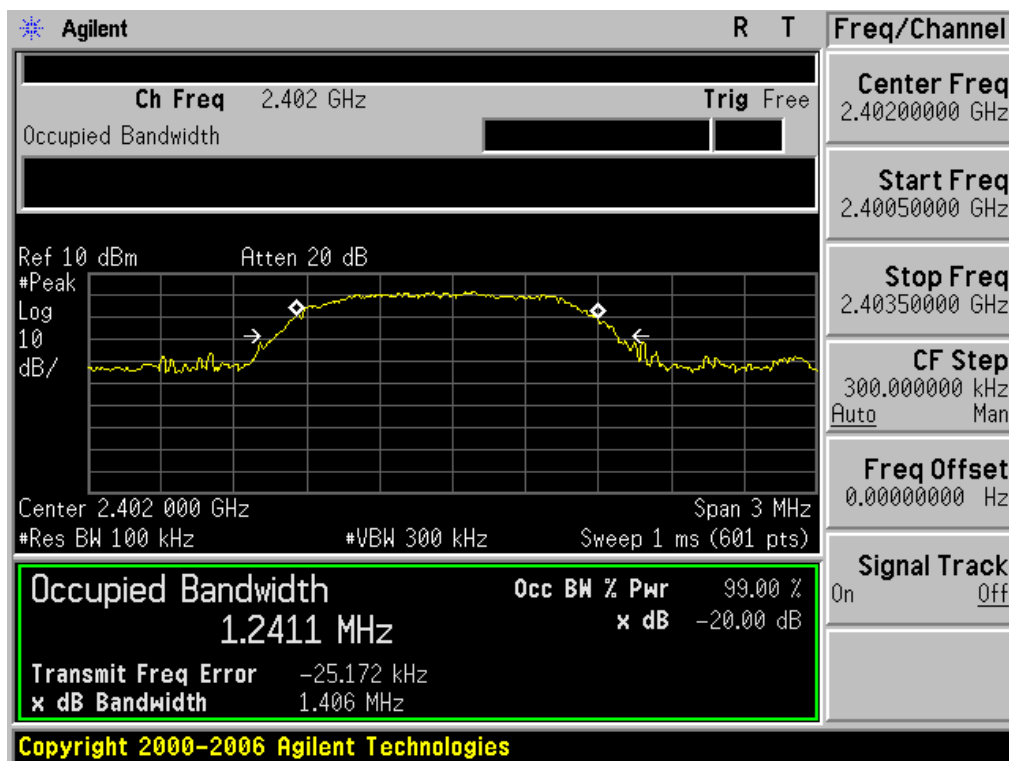




### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

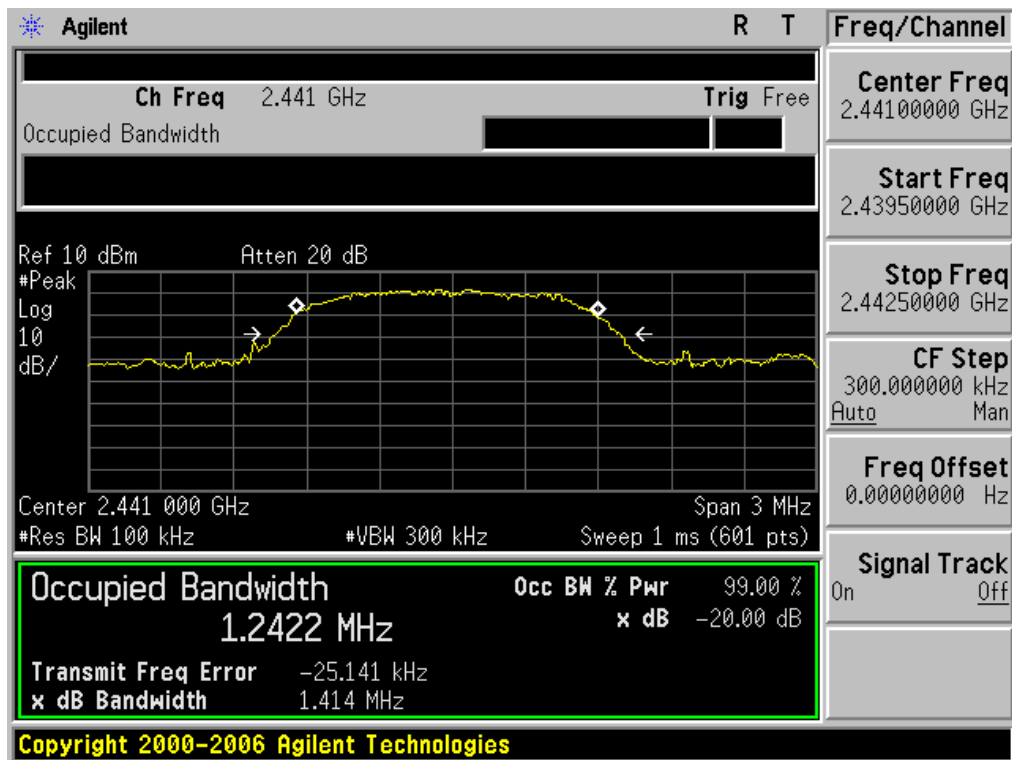

### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

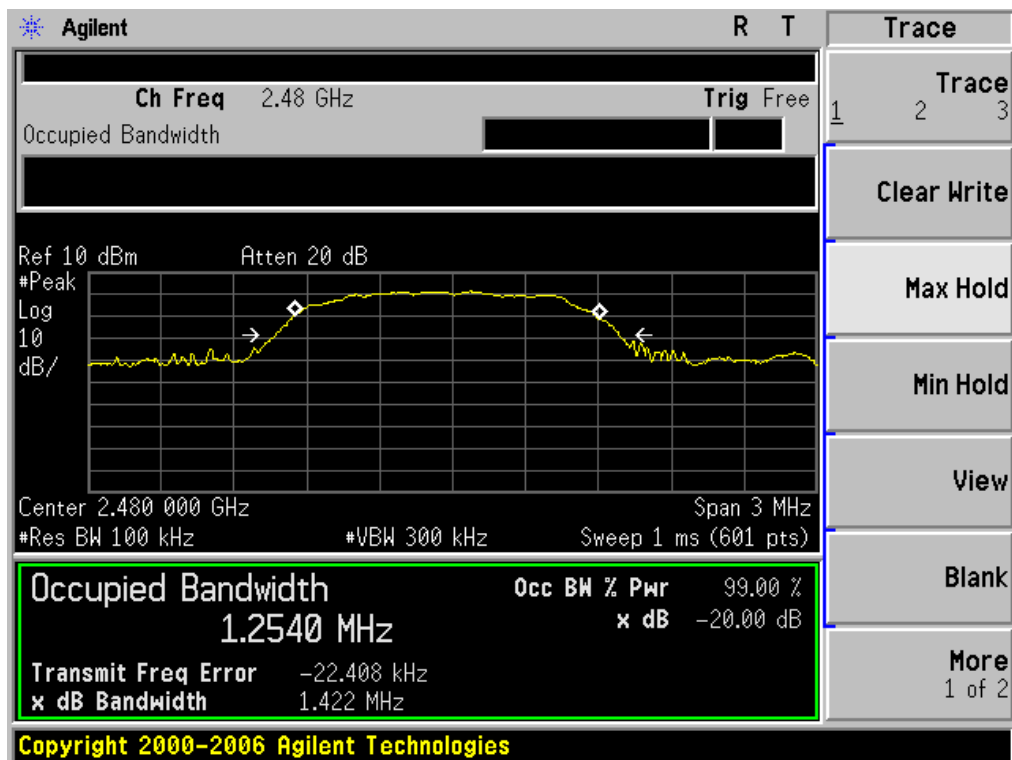

## 7. ANTENNA REQUIREMENT


### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### ANTENNA


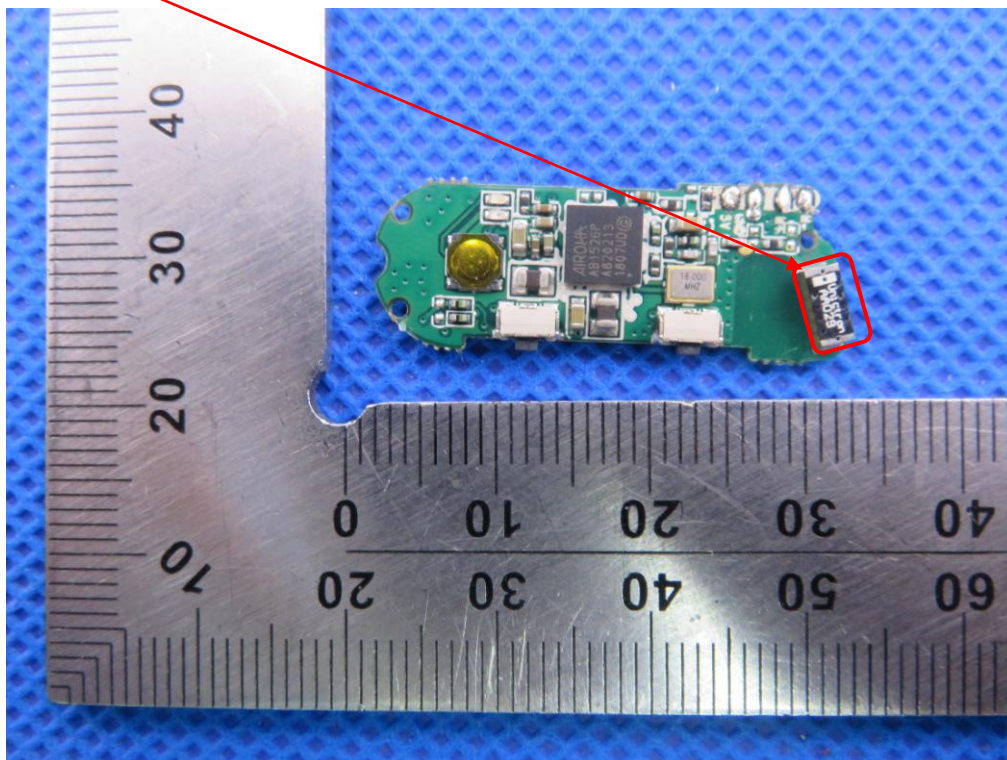




## 8. PHOTOGRAPH OF TEST

Right



FCC RADIATED EMISSION TEST SETUP

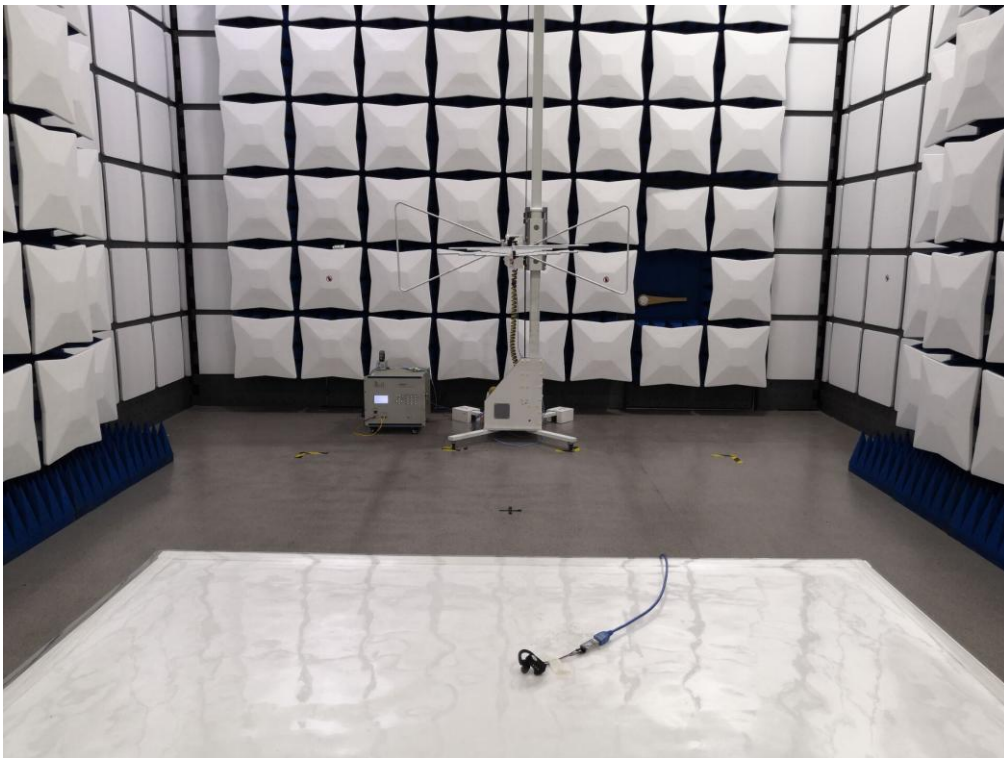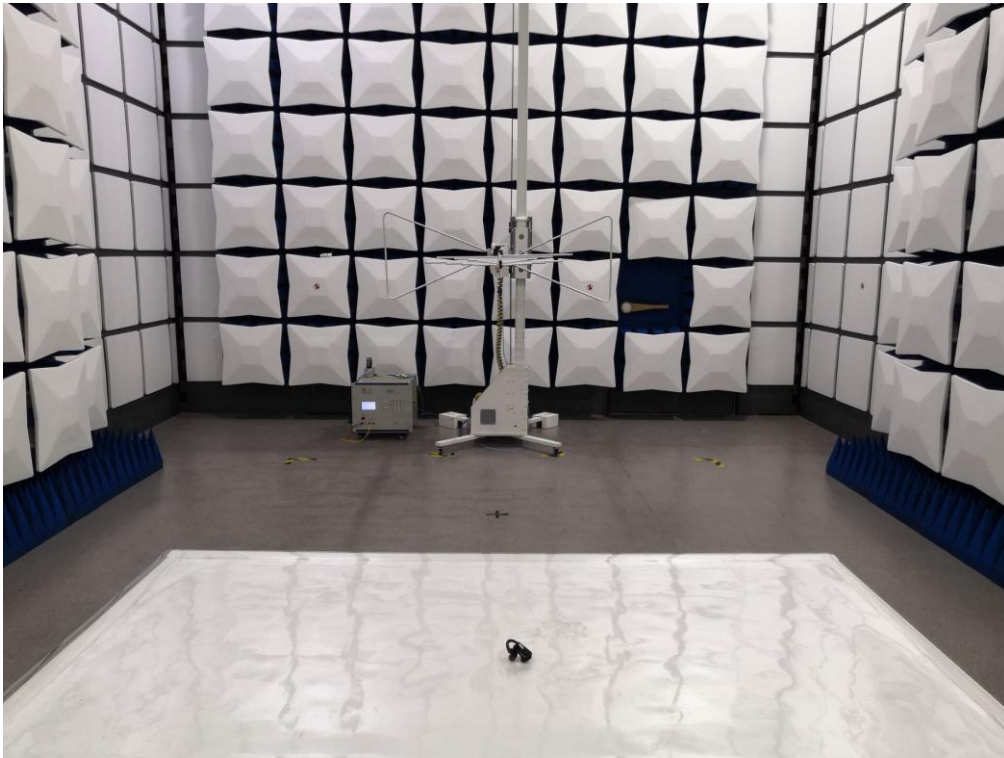



**Left**

**FCC RADIATED EMISSION TEST SETUP**

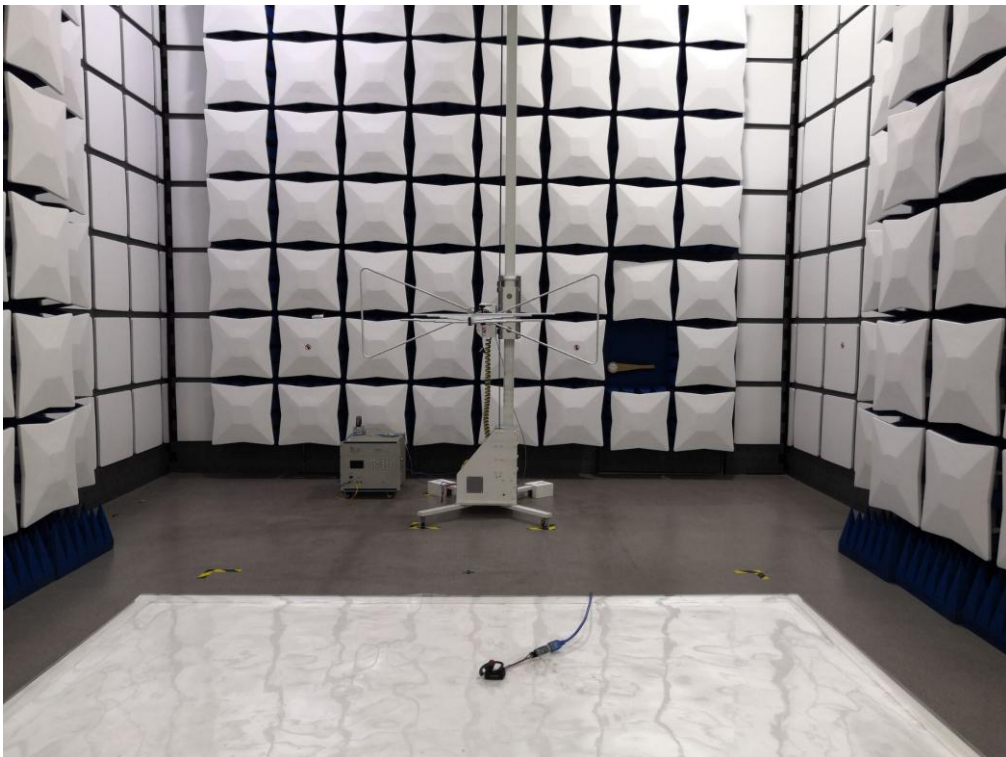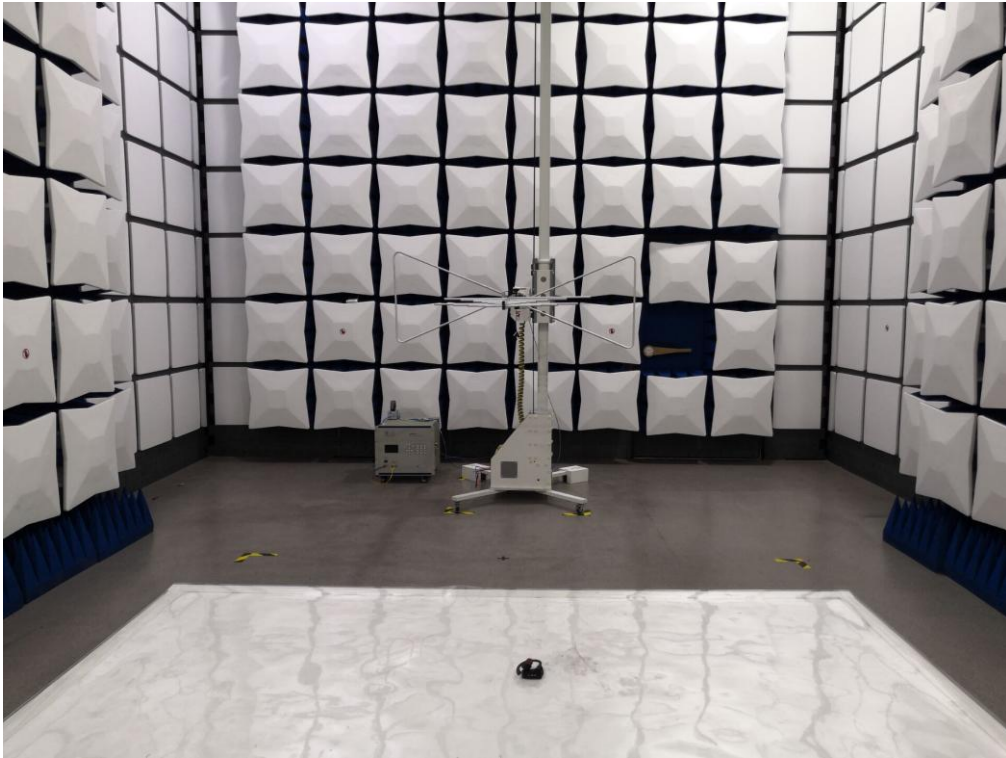





## 9. PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT





BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT




LEFT VIEW OF EUT





RIGHT VIEW OF EUT

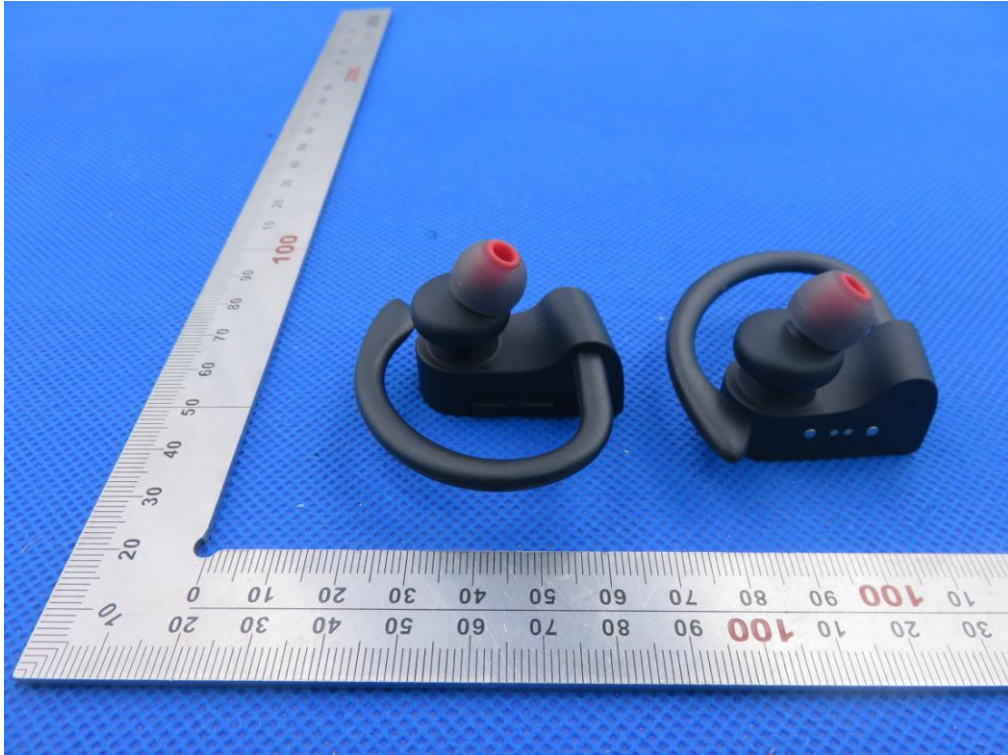


**Right**  
VIEW OF EUT (PORT)








OPEN VIEW OF EUT

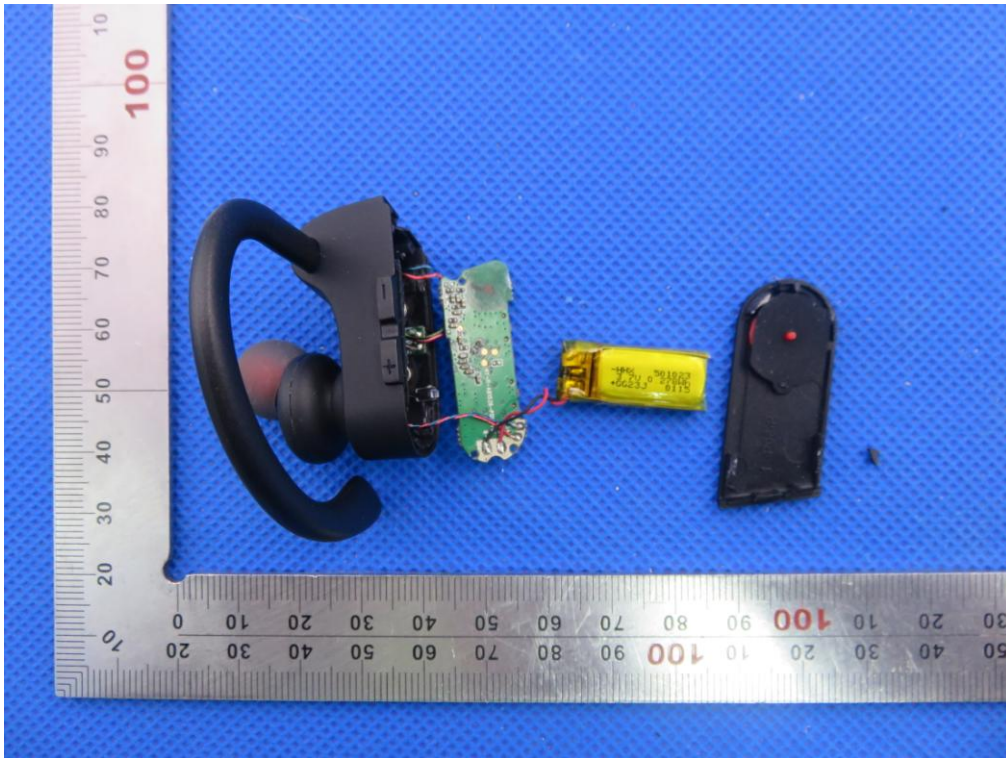


VIEW OF BATTERY



INTERNAL VIEW OF EUT-1

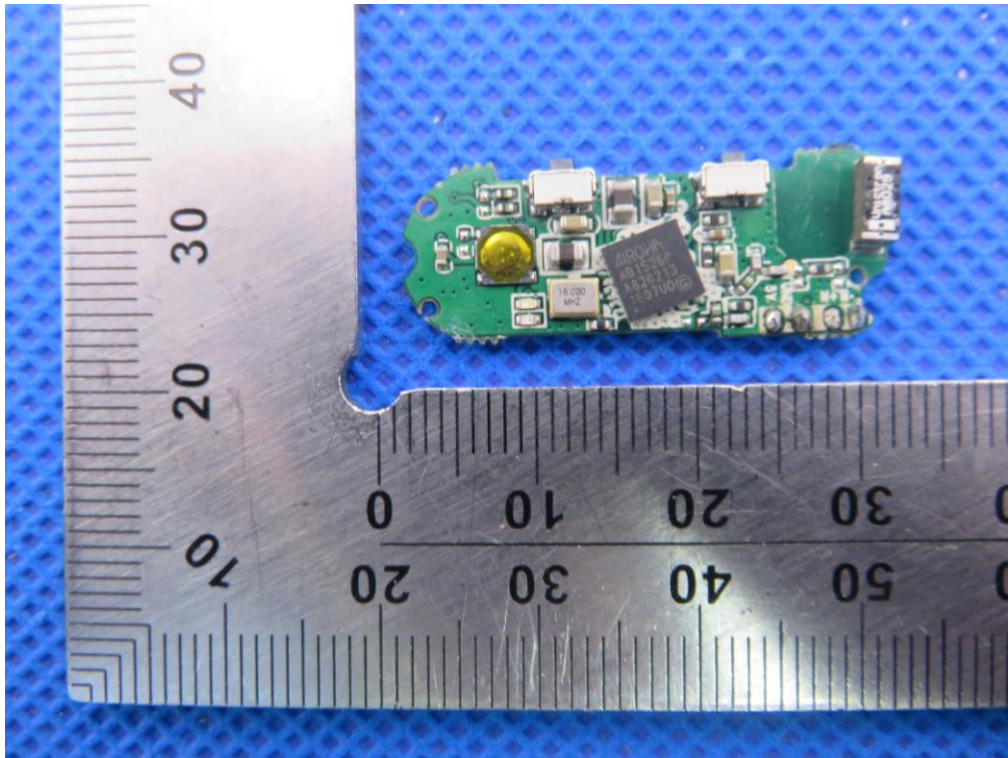


INTERNAL VIEW OF EUT-2

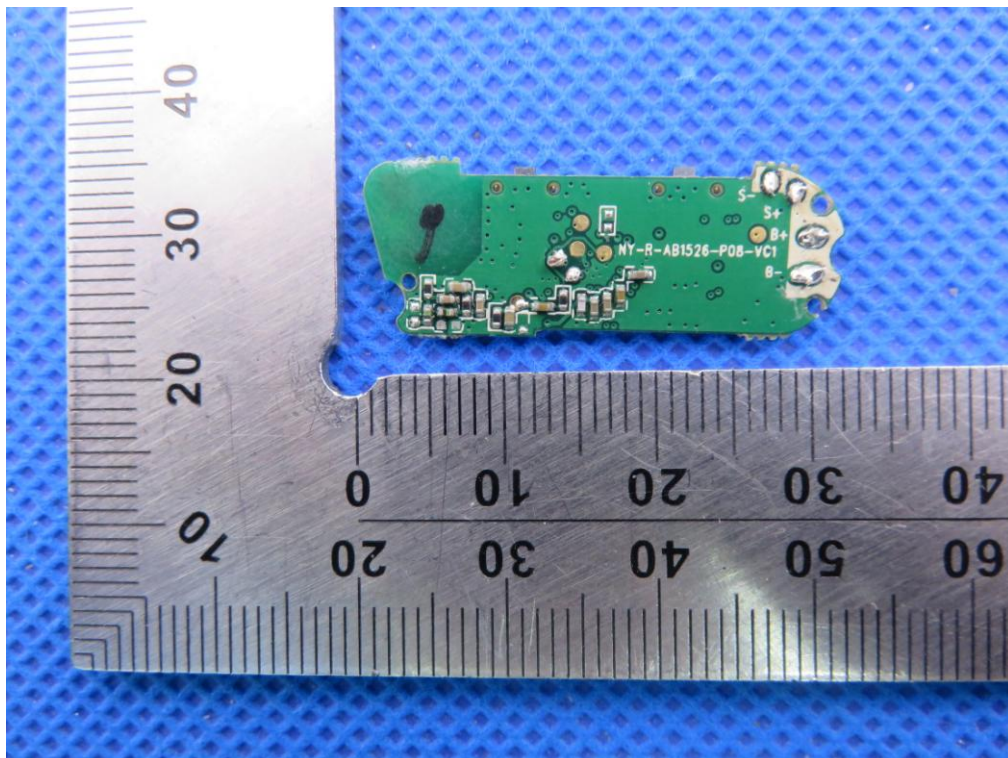




INTERNAL VIEW OF EUT-3

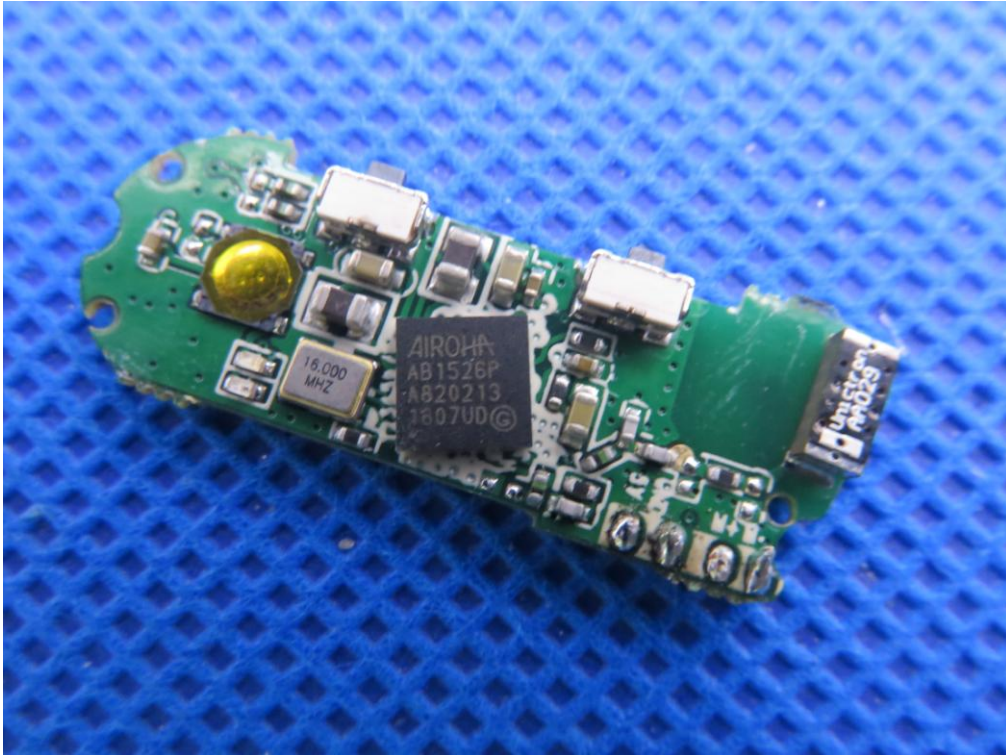

**Left**  
VIEW OF EUT (PORT)



OPEN VIEW OF EUT

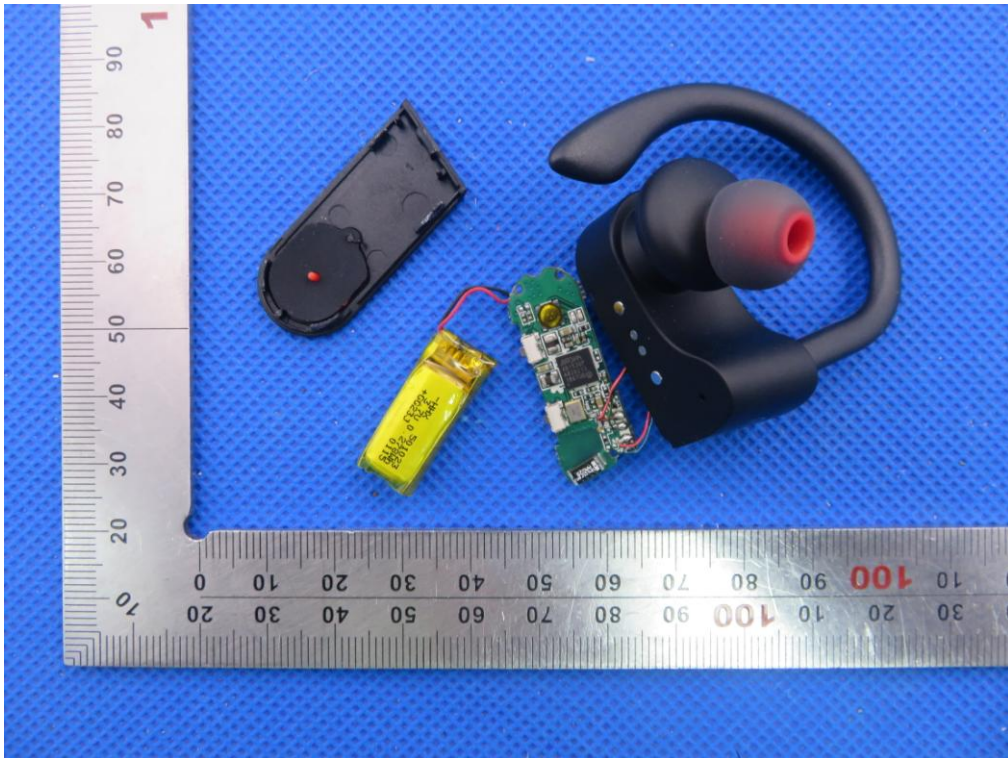


VIEW OF BATTERY






INTERNAL VIEW OF EUT-1

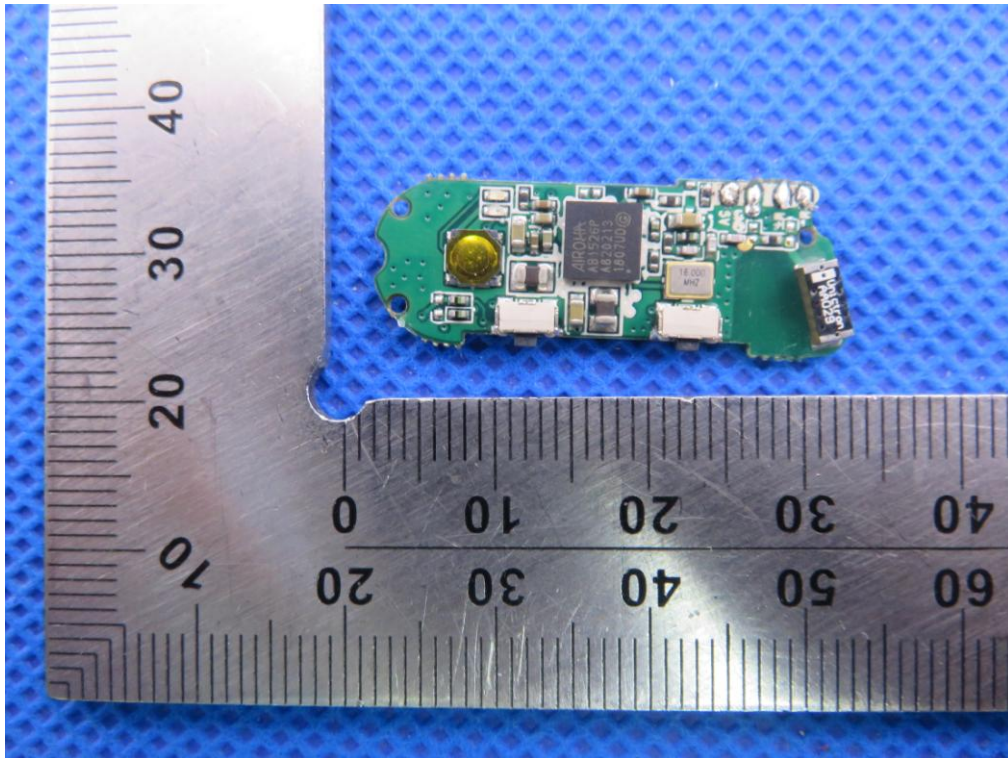


INTERNAL VIEW OF EUT-2

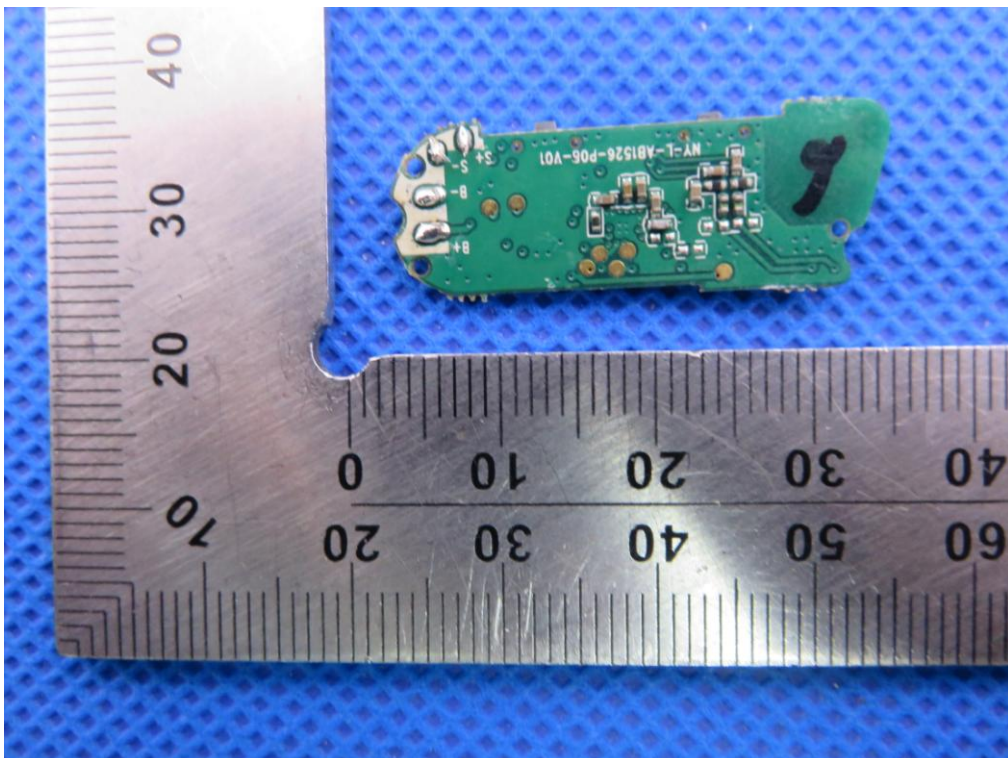



INTERNAL VIEW OF EUT-3

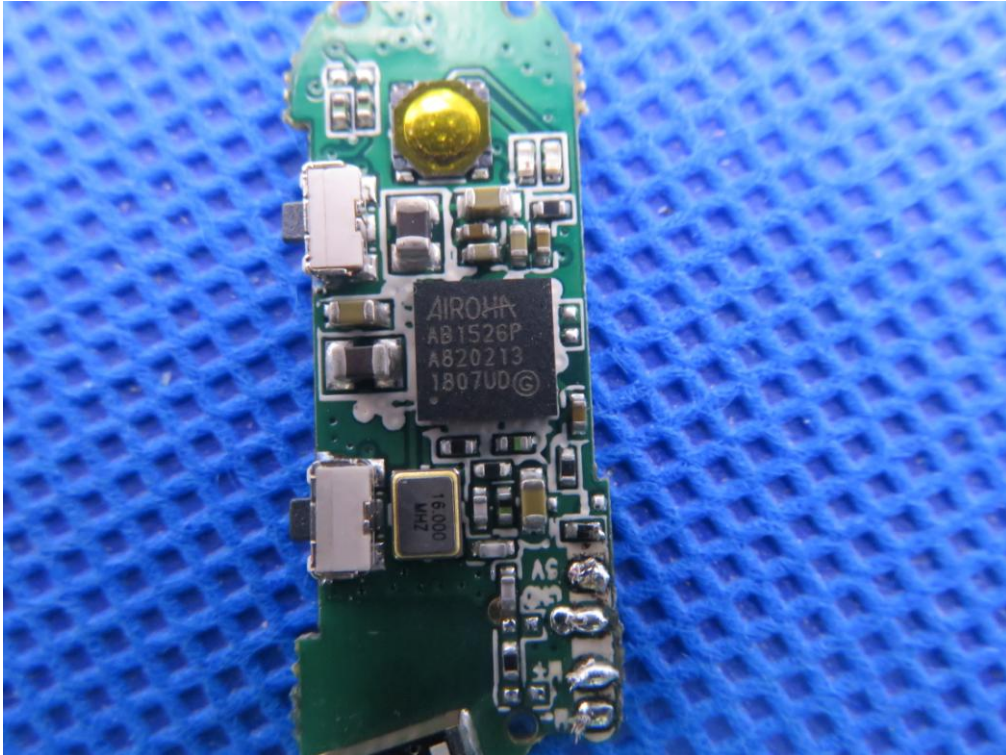

---END OF REPORT---