



FCC TEST REPORT

FCC ID: 2AFCB-LY-136

On Behalf of

Shenzhen Longzhiyuan Technology Co., Ltd.

Wi-Fi Video Doorbell

Model No.: LY-136

Prepared for : Shenzhen Longzhiyuan Technology Co., Ltd.
Address : 2F & 5F, Bldg #2, Zhuangbian 2nd Industrial Park, Hezhou Community,
Hangcheng, Bao'an, Shenzhen City, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2001047-C01-R02
Date of Receipt : January 09, 2020
Date of Test : January 09, 2020-March 12, 2020
Date of Report : March 12, 2020
Version Number : V0

Contents

1. General Information.....	5
1.1. Description of Device (EUT)	5
1.2. Accessories of Device (EUT).....	6
1.3. Tested Supporting System Details	6
1.4. Test Facility	6
2. Summary of test	7
2.1. Summary of test result	7
2.2. Block Diagram	8
2.3. Test mode	8
2.4. Test Conditions.....	8
2.5. Measurement Uncertainty (95% confidence levels, k=2)	8
2.6. Test Equipment.....	9
3. Radiation Emission	10
3.1. Radiation Emission Limits(15.209&231)	10
3.2. Test Setup	10
3.3. Test Procedure	12
3.4. Test Equipment Setting For emission test.....	12
3.5. Test Condition	12
3.6. Test Result.....	12
4. POWER LINE CONDUCTED EMISSION	17
4.1. Conducted Emission Limits (15.207)	17
4.2. Test Setup	17
4.3. Test Procedure	18
4.4. Test Results	18
5. Occupied bandwidth.....	20
5.1. Test limit.....	20
5.2. Method of measurement.....	20
5.3. Test Setup	20
5.4. Test Results	20
6. Transmission time.....	22
6.1. Test limit.....	22
6.2. Method of measurement.....	22
6.3. Test Setup	22
6.4. Test Results	23
7. Antenna Requirement	24
7.1. Standard Requirement	24
7.2. Antenna Connected Construction	24
7.3. Result.....	24
8. Test setup photo	25

TEST REPORT DECLARATION

Applicant : Shenzhen Longzhiyuan Technology Co., Ltd.
 Address : 2F & 5F, Bldg #2, Zhuangbian 2nd Industrial Park, Hezhou Community,
 Hangcheng, Bao'an, Shenzhen City, China
 Manufacturer : Shenzhen Longzhiyuan Technology Co., Ltd.
 Address : 2F & 5F, Bldg #2, Zhuangbian 2nd Industrial Park, Hezhou Community,
 Hangcheng, Bao'an, Shenzhen City, China
 EUT Description : Wi-Fi Video Doorbell
 (A) Model No. : LY-136
 (B) Trademark : N/A



Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.231
ANSI C63.10-2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:	Ella Liang Project Engineer	
Approved by (name + signature).....:	Simple Guan Project Manager	
Date of issue.....	March 12, 2020	

Revision History

Revision	Issue Date	Revisions	Revised By
V0	March 12, 2020	Initial released Issue	Simple Guan

1. General Information

1.1. Description of Device (EUT)

EUT	: Wi-Fi Video Doorbell
Model No.	: LY-136
DIFF.	: N/A.
Trade mark	: N/A
Power supply	: DC 3.7V by battery or DC 5V from USB port
Operation frequency	: 433.92MHz
Modulation	: ASK
Antenna Type	: Internal Antenna, Maximum Gain is 3dBi
Software version	: 1.2.30
Hardware version	: V1.2

1.2. Accessories of Device (EUT)

Accessories1 : /
Manufacturer : /
Model : /
Power supply : /

1.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or DOC
/	/	/	/	/	/

1.4. Test Facility

Shenzhen Alpha Product Testing Co., Ltd
Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
Registration Number: 293961
July 25, 2017 Certificated by IC
Registration Number: 12135A

2. Summary of test

2.1. Summary of test result

Description of Test Item	Standard	Results
Spurious Emission	Section 15.231(b)&15.209	PASS
Conduction Emission	Section 15.207	PASS
Occupied bandwidth	Section 15.231(c)	PASS
Transmission time	Section 15.231(a)(5)	PASS
Band Edge	Section 15.231(b)(1)	N/A
Antenna Requirement	Section 15.203	PASS
Note : Test according to ANSI C63.10-2013		

2.2. Block Diagram

- For radiated emissions test: EUT was placed on a turn table, which is 0.8 meters high above ground for below 1 GHz test and 1.5 meters high above ground for below 1 GHz test . EUT was set into test mode before test. New battery is used during all test, pretest should perform under X Y Z three direction and chose the worst direction to test.



2.3. Test mode

EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
ASK	CH1	433.92

2.4. Test Conditions

Temperature range	21-25°C
Humidity range	40-75%
Pressure range	86-106kPa

2.5. Measurement Uncertainty (95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.16dB(Polarize: H)
	4.13dB(Polarize: V)
Uncertainty for radio frequency	5.4×10^{-8}
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.6. Test Equipment

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2019.09.06	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	102137	2019.09.05	1 Year
Spectrum analyzer	Agilent	N9020A	MY499100060	2019.09.05	1 Year
Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-10208 2-Wa	2019.09.06	1 Year
Receiver	R&S	ESCI	101165	2019.09.05	1 Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2018.04.13	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2018.04.13	2Year
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00059	2019.09.07	2Year
Cable	Resenberger	N/A	No.1	2019.09.05	1 Year
Cable	Resenberger	N/A	No.2	2019.09.05	1 Year
Cable	Resenberger	N/A	No.3	2019.09.05	1 Year
Pre-amplifier	HP	HP8347A	2834A00455	2019.09.05	1 Year
Pre-amplifier	Agilent	8449B	3008A02664	2019.09.05	1 Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2019.09.05	1 Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2019.09.05	1 Year
20db Attenuator	ICPROBING	IATS1	82347	2019.08.26	1 Year
Horn Antenna	SCHWARZBECK	BBHA9170	00946	2019.09.07	2 Year
Preamplifier	SKET	LNPA_1840-50	SK2018101801	2019.09.06	1 Year
Power Meter	Agilent	E9300A	MY41496625	2019.09.06	1 Year
Temp. & Humid. Chamber	Weihuang	WHTH-1000-40-8 80	100631	2019.09.06	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	20140927-6	2019.09.05	1 Year

3. Radiation Emission

3.1. Radiation Emission Limits(15.209&231(b))


Frequency (MHz)	Field Strength Limits at 3 metres (watts, e.i.r.p.)		
	uV/m	dB uV/m	Measurement distance(m)
0.009-0.490	2400/F(kHz)	XX	300
0.490-1.705	24000/F(kHz)	XX	30
1.705-30	30	29.5	30
30~88	100(3nW)	40	3
88~216	150(6.8nW)	43.5	3
216~960	200(12nW)	46	3
Above960	500(75nW)	54	3
Fundamental frequency		80.83(AV) 100.83(PK)	3
spurious emissions frequencies		60.83(AV) 80.83(PK)	3

NOTE:


- a) The tighter limit applies at the band edges.
- b) Emission Level(dB uV/m)=20log Emission Level(Uv/m)

3.2. Test Setup


See the next page.

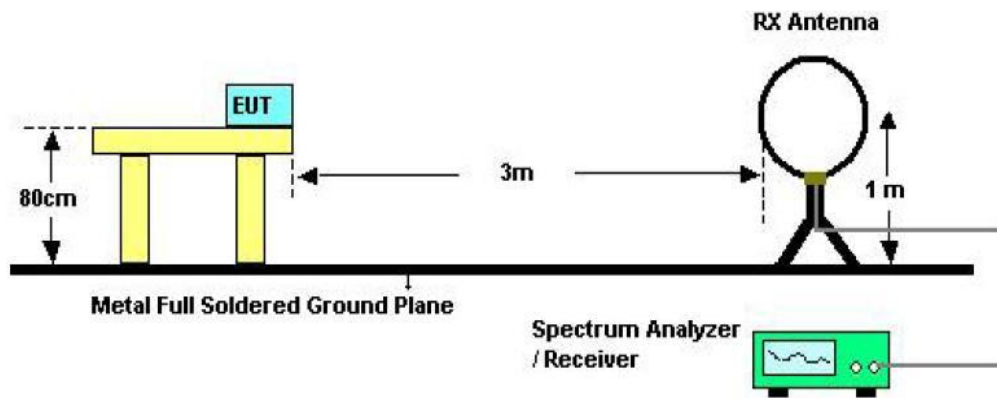

Below 30MHz Test Setup

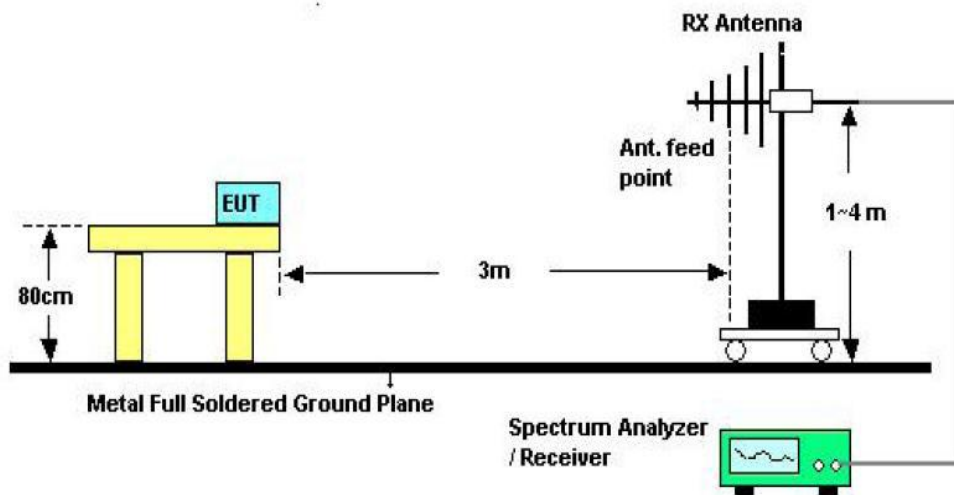

Above 30MHz Test Setup

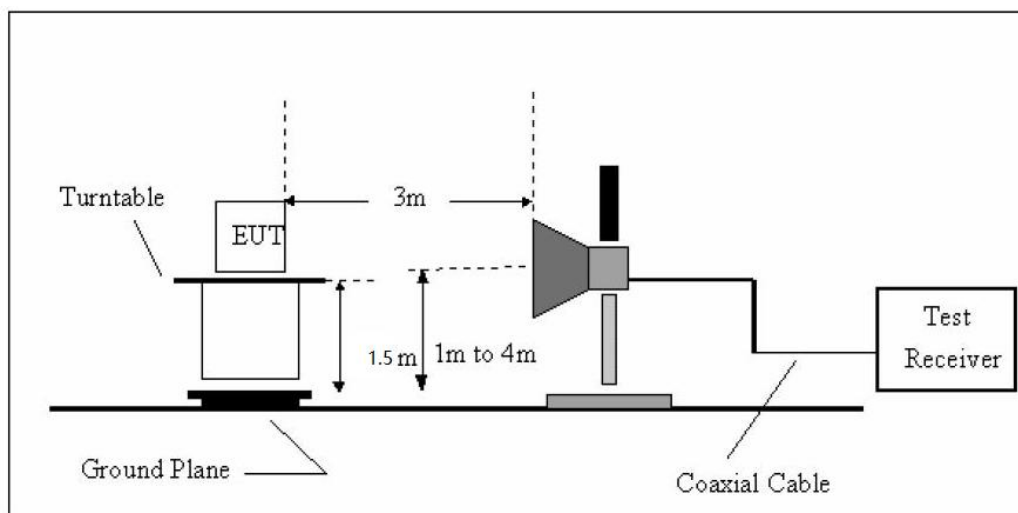

Above 1GHz Test Setup

3.3. Test Procedure

- a) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground for frequency up to 1GHz and 1.5m high for frequency above 1GHz, The table was rotated 360 degrees to determine the position of the highest radiation
- b) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- c) The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Quasi Peak Detector mode re-measured
- d) If Peak value comply with QP limit Below 1GHz. The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.
- e) For the actual test configuration, please see the test setup photo.

3.4. Test Equipment Setting For emission test.

9KHz~150KHz	RBW 200Hz	VBW 1KHz
150KHz~30MHz	RBW 9KHz	VBW 30KHz
30MHz~1GHz	RBW 120KHz	VBW 300KHz
Above 1GHz	RBW 1MHz	VBW 3MHz

3.5. Test Condition

Continual Transmitting in maximum power (The new battery be used during Test)

3.6. Test Result

We have scanned the 10th harmonic from 9KHz to the EUT.
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Notes: 1 --Means other frequency and mode comply with standard requirements and at least have 20dB margin.

Correct Factor=Cable Loss+Antenna Factor-Amplifier Gain

Measurement Result=Reading + Correct Factor

Margin=Measurement Result-Limit

2 –Spectrum setting:


a. Peak setting 30MHz-1GHz, RBW=100KHz, VBW=300KHz.

3- PK measure result values is less than the AVG limit values, so AV measure result values test not applicable.

Radiated Emissions Result of Inside band

Below 1GHz

EUT Description	Wi-Fi Video Doorbell	Model No.	LY-136
Temperature	24°C	Humidity	56%
Pol	Vertical	Distance	3M
Test Voltage	DC 3.7V by battery	Test date	2020/1/17
Test mode	TX 433.92MHz		

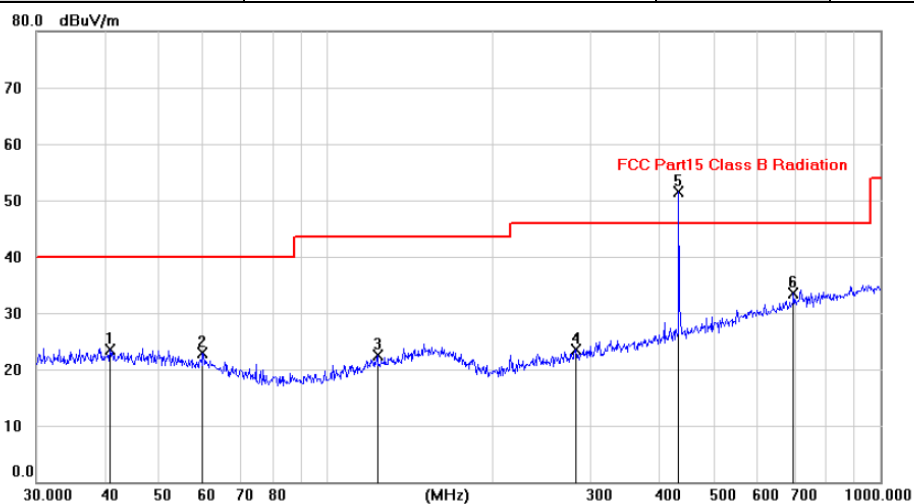


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		40.8016	9.08	14.37	23.45	40.00	-16.55	peak		
2		59.9219	9.58	13.25	22.83	40.00	-17.17	peak		
3		123.9155	9.23	13.26	22.49	43.50	-21.01	peak		
4		282.9852	9.76	13.66	23.42	46.00	-22.58	peak		
5	*	433.9129	34.42	17.17	51.59	46.00	5.59	peak		
6		698.3244	11.78	21.70	33.48	46.00	-12.52	peak		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	433.9129	34.42	17.17	51.59	100.83	-49.24	PK
2	433.9129	/	/	/	80.83	/	AV

Note:

- When the PK measure result value is less than the AVG limit value, the AV measure result values test not applicable.
- Margin = Result (Result = Reading + Factor) - Limit

Pol	Horizontal
------------	-------------------

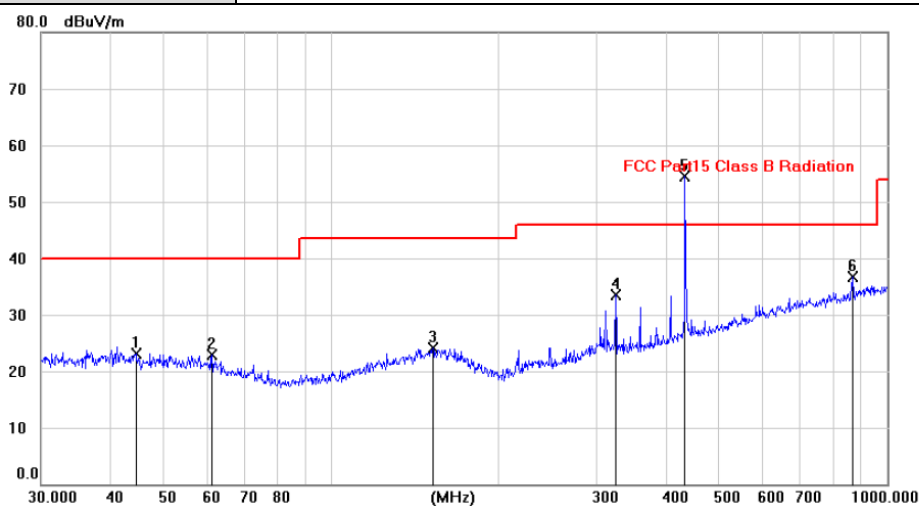

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		44.4619	8.92	14.17	23.09	40.00	-16.91			peak
2		61.0887	9.99	12.87	22.86	40.00	-17.14			peak
3		152.2899	8.97	15.06	24.03	43.50	-19.47			peak
4		325.4817	18.83	14.73	33.56	46.00	-12.44			peak
5	*	433.9129	37.31	17.17	54.48	46.00	8.48			peak
6		867.9120	13.04	23.62	36.66	46.00	-9.34			peak


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	433.9129	37.31	17.17	54.48	100.83	-46.32	PK
2	433.9129	/	/	/	80.83	/	AV

Note:

1. When the PK measure result value is less than the AVG limit value, the AV measure result values test not applicable.
2. Margin = Result (Result = Reading + Factor) - Limit


Above 1GHz

EUT Description	Wi-Fi Video Doorbell	Model No.	LY-136
Temperature	24°C	Humidity	56%
Pol	Vertical	Distance	3M
Test Voltage	DC 3.7V by battery	Test date	2020/1/17
Test mode	TX 433.92MHz		

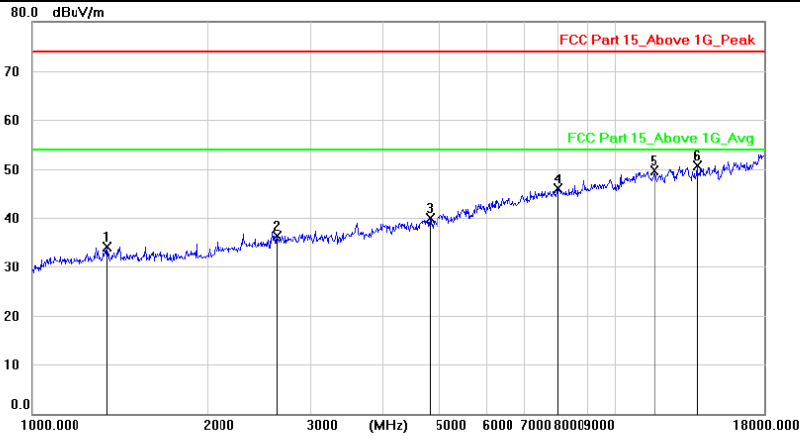

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		1345.991	53.34	-19.31	34.03	74.00	-39.97	peak		
2		2625.796	51.63	-15.28	36.35	74.00	-37.65	peak		
3		4813.840	48.46	-8.46	40.00	74.00	-34.00	peak		
4		7987.583	47.26	-1.29	45.97	74.00	-28.03	peak		
5		11681.10	47.06	2.63	49.69	74.00	-24.31	peak		
6	*	13833.02	45.41	5.28	50.69	74.00	-23.31	peak		

Pol **Horizontal**

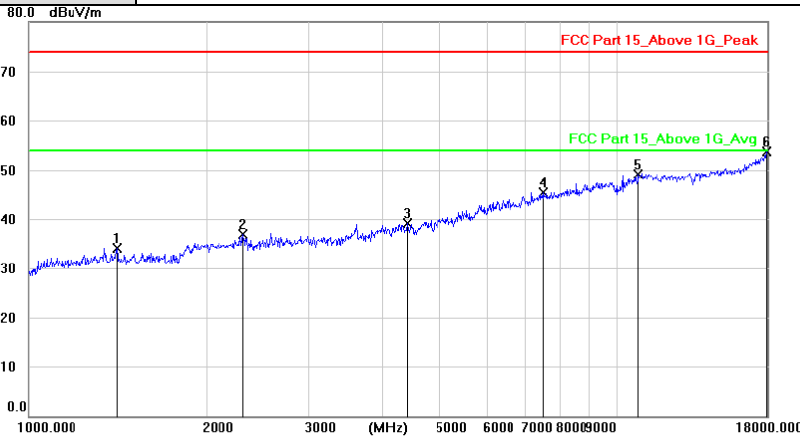

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		1413.371	53.32	-19.24	34.08	74.00	-39.92	peak		
2		2313.556	52.64	-15.75	36.89	74.00	-37.11	peak		
3		4398.729	48.97	-9.90	39.07	74.00	-34.93	peak		
4		7493.313	46.89	-1.50	45.39	74.00	-28.61	peak		
5		10854.25	46.82	2.28	49.10	74.00	-24.90	peak		
6	*	17994.79	40.32	13.33	53.65	74.00	-20.35	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.
 2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

4. POWER LINE CONDUCTED EMISSION

4.1. Conducted Emission Limits (15.207)


Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3. The limit decreases in line with the logarithm of the frequency in the rang of 0.15 to 0.50 MHz.

4.2. Test Setup

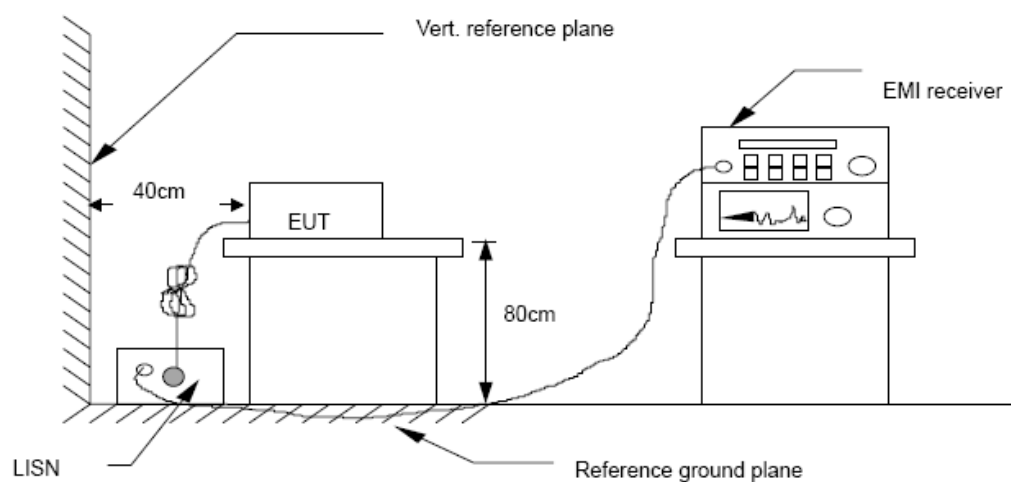


4.3. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCI) is set at 9 kHz.


4.4. Test Results

EUT Description	Wi-Fi Video Doorbell	Model No.	LY-136
Temperature	24°C	Humidity	56%
Pol	Line	Test date	2020/01/16
Test Voltage	AC 120V/60Hz	Test mode	TX 433.92MHz

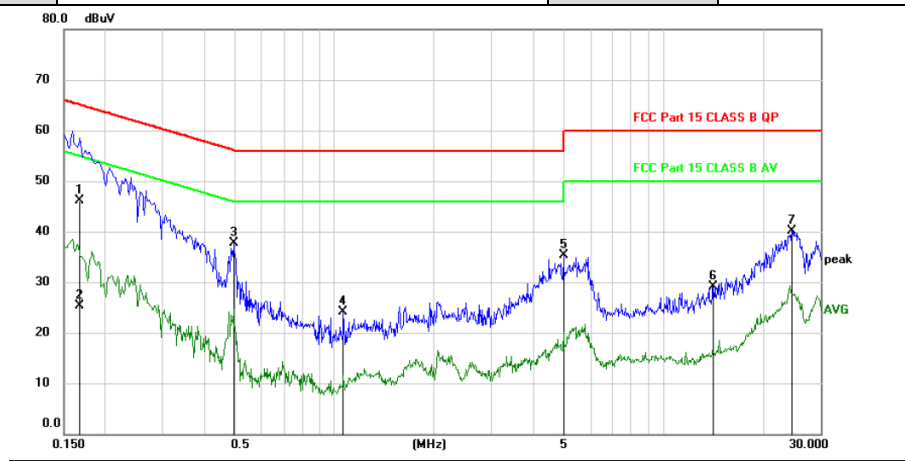

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1680	36.21	9.93	46.14	65.06	-18.92	QP	
2		0.1680	15.29	9.93	25.22	55.06	-29.84	AVG	
3	*	0.4920	27.70	9.96	37.66	56.13	-18.47	peak	
4		1.0650	14.13	9.91	24.04	56.00	-31.96	peak	
5		4.9530	25.20	10.04	35.24	56.00	-20.76	peak	
6		14.1780	18.84	10.31	29.15	60.00	-30.85	peak	
7		24.6540	29.60	10.45	40.05	60.00	-19.95	peak	

Pol	Neutral
------------	---------

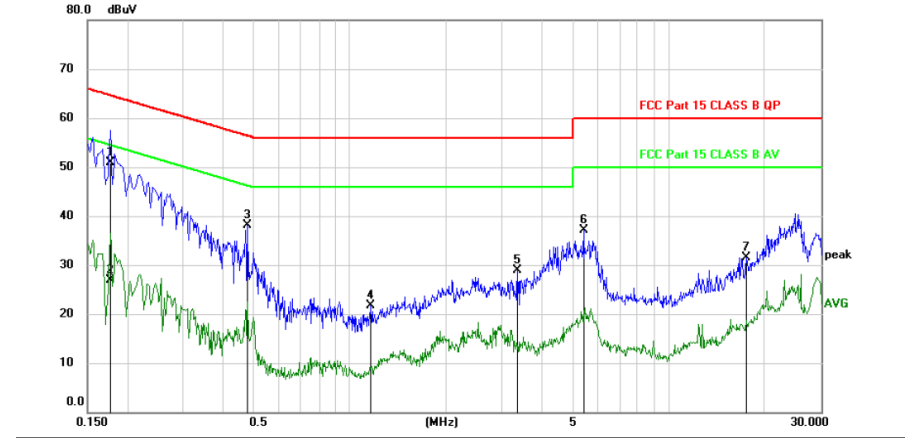

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1770	40.89	9.93	50.82	64.63	-13.81	QP	
2		0.1770	17.05	9.93	26.98	54.63	-27.65	AVG	
3		0.4770	28.11	9.96	38.07	56.39	-18.32	peak	
4		1.1640	11.76	9.89	21.65	56.00	-34.35	peak	
5		3.3630	18.85	9.96	28.81	56.00	-27.19	peak	
6		5.3940	27.08	10.06	37.14	60.00	-22.86	peak	
7		17.5530	21.17	10.40	31.57	60.00	-28.43	peak	

Note: 1. *:Maximum data; x:Over limit; !:over margin.
 2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

5. Occupied bandwidth

5.1. Test limit

Please refer section RSS-210 & 15.231


According to §15.231(C), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz.

5.2. Method of measurement

a)The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

b)The test receiver RBW set 30KHz,VBW set 30KHz,Sweep time set auto.

5.3. Test Setup

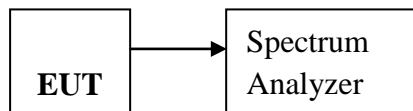


5.4. Test Results

Mode	Freq (MHz)	20dB Bandwidth (KHz)	99% Bandwidth	Limit (kHz)	Conclusion
ASK	433.92	144.4	/	1084.8	PASS

Note: Limit = 433.92MHz *0.25% = 1084.8 kHz

433.92MHz

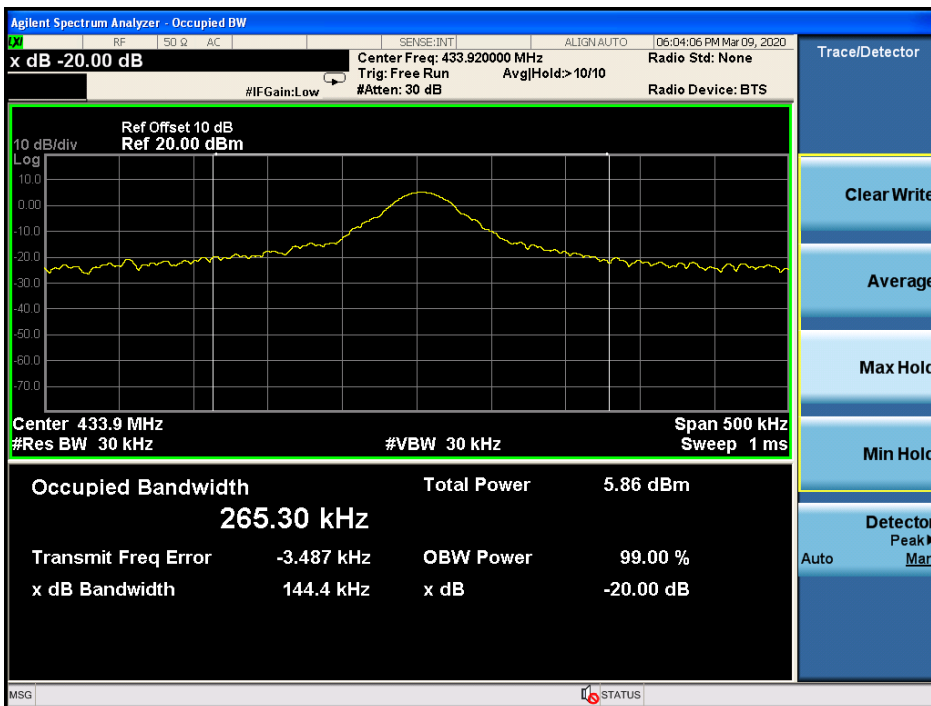

6. Transmission time

6.1. Test limit

Please refer section RSS-210 & 15.231

According to §15.231(a)(1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

6.2. Method of measurement

6.2.1. Place the EUT on the table and set it in transmitting mode.

6.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

6.2.3. Set spectrum analyzer Center= 433.92MHz, Span = 0MHz, Sweep = 5s.

6.2.4. Set the spectrum analyzer as RBW, VBW=1MHz,

6.2.5. Max hold, view and count how many channel in the band.


6.3. Test Setup



6.4. Test Results

Freq (MHz)	Test Result(s)	Limit (s)	Conclusion
433.92	1.070	< 5s	PASS

EUT After Release the button, EUT emission Continue 0.53seconds, Compliance with 15.231 a(1) section.

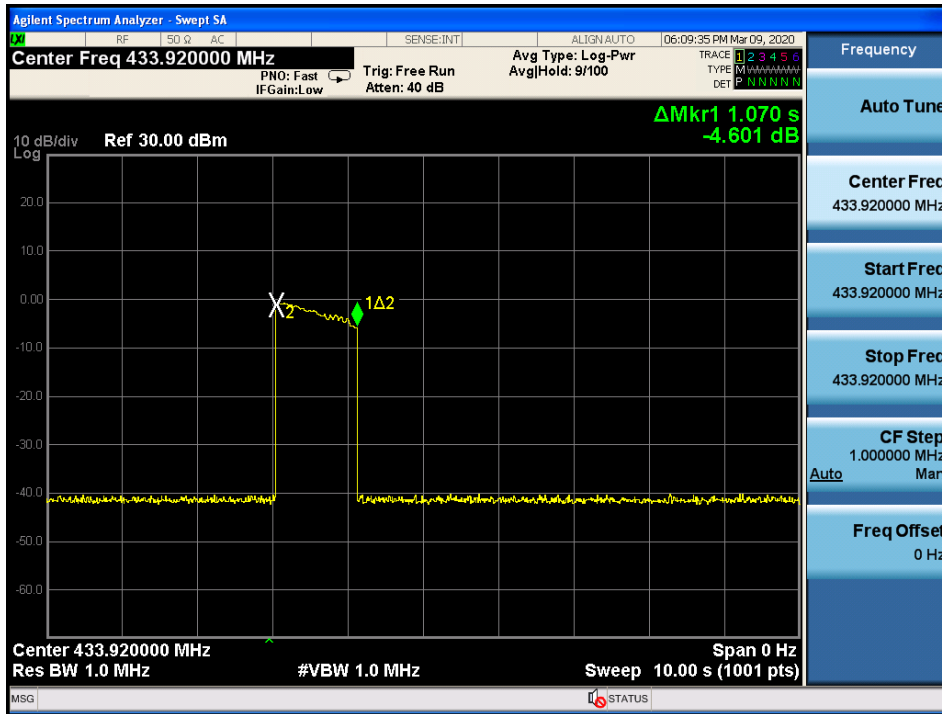

7. Antenna Requirement

7.1. Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

7.2. Antenna Connected Construction



The directional gains of antenna used for transmitting is 3 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement.

7.3. Result

The EUT antenna is Internal antenna. It comply with the standard requirement.

8. Test setup photo

Photos of Radiated emission

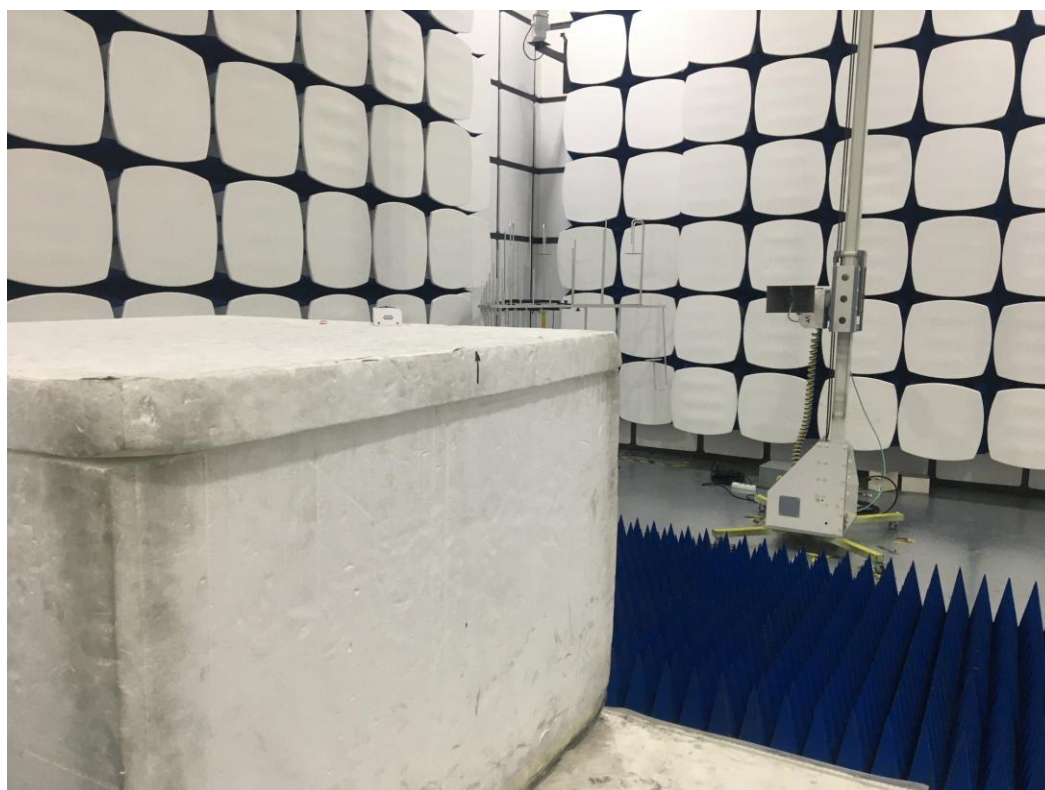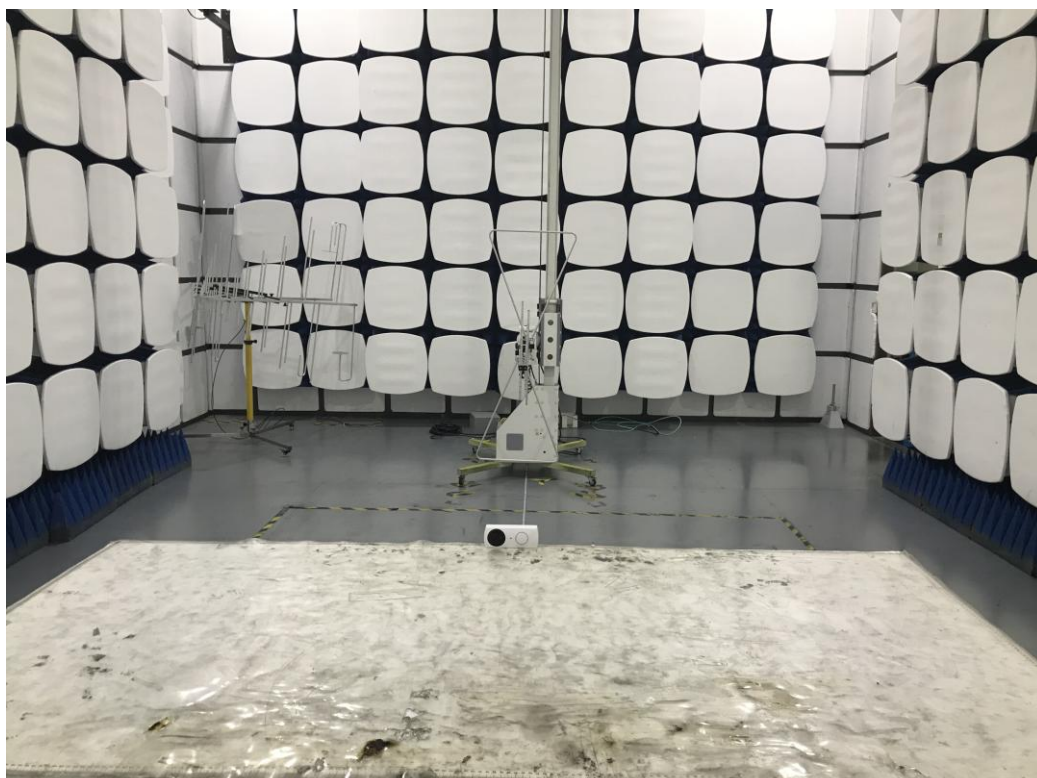

-----END OF THE REPORT-----