



PRECISE TESTING

# FCC TEST REPORT

## FCC ID: 2AFDGTT-BH048

Product	:	Wireless Stereo Earphones
Model Name	:	TT-BH048
Brand	:	N/A
Report No.	:	PTC18061915101E-FC01
<b>Prepared for</b>		
SUNVALLEYTEK INTERNATIONAL, INC.		
46724 Lakeview Blvd, Fremont, California, United States		
<b>Prepared by</b>		
Dongguan Precise Testing & Certification Corp., Ltd.		
Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China		



## 1 TEST RESULT CERTIFICATION

Applicant's name : SUNVALLEYTEK INTERNATIONAL, INC.  
Address : 46724 Lakeview Blvd, Fremont, California, United States  
Manufacture's name : Shenzhen NearbyExpress Technology Development Company Limited  
Address : 333 Bulong Road, Jialianda Industrial Park, Building 1, Bantian, Longgang District, Shenzhen, China  
Product name : Wireless Stereo Earphones  
Model name : TT-BH048  
Standards : FCC CFR47 Part 15 Section 15.247  
Test procedure : ANSI C63.10:2013  
Test Date : June 20, 2018 to June 26, 2018  
Date of Issue : June 26, 2018  
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

Handwritten signature of Leo Yang in black ink.

Leo Yang / Engineer

Technical Manager:

Handwritten signature of Chris Du in black ink.

Chris Du / Manager



## Contents

	<b>Page</b>
<b>1 TEST RESULT CERTIFICATION.....</b>	<b>2</b>
<b>2 TEST SUMMARY.....</b>	<b>5</b>
2.1 TEST SITE.....	6
<b>3 GENERAL INFORMATION.....</b>	<b>7</b>
3.1 GENERAL DESCRIPTION OF E.U.T.....	7
3.2 CHANNEL LIST.....	8
<b>4 EQUIPMENT DURING TEST.....</b>	<b>9</b>
4.1 EQUIPMENTS LIST.....	9
4.2 MEASUREMENT UNCERTAINTY.....	11
4.3 DESCRIPTION OF SUPPORT UNITS.....	12
<b>5 CONDUCTED EMISSION.....</b>	<b>13</b>
5.1 E.U.T. OPERATION.....	13
5.2 EUT SETUP.....	13
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	14
5.4 MEASUREMENT PROCEDURE.....	14
5.5 CONDUCTED EMISSION LIMIT.....	14
5.6 MEASUREMENT DESCRIPTION.....	14
5.7 CONDUCTED EMISSION TEST RESULT.....	14
<b>6 RADIATED SPURIOUS EMISSIONS.....</b>	<b>17</b>
6.1 EUT OPERATION.....	17
6.2 TEST SETUP.....	18
6.3 SPECTRUM ANALYZER SETUP.....	19
6.4 TEST PROCEDURE.....	20
6.5 SUMMARY OF TEST RESULTS.....	22
<b>7 BAND EDGE MEASUREMENT.....</b>	<b>27</b>
7.1 TEST PROCEDURE.....	27
7.2 TEST RESULT.....	29
<b>8 6DB BANDWIDTH MEASUREMENT.....</b>	<b>34</b>
8.1 TEST PROCEDURE.....	34



**PRECISE TESTING**

8.2	TEST RESULT .....	34
<b>9</b>	<b>MAXIMUM PEAK OUTPUT POWER .....</b>	<b>37</b>
9.1	TEST PROCEDURE.....	37
9.2	TEST RESULT .....	37
<b>10</b>	<b>POWER SPECTRAL DENSITY.....</b>	<b>40</b>
10.1	TEST PROCEDURE.....	40
10.2	TEST RESULT .....	40
<b>11</b>	<b>ANTENNA APPLICATION .....</b>	<b>43</b>
11.1	ANTENNA REQUIREMENT .....	43
11.2	RESULT .....	43
<b>12</b>	<b>TEST SETUP .....</b>	<b>44</b>
<b>13</b>	<b>EUT PHOTOS.....</b>	<b>46</b>



## 2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203	PASS



**PRECISE TESTING**

Report No.: PTC18061915101E-FC01

## **2.1 Test Site**

Dongguan Precise Testing & Certification Corp., Ltd.

Address: Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A-1

Test Lab: Shenzhen BCTC Testing Co., Ltd.

Address: BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

FCC Registered No.: 712850

Test items: Radiated Spurious Emission(18GHz to 25GHz)



### 3 General Information

#### 3.1 General Description of E.U.T.

Product Name	:	Wireless Stereo Earphones
Model Name	:	TT-BH048
Bluetooth Version	:	BLE 4.0
Operating frequency	:	2402-2480MHz
Number of Channels	:	40
Type of Modulation	:	GFSK
Antenna installation	:	Internal PCB Antenna
Antenna Gain	:	0.5dBi
Power supply	:	DC 3.7V, 350mAh Battery
Hardware Version	:	V2.3
Software Version	:	V1.0



### 3.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The details of test channels and bandwidth were for RF conductive measurement.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	<b>2402</b>	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	<b>19</b>	<b>2440</b>	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	<b>2480</b>
12	2426	26	2454		
13	2428	27	2456		

Note:

1. Test of channel was included the lowest 2402MHz, middle 2440MHz and highest frequency 2480MHz in highest data rate and to perform the test, then record on this report.





## 4 Equipment During Test

### 4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
MXG Signal Analyzer	Agilent	N9020A	MY56070279	10Hz-30GHz	Apr 07, 2019
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Oct 09, 2018
Antenna Connector	Florida RF Labs	N/A	RF01#	N/A	Aug. 26, 2018

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions(Test Frequency from 9KHz-18GHz)

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Sep. 03, 2018
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Aug 31, 2018
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug 31, 2018
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Sep. 03, 2018
Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	Sep. 03, 2018
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-40GHz	Oct. 13, 2018
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 31, 2018
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	Aug. 31, 2018
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Sep. 03, 2018



Radiated Emission (Test Frequency from 18GHz-25GHz)

<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Characteristics</b>	<b>Calibration Due</b>
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-26.5GHz	2018.08.26
Test Receiver	R&S	ESPI	101396	9KHz-7GHz	2018.08.26
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-181	14GHz-40GHz	2018.09.02
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	2018.08.26
RF Cable	R&S	R204	R21X	1GHz-40GHz	2018.08.26

Conducted Emissions

<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Characteristics</b>	<b>Calibration Due</b>
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Sep. 03, 2018
Artificial Mains Network	Rohde&Schwarz	L2-16B	000WX31025	9KHz-300MHz	Sep. 03, 2018
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Sep. 03, 2018



#### 4.2 Measurement Uncertainty

<b>Parameter</b>	<b>Uncertainty</b>
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 <sup>-6</sup>
Bandwidth	± 1.5 x 10 <sup>-6</sup>
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	



**PRECISE TESTING**

Report No.: PTC18061915101E-FC01

### 4.3 Description of Support Units

Equipment	Model No.	Series No.
Adapter	Model: PS65B150Y3000S Input: AC150V, 60Hz, 1.5A Output: DC 5V, 3000mA	N/A

## 5 Conducted Emission

Test Requirement	:	FCC CFR 47 Part 15 Section 15.207
Test Method	:	ANSI C63.10: 2013
Test Result	:	PASS
Frequency Range	:	150kHz to 30MHz
Class/Severity	:	Class B


### 5.1 E.U.T. Operation

Operating Environment :

Temperature	:	25.5 °C
Humidity	:	51 % RH
Atmospheric Pressure	:	101.2kPa


### 5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

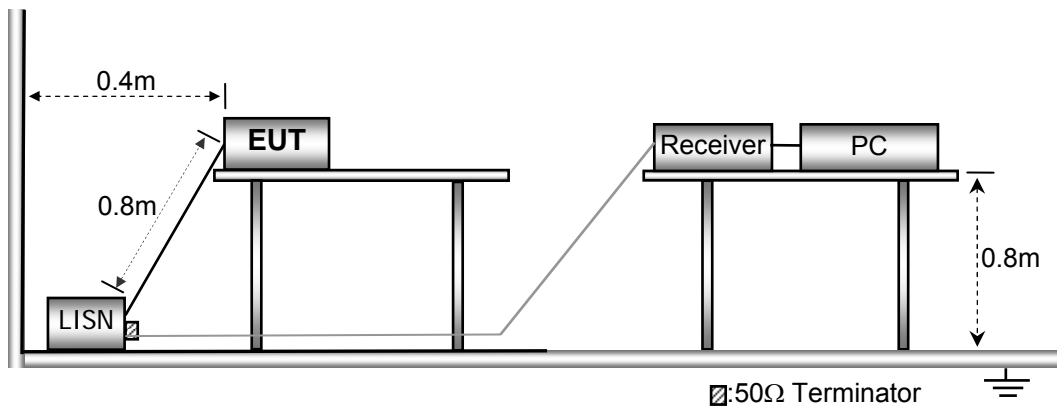



### 5.3 Test SET-UP (Block Diagram of Configuration)

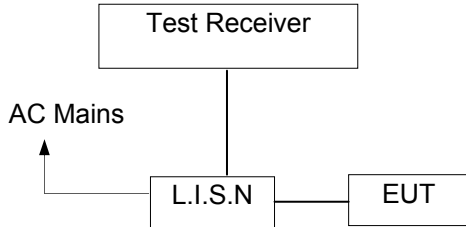

### 5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 5.5 Conducted Emission Limit

#### Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

**Note:**

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


### 5.7 Conducted Emission Test Result

Pass.

All the modulation modes were tested the data of the worst mode (GFSK TX 2402MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.



Line-AC 120V/60Hz

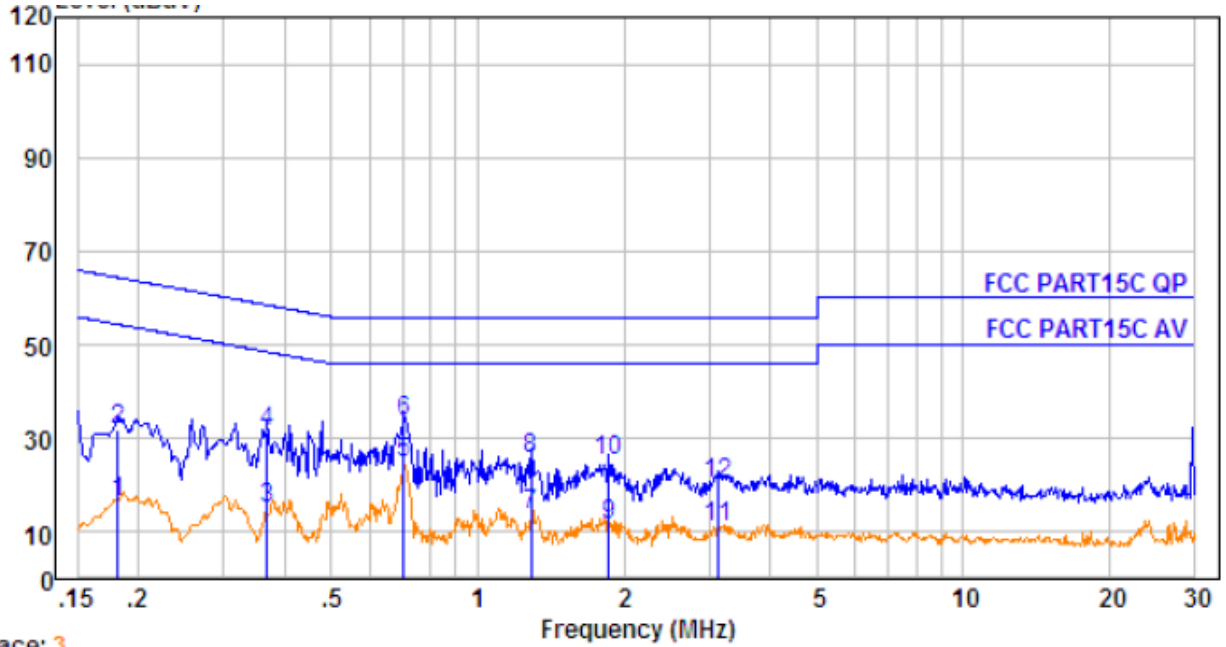


Trace: 3

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.182	0.25	9.56	6.60	16.41	54.42	-38.01	Average
2.	0.182	0.25	9.56	22.16	31.97	64.42	-32.45	QP
3.	0.369	0.39	9.72	4.92	15.03	48.52	-33.49	Average
4.	0.369	0.39	9.72	21.22	31.33	58.52	-27.19	QP
5.	0.705	0.44	9.80	14.41	24.65	46.00	-21.35	Average
6.	0.705	0.44	9.80	23.42	33.66	56.00	-22.34	QP
7.	1.289	0.46	9.83	3.47	13.76	46.00	-32.24	Average
8.	1.289	0.46	9.83	15.42	25.71	56.00	-30.29	QP
9.	1.858	0.47	9.85	1.13	11.45	46.00	-34.55	Average
10.	1.858	0.47	9.85	14.84	25.16	56.00	-30.84	QP
11.	3.123	0.47	9.88	0.72	11.07	46.00	-34.93	Average
12.	3.123	0.47	9.88	10.05	20.40	56.00	-35.60	QP



Neutral-AC 120V/60Hz

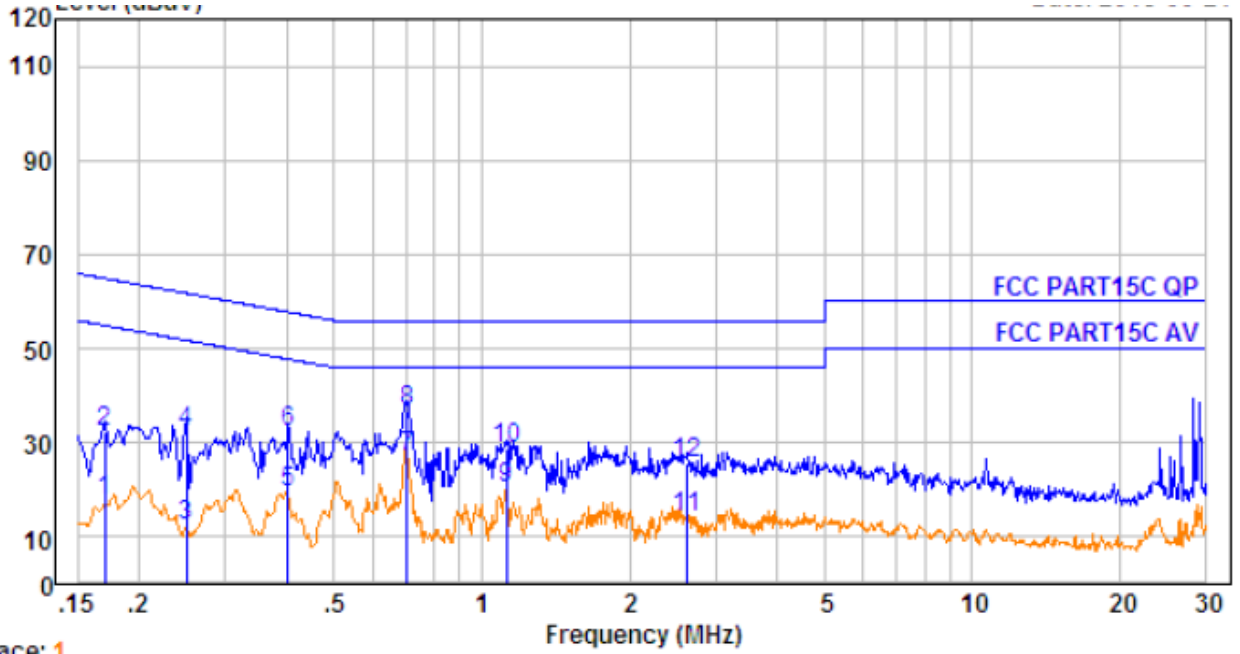

Trace: 1

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.170	0.24	9.57	7.76	17.57	54.94	-37.37	Average
2.	0.170	0.24	9.57	22.65	32.46	64.94	-32.48	QP
3.	0.249	0.33	9.67	2.53	12.53	51.78	-39.25	Average
4.	0.249	0.33	9.67	22.33	32.33	61.78	-29.45	QP
5.	0.402	0.40	9.76	9.15	19.31	47.81	-28.50	Average
6.	0.402	0.40	9.76	22.12	32.28	57.81	-25.53	QP
7.	0.705	0.44	9.83	16.79	27.06	46.00	-18.94	Average
8.	0.705	0.44	9.83	26.54	36.81	56.00	-19.19	QP
9.	1.123	0.46	9.86	10.14	20.46	46.00	-25.54	Average
10.	1.123	0.46	9.86	18.35	28.67	56.00	-27.33	QP
11.	2.622	0.47	9.90	3.60	13.97	46.00	-32.03	Average
12.	2.622	0.47	9.90	15.44	25.81	56.00	-30.19	QP





## 6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247  
 Test Method : ANSI C63.10:2013  
 Test Result : PASS  
 Measurement Distance : 3m  
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 6.1 EUT Operation


Operating Environment :

Temperature : 23.5 °C  
 Humidity : 51.1 % RH  
 Atmospheric Pressure : 101.2kPa


### 6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

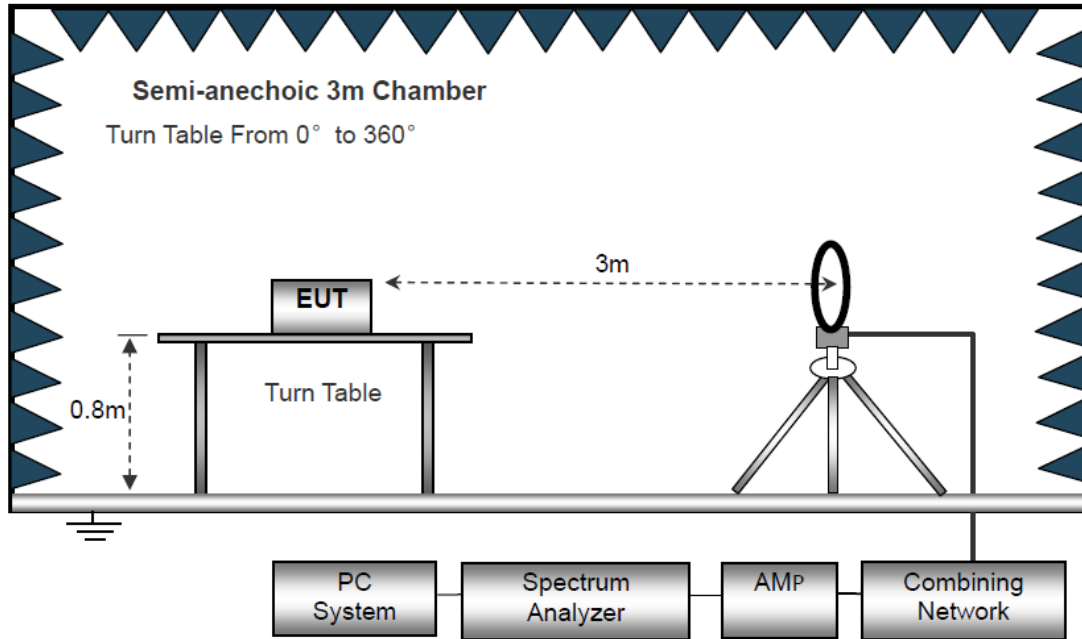

The test setup for emission measurement from 30 MHz to 1 GHz.

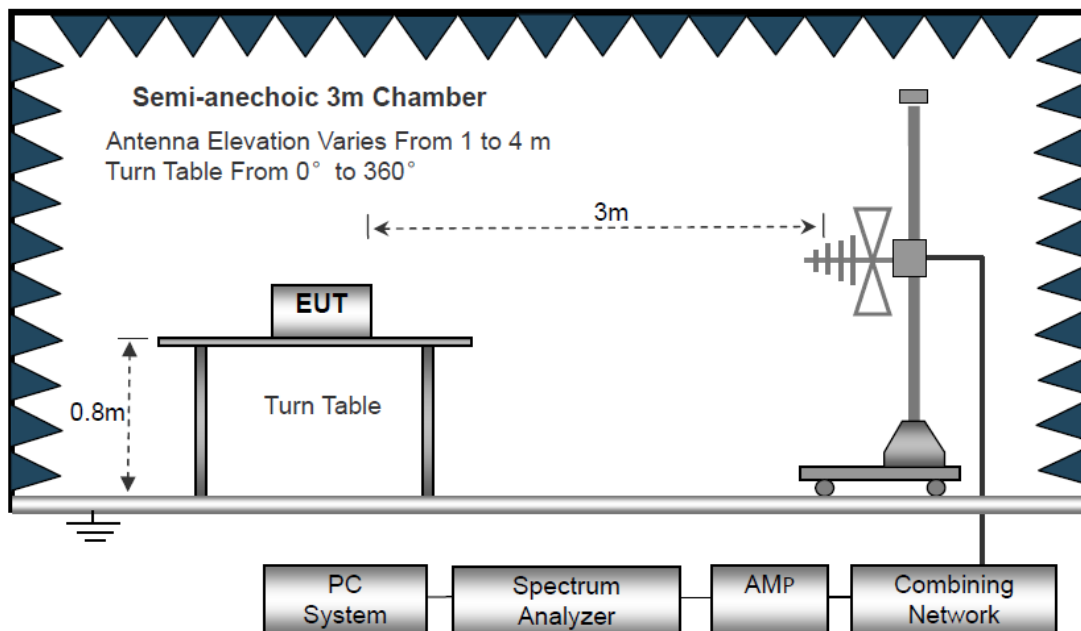

The test setup for emission measurement above 1 GHz

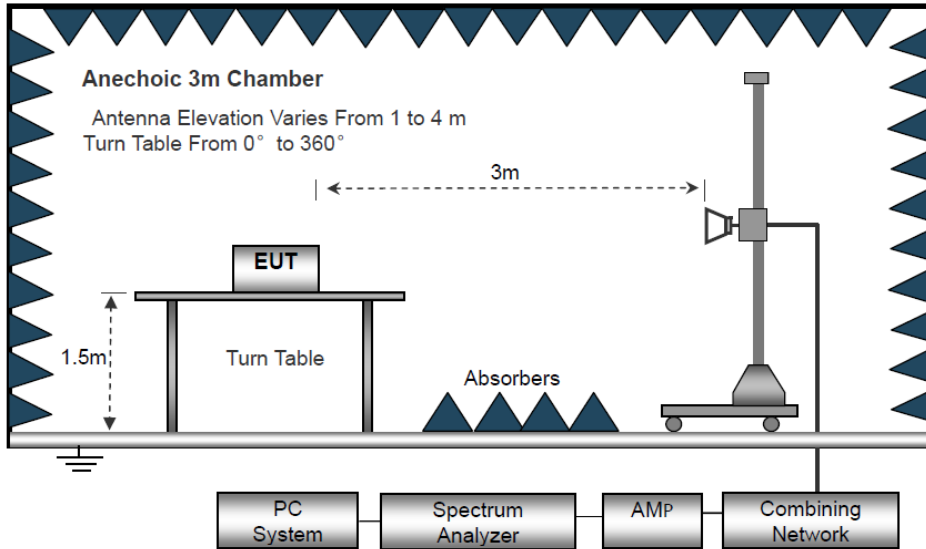

### 6.3 Spectrum Analyzer Setup

Below 30MHz			
IF Bandwidth	:	10kHz	
Resolution Bandwidth	:	10kHz	
Video Bandwidth	:	10kHz	
30MHz ~ 1GHz			
Detector	:	PK	QP
Resolution Bandwidth	:	100kHz	120kHz
Video Bandwidth	:	300kHz	300kHz
Above 1GHz			
Detector	:	PK	AV
Resolution Bandwidth	:	1MHz	1MHz
Video Bandwidth	:	3MHz	10Hz



## **6.4 Test Procedure**

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
  - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
  - 2) Change the antenna polarization and repeat 1) with vertical polarization.
  - 3) Make a hardcopy of the spectrum.
  - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
  - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
  - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
  - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
  - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
8. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



For Average Measurement:

VBW=10Hz, when duty cycle is no less than 98 percent.

VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T( $\mu$ s)	1/T(KHz)	Average Correction Factor	VBW Setting
2402-2480	100	-	-	0	10Hz



## 6.5 Summary of Test Results

### Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =  $40\log(\text{Specific distance/ test distance})$  (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.


### Test Frequency: 30MHz ~ 1GHz

Pass.

Please refer to the following test plots for the worst test mode (GFSK (CH00: 2402MHz)).



Antenna Polarization: Horizontal GFSK(CH00: 2402MHz)

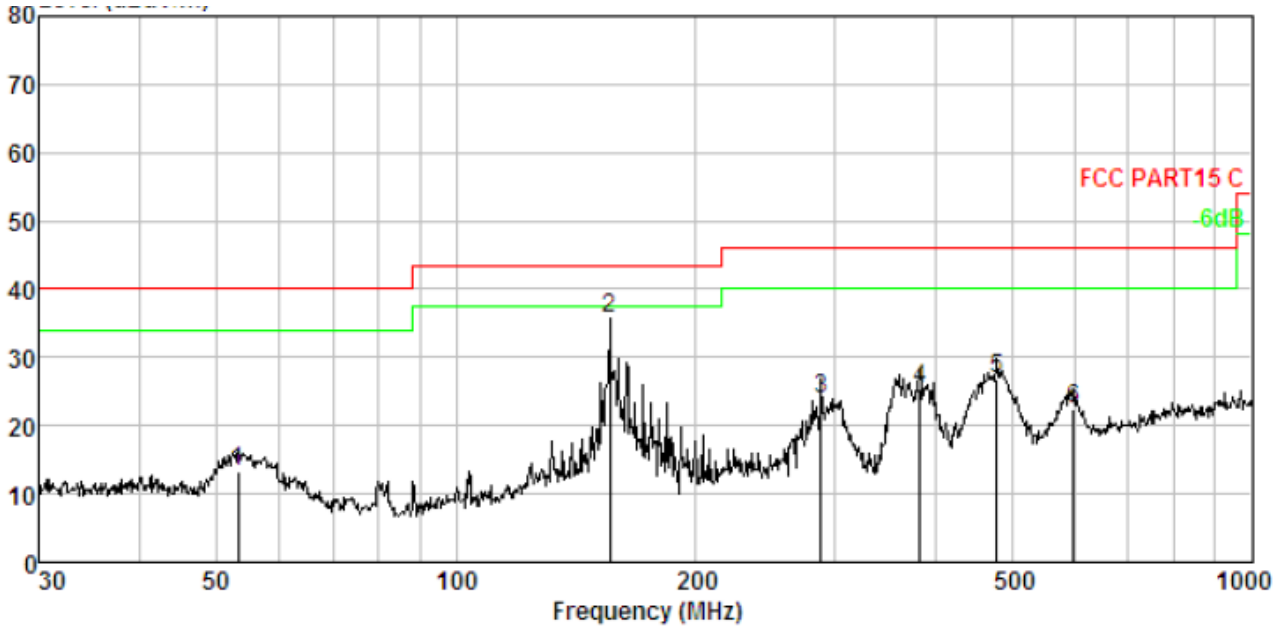


No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamplifier Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	53.318	1.58	12.02	29.88	30.17	13.31	40.00	-26.69	QP
2.	155.910	2.55	13.89	49.69	30.54	35.59	43.50	-7.91	QP
3.	287.990	3.10	12.96	38.60	30.76	23.90	46.00	-22.10	QP
4.	382.588	3.36	14.94	37.81	30.86	25.25	46.00	-20.75	QP
5.	478.846	3.56	16.87	37.38	30.93	26.88	46.00	-19.12	QP
6.	597.223	3.76	19.09	30.58	31.01	22.42	46.00	-23.58	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



Antenna Polarization: Vertical GFSK(CH00: 2402MHz)

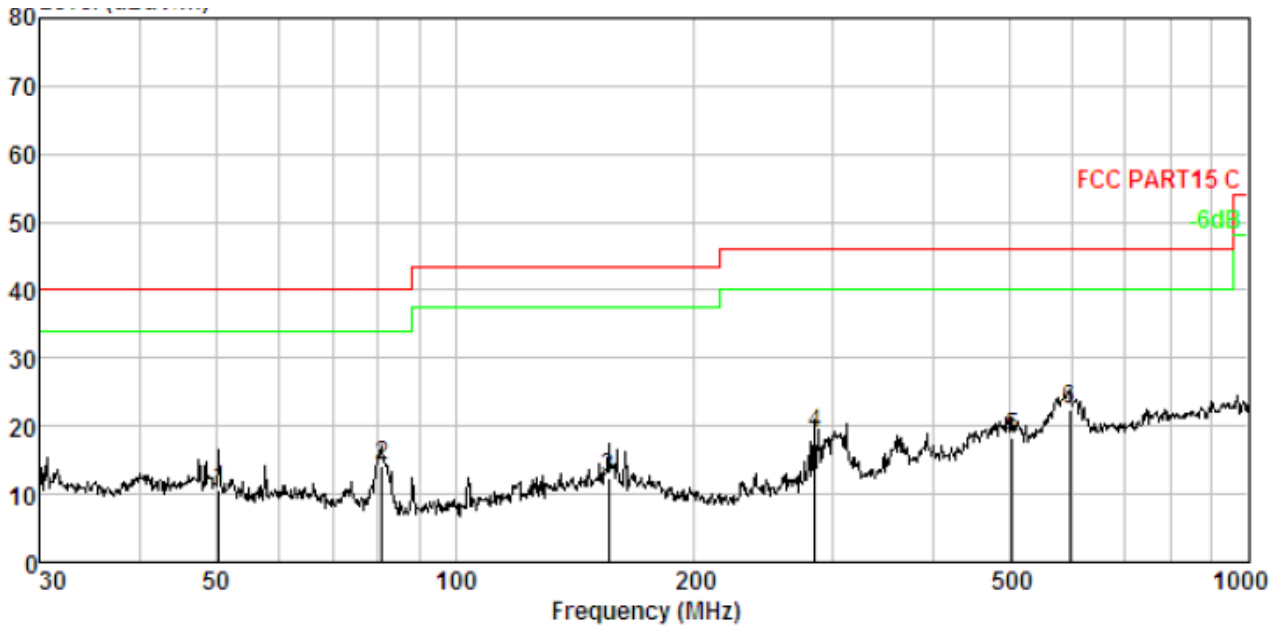

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	50.409	1.52	12.24	27.05	30.15	10.66	40.00	-29.34	QP
2.	80.927	1.95	8.75	33.81	30.32	14.19	40.00	-25.81	QP
3.	155.910	2.55	13.89	26.40	30.54	12.30	43.50	-31.20	QP
4.	283.979	3.09	12.89	33.78	30.75	19.01	46.00	-26.99	QP
5.	504.706	3.61	17.12	28.45	30.95	18.23	46.00	-27.77	QP
6.	595.133	3.76	19.03	30.66	31.01	22.44	46.00	-23.56	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor





**Test Frequency 1GHz-18GHz:**

**GFSK Low Channel (2402MHz)**

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4804	30.22	AV	V	8.56	9.14	9.33	38.59	54	-15.41
4804	31.45	AV	H	8.56	9.14	9.33	39.82	54	-14.18
4804	29.52	PK	V	8.56	9.14	9.33	37.89	74	-36.11
4804	30.69	PK	H	8.56	9.14	9.33	39.06	74	-34.94
14785	31.05	AV	V	7.93	10.26	10.49	38.75	54	-15.25
14785	32.64	AV	H	7.93	10.26	10.49	40.34	54	-13.66
14785	30.29	PK	V	7.93	10.26	10.49	37.99	74	-36.01
14785	29.41	PK	H	7.93	10.26	10.49	37.11	74	-36.89

**GFSK Middle Channel (2440MHz)**

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4880	30.25	AV	V	8.11	9.32	9.56	38.12	54	-15.88
4880	29.41	AV	H	8.11	9.32	9.56	37.28	54	-16.72
4880	31.26	PK	V	8.11	9.32	9.56	39.13	74	-34.87
4880	30.65	PK	H	8.11	9.32	9.56	38.52	74	-35.48
16542	29.51	AV	V	8.25	10.48	11.05	37.19	54	-16.81
16542	30.23	AV	H	8.25	10.48	11.05	37.91	54	-16.09
16542	29.58	PK	V	8.25	10.48	11.05	37.26	74	-36.74
16542	31.26	PK	H	8.25	10.48	11.05	38.94	74	-35.06

**GFSK High Channel (2480MHz)**

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4960	29.36	AV	V	8.22	11.43	10.24	38.77	54	-15.23
4960	30.41	AV	H	8.22	11.43	10.24	39.82	54	-14.18
4960	28.54	PK	V	8.22	11.43	10.24	37.95	74	-36.05
4960	31.03	PK	H	8.22	11.43	10.24	40.44	74	-33.56
17453	27.96	AV	V	8.53	9.85	10.69	35.65	54	-18.35
17453	28.49	AV	H	8.53	9.85	10.69	36.18	54	-17.82
17453	29.54	PK	V	8.53	9.85	10.69	37.23	74	-36.77
17453	30.56	PK	H	8.53	9.85	10.69	38.25	74	-35.75

Note: 1. The testing has been conformed to  $10 \times 2480\text{MHz} = 24800\text{MHz}$ .

- 2. All other emissions more than 30dB below the limit.
- 3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
 Emission Level = Reading + Factor  
 Margin=Emission Level-Limit



**PRECISE TESTING**

Report No.: PTC18061915101E-FC01

**Test Frequency: From 18GHz to 25GHz**

The measurements were more than 20dB below the limit and not reported.



## 7 Band Edge Measurement

- Test Requirement : Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.1 Test Procedure

#### For Conducted Test

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.
2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	100KHz
Detector	Peak
Trace	Max Hold



## **For Radiated emission Test**

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the band edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were encompassed by the span. After trace stabilization, the maximum peak was determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.

The measurements were performed at the lower end of the 2.4GHz band.

Use the following spectrum analyzer settings:

For Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz.


For Non-Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 100KHz, video bandwidth 300KHz.




### 7.2 Test Result

Conducted Test

Low Band Edge Plot on Channel 00

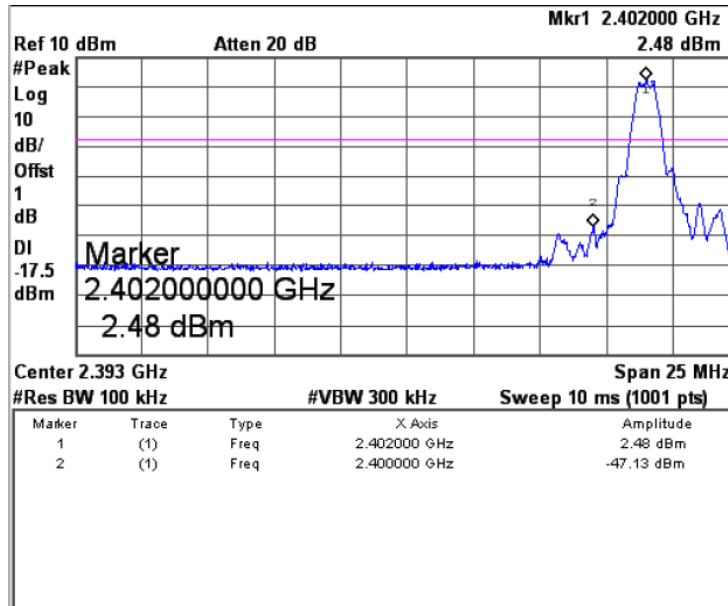

High Band Edge Plot on Channel 39

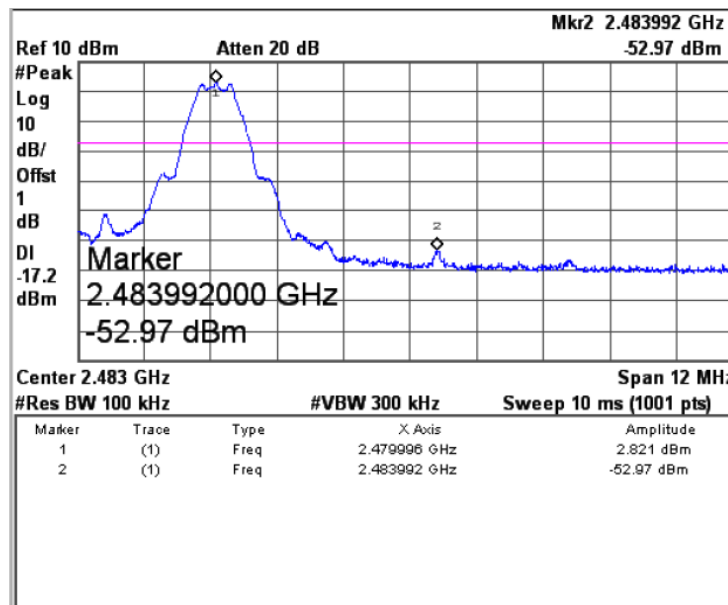




Restricted Band Edge (Radiated)

Low Band Edge


Horizontal

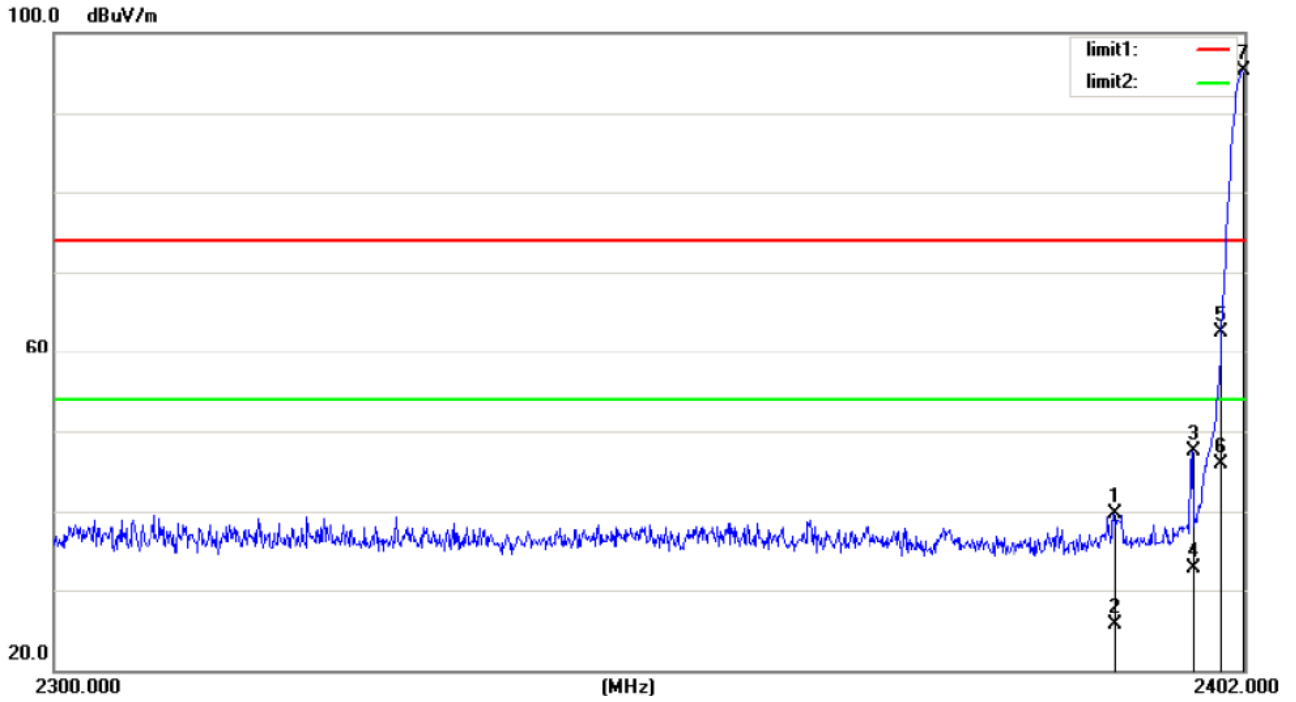

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		2390.576	58.18	-18.55	39.63	74.00	-34.37	peak	0	
2		2390.576	44.20	-18.55	25.65	54.00	-28.35	AVG	0	
3		2397.614	66.05	-18.51	47.54	74.00	-26.46	peak	0	
4		2397.614	51.26	-18.51	32.75	54.00	-21.25	AVG	0	
5		2400.000	81.09	-18.50	62.59	74.00	-11.41	peak	0	
6		2400.000	64.44	-18.50	45.94	54.00	-8.06	AVG	0	
7	*	2401.796	113.73	-18.49	95.24	74.00	21.24	peak	0	



Vertical

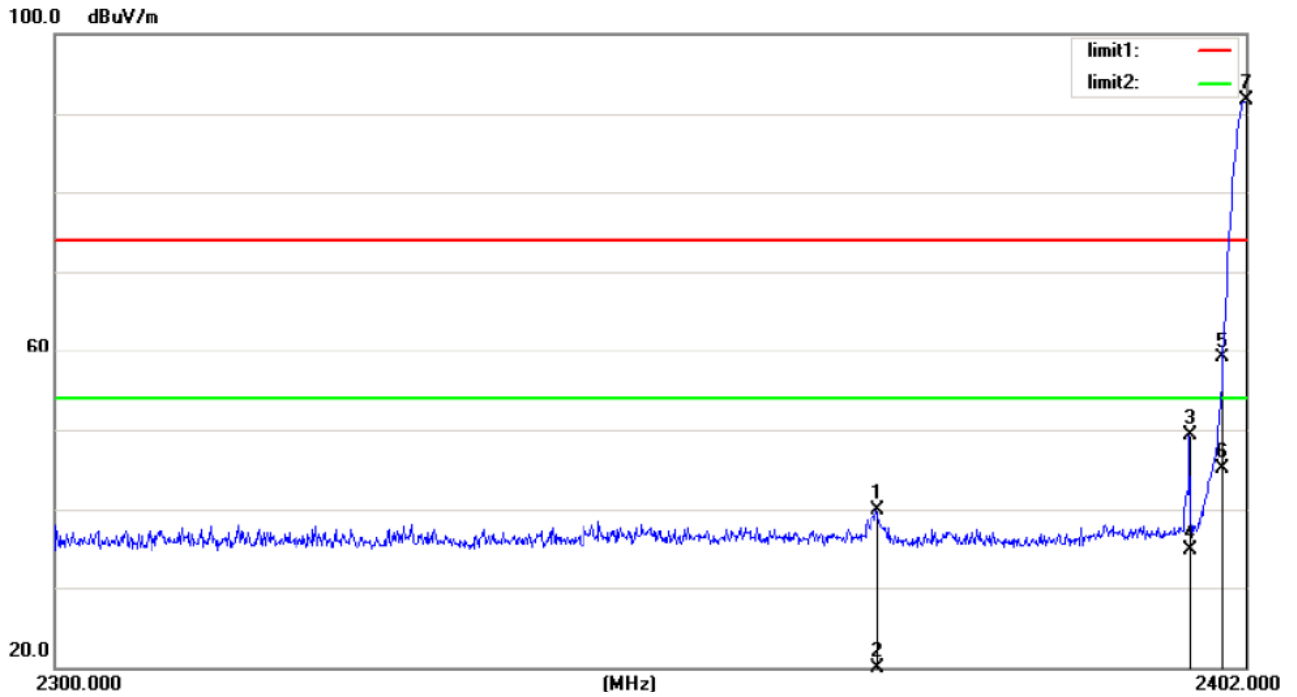


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		2369.972	58.52	-18.68	39.84	74.00	-34.16	peak	0	
2		2369.972	30.36	-18.68	11.68	54.00	-42.32	AVG	0	
3		2397.206	67.76	-18.52	49.24	74.00	-24.76	peak	0	
4		2397.206	53.25	-18.52	34.73	54.00	-19.27	AVG	0	
5		2400.000	77.64	-18.50	59.14	74.00	-14.86	peak	0	
6		2400.000	63.55	-18.50	45.05	54.00	-8.95	AVG	0	
7	*	2402.000	110.15	-18.49	91.66	74.00	17.66	peak	0	



High Band Edge

Horizontal

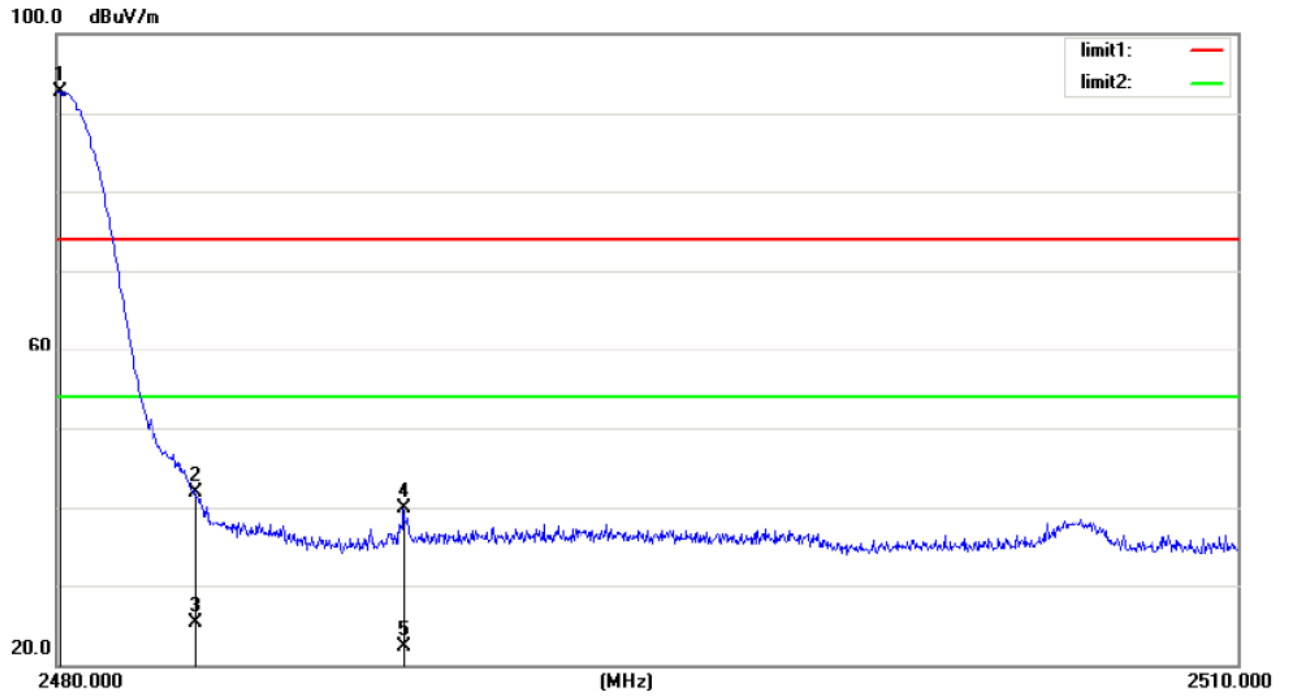


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	2480.060	110.75	-18.03	92.72	74.00	18.72	peak	0	
2		2483.500	59.99	-18.01	41.98	74.00	-32.02	peak	0	
3		2483.500	43.25	-18.01	25.24	54.00	-28.76	AVG	0	
4		2488.760	57.92	-17.98	39.94	74.00	-34.06	peak	0	
5		2488.760	40.36	-17.98	22.38	54.00	-31.62	AVG	0	





Vertical

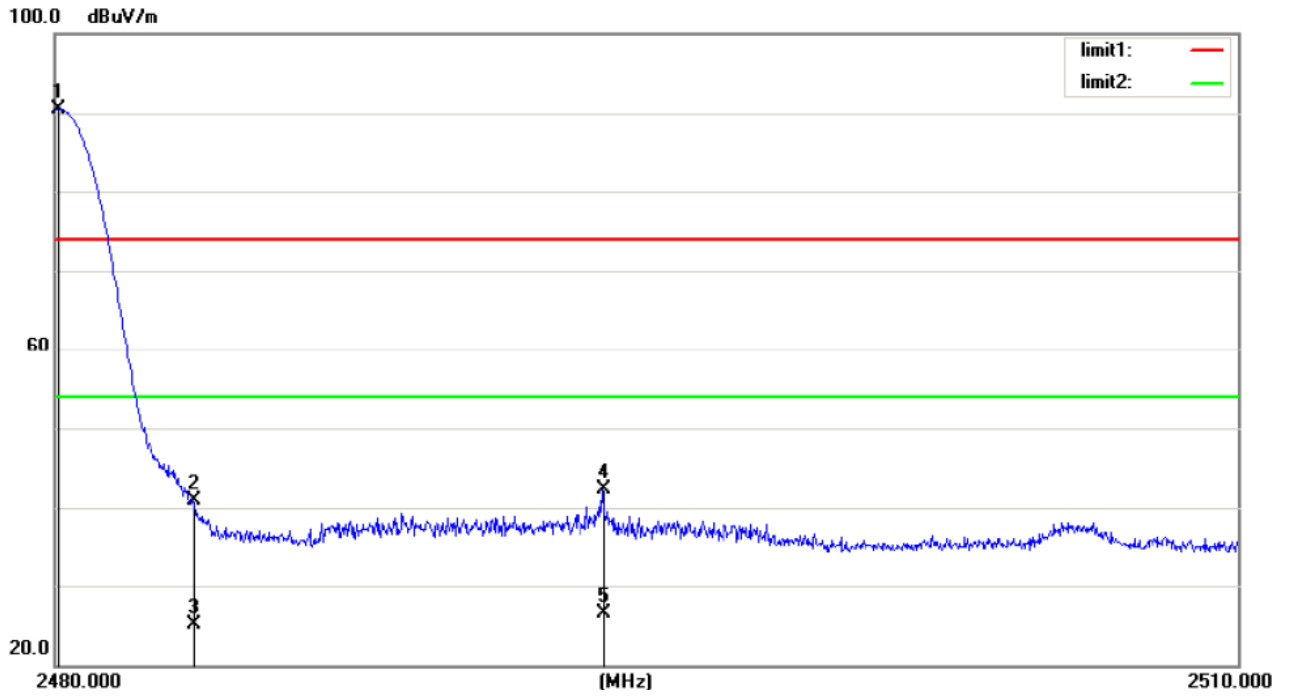

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	2480.060	108.55	-18.03	90.52	74.00	16.52	peak	0	
2		2483.500	58.94	-18.01	40.93	74.00	-33.07	peak	0	
3		2483.500	43.12	-18.01	25.11	54.00	-28.89	AVG	0	
4		2493.860	60.32	-17.95	42.37	74.00	-31.63	peak	0	
5		2493.860	44.47	-17.95	26.52	54.00	-27.48	AVG	0	



### 8 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013



Test Limit Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


#### 8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

#### 8.2 Test Result

Channel number	Channel frequency (MHz)	Measurement level (KHz)	Required Limit (KHz)
00	2402	739.711	>500
19	2440	738.833	>500
39	2480	743.821	>500

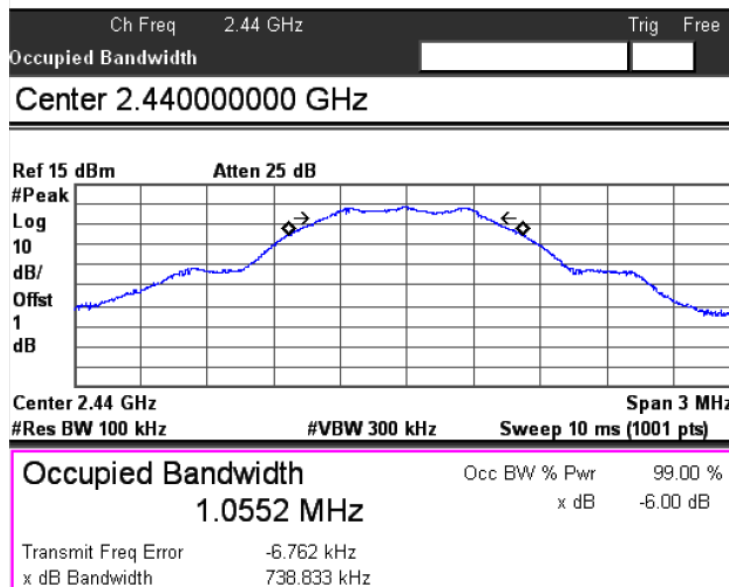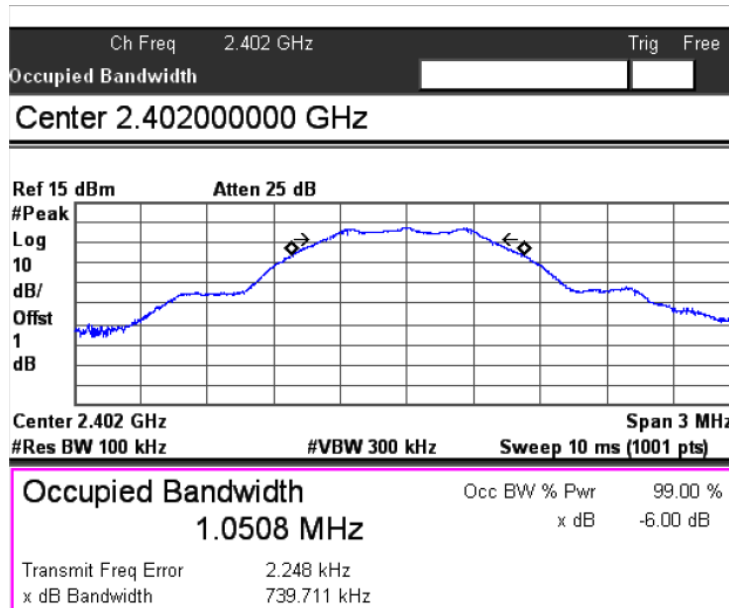

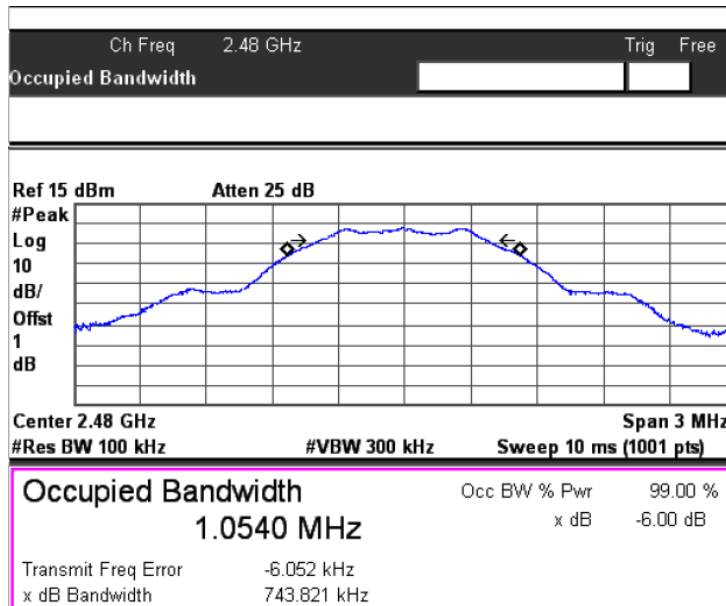



### 9 Maximum Peak Output Power

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013



Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

#### 9.1 Test Procedure

1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power and record the results in the test report.

#### 9.2 Test Result


Channel number	Channel Frequency(MHz)	Peak Power Output(dBm)	Peak Power Output(W)	Peak Power Limit(W)	Verdict
00	2402	2.523	0.00179	1	PASS
19	2440	3.811	0.00240	1	PASS
39	2480	2.988	0.00199	1	PASS

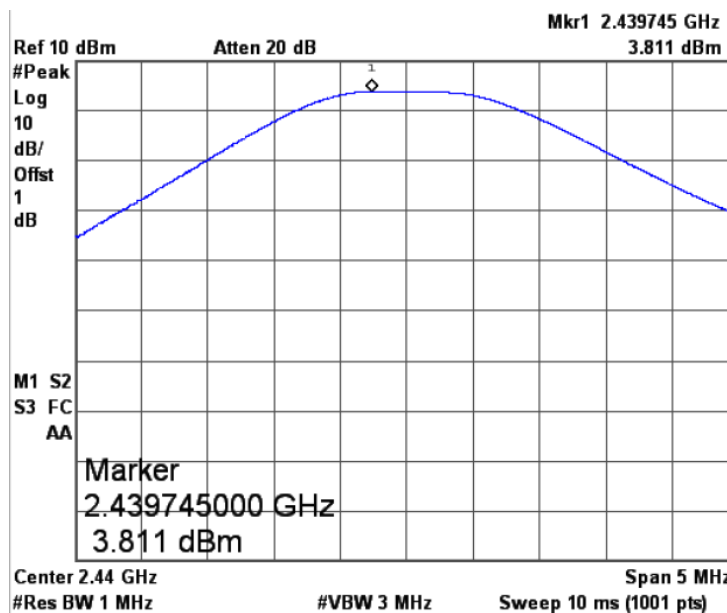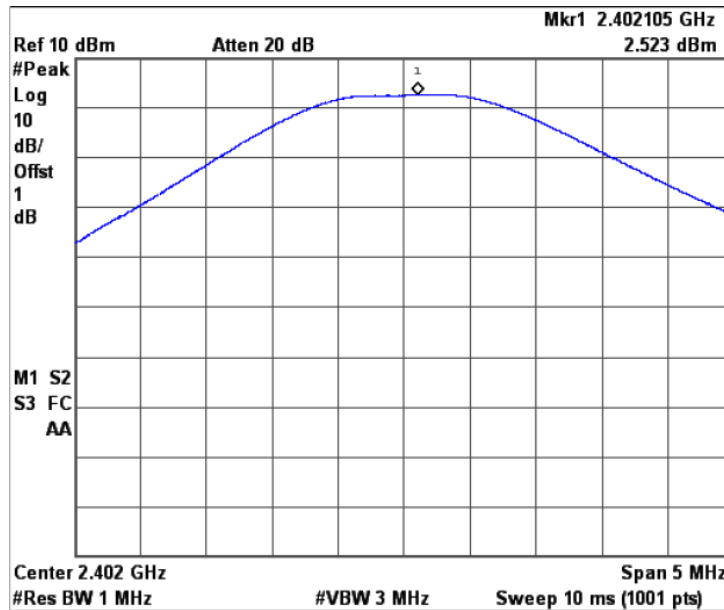



PRECISE TESTING

Report No.: PTC18061915101E-FC01

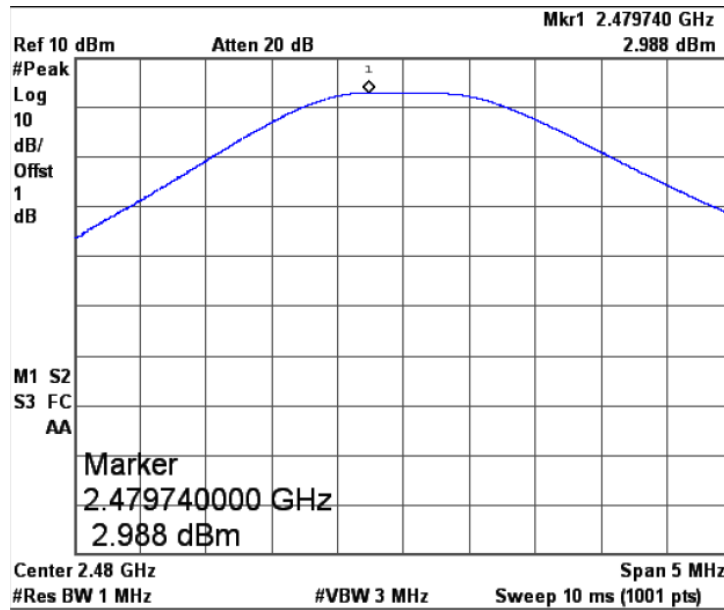



### 10 Power Spectral density

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

#### 10.2 Test Result

Channel number	Channel frequency (MHz)	Measurement level (dBm)	Required Limit (dBm/3kHz)	Pass/Fail
		PSD/3kHz		
00	2402	-12.13	8	PASS
19	2440	-10.71	8	PASS
39	2480	-11.52	8	PASS





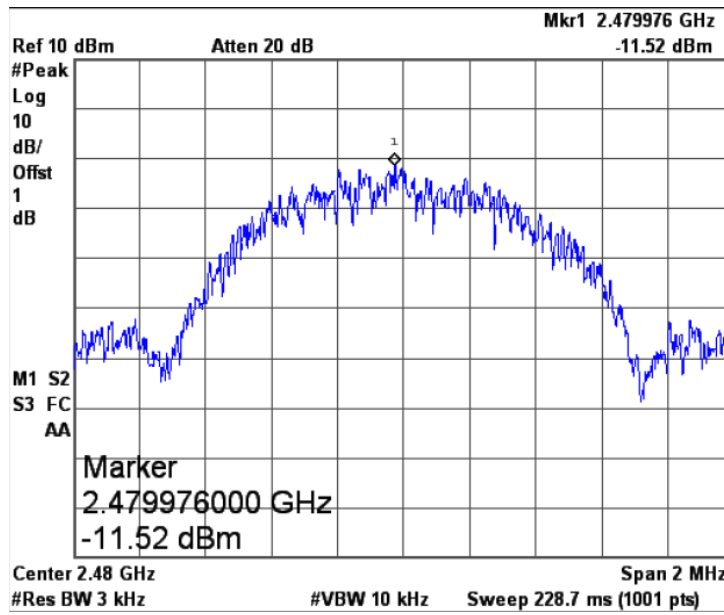



## **11 Antenna Application**

### **11.1 Antenna Requirement**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### **11.2 Result**

The EUT'S antenna, permanent attached antenna, is internal PCB antenna. The antenna's gain is 0.5dBi and meets the requirement.




## 12 Test Setup

Conducted Emissions

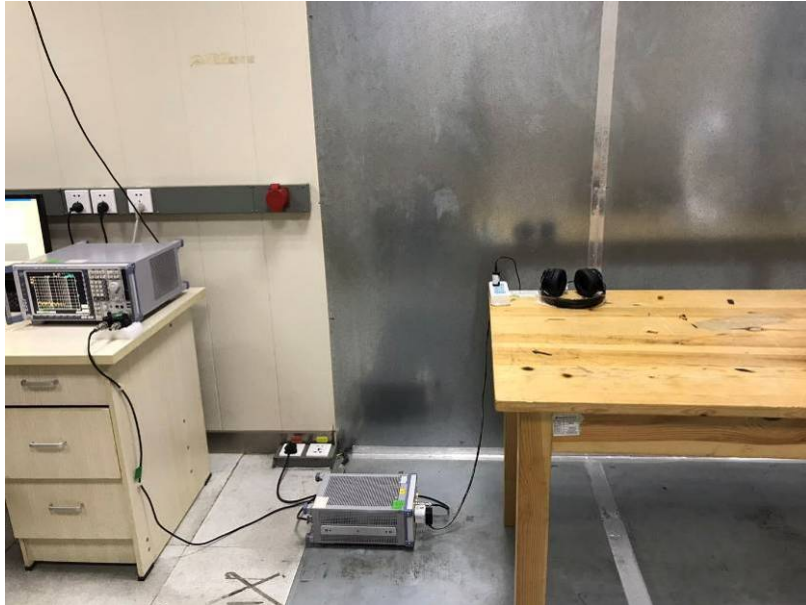


Radiated Spurious Emissions  
Test Frequency From 30MHz-1000MHz

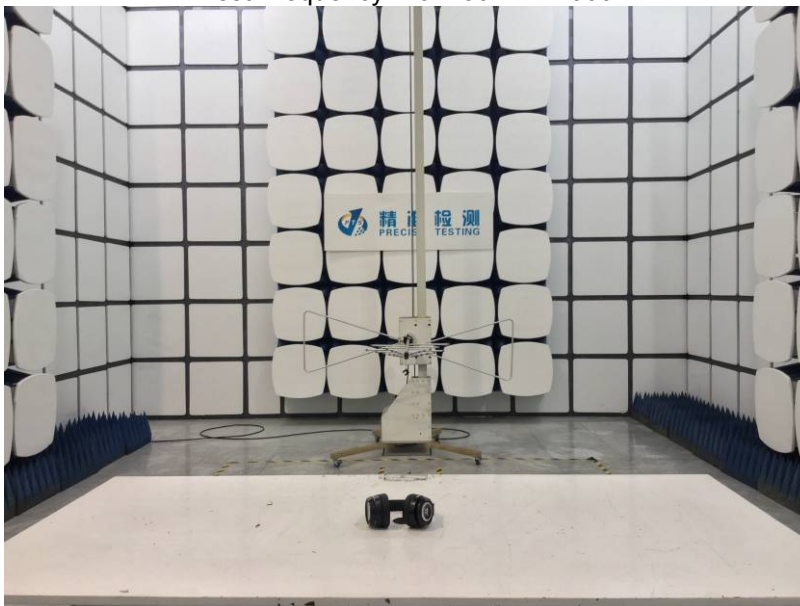




Test frequency from 1GHz-18GHz

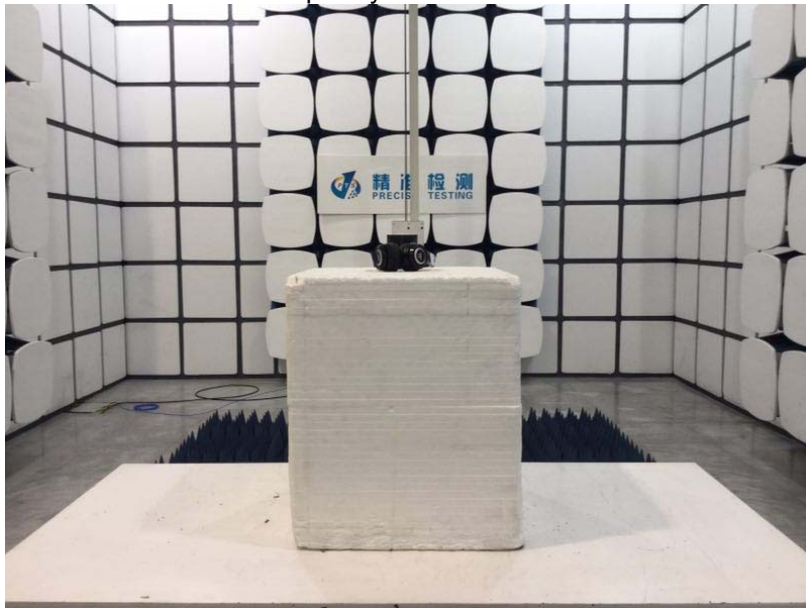

Test frequency from 18GHz-25GHz

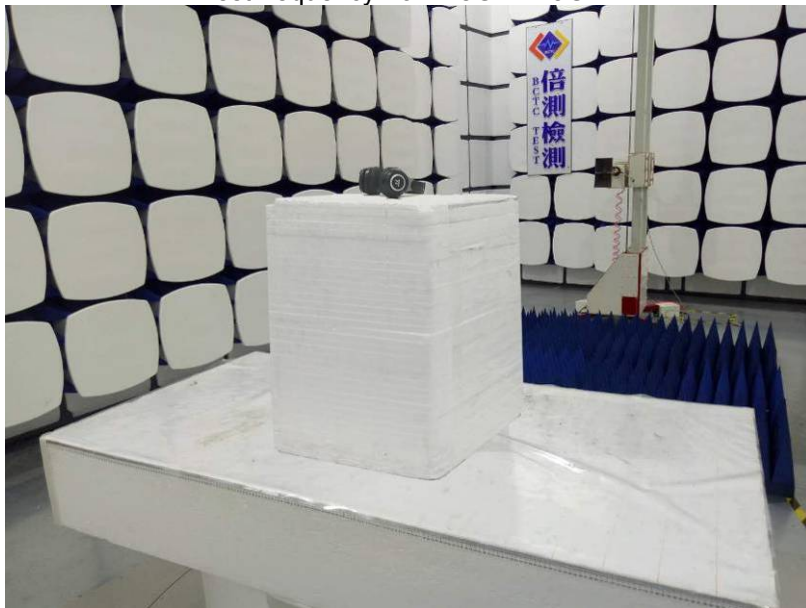



PRECISE TESTING

Report No.: PTC18061915101E-FC01

### 13 EUT Photos






PRECISE TESTING



Report No.: PTC18061915101E-FC01









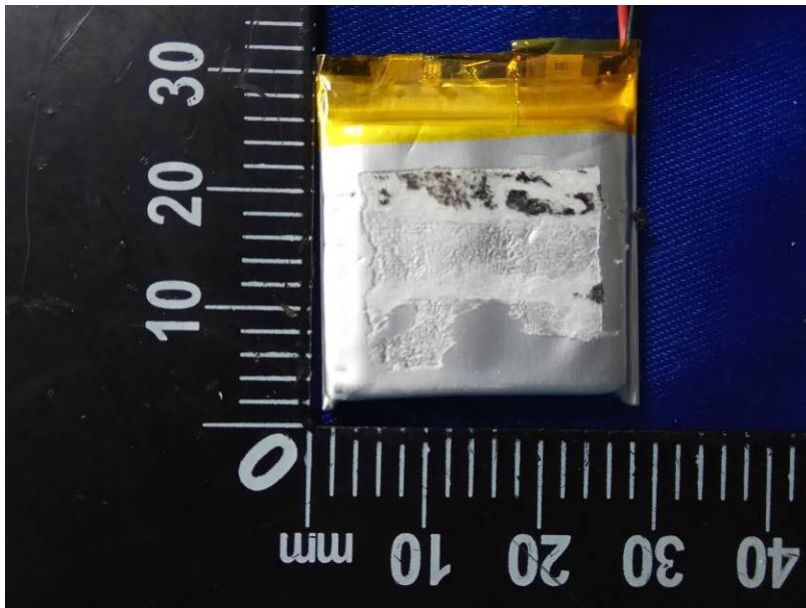

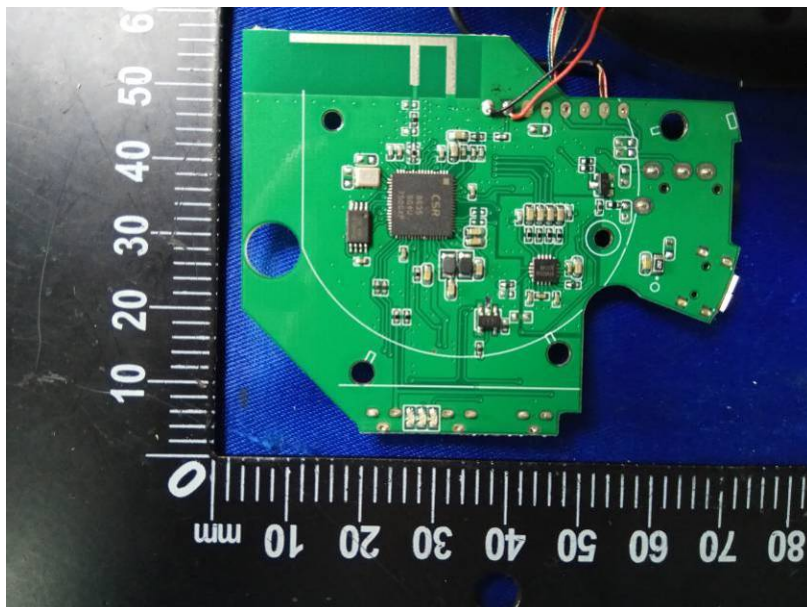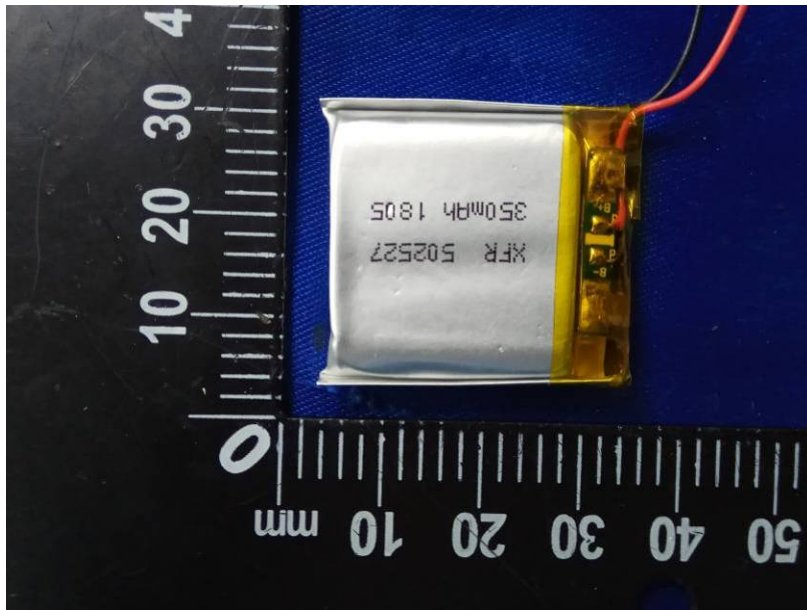

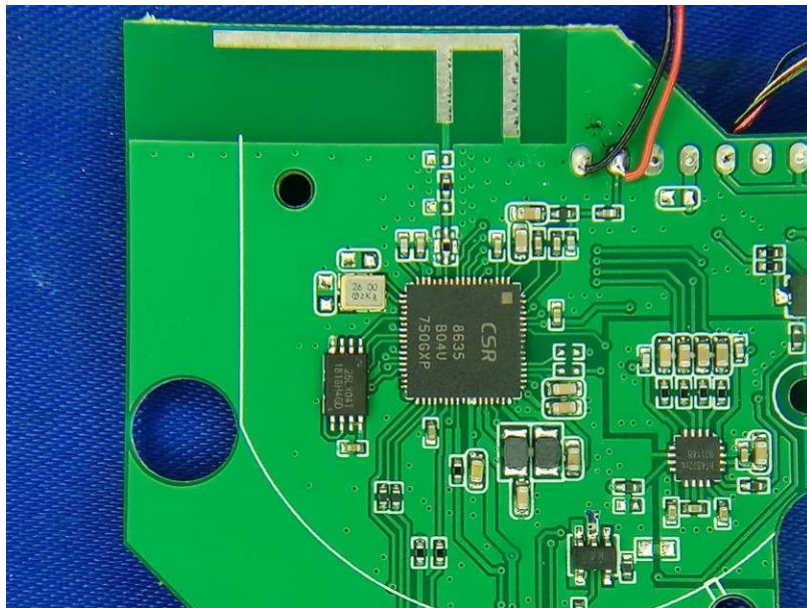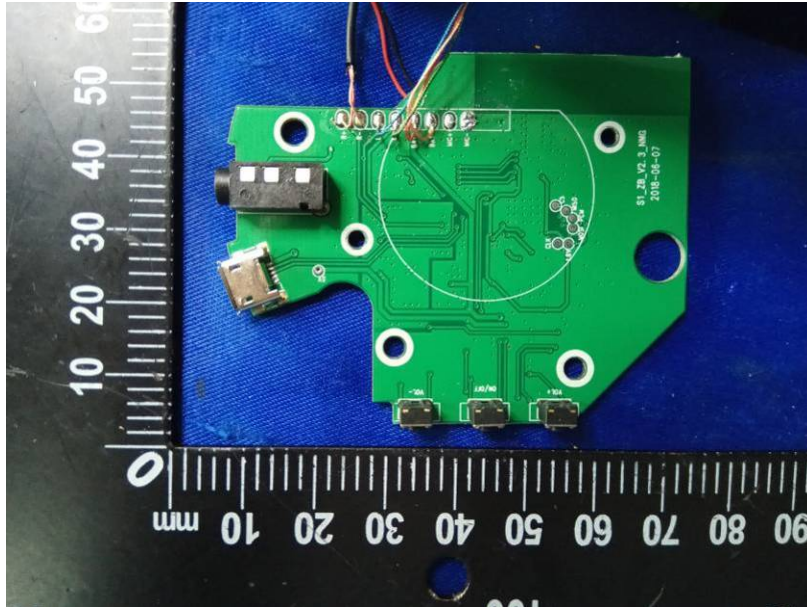



**\*\*\*\*\*THE END REPORT\*\*\*\*\***