

Test report

FCC-15.247 916MHz 2016_290110

Date of issue: March 22, 2016

Applicant: Elko EP

Product: 916 MHz Ultra Low-Power Sub-GHz Transceiver Module

Model: CC11_V2-ELKO Model variant: N/A

FCC ID: 2AFFA-0001


Specifications:

◆ **FCC 47 CFR Part 15 Subpart C, §15.247**

Operation in the 902–928 MHz, 2400–2483.5 MHz, 5725–5850 MHz

Test location

Company name	Nemko USA, Inc.
Address	2210 Faraday Ave, Suite 150
City	Carlsbad
Province	California
Postal code	92008
Country	USA
Telephone	+1 760 444 3500
Website	www.nemko.com
Site number	FCC: US5058; IC: 2040B

Tested by	Feng You, Sr. Wireless Engineer
Reviewed by	James Morris
Review date	March 22, 2016
Reviewer signature	

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko USA Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

Table of contents

Table of contents	3
Section 1. Report summary	4
1.1 Applicant and manufacturer	4
1.2 Test specifications	4
1.3 Test methods.....	4
1.4 Statement of compliance	4
1.5 Exclusions	4
1.6 Test report revision history	4
Section 2. Summary of test results	5
2.1 FCC Part 15 Subpart C, general requirements test results.....	5
2.2 FCC Part 15 Subpart C, intentional radiators test results.....	5
Section 3. Equipment under test (EUT) details	6
3.1 Sample information.....	6
3.2 EUT information	6
3.3 Technical information	6
3.4 Product description and theory of operation	6
3.5 EUT exercise details.....	7
3.6 EUT setup diagram	7
3.7 EUT sub assemblies	8
Section 4. Engineering considerations	9
4.1 Modifications incorporated in the EUT.....	9
4.2 Technical judgment	9
4.3 Deviations from laboratory tests procedures	9
Section 5. Test conditions	10
5.1 Atmospheric conditions	10
5.2 Power supply range.....	10
Section 6. Measurement uncertainty	11
6.1 Uncertainty of measurement	11
Section 7. Test equipment	12
7.1 Test equipment list.....	12
Section 8. Test Data	13
8.1 FCC 15.247(a) (2) and RSS-247 5.2(1) Minimum 6 dB bandwidth.....	13
8.2 FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements	15
8.3 FCC 15.247(d) and RSS-247 5.5 Spurious (out-of-band) emissions	17
8.4 FCC 15.247(e) and RSS-247 5.2(2) Power Spectrum Density	21
Section 9. Block diagrams of test set-ups	23
9.1 Radiated emissions set-up.....	23
9.2 Conducted emissions set-up	23

Section 1. Report summary

1.1 Applicant and manufacturer

Company name	Elko EP, s.r.o.
Address	Palackeho 493
City	Holesov
Province/State	N/A
Postal/Zip code	769 01
Country	Czech Republic

1.2 Test specifications

FCC 47 CFR Part 15, Subpart C, Clause 15.247	Operation in the 902–928 MHz, 2400–2483.5 MHz, 5725–5850 MHz
--	--

1.3 Test methods

ANSI C64.3-2014	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

1.5 Exclusions

None

1.6 Test report revision history

Revision #	Details of changes made to test report
1	Original report issued
2	Updated according to checklist

Section 2. Summary of test results

2.1 FCC Part 15 Subpart C, general requirements test results

Part	Test description	Verdict
§15.207(a)	Conducted limits	Not applicable
§15.31(e)	Variation of power source	Not applicable ¹
§15.203	Antenna requirement	Pass ²
§15.205	Restricted bands of operation	Pass

Notes: ¹ Test performed with new batteries.

² The Antennas are located on PCB.

2.2 FCC Part 15 Subpart C, intentional radiators test results

Part	Test description	Verdict
§15.247(a)(1)	20 dB bandwidth of the hopping channel	Not applicable
§15.247(a)(1)(i)	Frequency hopping systems operating in the 902–928 MHz band	Not applicable
§15.247(a)(1)(ii)	Frequency hopping systems operating in the 5725–5850 MHz band	Not applicable
§15.247(a)(1)(iii)	Frequency hopping systems operating in the 2400–2483.5 MHz band	Not applicable
§15.247(a)(2)	Minimum 6 dB bandwidth for systems using digital modulation techniques	Pass
§15.247(b)(1)	Maximum peak output power of frequency hopping systems operating in the 2400–2483.5 MHz band and 5725–5850 MHz band	Not applicable
§15.247(b)(2)	Maximum peak output power of Frequency hopping systems operating in the 902–928 MHz band	Not applicable
§15.247(b)(3)	Maximum peak output power of systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands	Pass
§15.247(c)(1)	Fixed point-to-point operation with directional antenna gains greater than 6 dBi	Not applicable
§15.247(c)(2)	Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams	Not applicable
§15.247(d)	Spurious emissions	Pass
§15.247(e)	Power spectral density for digitally modulated devices	Pass
§15.247(f)	Time of occupancy for hybrid systems	Not applicable

Section 3. Equipment under test (EUT) details

3.1 Sample information

Receipt date	January 5, 2016
Nemko sample ID number	290110-1

3.2 EUT information

Product name	916 MHz Ultra Low-Power Sub-GHz Transceiver Module
Model	CC11_V2-ELKO
Model variant	N/A
Serial number	N/A

3.3 Technical information

Applicant IC company number	N/A
IC UPN number	N/A
All used IC test site(s) Reg. number	2040B
Frequency band	902-928 MHz
Frequency Min (MHz)	916
Frequency Max (MHz)	916
RF power Min (W), Conducted/ERP/EIRP	N/A
RF power Max (W), Conducted/ERP/EIRP	0.00136 (ERP) / 0.00061 (Conducted)
Field strength, Units @ distance	N/A
Measured BW (kHz) (6 dB)	531 kHz OBW / 645 kHz DTS BW
Calculated BW (kHz), as per TRC-43	N/A
Type of modulation	GFSK
Emission classification (F1D, G1D, D1D)	F1D
Transmitter spurious, Units @ distance	38.9 dB μ V/m @ 3m AVG, 41.4 dB μ V/m @ 3m Peak
Power requirements	3V DC Lithium battery, Type CR2032
Antenna information	3.5dBi antenna on PCB. The EUT uses a unique antenna coupling/ non-detachable antenna to the intentional radiator.

3.4 Product description and theory of operation

EUT is a low-cost sub-1 GHz transceiver module designed for very low-power wireless applications. The circuit is mainly intended for the ISM (Industrial, Scientific and Medical) and SRD (Short Range Device) frequency bands at 916 MHz.

3.5 EUT exercise details

A test version of firmware was implemented. EUT is set in constant transmit mode.

All 3 orthogonal positions are searched for worst case.

3.6 EUT setup diagram



Figure 3.6-1: RE Setup for below 1GHz



Figure 3.6-2: 3 orthogonal positions



Figure 3.6-3: RE Setup for above 1GHz

3.7 EUT sub assemblies

Table 3.7-1: EUT sub assemblies

Description	Brand name	Model/Part number	Serial number
Module with antenna	Elko EP	CC11_V2-ELKO	N/A

Section 4. Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

N/A

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5. Test conditions

5.1 Atmospheric conditions

Temperature	15–30 °C
Relative humidity	20–75 %
Air pressure	860–1060 mbar

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

3V DC Lithium battery.

Section 6. Measurement uncertainty

6.1 Uncertainty of measurement

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of $K = 2$ with 95% certainty.

Test name	Measurement uncertainty, dB
All antenna port measurements	0.55
Conducted spurious emissions	1.13
Radiated spurious emissions	3.78
AC power line conducted emissions	3.55

Section 7. Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

Asset Tag	Description	Manufacturer	Model	Serial #	Next Cal
529	Antenna, DRWG	EMCO	3115	2505	08-Dec-2016
835	Spectrum Analyzer	Rohde & Schwarz	FSEK30	829058/0005	04-Aug-2017
E1017	9kHz to 7GHz Spectrum Analyzer	Rohde & Schwarz	FSP7	839337/0022	01-Jan-2016
1480	Antenna, Bilog	Schaffner-Chase	CBL6111C	2572	18-May-2016
1767	Receiver, EMI Test 20Hz - 26.5 GHz - 150 - +30 dBm LCD	Rohde & Schwarz	ESIB26	837491/0002	04-Feb-2016
4043	True RMS Multimeter	Fluke	115	22620350	20-Jan-2016

Note: NCR - no calibration required, VOI - verify on use

Section 8. Test Data

8.1 FCC 15.247(a) (2) and RSS-247 5.2(1) Minimum 6 dB bandwidth

8.1.1 Definitions and limits

FCC 15.247:

(a) (2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

IC RSS-247

5.2 (1) The minimum 6 dB bandwidth shall be 500 kHz.

8.1.2 Test summary

Test date	January 19, 2016	Temperature	18 °C
Test engineer	Feng You	Air pressure	1003 mbar
Verdict	Pass	Relative humidity	63 %

8.1.3 Observations, settings and special notes

Spectrum analyser settings:

Resolution bandwidth	1–5 % of Channel BW (no wider than 100 kHz) – ANSI C63.10 6.9.2 Occupied Bandwidth 100kHz – ANSI C63.10 11.8 DTS Bandwidth
Video bandwidth	≥3 × RBW
Frequency span	1.5 MHz
Detector mode	Peak
Trace mode	Max Hold


8.1.4 Test data

Table 8.1-1: Occupied bandwidth results

Modulation	Frequency, MHz	Occupied bandwidth, kHz	Limit, kHz	Margin, kHz
GFSK	916	531	500	31


Table 8.1-2: DTS bandwidth results

Modulation	Frequency, MHz	DTS bandwidth, kHz	Limit, kHz	Margin, kHz
GFSK	916	654	500	154

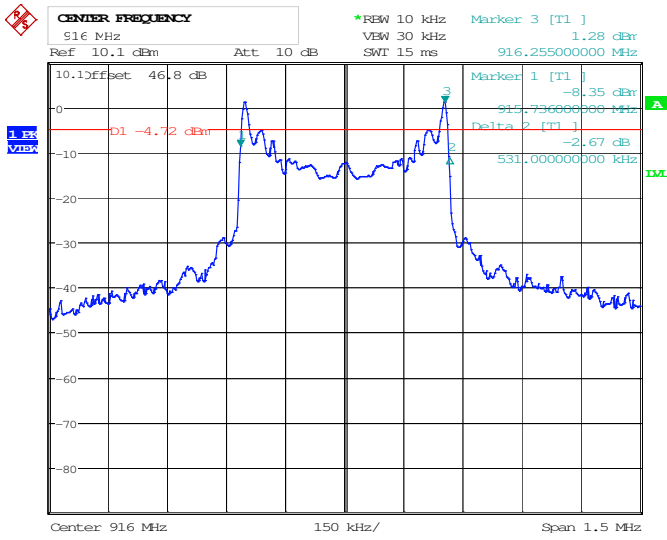

Date: 1.FEB.1997 18:41:35

Figure 8.1-1: Occupied bandwidth, 916MHz

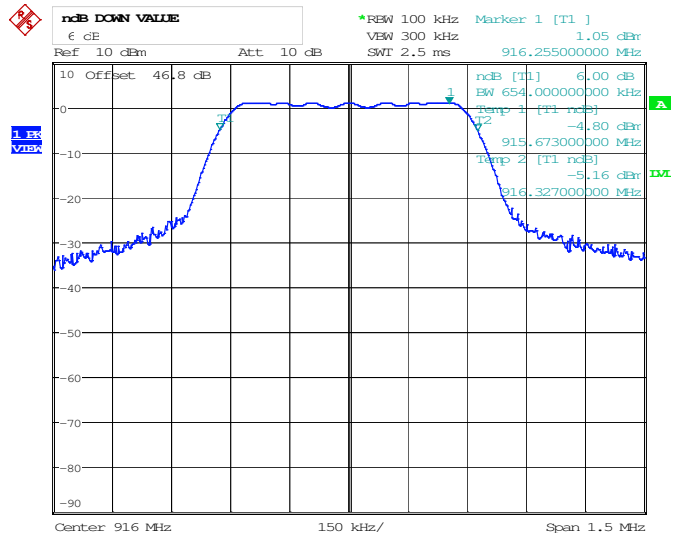

Date: 1.FEB.1997 18:46:19

Figure 8.1-2: DTS bandwidth, 916MHz

8.2 FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements

8.2.1 Definitions and limits

FCC:

- (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
- (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
 - (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC:

5.4 Transmitter Output Power and Equivalent Isotropically Radiated Power (E.I.R.P.) Requirements

- (4) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

8.2.2 Test summary

Test date	January 19, 2016	Temperature	18 °C
Test engineer	Feng You	Air pressure	1003 mbar
Verdict	Pass	Relative humidity	63 %

8.2.3 Observations, settings and special notes

Antenna gain 3.5dBi.

ERIP is measured value, output power calculated.

All 3 orthogonal positions are searched for highest value.

8.2.4 Test data

Table 8.2-1: Output power measurements results

Power Source	Frequency, MHz	Conducted output power, dBm		Margin, dB	Antenna gain, dBi	EIRP, dBm	EIRP limit, dBm	EIRP margin, dB
		Measured	Limit					
Battery	916	-2.17	30	32.17	3.5	1.33	36	34.67

8.3 FCC 15.247(d) and RSS-247 5.5 Spurious (out-of-band) emissions

8.3.1 Definitions and limits

FCC:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

IC:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

(a) Fundamental components of modulation of licence-exempt radio apparatus shall not fall within the restricted bands of Table 8.4-1 except for apparatus complying under RSS-287;

(b) Unwanted emissions that fall into restricted bands of Table 6 shall comply with the limits specified in RSS-Gen; and

(c) Unwanted emissions that do not fall within the restricted frequency bands of Table 8.4-1 shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

Table 8.3-1: FCC §15.209 and RSS-Gen – Radiated emission limits

Frequency, MHz	Field strength of emissions		Measurement distance, m
	µV/m	dBµV/m	
0.009–0.490	2400/F	67.6 – 20 × log ₁₀ (F)	300
0.490–1.705	24000/F	87.6 – 20 × log ₁₀ (F)	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

Table 8.3-2: IC restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	12.51975–12.52025	399.9–410	5.35–5.46
2.1735–2.1905	12.57675–12.57725	608–614	7.25–7.75
3.020–3.026	13.36–13.41	960–1427	8.025–8.5
4.125–4.128	16.42–16.423	1435–1626.5	9.0–9.2
4.17725–4.17775	16.69475–16.69525	1645.5–1646.5	9.3–9.5
4.20725–4.20775	16.80425–16.80475	1660–1710	10.6–12.7
5.677–5.683	25.5–25.67	1718.8–1722.2	13.25–13.4
6.215–6.218	37.5–38.25	2200–2300	14.47–14.5
6.26775–6.26825	73–74.6	2310–2390	15.35–16.2
6.31175–6.31225	74.8–75.2	2655–2900	17.7–21.4
8.291–8.294	108–138	3260–3267	22.01–23.12
8.362–8.366	156.52475–156.52525	3332–3339	23.6–24.0
8.37625–8.38675	156.7–156.9	3345.8–3358	31.2–31.8
8.41425–8.41475	240–285	3500–4400	36.43–36.5
12.29–12.293	322–335.4	4500–5150	Above 38.6

Note: Certain frequency bands listed in Table 8.4-2 and above 38.6 GHz are designated for low-power licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard

Table 8.3-3: FCC restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

8.3.2 Test summary

Test date	January 18, 2016	Temperature	17 °C
Test engineer	Feng You	Air pressure	1013 mbar
Verdict	Pass	Relative humidity	73 %

8.3.3 Observations, settings and special notes

The spectrum was searched from 30 MHz to the 10th harmonic.
 EUT was set to transmit with 100 % duty cycle.

Spectrum analyser settings for conducted spurious emissions measurements:

Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyser settings for radiated measurements within restricted bands below 1 GHz:

Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Detector mode:	Peak
Trace mode:	Max Hold


Spectrum analyser settings for peak radiated measurements within restricted bands above 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyser settings for average radiated measurements within restricted bands above 1 GHz:


Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	AVG
Trace mode:	Max Hold

8.3.4 Test data

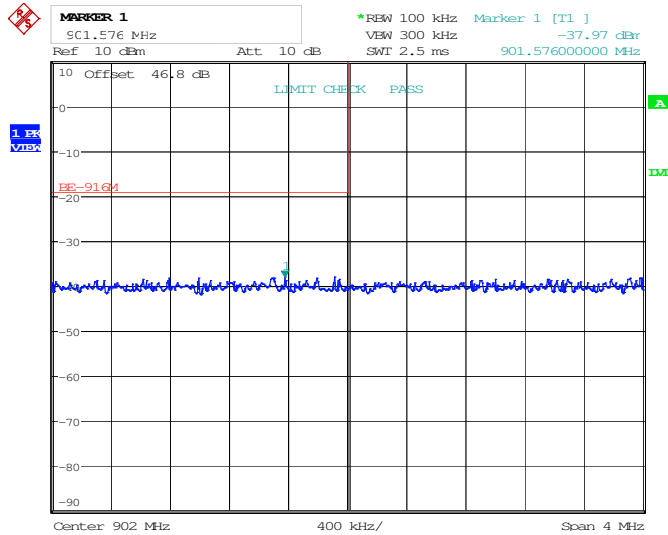


Date: 2.FEB.1997 00:37:26

Figure 8.3-1: Bandedge Measurement, low

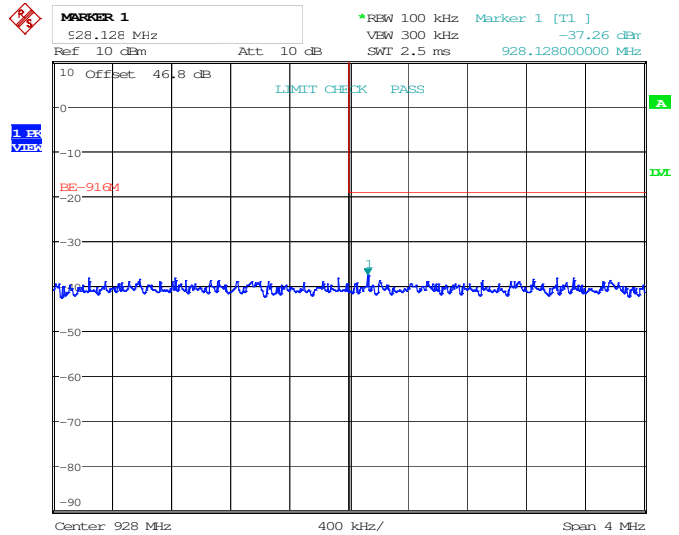

Date: 2.FEB.1997 00:37:58

Figure 8.3-2: Bandedge Measurement, high

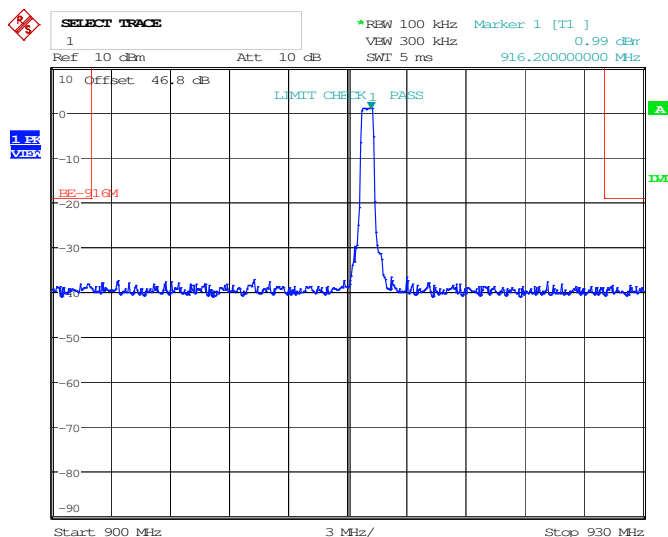

Date: 2.FEB.1997 00:36:27

Figure 8.3-3: Bandedge Measurement, Overview

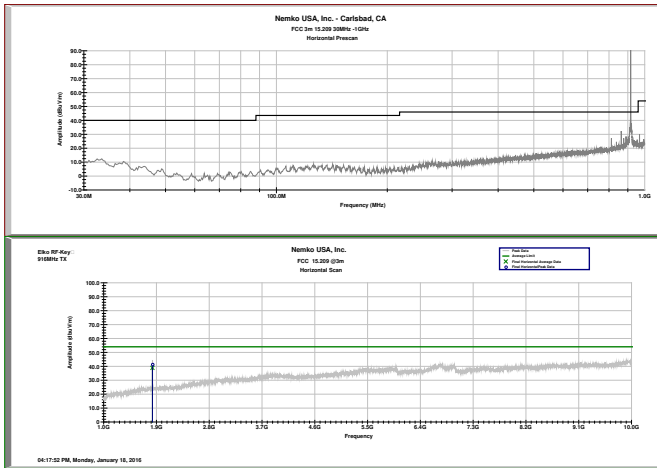


Figure 8.3-4: Radiated spurious emissions, 916MHz TX, Horizontal

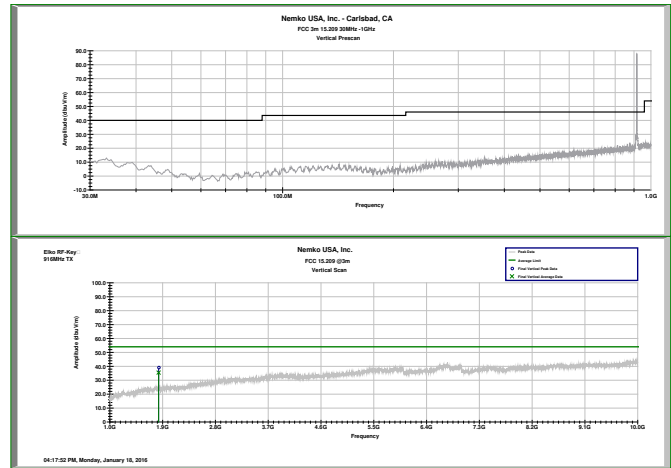


Figure 8.3-5: Radiated spurious emissions 916MHz TX, Vertical

Table 8.3-4: Radiated field strength measurement results for 916MHz, <1GHz

Frequency MHz	QP Field strength dBμV/m	QP Limit dBμV/m	QP Margin dB	Polarity H/V
812.085	23.9	46	22.1	H
864.267	29.82	46	16.18	H
967.887	29.56	54	24.44	H

Table 8.3-5: Radiated field strength measurement results for 916MHz, >1GHz

Frequency MHz	AVG Field strength dBμV/m	Peak Field strength dBμV/m	AVG Limit dBμV/m	Peak Limit dBμV/m	AVG Margin dB	Peak Margin dB	Polarity H/V
1831.69	38.9	41.4	54	74	15.1	32.6	H
1832.43	35.5	39.3	54	74	18.5	34.7	V

8.4 FCC 15.247(e) and RSS-247 5.2(2) Power Spectrum Density

8.4.1 Definitions and limits

FCC and IC:

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


8.4.2 Test summary

Test date	January 19, 2016	Temperature	18 °C
Test engineer	Feng You	Air pressure	1003 mbar
Verdict	Pass	Relative humidity	63 %

8.4.3 Observations, settings and special notes

3kHz RBW

8.4.4 Test data

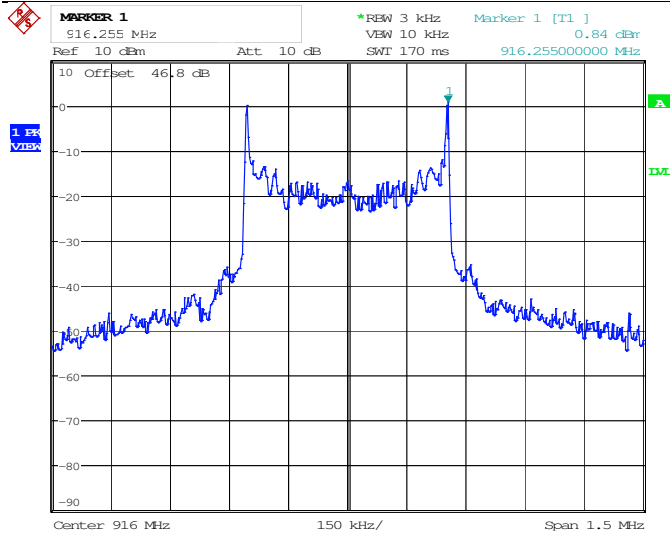

Date: 2.FEB.1997 00:32:49


Diagram 8.4-1: Power Spectrum Density,, 916MHz

Table 8.4-1: Power Spectrum Density

Power Source	Frequency, MHz	Conducted PSD@3kHz, dBm		Margin, dB	Antenna gain, dBi	EIRP, dBm	EIRP limit, dBm	EIRP margin, dB
		Measured	Limit					
Battery	916	-2.66	8	10.66	3.5	0.84	14	13.16

Section 9. Block diagrams of test set-ups

9.1 Radiated emissions set-up

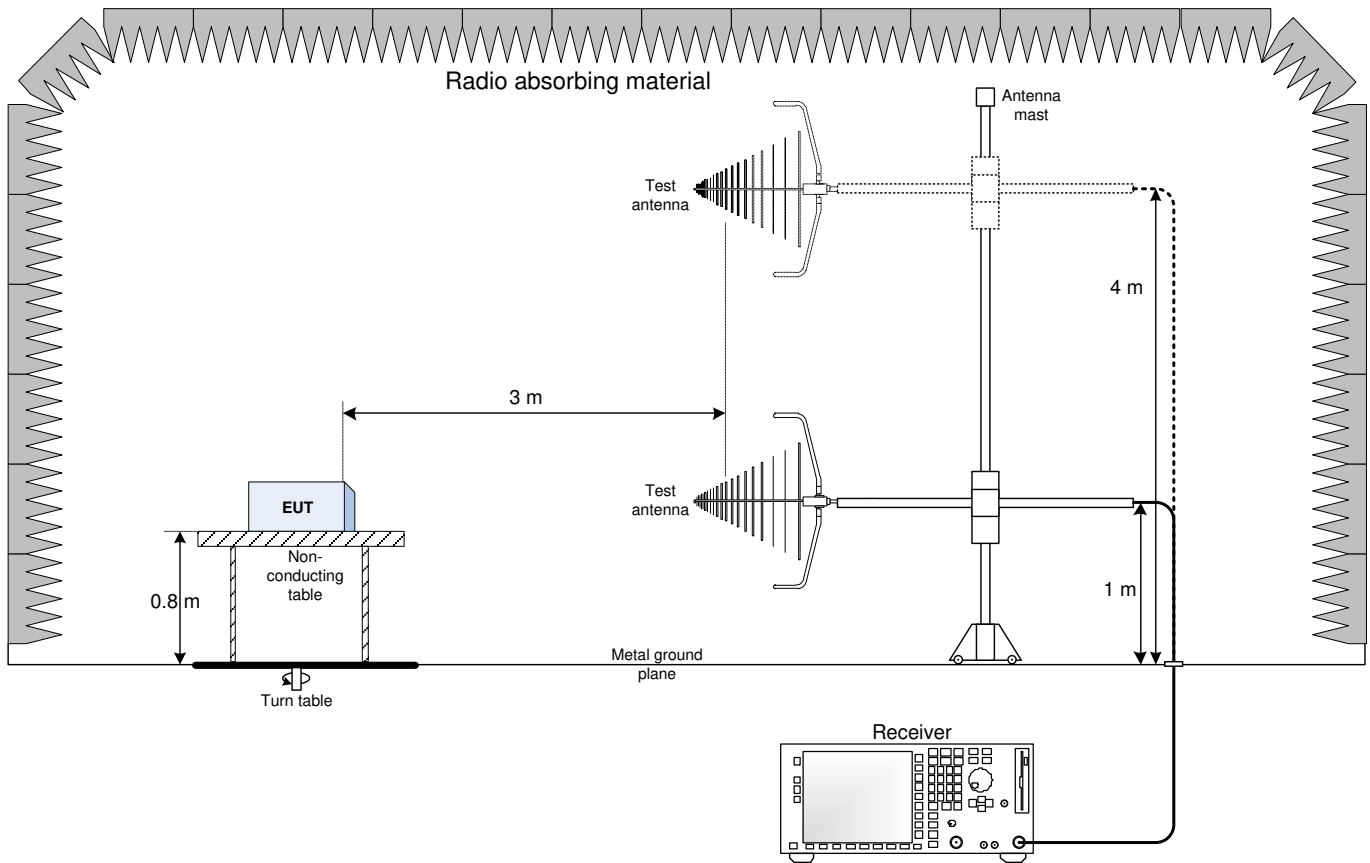

9.2 Conducted emissions set-up

