

**FCC 47 CFR PART 15 SUBPART C****TEST REPORT****For****Product Name: YI 1080p Home Camera****Brand Name: YI****Model No.: YYS.2016****Series Model.: N/A****FCC ID: 2AFIB-YY52016****Test Report Number:****C161128R01-RPW****Issued for****Shanghai Xiaoyi Technology Co., Ltd.****6F,Building E,No.2889,Jinke Road,Shanghai,China****Issued by****Compliance Certification Services Inc.****Kun shan Laboratory****No.10 Weiye Rd., Innovation park, Eco&Tec,  
Development Zone, Kunshan City, Jiangsu, China****TEL: 86-512-57355888****FAX: 86-512-57370818**

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.

## TABLE OF CONTENTS

<b>1.</b>	<b>TEST RESULT CERTIFICATION.....</b>	<b>4</b>
<b>2.</b>	<b>EUT DESCRIPTION.....</b>	<b>5</b>
<b>3.</b>	<b>TEST METHODOLOGY .....</b>	<b>6</b>
3.1.	EUT CONFIGURATION .....	6
3.2.	EUT EXERCISE .....	6
3.3.	GENERAL TEST PROCEDURES.....	6
3.4.	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5.	DESCRIPTION OF TEST MODES.....	8
3.6.	ANTENNA DESCRIPTION .....	9
<b>4.</b>	<b>INSTRUMENT CALIBRATION.....</b>	<b>10</b>
4.1.	MEASURING INSTRUMENT CALIBRATION .....	10
<b>5.</b>	<b>FACILITIES AND ACCREDITATIONS .....</b>	<b>12</b>
5.1.	FACILITIES .....	12
5.2.	EQUIPMENT.....	12
5.3.	LABORATORY ACCREDITATIONS AND LISTING .....	12
5.4.	TABLE OF ACCREDITATIONS AND LISTINGS .....	13
<b>6.</b>	<b>SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>14</b>
6.1.	SETUP CONFIGURATION OF EUT.....	14
6.2.	SUPPORT EQUIPMENT.....	14
<b>7.</b>	<b>FCC PART 15.247 REQUIREMENTS.....</b>	<b>15</b>
7.1.	6DB BANDWIDTH .....	15
7.2.	PEAK POWER .....	22
7.3.	PEAK POWER SPECTRAL DENSITY .....	24
7.4.	SPURIOUS EMISSIONS .....	32
7.5.	RADIATED EMISSIONS.....	55
7.6.	POWERLINE CONDUCTED EMISSIONS .....	73



### Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	December 14, 2016	C161128R01-RPW	ALL	N/A

## 1. TEST RESULT CERTIFICATION

<b>Product Name:</b>	YI 1080p Home Camera
<b>Trade Name:</b>	YI
<b>Model Name.:</b>	YY5.2016
<b>Series Model:</b>	N/A
<b>Applicant Discrepancy:</b>	Initial
<b>Device Category:</b>	Mobile unit
<b>Date of Test:</b>	December 5, 2016 ~ December 11, 2016
<b>Applicant:</b>	<b>Shanghai Xiaoyi Technology Co., Ltd.</b> 6F,Building E,No.2889,Jinke Road,Shanghai,China
<b>Manufacturer:</b>	<b>Shanghai Xiaoyi Technology Co., Ltd.</b> 6F,Building E,No.2889,Jinke Road,Shanghai,China
<b>Application Type:</b>	Certification

### APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.


The test results of this report relate only to the tested sample EUT identified in this report.

**Approved by:**



Jeff.Fang  
RF Manager  
Compliance Certification Service Inc.

**Tested by:**



Lily.Wang  
Test Engineer  
Compliance Certification Service Inc.

## 2. EUT DESCRIPTION

<b>Product Name:</b>	YI 1080p Home Camera
<b>Brand Name:</b>	YI
<b>Model Name:</b>	YY5.2016
<b>Series Model:</b>	N/A
<b>Model Discrepancy:</b>	N/A
<b>Power Adapter:</b>	Model:A8-501000 INPUT: 100-240V~50/60Hz 0.2A Max OUTPUT : 5 V $\overline{\overline{=}}$ 1.0A
<b>Frequency Range:</b>	IEEE 802.11b/g: 2412MHz to 2462 MHz IEEE 802.11n HT20: 2412MHz to 2462 MHz IEEE 802.11n HT40: 2422MHz to 2452 MHz
<b>Transmit Power:</b>	IEEE 802.11b mode: 18.53dBm IEEE 802.11g mode: 17.03 dBm IEEE 802.11n HT20 mode: 16.55dBm IEEE 802.11n HT40 mode: 16.16 dBm
<b>Modulation Technique:</b>	IEEE802.11b mode: DSSS (1,2,5.5 and 11 Mbps) IEEE802.11g mode: DSSS /OFDM (6,9,12,18,24,36,48 and 54 Mbps) IEEE802.11n HT20 mode: OFDM (MCS0~MCS7) IEEE802.11n HT40 mode: OFDM (MCS0~MCS7)
<b>Number of Channels:</b>	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT20 : 11 Channels IEEE 802.11n HT40 : 9 Channels
<b>Antenna Specification:</b>	PIFA Antenna Gain: 2.45 dBi

### Remark:

1.The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2.This submittal(s) (test report) is intended for **FCC ID: 2AFIB-YY52016** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.10 2013 and FCC CFR 47 15.207, 15.209 and 15.247.

#### **3.1.EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2.EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3.GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10 2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

Under 1GHz

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10:2013.

Above 1GHz

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10:2013.

### 3.4.FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 3.5.DESCRPTION OF TEST MODES

The worst-case data rates:

IEEE802.11b mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 1Mbps data rate was chosen for full testing.

IEEE802.11g mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 6Mbps data rate was chosen for full testing.

IEEE 802.11n HT20 MHz Channel mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with MCS0 data rate was chosen for full testing.

IEEE 802.11n HT40 MHz Channel mode:

Channel Low (2422MHz)

Channel Mid (2437MHz)

Channel High (2452MHz) with MCS0 data rate was chosen for full testing.




### 3.6.ANTENNA DESCRIPTION

an intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section”

\* the antenna of this EUT is a unique(PIFA Antenna for WiFi).

\* the EUT complies with the requirement of 15.203.

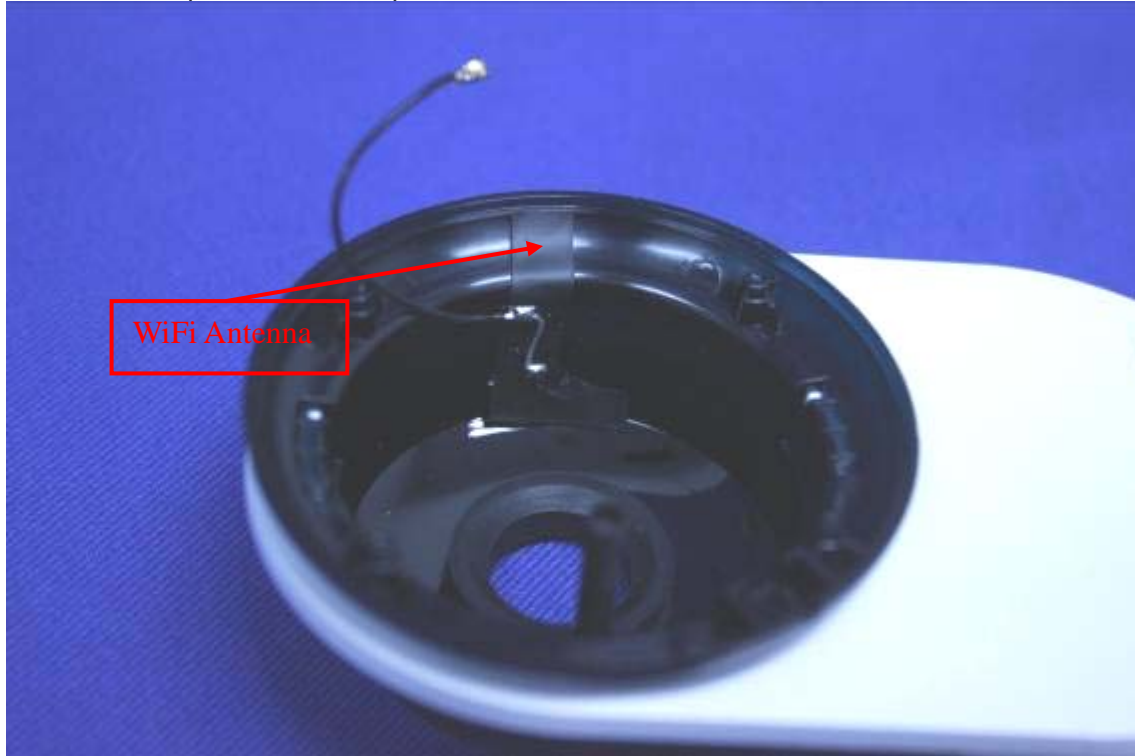

## 4. INSTRUMENT CALIBRATION

### 4.1.MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

#### Equipment Used for Emissions Measurement

Conducted Emissions Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300398	2016-7-21	2017-7-20
Spectrum Analyzer	RS	FSU26	200789	2016-7-21	2017-7-20
OSCILLOSCOPE	Agilent	DSO6104A	MY44002585	2016-3-2	2017-3-1
Power meter	Anritsu	ML2495A	1445010	2016-5-16	2017-5-15
Power sensor	Anritsu	MA2411B	1339220	2016-5-16	2017-5-15
Power SPLITTER	Mini-Circuits	ZN2PD-9G	SF078500430	N.C.R	N.C.R
DC Power Supply	AGILENT	E3632A	MY50340053	N.C.R	N.C.R
Temp. / Humidity Gauge	Anymetre	TH603	CCS007	2016-11-1	2017-10-31
Test Software			EZ-EMC		

977 Chamber					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300398	2016-7-21	2017-7-20
Spectrum Analyzer	RS	FSU26	200789	2016-7-21	2017-7-20
EMI Test Receiver	R&S	ESCI	101378	2016-1-6	2017-1-5
Amplifier	MITEQ	AMF-6F-260400-40-8P	1037496	2016-9-10	2017-9-9
Bilog Antenna	Sunol	JB1	A062604	2016-5-29	2017-5-28
Bilog Antenna	Sunol	JB1	A110204-1	2016-5-29	2017-5-28
Loop Antenna	SCHWARZBECK	HXYZ9170	9170-108	2016-4-7	2017-4-6
Horn-antenna	SCHWARZBECK	9120D	D:266	2016-3-6	2017-3-5
Horn-antenna	SCHWARZBECK	9120D	D:267	2016-11-9	2017-11-8
Turn Table	CT	CT123	4165	N.C.R	N.C.R
Antenna Tower	CT	CTERG23	3256	N.C.R	N.C.R
Controller	CT	CT100	95637	N.C.R	N.C.R
Test Software			EZ-EMC		

Conducted Emission					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EMI TEST RECEIVER	R&S	ESCI	100781	2016-3-2	2017-3-1
V (V-LISN)	SCHWARZBECK	NNLK8129	8129-143	2016-11-1	2017-10-31
TWO-LINE V-NETWORK	R&S	ENV216	101604	2016-11-1	2017-10-31
Pulse LIMITER	R&S	ESH3-Z2	100524	2016-1-6	2017-1-5
Test Software			EZ-EMC		

**Remark:** The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Expanded Uncertainty (95% CONFIDENCE INTERVAL): K=2

## **5. FACILITIES AND ACCREDITATIONS**

### **5.1.FACILITIES**

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone

Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 2013 and CISPR Publication 22.

### **5.2.EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.



Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### **5.3.LABORATORY ACCREDITATIONS AND LISTING**

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 200581-0 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, 2324E-1 for 10m chamber 10m, 2324E-2 for 10m chamber 3m; the test facilities are listed with USA, Certification and Engineering Bureau, 424105 for 10m chamber 10m, 238958 for 10m chamber 3m.

**5.4.TABLE OF ACCREDITATIONS AND LISTINGS**

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	47 CFR FCC Part 15/18 (using ANSI C63.10 :2013); VCCI V3; CNS 13438; CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22:2005; CISPR 22:1997 +A1 :2000+A2 :2002; EN 55022:2006; EN55022 :1998 +A1 :2001+A2 :2003; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-4; AS/NZS CISPR 22; CAN/CSA-CEI/IEC CISPR 22; EN 61000-3-2; EN 61000-3-3; EN550024; EN 61000-4-2; EN 61000-4-3; EN61000-4-4; EN 61000-4-5; EN 61000-4-6; IEC 61000-4-8; EN 61000-4-11; IEC61000-3-2; IEC61000-3-3; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8; IEC 61000-4-11; EN 300 220-3; EN 300 328; EN 300 330-2; EN 300 440-1; EN 300-440-2; EN 301 893; EN 301 489-01; EN 301 489-3; EN 301 489-07; EN 301 489-17; 47 CFR FCC Part 15, 22, 24	
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	<b>VCCI</b> R-1600 C-1707 G-216

*\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*

## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1.SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 6.2.SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID
1.	N/A				

**Remark:**

2. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
3. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


## 7. FCC PART 15.247 REQUIREMENTS

### 7.1.6DB BANDWIDTH

#### LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, and 2400 - 2483.5 MHz bands, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

#### Test Configuration



#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW set as 100kHz., The VBW set as 3 times the RBW, set detector as Peak, the sweep time is auto.

#### TEST RESULTS

No non-compliance noted

##### Test Data

##### IEEE 802.11b mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.048	>500	PASS
Mid	2437	10.00		PASS
High	2462	10.00		PASS

##### IEEE 802.11g mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.538	>500	PASS
Mid	2437	16.538		PASS
High	2462	16.538		PASS

##### IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.692	>500	PASS
Mid	2437	17.692		PASS
High	2462	17.692		PASS


##### IEEE 802.11n HT40 mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.538	>500	PASS
Mid	2437	36.538		PASS
High	2452	36.538		PASS


**Test Plot**

**IEEE 802.11b MODE**

**6dB Bandwidth (CH Low)**

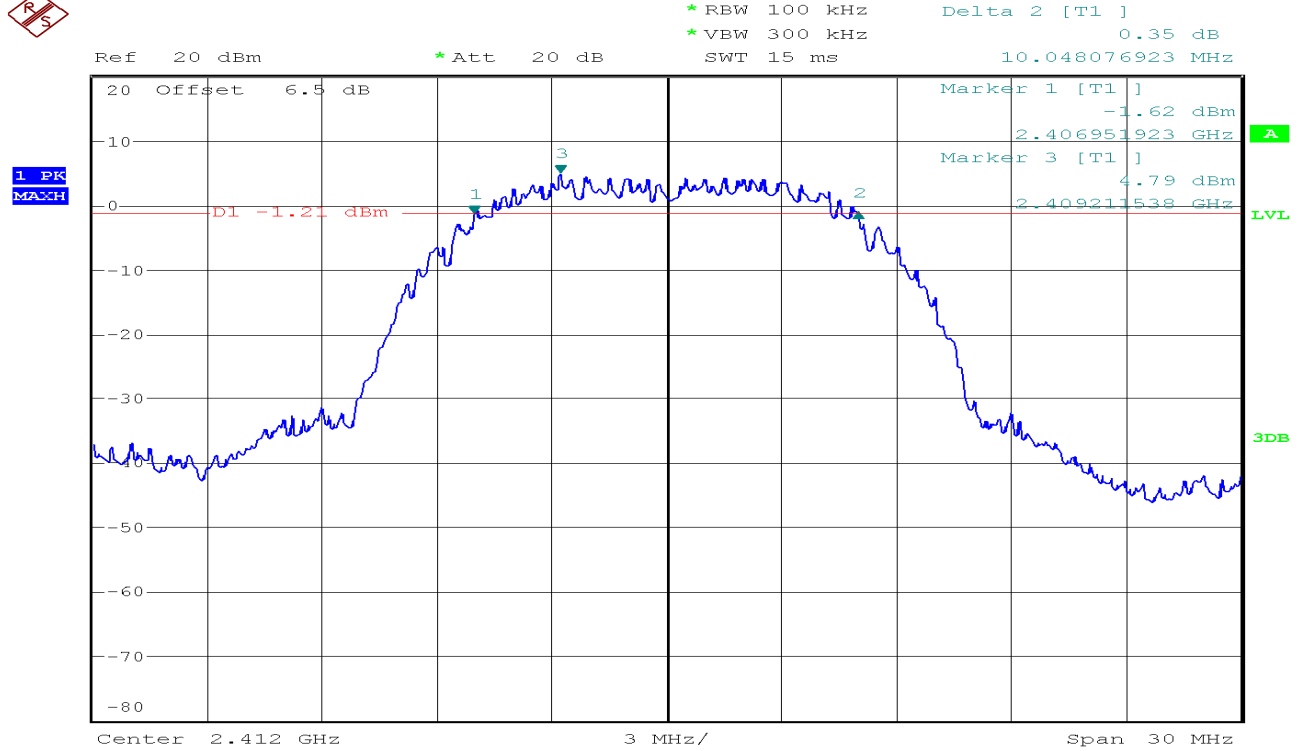

**6dB Bandwidth (CH Mid)**

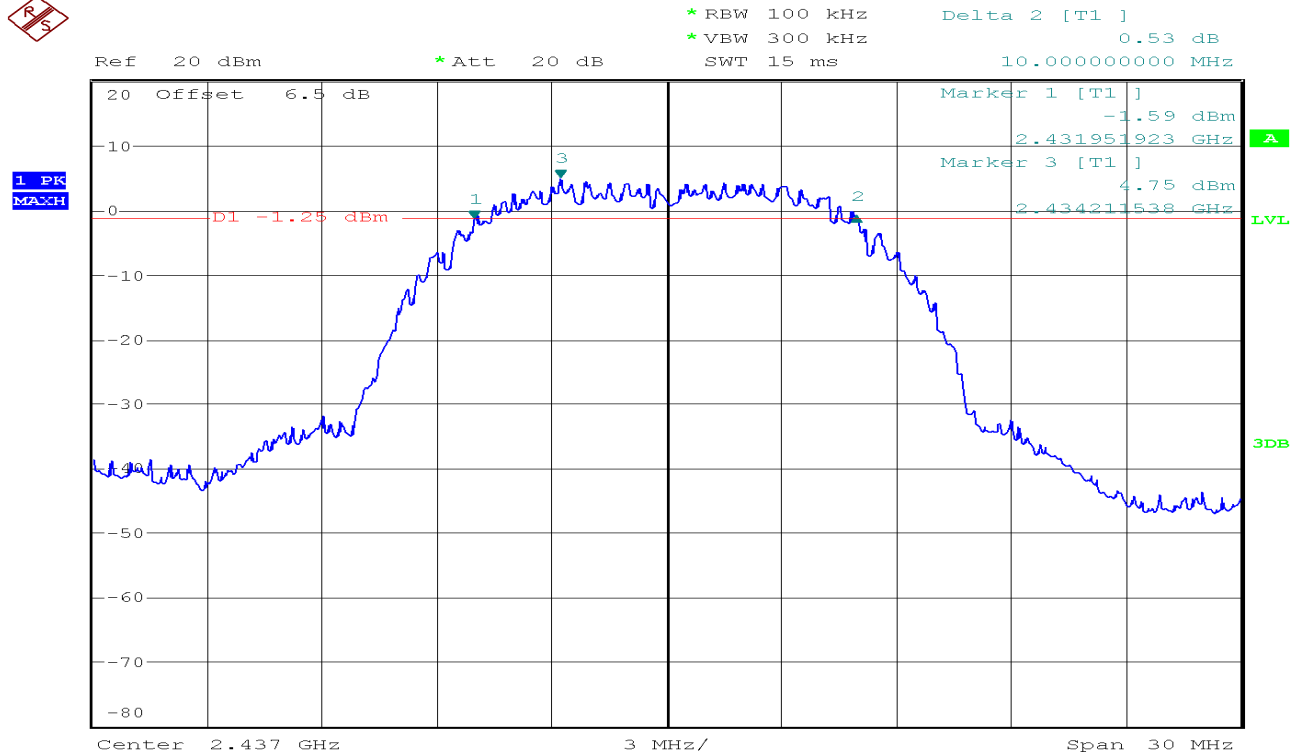




6dB Bandwidth (CH High)



1 PK  
MAXH

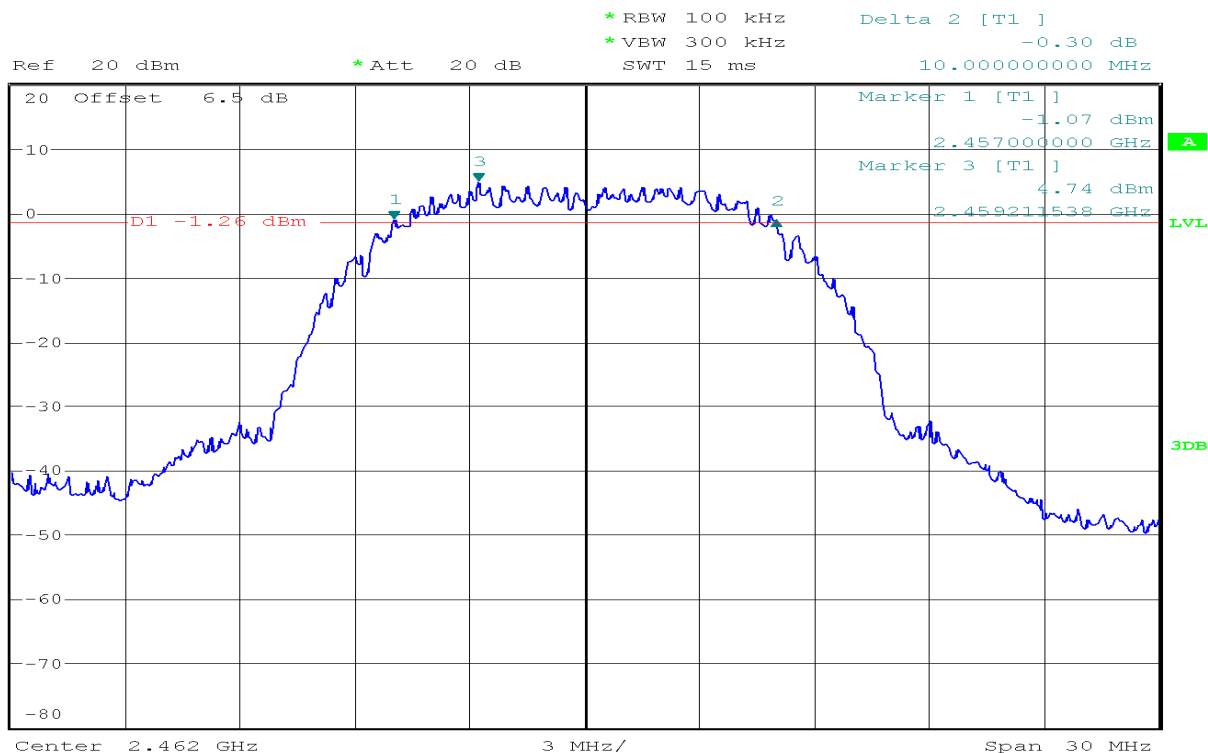


IEEE 802.11g MODE


6dB Bandwidth (CH Low)




1 PK  
MAXH

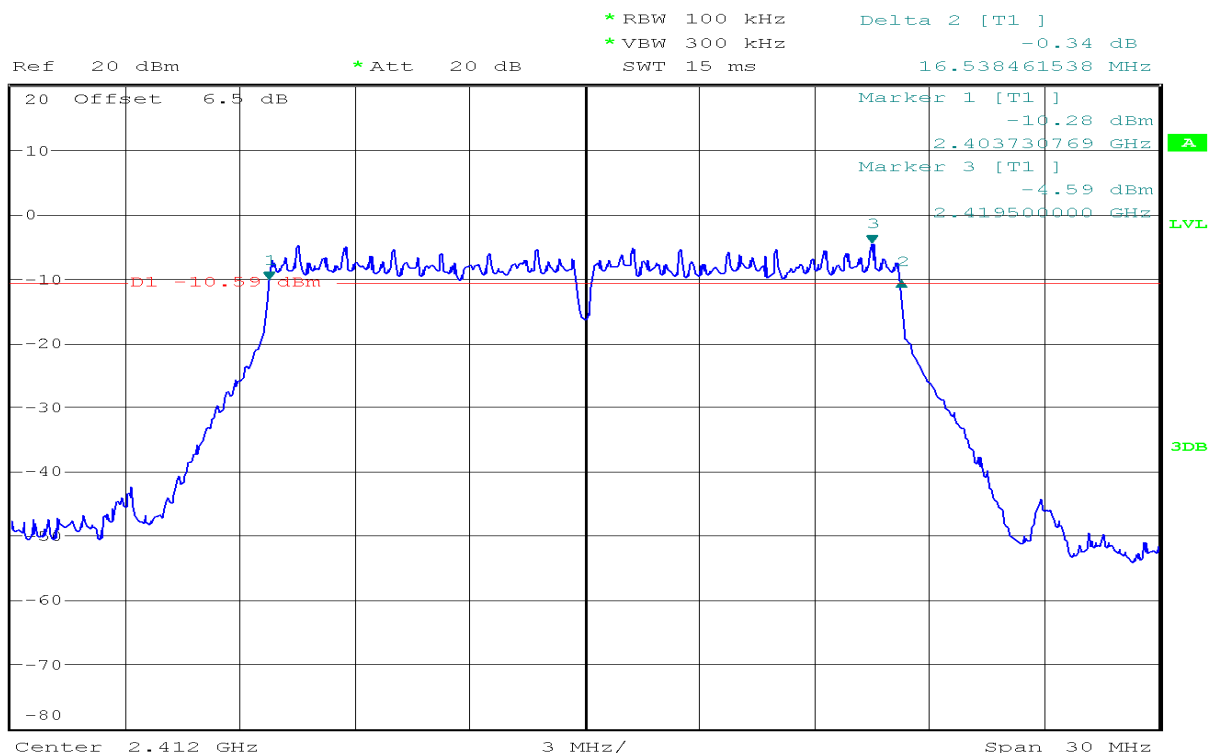

**6dB Bandwidth (CH Mid)**

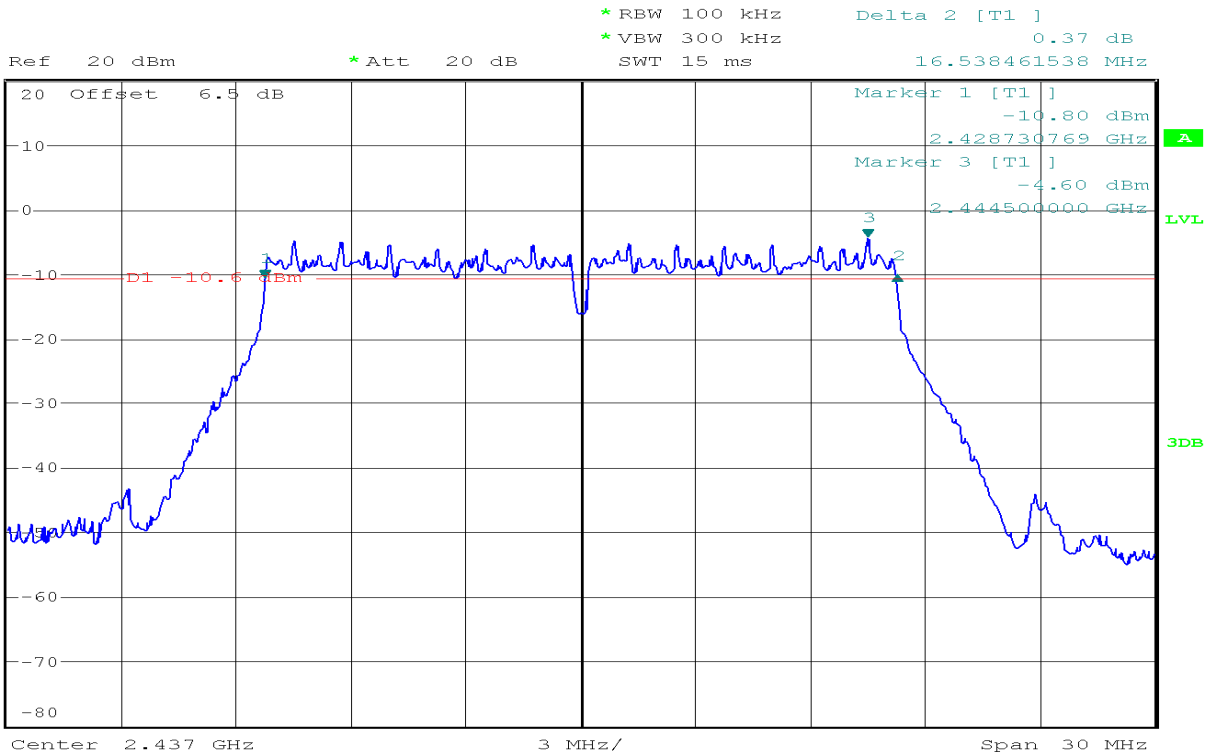


**6dB Bandwidth (CH High)**

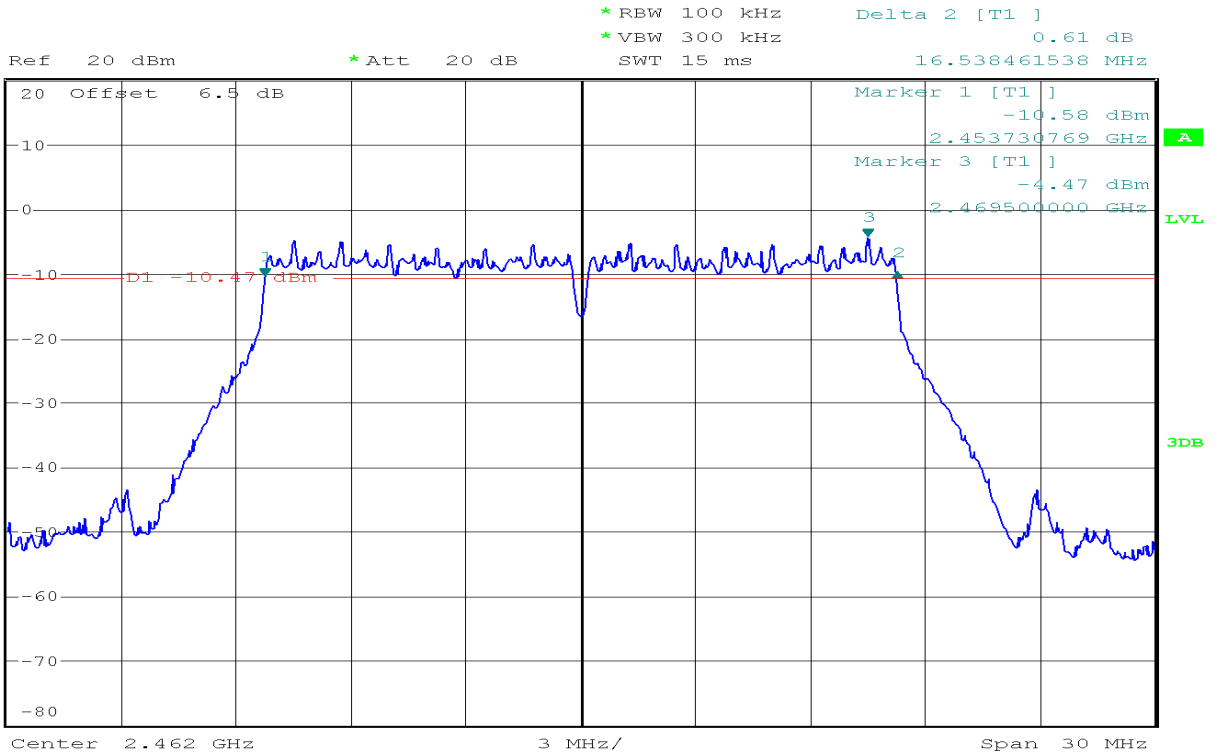


IEEE 802.11n HT20 mode


6dB Bandwidth (CH Low)

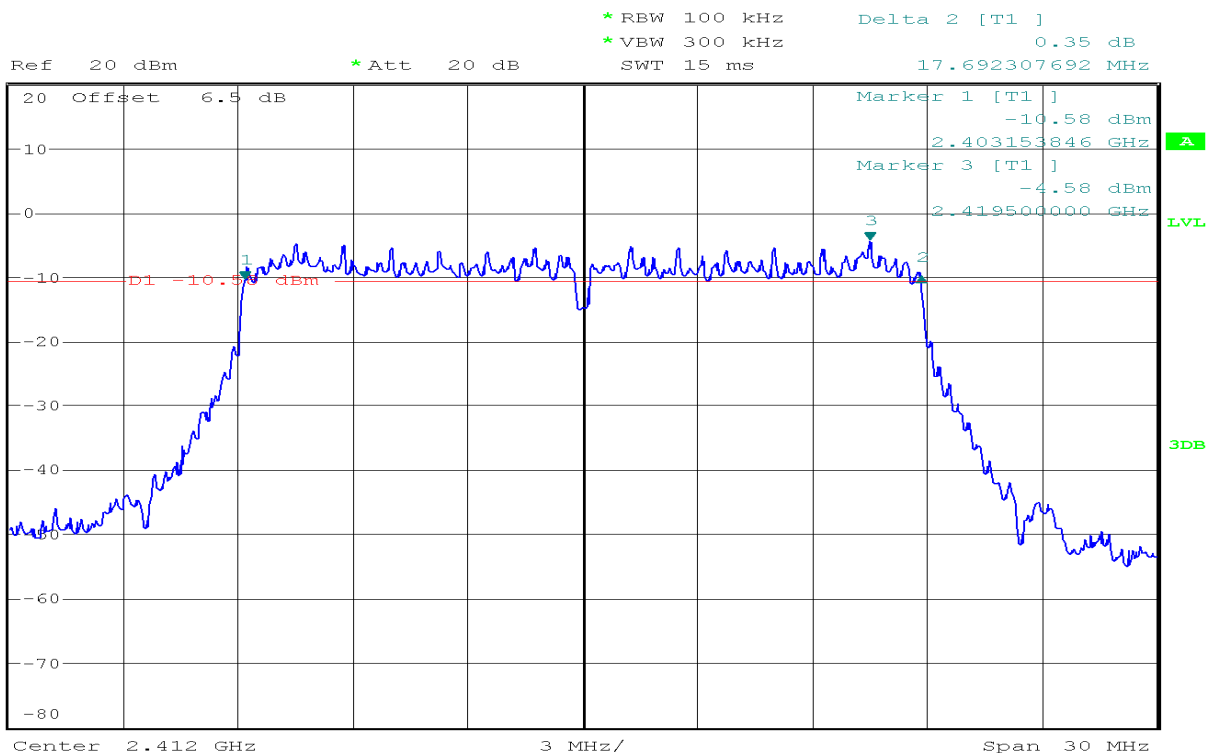

6dB Bandwidth (CH Mid)

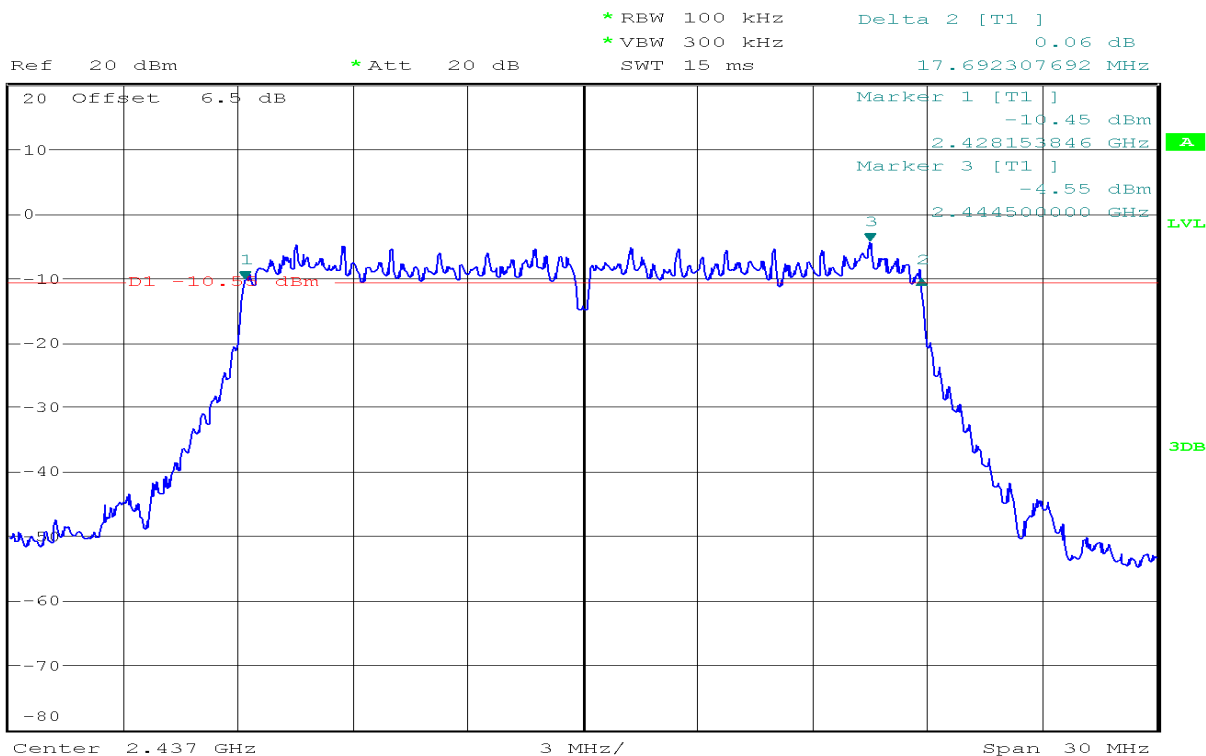


**6dB Bandwidth (CH High)**

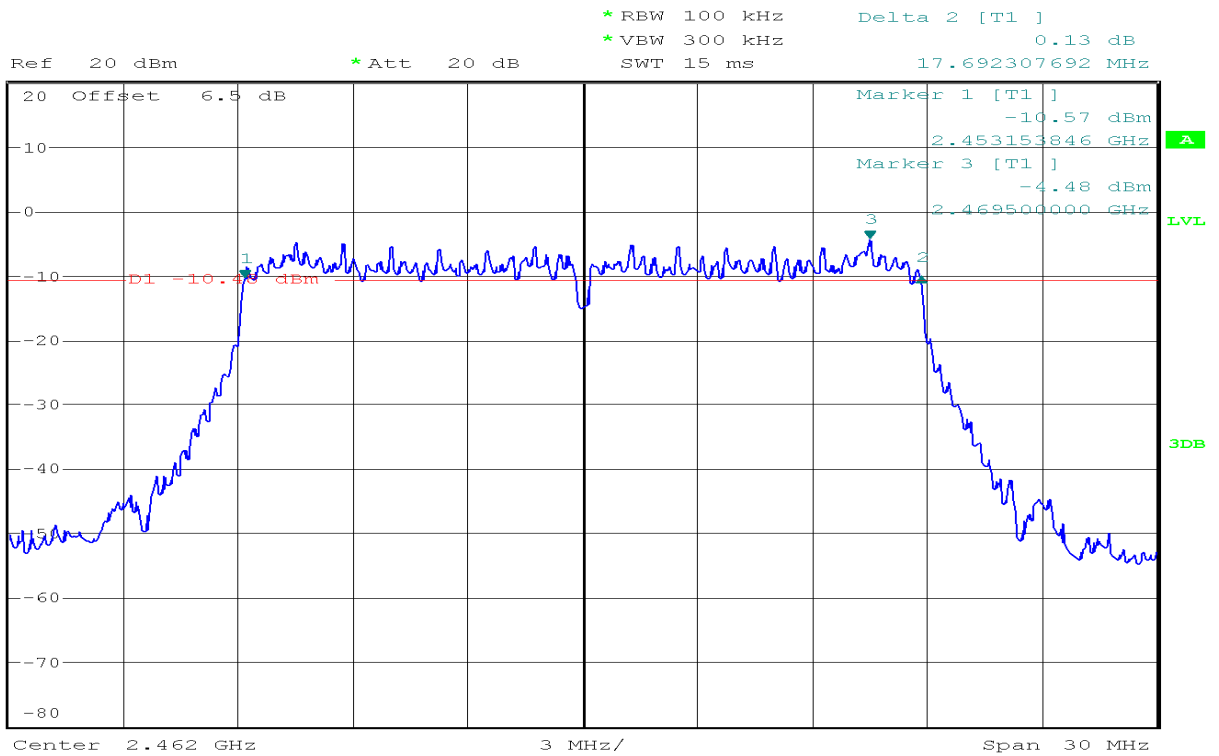

**IEEE 802.11n HT40 mode**

**6dB Bandwidth (CH Low)**

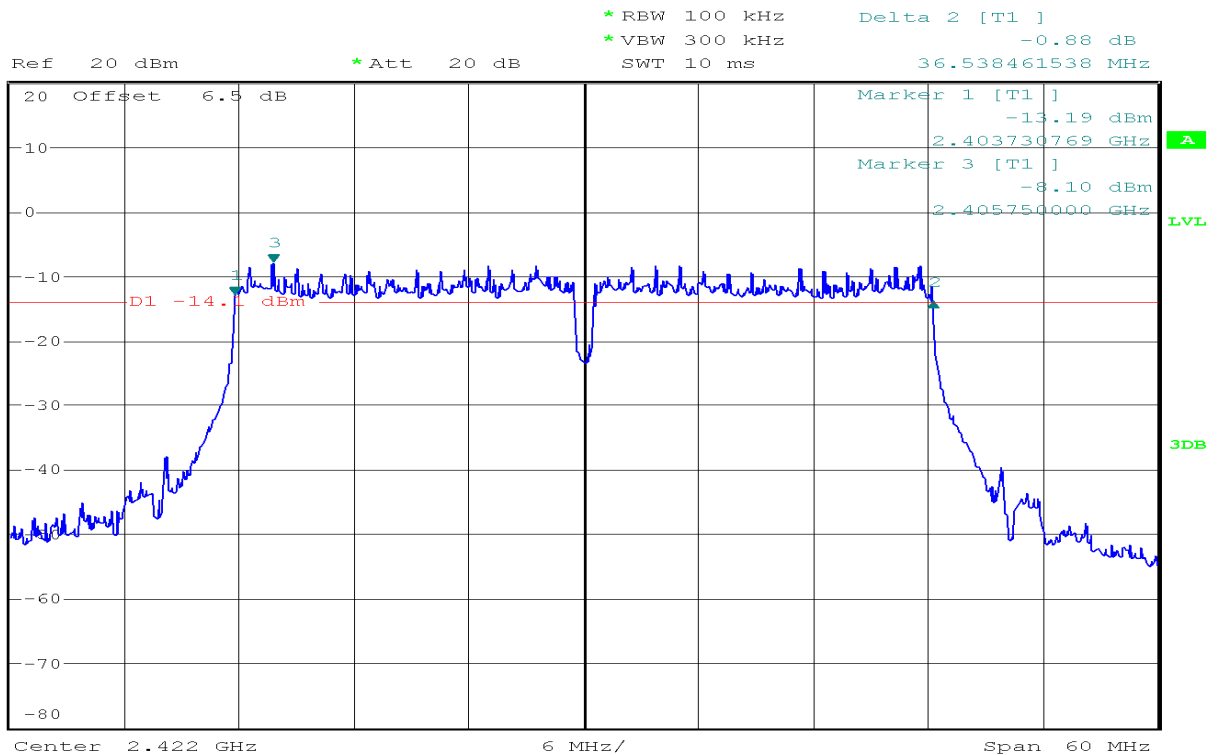


**6dB Bandwidth (CH Mid)**



1 PK  
MAXH

\* RBW 100 kHz      Delta 2 [T1 ]  
 \* VBW 300 kHz      0.63 dB  
 \* Att 20 dB      SWT 10 ms      36.538461538 MHz

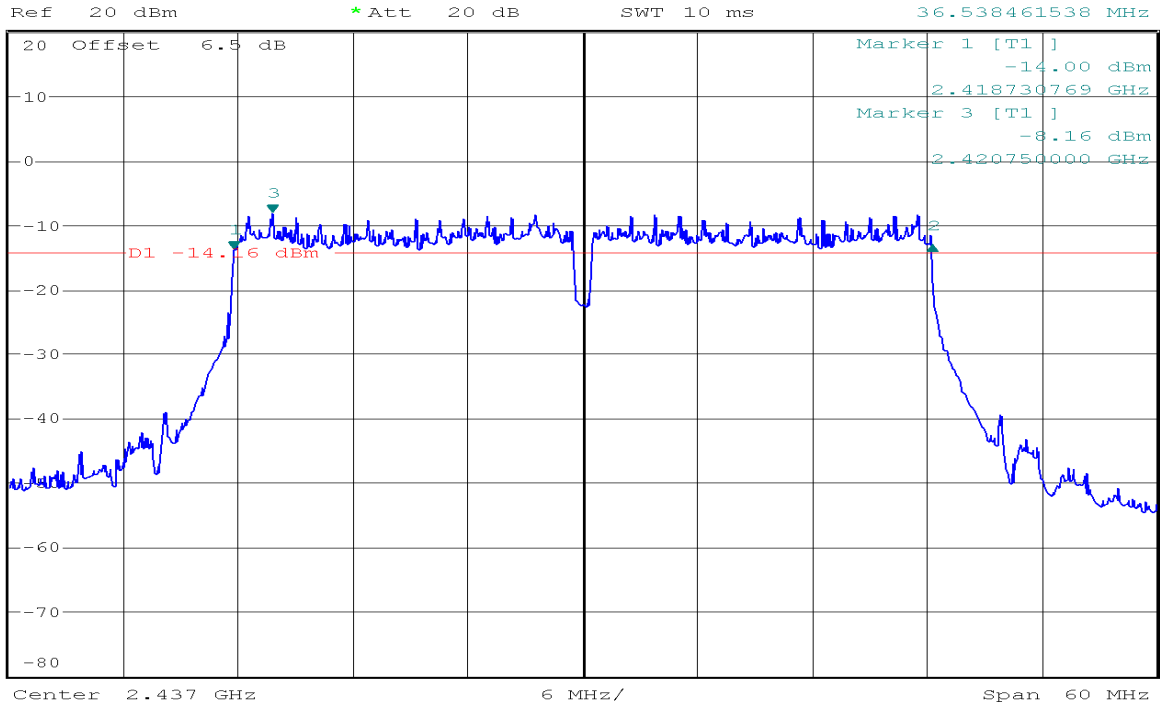


**6dB Bandwidth (CH High)**



1 PK  
MAXH

\* RBW 100 kHz      Delta 2 [T1 ]  
 \* VBW 300 kHz      1.27 dB  
 \* Att 20 dB      SWT 10 ms      36.538461538 MHz

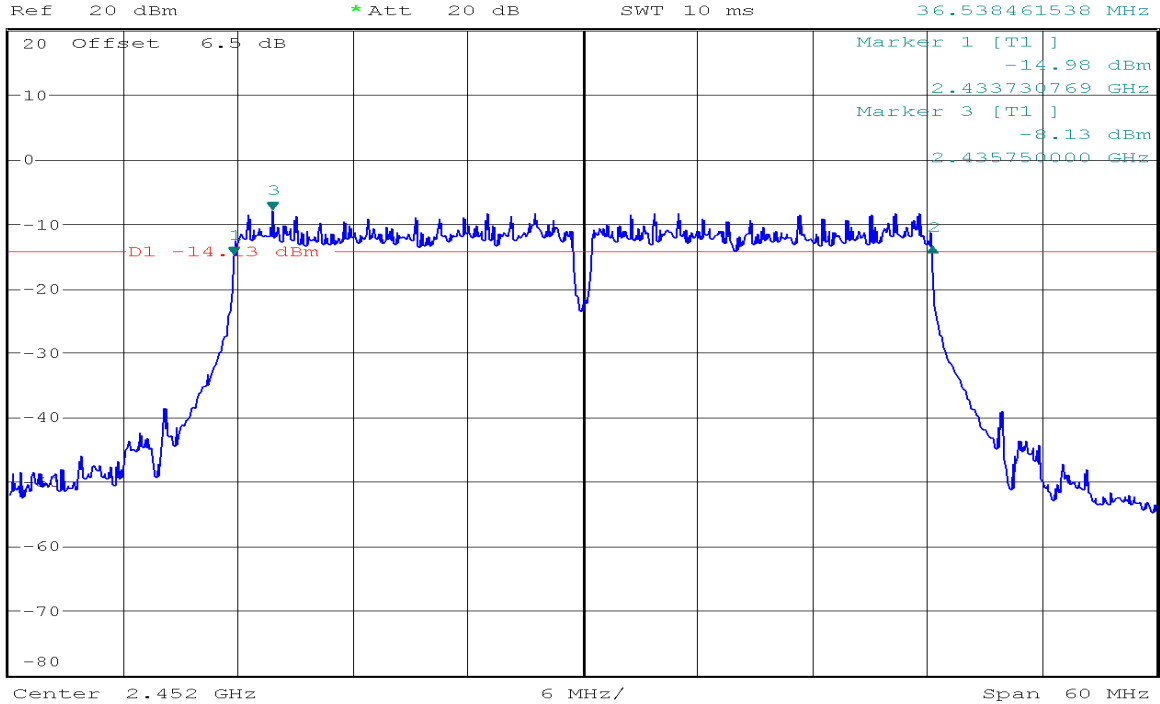


## 7.2. PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, and 2400-2483.5 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Configuration



### TEST PROCEDURE

1. The EUT transmitter output is connected to the Power meter.  
The Power meter is set to the peak power detection.
2. The testing follows the Measurement Procedure FCC KDB No. 558074 D01 DTS Meas.
3. Guidance v03r05. 9.1.2 PKPM1 Peak power meter method.

### TEST RESULTS

*No non-compliance noted*

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)
Low	2412	18.50	30.00
Mid	2437	18.48	30.00
High	2462	18.53	30.00

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)
Low	2412	16.92	30.00
Mid	2437	16.98	30.00
High	2462	17.03	30.00

**Test mode: IEEE 802.11n HT20 mode**

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)
Low	2412	16.36	30.00
Mid	2437	16.42	30.00
High	2462	16.55	30.00

**Test mode: IEEE 802.11n HT40 mode**


Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)
Low	2422	16.01	30.00
Mid	2437	16.05	30.00
High	2452	16.16	30.00

### **7.3. PEAK POWER SPECTRAL DENSITY**

#### **LIMIT**

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

#### **Test Configuration**



#### **TEST PROCEDURE**

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 1.5 times the DTS bandwidth, Sweep = auto
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

#### **TEST RESULTS**

*No non-compliance noted*



**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-8.49	8.00	PASS
Mid	2437	-8.55	8.00	PASS
High	2462	-8.52	8.00	PASS

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-20.10	8.00	PASS
Mid	2437	-20.36	8.00	PASS
High	2462	-20.34	8.00	PASS

**Test mode: IEEE 802.11n HT20 mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-21.64	8.00	PASS
Mid	2437	-20.34	8.00	PASS
High	2462	-19.21	8.00	PASS


**Test mode: IEEE 802.11n HT40 mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-24.68	8.00	PASS
Mid	2437	-24.86	8.00	PASS
High	2452	-24.22	8.00	PASS


**Test Plot**

**IEEE 802.11b mode**


**PPSD (CH Low)**

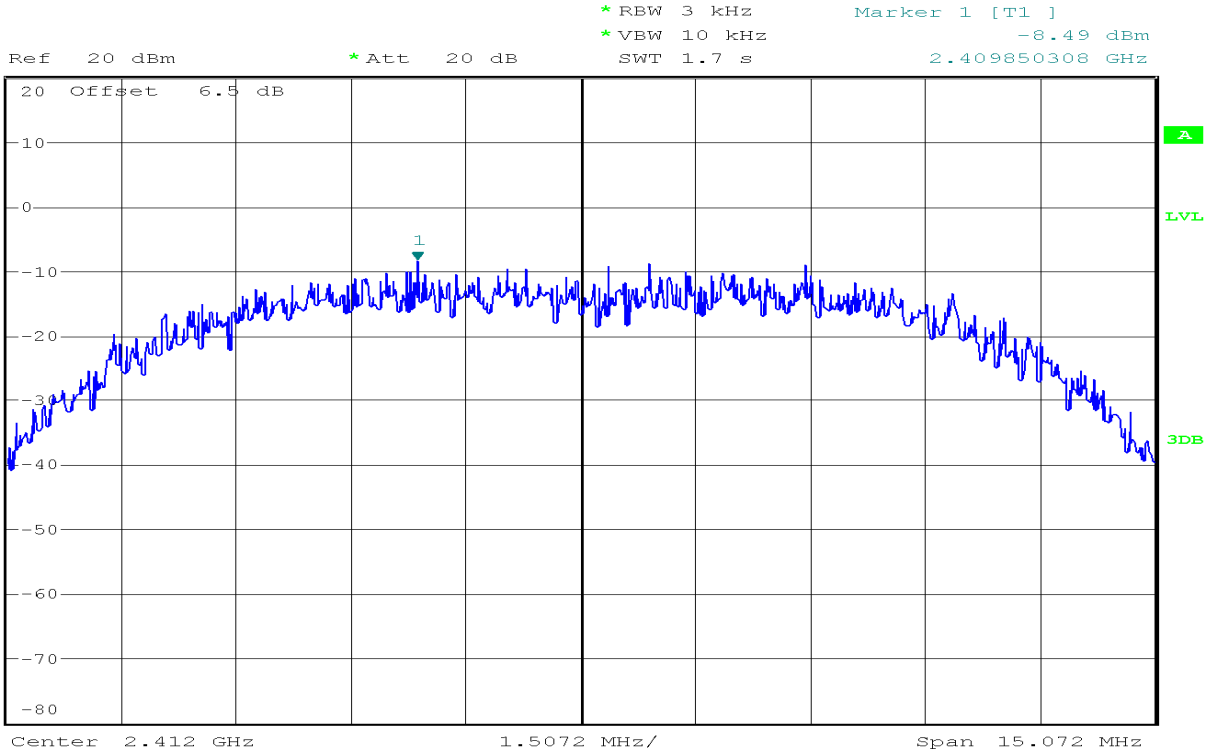

**PPSD(CH Mid)**

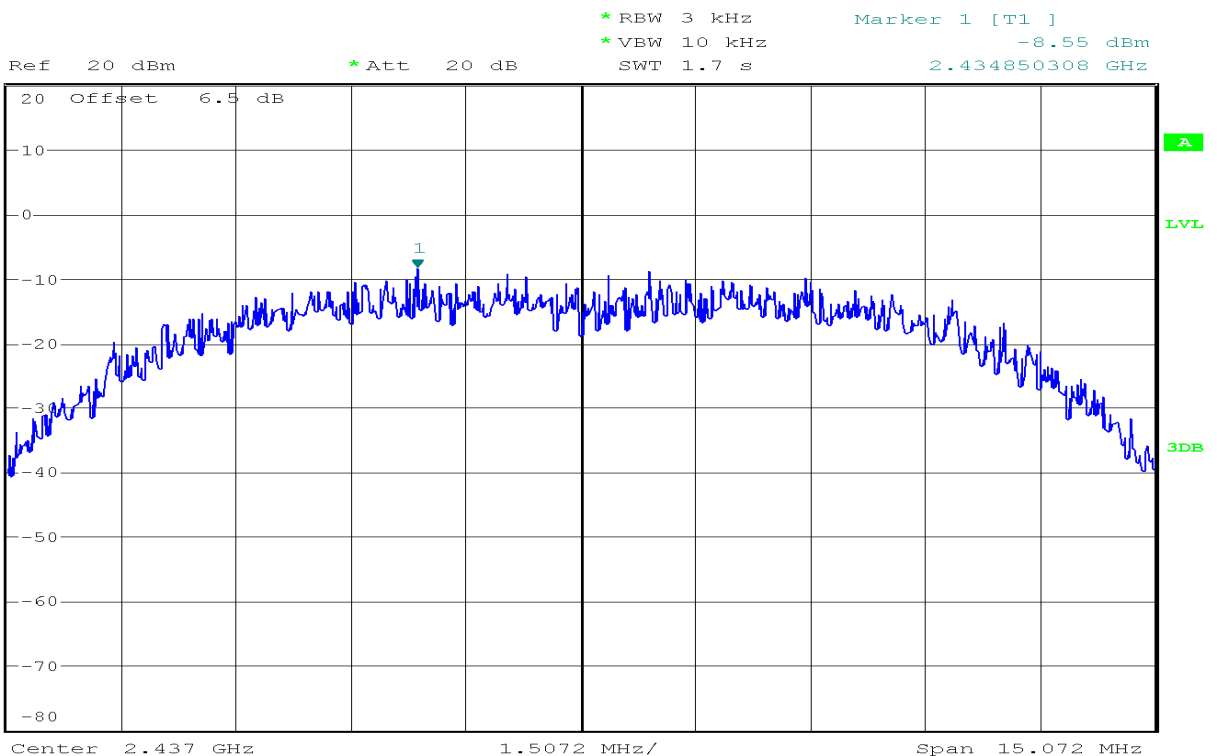


**PPSD (CH High)**

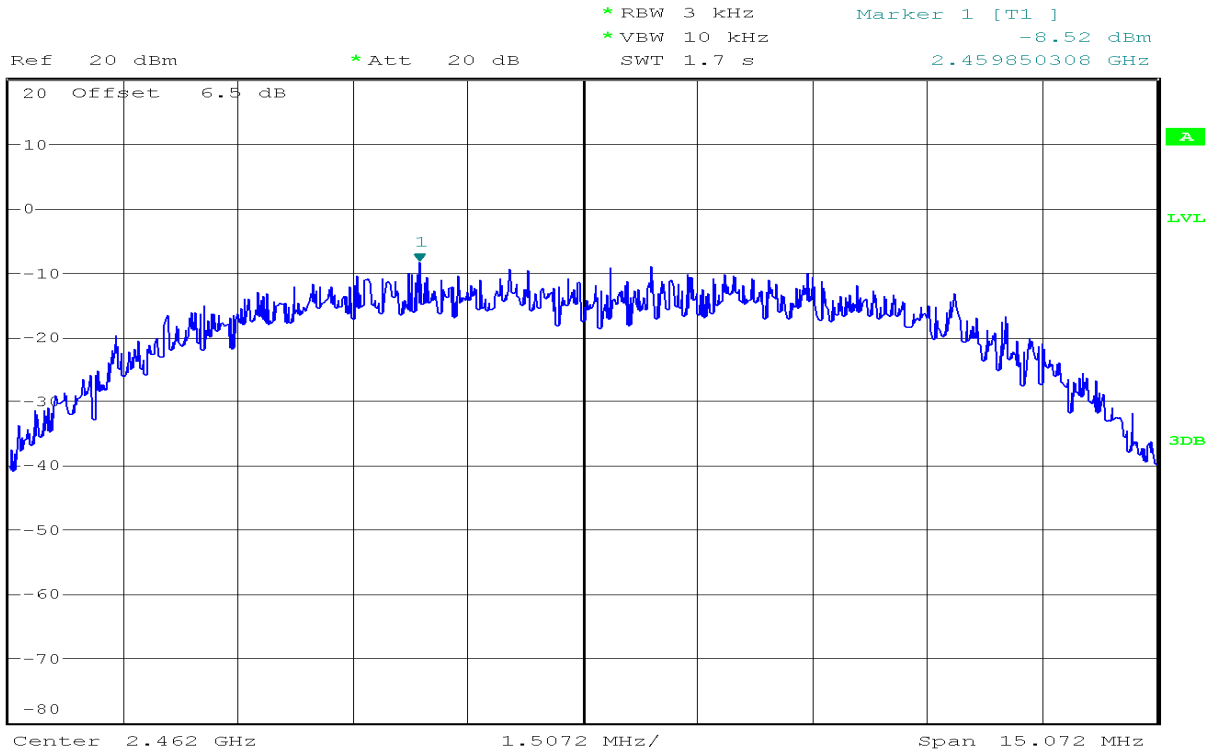


**IEEE 802.11g mode**


**PPSD (CH Low)**

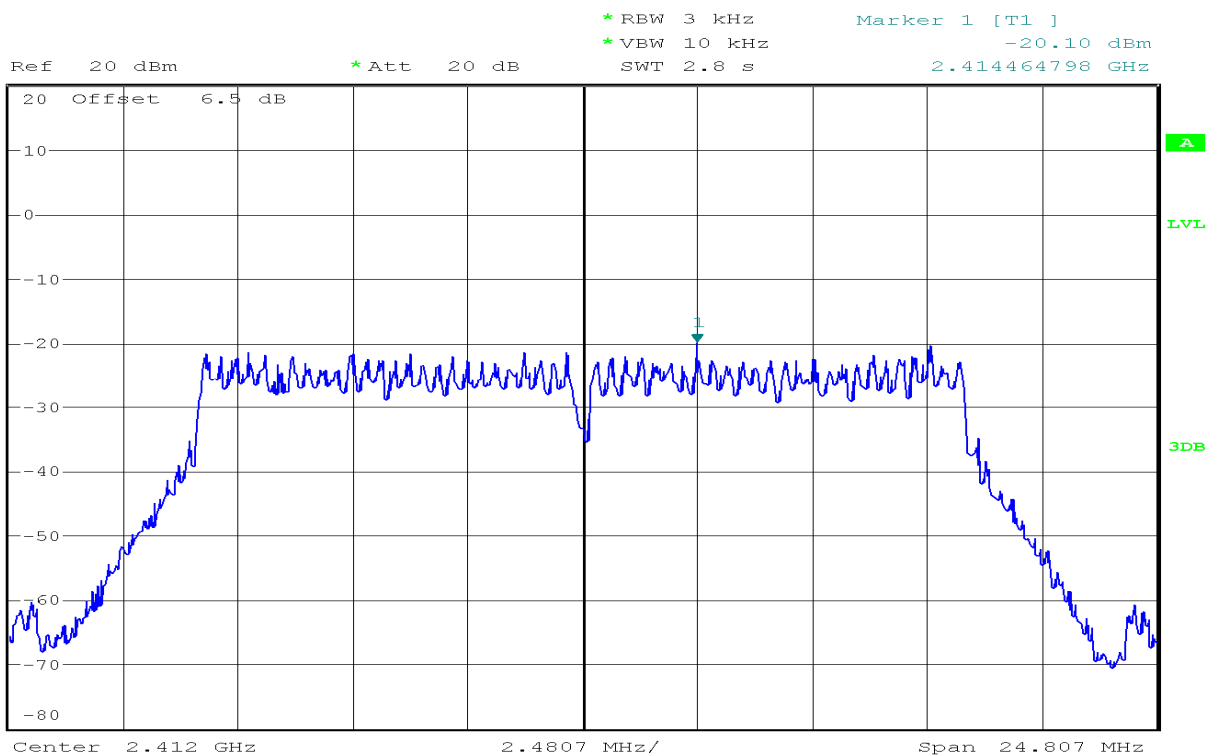

**PPSD (CH Mid)**

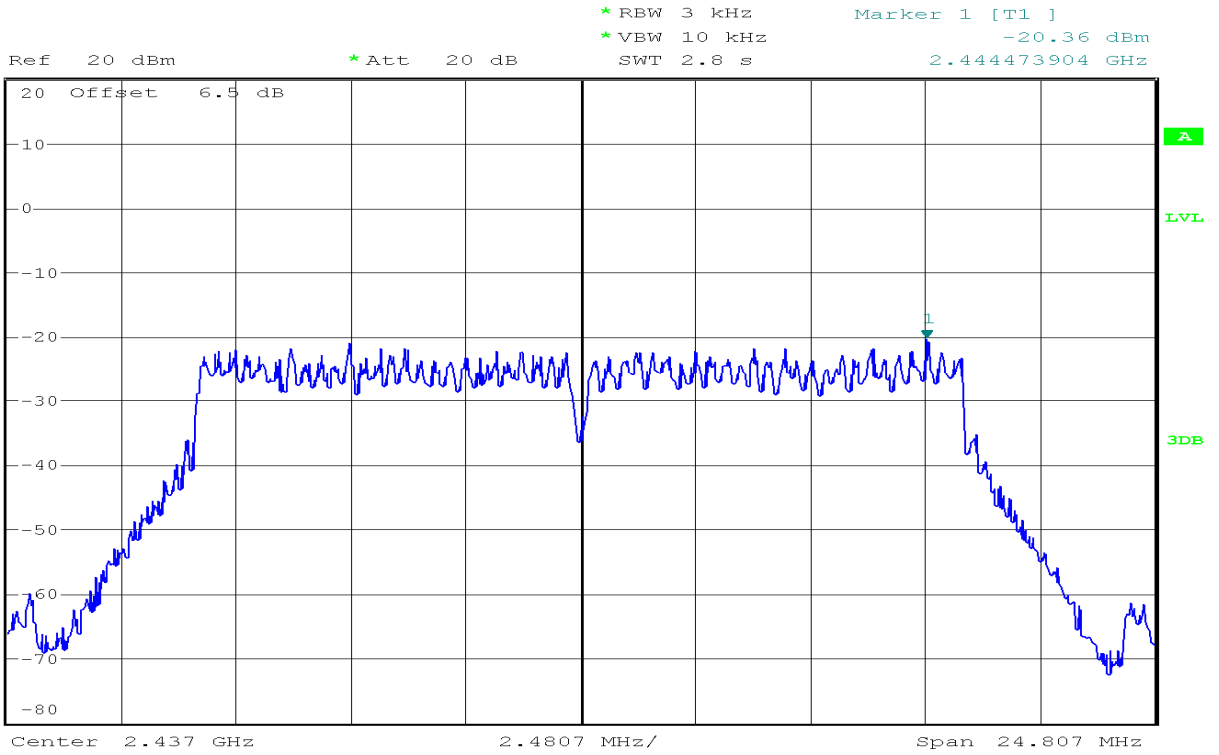


**PPSD (CH High)**

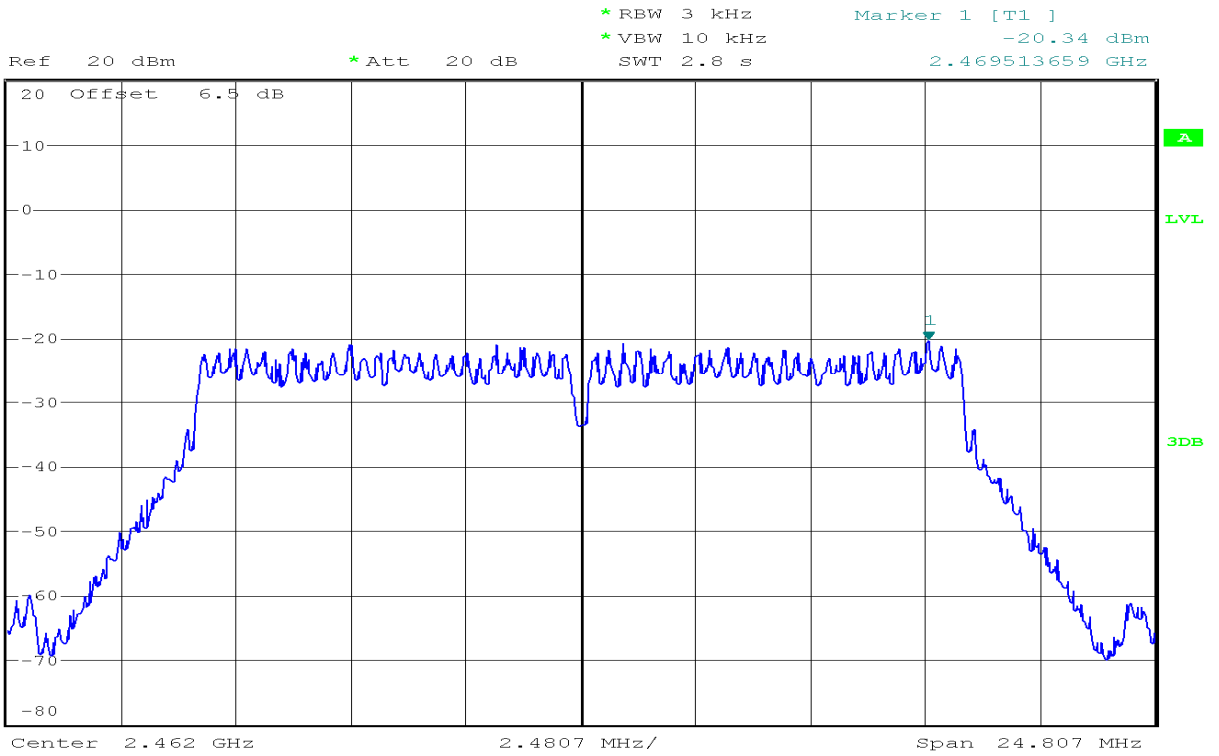


IEEE 802.11n HT20 mode


PPSD (CH Low)

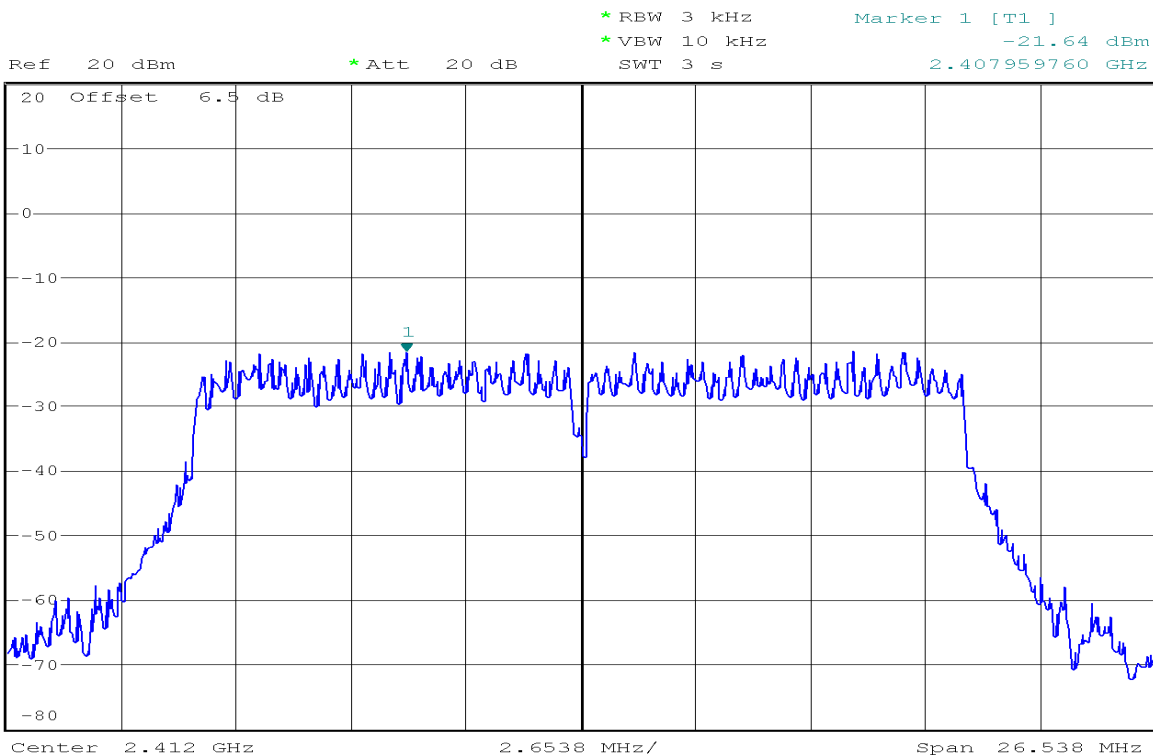

PPSD (CH Mid)

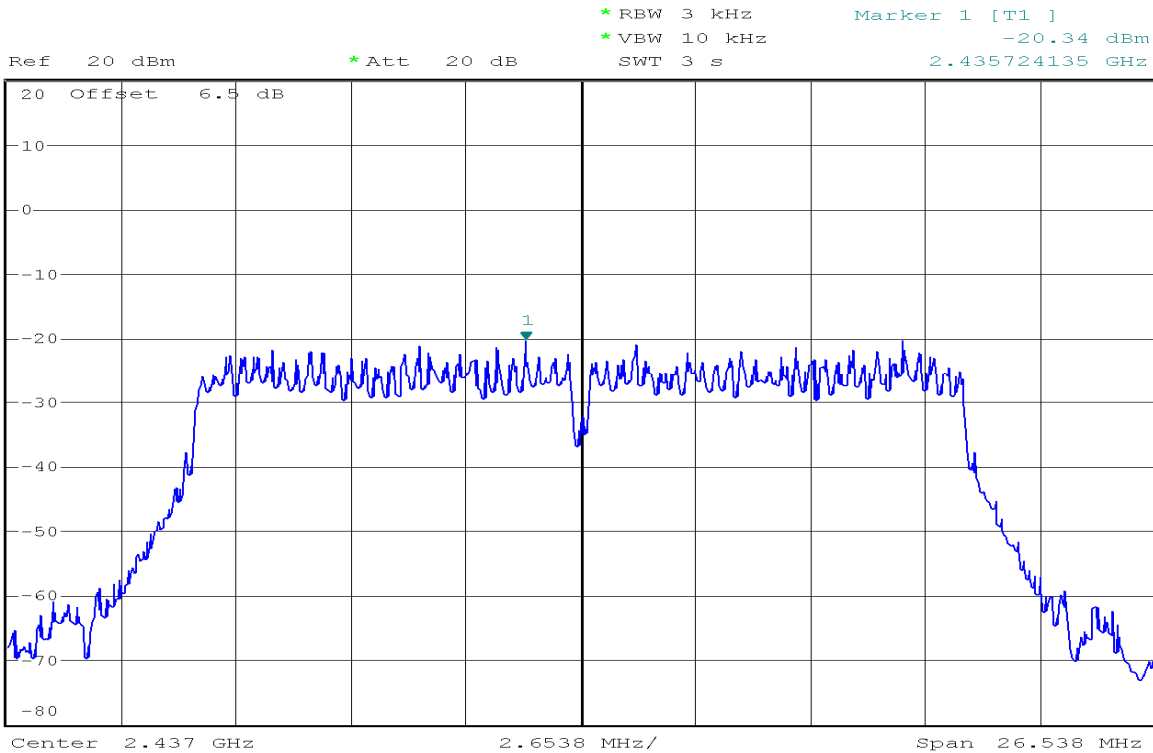


**PPSD (CH High)**

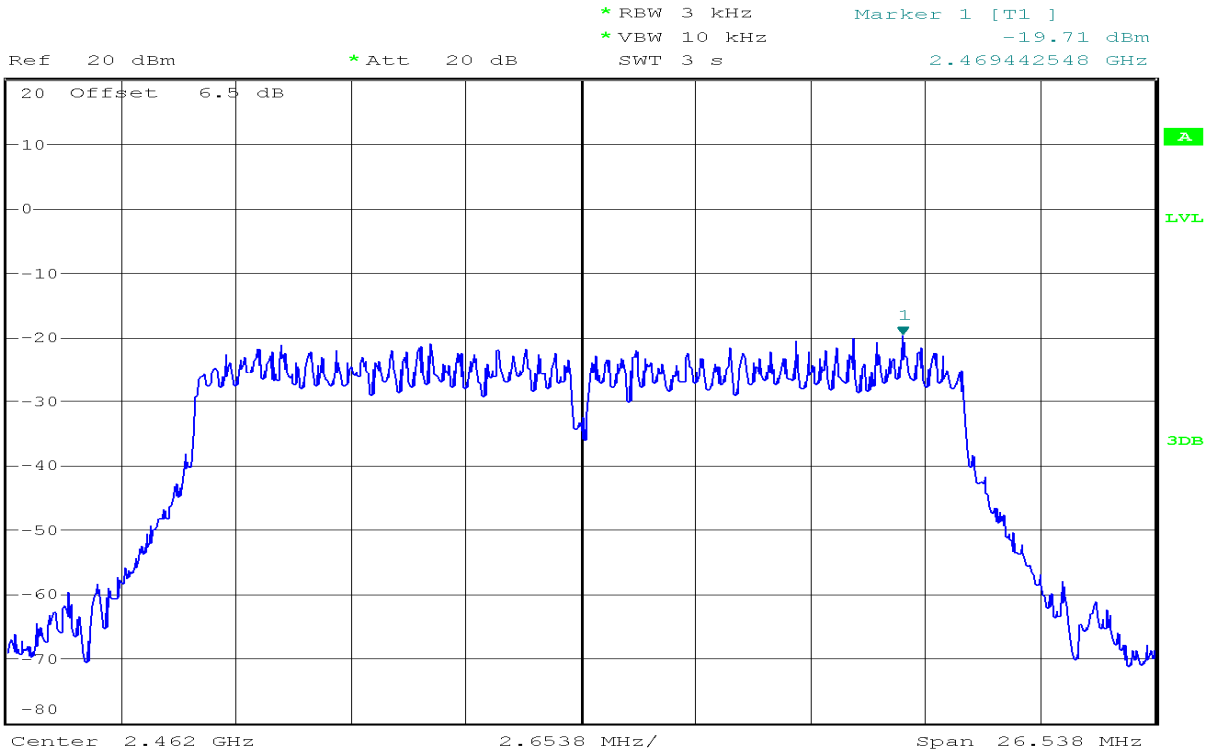


**IEEE 802.11n HT40 mode**


**PPSD (CH Low)**

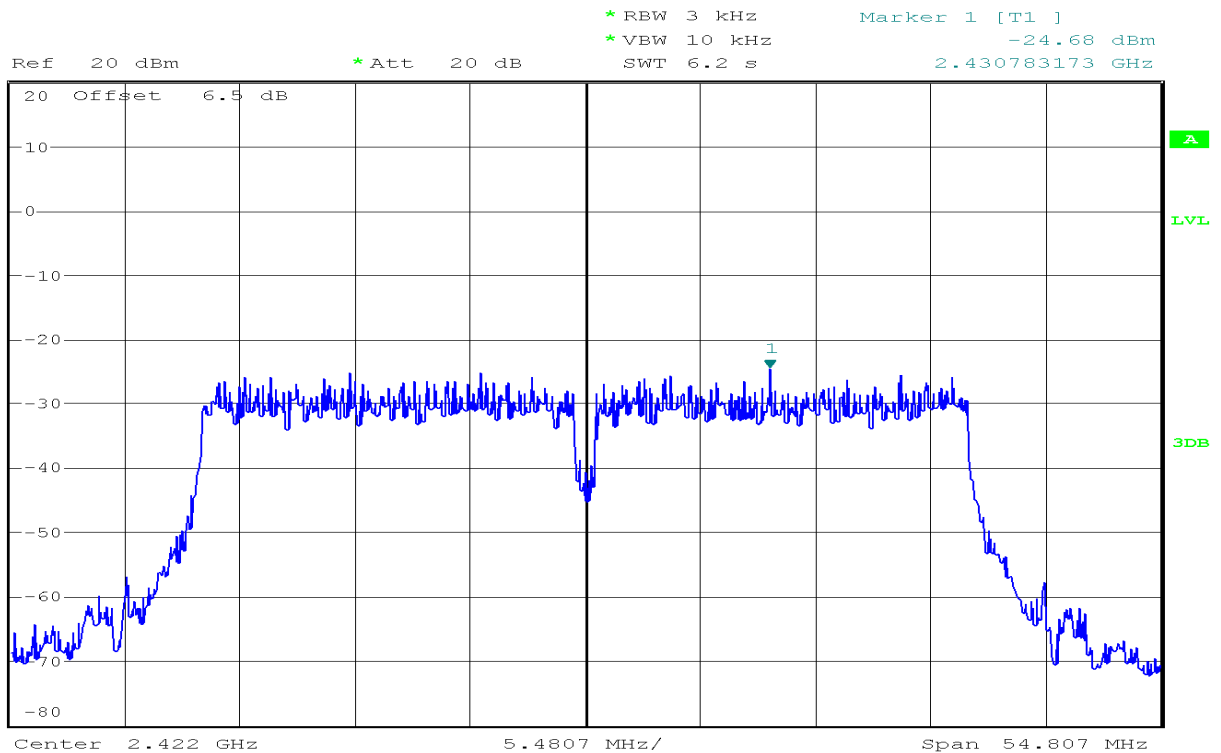

**PPSD (CH Mid)**

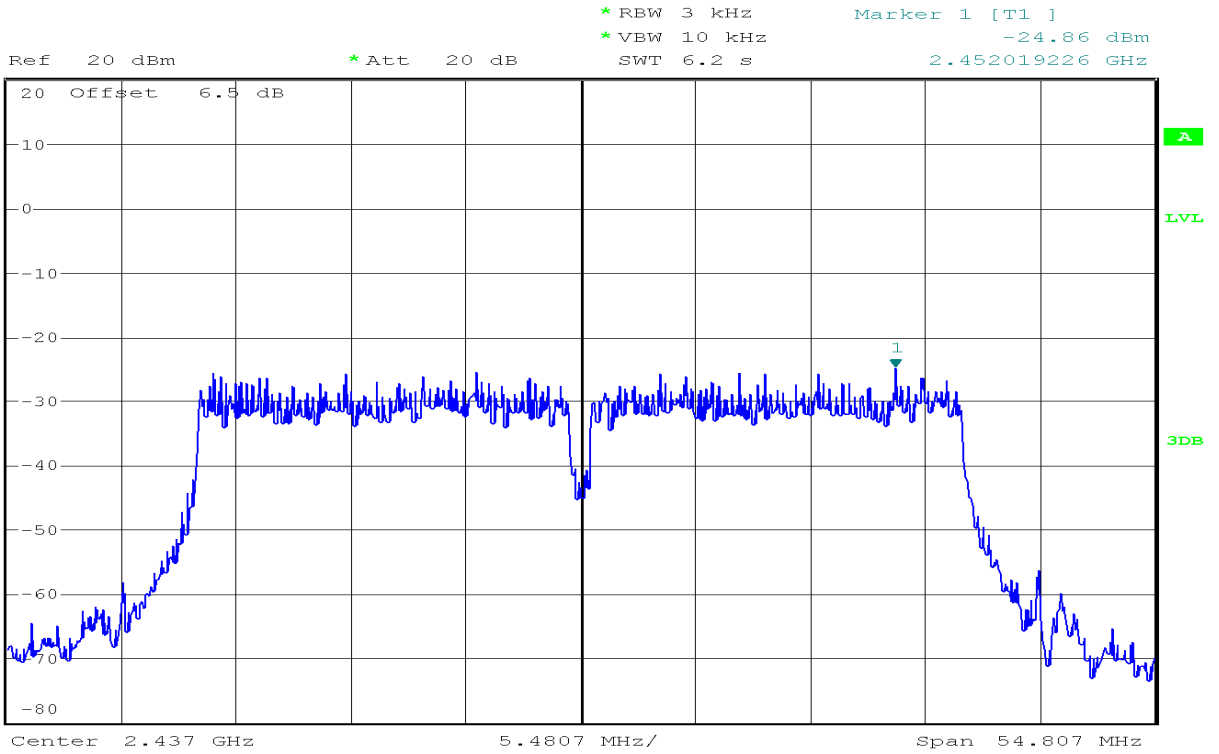

**PPSD (CH High)**

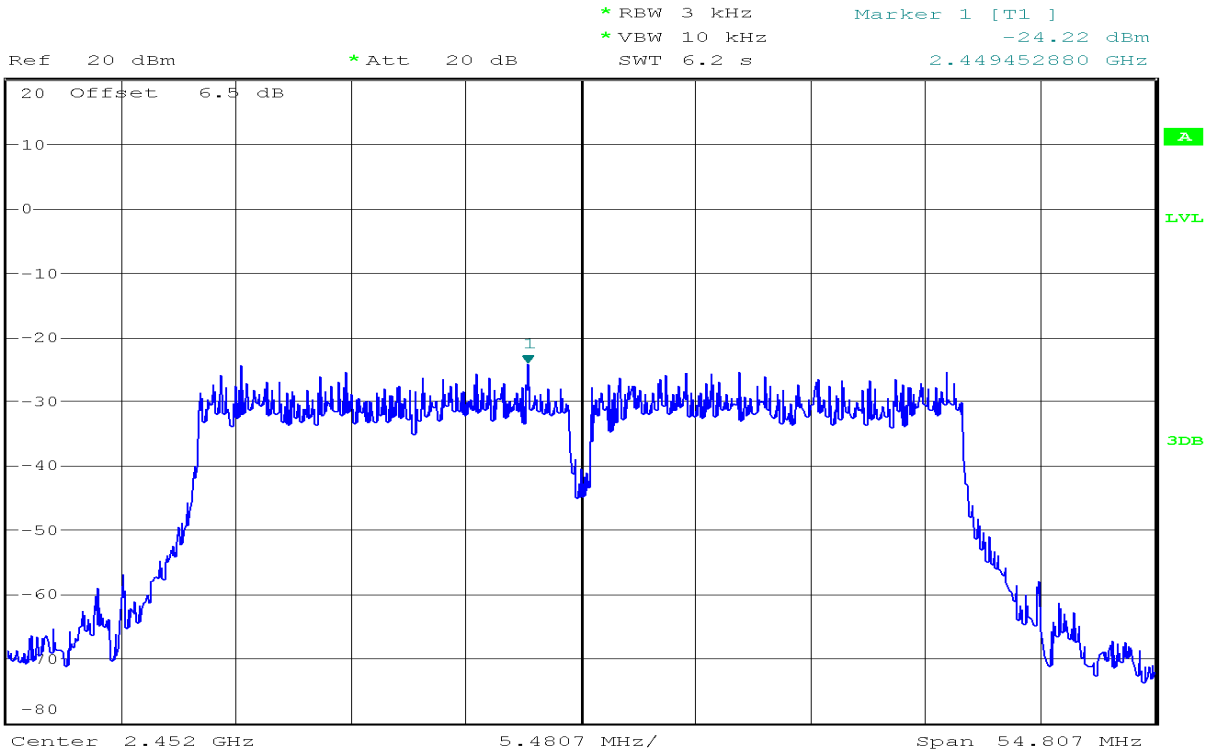


## 7.4.SPURIOUS EMISSIONS

### Conducted Measurement

#### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### Test Configuration



#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 40GHz range with the transmitter set to the lowest, middle, and highest channels.

#### TEST RESULTS

*No non-compliance noted*



#### Test Plot



**OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT**

**IEEE 802.11b mode**


**CH Low**

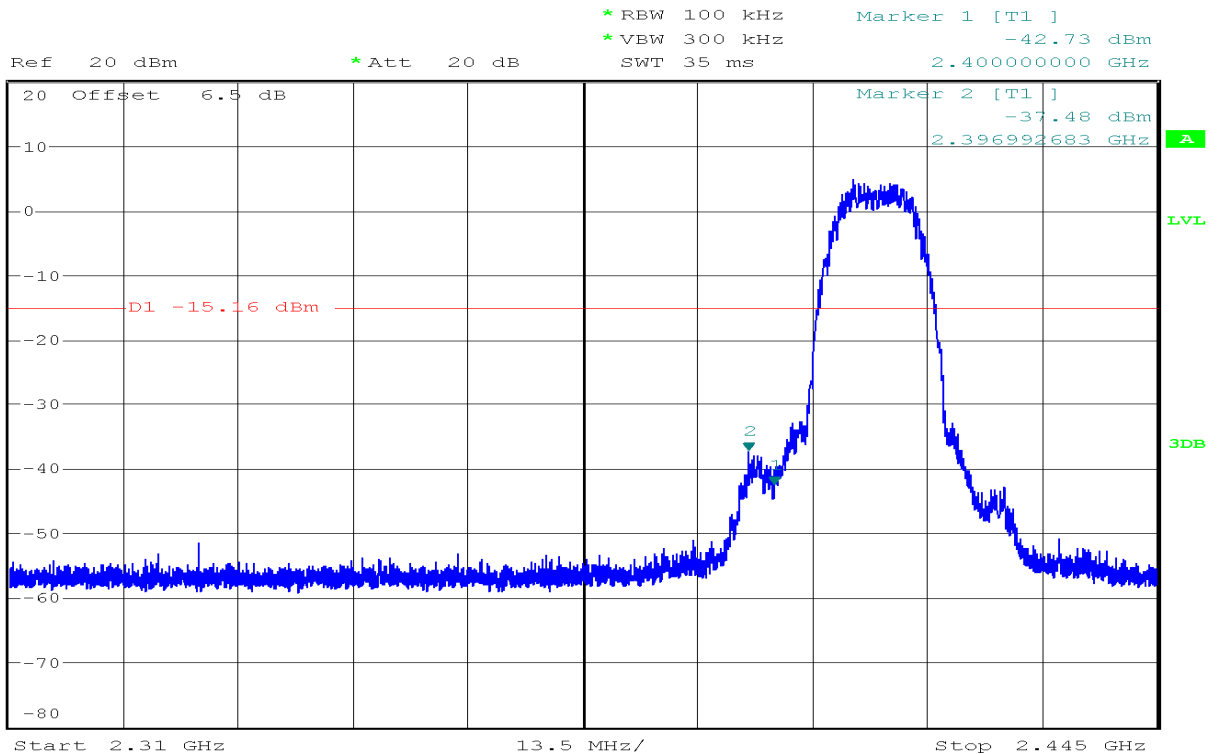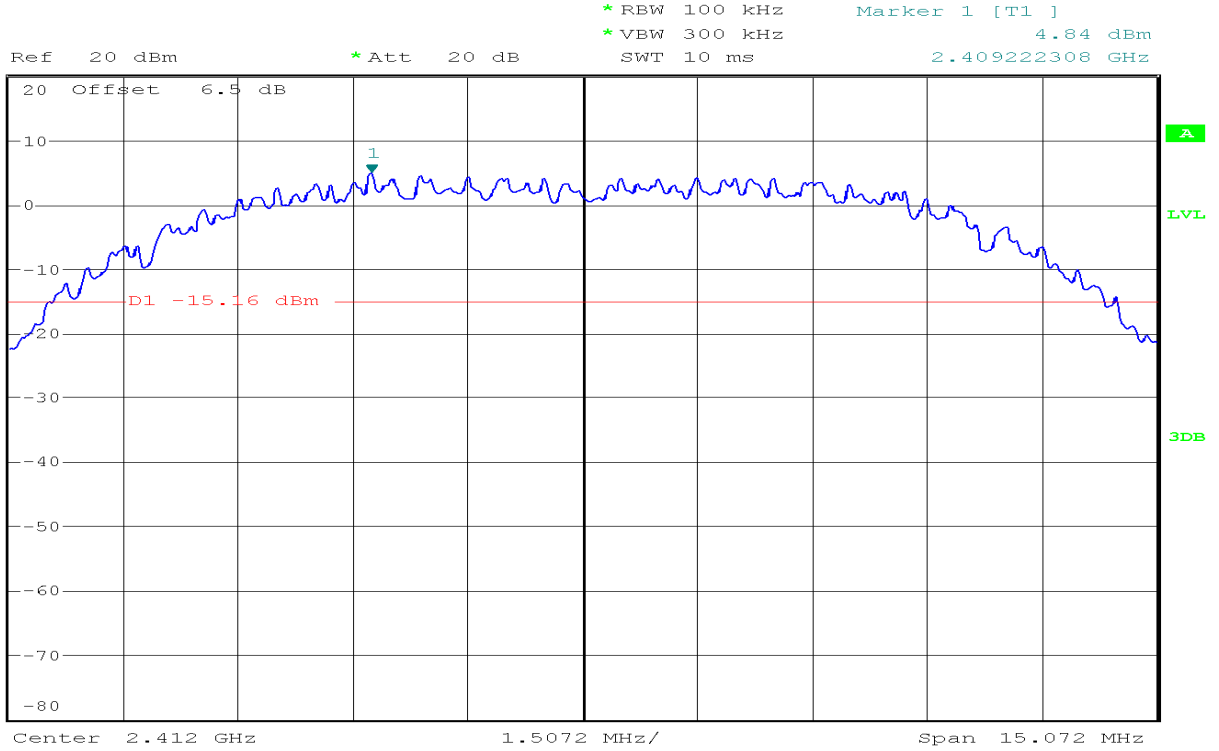



Ref 20 dBm      \* Att 20 dB      \* RBW 100 kHz      Marker 1 [T1 ]  
 Offset 6.5 dB      \* VBW 300 kHz      -39.45 dBm  
 SWT 300 ms      97.730487805 MHz

1 PK  
 MAXH

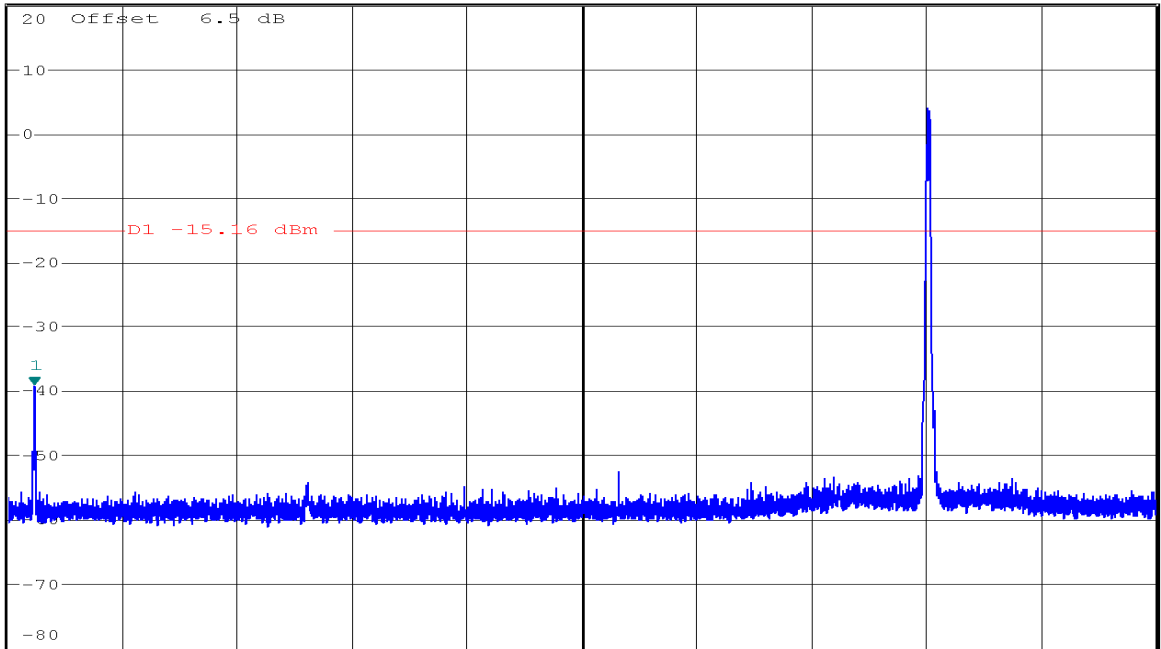


Start 30 MHz      297 MHz/      Stop 3 GHz





Ref 20 dBm      \* Att 20 dB      \* RBW 100 kHz      Marker 1 [T1 ]  
 Offset 6.5 dB      \* VBW 300 kHz      -27.25 dBm  
 SWT 2.3 s      4.824512195 GHz

1 PK  
 MAXH

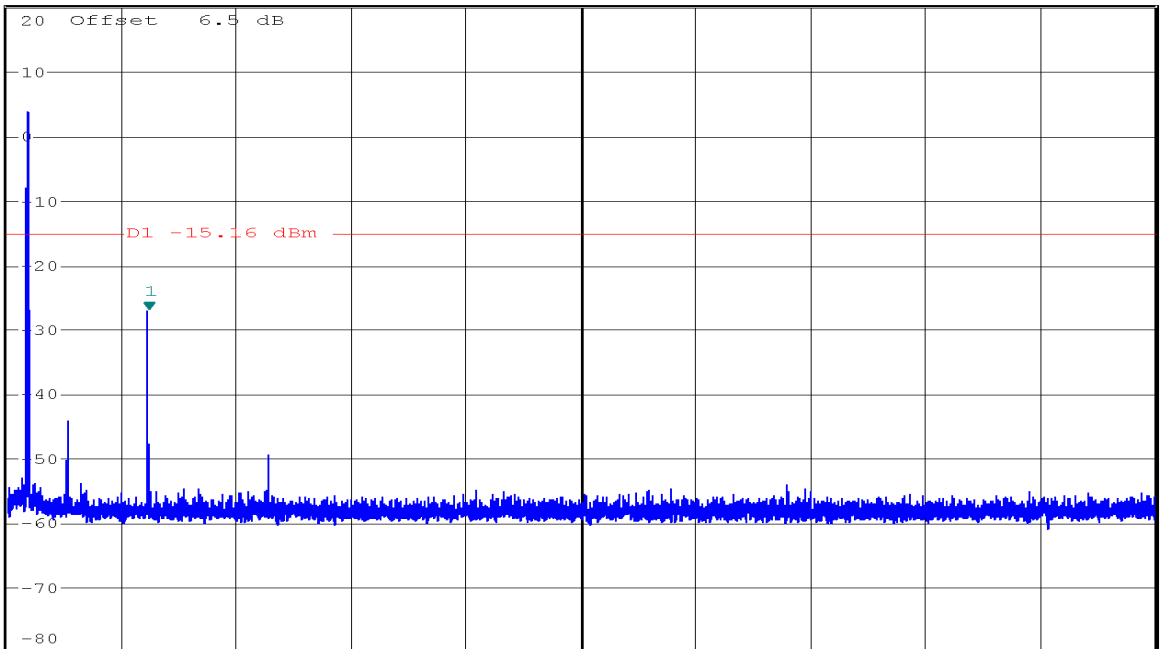


Start 2 GHz      2.3 GHz/      Stop 25 GHz

**CH Mid**

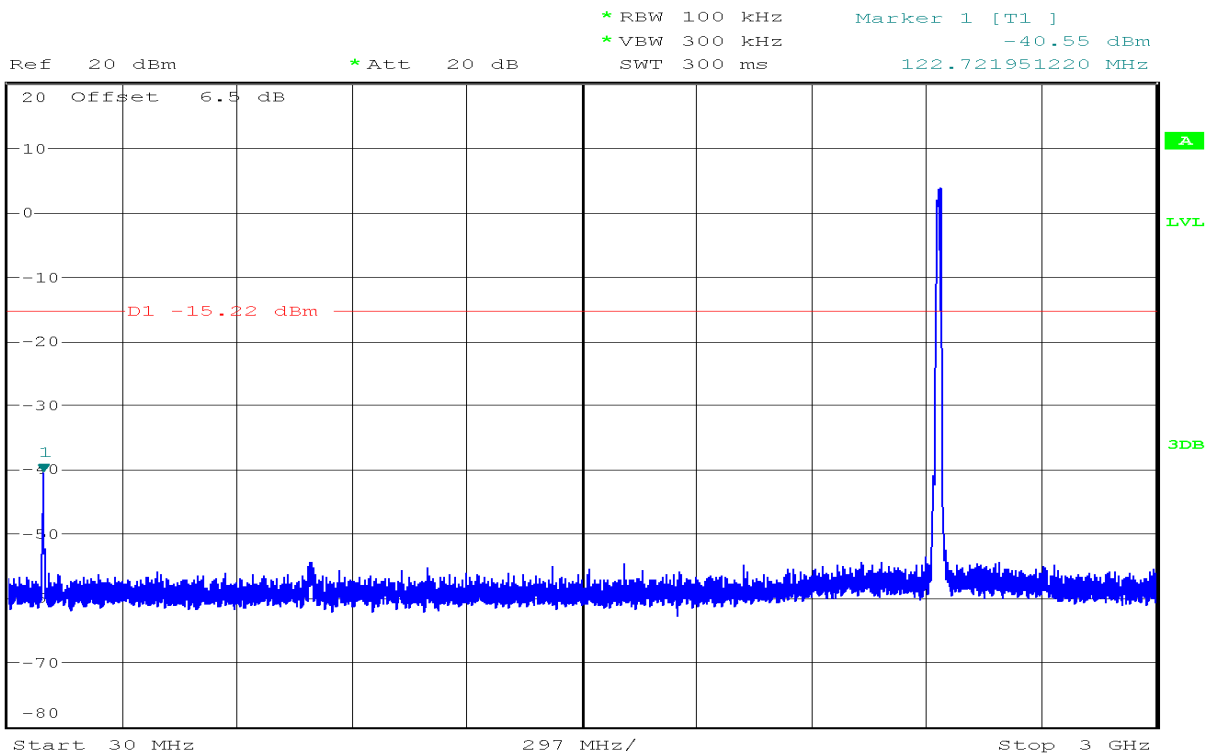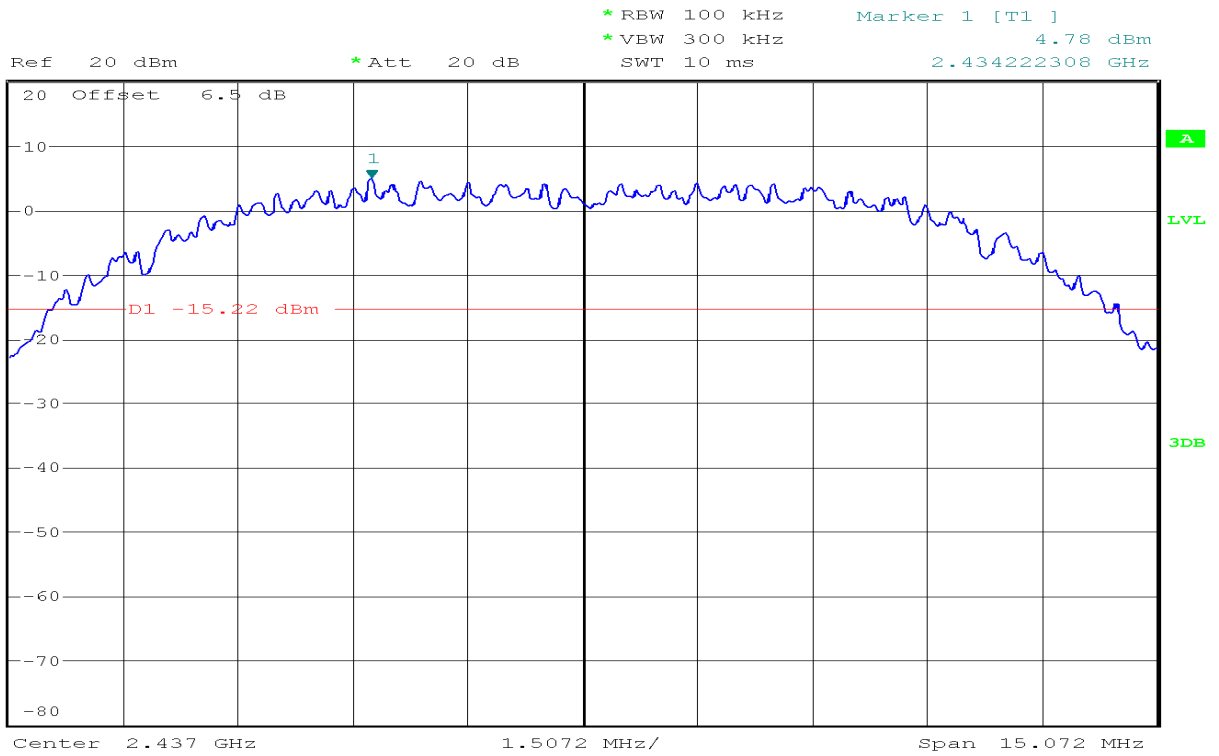




Ref 20 dBm      \* Att 20 dB      \* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -39.53 dBm  
 SWT 2.3 s      4.872195122 GHz

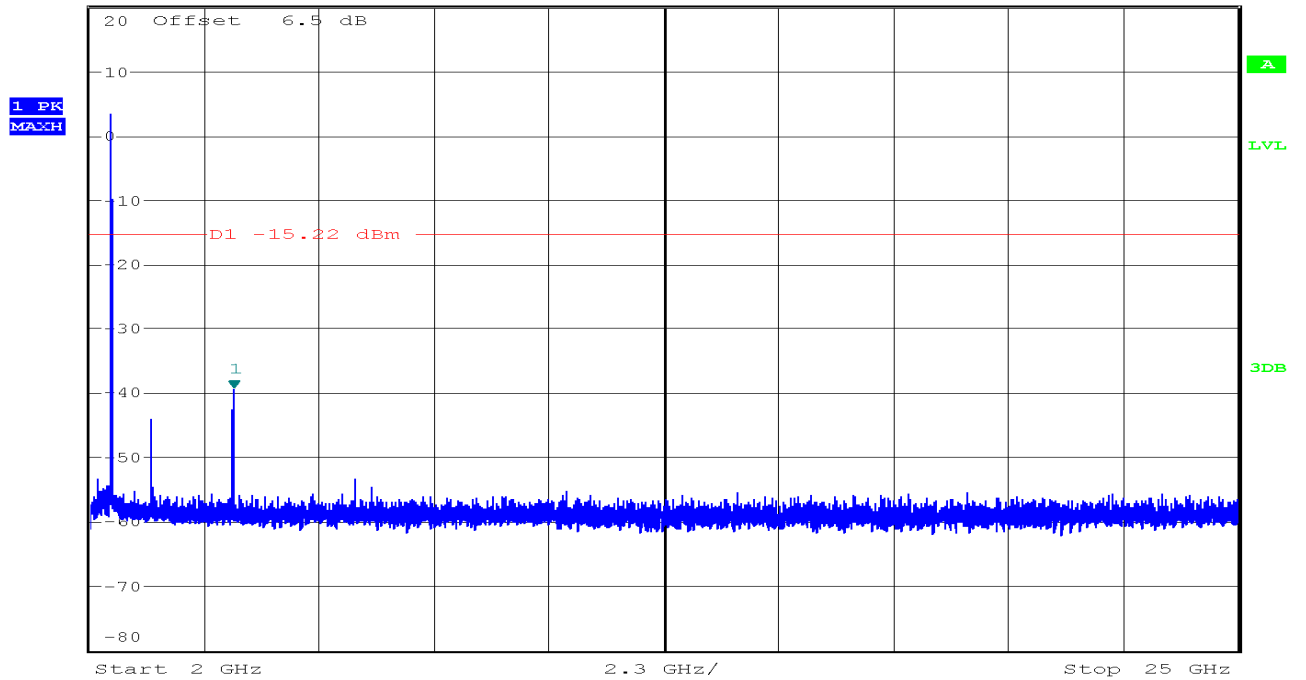

**CH High**




Ref 20 dBm      \* Att 20 dB      \* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      4.75 dBm  
 SWT 10 ms      2.459222308 GHz

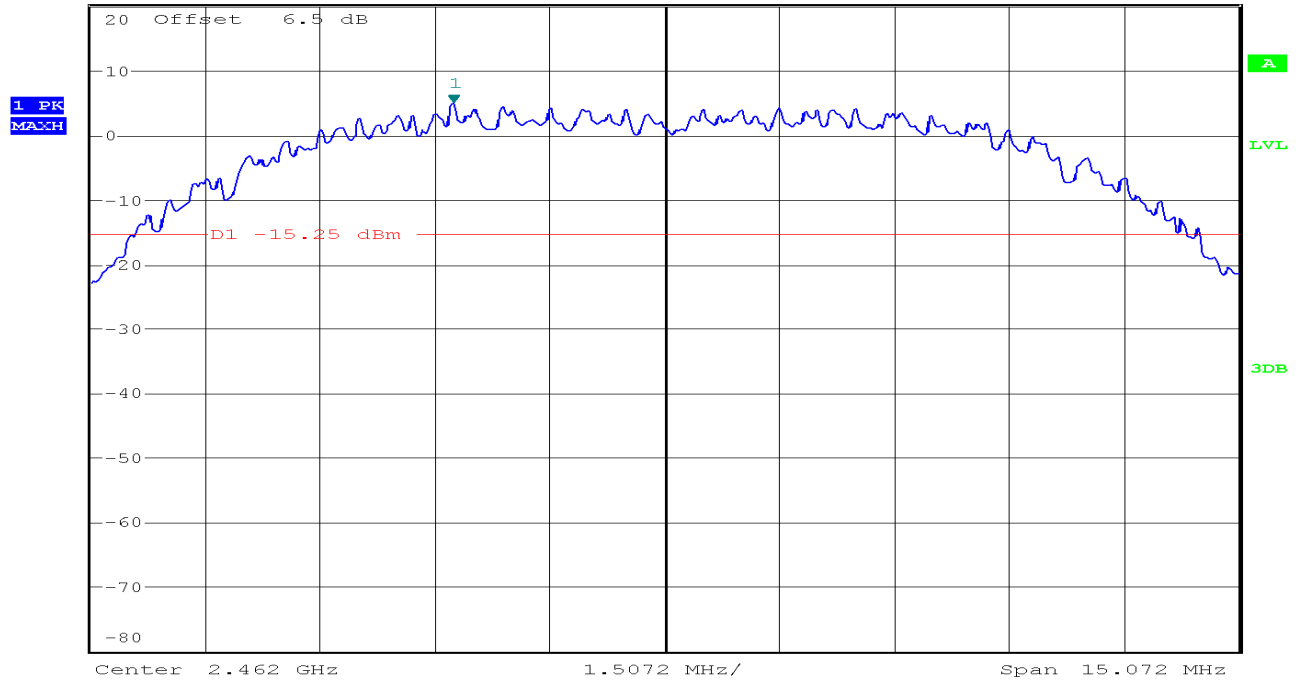





1 PK  
MAXH

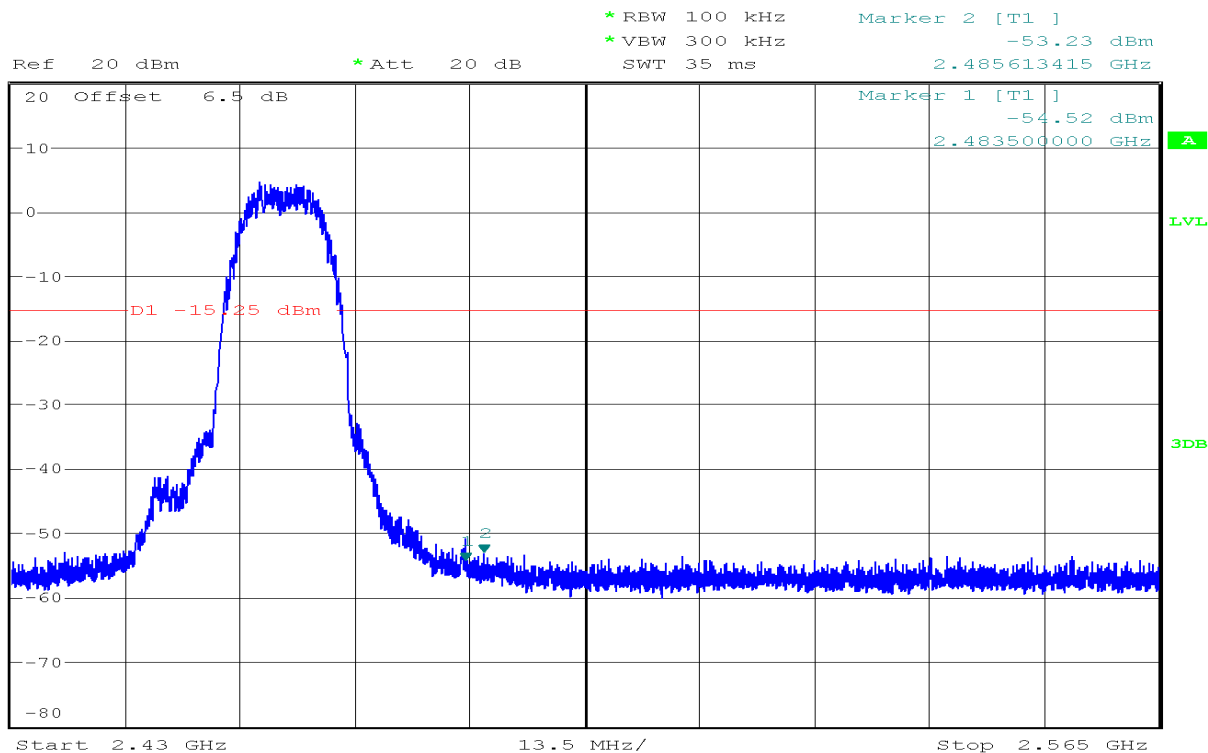


1 PK  
MAXH

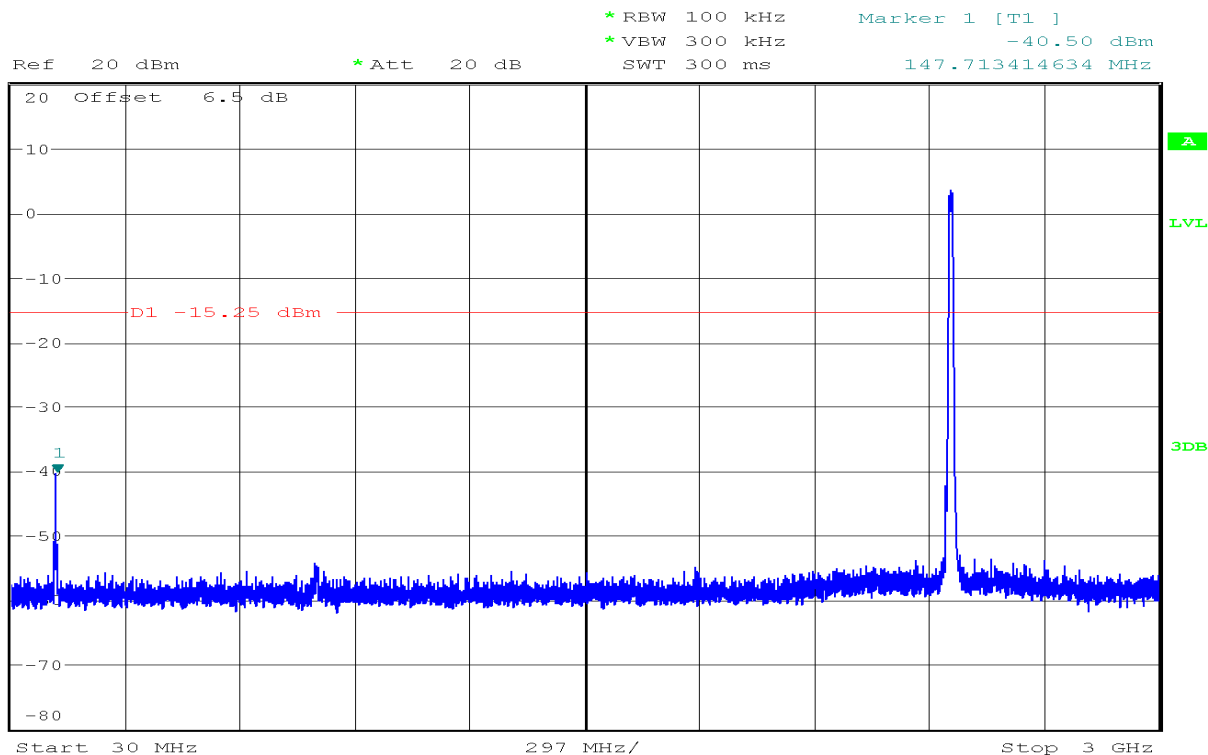

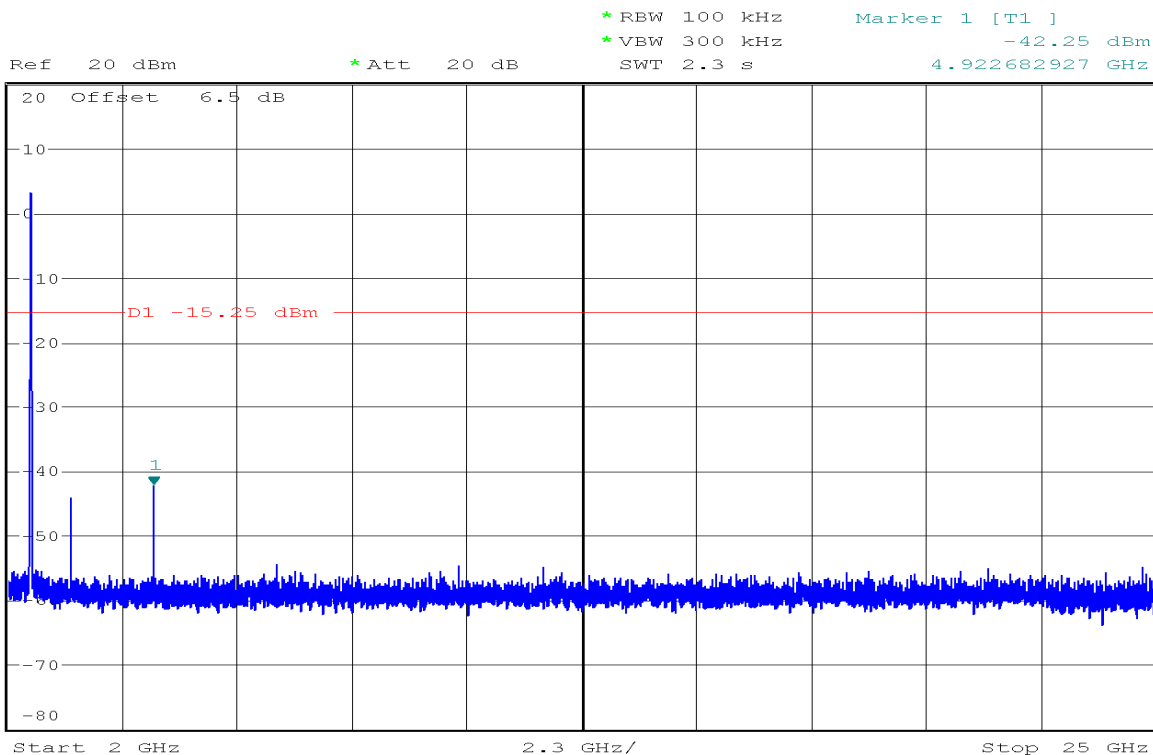

**IEEE 802.11g mode**


**CH Low**

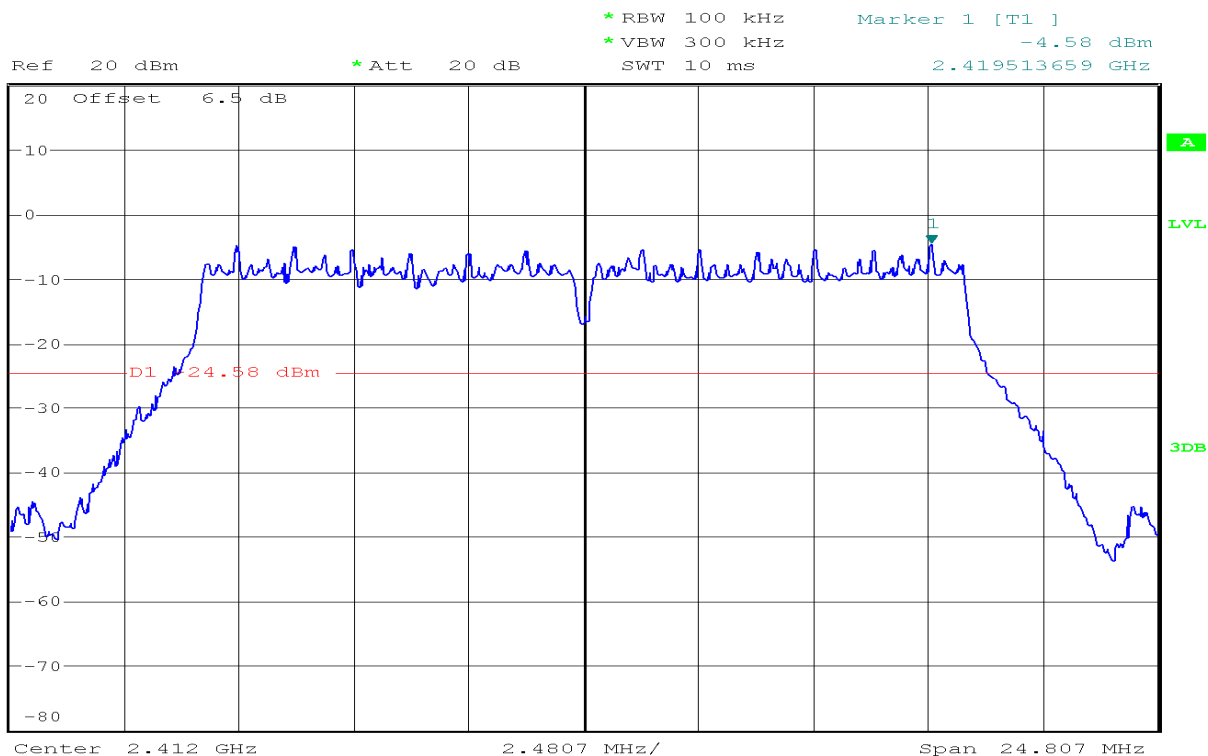



Ref 20 dBm \* Att 20 dB \* RBW 100 kHz Marker 2 [T1 ]  
\* VBW 300 kHz -45.80 dBm  
SWT 35 ms 2.399840854 GHz

1 PK  
MATCH

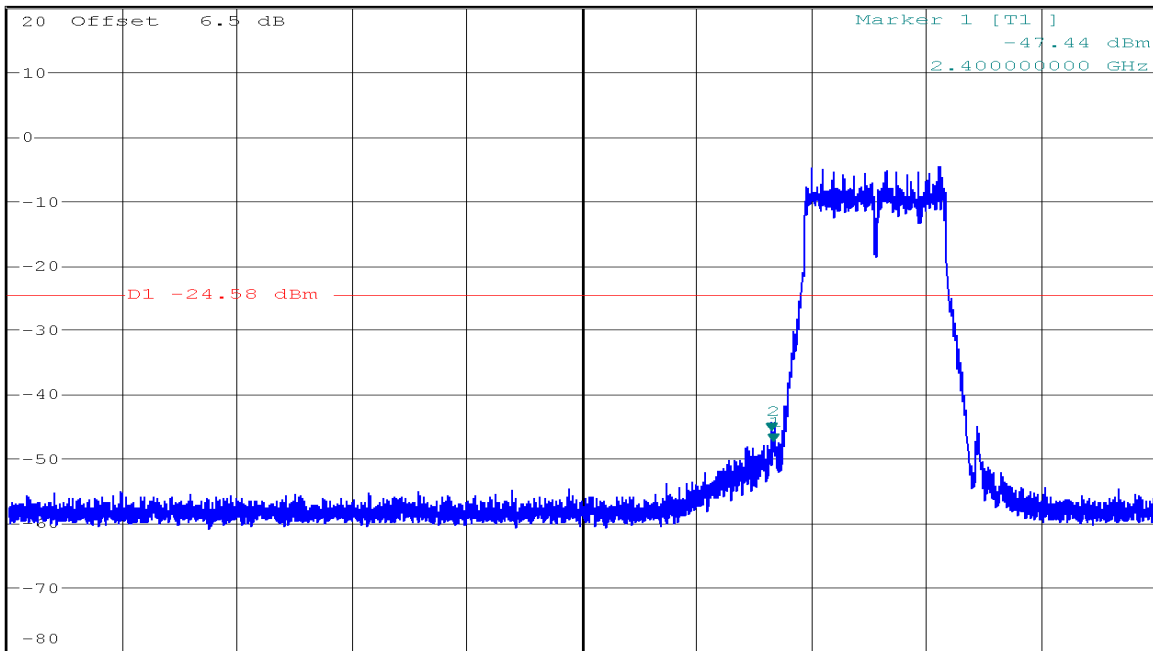


Start 2.31 GHz 13.5 MHz/ Stop 2.445 GHz



Ref 20 dBm \* Att 20 dB \* RBW 100 kHz Marker 1 [T1 ]  
\* VBW 300 kHz -55.60 dBm  
SWT 300 ms 646.456097561 MHz

1 PK  
MATCH

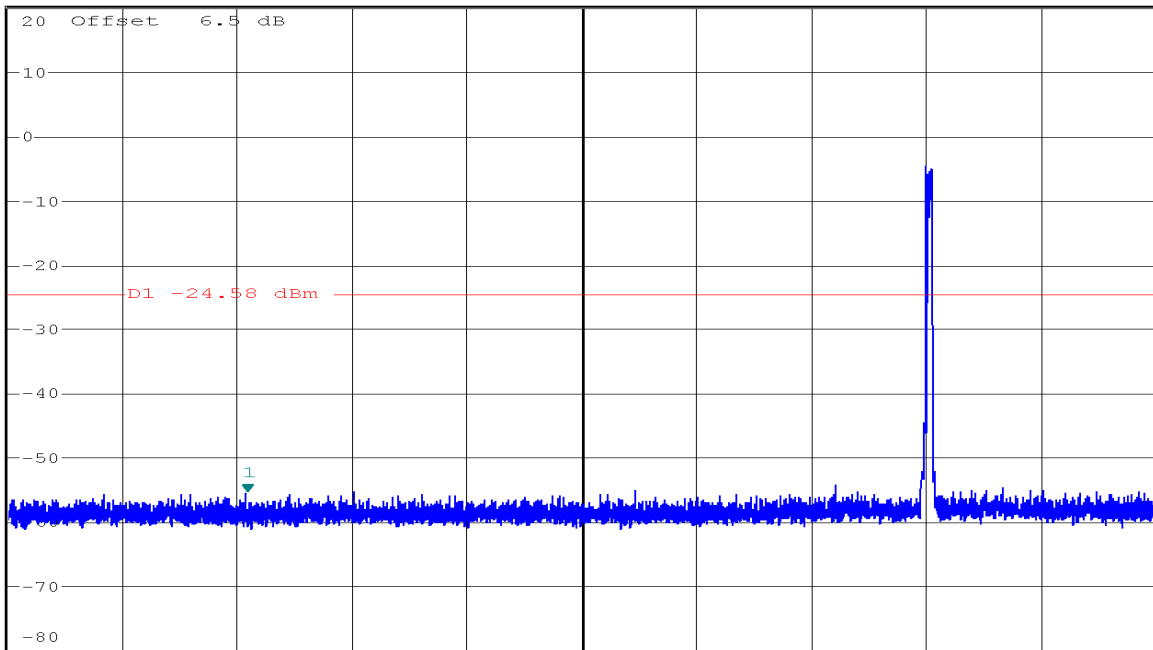


Start 30 MHz 297 MHz/ Stop 3 GHz



\* RBW 100 kHz  
 \* VBW 300 kHz  
 SWT 2.3 s

Marker 1 [T1 ]  
 -39.64 dBm  
 3.214512195 GHz

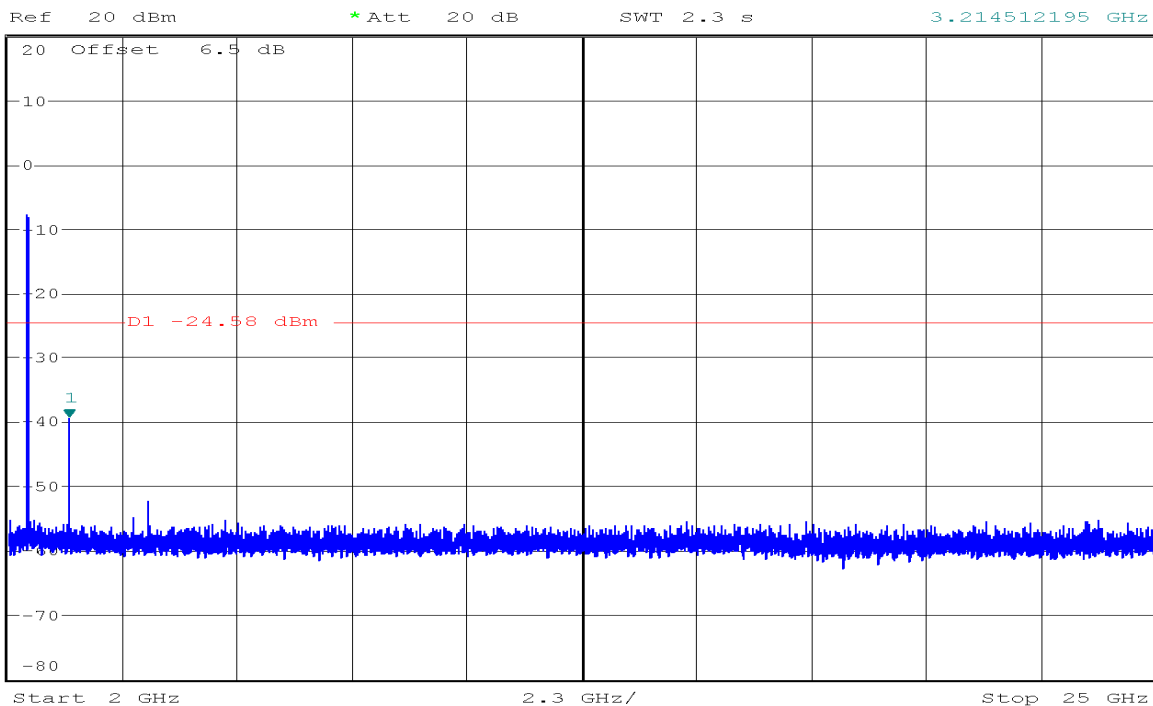


**CH Mid**



\* RBW 100 kHz  
 \* VBW 300 kHz  
 SWT 10 ms


Marker 1 [T1 ]  
 -4.53 dBm  
 2.444513659 GHz

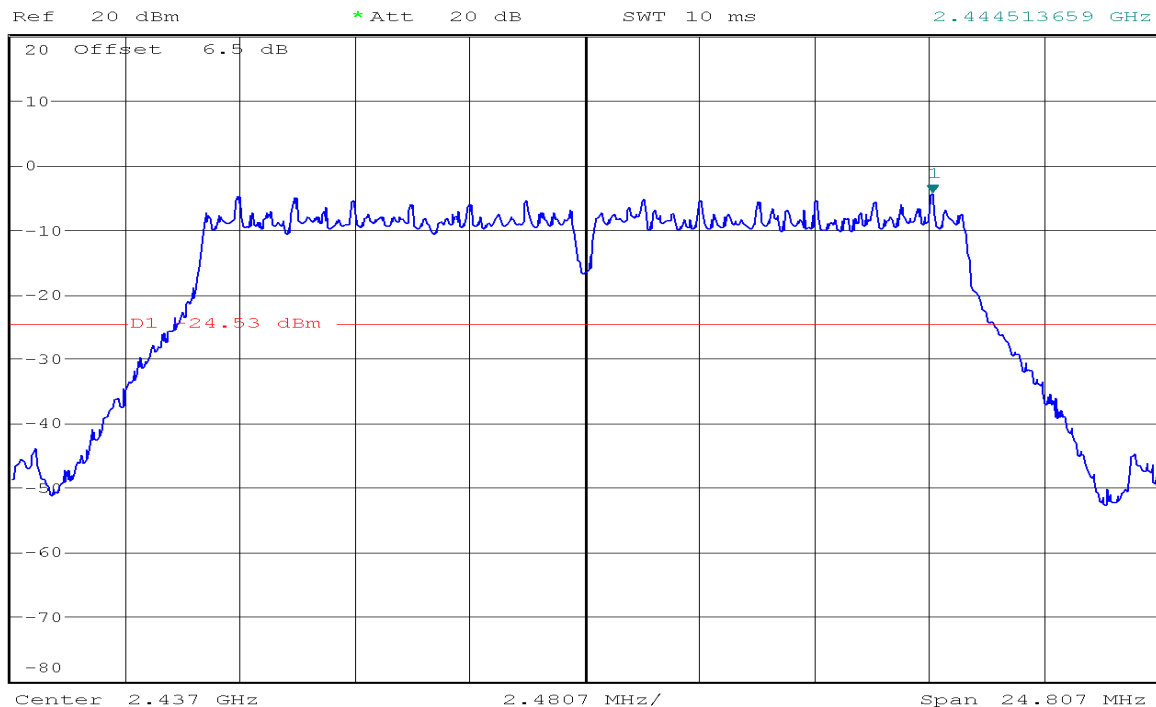






Ref 20 dBm \* Att 20 dB \* RBW 100 kHz Marker 1 [T1 ]  
\* VBW 300 kHz -55.30 dBm  
SWT 300 ms 1.005753659 GHz

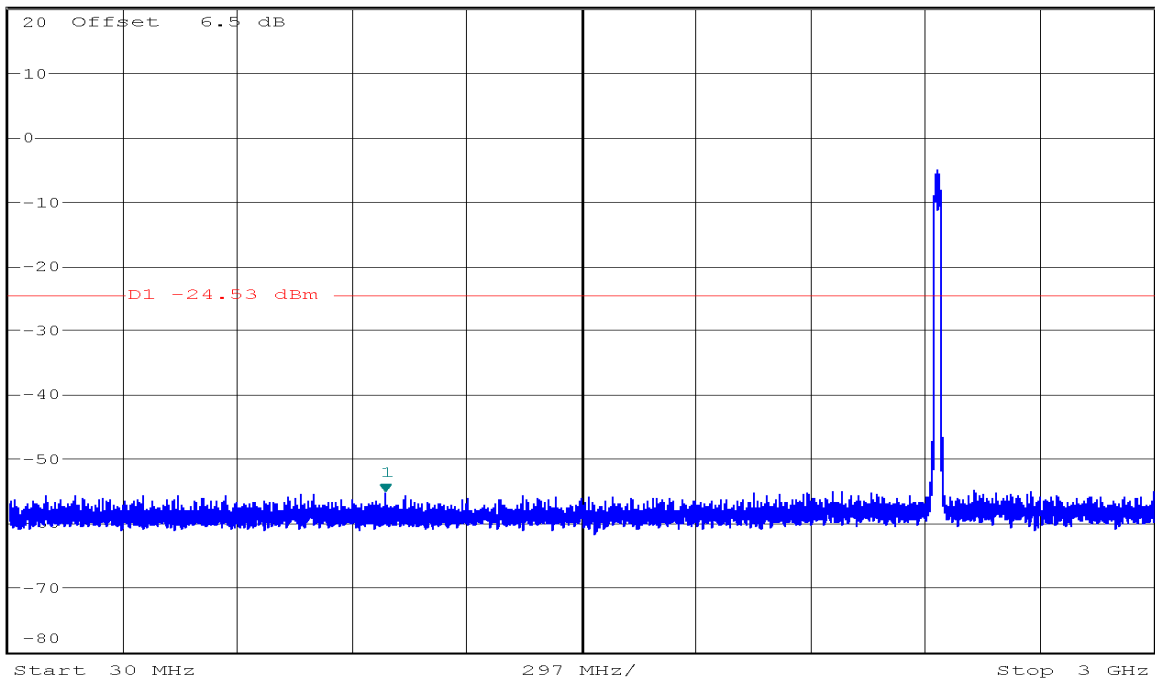


Ref 20 dBm \* Att 20 dB \* RBW 100 kHz Marker 1 [T1 ]  
\* VBW 300 kHz -48.78 dBm  
SWT 2.3 s 3.248170732 GHz

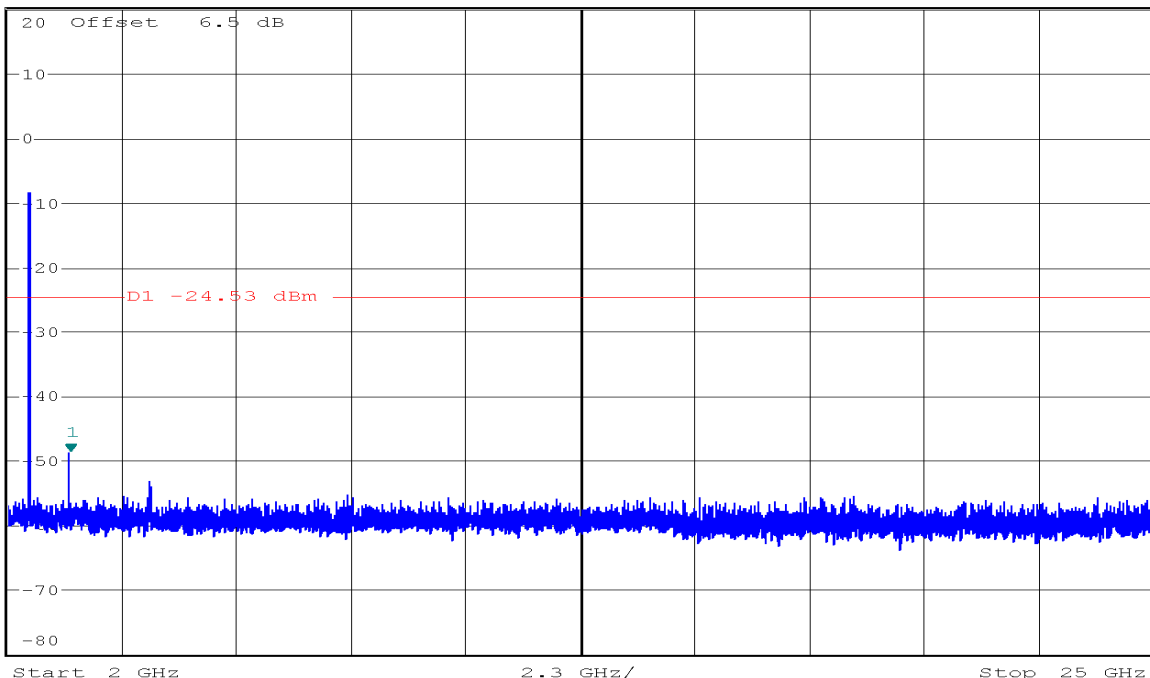


CH High



1 PK  
MAXH

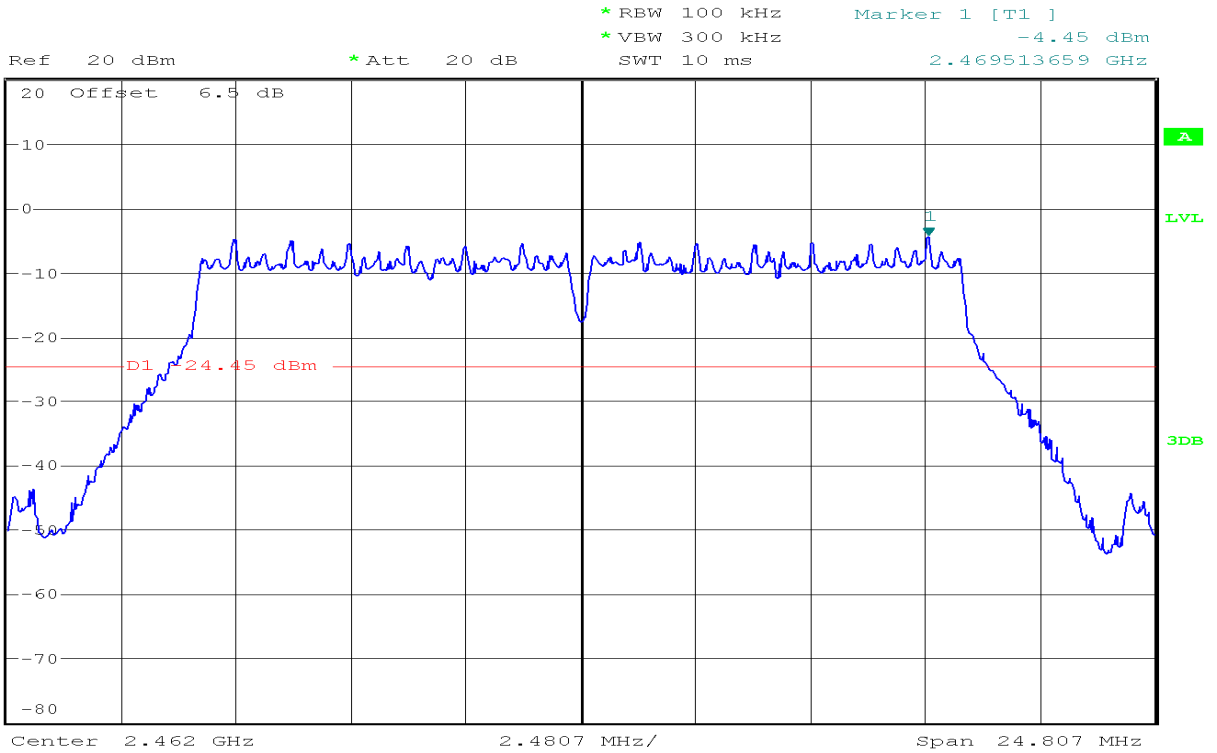


1 PK  
MAXH

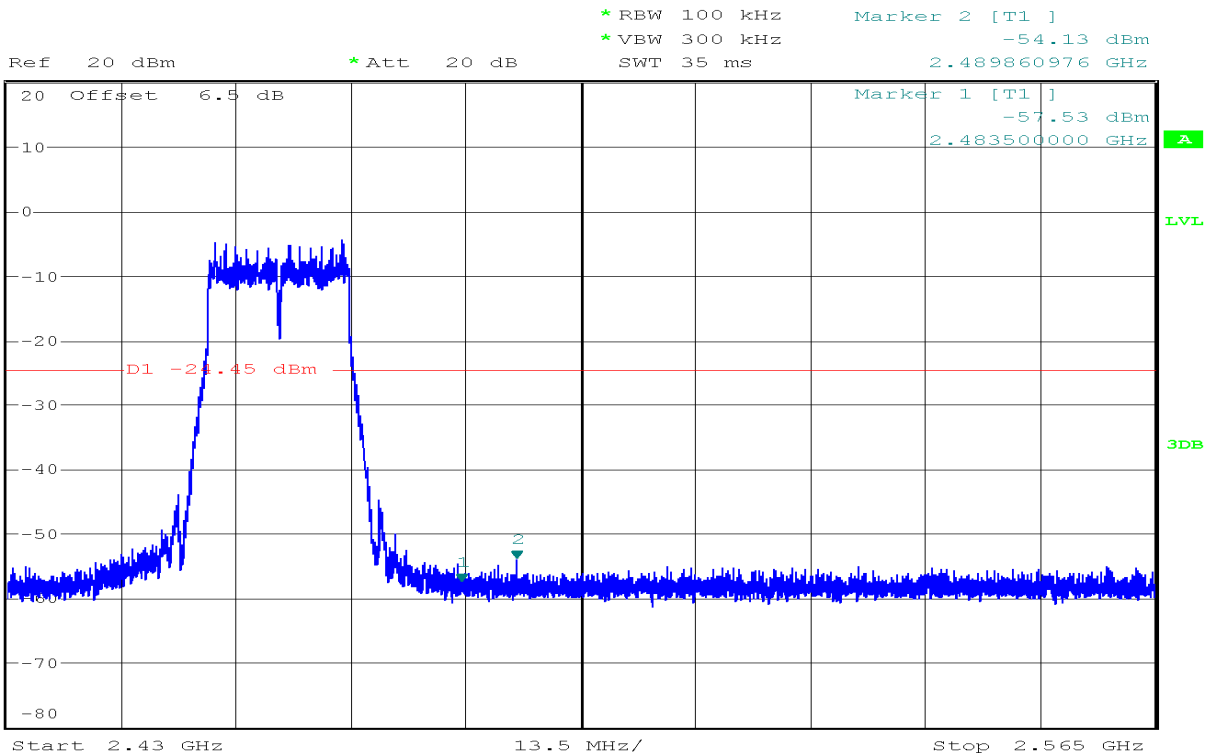




\* RBW 100 kHz  
\* VBW 300 kHz  
SWT 300 ms  
Marker 1 [T1 ]  
-54.08 dBm  
904.701219512 MHz

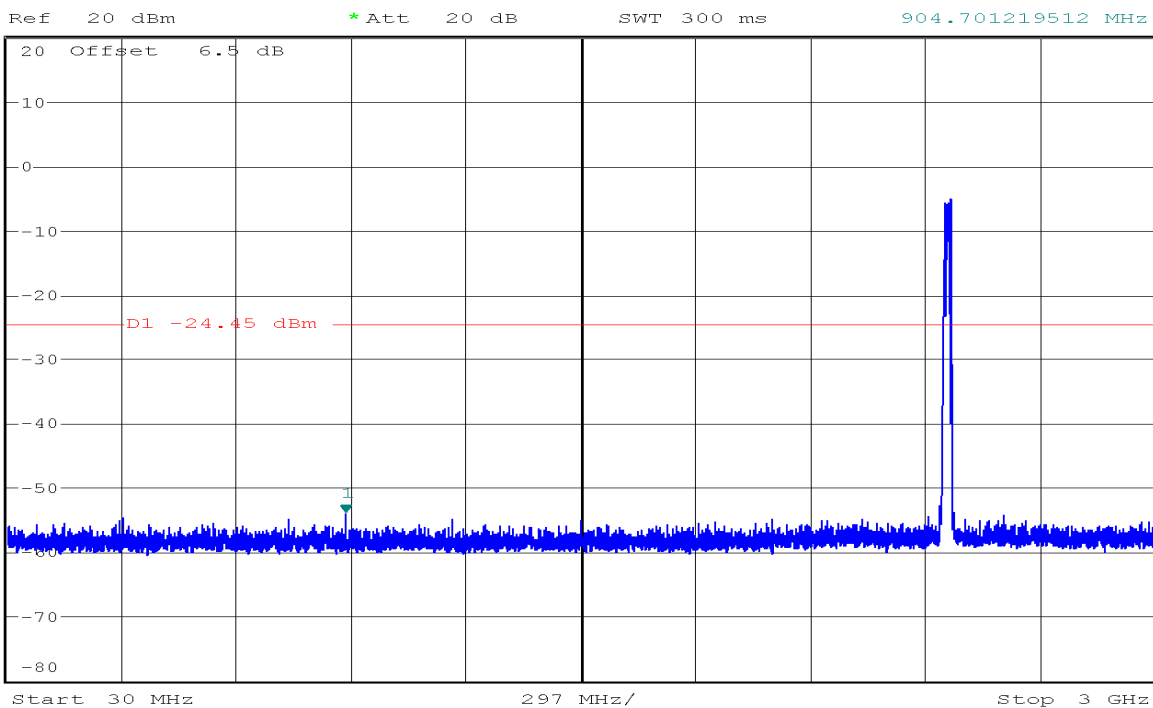

\* RBW 100 kHz  
\* VBW 300 kHz  
SWT 2.3 s  
Marker 1 [T1 ]  
-40.44 dBm  
3.281829268 GHz

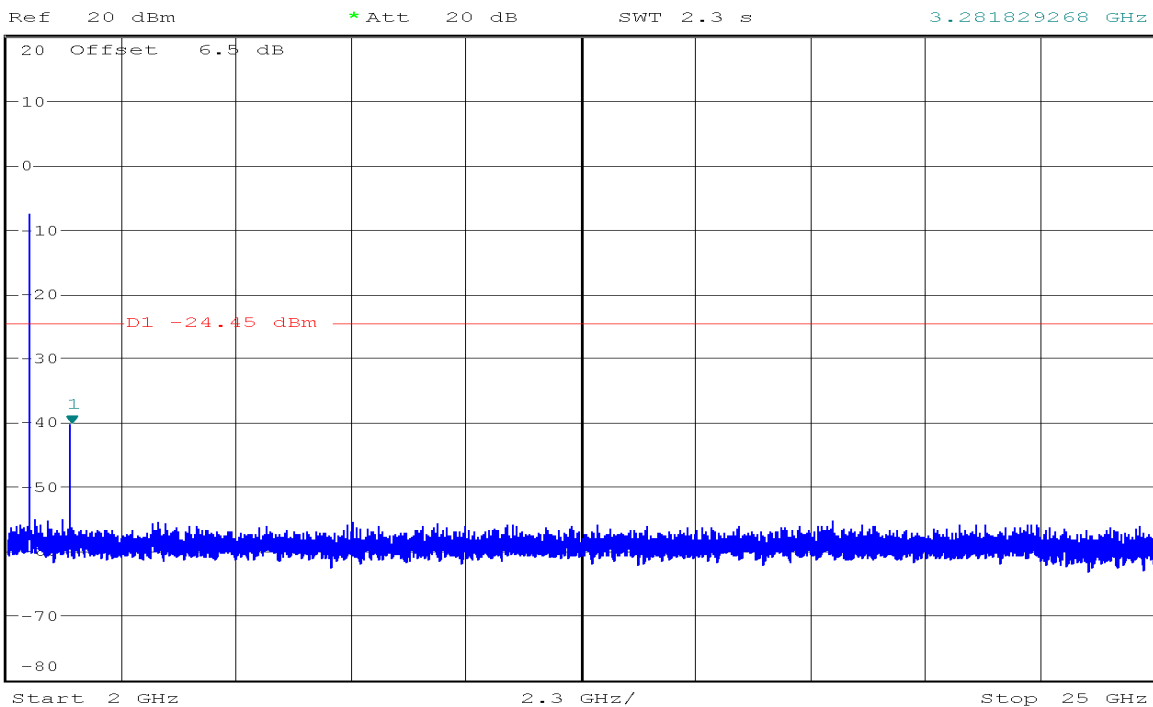


IEEE 802.11n HT20 mode


CH Low



Ref 20 dBm      \*Att 20 dB      \*RBW 100 kHz      Marker 1 [T1 ]  
 \*VBW 300 kHz      -5.59 dBm  
 SWT 10 ms      2.419527606 GHz

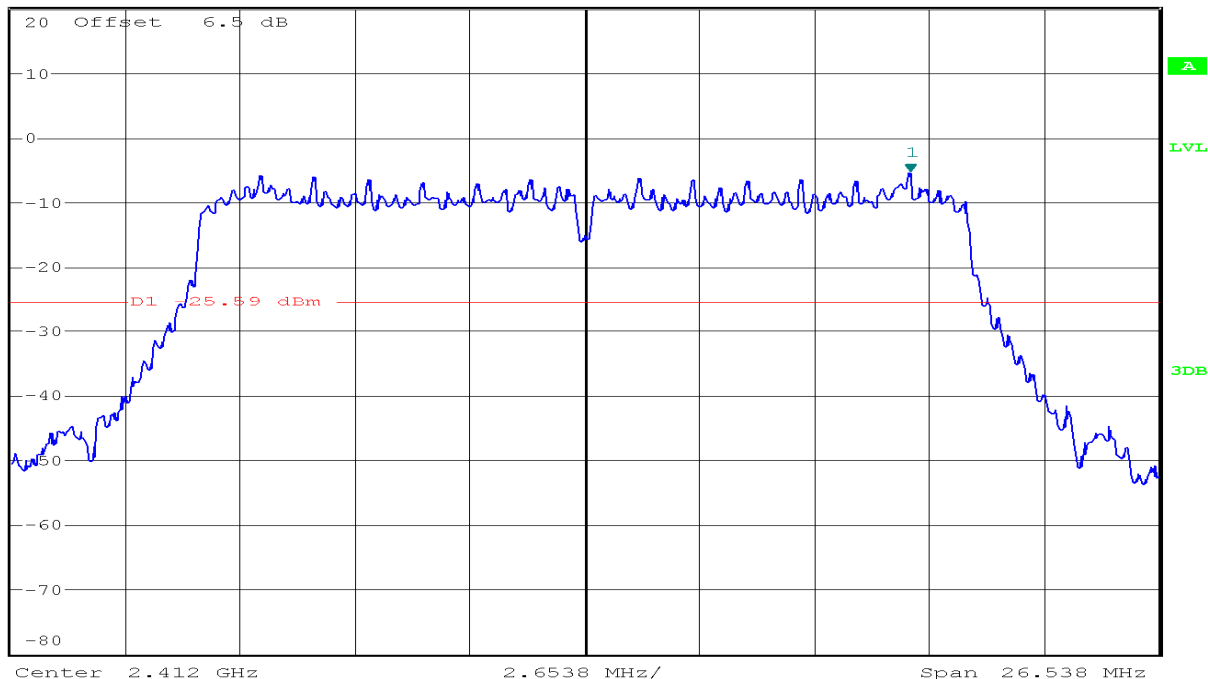


Ref 20 dBm      \*Att 20 dB      \*RBW 100 kHz      Marker 1 [T1 ]  
 \*VBW 300 kHz      -48.01 dBm  
 SWT 35 ms      2.400000000 GHz

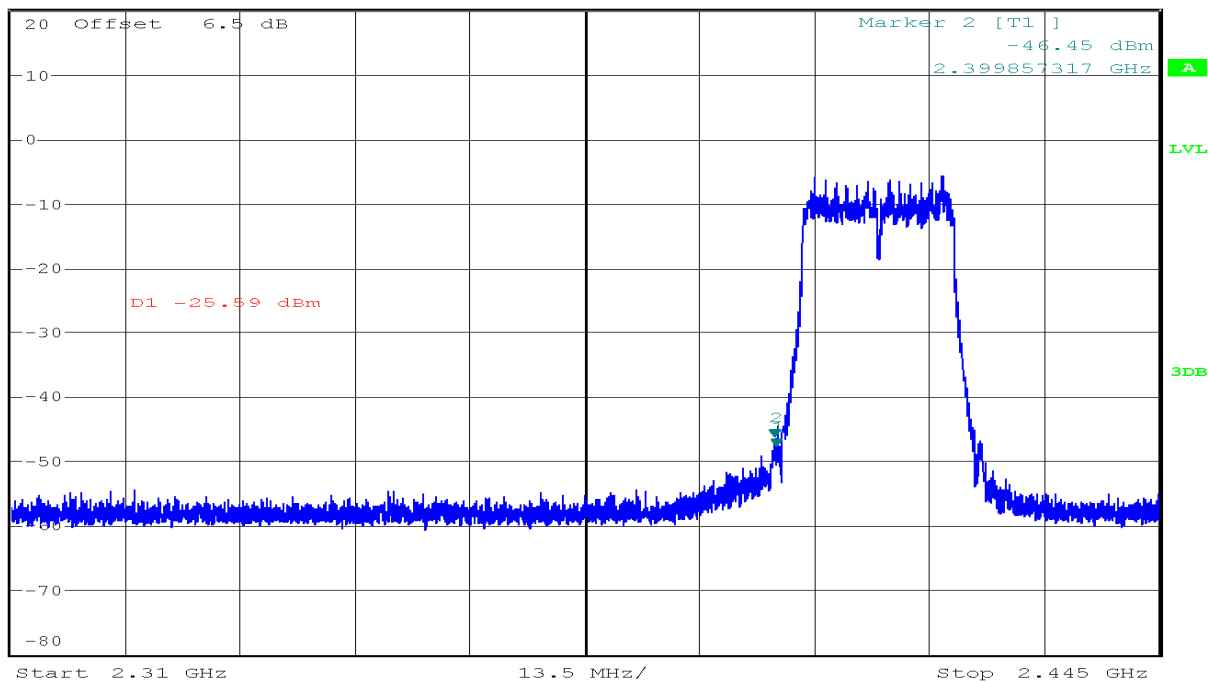




Ref 20 dBm      \* Att 20 dB      \* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -53.43 dBm  
 SWT 300 ms      2.165140244 GHz

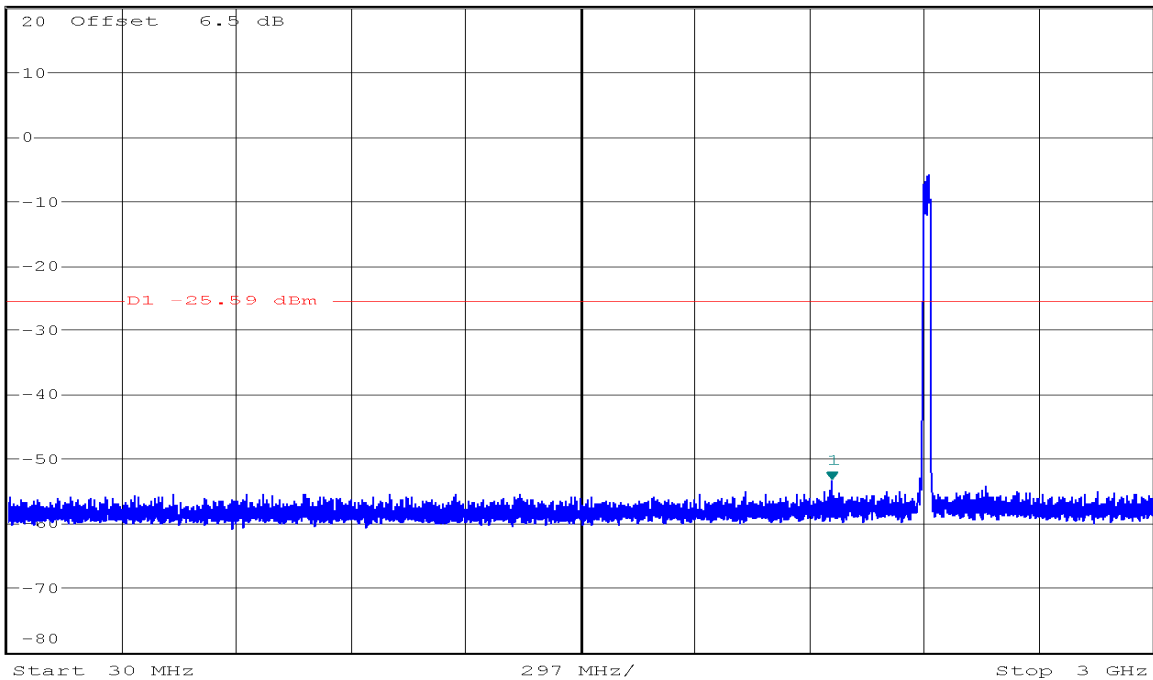


Ref 20 dBm      \* Att 20 dB      \* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -39.31 dBm  
 SWT 2.3 s      3.214512195 GHz

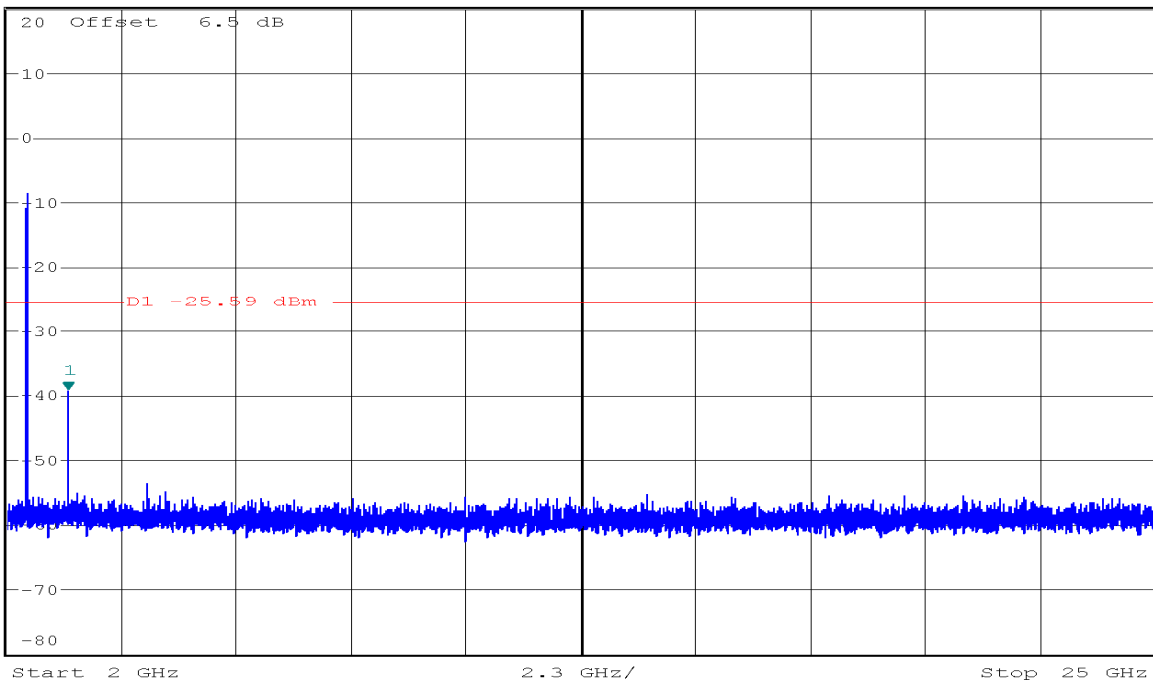


CH Mid




Ref 20 dBm \* Att 20 dB \* RBW 100 kHz Marker 1 [T1] -4.13 dBm  
 \* VBW 300 kHz SWT 10 ms 2.444527606 GHz

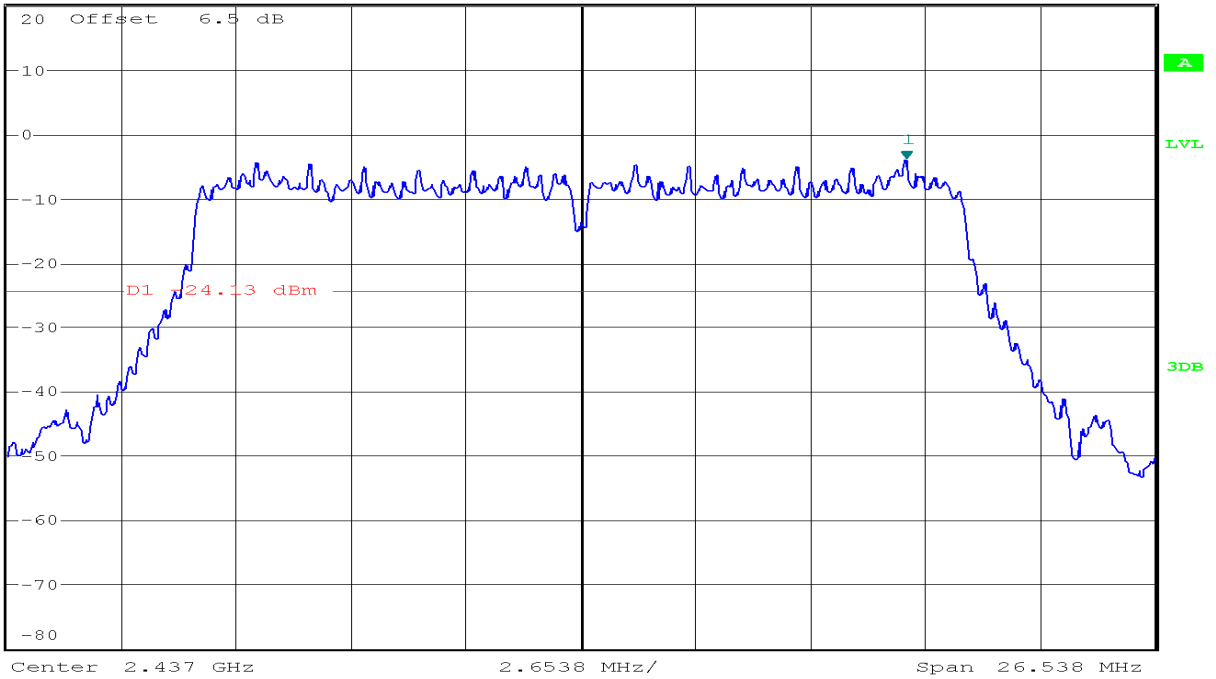


Ref 20 dBm \* Att 20 dB \* RBW 100 kHz Marker 1 [T1] -54.50 dBm  
 \* VBW 300 kHz SWT 300 ms 2.846791463 GHz

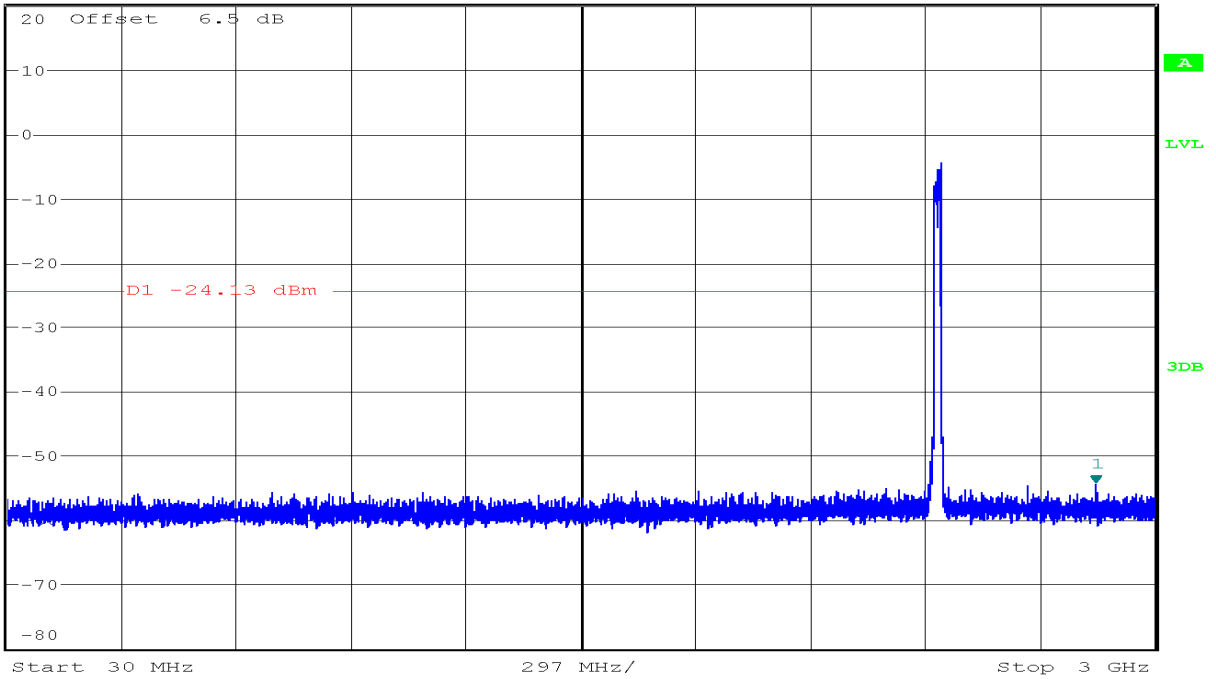

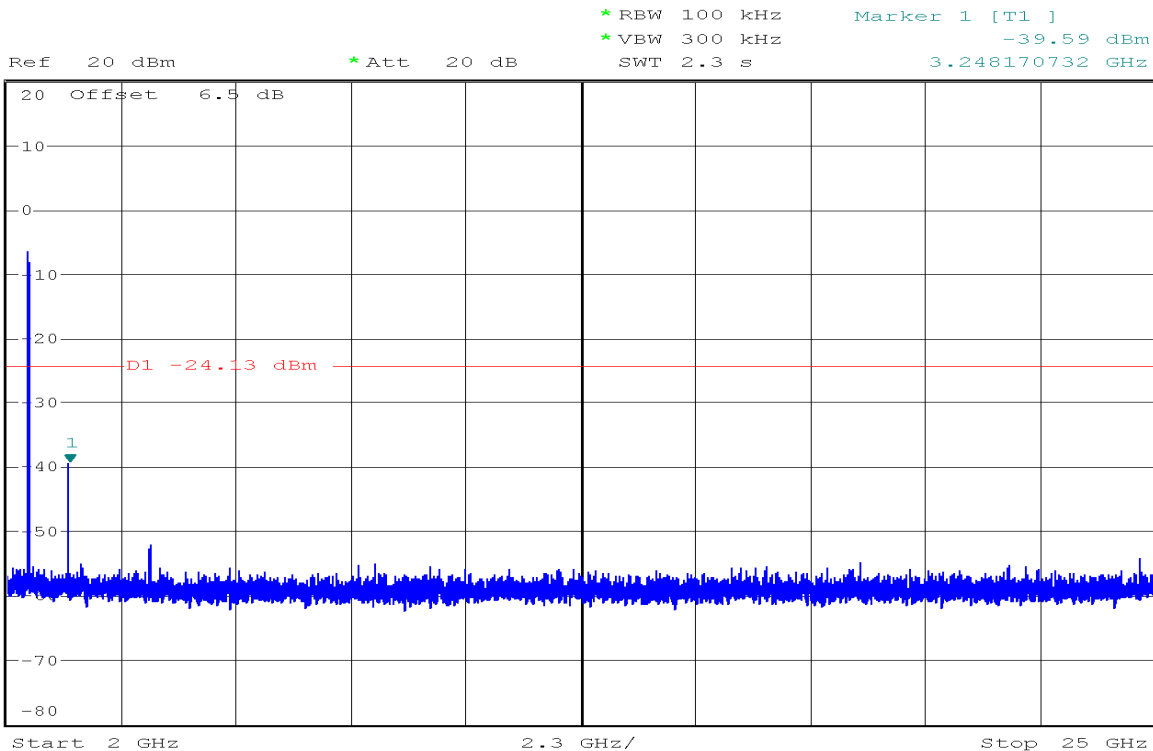


CH High

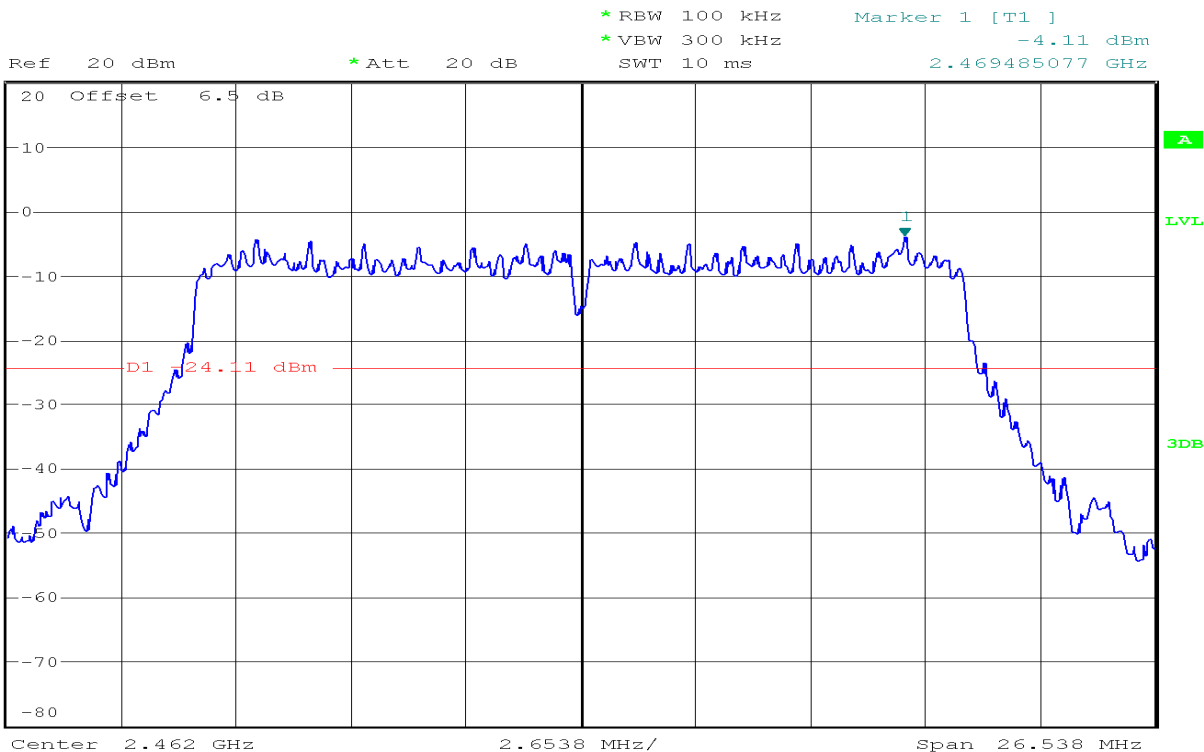




Ref 20 dBm      \* Att 20 dB      \* RBW 100 kHz      Marker 2 [T1]      -54.23 dBm  
 \* VBW 300 kHz      2.496907317 GHz  
 SWT 35 ms

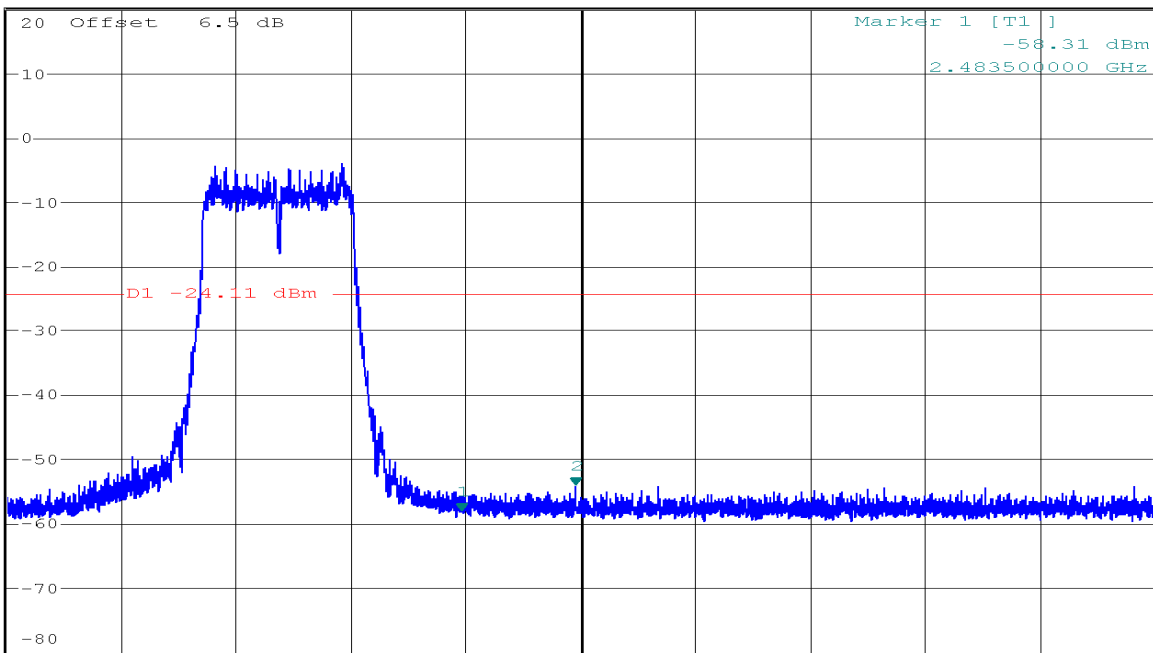

Start 2.43 GHz      13.5 MHz/      Stop 2.565 GHz




Ref 20 dBm      \* Att 20 dB      \* RBW 100 kHz      Marker 1 [T1]      -54.98 dBm  
 \* VBW 300 kHz      855.442682927 MHz  
 SWT 300 ms

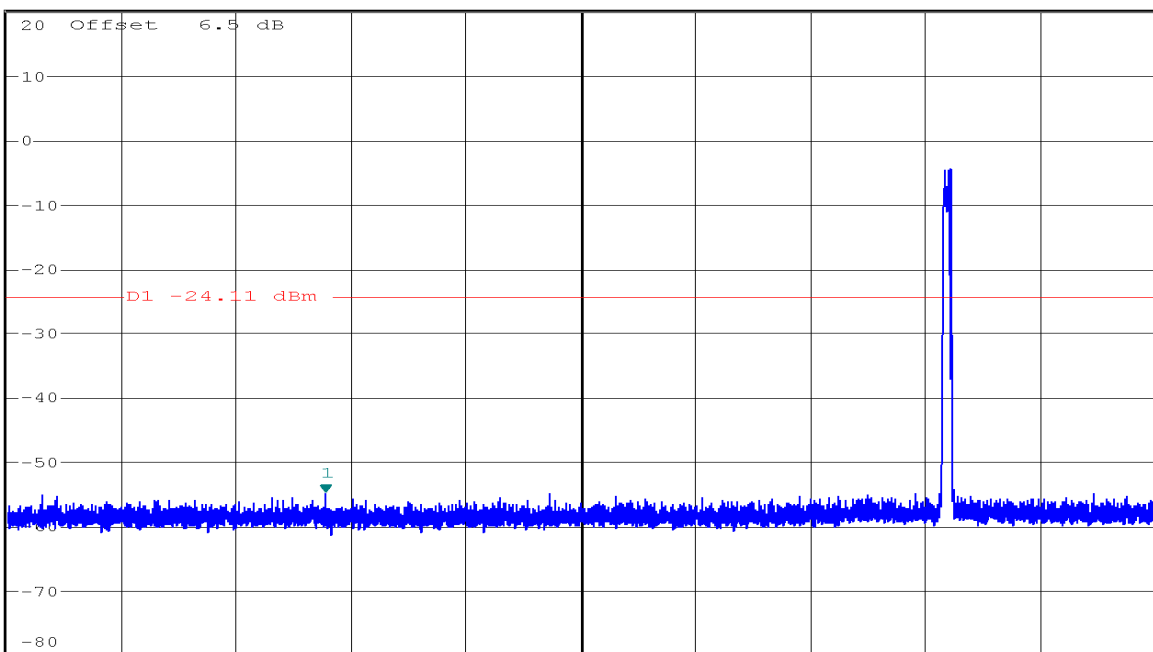


Start 30 MHz      297 MHz/      Stop 3 GHz



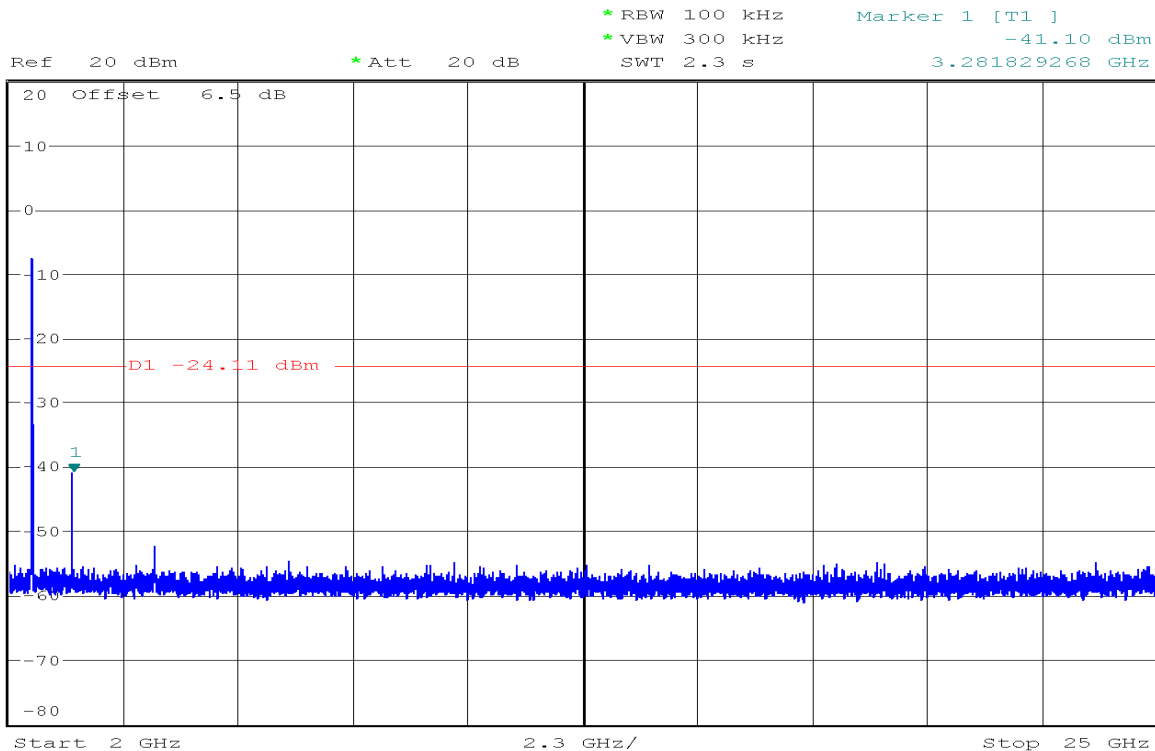


**IEEE 802.11n HT40 mode**

**CH Low**

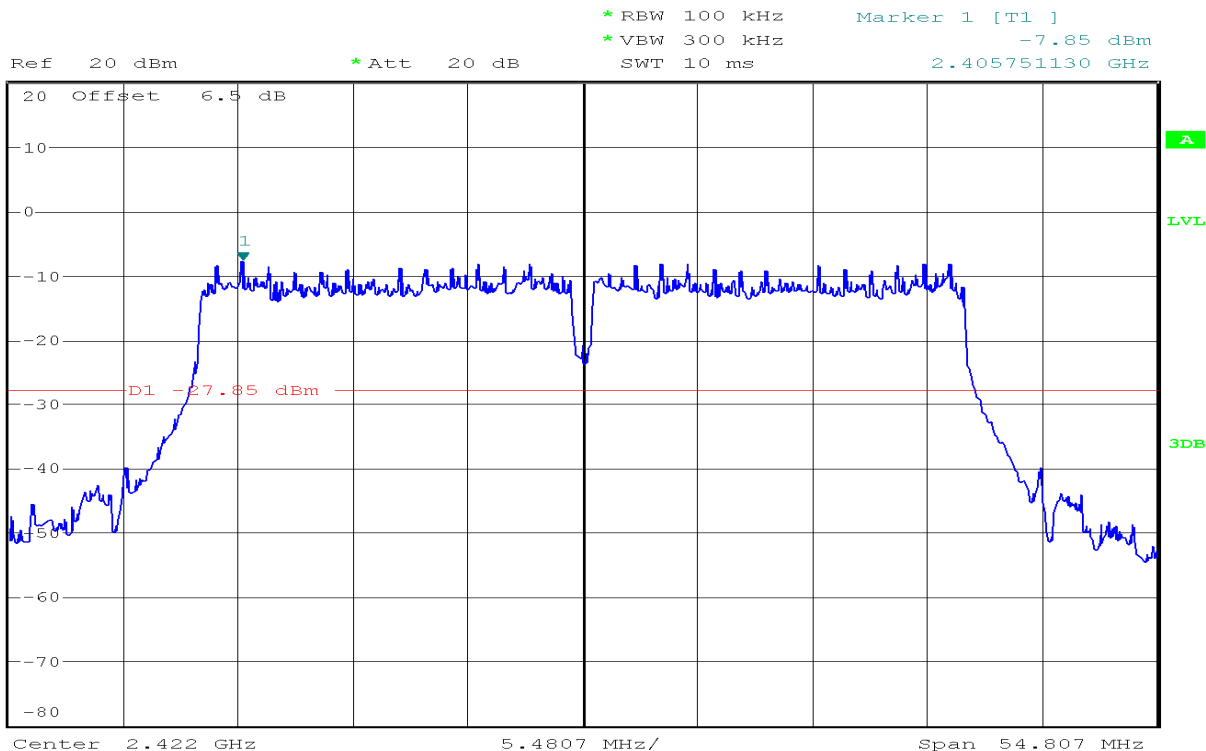




Ref 20 dBm      \* Att 20 dB      \* RBW 100 kHz      Marker 2 [T1]      -42.88 dBm  
 \* VBW 300 kHz      2.399165854 GHz  
 SWT 35 ms

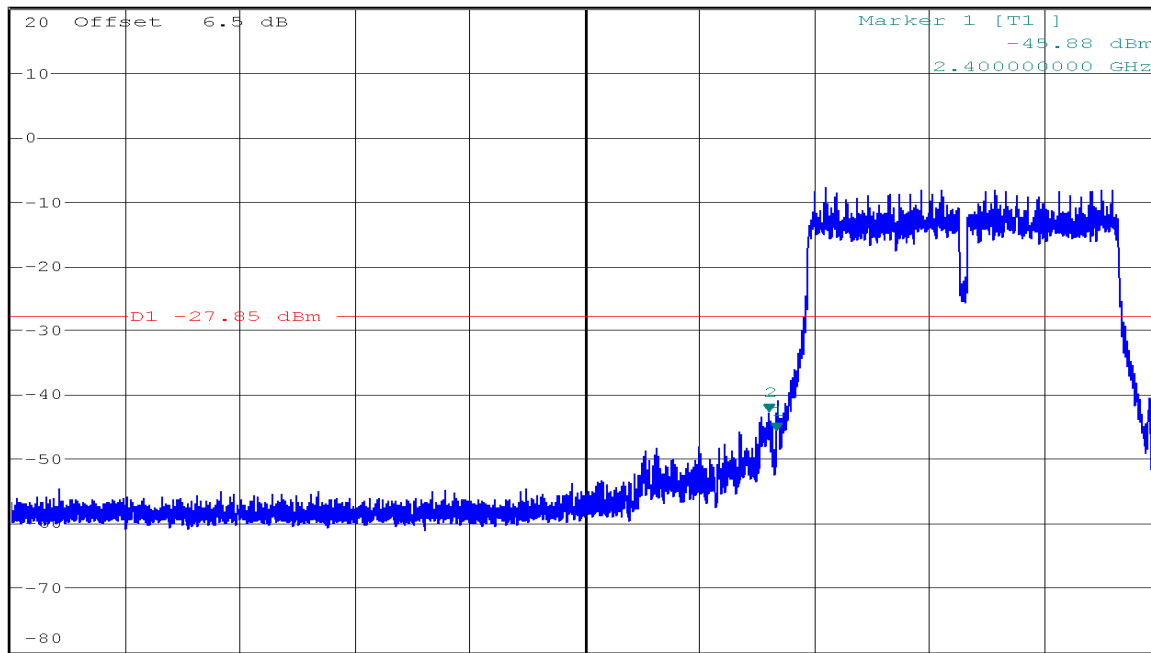

Start 2.31 GHz      13.5 MHz/      Stop 2.445 GHz



Ref 20 dBm      \* Att 20 dB      \* RBW 100 kHz      Marker 1 [T1]      -53.38 dBm  
 \* VBW 300 kHz      2.938789024 GHz  
 SWT 300 ms

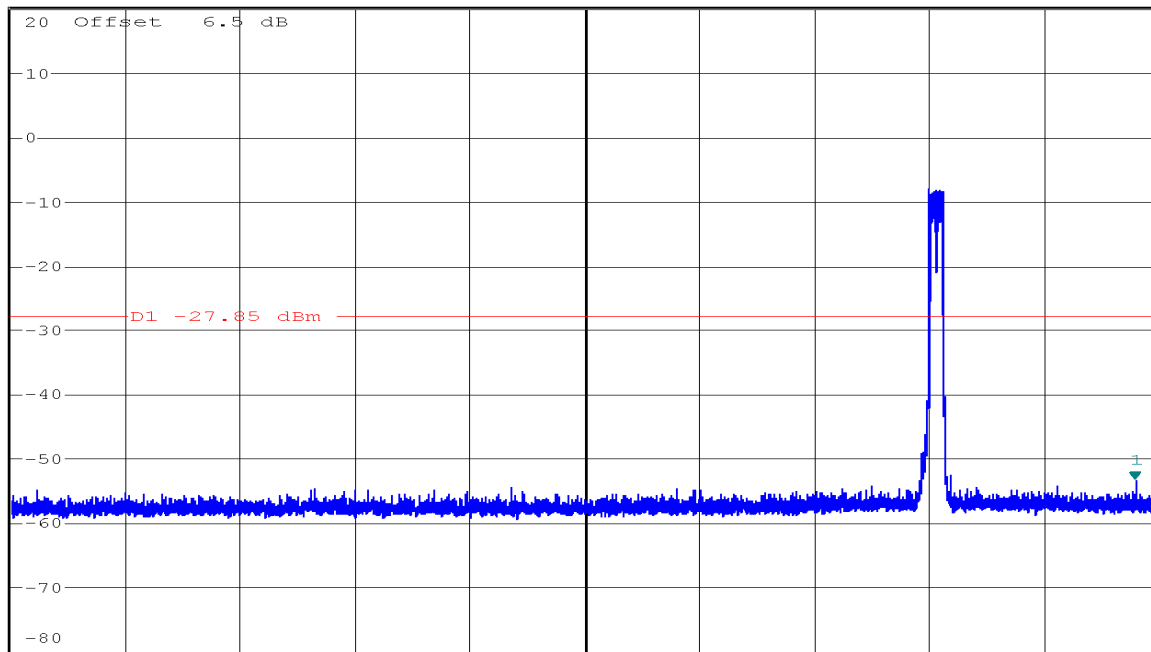


Start 30 MHz      297 MHz/      Stop 3 GHz



\* RBW 100 kHz  
 \* VBW 300 kHz  
 SWT 2.3 s

Marker 1 [T1 ]  
 -40.27 dBm  
 3.228536585 GHz

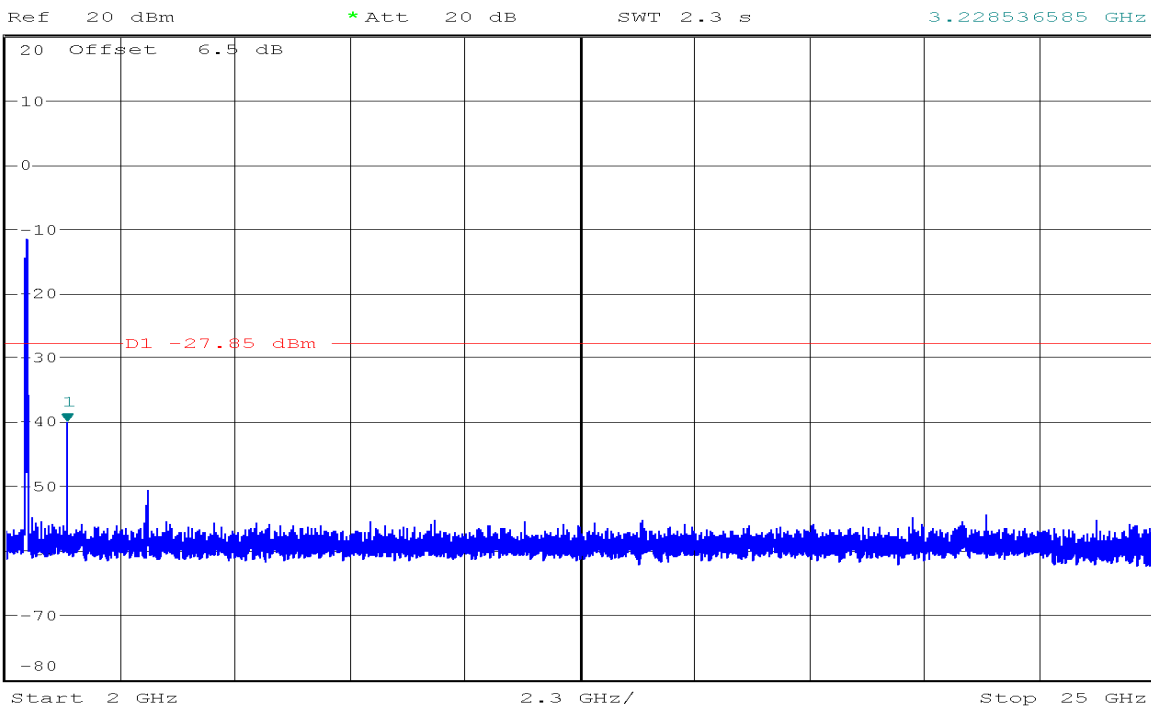


CH Mid



\* RBW 100 kHz  
 \* VBW 300 kHz  
 SWT 10 ms


Marker 1 [T1 ]  
 -7.86 dBm  
 2.420751130 GHz

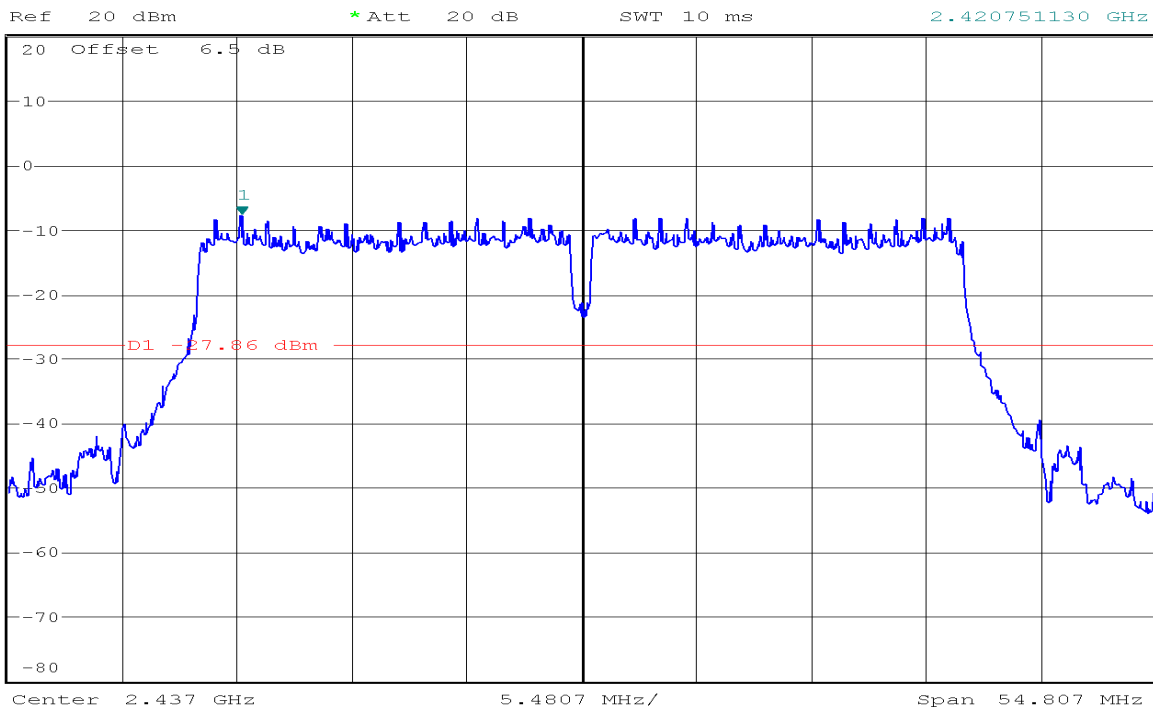



\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 300 kHz      -54.73 dBm  
SWT 300 ms      2.573334146 GHz

Ref 20 dBm      \* Att 20 dB

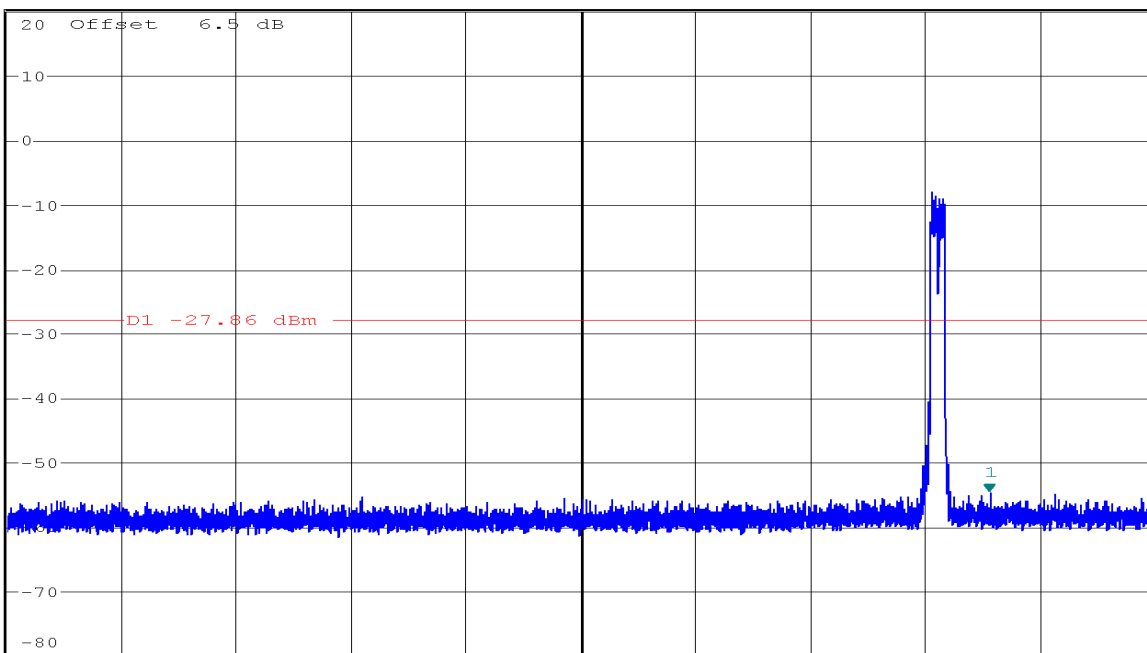


Start 30 MHz      297 MHz/      Stop 3 GHz





\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 300 kHz      -40.34 dBm  
SWT 2.3 s      3.248170732 GHz

Ref 20 dBm      \* Att 20 dB

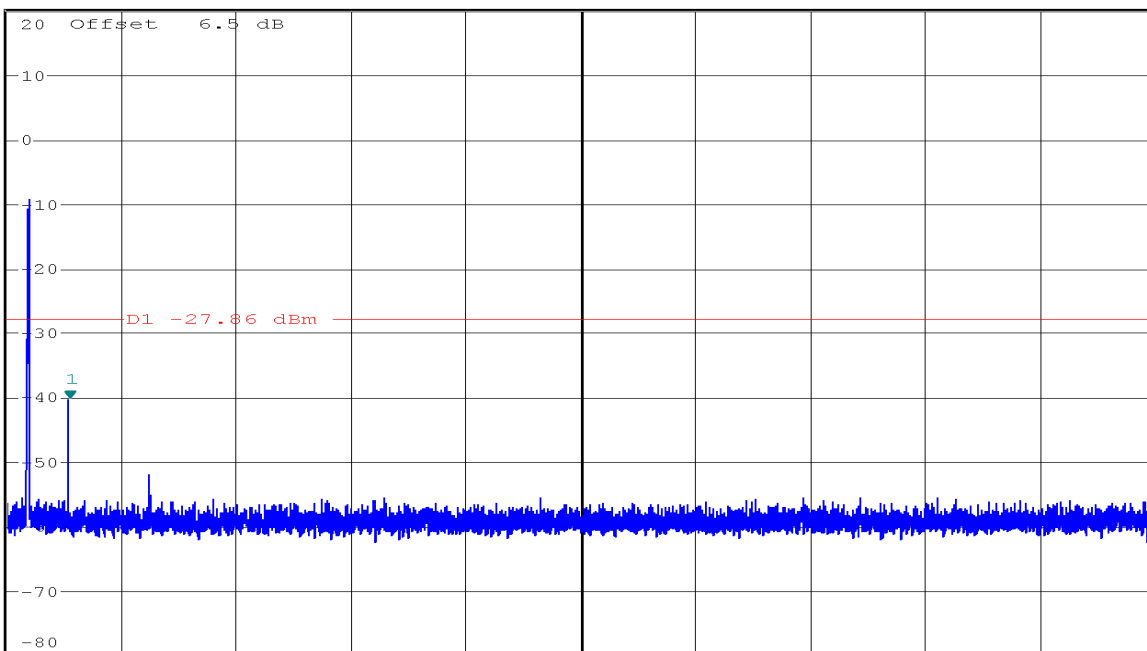


Start 2 GHz      2.3 GHz/      Stop 25 GHz

CH High

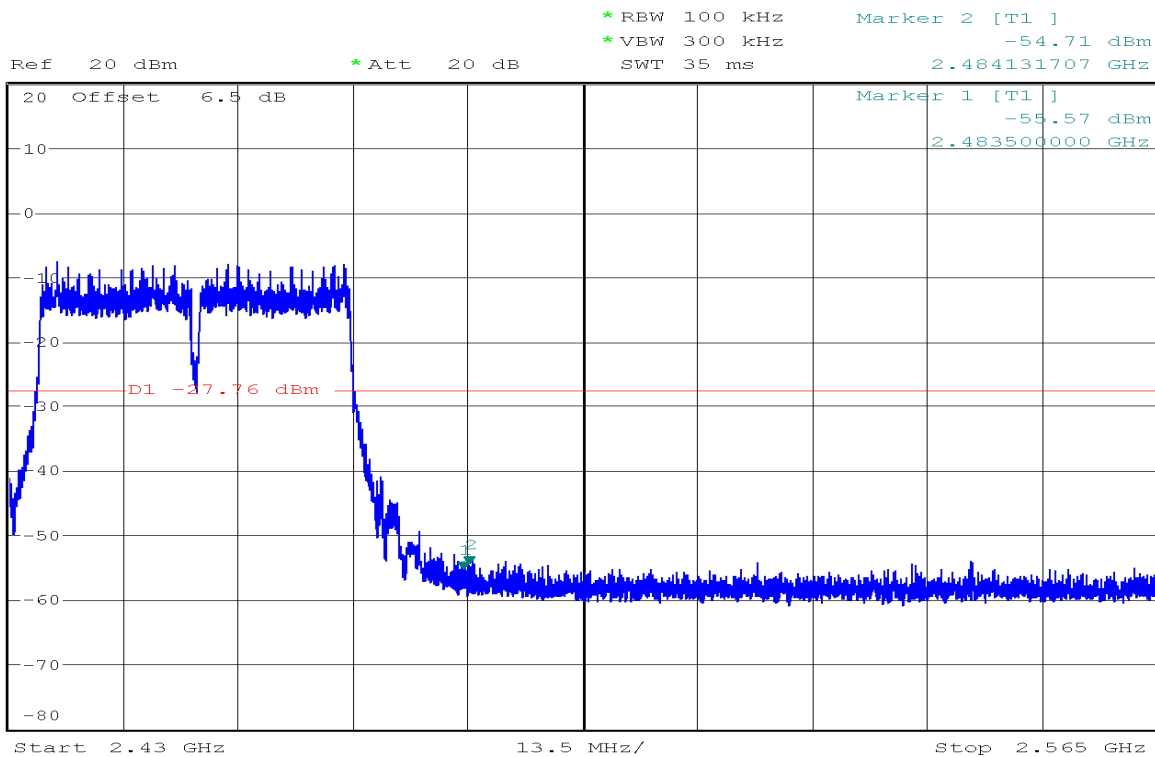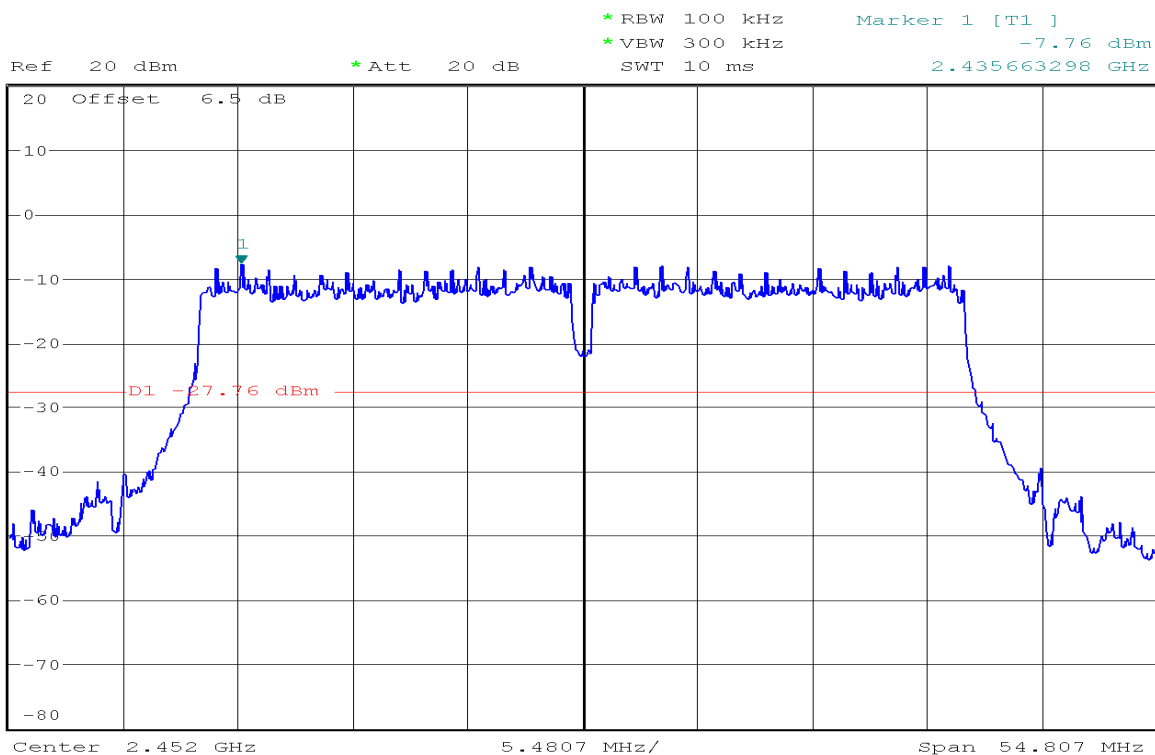




\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -54.78 dBm  
 SWT 300 ms      104.25000000 MHz

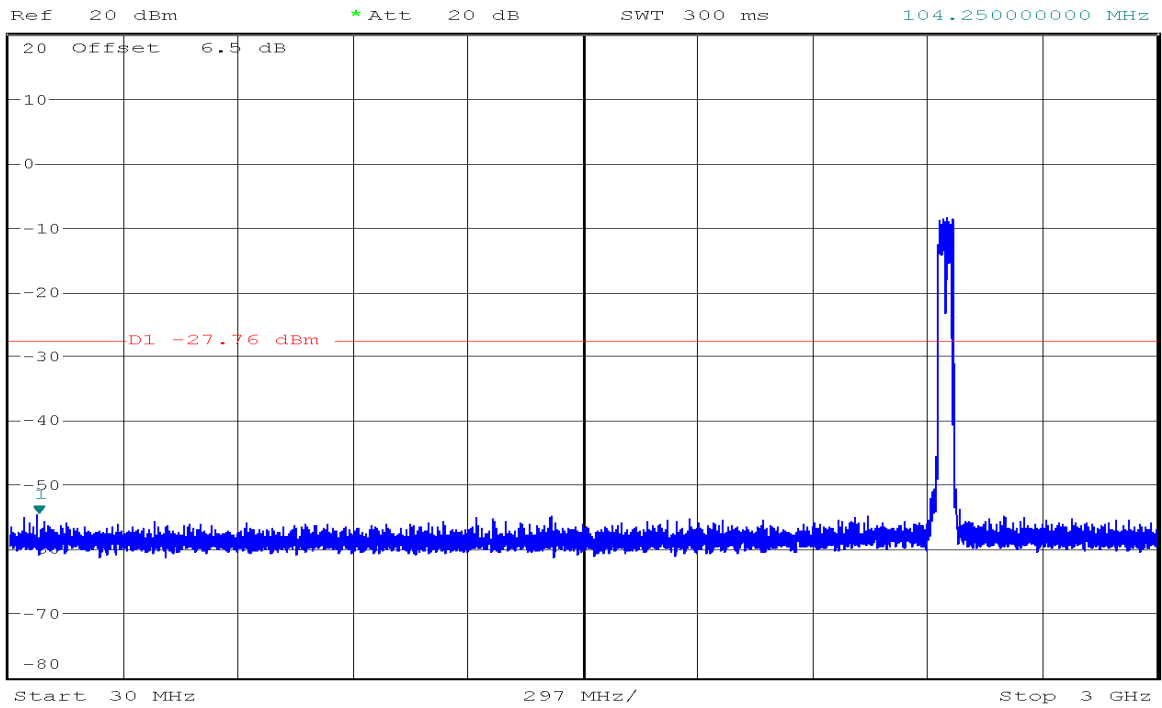

\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -40.84 dBm  
 SWT 2.3 s      3.267804878 GHz

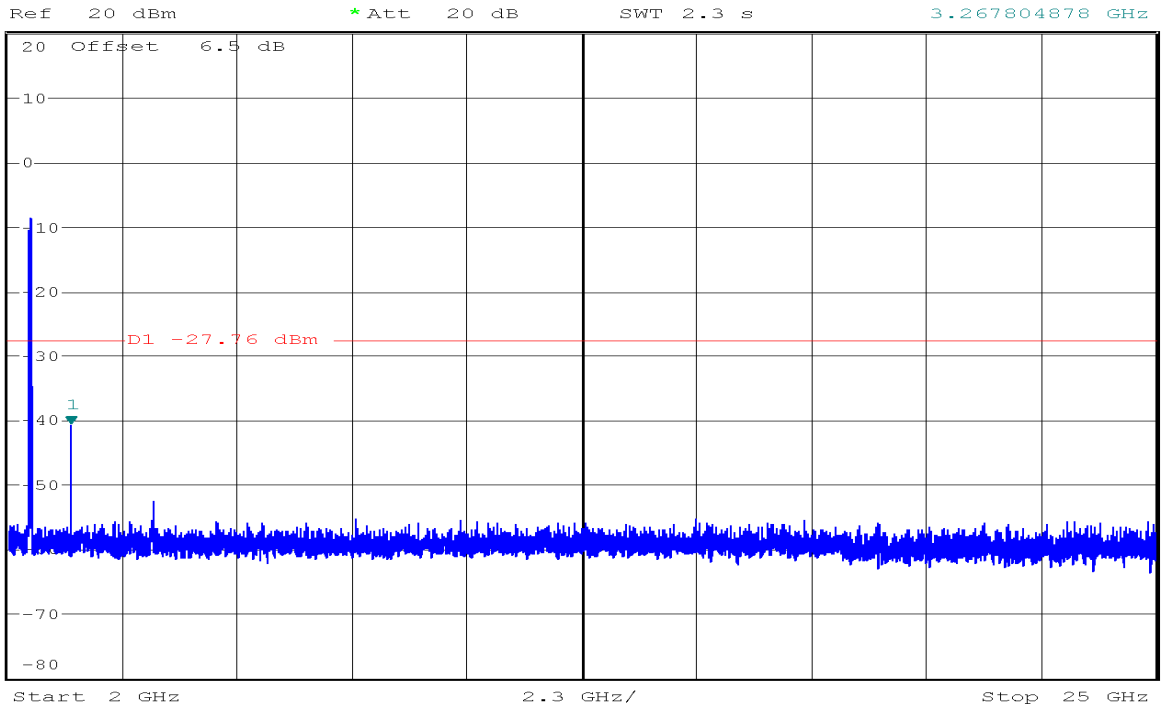

## 7.5.RADIATED EMISSIONS

### LIMIT

Radiated emissions from 9 kHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013. The EUT was placed above the ground plane, 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

### Test Configuration


Below 30MHz

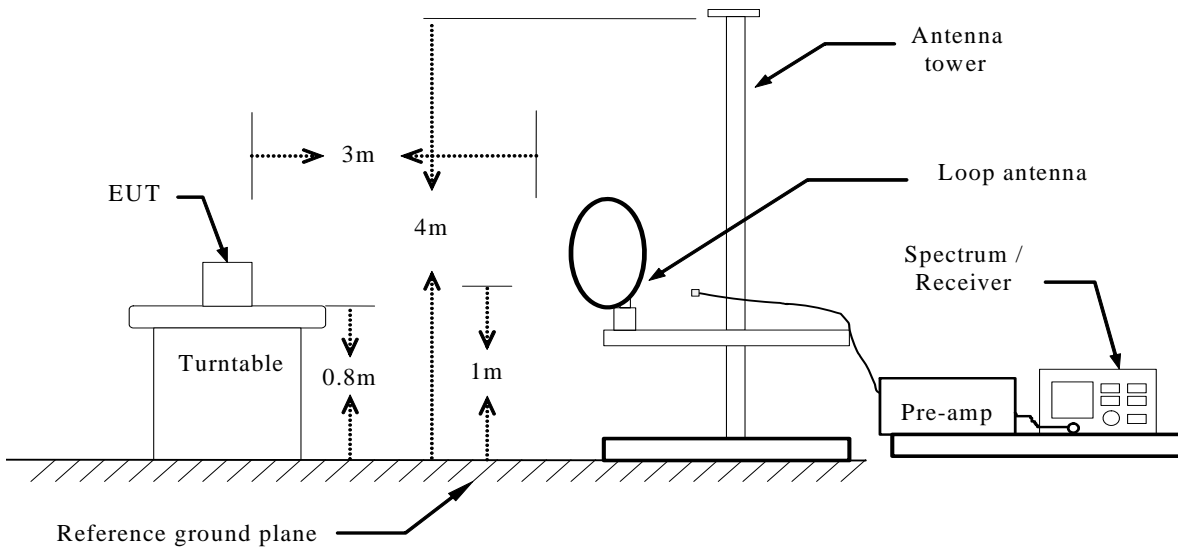

Below 1 GHz

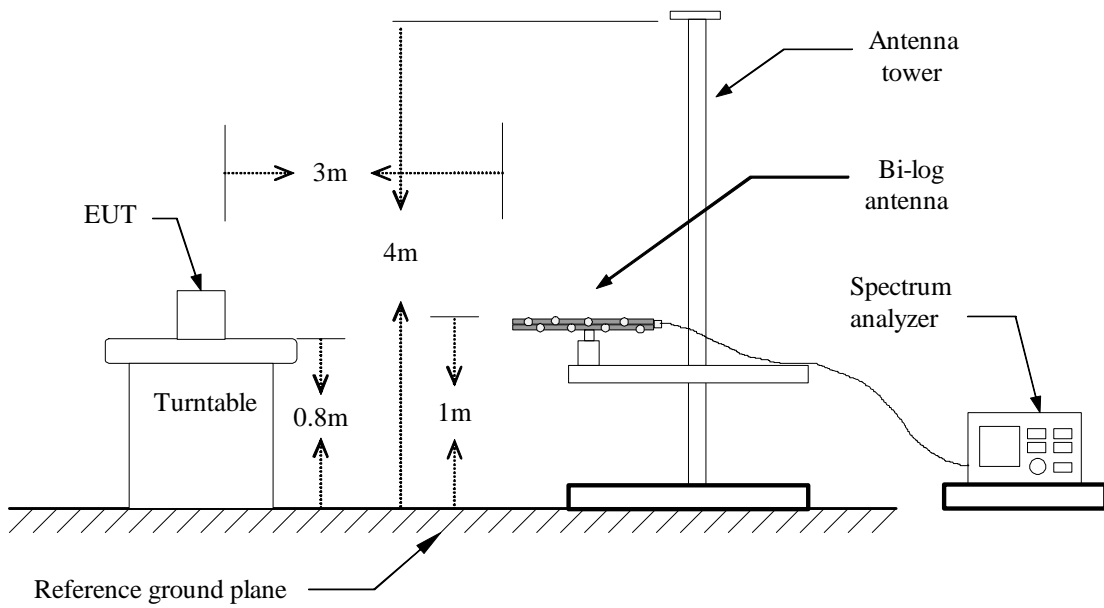

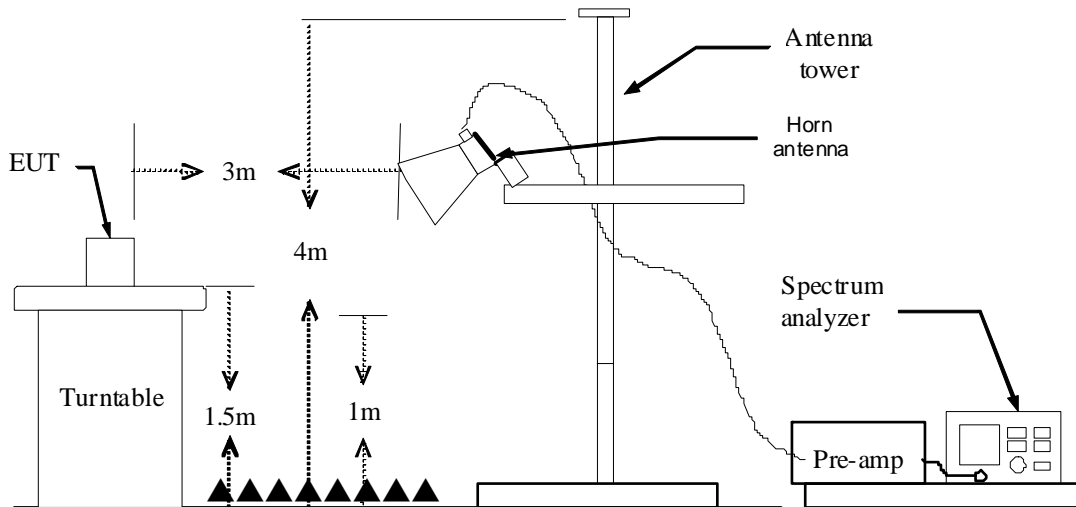

**Above 1 GHz****TEST PROCEDURE**

1. The EUT is placed on a turntable above ground plane, which is 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

PEAK: RBW=VBW=1MHz / Sweep=AUTO


AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS**

**RESTRICTED BANDEDGE (b Mode, Low Channel, Horizontal)**


109.0 dBuV/m

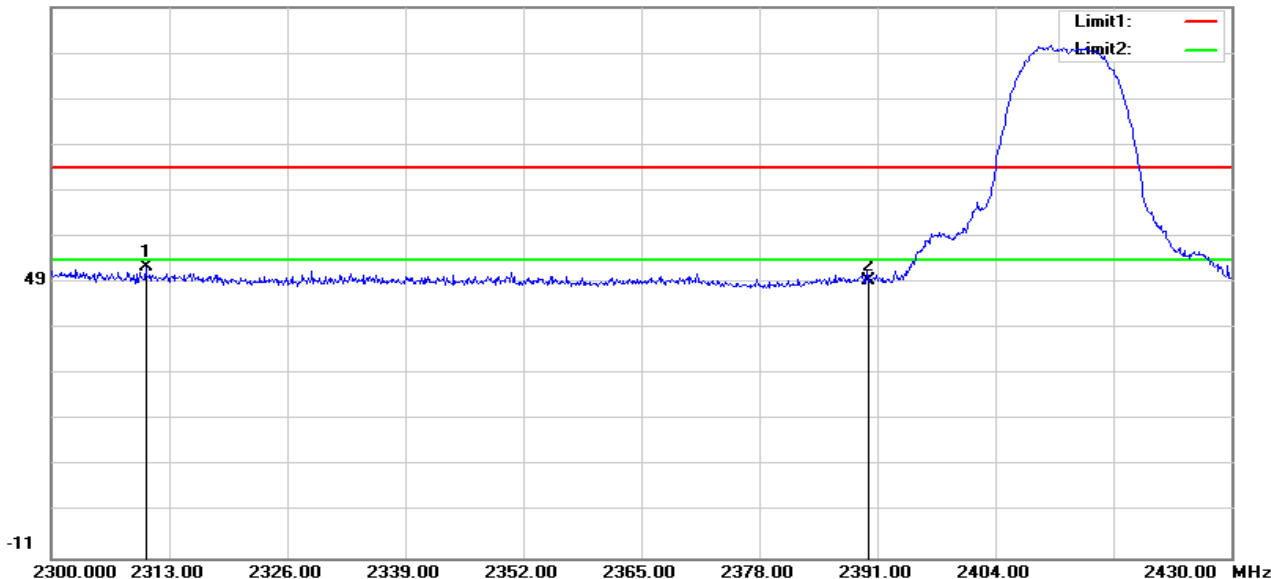

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2310.400	60.87	-8.48	52.39	74.00	-21.61	100	211	peak
2	2390.000	57.36	-7.82	49.54	74.00	-24.46	100	198	peak

**RESTRICTED BANDEDGE (b Mode, Low Channel, Vertical)**


109.0 dBuV/m

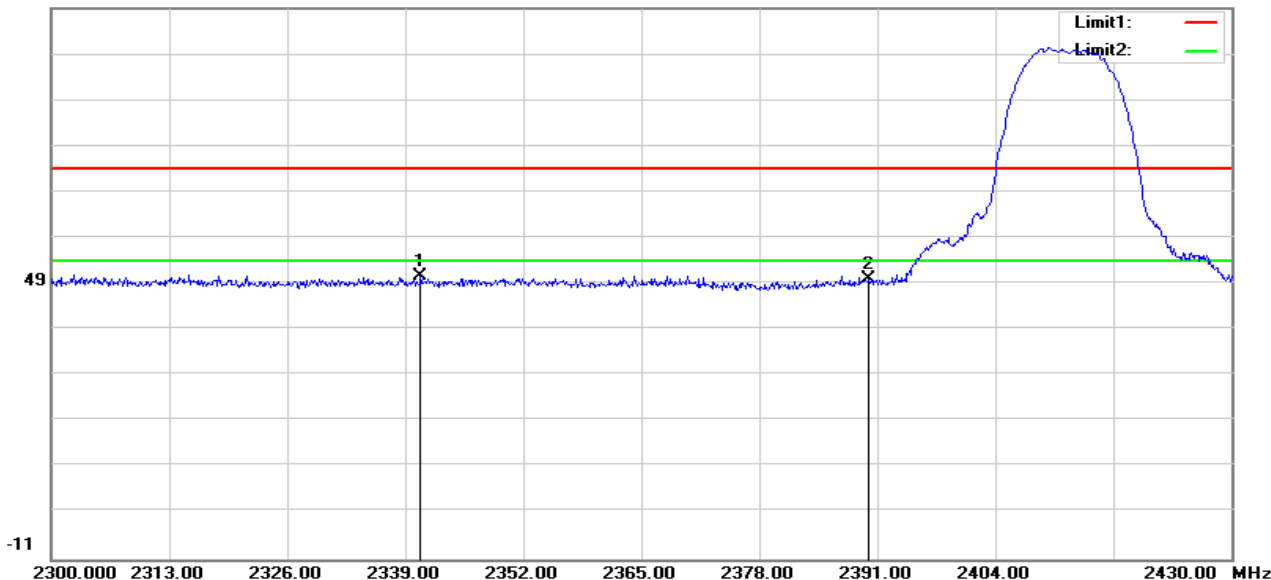

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2340.690	59.01	-8.23	50.78	74.00	-23.22	100	121	peak
2	2390.000	57.85	-7.82	50.03	74.00	-23.97	100	54	peak

**RESTRICTED BANDEDGE (b Mode, High Channel, Horizontal)**


109.0 dBuV/m

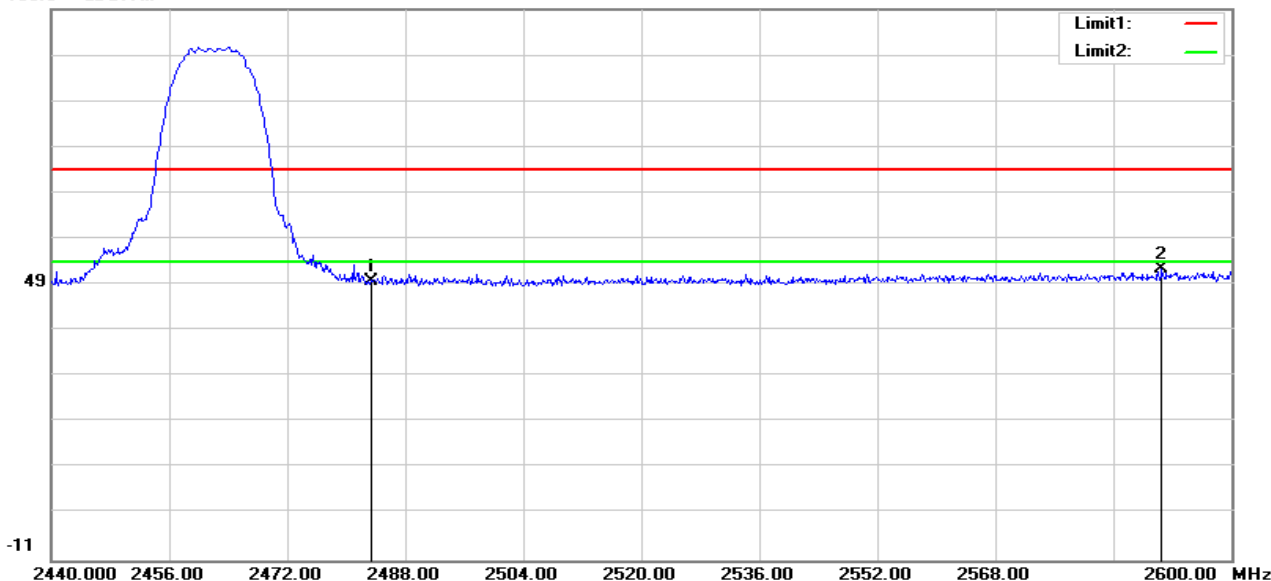

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	56.92	-7.05	49.87	74.00	-24.13	100	326	peak
2	2590.560	58.63	-6.17	52.46	74.00	-21.54	100	245	peak

**RESTRICTED BANDEDGE (b Mode, High Channel, Vertical)**


109.0 dBuV/m

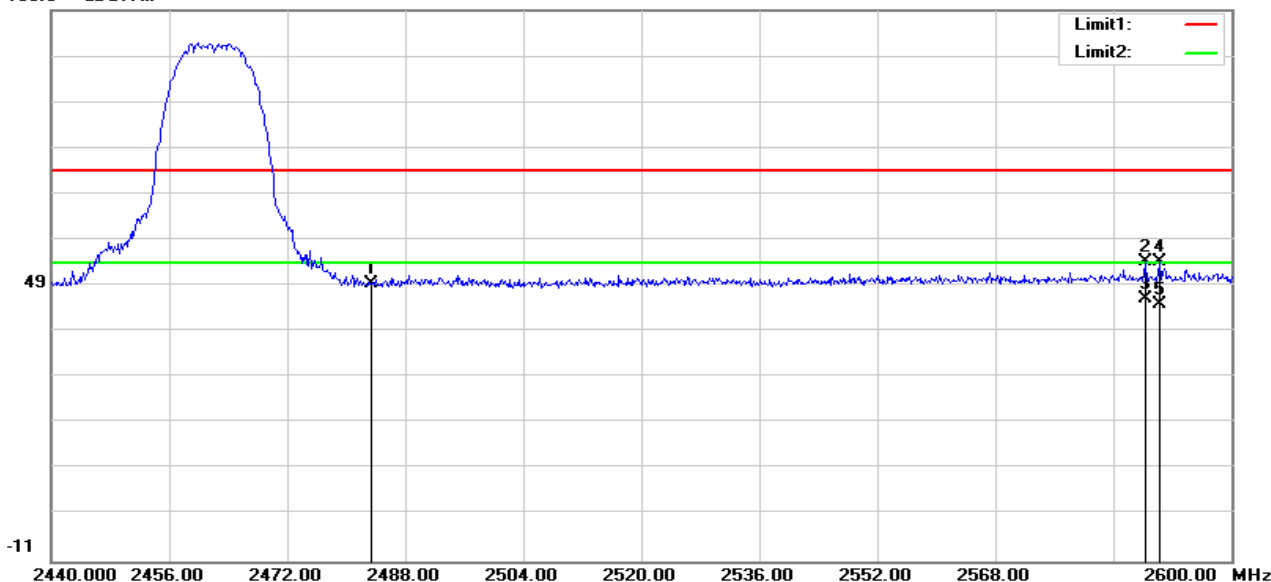

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	56.43	-7.05	49.38	74.00	-24.62	100	121	peak
2	2588.320	60.31	-6.19	54.12	74.00	-19.88	100	195	peak
3	2588.320	52.24	-6.19	46.05	54.00	-7.95	100	195	AVG
4	2590.240	60.55	-6.17	54.38	74.00	-19.62	100	74	peak
5	2590.240	50.96	-6.17	44.79	54.00	-9.21	100	74	AVG

**RESTRICTED BANDEDGE (g Mode, Low Channel, Horizontal)**


109.0 dBuV/m

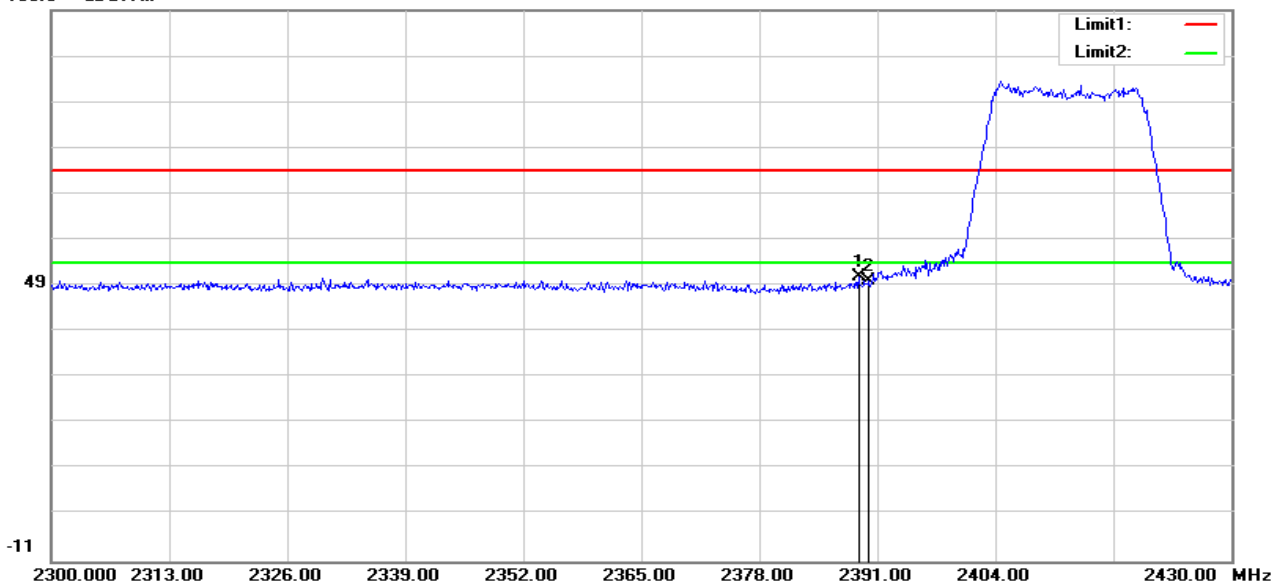

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2388.920	58.65	-7.83	50.82	74.00	-23.18	100	202	peak
2	2390.000	57.85	-7.82	50.03	74.00	-23.97	100	27	peak

**RESTRICTED BANDEDGE (g Mode, Low Channel, Vertical)**


109.0 dBuV/m

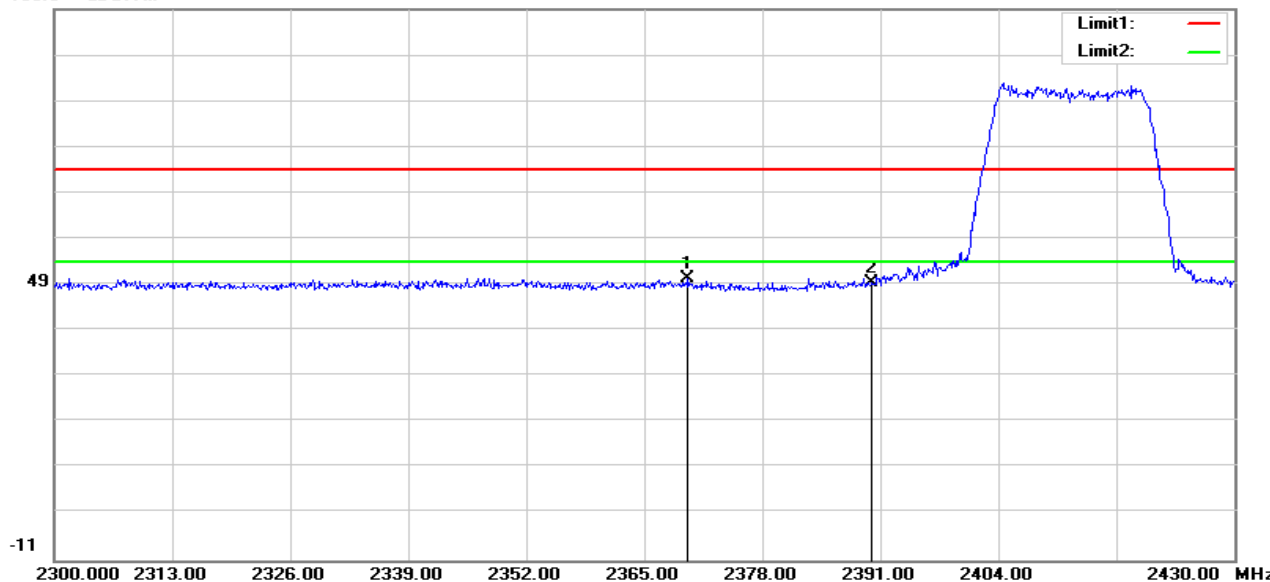

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2369.810	58.41	-7.99	50.42	74.00	-23.58	100	150	peak
2	2390.000	57.35	-7.82	49.53	74.00	-24.47	100	299	peak

**RESTRICTED BANDEDGE (g Mode, High Channel, Horizontal)**


109.0 dBuV/m

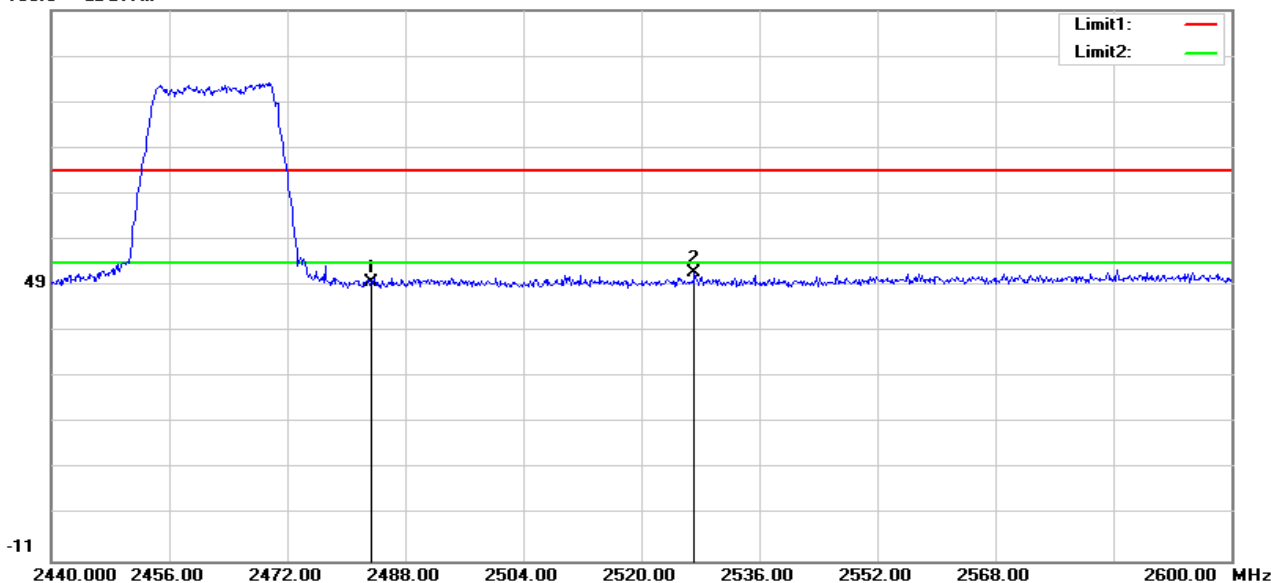

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	56.73	-7.05	49.68	74.00	-24.32	100	87	peak
2	2527.200	58.41	-6.69	51.72	74.00	-22.28	100	355	peak

**RESTRICTED BANDEDGE (g Mode, High Channel, Vertical)**


109.0 dBuV/m

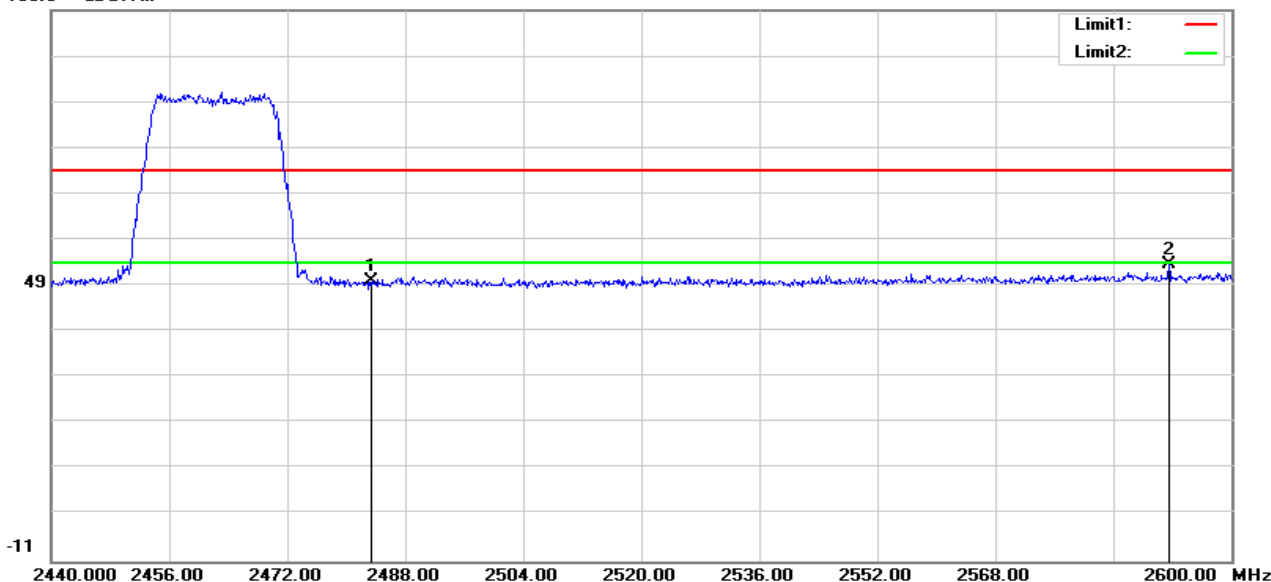

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	57.12	-7.05	50.07	74.00	-23.93	100	83	peak
2	2591.520	59.91	-6.16	53.75	74.00	-20.25	100	23	peak

**RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, Low Channel, Horizontal)**


109.0 dBuV/m

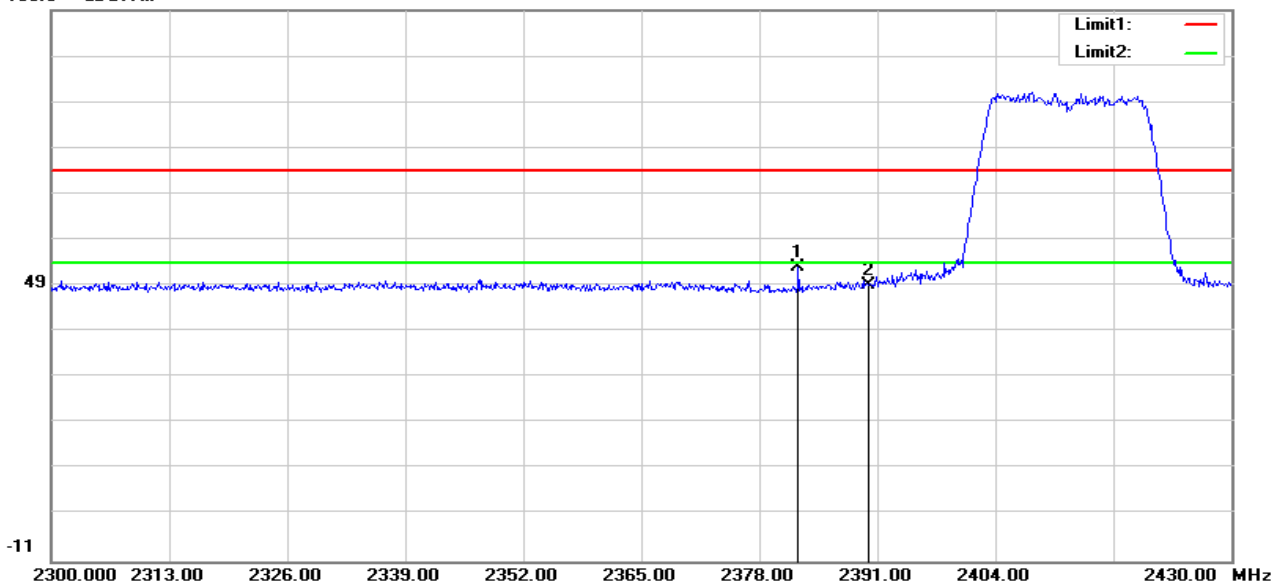

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2382.290	61.03	-7.88	53.15	74.00	-20.85	100	29	peak
2	2390.000	57.09	-7.82	49.27	74.00	-24.73	100	9	peak

**RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, Low Channel, Vertical)**


109.0 dBuV/m

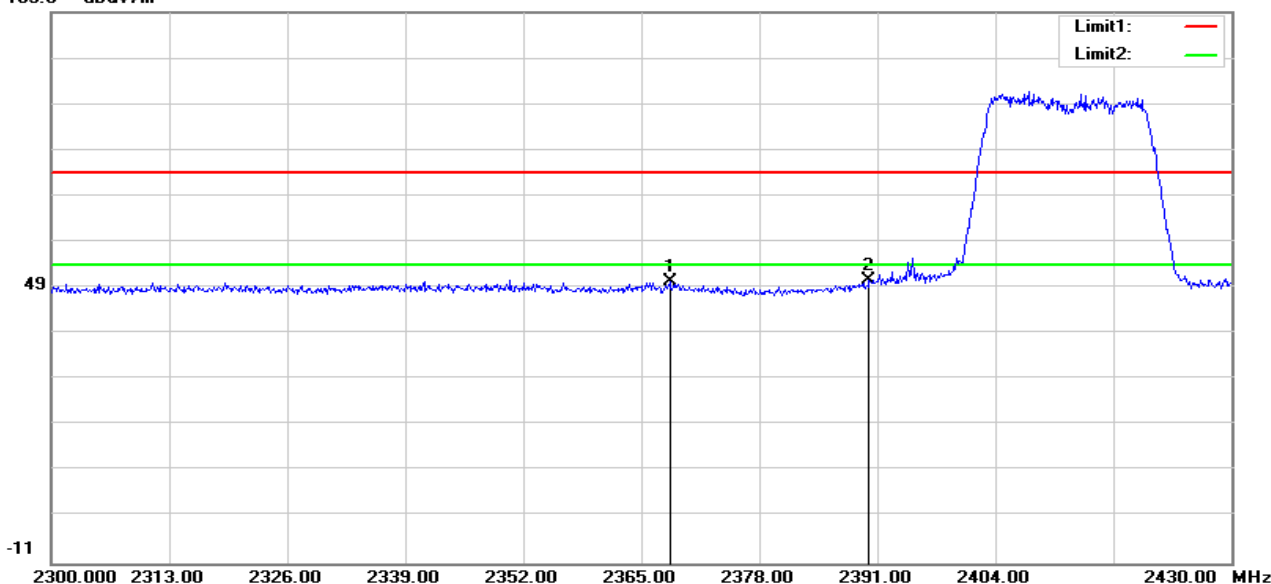

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2368.120	58.34	-8.00	50.34	74.00	-23.66	100	0	peak
2	2390.000	58.45	-7.82	50.63	74.00	-23.37	100	197	peak

**RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, High Channel, Horizontal)**


109.0 dBuV/m

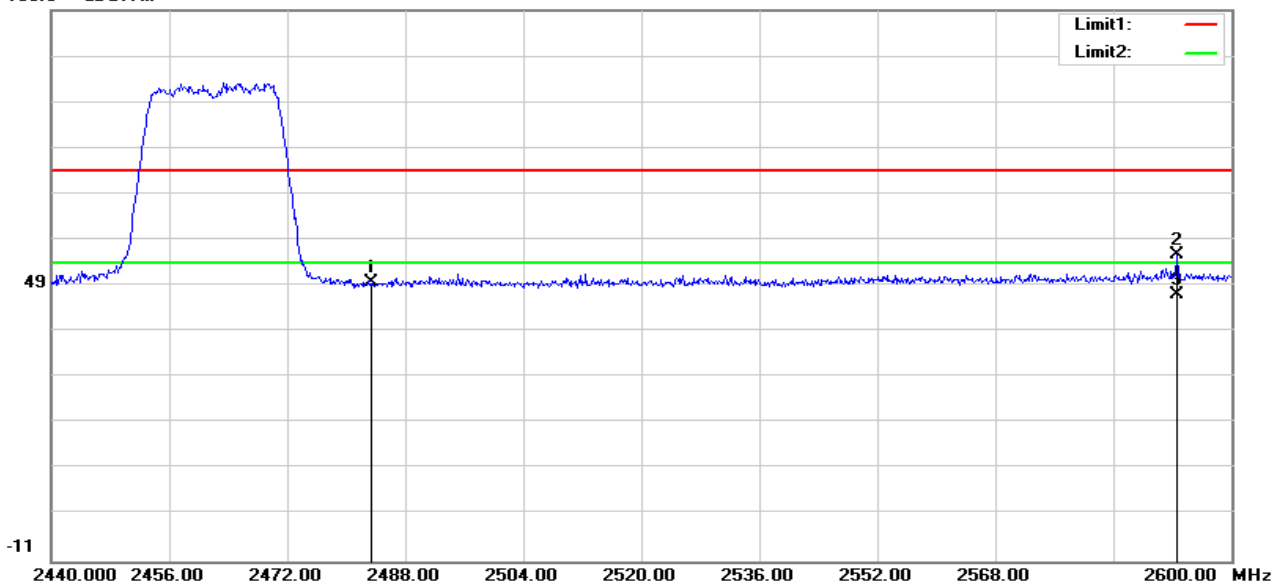

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	56.82	-7.05	49.77	74.00	-24.23	100	272	peak
2	2592.640	61.80	-6.15	55.65	74.00	-18.35	100	164	peak
3	2592.640	53.25	-6.15	47.10	54.00	-6.90	100	164	AVG

**RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, High Channel, Vertical)**


109.0 dBuV/m

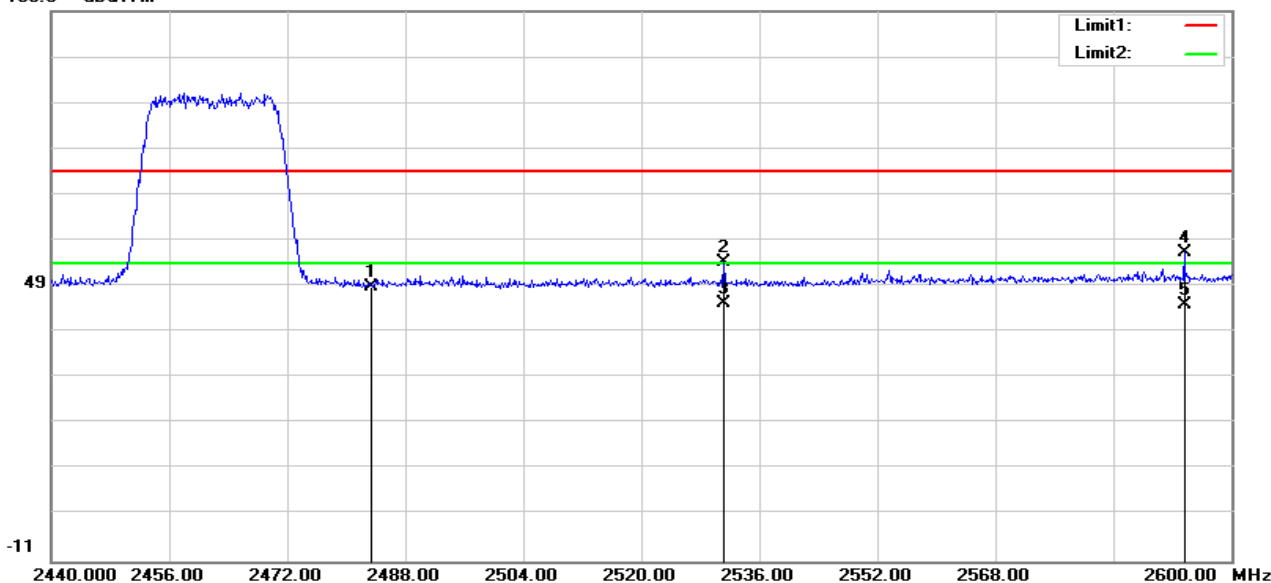

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	56.03	-7.05	48.98	74.00	-25.02	100	359	peak
2	2531.200	60.88	-6.66	54.22	74.00	-19.78	100	189	peak
3	2531.200	51.95	-6.66	45.29	54.00	-8.71	100	189	AVG
4	2593.600	62.48	-6.14	56.34	74.00	-17.66	100	54	peak
5	2593.600	51.01	-6.14	44.87	54.00	-9.13	100	54	AVG

**RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, Low Channel, Horizontal)**


109.0 dBuV/m

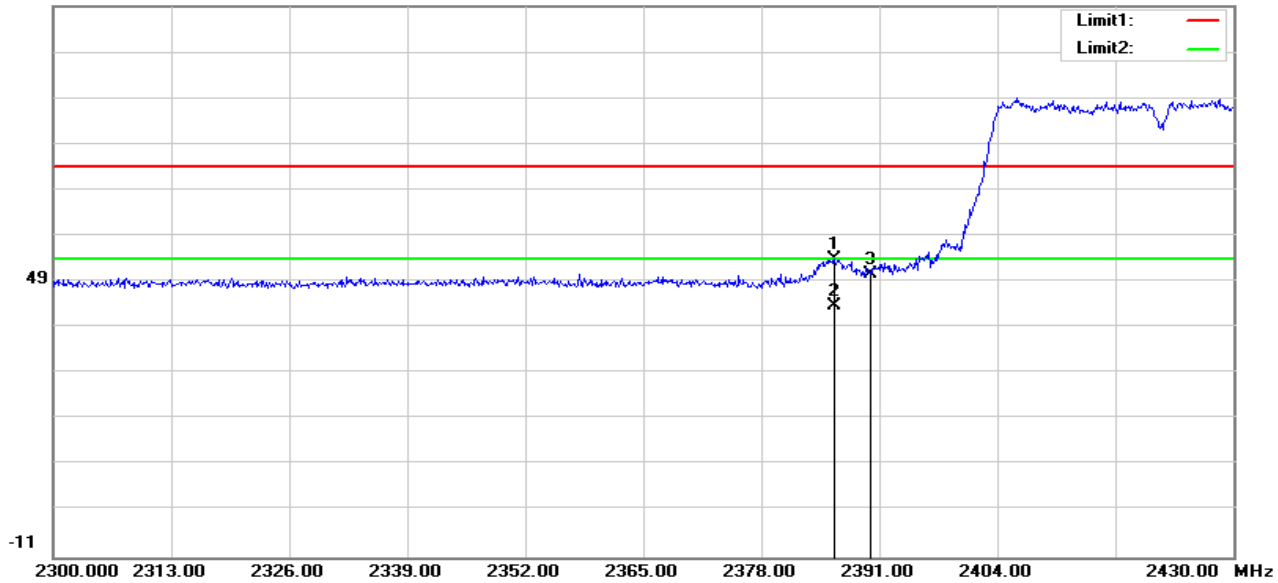

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2386.060	61.88	-7.85	54.03	74.00	-19.97	100	69	peak
2	2386.060	51.44	-7.85	43.59	54.00	-10.41	100	69	AVG
3	2390.000	58.42	-7.82	50.60	74.00	-23.40	100	204	peak

**RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, Low Channel, Vertical)**

109.0 dBuV/m

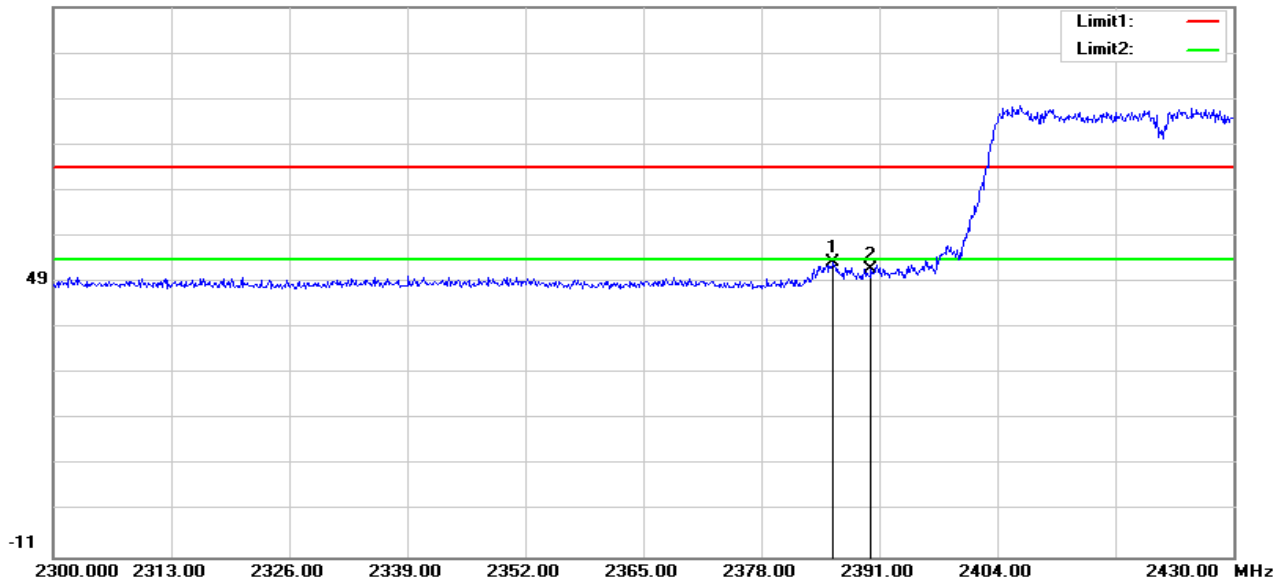


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2385.930	61.29	-7.85	53.44	74.00	-20.56	100	195	peak
2	2390.000	59.69	-7.82	51.87	74.00	-22.13	100	195	peak



**RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, High Channel, Horizontal)**


109.0 dBuV/m

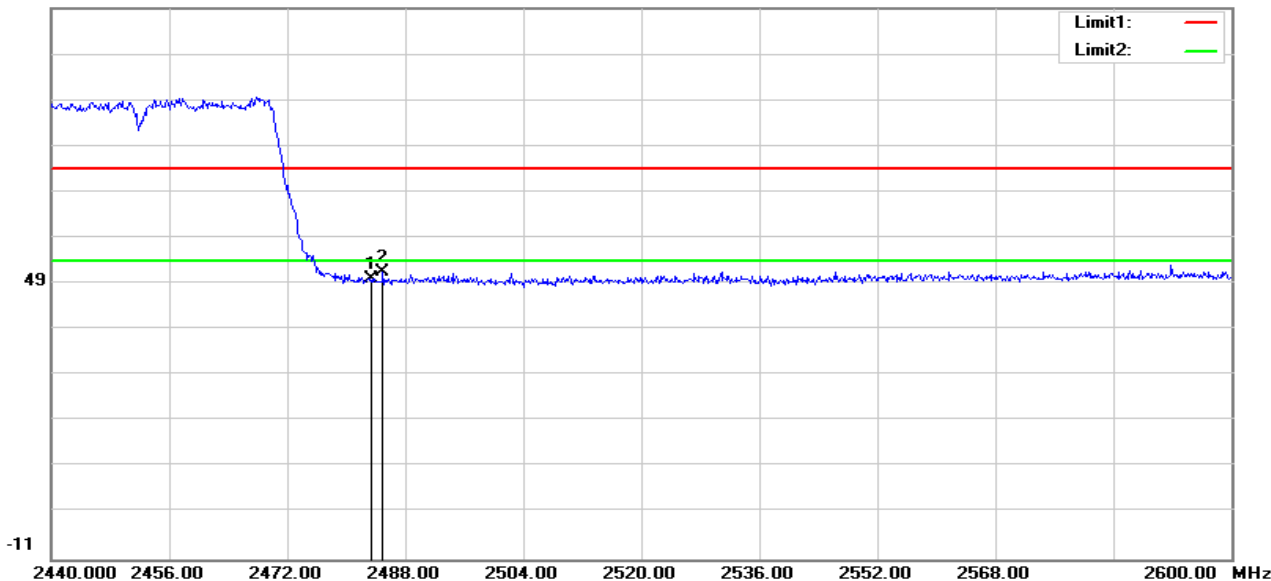

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	57.01	-7.05	49.96	74.00	-24.04	100	26	peak
2	2484.960	58.65	-7.04	51.61	74.00	-22.39	100	26	peak

**RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, High Channel, Vertical)**

109.0 dBuV/m

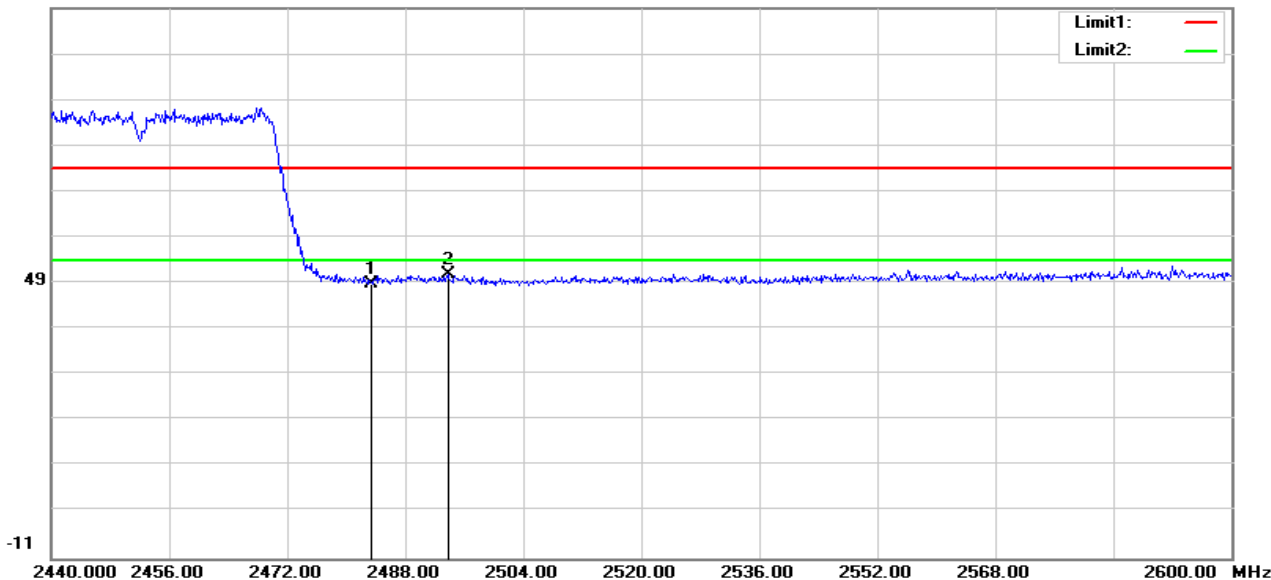

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	56.00	-7.05	48.95	74.00	-25.05	100	76	peak
2	2493.760	57.78	-6.97	50.81	74.00	-23.19	100	144	peak

**Test Result of Radiated Emission****Below 30MHz**

The interference of the frequency value is lower than the limit below 20 db, measured as the background noise values and will not be recorded.

**30MHz-1GHz**

<b>Operation Mode:</b>	Normal Link	<b>Test Date:</b>	2016-12-7
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	48% RH	<b>Polarity:</b>	Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
44.5500	V	20.11	14.47	34.58	40.00	-5.42	peak
224.9700	V	8.97	16.30	25.27	46.00	-20.73	peak
445.1600	V	8.64	20.75	29.39	46.00	-16.61	peak
544.1000	V	7.97	21.55	29.52	46.00	-16.48	peak
841.8900	V	8.56	25.60	34.16	46.00	-11.84	peak
940.8300	V	8.15	26.14	34.29	46.00	-11.71	peak
209.4500	H	10.78	16.24	27.02	43.50	-16.48	peak
233.7000	H	14.04	16.33	30.37	46.00	-15.63	peak
346.2200	H	14.93	18.34	33.27	46.00	-12.73	peak
395.6900	H	11.09	20.22	31.31	46.00	-14.69	peak
544.1000	H	7.54	21.55	29.09	46.00	-16.91	peak
742.9500	H	8.75	24.76	33.51	46.00	-12.49	peak

**Remark:**

1. Measuring frequencies from 30 MHz to the 1GHz (No emission found between lowest internal used/generated frequency to 30 MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

**Above 1 GHz**

**Operation Mode:** TX / IEEE 802.11b / CH Low

**Test Date:** 2016-12-7

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4825.000	72.68	-1.66	71.02	74.00	-2.98	100	229	peak
2	4825.000	54.80	-1.66	53.14	54.00	-0.86	100	229	AVG
3	7239.000	47.97	5.98	53.95	74.00	-20.05	100	243	peak
N/A									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4825.000	68.05	-1.66	66.39	74.00	-7.61	100	3	peak
2	4825.000	48.68	-1.66	47.02	54.00	-6.98	100	3	AVG
3	7239.000	53.05	5.98	59.03	74.00	-14.97	100	337	peak
4	7239.000	40.96	5.98	46.94	54.00	-7.06	100	337	AVG
N/A									

**Operation Mode:** TX / IEEE 802.11b / CH Mid

**Test Date:** 2016-12-7

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4876.000	73.61	-1.52	72.09	74.00	-1.91	100	222	peak
2	4876.000	53.28	-1.52	51.76	54.00	-2.24	100	222	AVG
3	7307.000	43.62	6.09	49.71	74.00	-24.29	100	114	peak
N/A									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4876.000	69.49	-1.52	67.97	74.00	-6.03	100	0	peak
2	4876.000	49.76	-1.52	48.24	54.00	-5.76	100	0	AVG
3	7307.000	46.09	6.09	52.18	74.00	-21.82	100	326	peak
N/A									

**Operation Mode:** TX / IEEE 802.11b / CH High

**Test Date:** 2016-12-7

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

### Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4927.000	70.24	-1.39	68.85	74.00	-5.15	100	236	peak
2	4927.000	54.67	-1.39	53.28	54.00	-0.72	100	207	AVG
3	7392.000	45.73	6.22	51.95	74.00	-22.05	100	94	peak
N/A									

### Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4927.000	68.46	-1.39	67.07	74.00	-6.93	100	4	peak
2	4927.000	51.19	-1.39	49.80	54.00	-4.20	100	4	AVG
3	7392.000	44.58	6.22	50.80	74.00	-23.20	100	353	peak
N/A									

**Operation Mode:** TX / IEEE 802.11g / CH Low

**Test Date:** 2016-12-7

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

### Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4825.000	57.39	-1.66	55.73	74.00	-18.27	100	245	peak
2	4825.492	38.60	-1.66	36.94	54.00	-17.06	100	245	AVG
3	7154.000	43.27	5.85	49.12	74.00	-24.88	100	63	peak
N/A									

### Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4825.000	55.46	-1.66	53.80	74.00	-20.20	100	351	peak
2	6984.000	43.31	5.53	48.84	74.00	-25.16	100	358	peak
N/A									

**Operation Mode:** TX / IEEE 802.11g / CH Mid

**Test Date:** 2016-12-7

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4876.000	57.88	-1.52	56.36	74.00	-17.64	100	270	peak
2	4876.000	37.92	-1.52	36.40	54.00	-17.60	100	270	AVG
3	7001.000	43.33	5.62	48.95	74.00	-25.05	100	81	peak
N/A									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4876.000	54.22	-1.52	52.70	74.00	-21.30	100	27	peak
2	7528.000	42.69	6.42	49.11	74.00	-24.89	100	81	peak
N/A									

**Operation Mode:** TX / IEEE 802.11g / CH High

**Test Date:** 2016-12-7

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4927.000	55.48	-1.39	54.09	74.00	-19.91	100	237	peak
2	7732.000	43.03	6.73	49.76	74.00	-24.24	100	203	peak
N/A									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4910.000	52.75	-1.43	51.32	74.00	-22.68	100	360	peak
2	7086.000	43.49	5.75	49.24	74.00	-24.76	100	218	peak
N/A									

**Operation Mode:** TX / IEEE 802.11n HT20 mode / CH Low

**Test Date:** 2016-12-7

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4825.000	57.70	-1.66	56.04	74.00	-17.96	100	242	peak
2	4825.000	41.67	-1.66	40.01	54.00	-13.99	100	242	AVG
3	7766.000	43.05	6.78	49.83	74.00	-24.17	100	121	peak
N/A									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4825.000	54.59	-1.66	52.93	74.00	-21.07	100	4	peak
2	7239.000	43.34	5.98	49.32	74.00	-24.68	100	218	peak
N/A									

**Operation Mode:** TX / IEEE 802.11n HT20 mode / CH Mid

**Test Date:** 2016-12-7

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4876.000	58.63	-1.52	57.11	74.00	-16.89	100	229	peak
2	4876.000	41.38	-1.52	39.86	54.00	-14.14	100	229	AVG
3	7749.000	42.22	6.76	48.98	74.00	-25.02	100	359	peak
N/A									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4876.000	54.90	-1.52	53.38	74.00	-20.62	100	4	peak
2	7154.000	42.95	5.85	48.80	74.00	-25.20	100	245	peak
N/A									

**Operation Mode:** TX / IEEE 802.11n HT20 mode / CH High    **Test Date:** 2016-12-7

**Temperature:**        24°C

**Tested by:** Lily.Wang

**Humidity:**            48 % RH

**Polarity:** Ver. / Hor.

### Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4927.000	56.01	-1.39	54.62	74.00	-19.38	100	231	peak
2	4927.000	41.38	-1.39	39.99	54.00	-14.01	100	231	AVG
3	7800.000	42.24	6.84	49.08	74.00	-24.92	100	0	peak
N/A									

### Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4927.000	52.48	-1.39	51.09	74.00	-22.91	100	7	peak
2	7171.000	43.24	5.88	49.12	74.00	-24.88	100	182	peak
N/A									

**Operation Mode:** TX / IEEE 802.11n HT40 mode / CH Low

**Test Date:** 2016-12-7

**Temperature:**        24°C

**Tested by:** Lily.Wang

**Humidity:**            48 % RH

**Polarity:** Ver. / Hor.

### Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4842.000	55.97	-1.61	54.36	74.00	-19.64	100	279	peak
2	4842.000	40.23	-1.61	38.62	54.00	-15.38	100	279	AVG
3	7647.000	42.51	6.60	49.11	74.00	-24.89	100	123	peak
N/A									

### Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4842.000	54.11	-1.61	52.50	74.00	-21.50	100	7	peak
2	7732.000	43.63	6.73	50.36	74.00	-23.64	100	249	peak
N/A									

**Operation Mode:** TX / IEEE 802.11n HT40 mode / CH Mid

**Test Date:** 2016-12-7

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4859.000	56.32	-1.57	54.75	74.00	-19.25	100	236	peak
2	4859.000	40.13	-1.57	38.56	54.00	-15.44	100	236	AVG
3	7766.000	43.10	6.78	49.88	74.00	-24.12	100	242	peak
N/A									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4876.000	51.60	-1.52	50.08	74.00	-23.92	100	353	peak
2	7800.000	43.64	6.84	50.48	74.00	-23.52	100	312	peak
N/A									

**Operation Mode:** TX / IEEE 802.11n HT40 mode / CH High **Test Date:** 2016-12-7

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4893.000	56.89	-1.48	55.41	74.00	-18.59	100	230	peak
2	4893.000	40.43	-1.48	38.95	54.00	-15.05	100	230	AVG
3	7783.000	43.19	6.81	50.00	74.00	-24.00	100	0	peak
N/A									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4893.000	50.76	-1.48	49.28	74.00	-24.72	100	3	peak
2	7783.000	42.91	6.81	49.72	74.00	-24.28	100	168	peak
N/A									



## 7.6.POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE


- 1.The EUT was placed on a table, which is 0.8m above ground plane.
- 2.Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3.Repeat above procedures until all frequency measured were complete.

### TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### TEST DATA


Job No.:	C161128R01	Date:	2016-12-11
Model No.:	YY5.2016	Time:	PM 04:01:47
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/41%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L1	Test Voltage:	AC 120V/60Hz
Model:		Description:	

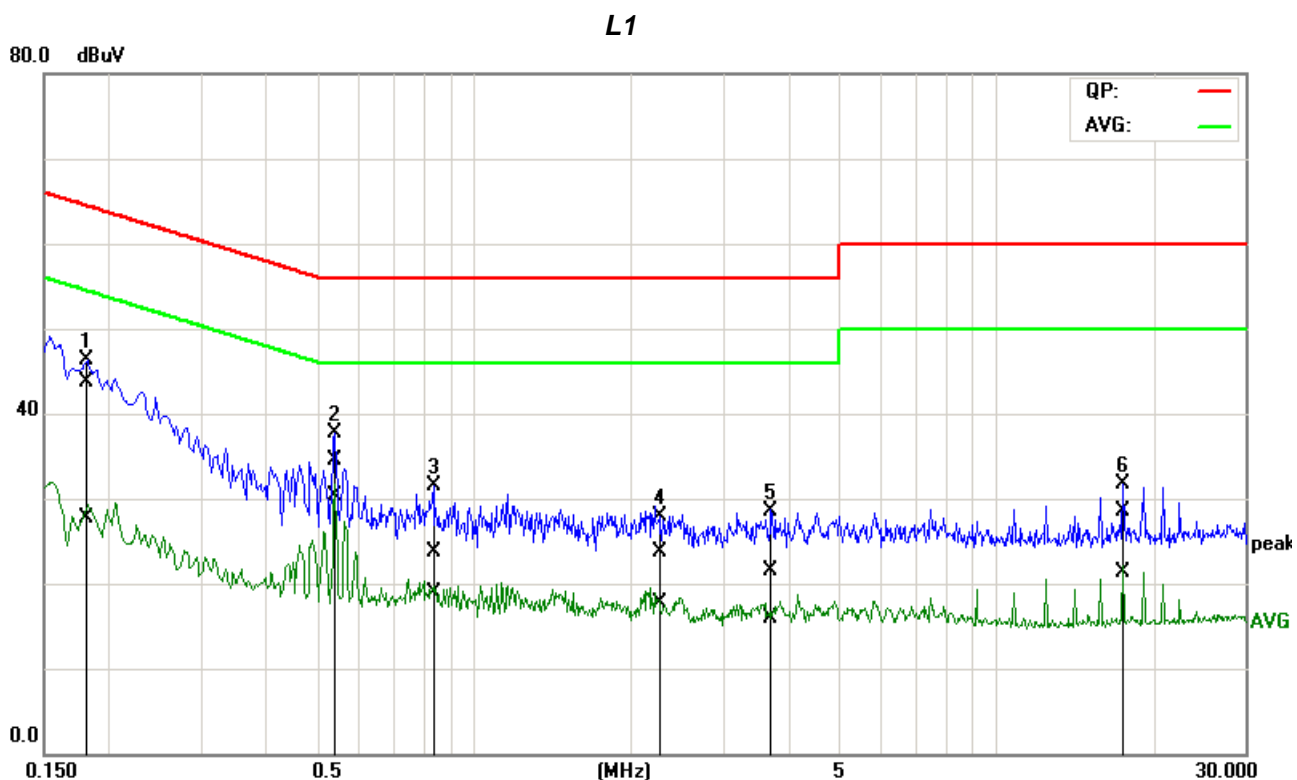

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1813	23.91	7.90	19.79	43.70	27.69	64.43	54.43	-20.73	-26.74	Pass
2*	0.5395	14.79	10.57	19.81	34.60	30.38	56.00	46.00	-21.40	-15.62	Pass
3	0.8248	3.81	-0.95	19.80	23.61	18.85	56.00	46.00	-32.39	-27.15	Pass
4	2.2452	3.88	-2.06	19.85	23.73	17.79	56.00	46.00	-32.27	-28.21	Pass
5	3.6759	1.60	-3.92	19.90	21.50	15.98	56.00	46.00	-34.50	-30.02	Pass
6	17.5014	8.47	1.28	20.07	28.54	21.35	60.00	50.00	-31.46	-28.65	Pass

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Job No.:	C161128R01	Date:	2016-12-11
Model No.:	YY5.2016	Time:	PM 03:57:02
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/41%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L2	Test Voltage:	AC 120V/60Hz
Model:		Description:	

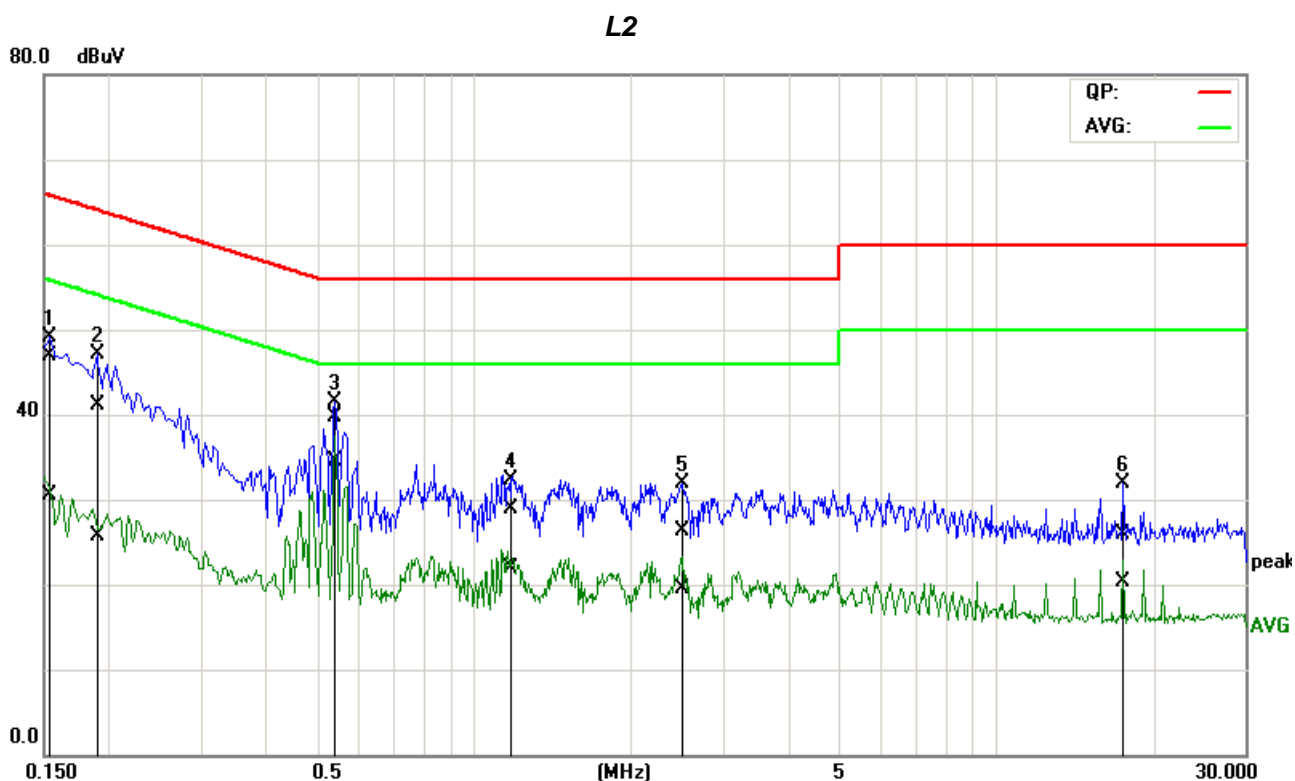


No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1543	27.11	10.83	19.74	46.85	30.57	65.77	55.77	-18.92	-25.20	Pass
2	0.1908	21.39	6.06	19.74	41.13	25.80	64.00	54.00	-22.87	-28.20	Pass
3*	0.5384	20.05	14.81	19.75	39.80	34.56	56.00	46.00	-16.20	-11.44	Pass
4	1.1656	9.15	2.17	19.74	28.89	21.91	56.00	46.00	-27.11	-24.09	Pass
5	2.5122	6.60	-0.30	19.78	26.38	19.48	56.00	46.00	-29.62	-26.52	Pass
6	17.5122	5.52	-0.14	20.36	25.88	20.22	60.00	50.00	-34.12	-29.78	Pass

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Job No.:	C161128R01	Date:	2016-12-11
Model No.:	YY5.2016	Time:	PM 03:44:55
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/41%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L1	Test Voltage:	AC 240V/60Hz
Model:		Description:	


### L1

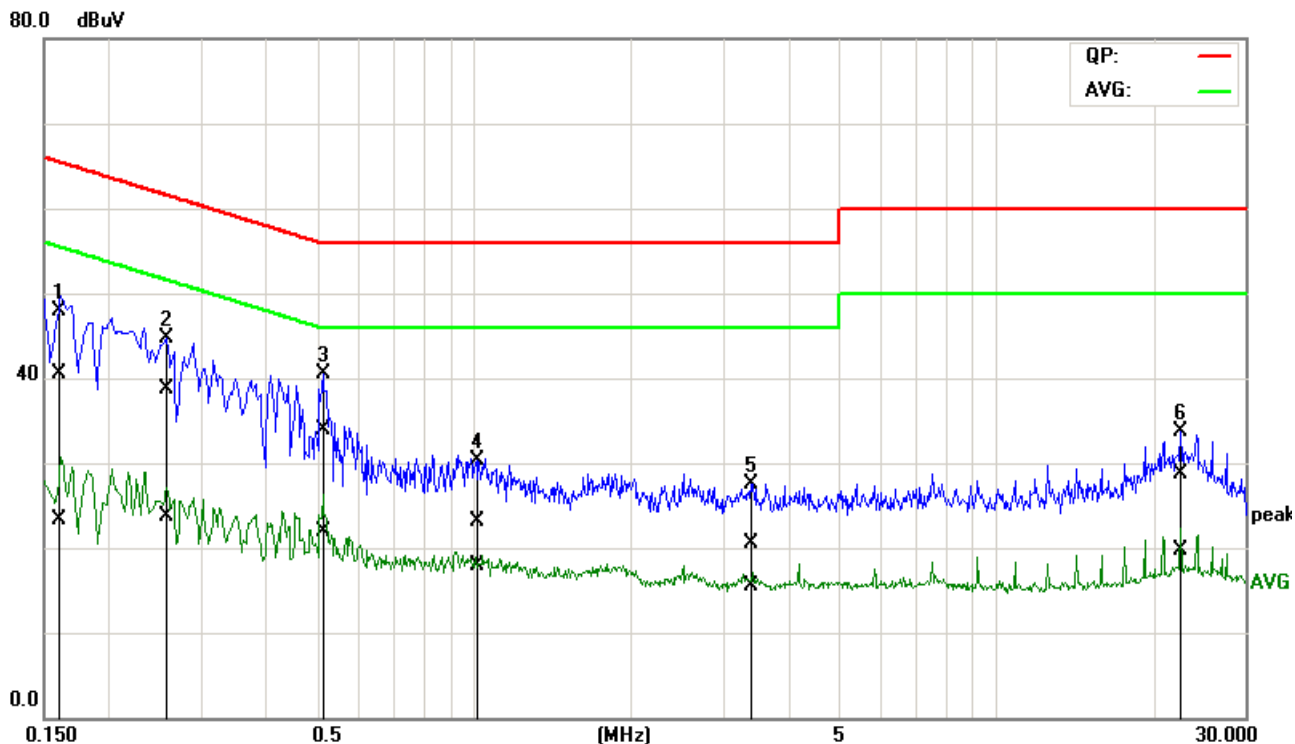

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1580	20.71	3.44	19.79	40.50	23.23	65.57	55.57	-25.07	-32.34	Pass
2	0.2594	18.99	3.99	19.80	38.79	23.79	61.45	51.45	-22.66	-27.66	Pass
3*	0.5125	14.09	2.09	19.81	33.90	21.90	56.00	46.00	-22.10	-24.10	Pass
4	1.0044	3.38	-1.94	19.79	23.17	17.85	56.00	46.00	-32.83	-28.15	Pass
5	3.3945	0.69	-4.32	19.90	20.59	15.58	56.00	46.00	-35.41	-30.42	Pass
6	22.5666	8.49	-0.39	20.15	28.64	19.76	60.00	50.00	-31.36	-30.24	Pass

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Job No.:	C161128R01	Date:	2016-12-11
Model No.:	YY5.2016	Time:	PM 03:51:27
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/41%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L2	Test Voltage:	AC 240V/60Hz
Model:		Description:	

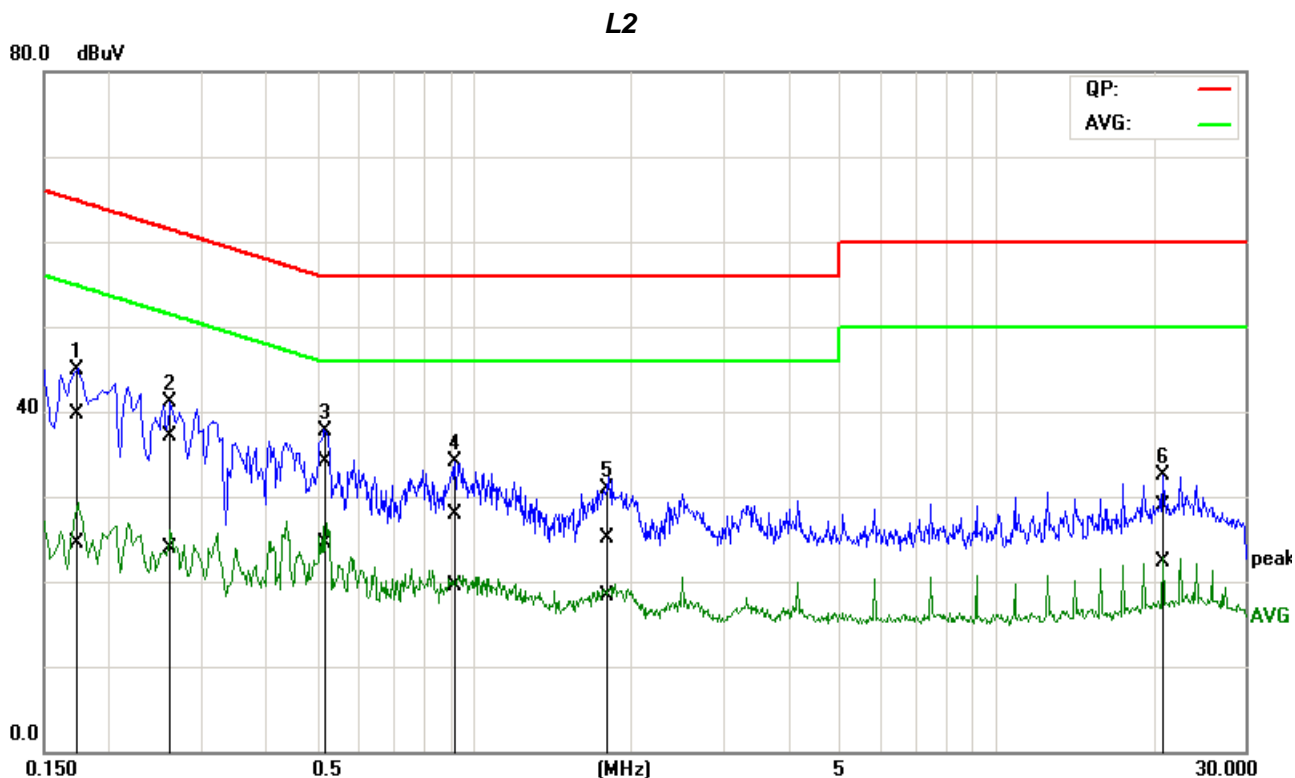

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1708	20.05	4.83	19.74	39.79	24.57	64.92	54.92	-25.13	-30.35	Pass
2	0.2626	17.36	4.23	19.75	37.11	23.98	61.35	51.35	-24.24	-27.37	Pass
3*	0.5214	14.37	4.74	19.75	34.12	24.49	56.00	46.00	-21.88	-21.51	Pass
4	0.9240	8.08	-0.19	19.74	27.82	19.55	56.00	46.00	-28.18	-26.45	Pass
5	1.7667	5.42	-1.38	19.76	25.18	18.38	56.00	46.00	-30.82	-27.62	Pass
6	20.8553	8.44	1.99	20.41	28.85	22.40	60.00	50.00	-31.15	-27.60	Pass

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Remark:

- 1.The measuring frequencies range between 0.15 MHz and 30 MHz.
- 2.The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
- 3.“-” denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
- 4.The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.

**END OF REPORT**