

FCC CERTIFICATION TEST REPORT

FOR

Applicant	:	DongGuan JinWenHua Digital Technology Co., Ltd.
Address	:	No.1 Huada Road, Longbeiling Industry Zone, Tangxia Town, Dongguan City, China
Equipment under Test	:	Portable Wireless Speakers
Model No.	:	C27/Red-E Go, c27a, c27b, c27c, c27w, c27y, c27r, c27g
Trade Mark	:	N/A
FCC ID	:	2AFSG-C27
Manufacturer	:	DongGuan JinWenHua Digital Technology Co., Ltd.
Address	:	No.1 Huada Road, Longbeiling Industry Zone, Tangxia Town, Dongguan City, China

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	6
2.	General Test Information	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT.....	8
2.3.	Assistant equipment used for test.....	8
2.4.	Block diagram of EUT configuration for test	8
2.5.	Deviations of test standard.....	9
2.6.	Test environment conditions	9
2.7.	Test laboratory	9
2.8.	Measurement uncertainty.....	10
3.	Equipment Used During Test.....	11
4.	Maximum Peak Output Power	12
4.1.	Block diagram of test setup.....	12
4.2.	Limits	12
4.3.	Test procedure	12
4.4.	Test result.....	12
4.5.	Original test data	13
5.	20 dB Bandwidth and 99% Bandwidth.....	15
5.1.	Block diagram of test setup.....	15
5.2.	Limits	15
5.3.	Test procedure	15
5.4.	Test result.....	15
5.5.	Original test data	16
6.	Carrier Frequency Separation.....	20
6.1.	Block diagram of test setup.....	20
6.2.	Limits	20
6.3.	Test procedure	20
6.4.	Test result.....	20
6.5.	Original test data	21
7.	Number of Hopping Channel	22
7.1.	Block diagram of test setup.....	22
7.2.	Limits	22
7.3.	Test procedure	22
7.4.	Test result.....	22
7.5.	Original test data	23
8.	Dwell Time.....	24

8.1.	Block diagram of test setup.....	24
8.2.	Limits	24
8.3.	Test procedure	24
8.4.	Test result.....	24
8.5.	Original test data	25
9.	Band Edge Compliance (Conducted Method)	29
9.1.	Block diagram of test setup.....	29
9.2.	Limit.....	29
9.3.	Test result.....	29
9.4.	Original test data	30
10.	Radiated Emission	33
10.1.	Block diagram of test setup.....	33
10.2.	Limit.....	34
10.3.	Test procedure	35
10.4.	Test result.....	37
11.	RF Conducted Spurious Emissions	46
11.1.	Block diagram of test setup.....	46
11.2.	Limits	46
11.3.	Test procedure	46
11.4.	Test result.....	47
11.5.	Original test data	47
12.	Band Edge Compliance (Radiated Method)	54
12.1.	Block diagram of test setup.....	54
12.2.	Limit.....	54
12.3.	Test procedure	54
12.4.	Test result.....	54
13.	Power Line Conducted Emission	63
13.1.	Block diagram of test setup.....	63
13.2.	Power line conducted emission limits	63
13.3.	Test procedure	63
13.4.	Test result.....	64
14.	Antenna Requirements	67
14.1.	Limit.....	67
14.2.	Result	67
15.	Test Setup Photograph	68
16.	Photos of the EUT	70

Test Report Declare

Applicant	:	DongGuan JinWenHua Digital Technology Co., Ltd.
Address	:	No.1 Huada Road, Longbeiling Industry Zone, Tangxia Town, Dongguan City, China
Equipment under Test	:	Portable Wireless Speakers
Model No.	:	C27/Red-E Go, c27a, c27b, c27c, c27w, c27y, c27r, c27g
Trade Mark	:	N/A
Manufacturer	:	DongGuan JinWenHua Digital Technology Co., Ltd.
Address	:	No.1 Huada Road, Longbeiling Industry Zone, Tangxia Town, Dongguan City, China

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C.

Test Procedure Used:

ANSI C63.10:2013.

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No.:	DDT-RE23061523-2E01		
Date of Receipt:	Jul. 03, 2023	Date of Test:	Jul. 03, 2023 ~ Aug. 07, 2023

Prepared By:

Jacky Huang

Jacky Huang/Engineer

Approved By:

Damon Hu

Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Aug. 07, 2023	

1. Summary of Test Results

Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10:2013	Pass
20 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.215 ANSI C63.10:2013	Pass
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10:2013	Pass
Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2013	Pass
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2013	Pass
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10:2013	Pass
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10:2013	Pass
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10:2013	Pass
Antenna Requirement	FCC Part 15: 15.203	Pass

2. General Test Information

2.1. Description of EUT

EUT Name	: Portable Wireless Speakers
Model Number	: C27/Red-E Go, c27a, c27b, c27c, c27w, c27y, c27r, c27g
Model difference	: All models are identical except the Bluetooth name and model number, therefore the test performed on the model C27/Red-E Go.
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 5V by Type-C port : DC 3.7V Polymer Li-ion built-in battery
Radio Specification	: Bluetooth V5.3
Operation Frequency	: 2402 MHz - 2480 MHz
Modulation	: GFSK, $\pi/4$ -DQPSK
Data Rate	: 1 Mbps, 2 Mbps
Antenna	: PCB antenna, maximum PK gain: -0.58 dBi
Sample Number	: S23061523-06 for conductive, S23061523-07 for radiation

Note: EUT is the abbreviation of equipment under test.

Channel Information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		


2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Serial No.	Other
Aux cable	N/A	N/A	N/A	Length: 0.54m, unshielded
Type-C cable	N/A	N/A	N/A	Length: 0.56m, unshielded

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	Remark
AC Adapter	SAMSUNG	EP-TA200	N/A	Input: 100-240~, 50/60Hz, 0.5A; Output: 9V/1.67A or 5V/2A
Laptop	Lenovo	X201	00154-290 -415-484	N/A

2.4. Block diagram of EUT configuration for test

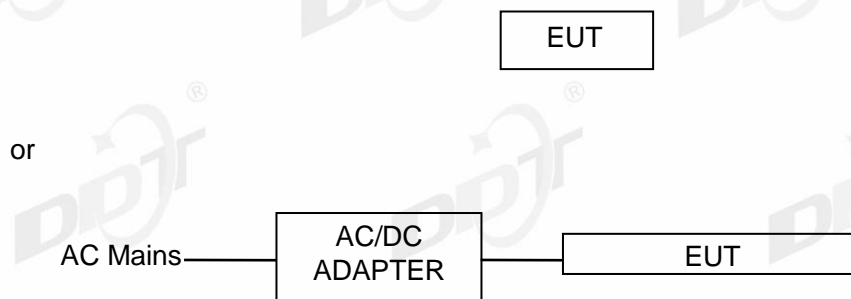

Test software: FCC_Test_Tools_V2.22.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK hopping on Tx mode	10	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	10	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	10	CH0	2402
	10	CH39	2441
	10	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	10	CH0	2402
	10	CH39	2441
	10	CH78	2480

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum Analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 x 10 ⁻⁸ (Antenna couple method)
	5.5 x 10 ⁻⁸ (Conducted method)
Conducted Spurious Emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.40 dB (3.6 GHz ≤ f < 8 GHz)
	1.66 dB (8 GHz ≤ f < 22 GHz)
Uncertainty for Radio Frequency (RBW < 20 kHz)	3x10 ⁻⁸
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission Test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission Test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission Test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power Line Conduction Emission Test	3.32 dB (150 kHz - 30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☑RF Connected Test (Tonscend RF Measurement System 3#)					
Signal &Spectrum analyzer	R&S	FSV40	101407	Jun. 12, 2023	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Apr. 27, 2023	1 Year
EXG Analog Signal Generator	KEYSIGHT	N5173B	MY62153058	Aug. 26, 2022	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	Apr. 23, 2023	1 Year
RF Control Unit	Tonscend	JS0806-2	20C8060230	Apr. 27, 2023	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	May 15, 2023	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.3.2.22	N/A	N/A
☑Radiation 3#chamber					
EMI Test Receiver	R&S	ESU26	100472	Apr. 23, 2023	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Apr. 23, 2023	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 29, 2022	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	Jul. 22, 2022 Jul. 12, 2023	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120 D	02468	Sep. 29, 2022	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	Apr. 26, 2023	1 Year
Pre-amplifier	COM-POWER	PAM-118A	18040084	Aug.17, 2022	1 Year
Pre-amplifier	COM-POWER	PAM-840A	461369	Apr. 27, 2023	1 Year
RE Cable	N/A	W23.02 CP1-X2 + W23.09 AP1-X8+ JCT26S-NJ-NJ-1.5M	4.5M+8M+1.5M	Apr. 21, 2023	1 Year
RF Cable	Yuhu Technology	JCTB810-NJ-NJ-9M+ ZT26S-SMAJ-SMAJ-1M	21123964	Apr. 23, 2023	1 Year
Micro-Tronics filters	REBES	BRM50702	G555	N/A	N/A
Micro-Tronics filters	REBES	BRM50716	G392	N/A	N/A
High Pass filter	XB	XBLBQ-GTA67	210820-2-3	N/A	N/A
Test software	Tonscend	JS32-RE	V 5.0.0.1	N/A	N/A
☑Power Line Conducted Emissions Test 1#					
Test Receiver	R&S	ESCI	100551	Aug. 26, 2022	1 Year
LISN 1	R&S	ENV216	101109	Aug. 26, 2022	1 Year
LISN 2	R&S	ESH2-Z5	100309	Aug. 26, 2022	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Aug. 26, 2022	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Aug. 26, 2022	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
Test Receiver	R&S	ESCI	100551	Aug. 26, 2022	1 Year

4. Maximum Peak Output Power

4.1. Block diagram of test setup

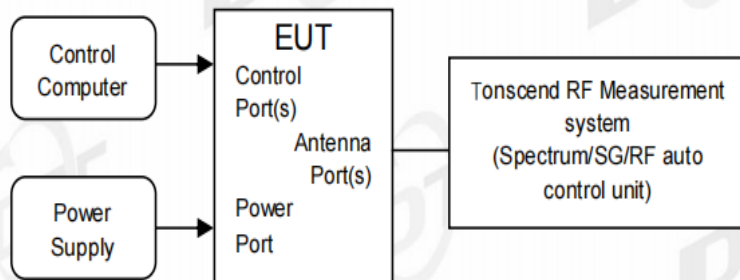

4.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4 W.

4.3. Test procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Measure the maximum output power of EUT by spectrum analyzer with PK detector and RBW = 3 MHz (above 20 dB bandwidth of measured signal), VBW = 10 MHz




Note: The attenuator loss was inputted into spectrum analyzer as amplitude offset.

4.4. Test result

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
DH5	Ant1	2402	-3.03	≤20.97	-3.61	≤36	PASS
		2441	-2.64	≤20.97	-3.22	≤36	PASS
		2480	-2.60	≤20.97	-3.18	≤36	PASS
2DH5	Ant1	2402	-2.10	≤20.97	-2.68	≤36	PASS
		2441	-1.70	≤20.97	-2.28	≤36	PASS
		2480	-1.67	≤20.97	-2.25	≤36	PASS

4.5. Original test data

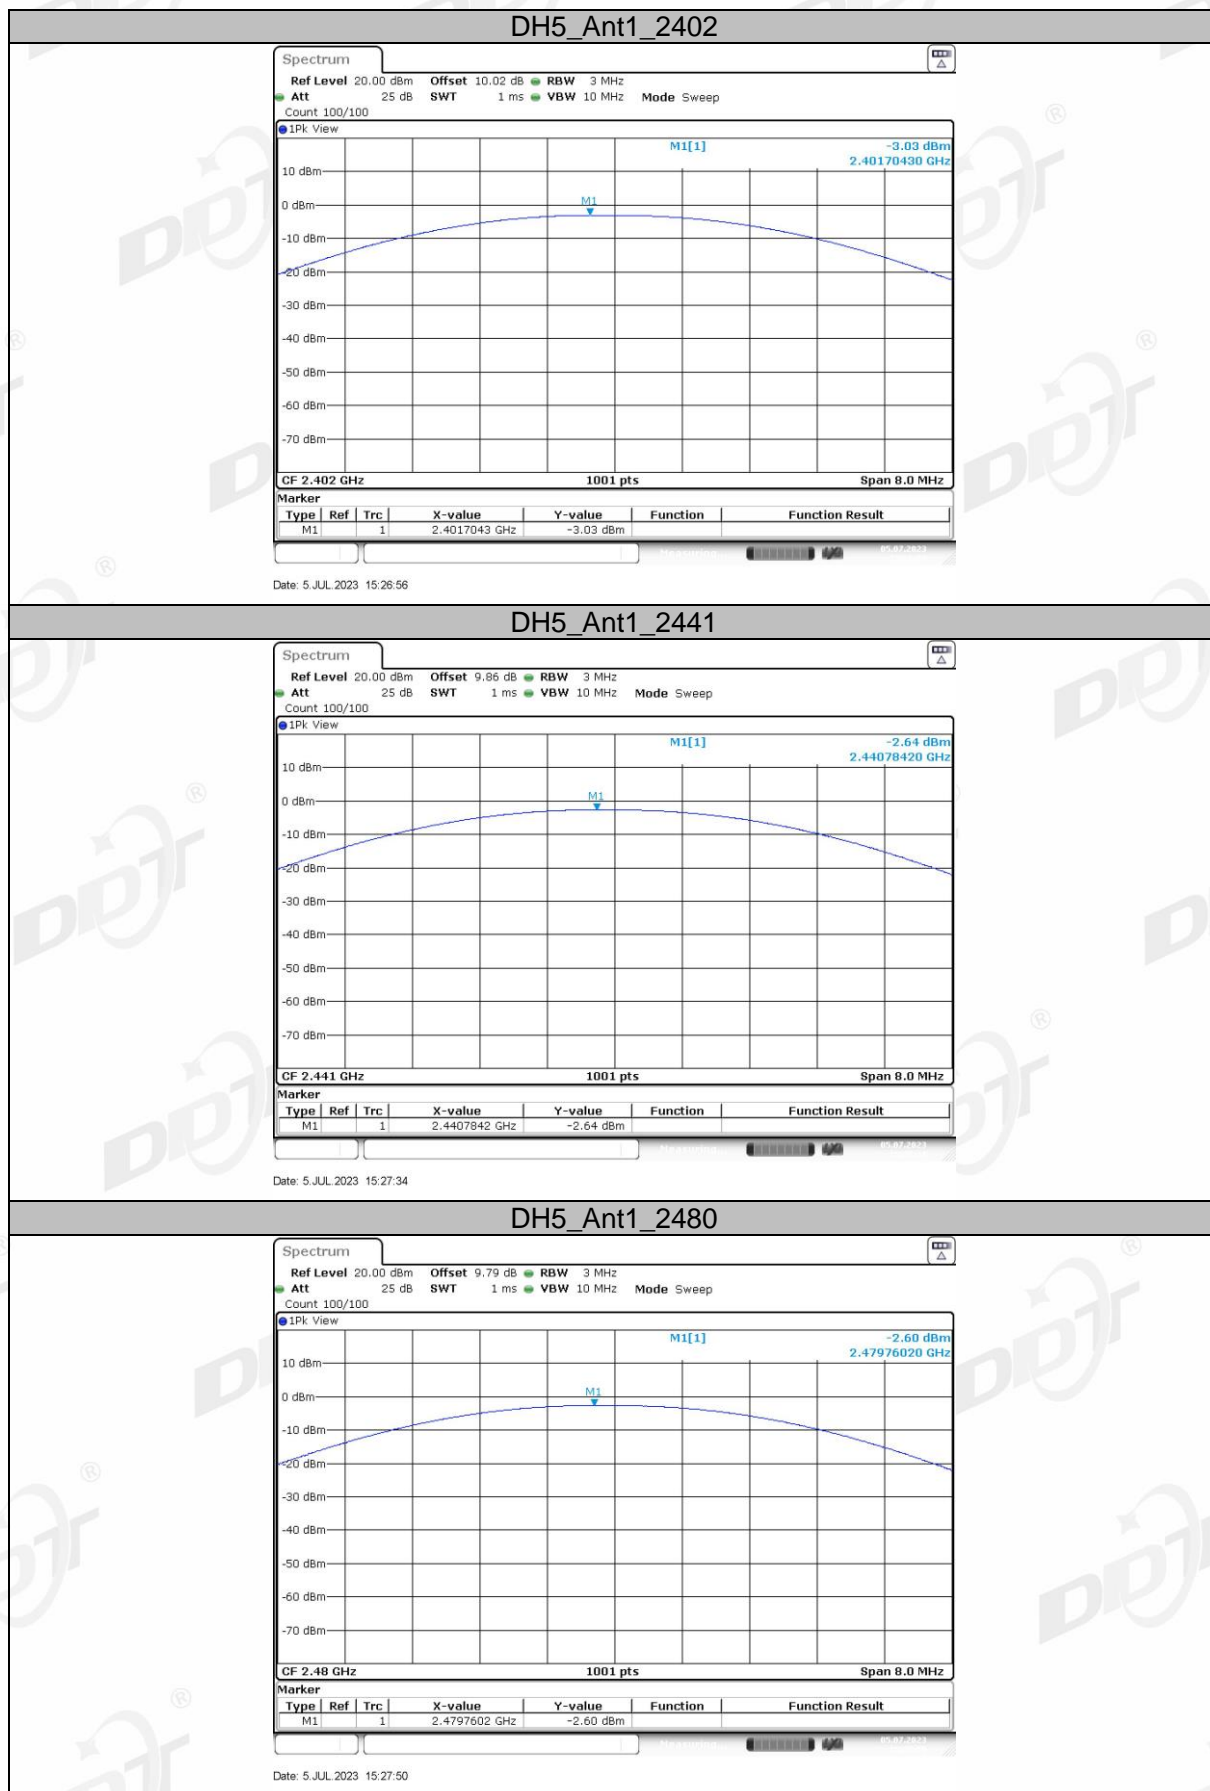

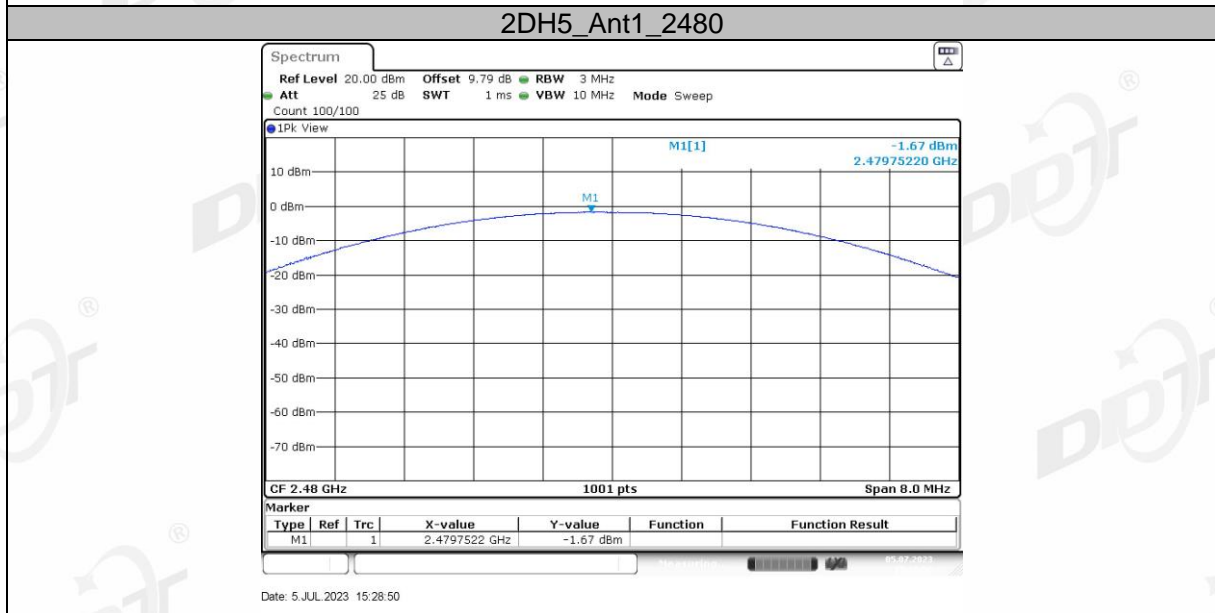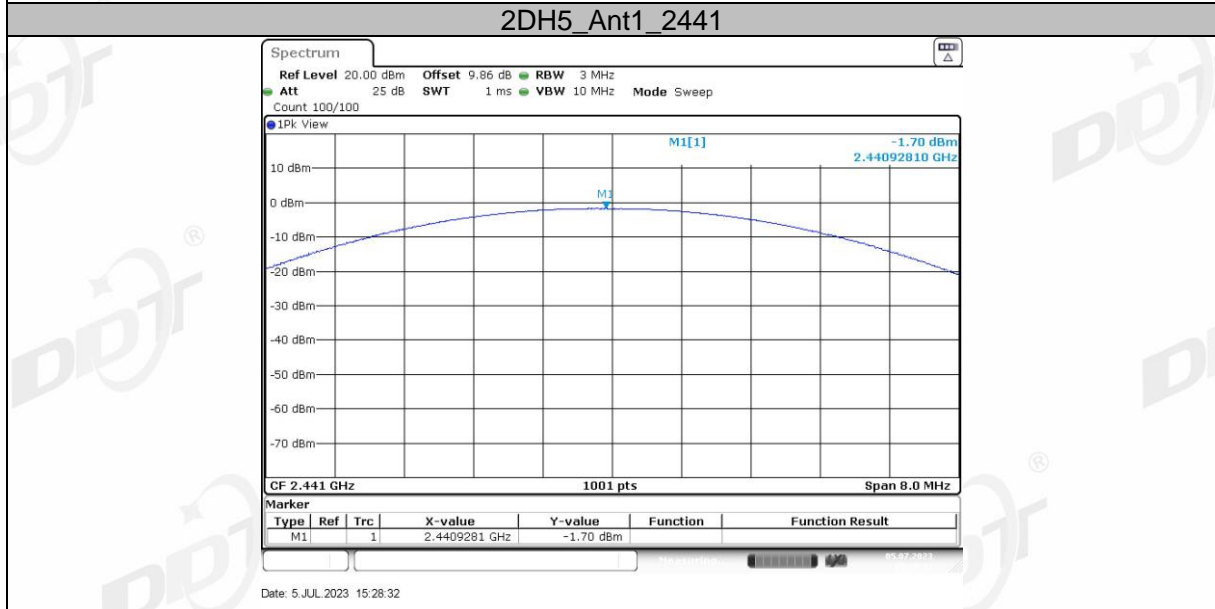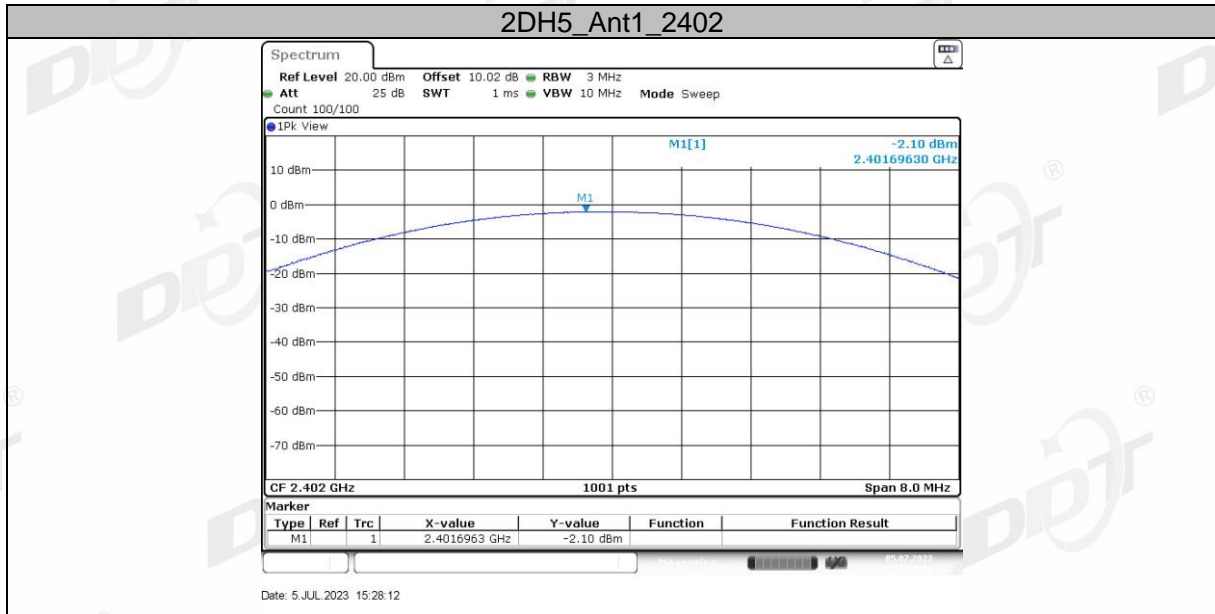

5. 20 dB Bandwidth and 99% Bandwidth

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

5.3. Test procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 kHz RBW and 100 kHz VBW. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.




5.4. Test result

Mode	Frequency (MHz)	20 dB bandwidth Result (MHz)	99% bandwidth Result (MHz)	Verdict
GFSK	2402	0.948	0.860	Pass
	2441	0.948	0.860	Pass
	2480	0.945	0.860	Pass
$\pi/4$ -DQPSK	2402	1.287	1.169	Pass
	2441	1.284	1.169	Pass
	2480	1.287	1.169	Pass




5.5. Original test data




20 dB bandwidth:

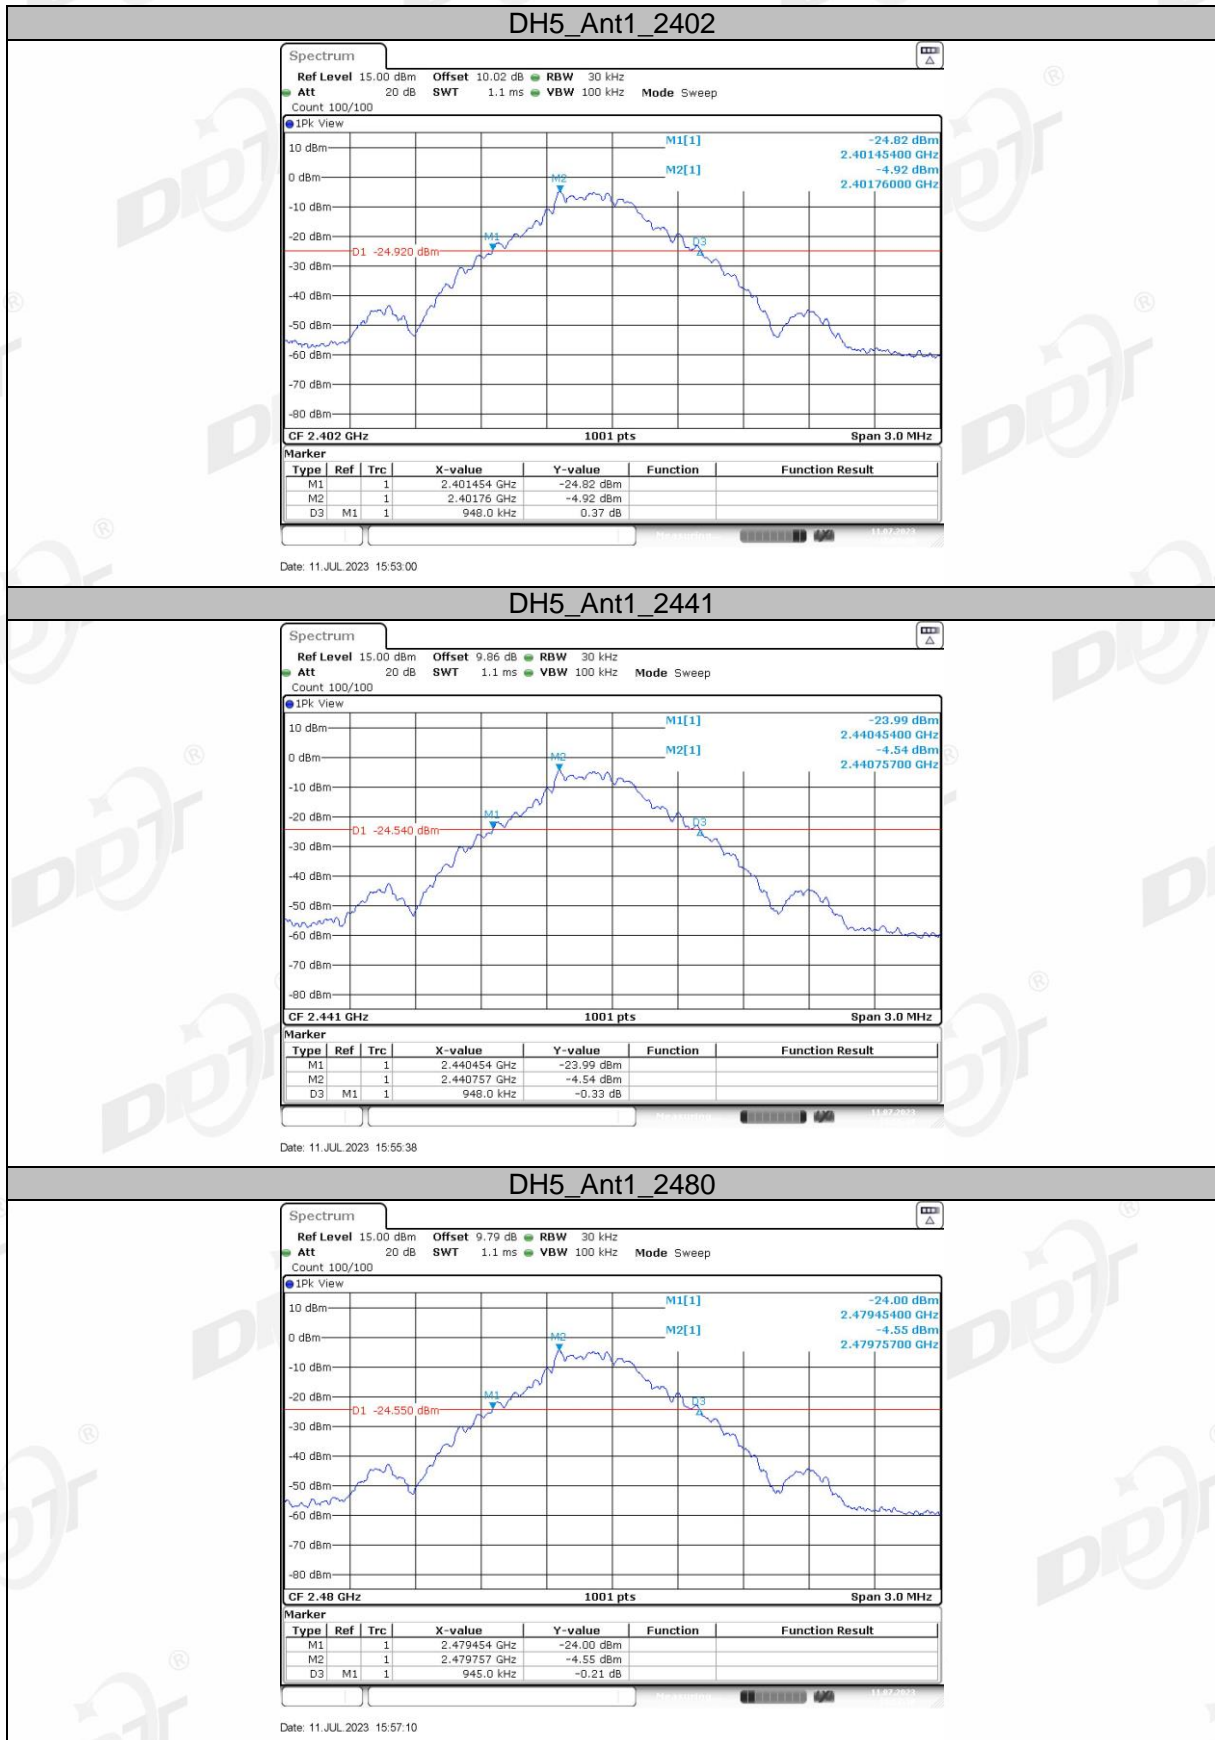

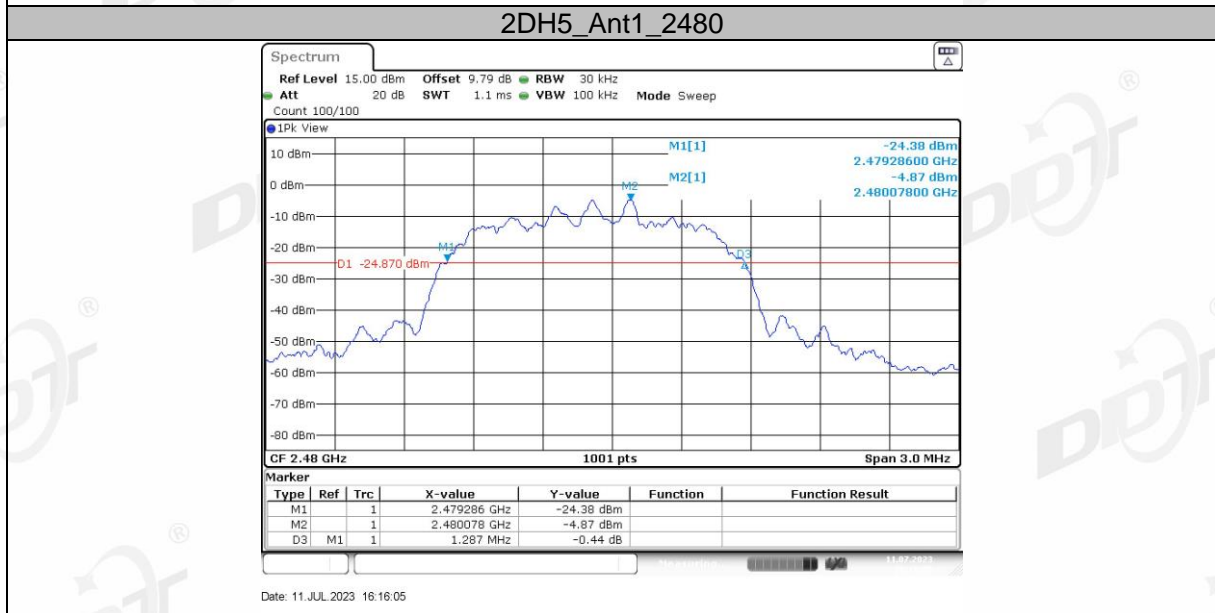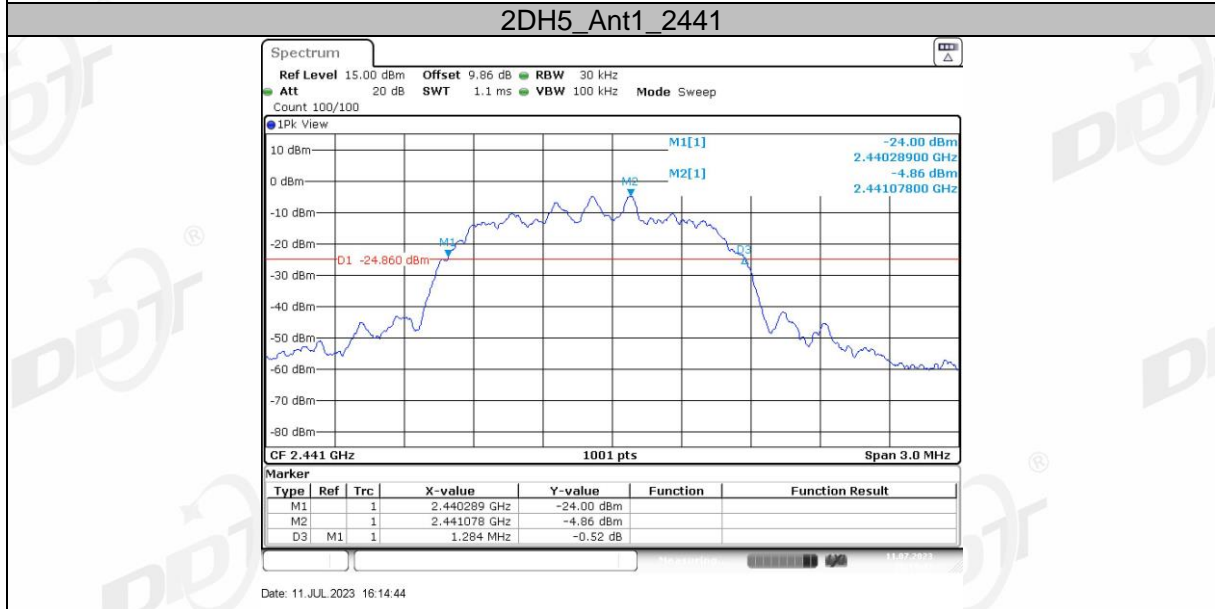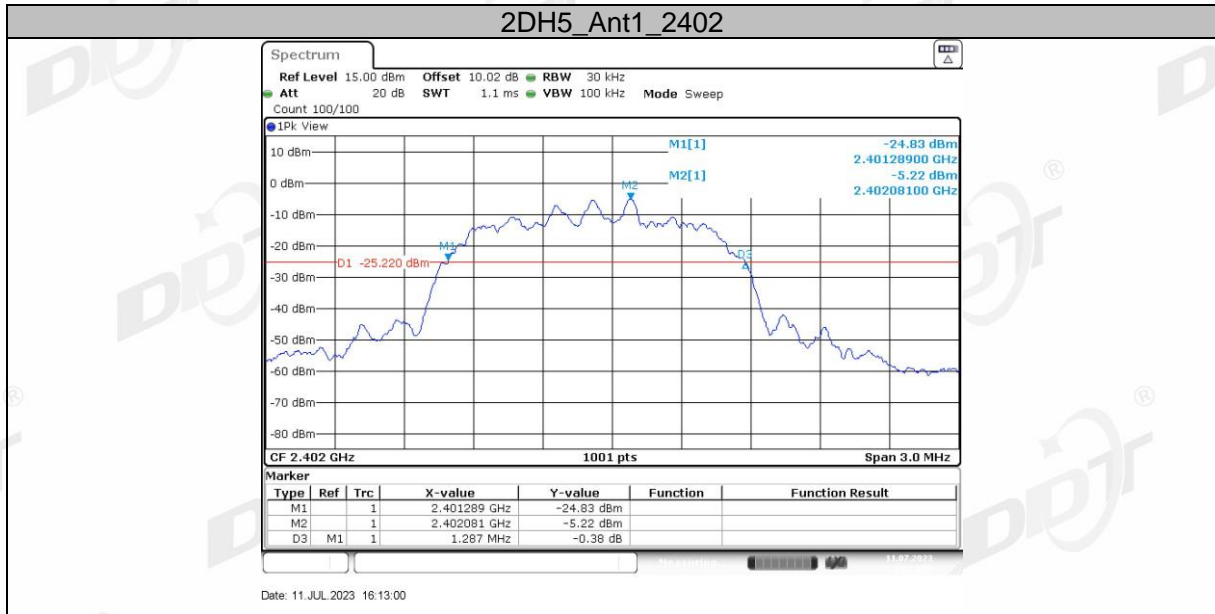

99% bandwidth:

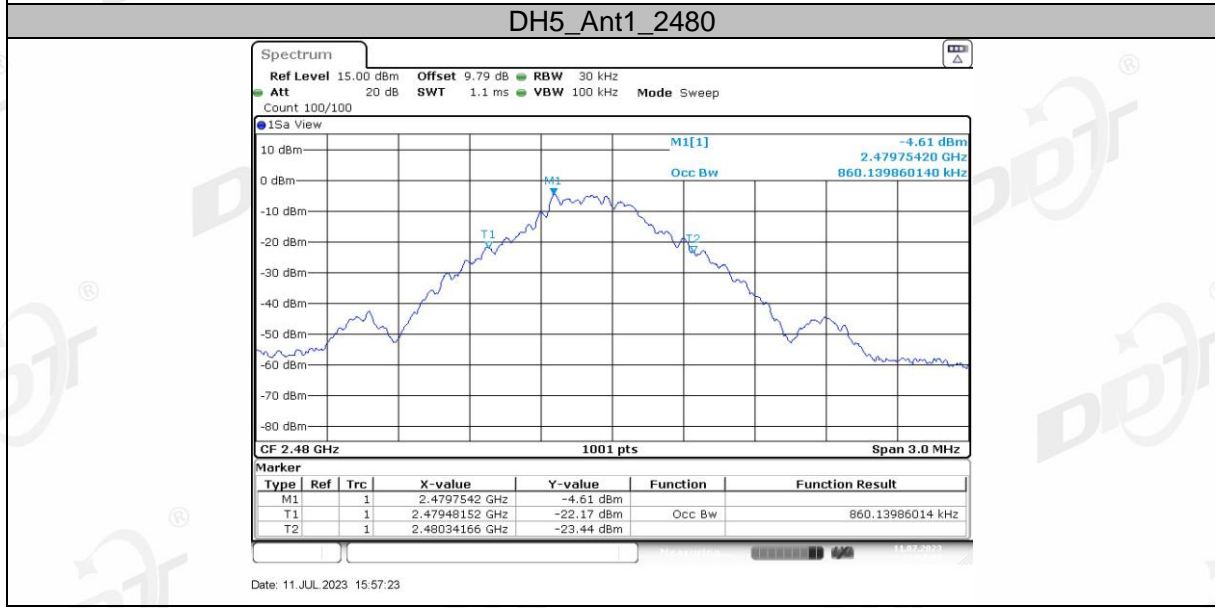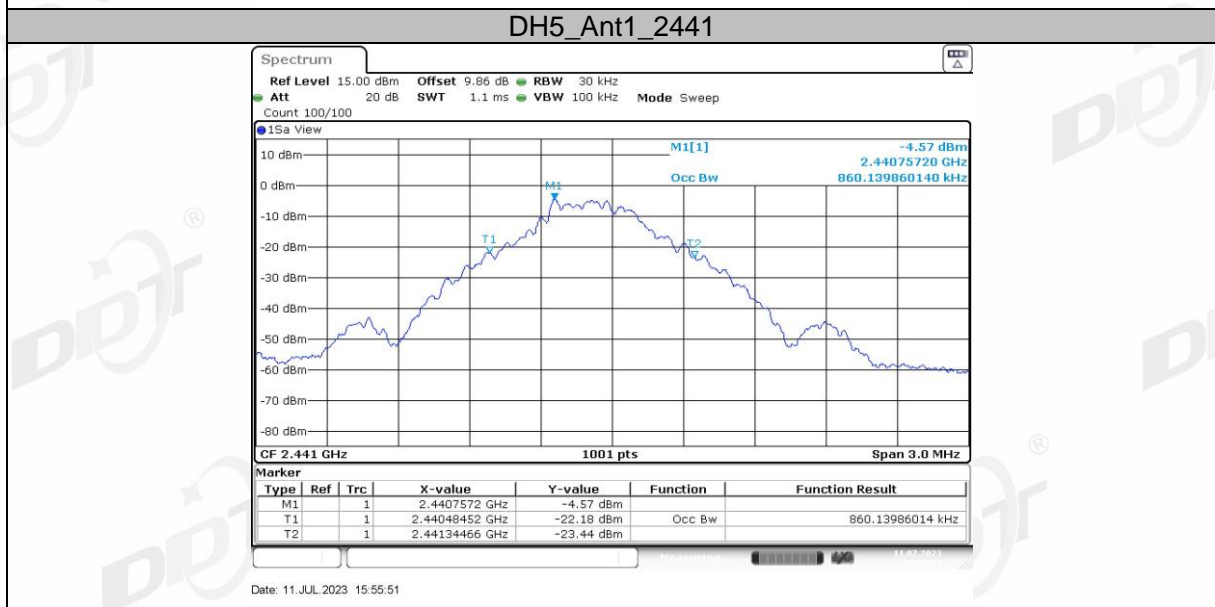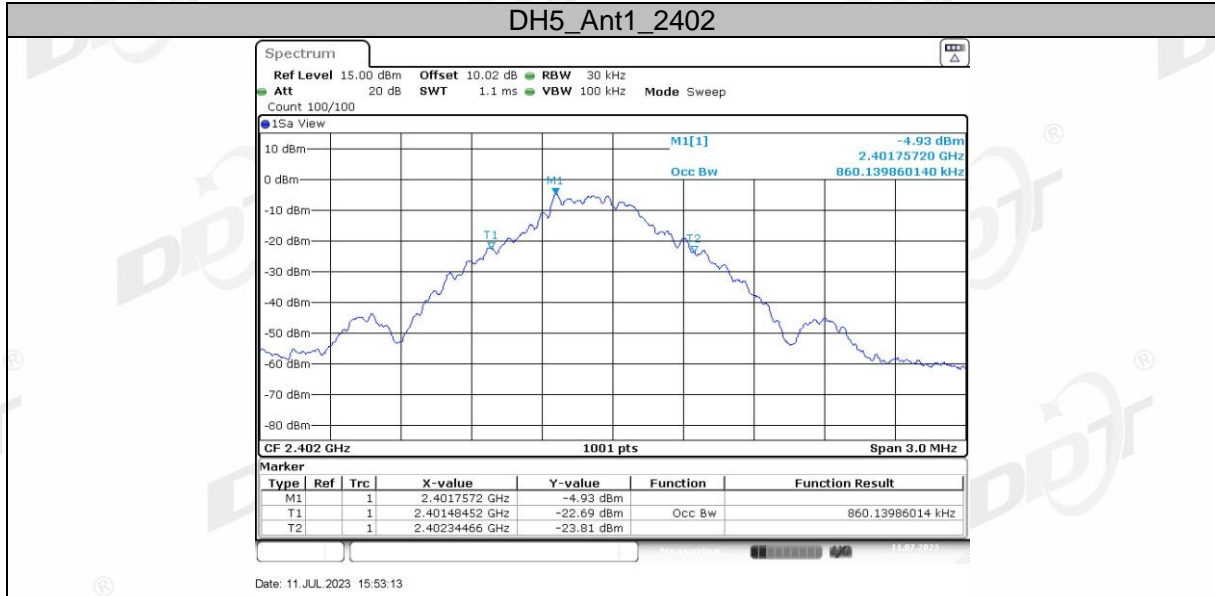

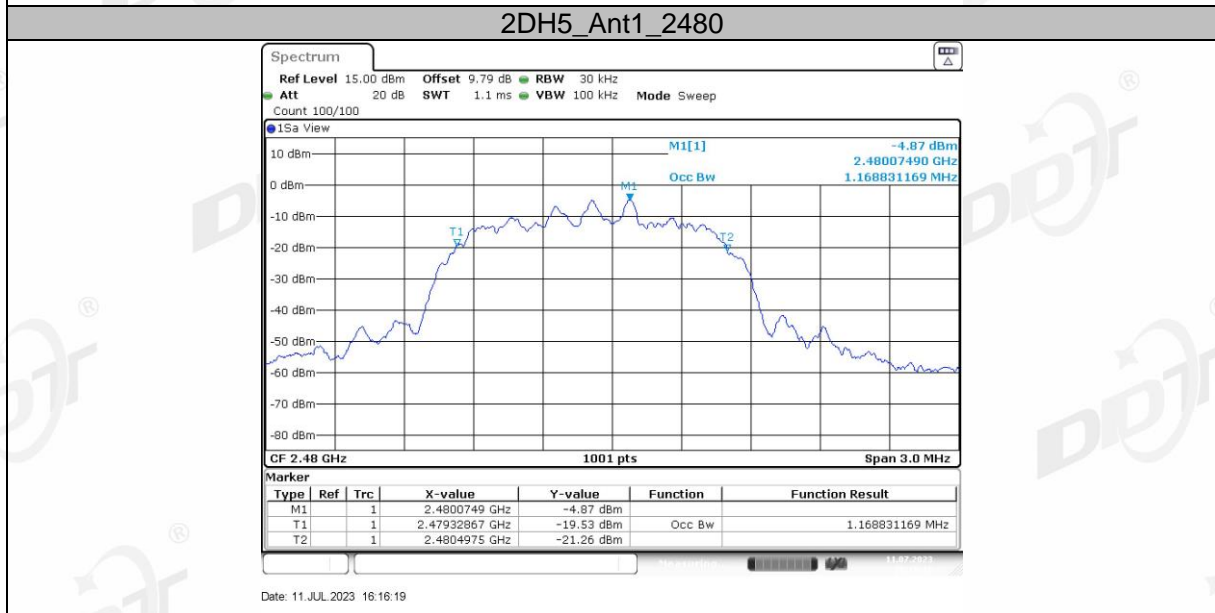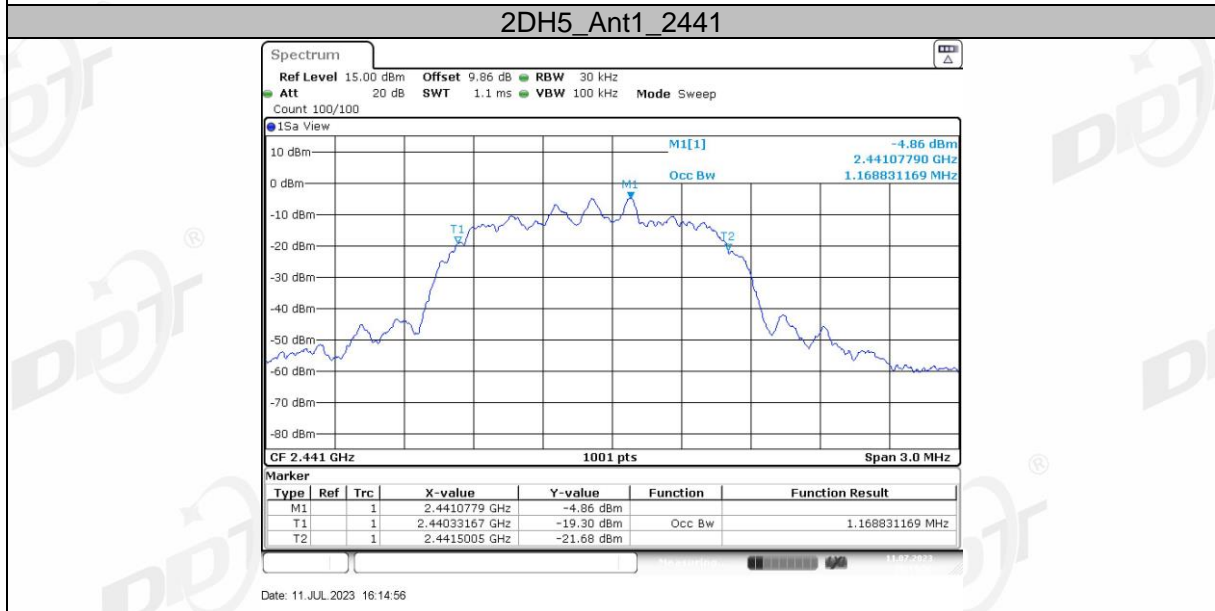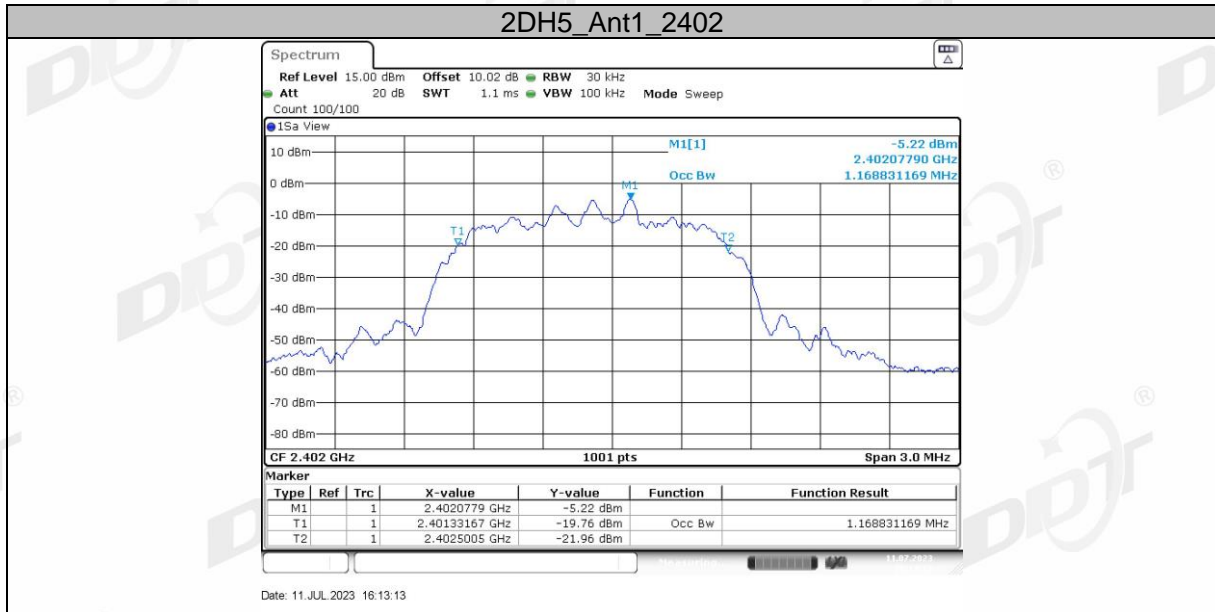

6. Carrier Frequency Separation

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

6.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The carrier frequency was measured by spectrum analyzer with 300 kHz RBW and 300 kHz VBW.

6.4. Test result


Mode	Channel separation (MHz)	20 dB bandwidth (MHz) (Worse case)	Limit (MHz) 2/3 of 20 dB bandwidth	Verdict
GFSK	0.997	0.948	≥0.632	Pass
$\pi/4$ -DQPSK	1.000	1.287	≥0.858	Pass

6.5. Original test data



7. Number of Hopping Channel

7.1. Block diagram of test setup

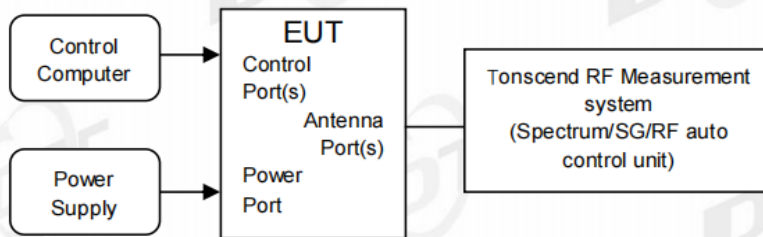

7.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

7.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The number of hopping channels was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

7.4. Test result


Mode	Number of hopping channels	Limit	Verdict
GFSK	79	>15	Pass
$\pi/4$ -DQPSK	79	>15	Pass

7.5. Original test data



8. Dwell Time

8.1. Block diagram of test setup

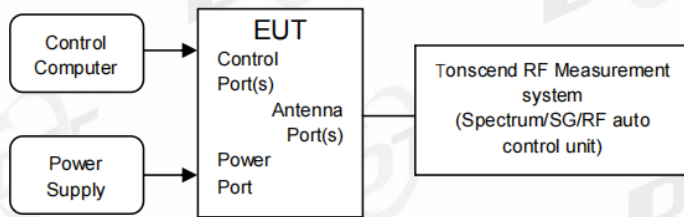

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (3) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula $\text{Dwell time} = \text{total hops} \times \text{pulse's on time}$.


8.4. Test result

Mode	Dwell time (s)	Pulse's on time (ms)	Total hops	Limit	Verdict
DH1	0.112	0.350	320	<400ms	Pass
DH3	0.253	1.610	157	<400ms	Pass
DH5	0.316	2.870	110	<400ms	Pass
2DH1	0.118	0.370	320	<400ms	Pass
2DH3	0.264	1.630	162	<400ms	Pass
2DH5	0.31	2.870	108	<400ms	Pass



Note: $\text{Dwell time} = \text{total hops} \times \text{pulse's on time}$.




8.5. Original test data

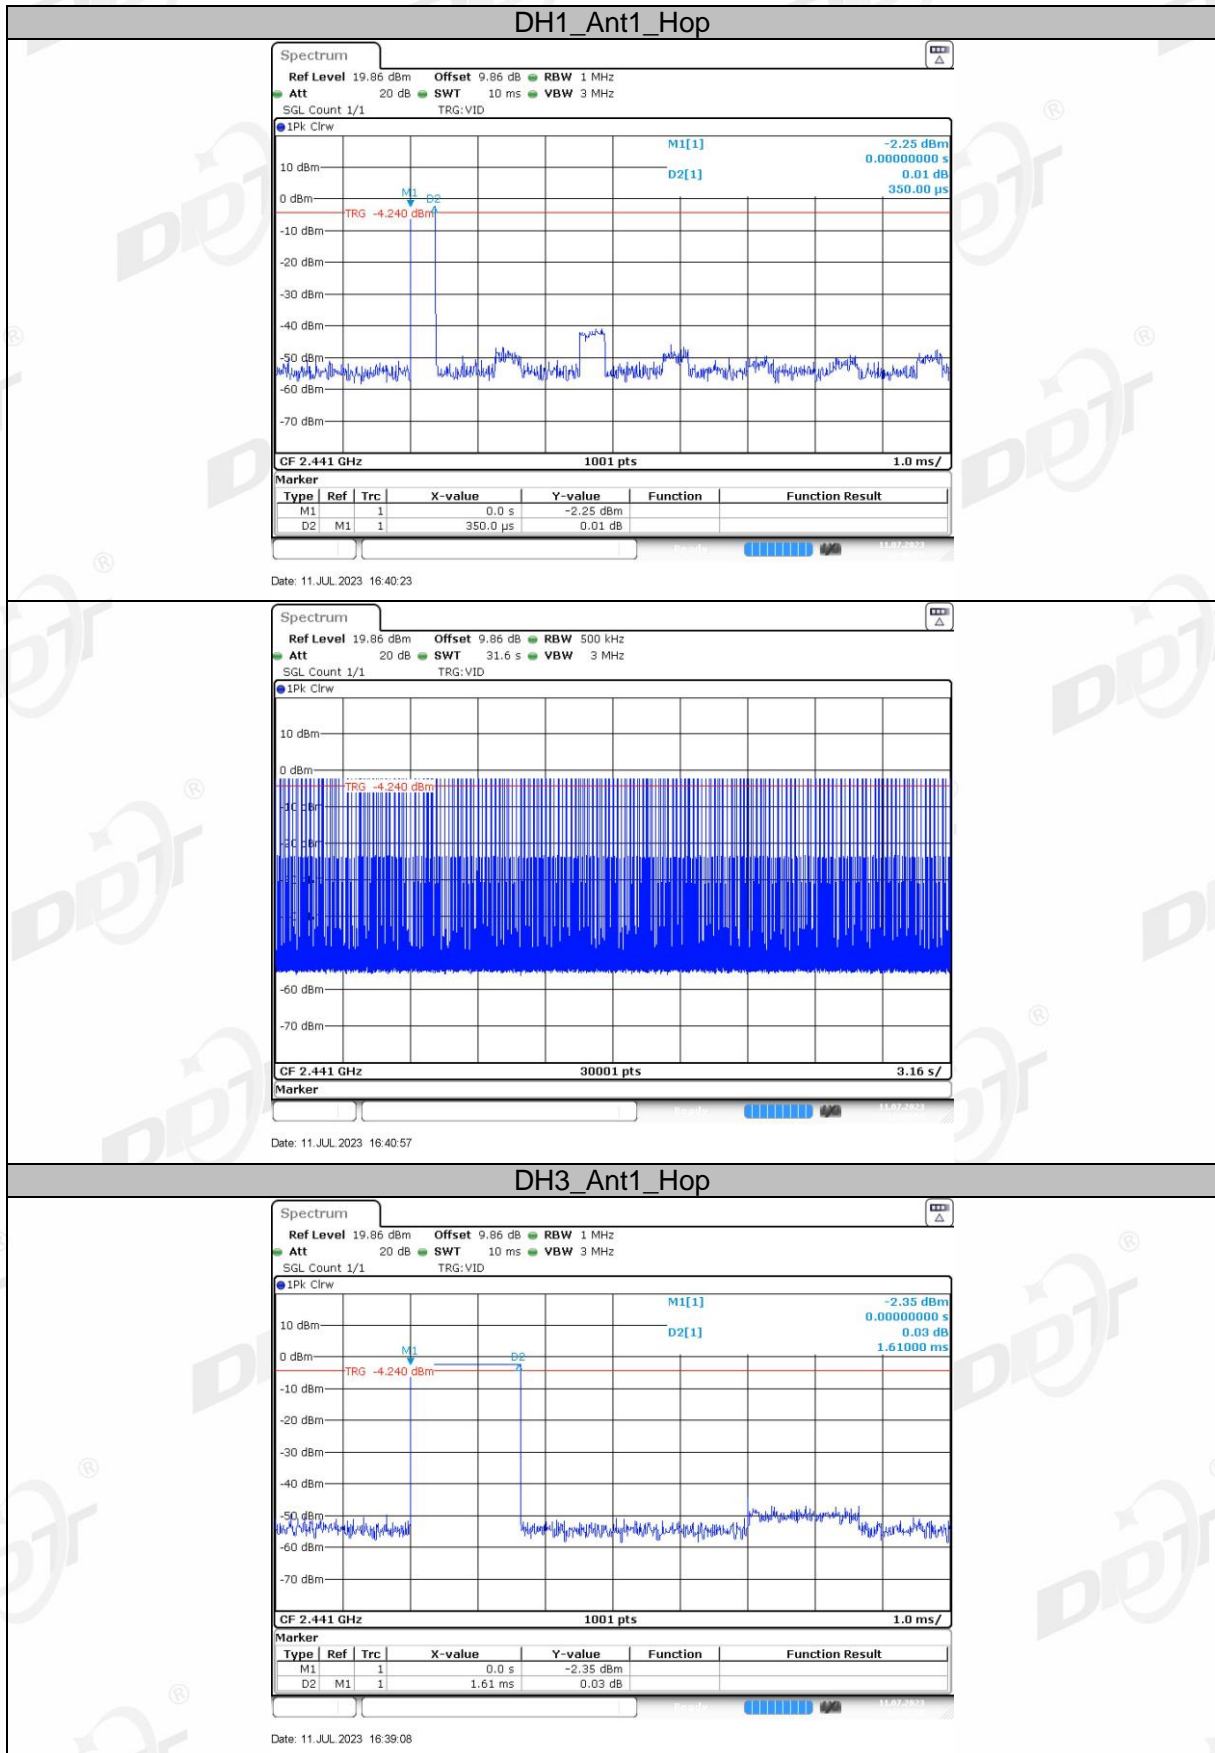


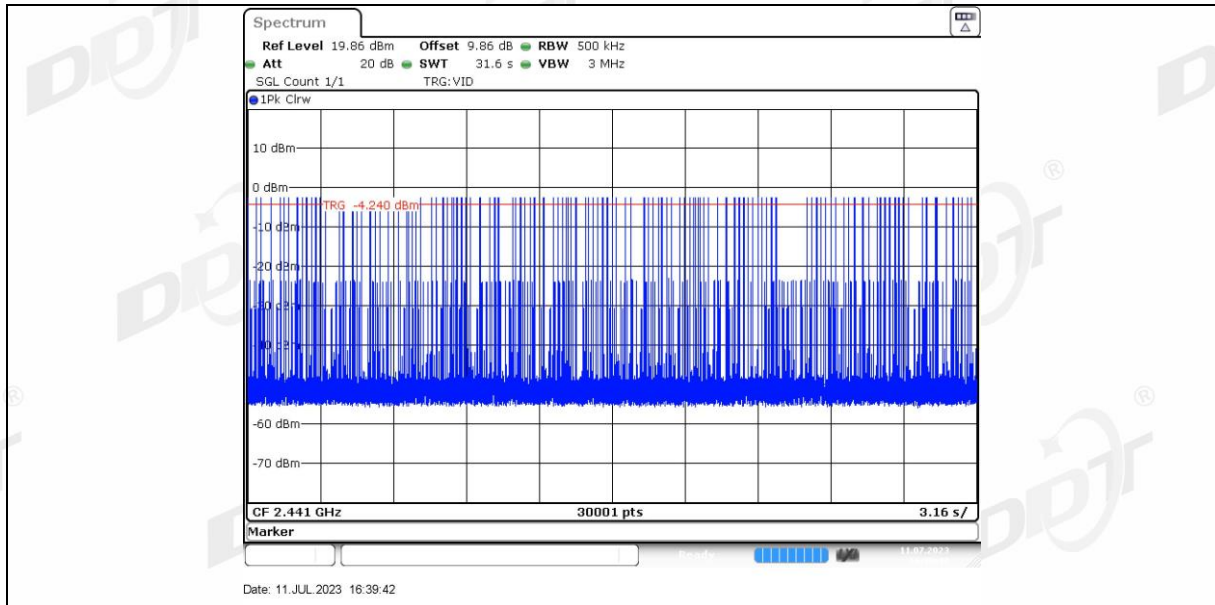



DH5_Ant1_Hop

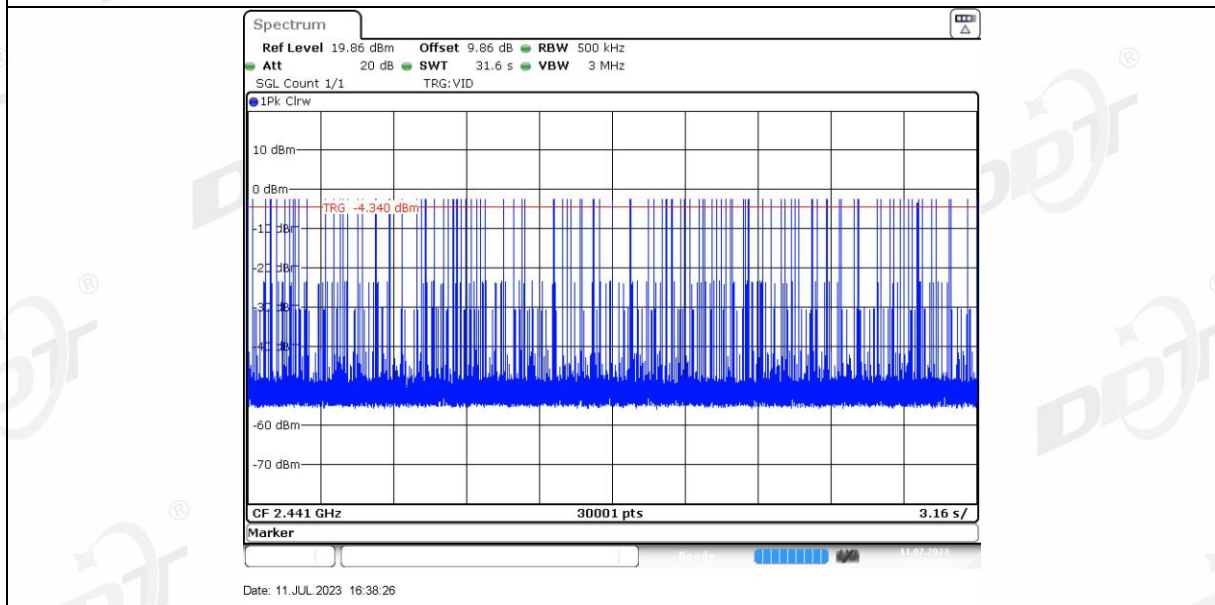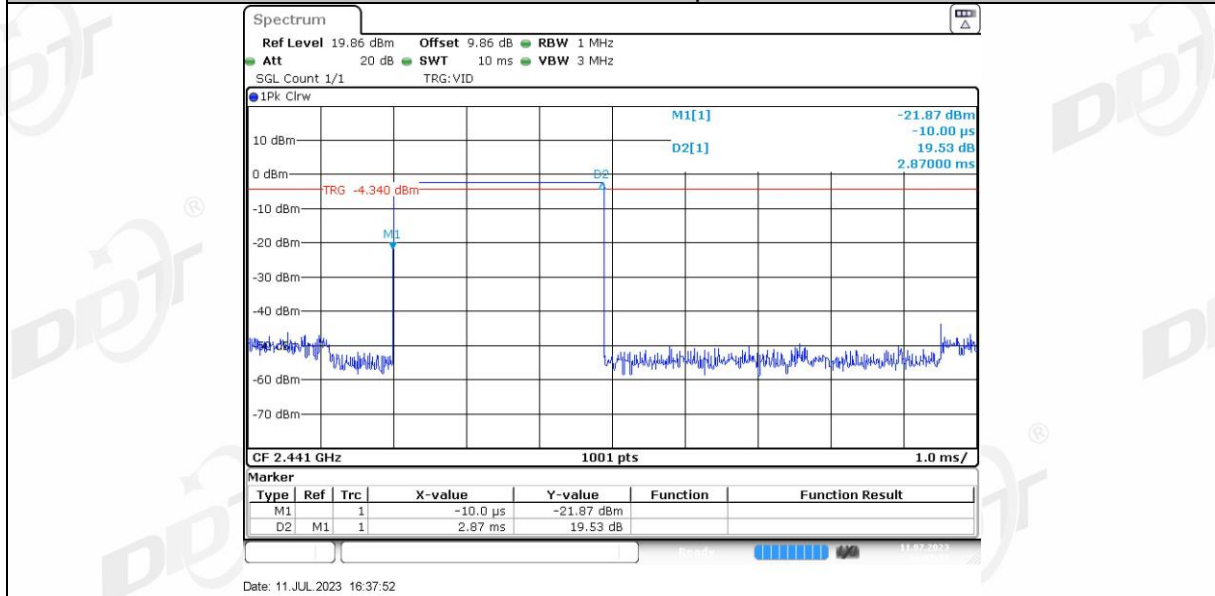

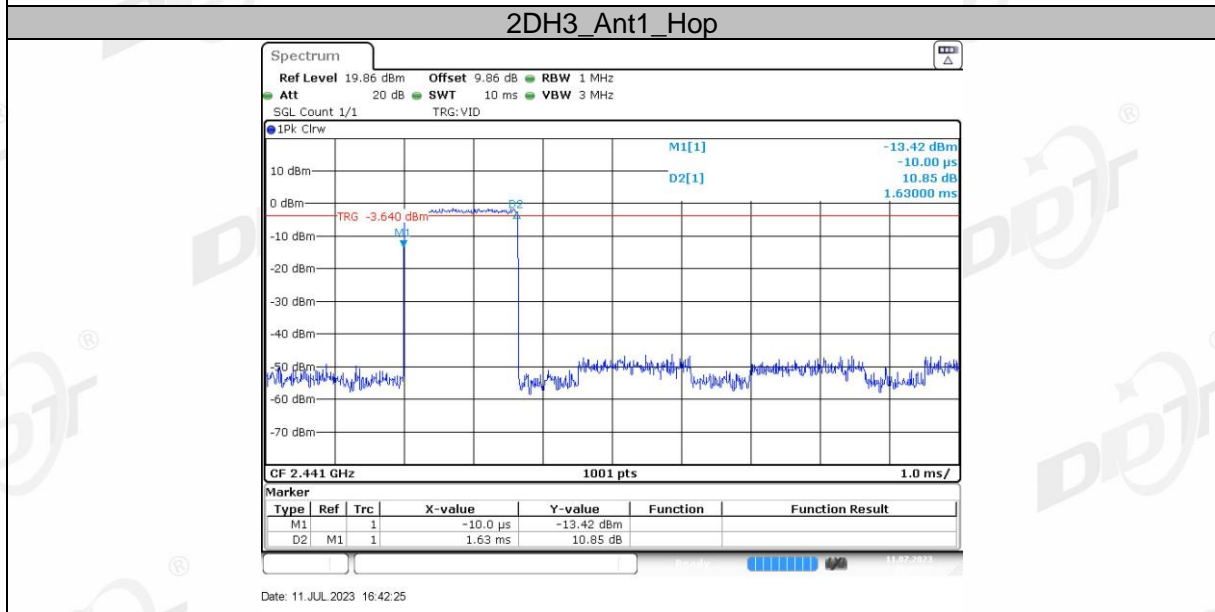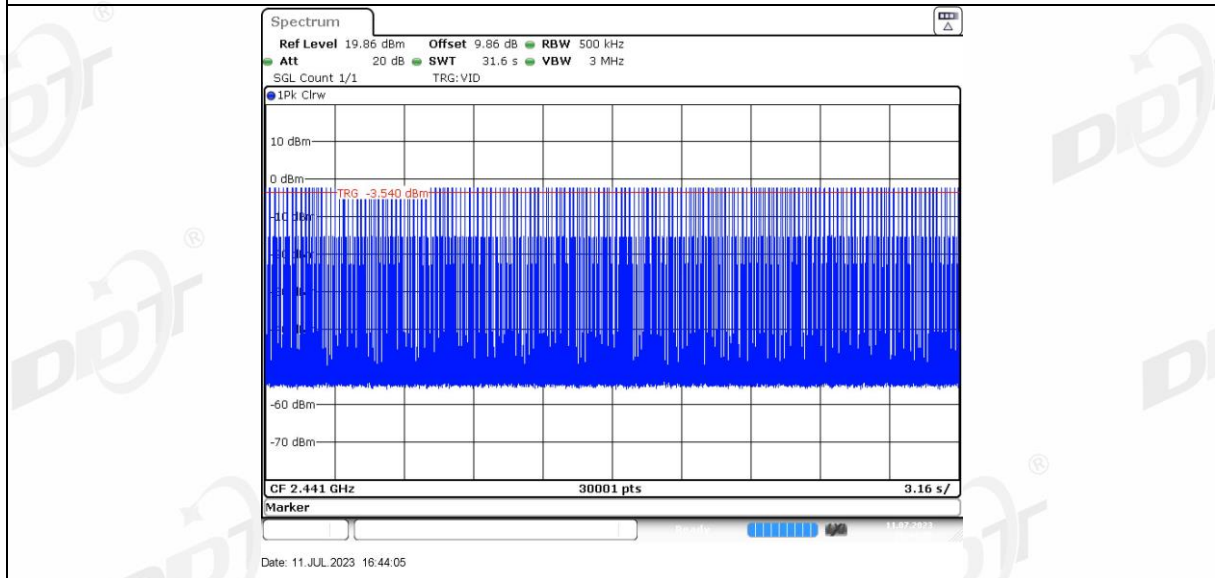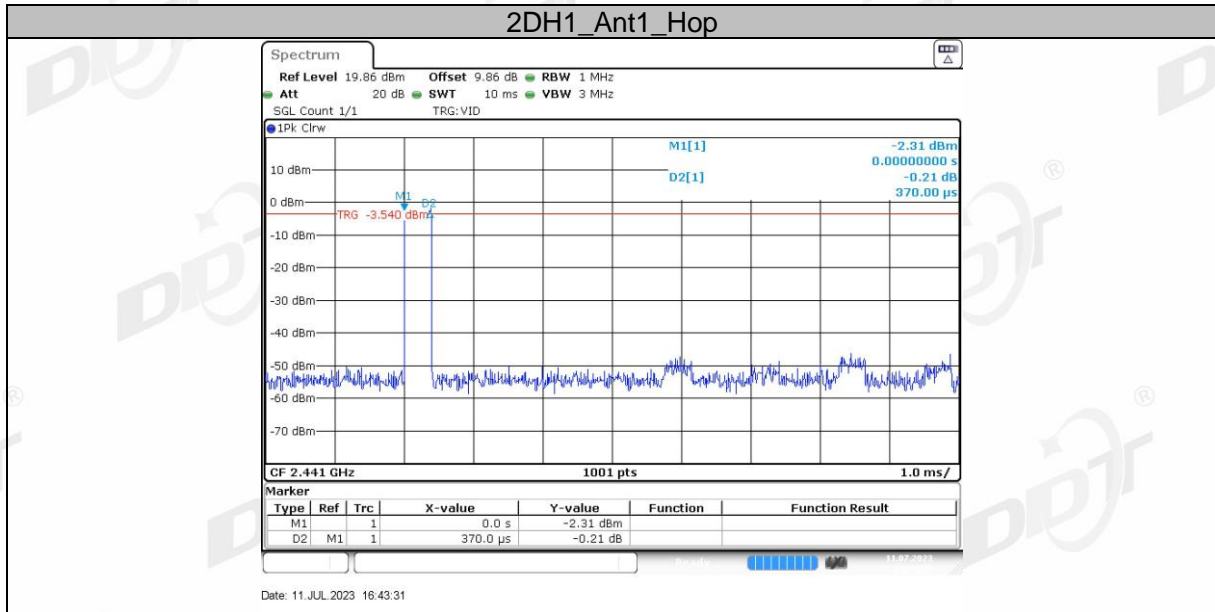

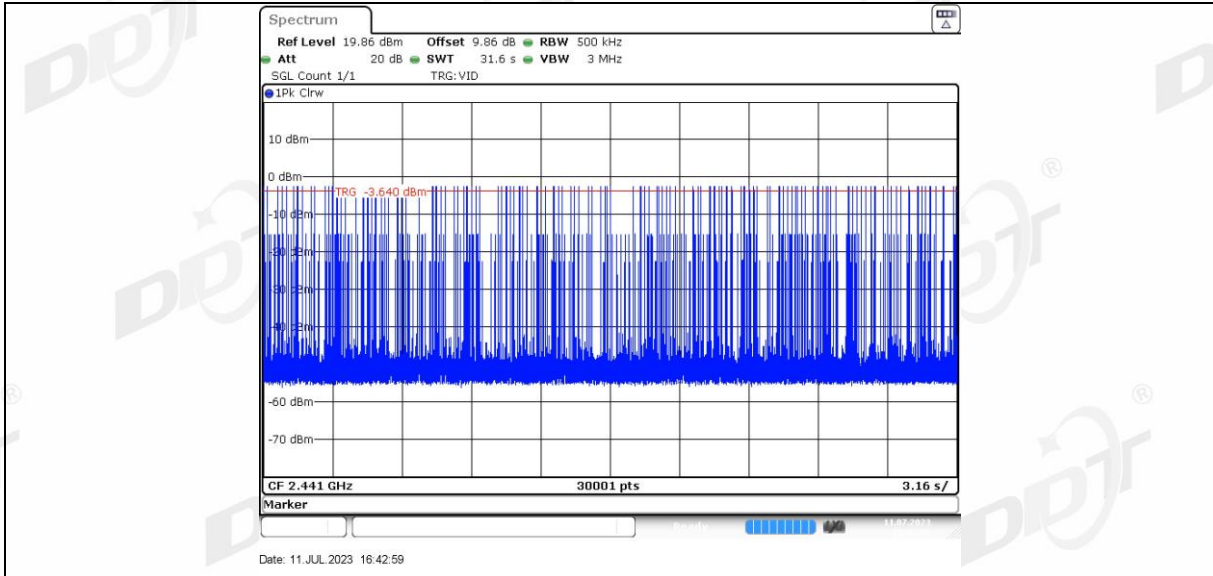


2DH5_Ant1_Hop

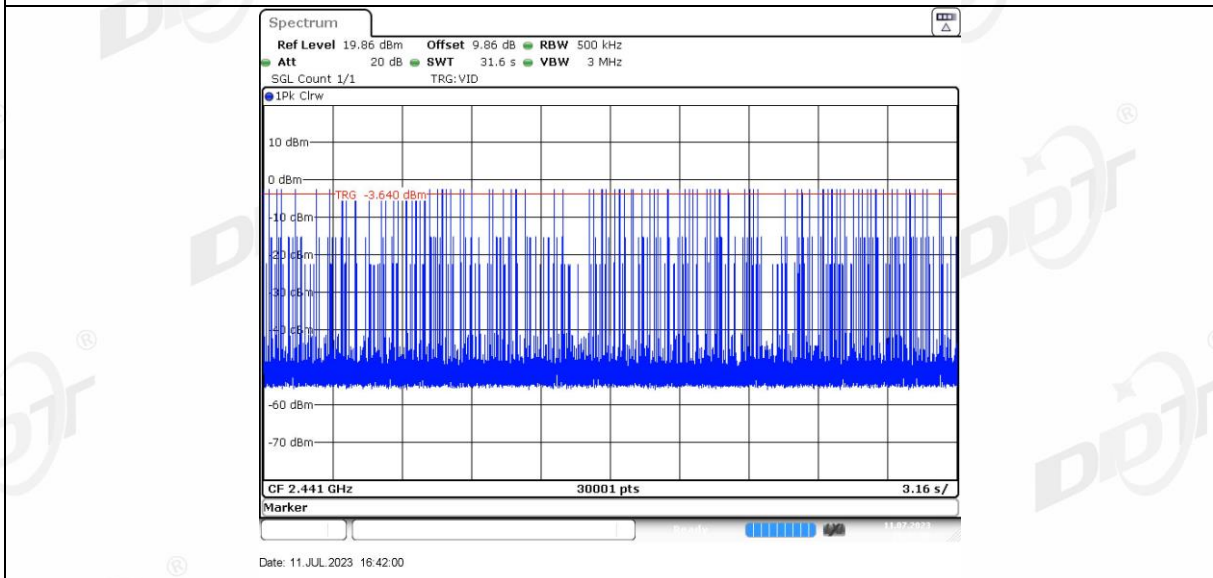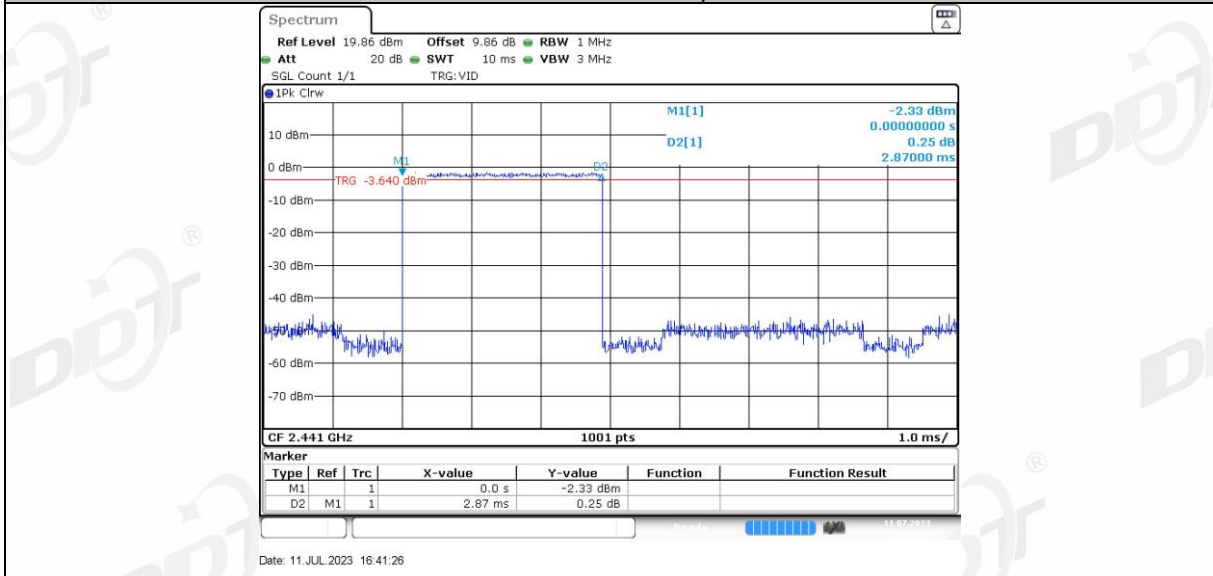

9. Band Edge Compliance (Conducted Method)

9.1. Block diagram of test setup

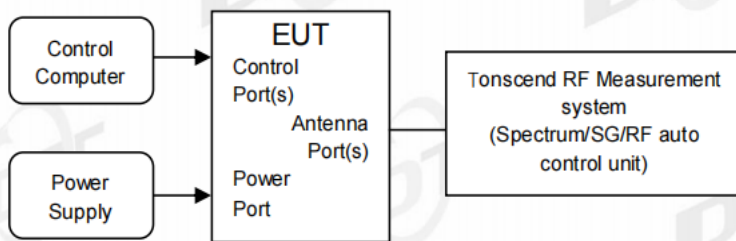

9.2. Limit




All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.



9.3. Test result

Mode	Frequency (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass

9.4. Original test data



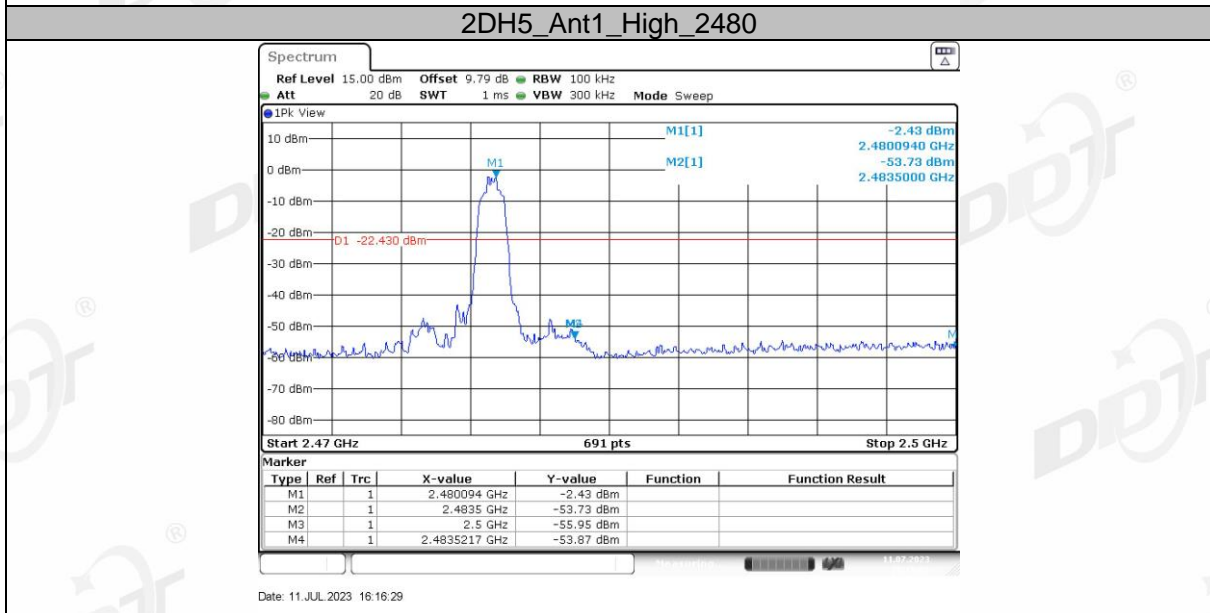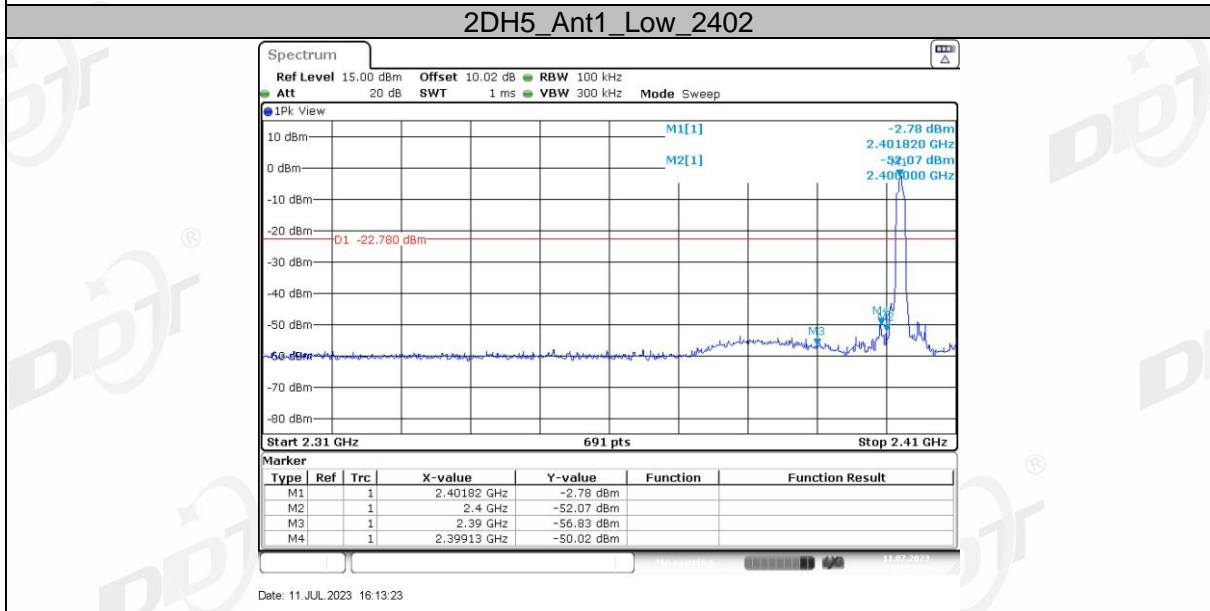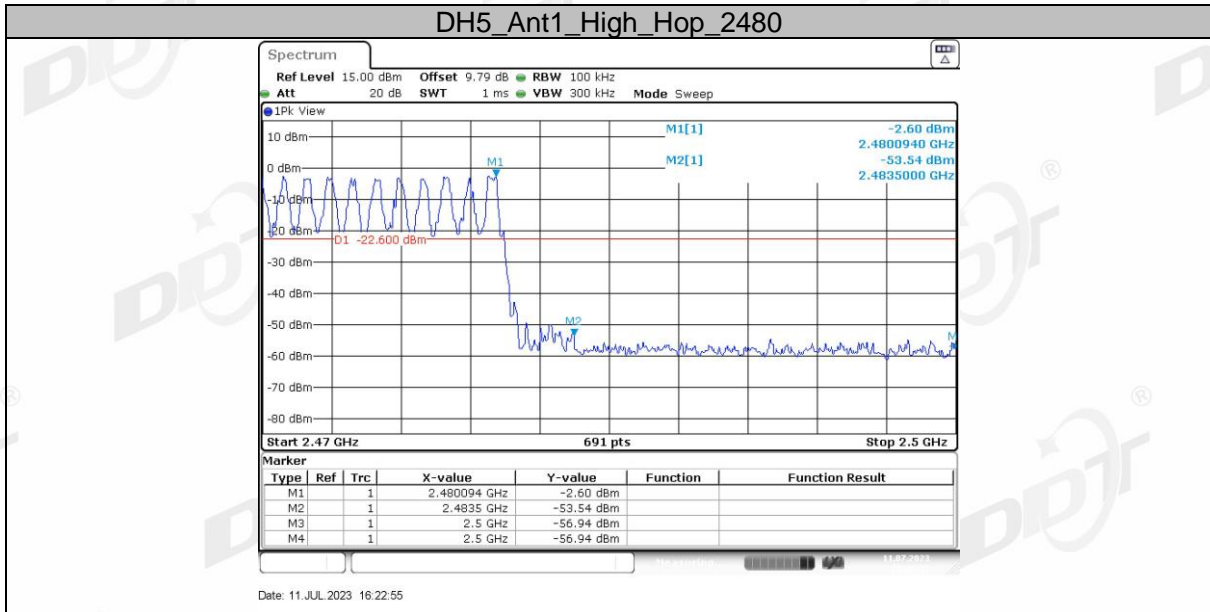


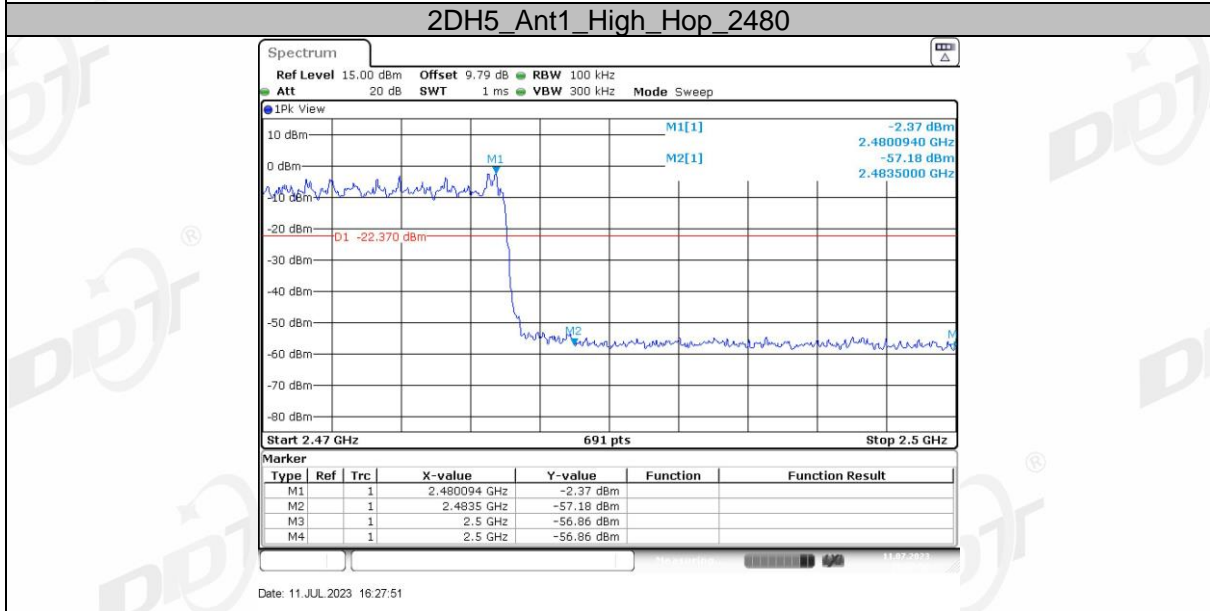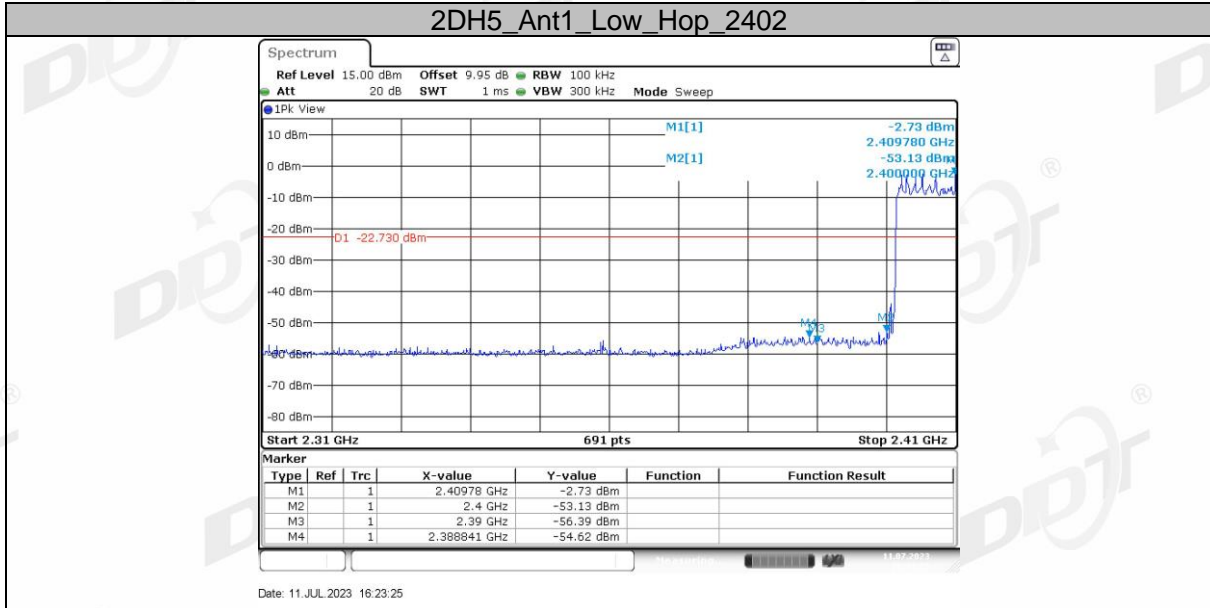


10. Radiated Emission

10.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

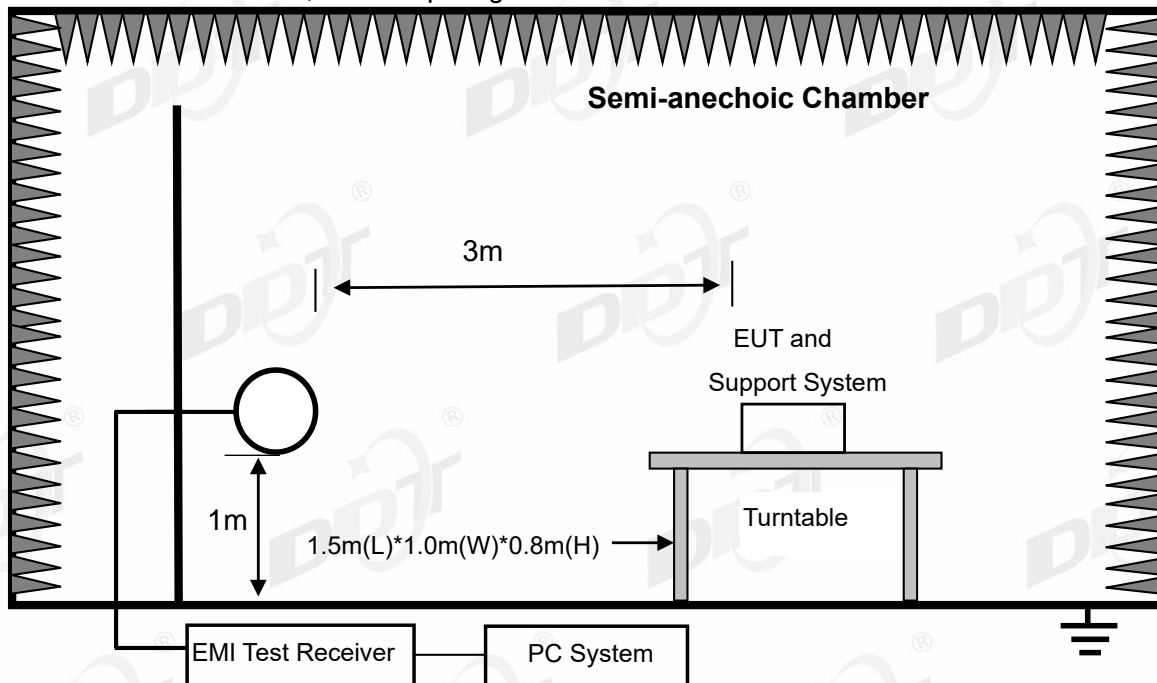

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

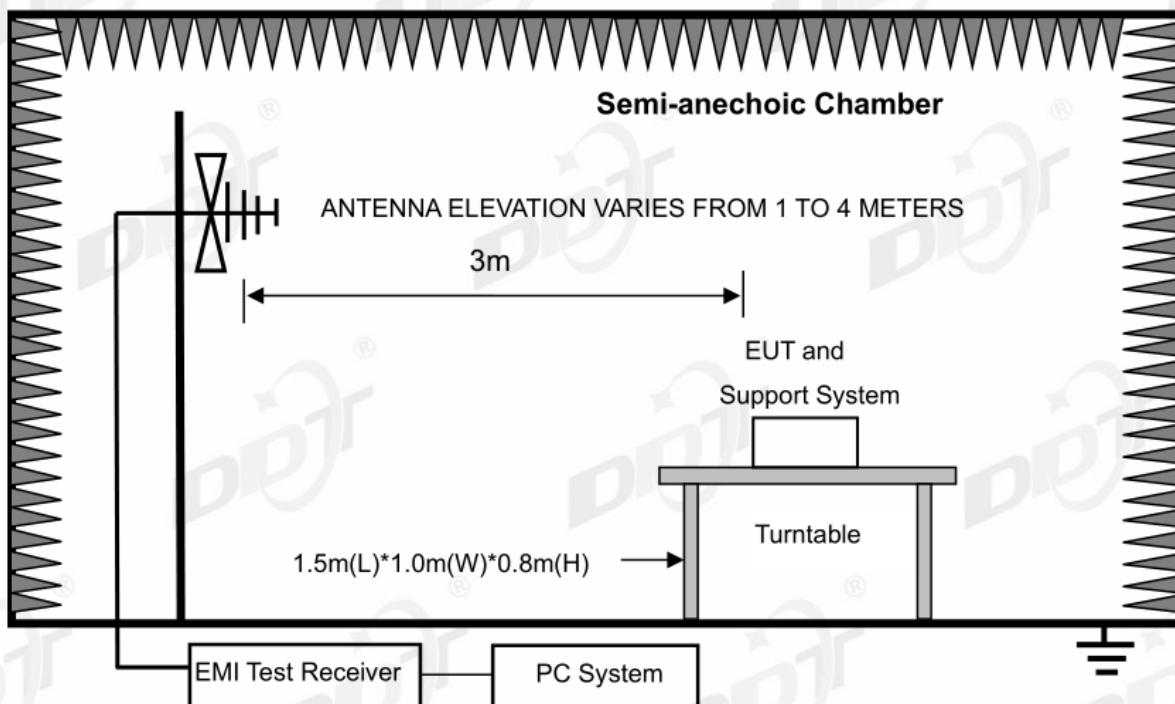

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

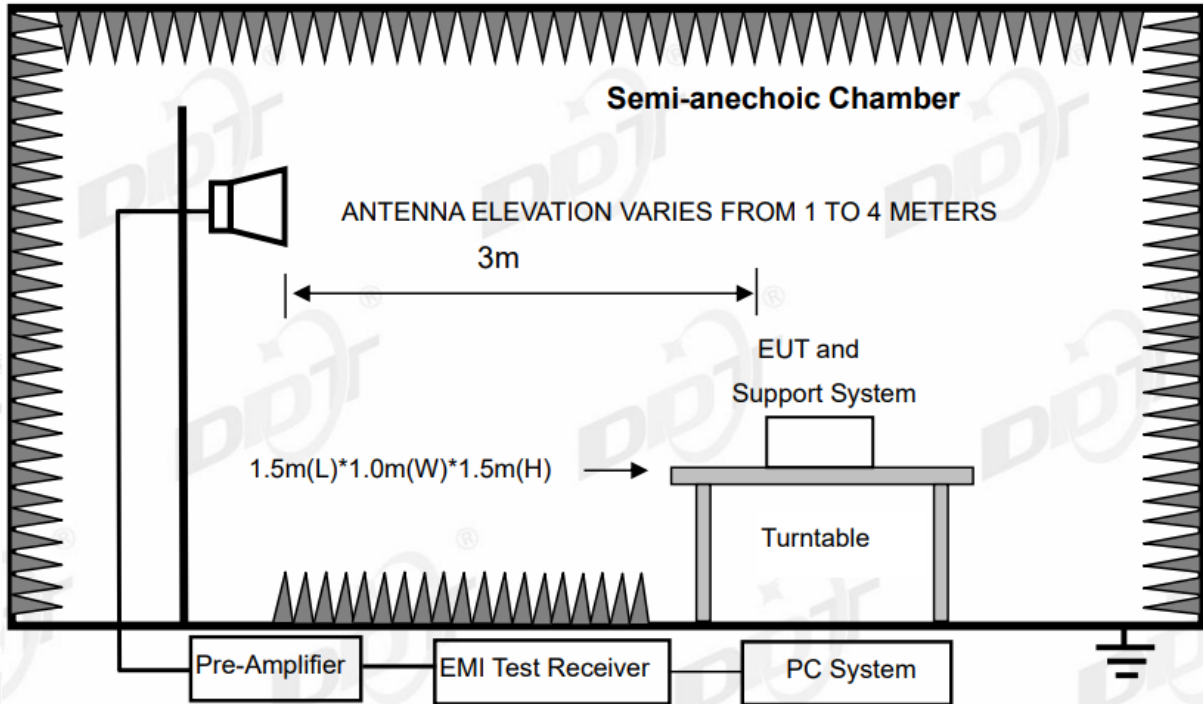

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

10.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
1.0495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit.

Frequency (MHz)	Measurement distance (meters)	Field strength limit	
		($\mu\text{V}/\text{m}$)	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$	$67.6-20\log(F)$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$	$87.6-20\log(F)$
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\log(30\text{m}/3\text{m})$$

(3) Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

10.3. Test procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1 G and 150 cm above the ground plane inside a semi-anechoic chamber for above 1 G.
- (2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz - 18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz - 40 GHz)	1 m

According to ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30 MHz, the Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT through three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission.

Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; according

ANSI C63.10:2013 clause 4.1.4.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is X axis , recorded in this report.

10.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in $\pi/4$ -DQPSK, Tx 2480 MHz mode.


Note3: 30 MHz ~ 25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, the worst case is GFSK Mode)

Note4: If peak results comply with AV limit, AV Result is deemed to comply with AV limit. Other emissions are attenuated 20 dB below the limits, so it does not record.

Radiated Emission test (below 1 GHz)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-07-28 **Tested By:** Bairong
EUT: Portable Wireless Speakers **Model Number:** C27/RED-E GO
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:22.4°C;Humi:66.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061523-2E C27/RED-E GO\FCC BELOW 1G\20230728-015038_H
Memo: BT

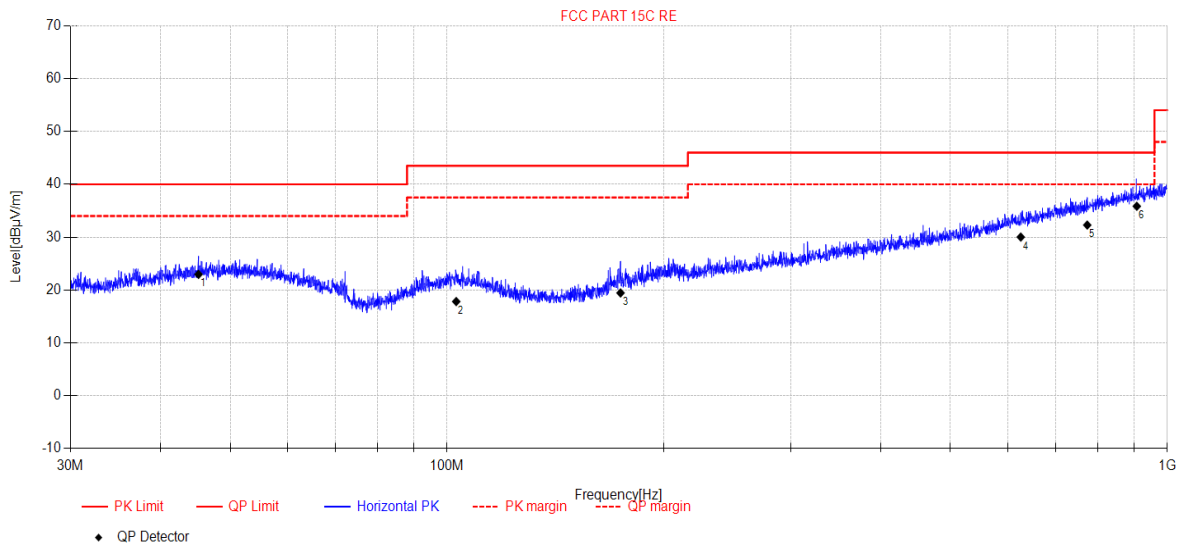


Final Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	45.18	5.27	13.02	4.67	0.00	22.96	40.00	17.04	QP	Horizontal
2	102.98	1.74	11.00	5.08	0.00	17.82	43.50	25.68	QP	Horizontal
3	174.12	5.12	8.81	5.52	0.00	19.45	43.50	24.05	QP	Horizontal
4	626.01	3.58	19.00	7.44	0.00	30.02	46.00	15.98	QP	Horizontal
5	774.20	3.39	20.98	7.92	0.00	32.29	46.00	13.71	QP	Horizontal
6	907.14	5.05	22.44	8.36	0.00	35.85	46.00	10.15	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-07-28 **Tested By:** Bairong
EUT: Portable Wireless Speakers **Model:** C27/RED-E GO
Test Mode: TX Mode **Number:**
Condition: Temp:22.4°C;Humi:66.5% **Power Supply:** DC 5V
File Path: d:\ts\2023 report data\Q23061523-2E C27/RED-E GO\FCC BELOW 1G\20230728-015128_V
Memo: BT

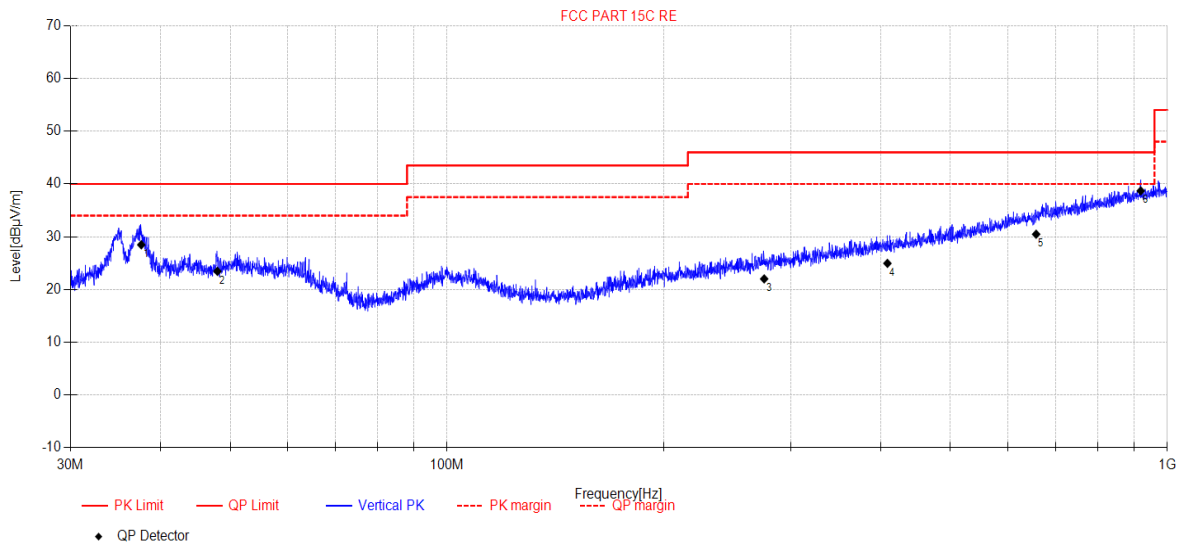

Final Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	37.63	12.27	11.63	4.57	0.00	28.47	40.00	11.53	QP	Vertical
2	47.99	5.54	13.20	4.70	0.00	23.44	40.00	16.56	QP	Vertical
3	275.61	3.15	12.81	6.05	0.00	22.01	46.00	23.99	QP	Vertical
4	408.73	2.66	15.57	6.72	0.00	24.95	46.00	21.05	QP	Vertical
5	657.51	3.54	19.35	7.58	0.00	30.47	46.00	15.53	QP	Vertical
6	918.66	7.78	22.50	8.41	0.00	38.69	46.00	7.31	QP	Vertical


Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1 GHz) TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-07-08 **Tested By:** Bairong
EUT: Portable Wireless Speakers **Model Number:** C27/RED-E GO
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:22.4°C;Humi:66.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061523-2E C27/RED-E GO\FCC ABOVE 1G1
Memo: DH5 2402

Test Graph

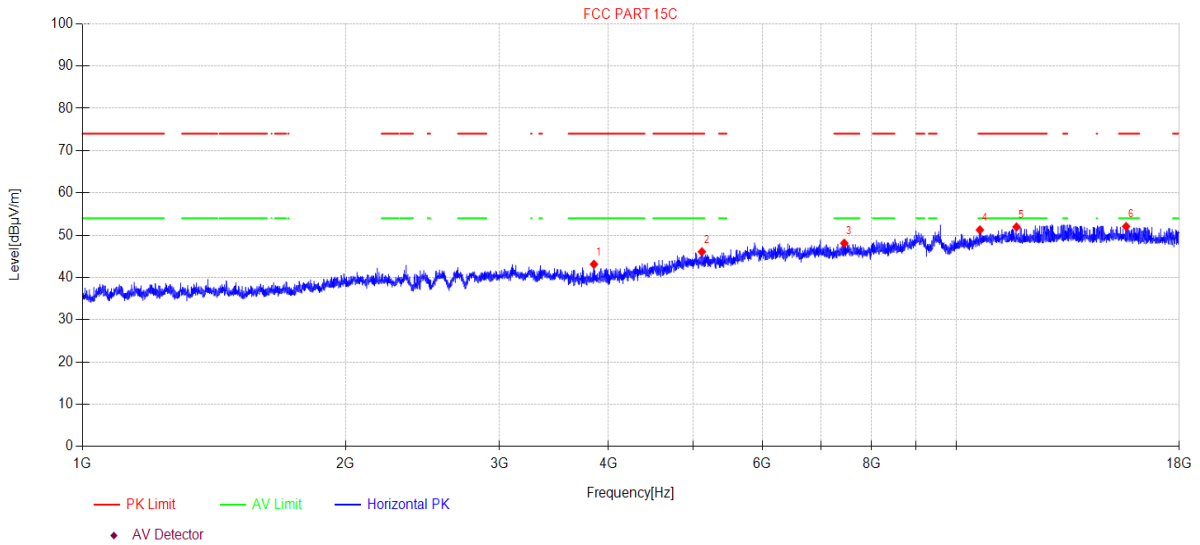

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3849.47	48.21	5.82	30.40	-41.31	43.12	74.00	30.88	PK	Horizontal
2	5115.72	46.19	8.03	32.90	-41.05	46.07	74.00	27.93	PK	Horizontal
3	7444.32	44.97	7.64	36.50	-41.00	48.11	74.00	25.89	PK	Horizontal
4	10643.56	43.34	9.40	39.04	-40.54	51.24	74.00	22.76	PK	Horizontal
5	11722.19	42.19	10.29	38.80	-39.34	51.94	74.00	22.06	PK	Horizontal
6	15645.80	39.59	14.28	38.35	-40.15	52.07	74.00	21.93	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-07-08 **Tested By:** Bairong
EUT: Portable Wireless Speakers **Model Number:** C27/RED-E GO
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:22.4°C;Humi:66.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061523-2E C27/RED-E GO\FCC ABOVE 1G\2
Memo: DH5 2402

Test Graph

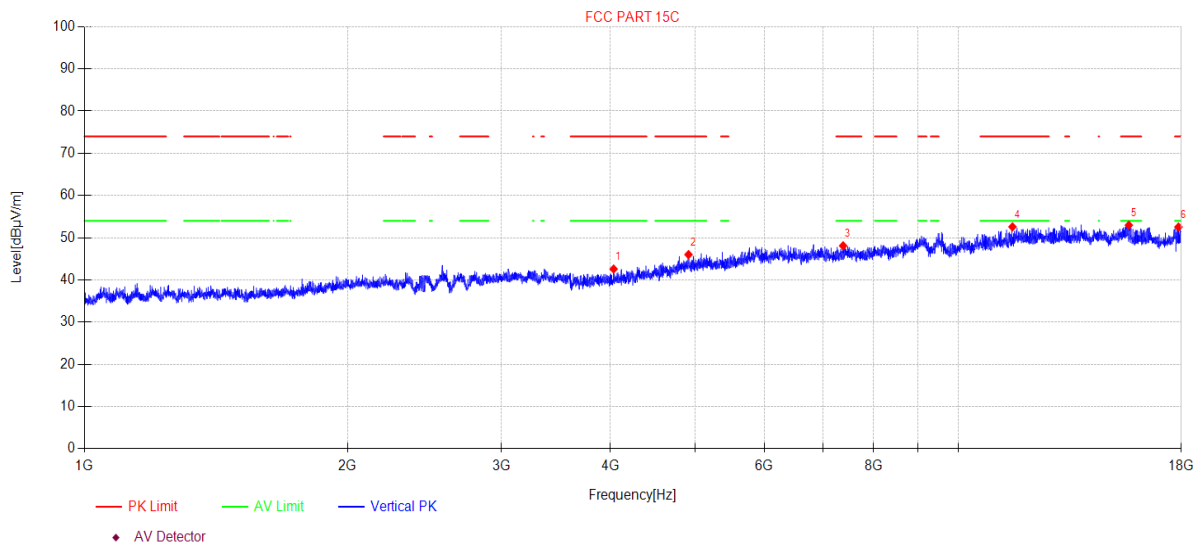

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	4032.82	47.28	5.92	30.77	-41.39	42.58	74.00	31.42	PK	Vertical
2	4912.87	46.79	7.69	32.65	-41.13	46.00	74.00	28.00	PK	Vertical
3	7384.32	44.95	7.64	36.50	-41.00	48.09	74.00	25.91	PK	Vertical
4	11537.33	43.13	10.13	38.96	-39.64	52.58	74.00	21.42	PK	Vertical
5	15677.49	40.40	14.42	38.32	-40.17	52.97	74.00	21.03	PK	Vertical
6	17865.25	39.26	12.97	40.96	-40.65	52.54	74.00	21.46	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-07-08 **Tested By:** Bairong
EUT: Portable Wireless Speakers **Model Number:** C27/RED-E GO
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:22.4°C;Humi:66.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061523-2E C27/RED-E GO\FCC ABOVE 1G\3
Memo: DH5 2441

Test Graph

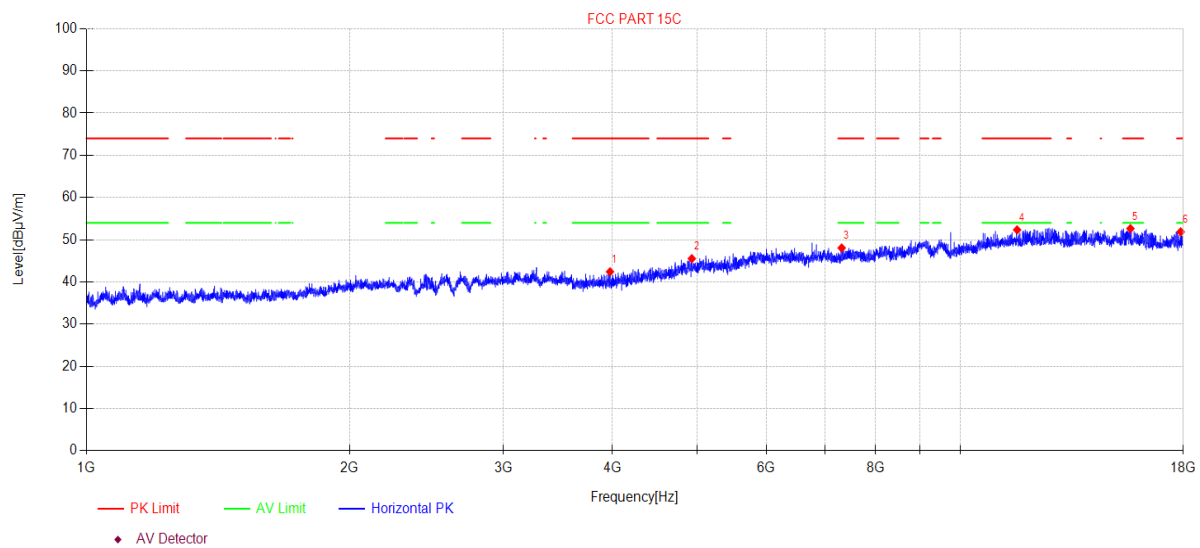

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3973.81	47.31	5.84	30.65	-41.38	42.42	74.00	31.58	PK	Horizontal
2	4929.93	46.19	7.73	32.72	-41.12	45.52	74.00	28.48	PK	Horizontal
3	7316.35	44.92	7.63	36.50	-41.00	48.05	74.00	25.95	PK	Horizontal
4	11617.64	42.76	10.20	38.88	-39.51	52.33	74.00	21.67	PK	Horizontal
5	15659.37	40.12	14.34	38.34	-40.16	52.64	74.00	21.36	PK	Horizontal
6	17875.58	38.51	12.98	41.03	-40.65	51.87	74.00	22.13	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-07-08 **Tested By:** Bairong
EUT: Portable Wireless Speakers **Model Number:** C27/RED-E GO
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:22.4°C;Humi:66.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061523-2E C27/RED-E GO\FCC ABOVE 1G\4
Memo: DH5 2441

Test Graph

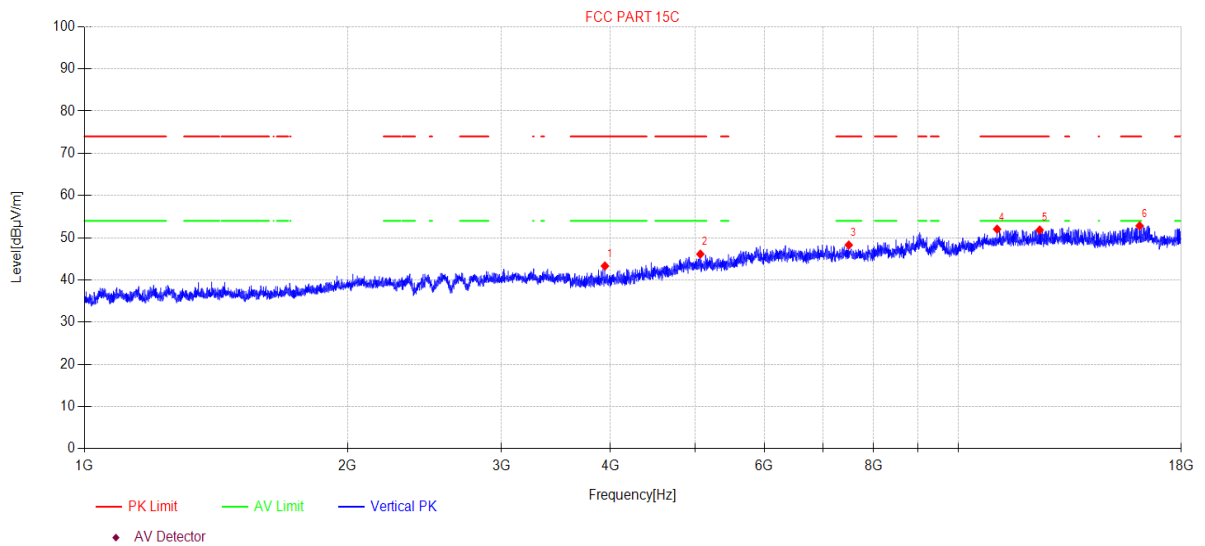

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3941.78	48.25	5.84	30.58	-41.37	43.30	74.00	30.70	PK	Vertical
2	5068.63	46.32	7.97	32.90	-41.07	46.12	74.00	27.88	PK	Vertical
3	7493.97	45.22	7.64	36.41	-41.00	48.27	74.00	25.73	PK	Vertical
4	11079.84	43.58	9.72	39.10	-40.37	52.03	74.00	21.97	PK	Vertical
5	12394.61	41.48	10.54	39.10	-39.29	51.83	74.00	22.17	PK	Vertical
6	16127.87	40.07	15.37	37.77	-40.39	52.82	74.00	21.18	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-07-08 **Tested By:** Bairong
EUT: Portable Wireless Speakers **Model Number:** C27/RED-E GO
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:22.4°C;Humi:66.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061523-2E C27/RED-E GO\FCC ABOVE 1G\5
Memo: DH5 2480

Test Graph

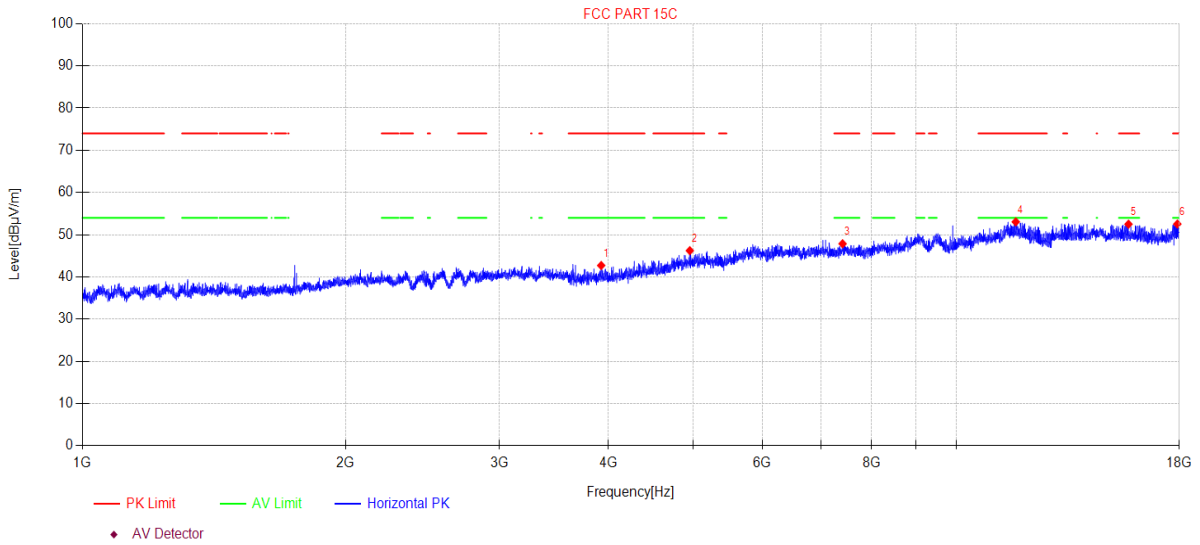

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3923.60	47.68	5.83	30.55	-41.35	42.71	74.00	31.29	PK	Horizontal
2	4955.65	46.76	7.78	32.80	-41.11	46.23	74.00	27.77	PK	Horizontal
3	7412.12	44.72	7.64	36.50	-41.00	47.86	74.00	26.14	PK	Horizontal
4	11698.50	43.36	10.27	38.80	-39.38	53.05	74.00	20.95	PK	Horizontal
5	15745.60	39.74	14.73	38.25	-40.22	52.50	74.00	21.50	PK	Horizontal
6	17906.60	38.93	13.02	41.24	-40.66	52.53	74.00	21.47	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-07-08 **Tested By:** Bairong
EUT: Portable Wireless Speakers **Model Number:** C27/RED-E GO
Test Mode: TX Mode **Power Supply:** DC 5V
Condition: Temp:22.4°C;Humi:66.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23061523-2E C27/RED-E GO\FCC ABOVE 1G\6
Memo: DH5 2480

Test Graph

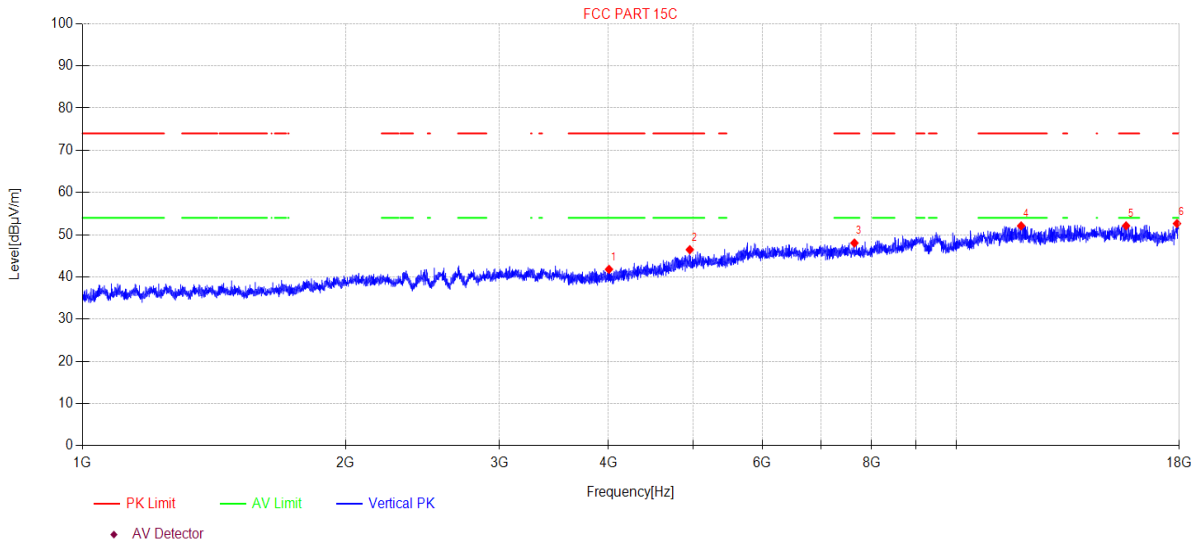

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	4004.94	46.63	5.86	30.71	-41.40	41.80	74.00	32.20	PK	Vertical
2	4955.65	46.98	7.78	32.80	-41.11	46.45	74.00	27.55	PK	Vertical
3	7647.12	44.89	7.66	36.49	-41.00	48.04	74.00	25.96	PK	Vertical
4	11865.34	42.00	10.42	38.80	-39.12	52.10	74.00	21.90	PK	Vertical
5	15645.80	39.63	14.28	38.35	-40.15	52.11	74.00	21.89	PK	Vertical
6	17891.09	39.17	13.00	41.14	-40.66	52.65	74.00	21.35	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.