TCT通测检测 TCT通测检测					
	TEST REPOR	Т			
FCC ID	2AFW2-B009				
Test Report No:	TCT230327E026				
Date of issue:	Apr. 04, 2023				
Testing laboratory:	SHENZHEN TONGCE TESTING	S LAB			
Testing location/ address:	2101 & 2201, Zhenchang Factor Subdistrict, Bao'an District, Sher People's Republic of China	y Renshan Industrial Zone, Fuhai Izhen, Guangdong, 518103,			
Applicant's name: :	Shenzhen DZH Industrial Co., Lt	d 🕜			
Address:	3th Floor, YiTuo Mike Industrial A building, Bu Yong Industrial D zone, ShaJing, Shenzhen, China				
Manufacturer's name :	Shenzhen DZH Industrial Co., Lt	Shenzhen DZH Industrial Co., Ltd			
Address:	3th Floor, YiTuo Mike Industrial A building, Bu Yong Industrial D zone, ShaJing, Shenzhen, China				
Standard(s):	KDB 447498 D01 General RF Exposure Guidance v06				
Product Name::	2.4G Wireless Keyboard				
Trade Mark:	N/A				
Model/Type reference :	B009				
Rating(s):	DC 3V (2*AAA Battery)				
Date of receipt of test item	Mar. 27, 2023				
Date (s) of performance of test:	Mar. 27, 2023 - Apr. 04, 2023				
Tested by (+signature) :	Yannie ZHONG	Yannie Zookecs			
Check by (+signature) :	Beryl ZHAO	Boy (PTCT)			
Approved by (+signature):	Tomsin	Tomsie of			


#### General disclaimer:

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

#### Report No.: TCT230327E026

# **Table of Contents**

1.	General Product Information			3
	1.1. EUT description	<u> </u>		
	1.2. Model(s) list			3
2.	General Information			4
	2.1. Test environment and mode	$\sim$		4
	2.2. Description of Support Units			
3.	Facilities and Accreditations			5
	3.1. Facilities			5
	3.2. Location			5
4.	Test Results and Measurement Data	$(x G^{*})$	<u>(C)</u>	6

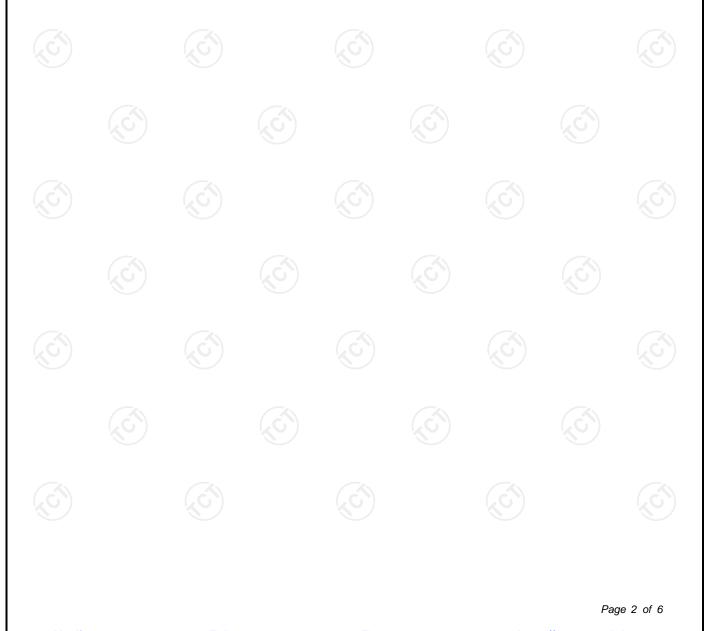

Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com



## **1. General Product Information**

## 1.1. EUT description

Product Name:	2.4G Wireless Keyboard	$(\mathbf{c})$		
Model/Type reference:	B009			
Sample Number:	TCT230327E025-0101			
Operation Frequency:	2405MHz - 2470MHz		No.	
Modulation Type:	GFSK			
Antenna Type:	PCB Antenna			
Antenna Gain:	-0.61dBi			
Rating(s):	DC 3V (2*AAA Battery)			

Report No.: TCT230327E026

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.



## 2. General Information

### 2.1. Test environment and mode

Item	Normal condition				
Temperature		+25°C			
Voltage		DC 3V			
Humidity		56%			
Atmospheric Pressure:		1008 mbar			
Test Mode:					
Engineering mode:	Keep the EUT in continuous transmitting by select channel				

### 2.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
1	1	I	1	1
	KO)	KO)	KO)	KO.

#### Note:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
- 3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

Report No.: TCT230327E026



## 3. Facilities and Accreditations

### 3.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

• FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC Registration No.: 10668A-1
  - SHENZHEN TONGCE TESTING LAB
  - CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

### 3.2. Location

### SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China TEL: +86-755-27673339



## 4. Test Results and Measurement Data

According to KDB 447498 D01 General RF Exposure Guidance v06, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the commission's guidance.

The 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq$  50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW) / (min. test separation distance, mm)]  $\cdot [\sqrt{f}(GHz)] \le 3.0$  for 1-g SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- When the minimum test separation distance is < 5 mm, a distance of 5 mm according is applied to determine SAR test exclusion.
- The result is rounded to one decimal place for comparison

The maximum peak radiation emission for the EUT is 91.63 dBuV/m at 3 m with frequency 2430 MHz, EIRP[dBm] = E[dB $\mu$ V/m] + 20 log (d[m]) - 104.77 =-3.60 dBm.

ChannelFrequency (GHz)Max. Powerup up (dBm)Tune up up (dBm)Tune up up (dBm)Test distance (mW)exclusion thresholds for 1-g SARCH 42.430-3.60-4±1-30.5050.163.0			<u> </u>	,	Tune	Max.	Max.		<u></u>		
	S	Channel		Power	up Power	Tune up Power	Tune up Power	distance	Result	thresholds for 1-g	
$\Box = 4$ 2.430 -3.00 -4±1 -3 0.50 5 0.16 3.0		CULA	2,420	2.60	- 4.4	· · ·	( )	E	0.16	2.0	
		CH 4	2.430	-3.60	-4±1	-3	0.50	S	0.16	3.0	l

### **Result:**

Base on the calculation value, No SAR measurement is required.

\*\*\*\*END OF REPORT\*\*\*\*\*