TCT通测检测 TESTING CENTRE TECHNOLOGY							
TEST REPORT							
FCC ID	2AFW2-B099						
Test Report No:	TCT230404E027						
Date of issue:	Apr. 10, 2023						
Testing laboratory:	SHENZHEN TONGCE TESTING	LAB					
Testing location/ address:	2101 & 2201, Zhenchang Factory Subdistrict, Bao'an District, Shen People's Republic of China	/ Renshan Industrial Zone, Fuhai zhen, Guangdong, 518103,					
Applicant's name::	Shenzhen DZH Industrial Co., Lte	d (C)					
Address:	3th Floor, YiTuo Mike Industrial A zone, ShaJing, Shenzhen, China						
Manufacturer's name :	Shenzhen DZH Industrial Co., Lto	d C					
Address:	3th Floor, YiTuo Mike Industrial A building, Bu Yong Industrial D zone, ShaJing, Shenzhen, China						
Standard(s):	KDB 447498 D01 General RF Exposure Guidance v06						
Product Name::	Bluetooth Keyboard						
Trade Mark:	N/A						
Model/Type reference :	B099						
Rating(s):	Rechargeable Li-ion Battery DC	3.7V					
Date of receipt of test item	Apr. 04, 2023						
Date (s) of performance of test:	Apr. 04, 2023 - Apr. 10, 2023						
Tested by (+signature) :	Ronaldo LUO	R-snald to unoc E					
Check by (+signature) :	Beryl ZHAO	Boy TCT					
Approved by (+signature):	Tomsin	Tomsmits st					

General disclaimer:

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Report No.: TCT230404E027

Table of Contents

1.	General Product Information			
	1.1. EUT description	<u>(9)</u>		3
	1.2. Model(s) list			3
2.	General Information			4
	2.1. Test environment and mode	\sim		4
	2.2. Description of Support Units			
3.	Facilities and Accreditations			5
	3.1. Facilities			5
	3.2. Location			5
4.	Test Results and Measurement Data .	<u>(c)</u>	<u>((() () () () () () () () ()</u>	6



Page 2 of 6




1. General Product Information

1.1. EUT description

Product Name:	Bluetooth Keyboard	(\mathbf{c}^{*})		(\mathbf{c}^{*})
Model/Type reference:	B099			
Sample Number:	TCT230404E026-0101			
Operation Frequency:	2402MHz~2480MHz		S.	
Modulation Type:	GFSK			
Antenna Type:	PCB Antenna			
Antenna Gain:	1.87dBi			
Rating(s):	Rechargeable Li-ion Battery DC	3.7V		

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

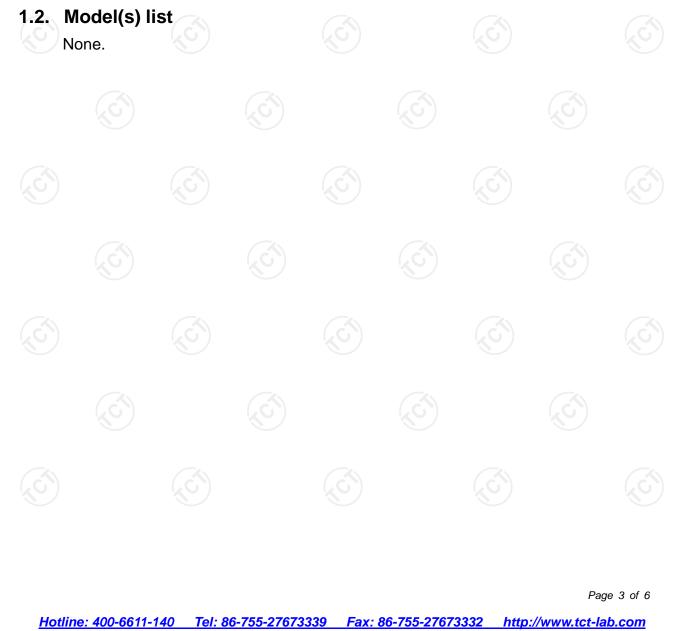

Report No.: TCT230404E027

2. General Information

2.1. Test environment and mode

ltem	Normal condition				
Temperature		+25°C			
Voltage		DC 3.7V		$\langle \mathcal{O} \rangle$	
Humidity		56%			
Atmospheric Pressure:		1008 mbar		(C	
Test Mode:					
Engineering mode:	Keep the EUT in continuous transmitting by select channel				

2.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
1	1	4	1	1
Notor				

Note:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
- 3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

Report No.: TCT230404E027



3. Facilities and Accreditations

3.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

• FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC Registration No.: 10668A-1
- SHENZHEN TONGCE TESTING LAB
- CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

3.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China TEL: +86-755-27673339



4. Test Results and Measurement Data

TCT通测检测 TESTING CENTRE TECHNOLOGY

According to KDB 447498 D01 General RF Exposure Guidance v06, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the commission's guidance.

The 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW) / (min. test separation distance, mm)] $\cdot [\sqrt{f}(GHz)] \le 3.0$ for 1-g SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
 When the minimum test separation distance is < 5 mm, a distance of 5 mm
 - according is applied to determine SAR test exclusion.
- The result is rounded to one decimal place for comparison

•	BT:									
	Channel	Frequency (GHz)	Max. Power (dBm)	Tune up Power (dBm)	Max. Tune up Power (dBm)	Max. Tune up Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR	
	CH 00	2.402	-4.28	-5±1	-4	0.4	5	0.12	3.0	

Result: Base on the calculation value, No SAR measurement is required.

