



**FCC Part 1 Subpart I
FCC Part 2 Subpart J**

RF EXPOSURE REPORT

FOR

BABY SCALE

MODEL NUMBER: SCP15001

FCC ID: 2AFYZ-SCP15001

REPORT NUMBER: 15U21730-S1V2

ISSUE DATE: December 18, 2015

Prepared for
HATCH BABY, INC.
3476 SOUTH CT.
PALO ALTO, CA 94306
U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	10/8/2014	Initial issue	-
V2	12/18/2015	Section 5 - Clarified antenna separation distance	Dave Weaver

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. REFERENCES	5
4. FACILITIES AND ACCREDITATION	5
5. Device under test	5
6. STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	6
6.1. FCC	6
7. ANTENNA LOCATION DIAGRAM	7

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: HATCH BABY, INC.
3476 SOUTH CT.
PALO ALTO, CA 94306
U.S.A.

EUT DESCRIPTION: BABY SCALE

MODEL: SCP15001

SERIAL NUMBER: P4-EVT

DATE TESTED: SEPTEMBER 11, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 1 SUBPART I & PART 2 SUBPART J	Pass

UL Verification Services Inc. calculated the RF Exposure of the above equipment in accordance with the requirements set forth in the above standards, using test results reported in the test report documents referenced below and/or documentation furnished by the applicant. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations of these calculations. The results show that the equipment is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



Dave Weaver
Program Manager
UL Verification Services Inc.

2. TEST METHODOLOGY

All calculations were made in accordance with FCC KDB 447498.

3. REFERENCES

Output power gain data is excerpted from the applicable test reports or client declarations.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

5. Device under test

The EUT is an electronic baby scale with integrated backlit LCD touch display and a 2.4 GHz Wi-Fi module. The device is designed to be used in conjunction with a smartphone or tablet app. The EUT is powered by user-replaceable batteries and is intended for non-medical residential use.

The maximum declared output power is 29mW.

The antenna is located within the enclosure of the EUT.

The closest that the antenna is to any outside edge of the enclosure is 15.6mm.

Therefore closest user to antenna separation distance is 15.6mm.

6. STANDALONE SAR TEST EXCLUSION CONSIDERATIONS

6.1. FCC

SAR test exclusion in accordance with KDB 447498.

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [f(\text{GHz})] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

This test exclusion is applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.


SAR Exclusion Calculation Table for Portable Devices (separation distance < 50 mm)

Tx	Frequency (MHz)	Avg Output power		Separation distance (mm)	Calculated Threshold
		dBm	mW		
Wi-Fi	2440	14.60	29	16	2.8

Conclusion:

The computed value is < 3 ; therefore, Wi-Fi qualifies for Standalone SAR test exclusion.

7. ANTENNA LOCATION DIAGRAM

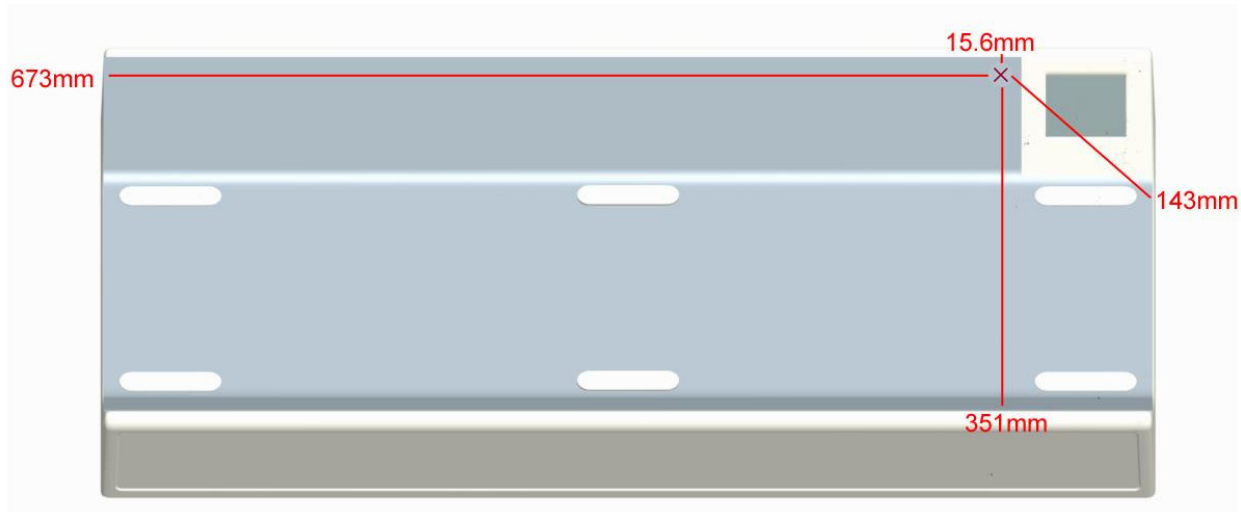

END OF REPORT