



Test Report No.: RF190103N022



# TEST REPORT



Applicant	Xiaomi Communications Co., Ltd.
Address	The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

Manufacturer or Supplier	Xiaomi Communications Co., Ltd.
Address	The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China
Product	Mi Wireless Charger
Brand Name	MI
Model	MDY-10-EP
Additional Model & Model Difference	N/A
Date of tests	Jan. 03, 2019 ~ Jan. 17, 2019

The submitted sample of the above equipment has been tested for according to the requirements of the following standards:

**FCC Part 15, Subpart C**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Andy Zhu Project Engineer / EMC Department	Approved by Glyn He Supervisor / EMC Department
	
	Date: Jan. 30, 2019

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)

# TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>3</b>
<b>1 SUMMARY OF TEST RESULTS .....</b>	<b>4</b>
<b>2 MEASUREMENT UNCERTAINTY .....</b>	<b>4</b>
<b>3 GENERAL INFORMATION.....</b>	<b>5</b>
3.1 GENERAL DESCRIPTION OF EUT .....	5
3.2 DESCRIPTION OF TEST MODES .....	6
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	6
3.4 DESCRIPTION OF SUPPORT UNITS .....	6
<b>4 EMISSION TEST.....</b>	<b>7</b>
4.1 CONDUCTED EMISSION MEASUREMENT .....	7
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	7
4.1.2 TEST INSTRUMENTS.....	7
4.1.3 TEST PROCEDURE .....	8
4.1.4 DEVIATION FROM TEST STANDARD .....	8
4.1.5 TEST SETUP .....	9
4.1.6 EUT OPERATING CONDITIONS .....	9
4.1.7 TEST RESULTS .....	10
4.2 RADIATED EMISSION MEASUREMENT .....	12
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	12
4.2.2 TEST INSTRUMENTS.....	13
4.2.3 TEST PROCEDURE .....	14
4.2.4 DEVIATION FROM TEST STANDARD .....	14
4.2.5 TEST SETUP .....	15
4.2.6 EUT OPERATING CONDITIONS .....	15
4.2.7 TEST RESULTS .....	16
4.3 20dB BANDWIDTH MEASUREMENT .....	22
4.3.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT .....	22
4.3.2 TEST INSTRUMENTS.....	22
4.3.3 TEST PROCEDURE .....	23
4.3.4 DEVIATION FROM TEST STANDARD .....	23
4.3.5 TEST SETUP .....	23
4.3.6 EUT OPERATING CONDITION .....	24
4.3.7 TEST RESULTS .....	24
<b>5 PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>26</b>
<b>6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>27</b>



**BUREAU**  
**VERITAS**

Test Report No.: RF190103N022

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF190103N022	Original release	Jan. 30, 2019



## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
§15.203	Antenna Requirement	PASS	No antenna connector is used.
§15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
§15.209	Radiated Emission	PASS	Meet the requirement of limit.
§15.215 (c)	20dB Bandwidth	PASS	Meet the requirement of limit.

## 2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GMHz	3.76dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Mi Wireless Charger
<b>MODEL NO.</b>	MDY-10-EP
<b>ADDITIONAL MODELS</b>	N/A
<b>FCC ID</b>	2AFZZ-MDY10EP
<b>POWER SUPPLY</b>	DC 5-20V From adapter
<b>MODULATION TYPE</b>	FSK
<b>OPERATING FREQUENCY</b>	110KHz ~ 145KHz
<b>ANTENNA TYPE</b>	Coil Antenna

**NOTE:**

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
- Please refer to the EUT photo document (Reference No.: 190103N022) for detailed product photo.
- The EUT was powered by the following adapter:

<b>ADAPTER</b>	
<b>BRAND:</b>	MI
<b>MODEL:</b>	MDY-10-EJ
<b>INPUT:</b>	AC 100-240V, 50/60, 700mA
<b>OUTPUT:</b>	DC 5V 3000mA/ DC 9V 3000mA/ DC 12V 2250mA/ DC 20V 1350mA

- The EUT matched the following cable:

<b>USB to Type-C CABLE 1</b>	
<b>BRAND:</b>	MI
<b>MODEL:</b>	L23312
<b>SIGNAL LINE:</b>	Shielded, detachable, 1.0m

<b>USB to Type-C CABLE 2</b>	
<b>BRAND:</b>	MI
<b>MODEL:</b>	K23312
<b>SIGNAL LINE:</b>	Shielded, detachable, 1.0m

Remarks: The worst case was **Cable1** in the test.



### 3.2 DESCRIPTION OF TEST MODES

The EUT was tested under the following modes the final worst mode was marked in boldface and recorded in this report.

TEST FREQUENCY	TEST MODE
142KHz	<b>Wireless charging</b>
143KHz	Standby

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C**  
**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Mobile phone	MI	M1902F1G	N/A	N/A
2	Dummy Load	N/A	N/A	N/A	N/A

Worst Case mode test result shown on the report

NO.	DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, detachable,0.8m

Remarks: The support units were provided by client, and worst-case test result shown on the report only.



## 4 EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTES:**
- (1) The lower limit shall apply at the transition frequencies.
  - (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  - (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Mar. 21,18	Mar. 20,19
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 03,18	Mar. 02,19
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Apr. 11,18	Apr. 10,19
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jan. 18,18	Jan. 17,19
Test software	ADT	ADT_Cond _V7.3.7	N/A	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in shielding room 553.



#### 4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20dB) were not recorded.

#### NOTE:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value


#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.





#### 4.1.5 TEST SETUP

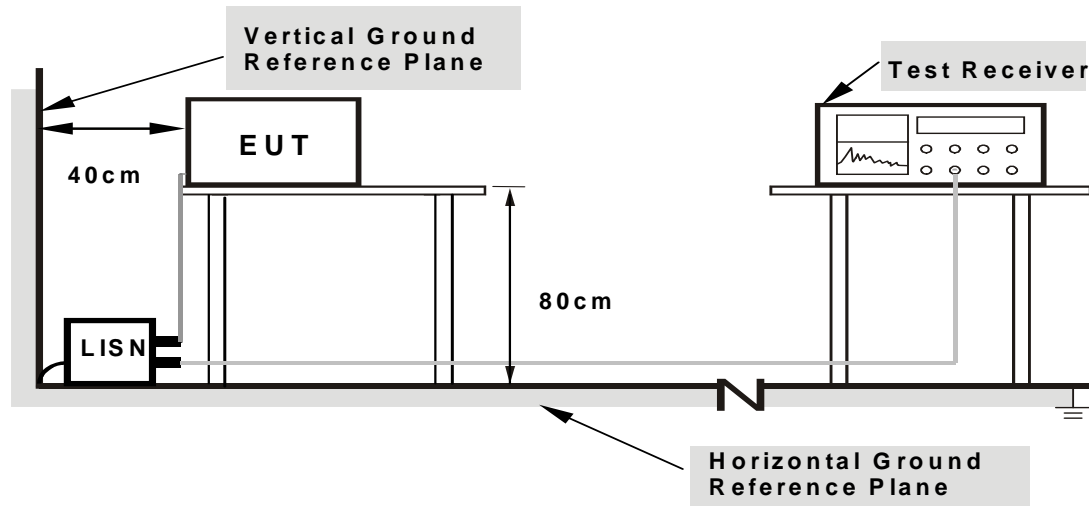

- Note:**
- 1.Support units were connected to second LISN.
  - 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power of all equipment.
- b. EUT was operated according to the type description in manufacturer's specifications or the User's Manual.




### 4.1.7 TEST RESULTS

<b>TEST MODE</b>	Wireless charging	<b>6DB BANDWIDTH</b>	9 kHz
<b>TEST VOLTAGE</b>	DC 12V from Adapter	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 44% RH	<b>TESTED BY</b>	Dragon

No.	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15225	9.72	43.60	33.10	53.32	42.82	65.88	55.88	-12.56	-13.06
2	0.20410	9.75	35.69	25.77	45.44	35.52	63.44	53.44	-18.00	-17.92
3	0.25344	9.79	31.10	18.83	40.89	28.62	61.64	51.64	-20.75	-23.02
4	0.42076	10.25	23.77	15.63	34.02	25.88	57.43	47.43	-23.41	-21.55
5	3.94350	9.72	15.41	6.72	25.13	16.44	56.00	46.00	-30.87	-29.56
6	8.61675	10.02	24.00	18.51	34.02	28.53	60.00	50.00	-25.98	-21.47


**REMARKS:** The emission levels of other frequencies were very low against the limit.

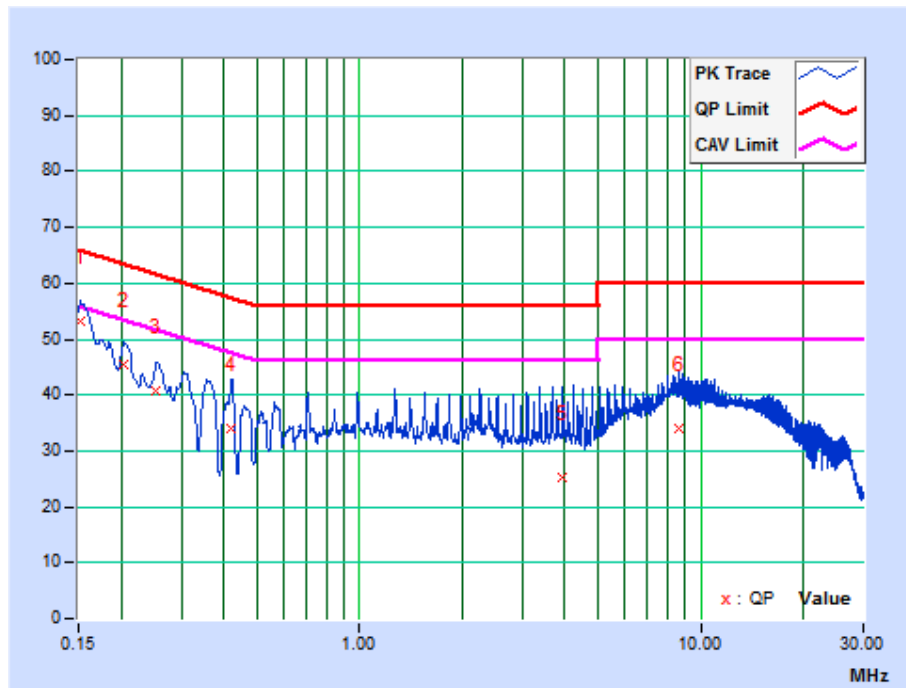

<b>TEST MODE</b>	Wireless charging	<b>6DB BANDWIDTH</b>	9 kHz
<b>TEST VOLTAGE</b>	DC 12V from Adapter	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 44% RH	<b>TESTED BY</b>	Dragon

No.	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15225	9.90	41.85	31.34	51.75	41.24	65.88	55.88	-14.12	-14.63
2	0.20625	10.29	34.43	25.00	44.72	35.29	63.35	53.35	-18.63	-18.06
3	0.30894	9.63	29.43	19.66	39.06	29.29	60.00	50.00	-20.94	-20.71
4	3.42825	9.72	23.32	14.24	33.04	23.96	56.00	46.00	-22.96	-22.04
5	5.43075	10.10	19.84	13.62	29.94	23.72	60.00	50.00	-30.06	-26.28
6	8.43225	9.76	24.93	19.12	34.69	28.88	60.00	50.00	-25.31	-21.12

**REMARKS:** The emission levels of other frequencies were very low against the limit.

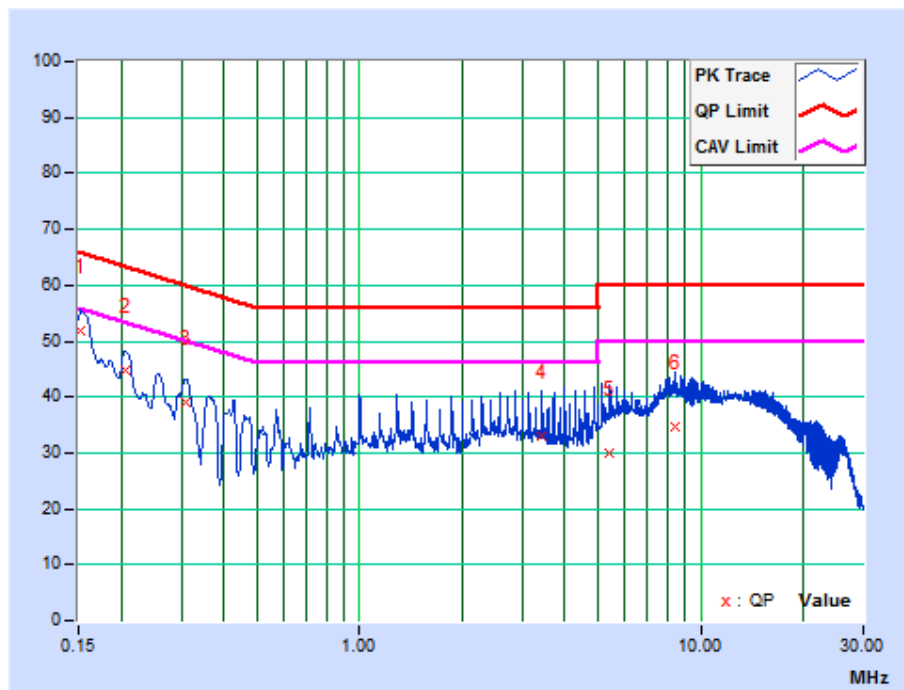



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart C, Section 15.209

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m} \\
 &= 84+20\log(30/3)^2 && 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$



### 4.2.2 TEST INSTRUMENTS

#### FREQUENCY 9KHz-30MHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101564	Jan. 18,18	Jan. 17,19
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	1519B-045	May 04,18	May 03,19
Amplifier	Burgeon	BPA-530	100210	Apr. 18,18	Apr. 18,19
Test Software	ADT	ADT_Radiated_V8.7.07	N/A	N/A	N/A

- NOTES:**
1. The test was performed in 10m Chamber.
  2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  3. The FCC Site Registration No. is 749762.

#### FREQUENCY 30MHz-1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 21,18	Mar. 20,19
Bilog Antenna	Teseq	CBL 6111D	30643	Aug.11,18	Aug. 10,19
Amplifier	Burgeon	BPA-530	100220	Apr. 18,18	Apr. 18,19
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Feb. 10,18	Feb. 09,19
Test software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A

- NOTES:**
1. The test was performed in 966 Chamber
  2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  3. The FCC Site Registration No. is 749762.



### 4.2.3 TEST PROCEDURE

#### < Below 30MHz >

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meters Semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

#### <30MHz~1GHz >

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

#### NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
4. Margin value = Emission level – Limit value.


### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.




## 4.2.5 TEST SETUP

### Below 30MHz test setup

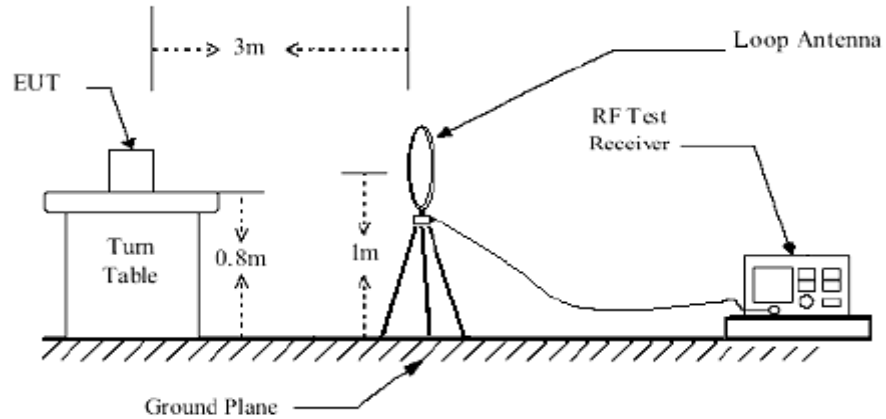

### Below 1GHz test setup

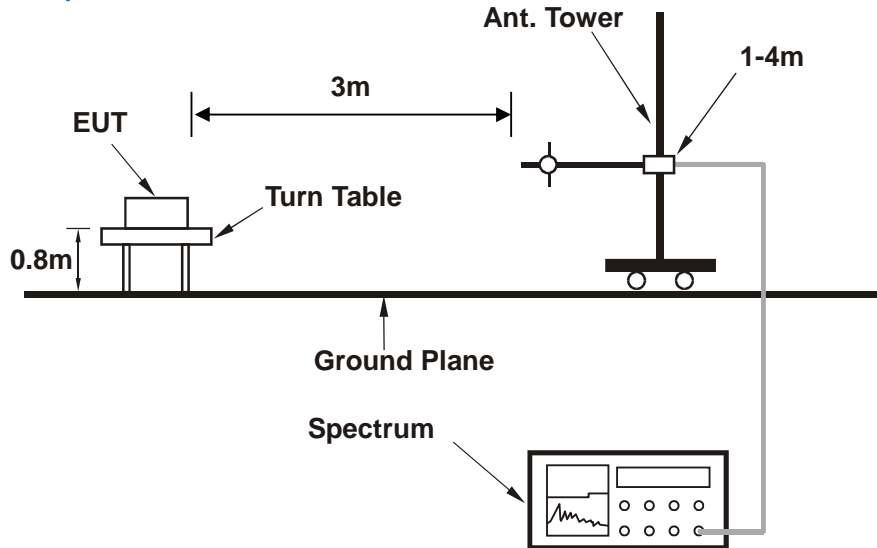

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 4.2.6 EUT OPERATING CONDITIONS

- Turn on the power supply of the EUT.
- EUT was operated according to the type description in manufacturer's specifications or the User's Manual.




### 4.2.7 TEST RESULTS

<b>TEST MODE</b>	Wireless Charging	<b>FREQUENCY RANGE</b>	9 -150KHz
<b>TEST VOLTAGE</b>	DC 12V from Adapter	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Quasi-Peak, 200Hz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 45% RH	<b>TESTED BY:</b> Ming Bai	

ANTENNA POLARITY & TEST DISTANCE: PARALLEL AT 3M								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.0352	-11.08	58.98	47.90	116.67	-68.77	100	0
2	0.056	-11.42	48.62	37.20	112.64	-75.44	100	180
3	0.0591	-11.40	50.02	38.62	112.17	-73.55	100	137
4	0.0658	-11.39	44.89	33.50	111.24	-77.74	100	316
5	0.0864	-11.35	40.98	29.63	108.87	-79.24	100	0
6	0.1085	-11.31	38.90	27.59	106.89	-79.30	100	64
7	0.1417	-11.20	75.29	64.09	104.57	-40.48	100	163

- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 0.009-0.15MHz.
  4. Only emissions significantly above equipment noise floor are reported.

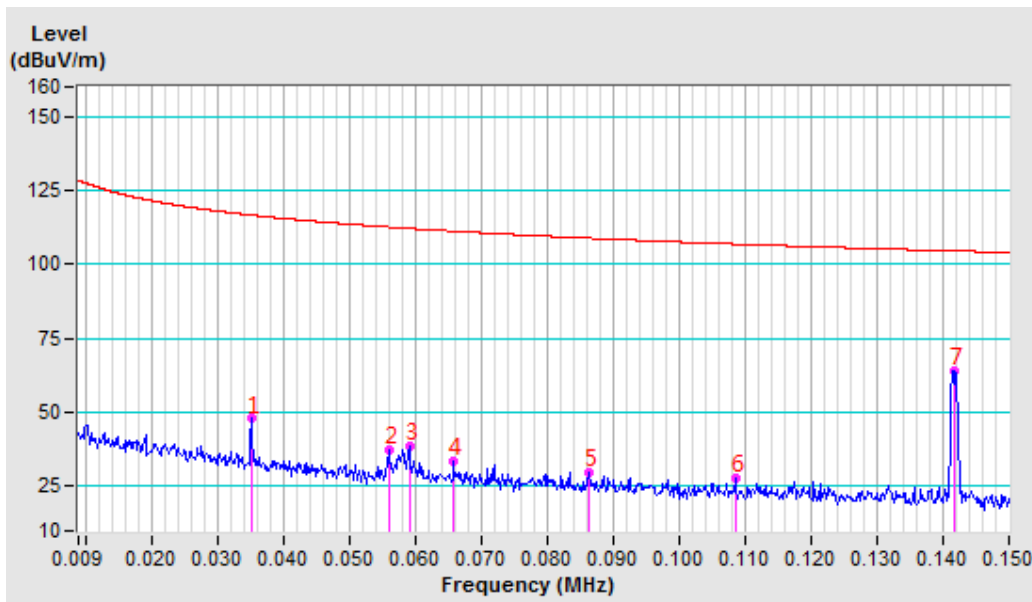




<b>TEST MODE</b>	Wireless Charging	<b>FREQUENCY RANGE</b>	150KHz-30MHz
<b>TEST VOLTAGE</b>	DC 12V from Adapter	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Quasi-Peak, 200Hz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 45% RH	<b>TESTED BY:</b> Ming Bai	

ANTENNA POLARITY & TEST DISTANCE: PARALLEL AT 3M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	7.6461	-10.66	35.77	25.11	69.54	-44.43	100	119
2	10.8176	-10.58	36.55	25.97	69.54	-43.57	100	195
3	14.7914	-10.82	37.07	26.25	69.54	-43.29	100	194
4	18.7465	-10.26	38.68	28.42	69.54	-41.12	100	289
5	20.2838	-10.08	38.41	28.33	69.54	-41.21	100	346
6	23.5897	-10.14	36.63	26.49	69.54	-43.05	100	335
7	7.6461	-10.66	35.77	25.11	69.54	-44.43	100	119


- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 0.15-30MHz.
  4. Only emissions significantly above equipment noise floor are reported.

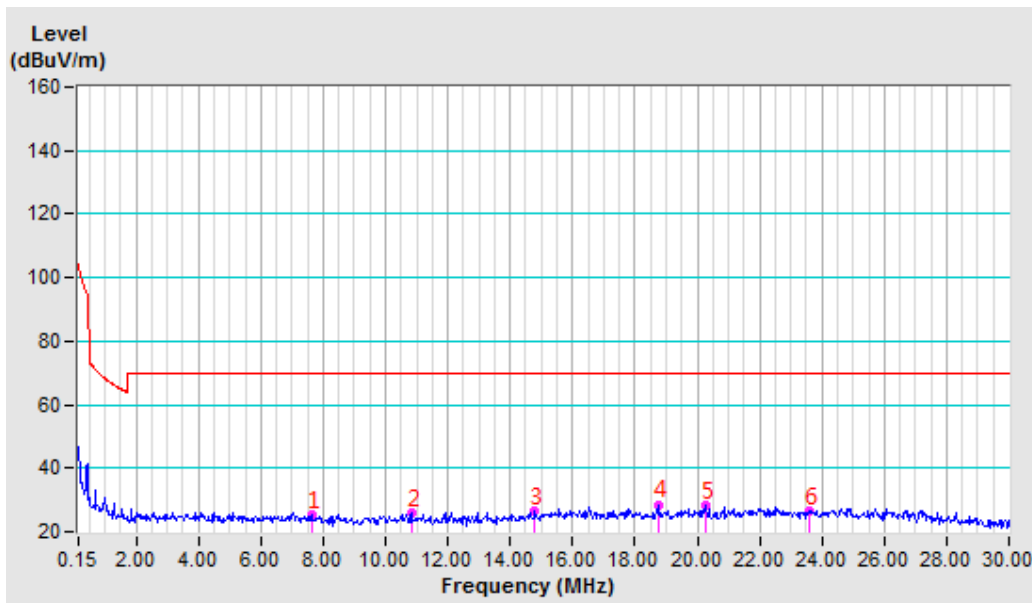

<b>TEST MODE</b>	Wireless Charging	<b>FREQUENCY RANGE</b>	9 -150KHz
<b>TEST VOLTAGE</b>	DC 12V from Adapter	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Quasi-Peak, 200Hz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 45% RH	<b>TESTED BY:</b> Ming Bai	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: PERPENDICYLARL AT 3M</b>								
No .	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.0352	-11.08	58.79	47.71	116.67	-68.96	100	294
2	0.0396	-11.18	57.23	46.05	115.64	-69.59	100	72
3	0.0544	-11.41	52.61	41.20	112.88	-71.68	100	200
4	0.0678	-11.39	45.92	34.53	110.97	-76.44	100	107
5	0.1421	-11.20	73.23	62.03	104.55	-42.52	100	217
6	0.1455	-11.20	67.58	56.38	104.35	-47.97	100	83
7	0.1466	-11.20	58.91	47.71	104.28	-56.57	100	304


- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 0.009-0.15MHz.
  4. Only emissions significantly above equipment noise floor are reported.

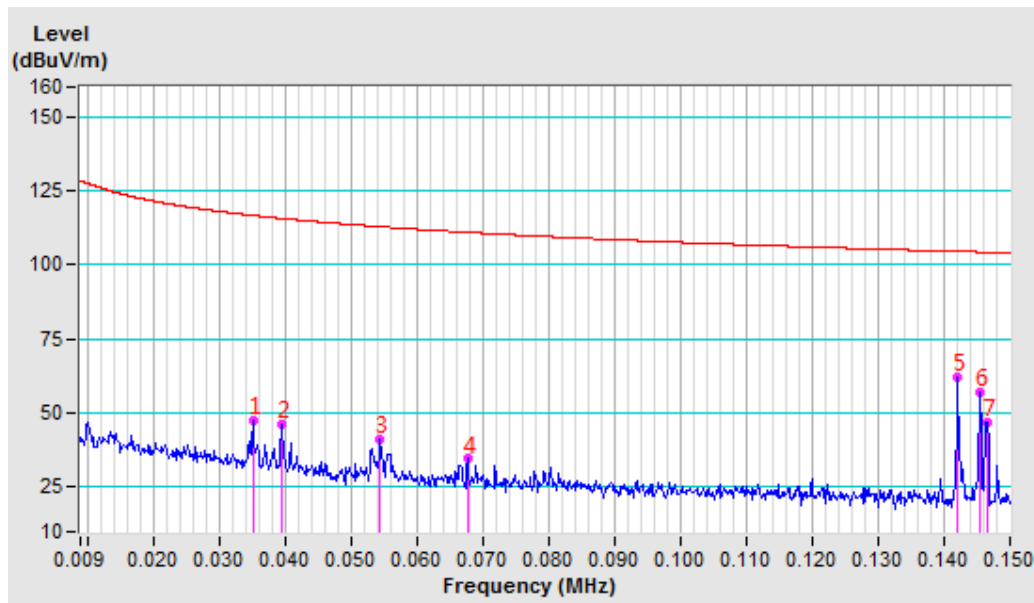

<b>TEST MODE</b>	Wireless Charging	<b>FREQUENCY RANGE</b>	150KHz-30MHz
<b>TEST VOLTAGE</b>	DC 12V from Adapter	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Quasi-Peak, 200Hz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 45% RH	<b>TESTED BY:</b> Ming Bai	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: PERPENDICYLARL AT 3M</b>								
No .	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	7.9371	-10.64	36.89	26.25	69.54	-43.29	100	52
2	9.6647	-10.55	35.98	25.43	69.54	-44.11	100	328
3	13.9892	-10.76	35.35	24.59	69.54	-44.95	100	166
4	18.2876	-10.33	35.00	24.67	69.54	-44.87	100	63
5	20.8622	-10.08	34.22	24.14	69.54	-45.40	100	320
6	23.6382	-10.15	34.80	24.65	69.54	-44.89	100	360
7	7.9371	-10.64	36.89	26.25	69.54	-43.29	100	52


- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 0.15-30MHz
  4. Only emissions significantly above equipment noise floor are reported.

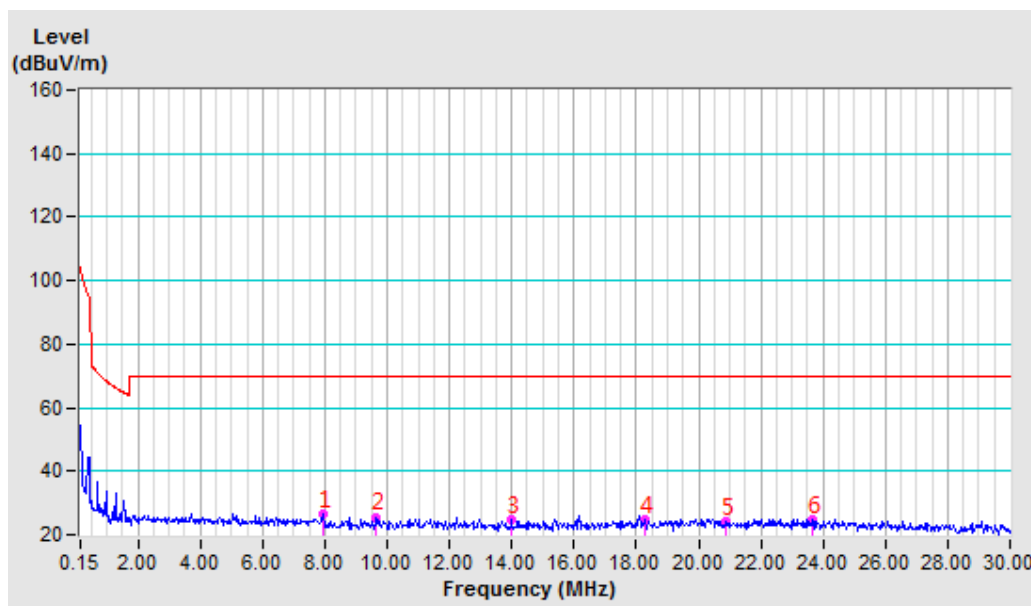

<b>TEST MODE</b>	Wireless Charging	<b>FREQUENCY RANGE</b>	30-1000MHz
<b>TEST VOLTAGE</b>	DC 12V from Adapter	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 45% RH	<b>TESTED BY:</b> Ming Bai	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3M</b>								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	30.00	-10.13	40.89	30.76	40.00	-9.24	200	308
2	177.68	-17.54	47.41	29.87	43.50	-13.63	400	68
3	309.81	-12.31	41.54	29.23	46.00	-16.77	400	252
<b>4</b>	<b>783.93</b>	<b>-2.58</b>	<b>30.24</b>	<b>27.66</b>	<b>46.00</b>	<b>-18.34</b>	<b>400</b>	<b>230</b>
5	880.30	-0.78	31.85	31.07	46.00	-14.93	400	244
6	954.92	-0.27	34.74	34.47	46.00	-11.53	200	328


- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 30MHz to 1000MHz.
  4. Only emissions significantly above equipment noise floor are reported.

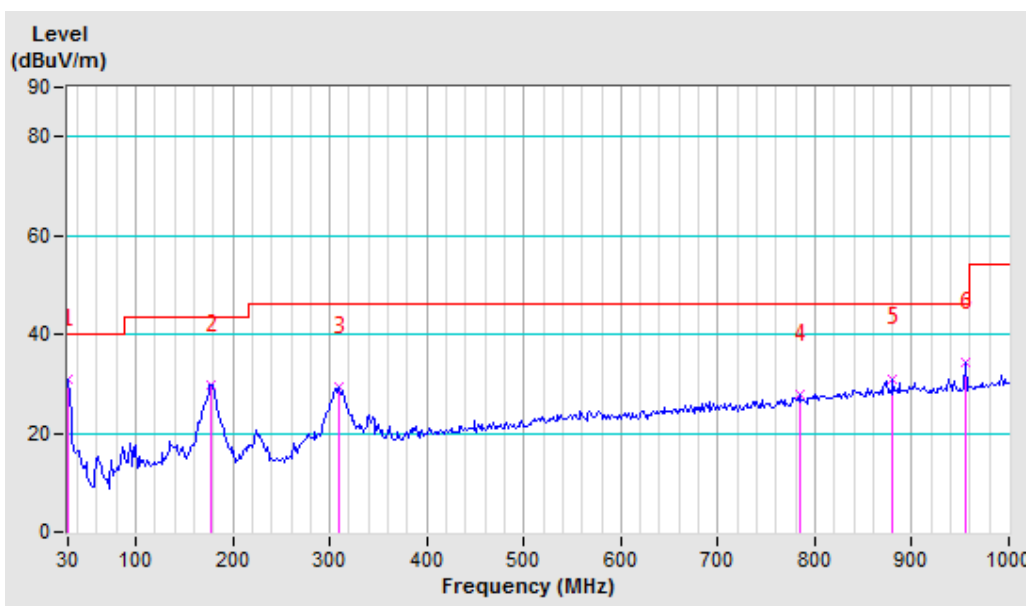

<b>TEST MODE</b>	Wireless Charging	<b>FREQUENCY RANGE</b>	30-1000MHz
<b>TEST VOLTAGE</b>	DC 12V from Adapter	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 45% RH	<b>TESTED BY:</b> Ming Bai	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3M</b>								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	30	-10.13	40.02	29.89	40.00	-10.11	100	225
2	42.44	-17.22	43.42	26.20	40.00	-13.80	100	98
3	92.18	-19.22	44.30	25.08	43.50	-18.42	100	149
4	179.23	-17.64	41.53	23.89	43.50	-19.61	100	102
5	872.53	-0.89	29.90	29.01	46.00	-16.99	100	220
6	954.92	-0.27	34.16	33.89	46.00	-12.11	100	338

- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 30MHz to 1000MHz.
  4. Only emissions significantly above equipment noise floor are reported.

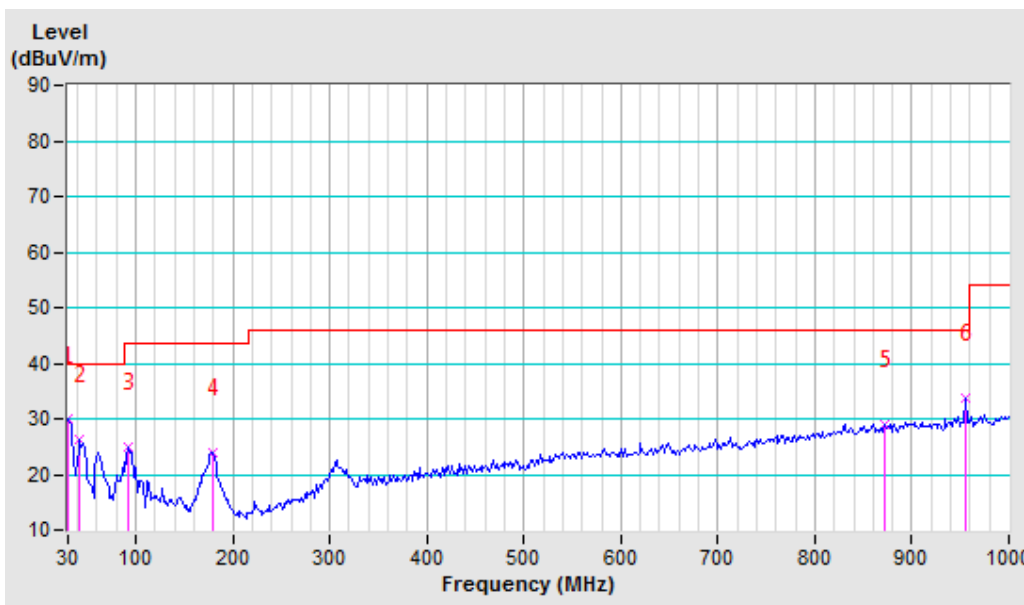

### 4.3. 20dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT

The field strength of any emissions appearing between the band edges and out of band shall be attenuated at least 20 dB below the level of the unmodulated carrier or to the general limits in Section 15.209.

#### 4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	Jun. 13,18	Jun. 12,19
Power Sensor	Keysight	U2021XA	MY55060018	Jun. 13,18	Jun. 12,19
Power Meter	Anritsu	ML2495A	1139001	Apr. 13,18	Apr. 13,19
Power Sensor	Anritsu	MA2411B	1531155	Apr. 13,18	Apr. 13,19
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 17, 18	Oct.16, 19
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.20,18	Sep. 19,19
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 04,18	Nov. 03,19
Agile Signal Generator	Agilent	8645A	Agilent	Oct.27, 18	Oct.26, 19
Spectrum Analyzer	Keysight	N9020A	MY55400499	Mar. 21,18	Mar. 20,19
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Jul.06, 18	Jul. 05, 19
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

**NOTE:**

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.


### 4.3.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.3.5 TEST SETUP



### 4.3.6 EUT OPERATING CONDITION


- Turn on the EUT.
- The EUT tested in charging mode and standby mode respectively.

### 4.3.7 TEST RESULTS

TEST MODE	CHANNEL FREQUENCY (KHz)	20dB BANDWIDTH (Hz)
Wireless Charging	142	742.4

Lower & Upper Test Frequency Point (MHz)	Test Frequency (KHz)	P/F
Lower	141.9826	PASS
Upper	142.7250	PASS

**Test Data:**

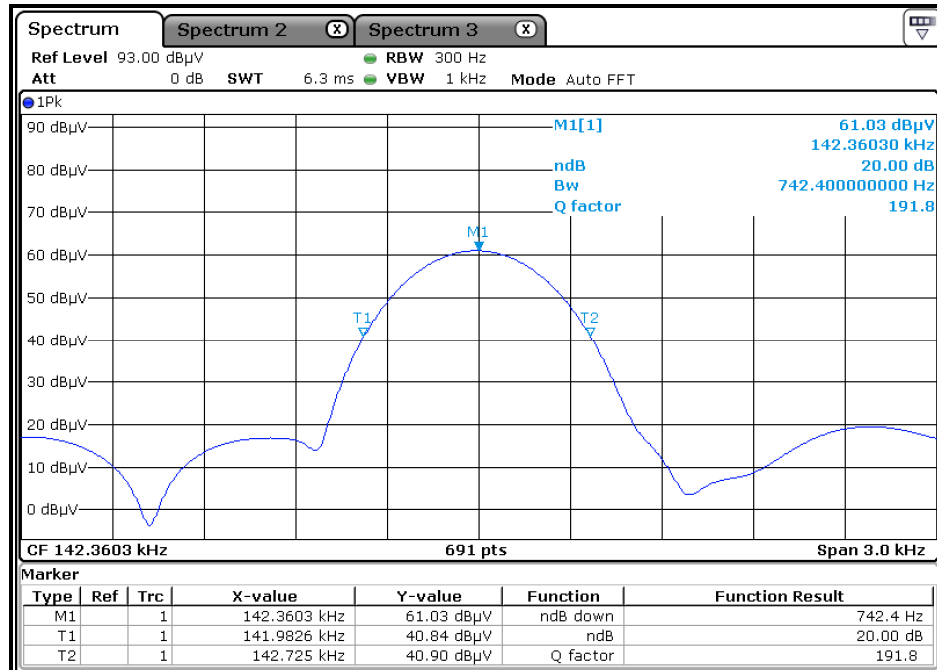






Test Report No.: RF190103N022

TEST MODE	CHANNEL FREQUENCY (KHz)	20dB BANDWIDTH (Hz)
Standby	143	850.9

Lower & Upper Test Frequency Point (MHz)	Test Frequency (KHz)	P/F
Lower	142.9579	PASS
Upper	143.8088	PASS

Test Data:

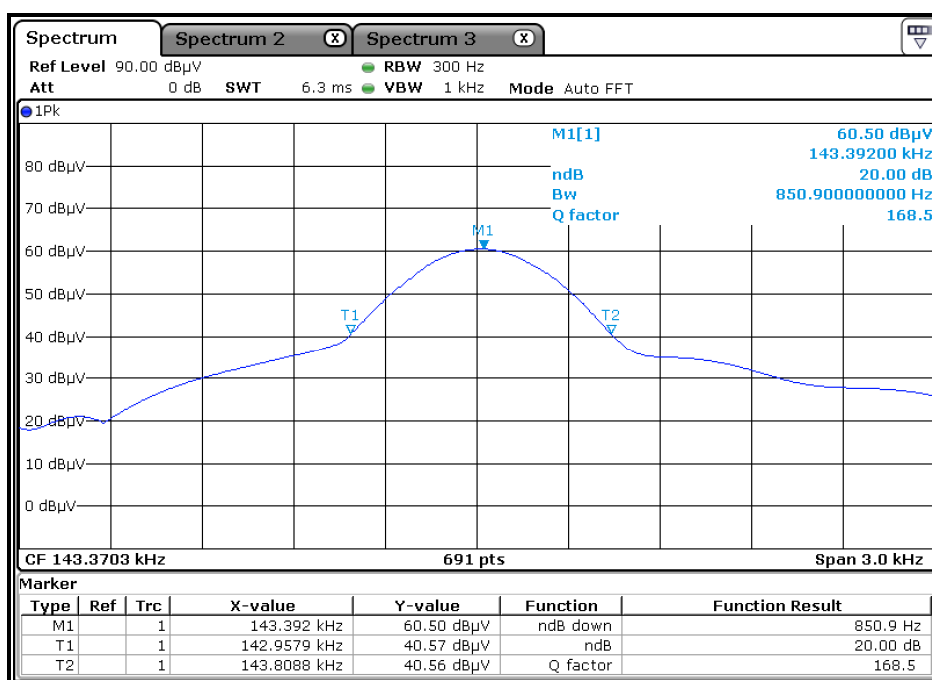



**BUREAU  
VERITAS**

Test Report No.: RF190103N022

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU  
VERITAS**

Test Report No.: RF190103N022

## **6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications were made to the EUT by the lab during the test.

**---END---**