

# FCC TEST REPORT

**Product Name:** Mobile Phone

**Trade Mark:** MI

**Model No.:** MCG3B

**Report Number:** 170803008RFM-1

**Test Standards:** FCC 47 CFR Part 22 Subpart H  
FCC 47 CFR Part 2

**FCC ID:** 2AFZZ-RMS3B

**Test Result:** PASS

**Date of Issue:** August 31, 2017

Prepared for:

**Xiaomi Communications Co.,Ltd.**

**The Rainbow City of China Resources, NO.68, Qinghe Middle Street,  
Haidian District, Beijing, China**

Prepared by:


**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

**16/F, Block A, Building 6, Baoneng Science and Technology Park,  
Qingxiang Road No.1, Longhua New District, Shenzhen, China**


**TEL: +86-755-2823 0888**

**FAX: +86-755-2823 0886**

Tested by:

  
Kevin Liang  
Senior Engineer

Reviewed by:

  
Jim Long  
Senior Supervisor

Approved by:

  
Billy Li  
Technical Director

Date: August 31, 2017

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China  
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com [Http://www.uttlab.com](http://www.uttlab.com)

**Version**

Version No.	Date	Description
V1.0	August 31, 2017	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China  
Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

## CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 CLIENT INFORMATION .....	4
1.2 EUT INFORMATION .....	4
1.2.1 GENERAL DESCRIPTION OF EUT .....	4
1.2.2 DESCRIPTION OF ACCESSORIES.....	5
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD .....	7
1.4 DESCRIPTION OF SUPPORT UNITS .....	8
1.5 TEST LOCATION.....	8
1.6 TEST FACILITY.....	8
1.7 DEVIATION FROM STANDARDS .....	8
1.8 ABNORMALITIES FROM STANDARD CONDITIONS .....	8
1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	9
1.10 MEASUREMENT UNCERTAINTY .....	9
<b>2. TEST SUMMARY .....</b>	<b>10</b>
<b>3. EQUIPMENT LIST .....</b>	<b>11</b>
<b>4. TEST CONFIGURATION .....</b>	<b>12</b>
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING .....	12
4.1.1 NORMAL OR EXTREME TEST CONDITIONS .....	12
4.2 TEST SETUP .....	12
4.2.1 FOR RADIATED EMISSIONS TEST SETUP.....	12
4.2.2 FOR CONDUCTED RF TEST SETUP .....	13
4.3 TEST CHANNELS .....	14
4.4 SYSTEM TEST CONFIGURATION .....	15
4.5 PRE-SCAN.....	15
<b>5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION .....</b>	<b>19</b>
5.1 REFERENCE DOCUMENTS FOR TESTING .....	19
5.2 EFFECTIVE RADIATED POWER (ERP) .....	19
5.3 CONDUCTED OUTPUT POWER .....	21
5.4 99%&26dB BANDWIDTH .....	22
5.5 BAND EDGE AT ANTENNA TERMINALS .....	36
5.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....	47
5.7 FIELD STRENGTH OF SPURIOUS RADIATION.....	54
5.7.1 RADIATED EMISSION TEST DATA (30 MHz TO 1 GHz) .....	55
5.7.2 RADIATED EMISSION TEST DATA (ABOVE 1GHz).....	61
5.8 FREQUENCY STABILITY.....	67
<b>APPENDIX 1 PHOTOS OF TEST SETUP .....</b>	<b>69</b>
<b>APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS.....</b>	<b>69</b>

## 1. GENERAL INFORMATION

### 1.1 CLIENT INFORMATION

Applicant:	Xiaomi Communications Co.,Ltd.
Address of Applicant:	The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China
Manufacturer:	N/A
Address of Manufacturer:	N/A

### 1.2 EUT INFORMATION

#### 1.2.1 General Description of EUT

Product Name:	Mobile Phone	
Model No.:	MCG3B	
Add. Model No.:	N/A	
Trade Mark:	MI	
DUT Stage:	Identical Prototype	
EUT Supports Function:	GSM Bands:	GSM850/1900
	UTRA Bands:	Band II/Band V
	E-UTRA Bands:	FDD Band 4/ Band 5/ Band 7 TDD Band 38
	2.4 GHz ISM Band:	IEEE 802.11b/g/n Bluetooth: V3.0+HS & V4.1 LE
	RNSS Bands:	1559 MHz to 1610 MHz
	BSR:	GPS/GLONASS
	VHF Band II	FM
Software Version:	MIUI8	
Hardware Version:	P2.0	
Sample Received Date:	August 4, 2017	
Sample Tested Date:	August 4, 2017 to August 30, 2017	

### 1.2.2 Description of Accessories

Adapter(1)	
Trade Mark:	XIAOMI
Model No.:	MDY-09-EE
Input:	100-240 V~50/60 Hz 0.2A Max
Output:	5.0 V == 1.0 A
AC Cable:	N/A
DC Cable:	0.8 Meter, Shielded without ferrite
Manufacturer:	Dongguan Aohai Power Technology Co., Ltd.

Adapter(2)	
Trade Mark:	XIAOMI
Model No.:	MDY-09-EE
Input:	100-240 V~50/60 Hz 0.2A Max
Output:	5.0 V == 1.0 A
AC Cable:	N/A
DC Cable:	0.8 Meter, Shielded without ferrite
Manufacturer:	Dongguan Aohai Power Technology Co., Ltd.

Battery(1)	
Trade Mark:	MI
Model No.:	BN34
Battery Type:	Lithium-ion Rechargeable Battery
Rated Voltage:	3.85 Vdc
Limited Charge Voltage:	4.4 Vdc
Rated Capacity:	2910mAh
Manufacturer:	SCUD(Fujian)Electronics Co., Ltd.

Battery(2)	
Trade Mark:	MI
Model No.:	BN34
Battery Type:	Lithium-ion Rechargeable Battery
Rated Voltage:	3.85 Vdc
Limited Charge Voltage:	4.4 Vdc
Rated Capacity:	2910mAh
Manufacturer:	Sunwoda Electronic Co., Ltd.

Cable(1)	
Trade Mark:	N/A
Model No.:	KLC-2639
Description:	USB Micro-B Plug Cable
Cable Type:	Shielded without ferrite
Length:	0.8 Meter

<b>Cable(2)</b>	
<b>Trade Mark:</b>	N/A
<b>Model No.:</b>	0US231XI0015
<b>Description:</b>	USB Micro-B Plug Cable
<b>Cable Type:</b>	Shielded without ferrite
<b>Length:</b>	0.8 Meter



### 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

<b>Support Networks:</b>	GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA, DC-HSDPA		
<b>Type of Modulation:</b>	GSM/GPRS:	GMSK	
	EDGE:	GMSK, 8PSK	
	WCDMA	BPSK	
	HSDPA/DC-HSDPA:	QPSK, 16QAM	
	HSUPA:	QPSK,	
	LTE Band 5:	QPSK, 16QAM	
<b>Frequency Range:</b>	GSM/GPRS/EDGE 850:	824.2-848.8 MHz	
	WCDMA Band V:	826.4-846.6 MHz	
	LTE Band 5 (Channel Bandwidth: 1.4 MHz):	824.7-848.3 MHz	
	LTE Band 5 (Channel Bandwidth: 3 MHz):	825.5-847.5MHz	
	LTE Band 5 (Channel Bandwidth: 5 MHz):	826.5-846.5 MHz	
	LTE Band 5 (Channel Bandwidth: 10 MHz):	829-844 MHz	
<b>Max RF Output Power:</b>	GSM/GPRS 850:	33.31dBm	
	EDGE 850:	26.68dBm	
	WCDMA Band V:	23.35dBm	
	LTE Band 5 (Channel Bandwidth: 1.4 MHz):	23.34dBm	
	LTE Band 5 (Channel Bandwidth: 3 MHz):	22.83dBm	
	LTE Band 5 (Channel Bandwidth: 5 MHz):	23.44dBm	
	LTE Band 5 (Channel Bandwidth: 10 MHz):	23.47dBm	
<b>Type of Emission:</b>	GSM/GPRS 850:	247KGXW	
	EDGE 850:	244KG7W	
	WCDMA Band V:	4M12F9W	
	LTE Band 5 QPSK	Channel Bandwidth: 1.4 MHz	1M11G7D
		Channel Bandwidth: 3 MHz	2M74G7D
		Channel Bandwidth: 5 MHz	4M53G7D
		Channel Bandwidth: 10 MHz	9M00G7D
	LTE Band 5 16QAM	Channel Bandwidth: 1.4 MHz	1M10W7D
		Channel Bandwidth: 3 MHz	2M74W7D
		Channel Bandwidth: 5 MHz	4M62W7D
		Channel Bandwidth: 10 MHz	9M03W7D
<b>IEMI:</b>	Radiation: 865183030024549, 865183030024556		
	Conducted: 865183030024846, 865183030024853		
<b>Antenna Type:</b>	PIFA Antenna		
<b>Antenna Gain:</b>	-1 dBi		
<b>GPRS/EDGE Class:</b>	Class 33		
<b>Normal Test Voltage:</b>	3.85 Vdc		
<b>Extreme Test Voltage:</b>	3.6 to 4.4Vdc		
<b>Extreme Test Temperature:</b>	-30 °C to +50 °C		

## 1.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested independently

### 1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
-	-	-	-	-

### 2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.30 Meter	UnionTrust

## 1.5 TEST LOCATION

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

## 1.6 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

### **CNAS-Lab Code: L9069**

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

### **IC-Registration No.: 21600-1**

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 21600-1.

### **A2LA-Lab Certificate No.: 4312.01**

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### **FCC Accredited Lab.**

Designation Number: CN1194

Test Firm Registration Number: 259480

## 1.7 DEVIATION FROM STANDARDS

None.

## 1.8 ABNORMALITIES FROM STANDARD CONDITIONS

None.

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China  
Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

## 1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

## 1.10 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.8 dB
2	Conducted emission 150KHz-30MHz	±3.4 dB
3	Radiated emission 9KHz-30MHz	±4.9 dB
4	Radiated emission 30MHz-1GHz	±4.7 dB
5	Radiated emission 1GHz-18GHz	±5.1 dB
6	Radiated emission 18GHz-26GHz	±5.2 dB
7	Radiated emission 26GHz-40GHz	±5.2 dB

## 2. TEST SUMMARY

FCC 47 CFR Part 22 Subpart H Test Cases			
Test Item	Test Requirement	Test Method	Result
<b>Effective Radiated Power (ERP)</b>	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI/TIA/EIA-603-D 2010 & KDB 971168 D01v02r02	PASS
<b>Conducted Output Power</b>	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI/TIA/EIA-603-D 2010 & KDB 971168 D01v02r02	PASS
<b>99%&amp;26dB Bandwidth</b>	FCC 47 CFR Part 2.1049(h)	ANSI/TIA/EIA-603-D 2010 & KDB 971168 D01v02r02	PASS
<b>Band Edge at antenna terminals</b>	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)	ANSI/TIA/EIA-603-D 2010 & KDB 971168 D01v02r02	PASS
<b>Spurious emissions at antenna terminals</b>	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)(b)	ANSI/TIA/EIA-603-D 2010 & KDB 971168 D01v02r02	PASS
<b>Field strength of spurious radiation</b>	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 22.917(a)(b)	ANSI/TIA/EIA-603-D 2010 & KDB 971168 D01v02r02	PASS
<b>Frequency stability</b>	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 22.355	ANSI/TIA/EIA-603-D 2010 & KDB 971168 D01v02r02	PASS

**Note:**

1) N/A: In this whole report not application.

### 3. EQUIPMENT LIST

Radiated Emission Test Equipment List							
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)	
<input checked="" type="checkbox"/>	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Dec. 20, 2015	Dec. 19, 2018	
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	Dec. 22, 2016	Dec. 22, 2017	
<input type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Dec. 22, 2016	Dec. 22, 2017	
<input type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	Jun. 24, 2015	Jun. 23, 2018	
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Jul. 24, 2015	Jul. 23, 2018	
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	Dec. 22, 2016	Dec. 22, 2017	
<input checked="" type="checkbox"/>	Broadband Antenna (Pre-amplifier)	ETS-LINDGREN	3142E-PA	00201891	Dec. 30, 2016	Dec. 30, 2017	
<input checked="" type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3117	00164202	Jul. 24, 2015	Jul. 23, 2018	
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	Dec. 30, 2016	Dec. 30, 2017	
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3116C	00200180	Jul. 28, 2015	Jul. 27, 2018	
<input type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Jul. 29, 2015	Jul. 28, 2018	
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A	
<input checked="" type="checkbox"/>	Highpass Filter (1.2GHz~18GHz)	Micro-Tronics	HPM50108	G552	Jan. 19, 2017	Jan. 19, 2018	
<input type="checkbox"/>	Highpass Filter (3GHz~18GHz)	Micro-Tronics	HPM50117	G005	Jan. 30, 2017	Jan. 30, 2018	
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323			

2/3/4G RF Test System Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	Spectrum Analyzer	R&S	FSP 13	1164.4391.13	Mar. 22, 2017	Mar. 21, 2018
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Dec. 22, 2016	Dec. 22, 2017
<input type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Dec. 22, 2016	Dec. 22, 2017
<input checked="" type="checkbox"/>	Wideband Radio Communication Tester	R&S	CMW500	116254	Mar. 22, 2017	Mar. 21, 2018
<input checked="" type="checkbox"/>	Universal Radio Communication Tester	R&S	CMU200	114713	Dec. 22, 2016	Dec. 22, 2017
<input checked="" type="checkbox"/>	DC Source	KIKUSUI	PWR400L	LK003024	Sep. 21, 2016	Sep. 20, 2017
<input checked="" type="checkbox"/>	Temp & Humidity chamber	Votisch	VT4002	58566133290 020	Jun. 19, 2017	Jun. 18, 2018
<input type="checkbox"/>	Temp & Humidity chamber	Ispec	GL(U)04KA(W)	1692H201P3	Sep. 21, 2016	Sep. 20, 2017
<input checked="" type="checkbox"/>	Test Software	ECIT	AutomationTestSystem			Software Version: 2.170530

## 4. TEST CONFIGURATION

### 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

#### 4.1.1 Normal or Extreme Test Conditions

Test Environment		Selected Values During Tests		
Test Condition	Ambient			
	Temperature (°C)	Voltage (V)	Relative Humidity (%)	
TN/VN	+15 to +35	3.85	20 to 75	
TL/VL	-30	3.6	20 to 75	
TH/VL	+50	3.6	20 to 75	
TL/VH	-30	4.4	20 to 75	
TH/VH	+50	4.4	20 to 75	

**Remark:**

- 1) The EUT just work in such extreme temperature of -30 °C to +50 °C and the extreme voltage of 3.6 V to 4.4 V, so here the EUT is tested in the temperature of -30 °C to +50 °C and the voltage of 3.6 V to 4.4 V.
- 2) VN: Normal Voltage; TN: Normal Temperature;  
TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;  
VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.

### 4.2 TEST SETUP

#### 4.2.1 For Radiated Emissions test setup

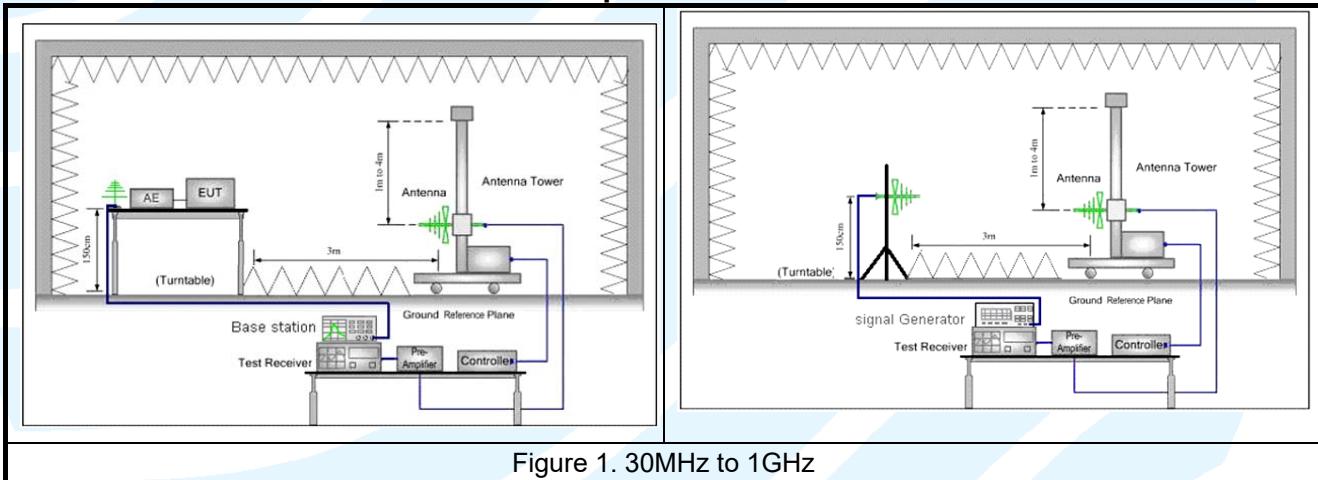


Figure 1. 30MHz to 1GHz


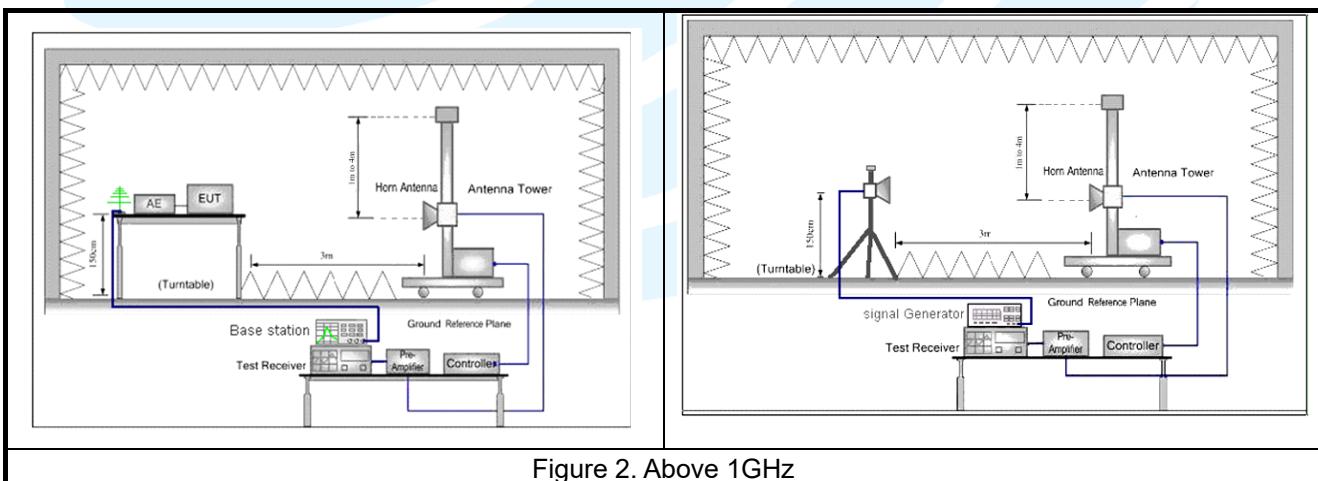


Figure 2. Above 1GHz

#### 4.2.2 For Conducted RF test setup

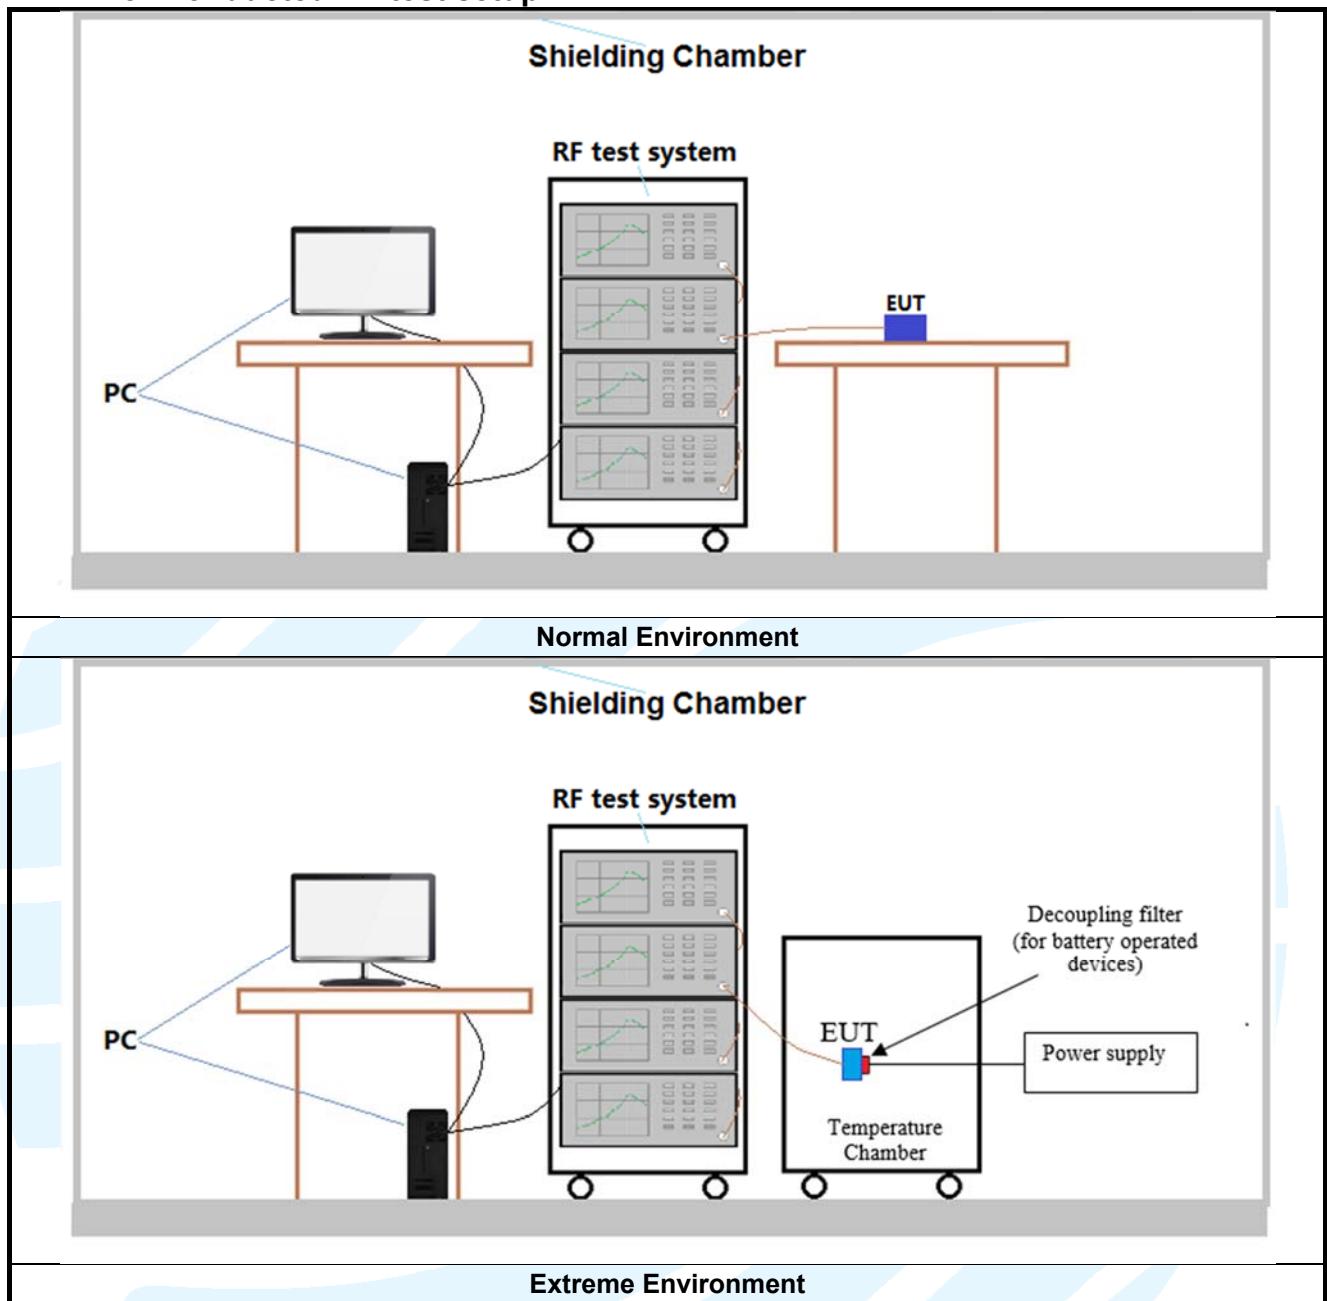

### 4.3 TEST CHANNELS

Band	Tx/Rx Frequency	RF Channel		
		Low(L)	Middle(M)	High(H)
GSM/GPRS/ EDGE850	Tx (824 MHz ~ 849 MHz)	Channel 128	Channel 190	Channel 251
		824.2 MHz	836.6 MHz	848.8 MHz
WCDMA band V	Tx (824 MHz ~ 849 MHz)	Channel 4132	Channel 4182	Channel 4233
		826.4 MHz	836.4 MHz	846.6 MHz

Band	Test Frequency ID	Bandwidth (MHz)	Number [UL]	Frequency of Uplink (MHz)
LTE band 5 TX:824–849 MHz	Low Range	1.4	20407	824.7
		3	20415	825.5
		5	20425	826.5
		10	20450	829
	Middle Range	1.4/3/5/10	20525	836.5
	High Range	1.4	20643	848.3
		3	20635	847.5
		5	20625	846.5
		10	20600	844

## 4.4 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.85Vdc rechargeable Li-on battery. Only the worst case data were recorded in this test report.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, X/Y/Z axis, and antenna ports.

The worst case was found when positioned as the table below.

Band	Mode	Antenna Port	Worst-case axis positioning
GSM 850	1TX	Chain 0	Y axis
EDGE 850	1TX	Chain 0	Y axis
WCDMA Band V	1TX	Chain 0	Y axis
LTE Band 5	1TX	Chain 0	Y axis

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

## 4.5 PRE-SCAN

**Pre-scan under all rate at lowest middle and highest channel, find the transmitter power as below:**  
SIM 1 Card Conducted transmitter power measurement result.

GSM 850 Maximum Average Power (dBm)			
Channel	128	190	251
Frequency(MHz)	824.2 MHz	836.6 MHz	848.8 MHz
GSM (GMSK, 1Tx-slot)	32.93	33.15	<b>33.31</b>
GPRS (GMSK, 1Tx-slot)	32.96	33.19	33.06
GPRS (GMSK, 2Tx-slot)	32.66	32.54	32.73
GPRS (GMSK, 3Tx-slot)	30.56	30.82	30.81
GPRS (GMSK, 4Tx-slot)	29.55	29.66	29.76
EDGE (8PSK, 1Tx-slot)	<b>26.68</b>	26.62	26.67
EDGE (8PSK, 2Tx-slot)	26.13	26.07	26.19
EDGE (8PSK, 3Tx-slot)	25.11	25.05	25.08
EDGE (8PSK, 4Tx-slot)	24.03	24.07	24.12

WCDMA Band V Maximum Average Power (dBm)			
Channel	4132	4182	4233
Frequency(MHz)	826.4 MHz	836.4 MHz	846.6 MHz
RMC 12.2K	23.23	23.31	<b>23.35</b>
HSDPA Subtest-1	22.28	22.38	22.34
HSDPA Subtest-2	22.26	22.36	22.30
HSDPA Subtest-3	21.77	21.73	21.68
HSDPA Subtest-4	21.67	21.63	21.60
HSUPA Subtest-1	21.73	21.86	21.79
HSUPA Subtest-2	19.70	19.85	19.74
HSUPA Subtest-3	20.71	20.85	20.74
HSUPA Subtest-4	19.71	19.85	19.74
HSUPA Subtest-5	21.70	21.88	21.85
DC-HSDPA Subtest-1	22.19	22.27	22.31
DC-HSDPA Subtest-2	22.19	22.28	22.27
DC-HSDPA Subtest-3	21.76	21.72	21.66
DC-HSDPA Subtest-4	21.66	21.60	21.58

Modulation	LTE Band 5 Maximum Average Power (dBm)									
	RB		Test Channel			RB		Test Channel		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
Channel Bandwidth: 1.4 MHz										Channel Bandwidth: 3 MHz
QPSK	1	0	23.00	23.10	23.21	1	0	23.04	23.14	23.25
	1	2	23.31	23.33	23.34	1	7	23.35	23.37	23.38
	1	5	23.13	23.32	23.14	1	14	23.17	23.36	23.18
	3	0	22.98	23.08	23.19	8	0	22.31	22.27	22.36
	3	1	23.29	23.31	23.32	8	3	22.24	22.21	22.27
	3	3	23.11	23.30	23.12	8	7	22.19	22.25	22.29
	6	0	22.23	22.21	22.26	15	0	22.27	22.25	22.30
16QAM	1	0	21.70	22.70	22.71	1	0	21.74	22.74	22.75
	1	2	21.77	22.47	22.63	1	7	21.81	22.51	22.67
	1	5	21.91	22.43	22.79	1	14	21.95	22.47	22.83
	3	0	21.69	22.69	22.70	8	0	21.25	21.28	21.23
	3	1	21.76	22.46	22.62	8	3	21.24	21.21	21.29
	3	3	21.90	22.42	22.78	8	7	21.21	21.16	21.34
	6	0	21.11	21.12	21.12	15	0	21.15	21.16	21.16
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz					
QPSK	1	0	23.10	23.20	23.31	1	0	23.13	23.23	23.34
	1	12	23.41	23.43	23.44	1	24	23.44	23.46	23.47
	1	24	23.23	23.42	23.24	1	49	23.26	23.45	23.27
	12	0	22.37	22.33	22.42	25	0	22.40	22.36	22.45
	12	6	22.30	22.27	22.33	25	12	22.33	22.30	22.36
	12	13	22.25	22.31	22.35	25	25	22.28	22.34	22.38
	25	0	22.33	22.31	22.36	50	0	22.36	22.34	22.39
16QAM	1	0	21.80	22.80	22.81	1	0	21.83	22.83	22.84
	1	12	21.87	22.57	22.73	1	24	21.90	22.60	22.76
	1	24	22.01	22.53	22.89	1	49	22.04	22.56	22.92
	12	0	21.31	21.34	21.29	25	0	21.34	21.37	21.32
	12	6	21.30	21.27	21.35	25	12	21.33	21.30	21.38
	12	13	21.27	21.22	21.40	25	25	21.30	21.25	21.43
	25	0	21.21	21.22	21.22	50	0	21.24	21.25	21.25

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the worse mode applicability and tested channel detail as below:

Band	Radiated	Conducted
GSM/GPRS/ EDGE 850	1) GSM (GMSK, 1Tx-slot) Link 2) GPRS (GMSK, 1Tx-slot) Link 3) EDGE (8PSK, 1Tx-slot) Link	1) GSM (GMSK,1Tx-slot) Link 2) GPRS (GMSK, 1Tx-slot) Link 3) EDGE (8PSK, 1Tx-slot) Link
WCDMA Band V	RMC 12.2Kbps Link	RMC 12.2Kbps Link

LTE worse case mode applicability and tested channel detail as below:

Item	Channel Bandwidth(MHz)						Modulation			RB #			Test		
	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
<b>LTE Band 5</b>															
Effective Radiated Power	☒	☒	☒	☒	--	--	☒	☒	☒	☒	☒	☐	☒	☒	☒
Conducted output power	☒	☒	☒	☒	--	--	☒	☒	☒	☒	☒	☒	☒	☒	☒
99%&26dB Bandwidth	☒	☒	☒	☒	--	--	☒	☒	☒	☒	☐	☒	☒	☒	☒
Band Edge at antenna terminals	☒	☒	☒	☒	--	--	☒	☒	☒	☒	☒	☒	☒	☒	☒
Spurious emissions at antenna terminals	☒	☒	☒	☒	--	--	☒	☒	☒	☒	☒	☐	☒	☒	☒
Field strength of spurious radiation	☒	☒	☒	☒	--	--	☒	☐	☐	☒	☒	☐	☒	☒	☐
Frequency stability	☐	☐	☐	☒	--	--	☒	☐	☐	☐	☐	☒	☒	☒	☐

Remark:

The mark “☒” means is chosen for testing;

The mark “☐” means is not chosen for testing;

The mark “--” means is not supported bandwidth.

## 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

### 5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2 Subpart J	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 22 Subpart H	Cellular Radiotelephone Service
3	ANSI/TIA-603-D 2010	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
4	KDB 971168 D01	KDB 971168 D01 Power Meas License Digital Systems v02r02

### 5.2 EFFECTIVE RADIATED POWER (ERP)

**Test Requirement:** FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)

**Test Method:** KDB 971168 D01v02r02 & ANSI/TIA/EIA-603-D 2010

**Limit:**

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

**Test Procedure:**

Test procedure as below:

- 1) The EUT was powered ON and placed on a 0.8/1.5m high table at a 3 meter semi/fully Anechoic Chamber. The antenna of the transmitter was extended to its maximum length. Modulation mode and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 4) Steps 1) to 3) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 5) The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 6) A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 3) is obtained for this set of conditions.
- 7) The output power into the substitution antenna was then measured.
- 8) Steps 6) and 7) were repeated with both antennas polarized.
- 9) Calculate power in dBm by the following formula:

$$\text{ERP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$

$$\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$

$$\text{EIRP} = \text{ERP} + 2.15\text{dB}$$

where:

Pg is the generator output power into the substitution antenna.

- 10) Test the EUT in the lowest channel, the middle channel the Highest channel
- 11) The radiation measurements are performed in X, Y, Z axis positioning for EUT operation mode, and found the Y axis positioning which it is worse case.
- 12) Repeat above procedures until all frequencies measured was complete.

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Peak	100kHz	300kHz	Peak
	Above 1GHz	Peak	1MHz	3MHz	Peak

**Test Setup:** Refer to section 4.2.1 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Link mode

**Test Results:** Pass

**Test Data:** See table below

Maximum ERP (dBm)						
Channel	GSM 1Tx-slot	EDGE 1Tx-slot	WCDMA RMC 12.2Kbps	CDMA2000 BC0 1xRTT	Limit (dBm)	Result
Lowest	28.72	22.32	19.37	--	38.45	Pass
Middle	29.02	22.12	19.42	--	38.45	Pass
Highest	29.33	21.89	19.54	--	38.45	Pass

LTE Band 5 Maximum EIRP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
<b>Channel Bandwidth: 1.4MHz</b>					
Lowest	18.33	17.43	--	38.45	Pass
Middle	18.37	17.55	--	38.45	Pass
Highest	18.52	17.63	--	38.45	Pass
<b>Channel Bandwidth: 3MHz</b>					
Lowest	18.44	17.27	--	38.45	Pass
Middle	18.48	17.36	--	38.45	Pass
Highest	18.51	17.67	--	38.45	Pass
<b>Channel Bandwidth: 5MHz</b>					
Lowest	19.03	18.18	--	38.45	Pass
Middle	19.25	17.98	--	38.45	Pass
Highest	19.43	18.33	--	38.45	Pass
<b>Channel Bandwidth: 10MHz</b>					
Lowest	19.34	18.88	--	38.45	Pass
Middle	19.56	18.92	--	38.45	Pass
Highest	19.76	19.03	--	38.45	Pass

## 5.3 CONDUCTED OUTPUT POWER

**Test Requirement:** FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)

**Test Method:** ANSI/TIA/EIA-603-D 2010 & KDB 971168 D01v02r02

**Limit:**

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

**Test Procedure:**

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA2000, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.2.2 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Link mode

**Test Results:** Pass

**Test Data:** The full result refer to section 4.5 for details.

## 5.4 99%&26DB BANDWIDTH

**Test Requirement:** FCC 47 CFR Part 2.1049(h) & FCC 47 CFR Part 22.917(b)

**Test Method:** ANSI/TIA/EIA-603-D 2010 & KDB 971168 D01v02r02

**Limit:** No Limit

**Test Procedure:**

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The 99% and -26dB bandwidths were also measured and recorded.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.2.2 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Link mode

**Test Results:** Pass

**Test Data:** See table below

99% & 26 dB Bandwidth				
Test Mode	Channel	Frequency (MHz)	26 dB BW (kHz)	99% BW (kHz)
GSM 1Tx-slot	128	824.2	316.90	247.47
	190	836.6	314.00	244.57
	251	848.8	311.10	246.02
EDGE 1Tx-slot	128	824.2	301.00	243.13
	190	836.6	290.90	244.57
	251	848.8	308.20	241.68

99% & 26 dB Bandwidth				
Test Mode	Channel	Frequency (MHz)	26 dB BW (MHz)	99% BW (MHz)
WCDMA RMC 12.2Kbps	4132	826.4	4.718	4.124
	4182	836.4	4.718	4.124
	4233	846.6	4.703	4.110


LTE Band 5								
Channel	RB Configuration		26 dB BW (MHz)			99% BW (MHz)		
	Size	Offset	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
Channel Bandwidth: 1.4 MHz								
Lowest	6	0	1.32	1.29	--	1.11	1.10	--
Middle	6	0	1.28	1.30	--	1.10	1.10	--
Highest	6	0	1.33	1.31	--	1.10	1.10	--
Channel Bandwidth: 3 MHz								
Lowest	15	0	3.06	3.05	--	2.73	2.74	--
Middle	15	0	3.06	3.06	--	2.74	2.72	--
Highest	15	0	3.05	3.06	--	2.74	2.73	--
Channel Bandwidth: 5 MHz								
Lowest	25	0	5.02	4.99	--	4.53	4.50	--
Middle	25	0	5.05	5.04	--	4.50	4.53	--
Highest	25	0	5.01	5.05	--	4.49	4.62	--


Channel Bandwidth: 10 MHz								
Lowest	50	0	10.01	9.90	--	9.00	9.03	--
Middle	50	0	9.99	9.99	--	8.97	8.97	--
Highest	50	0	10.01	10.01	--	9.00	9.00	--





The test plot as follows:


26 dB Bandwidth

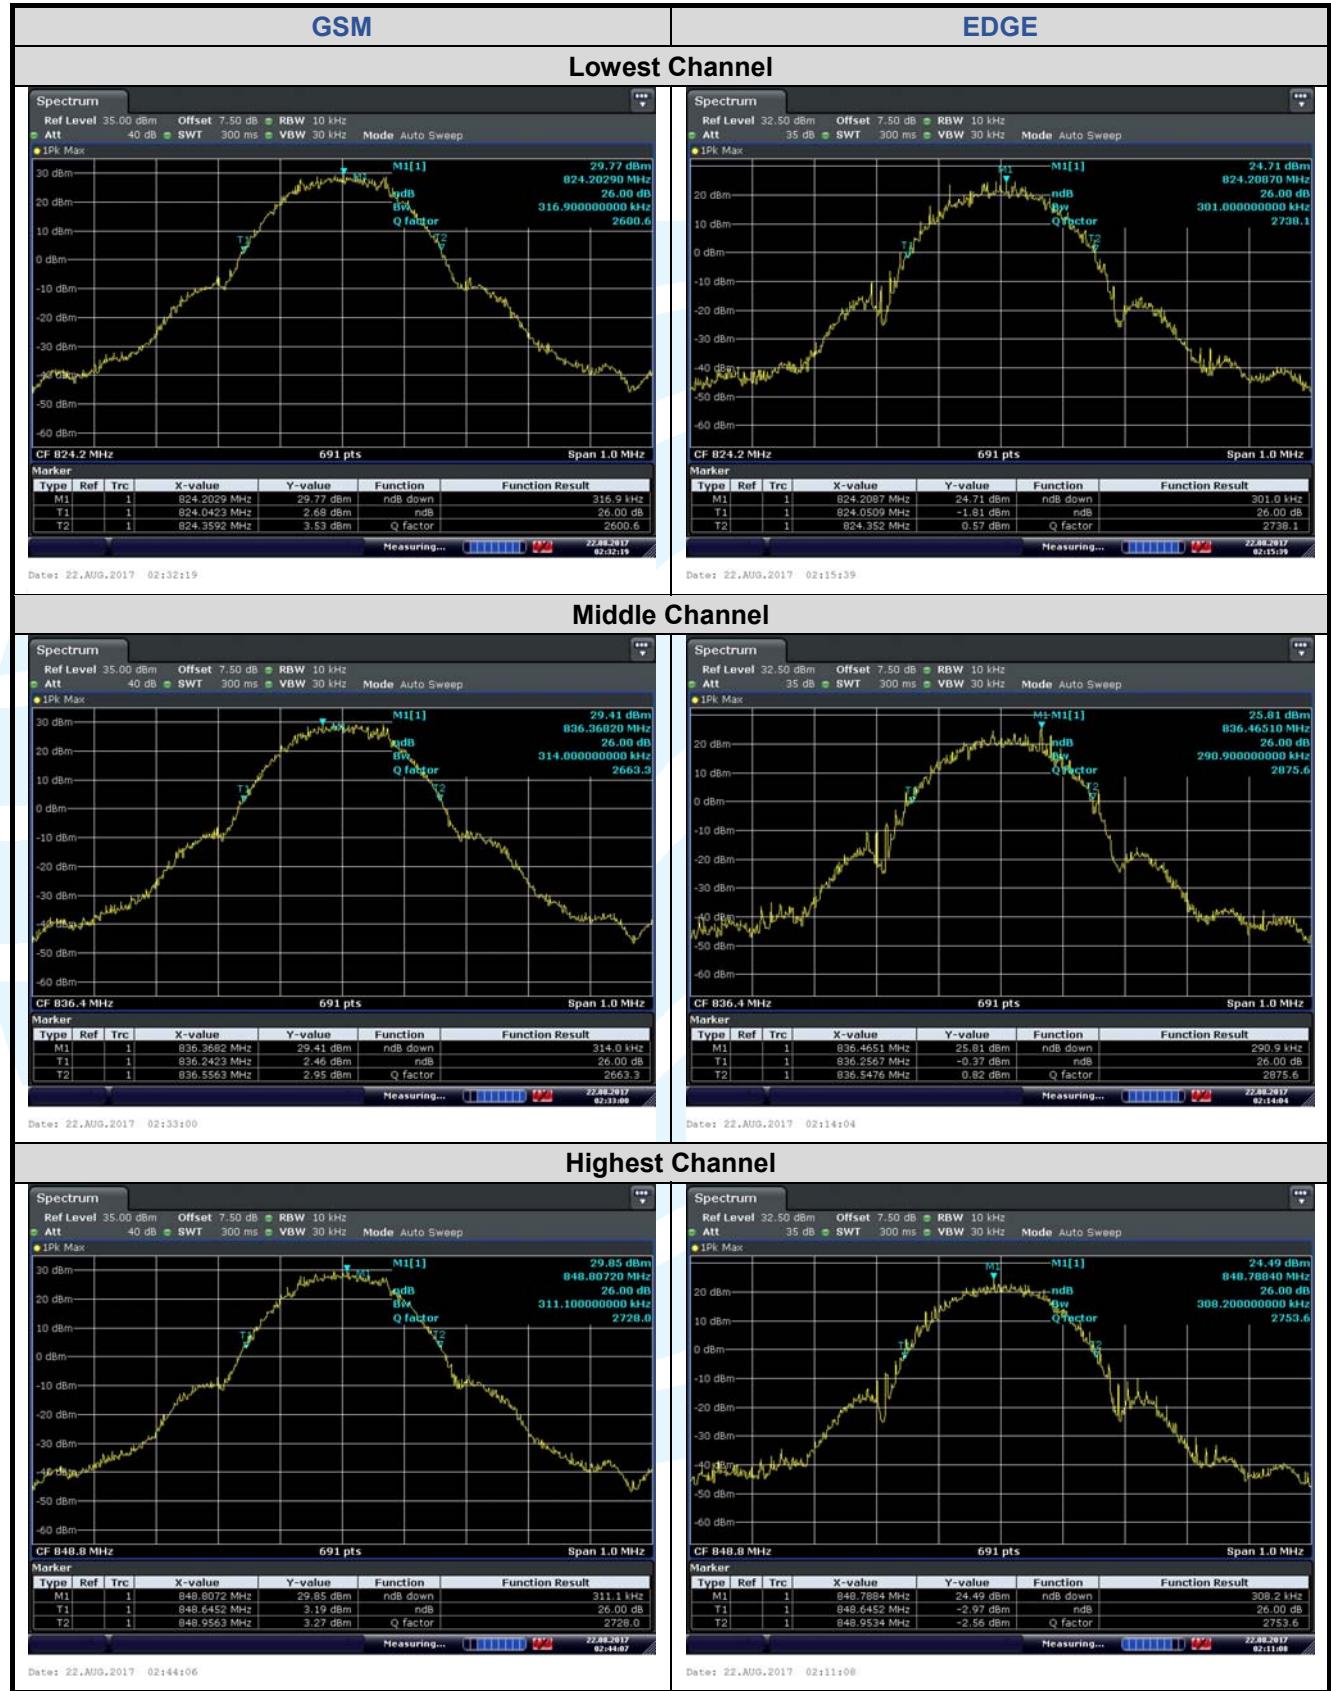


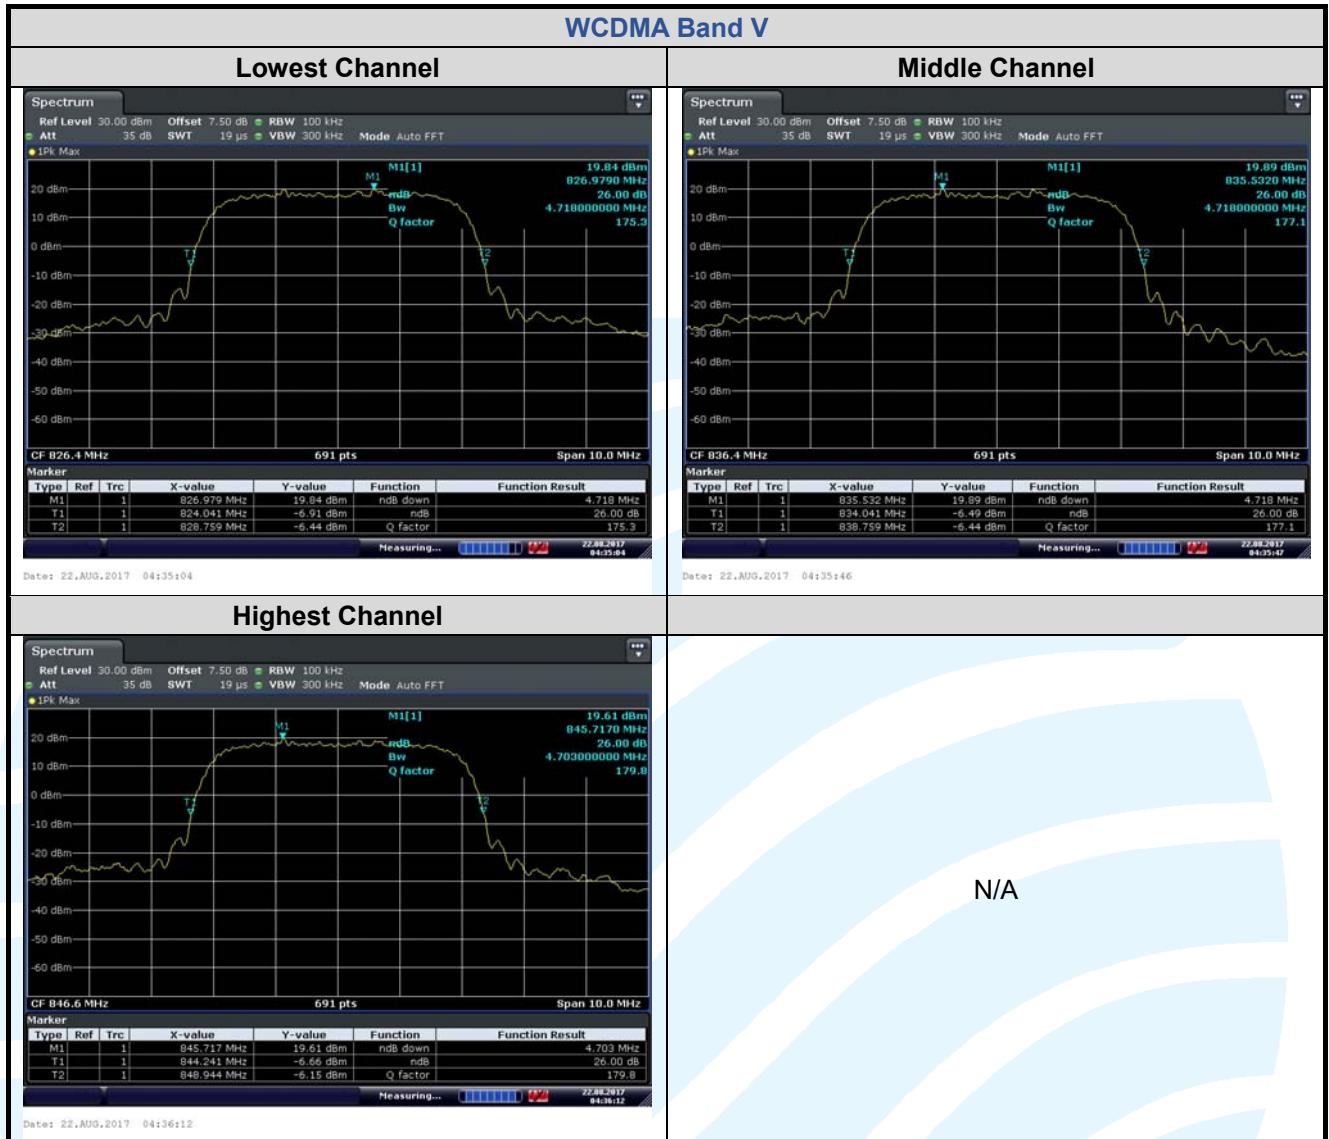

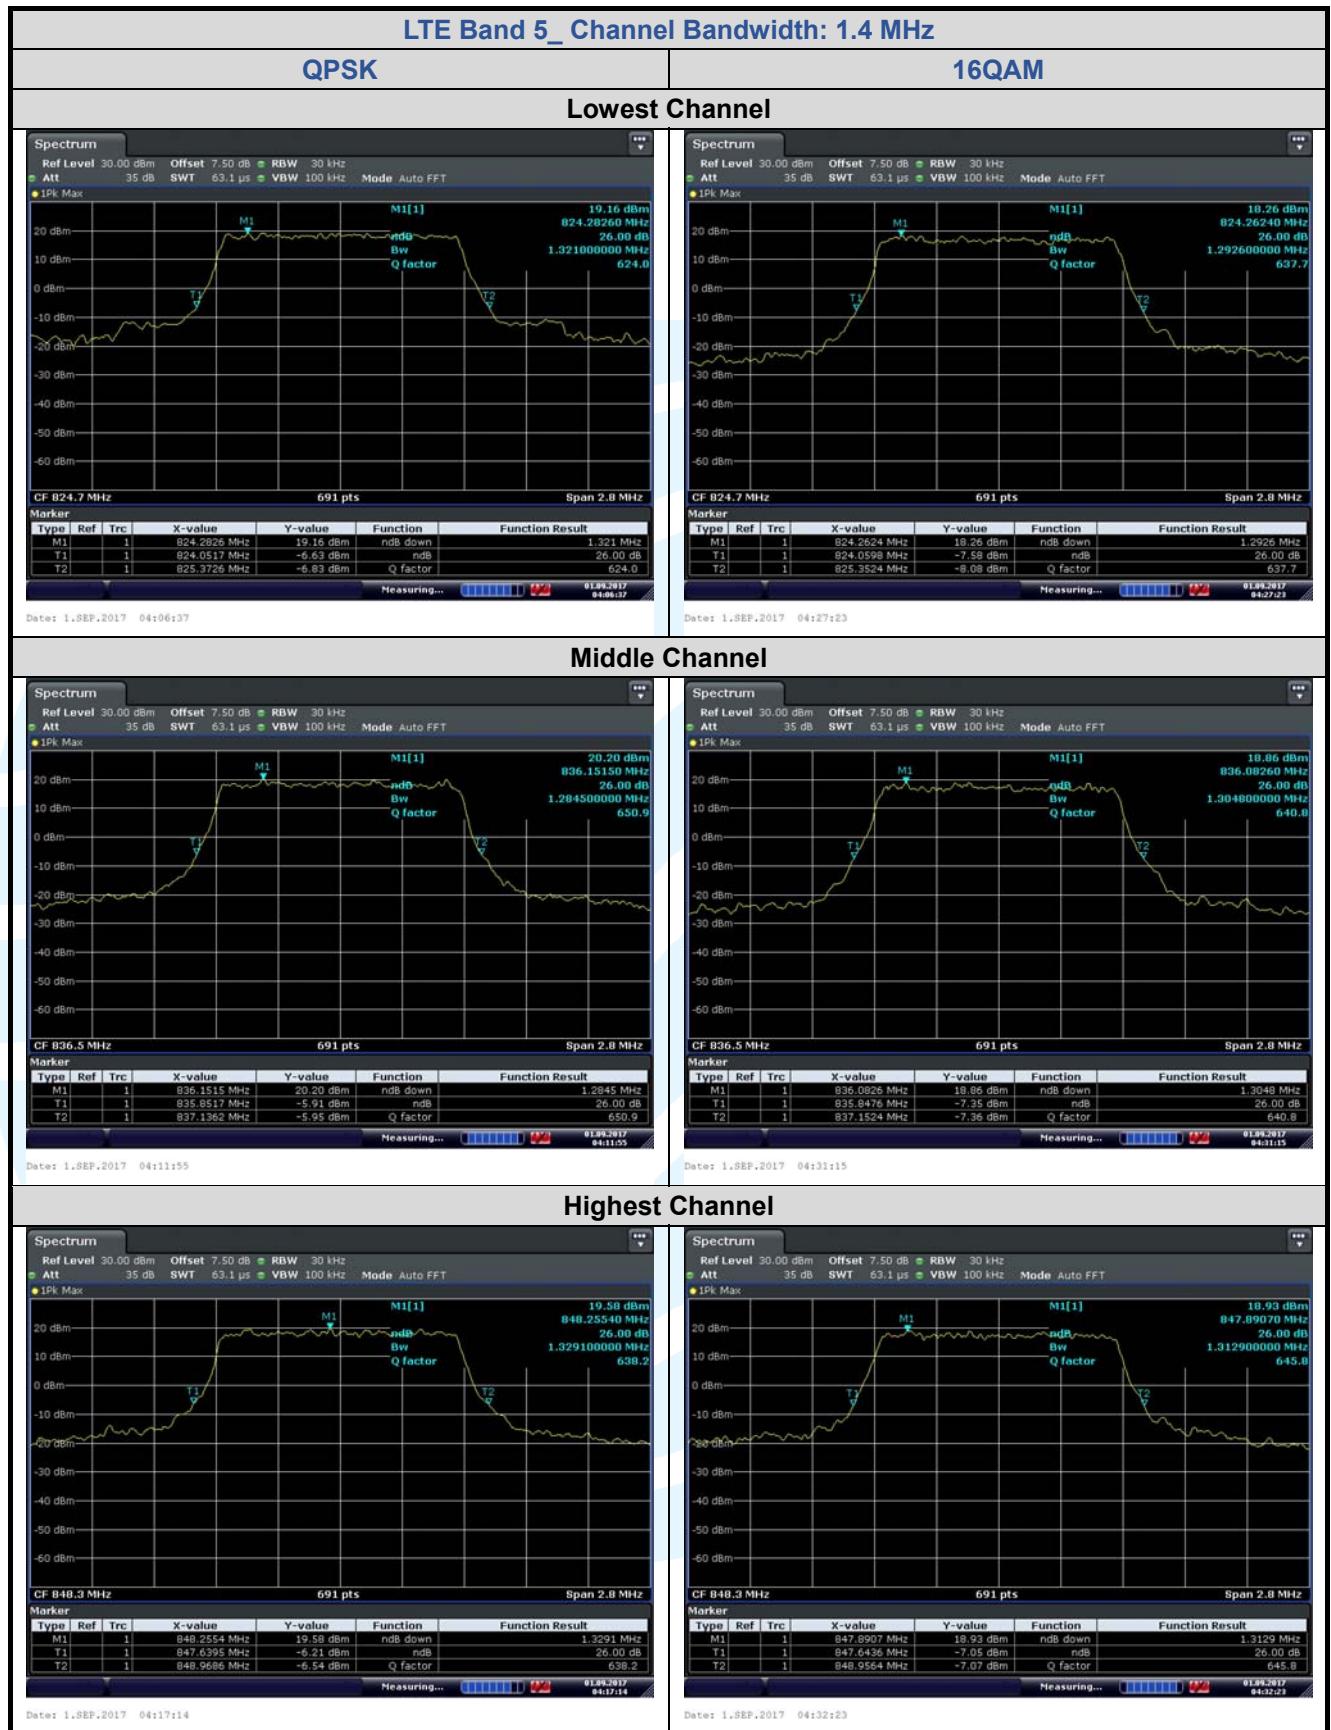


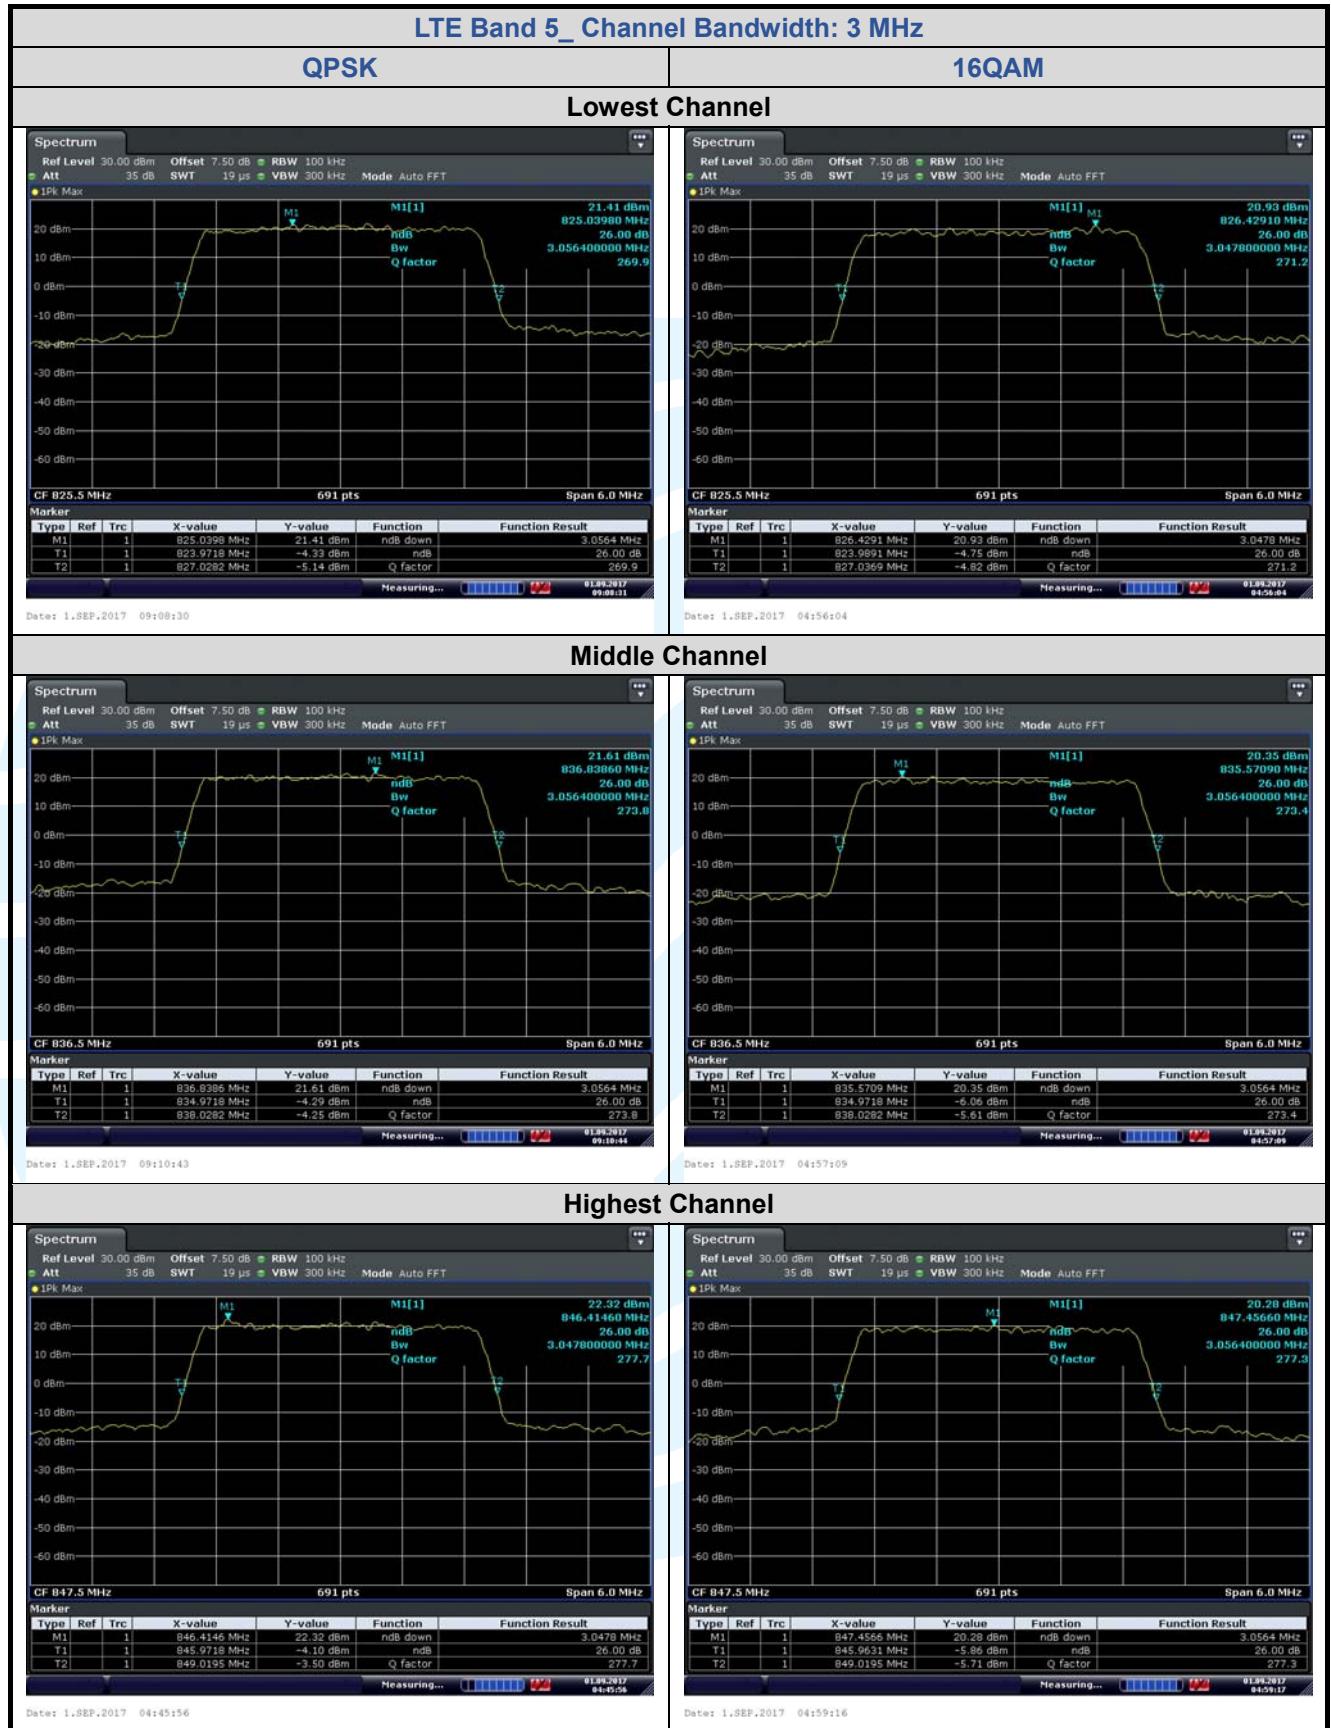


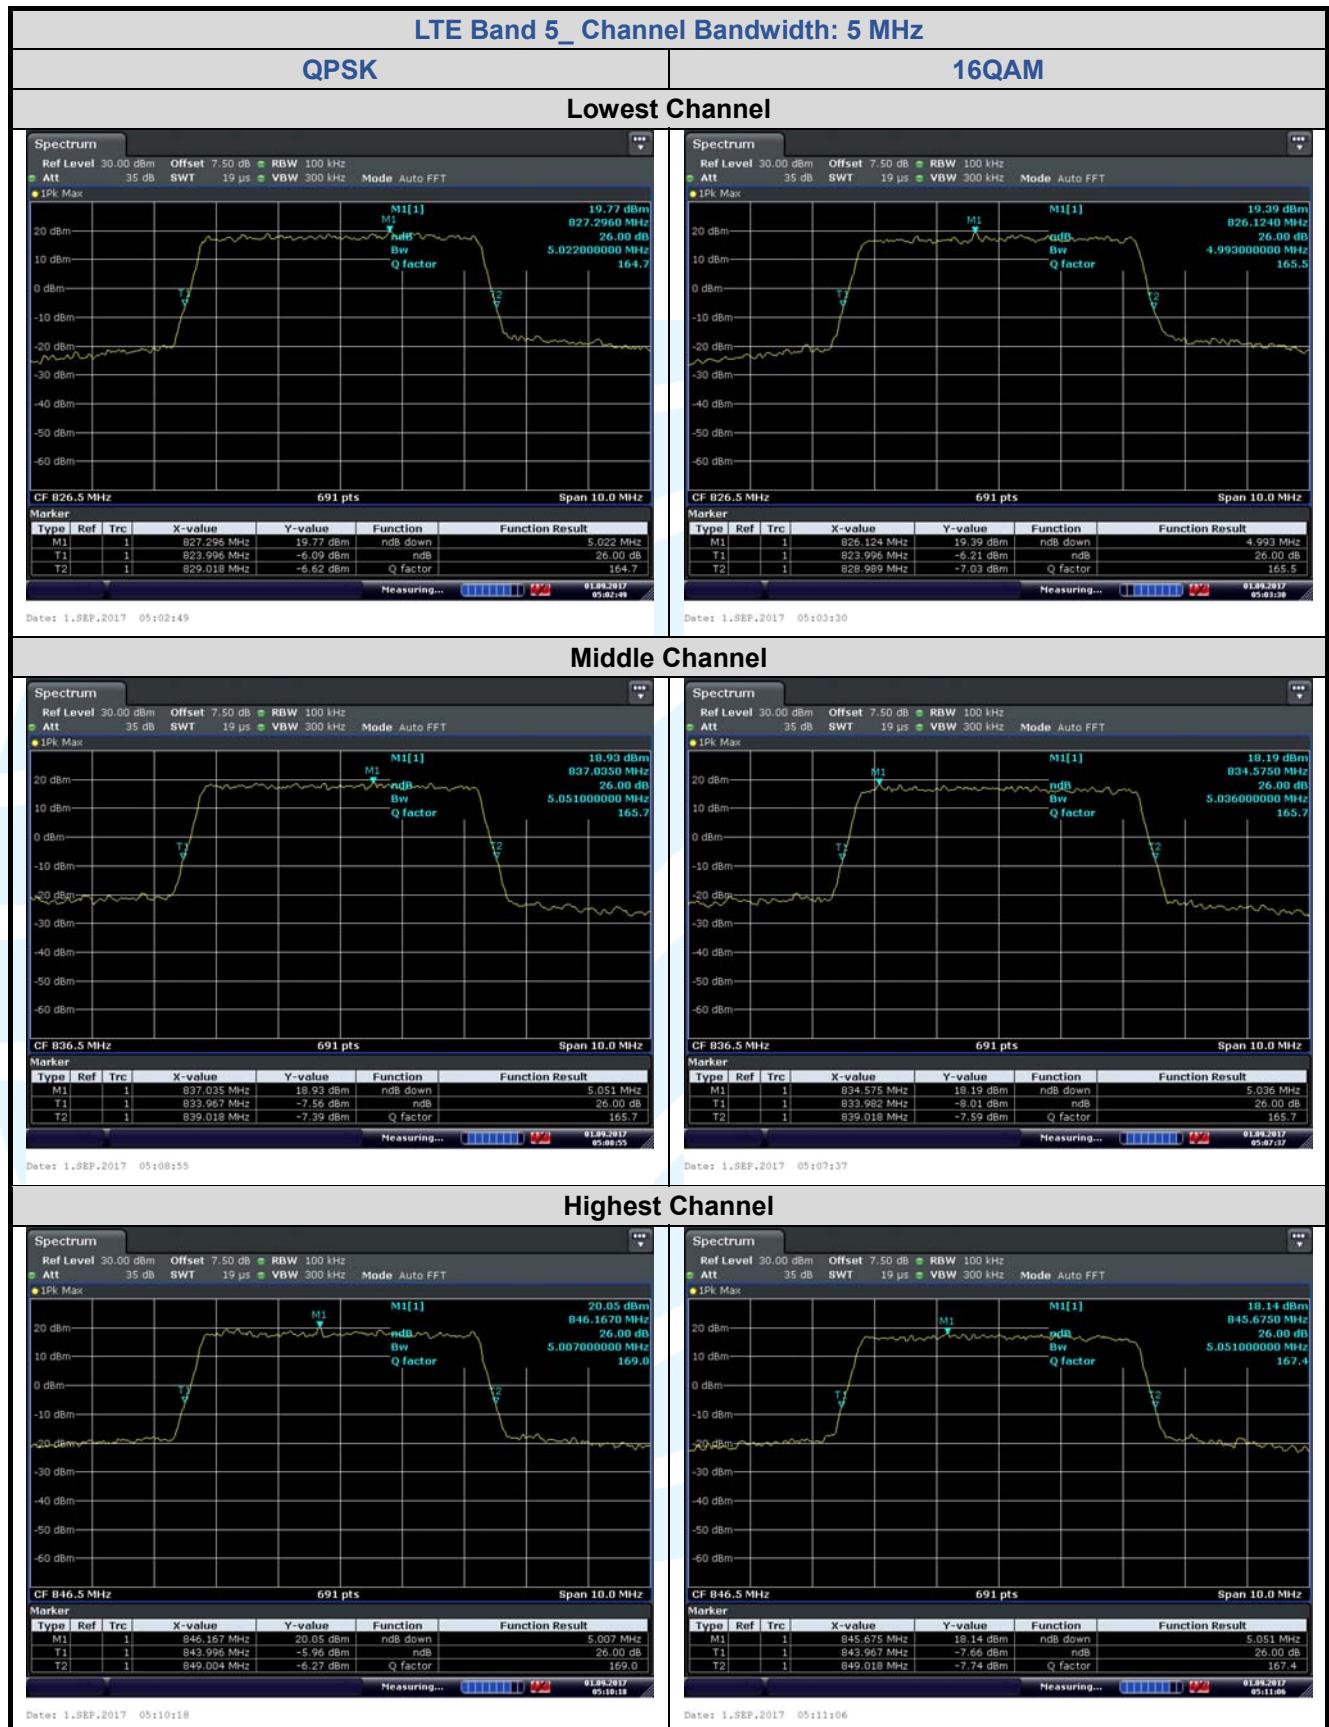


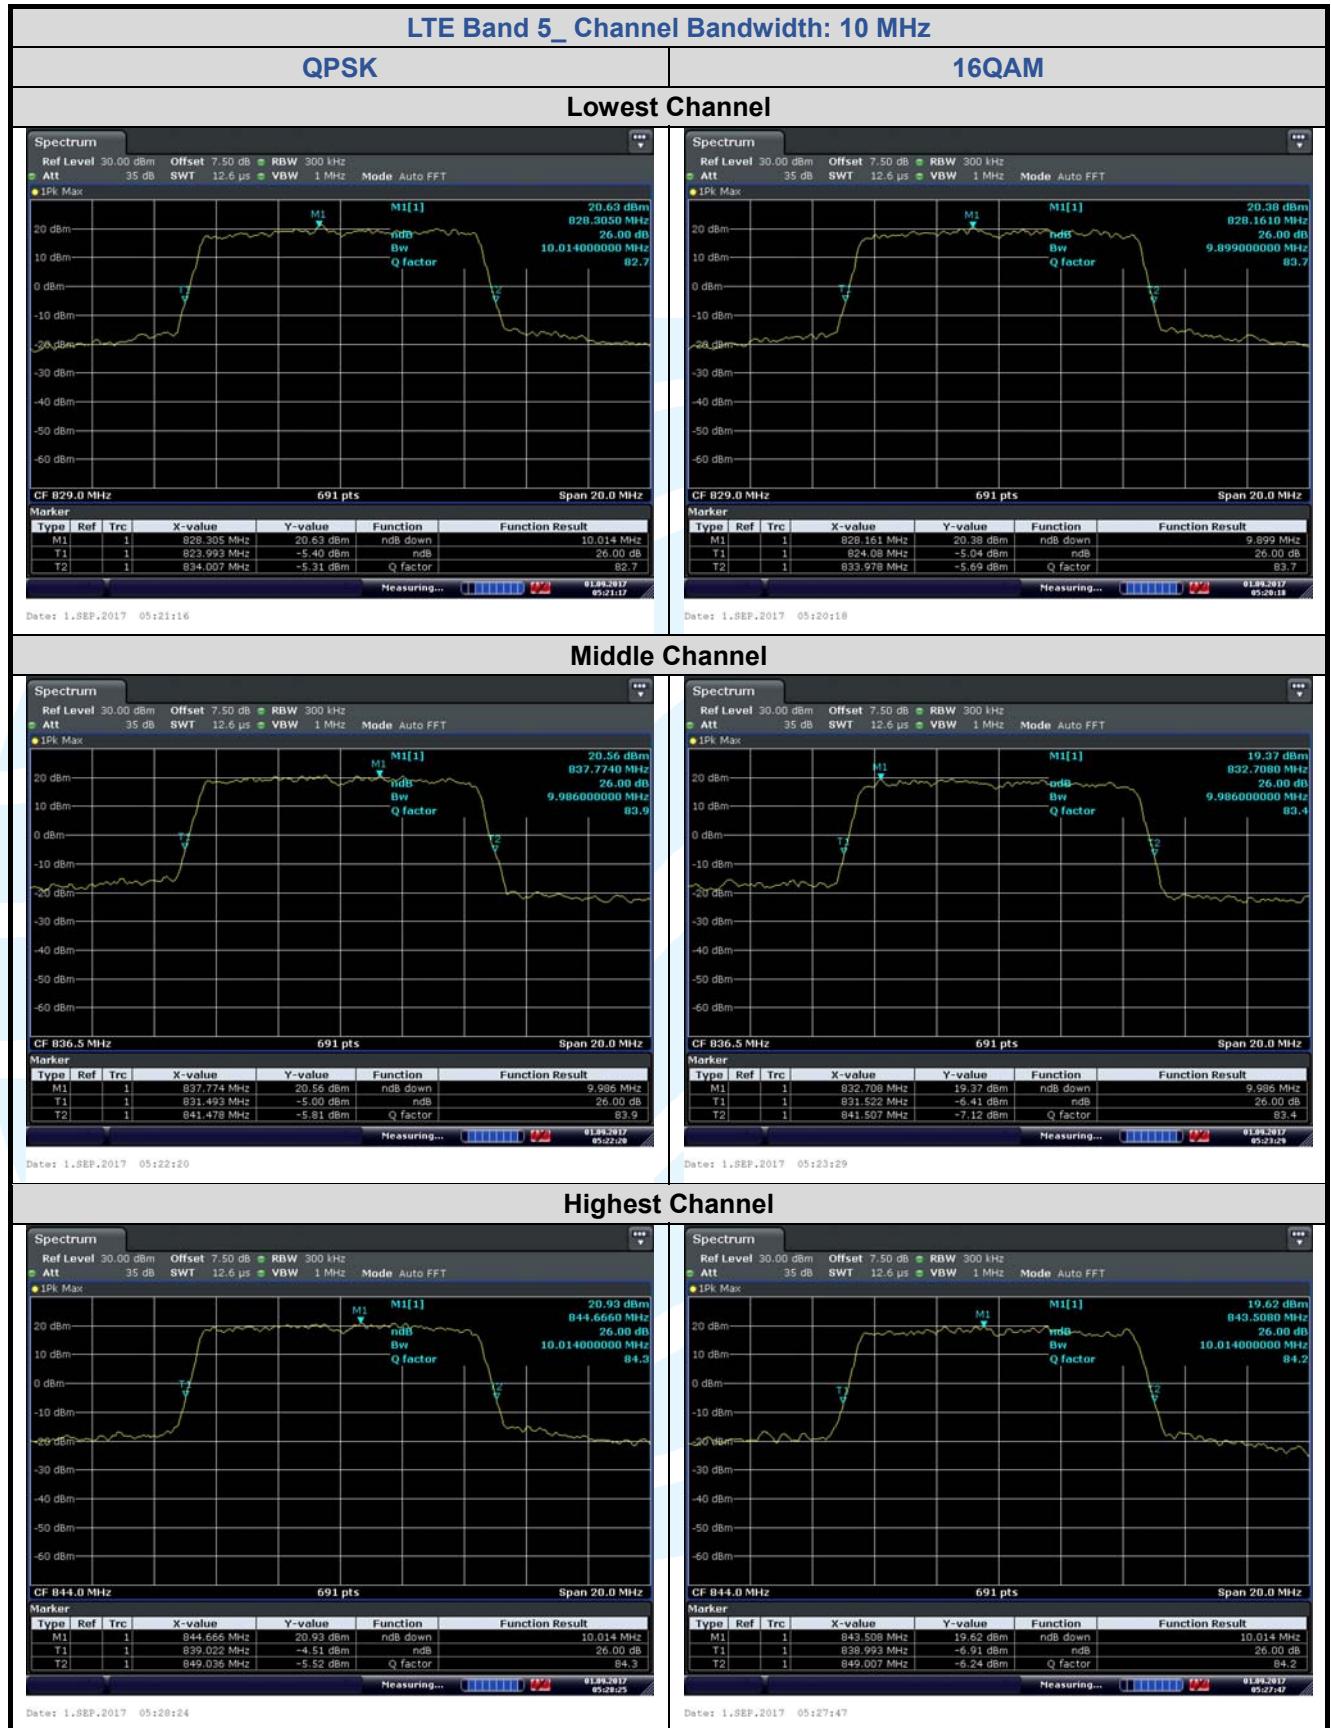



99% dB Bandwidth

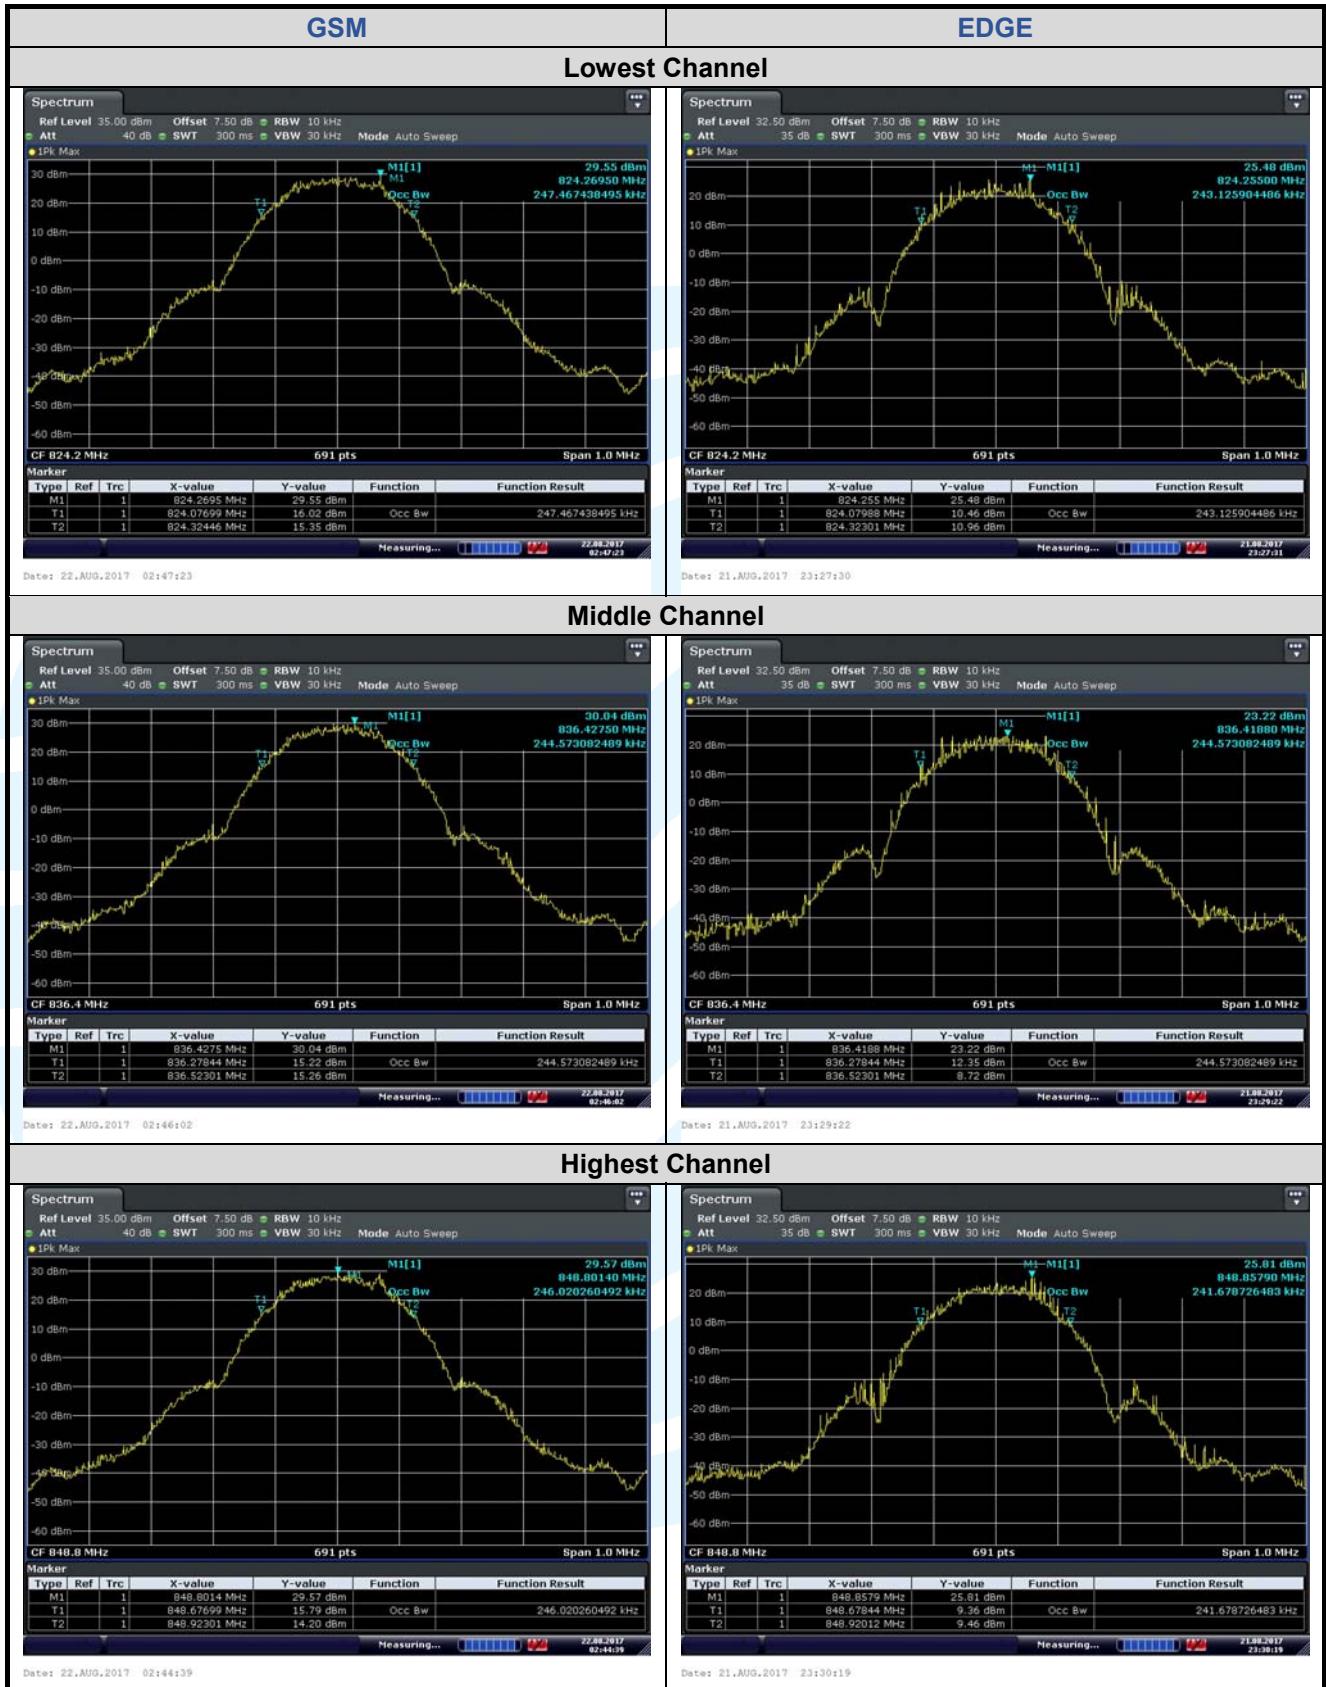


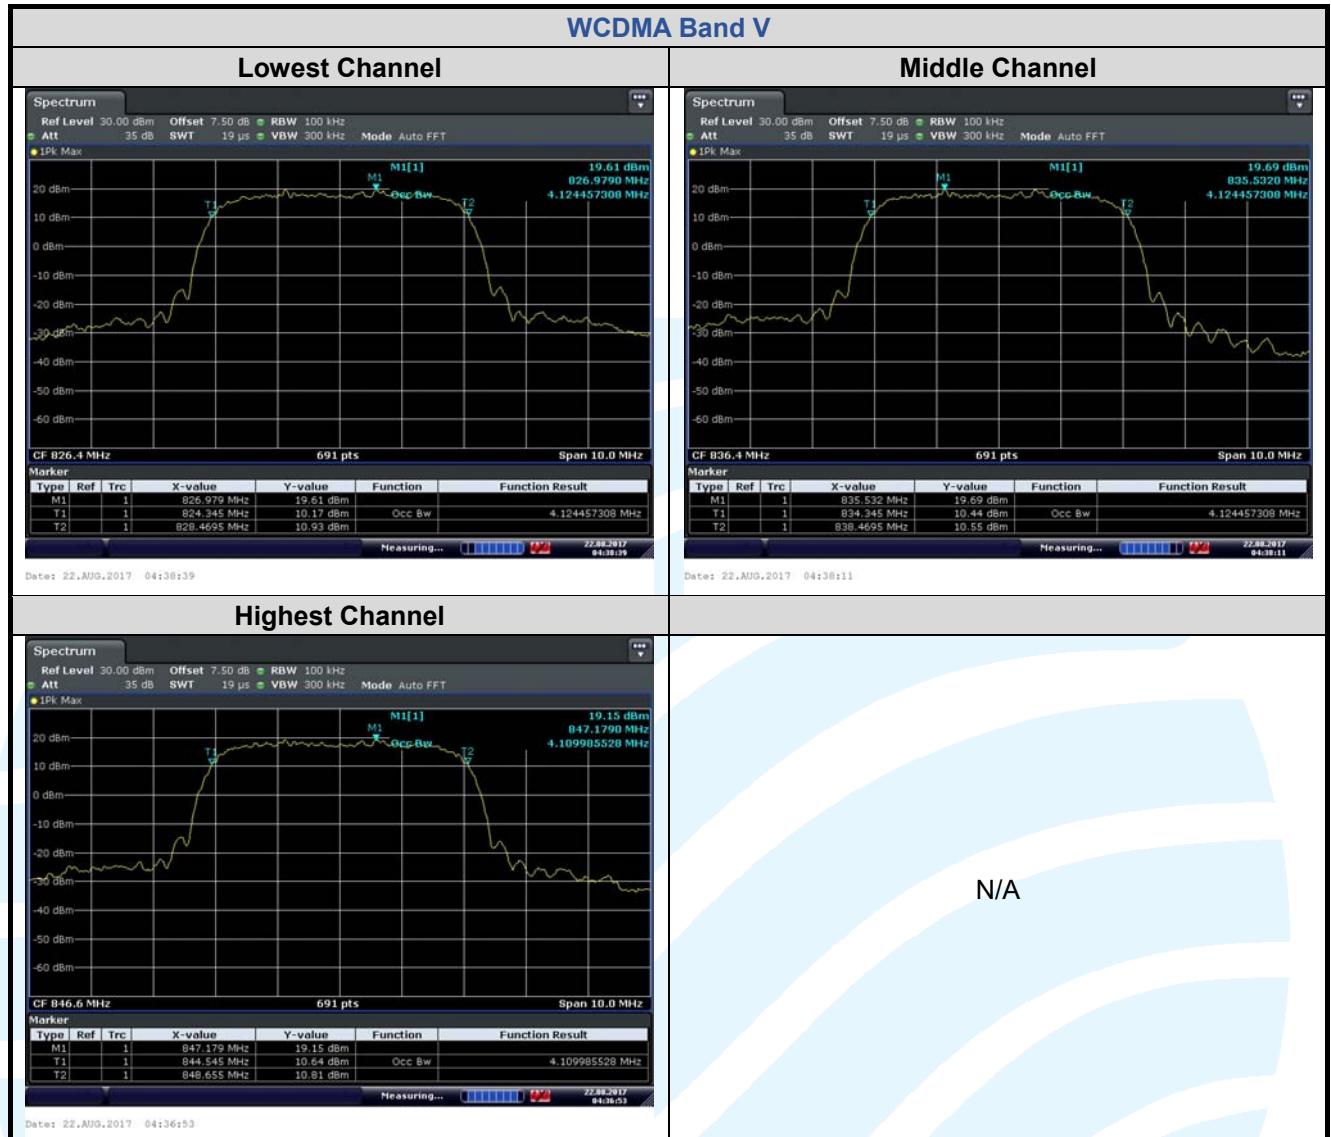

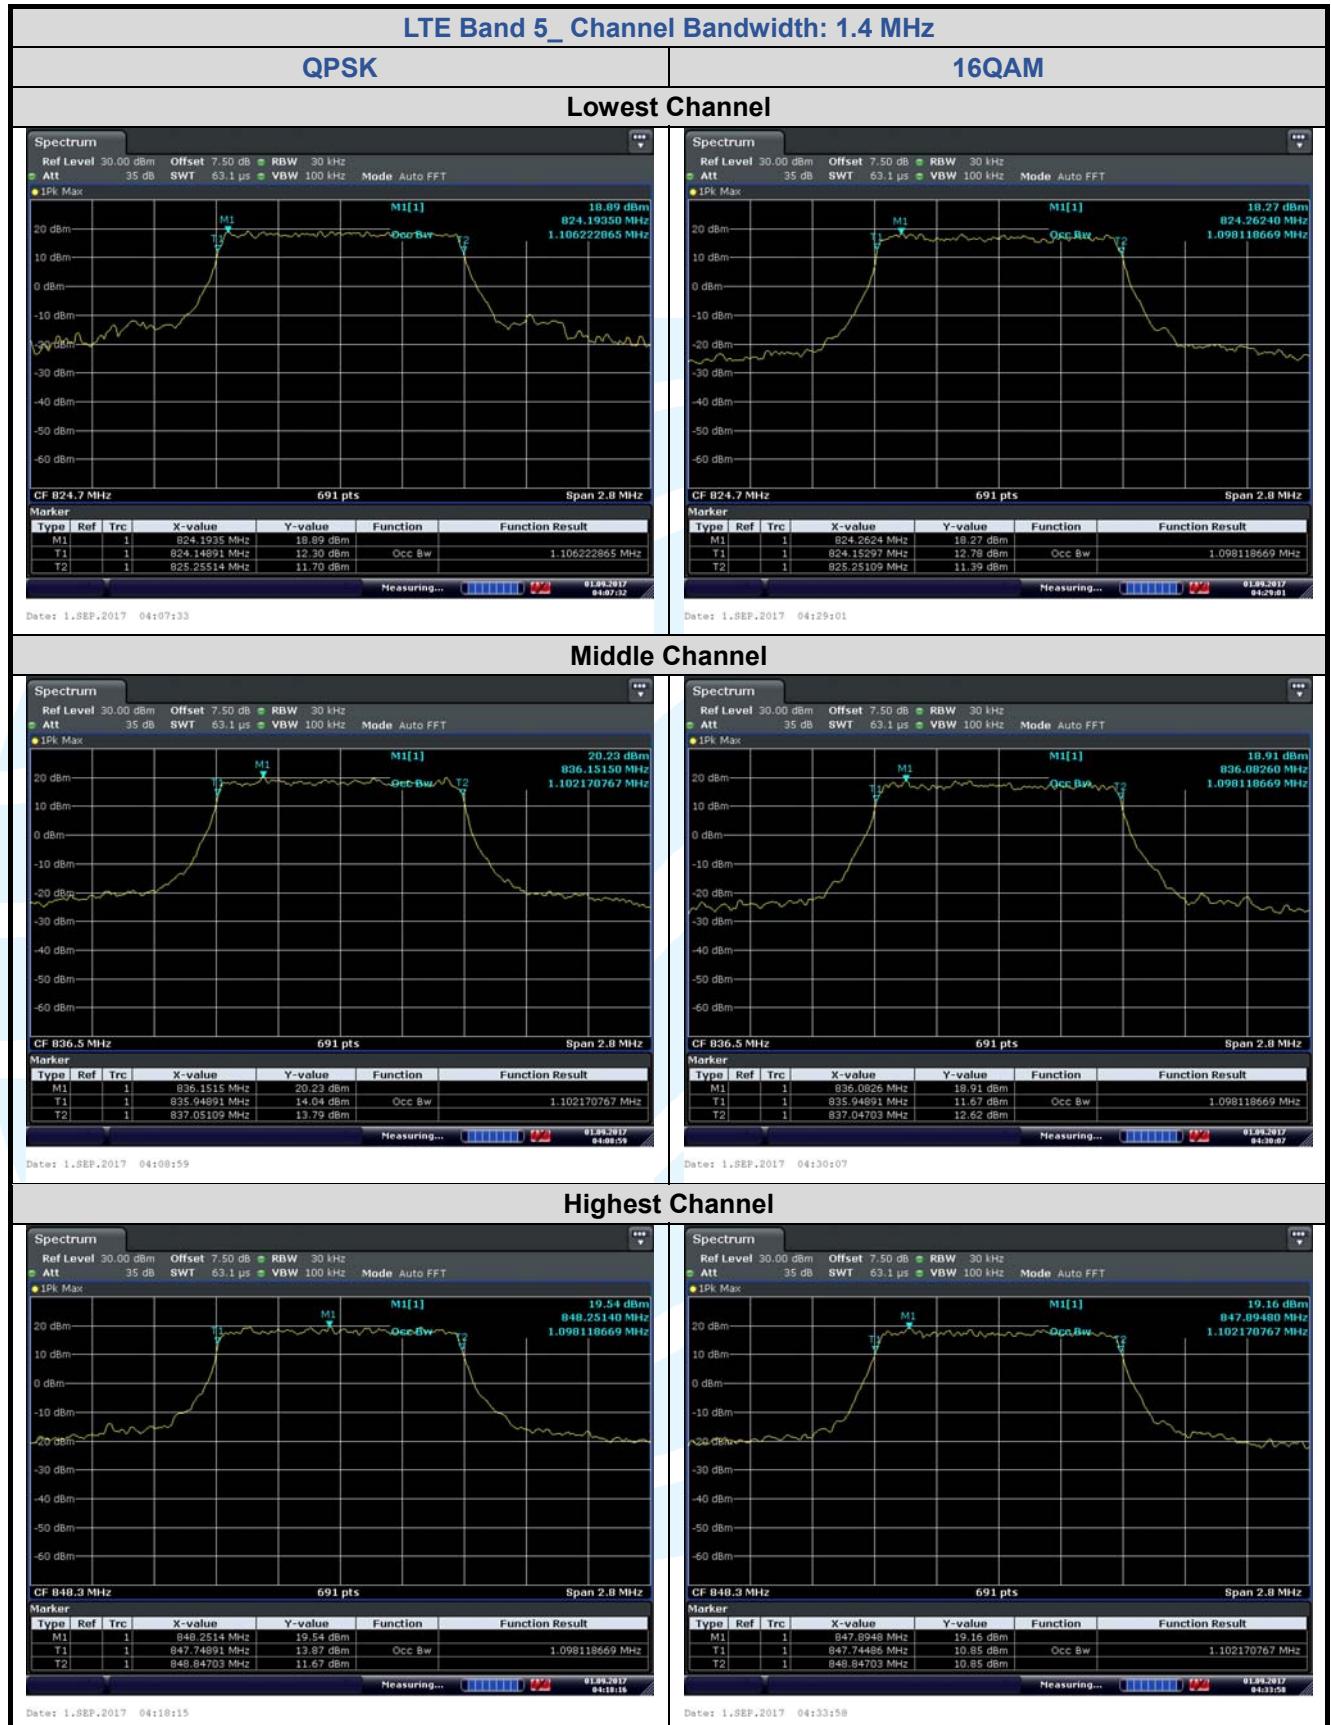

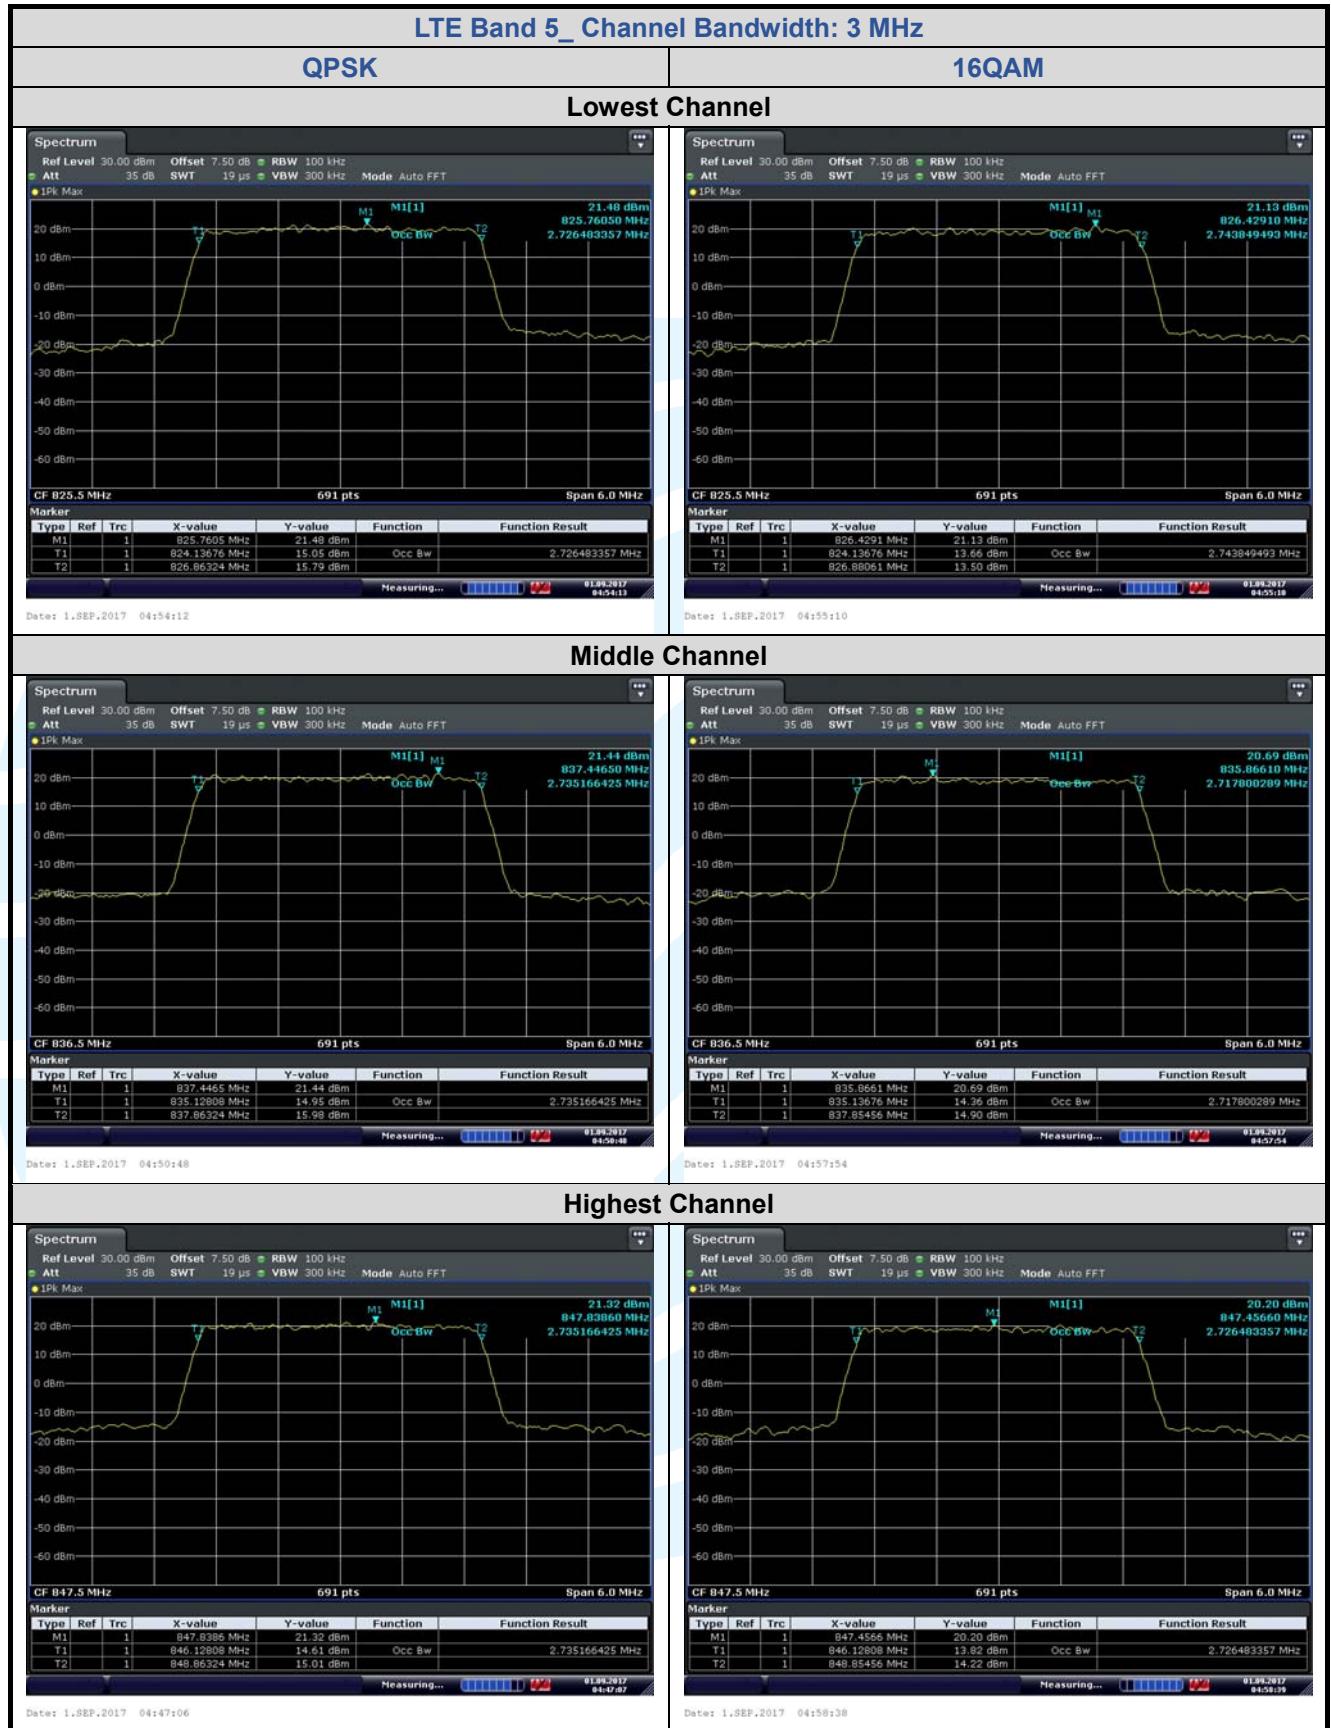

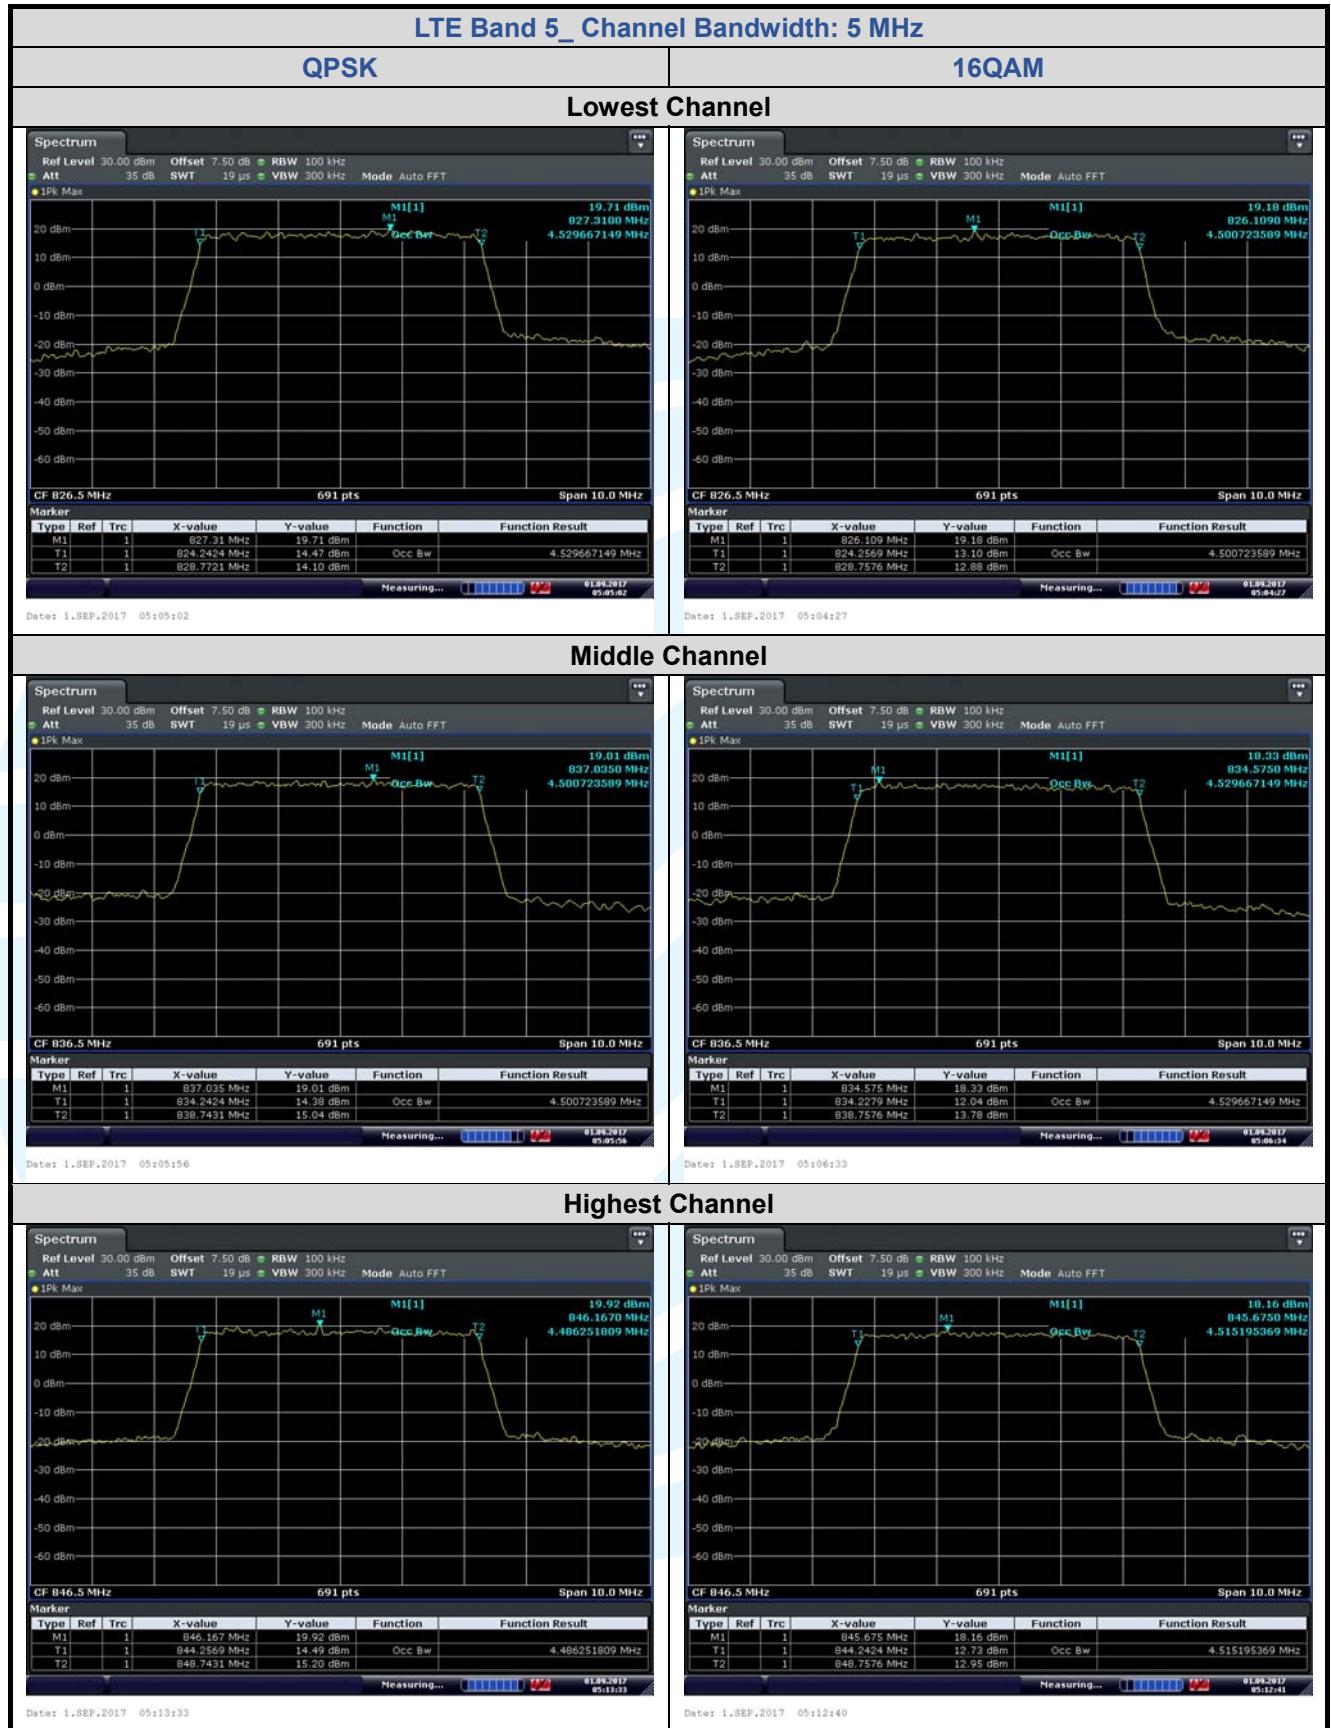

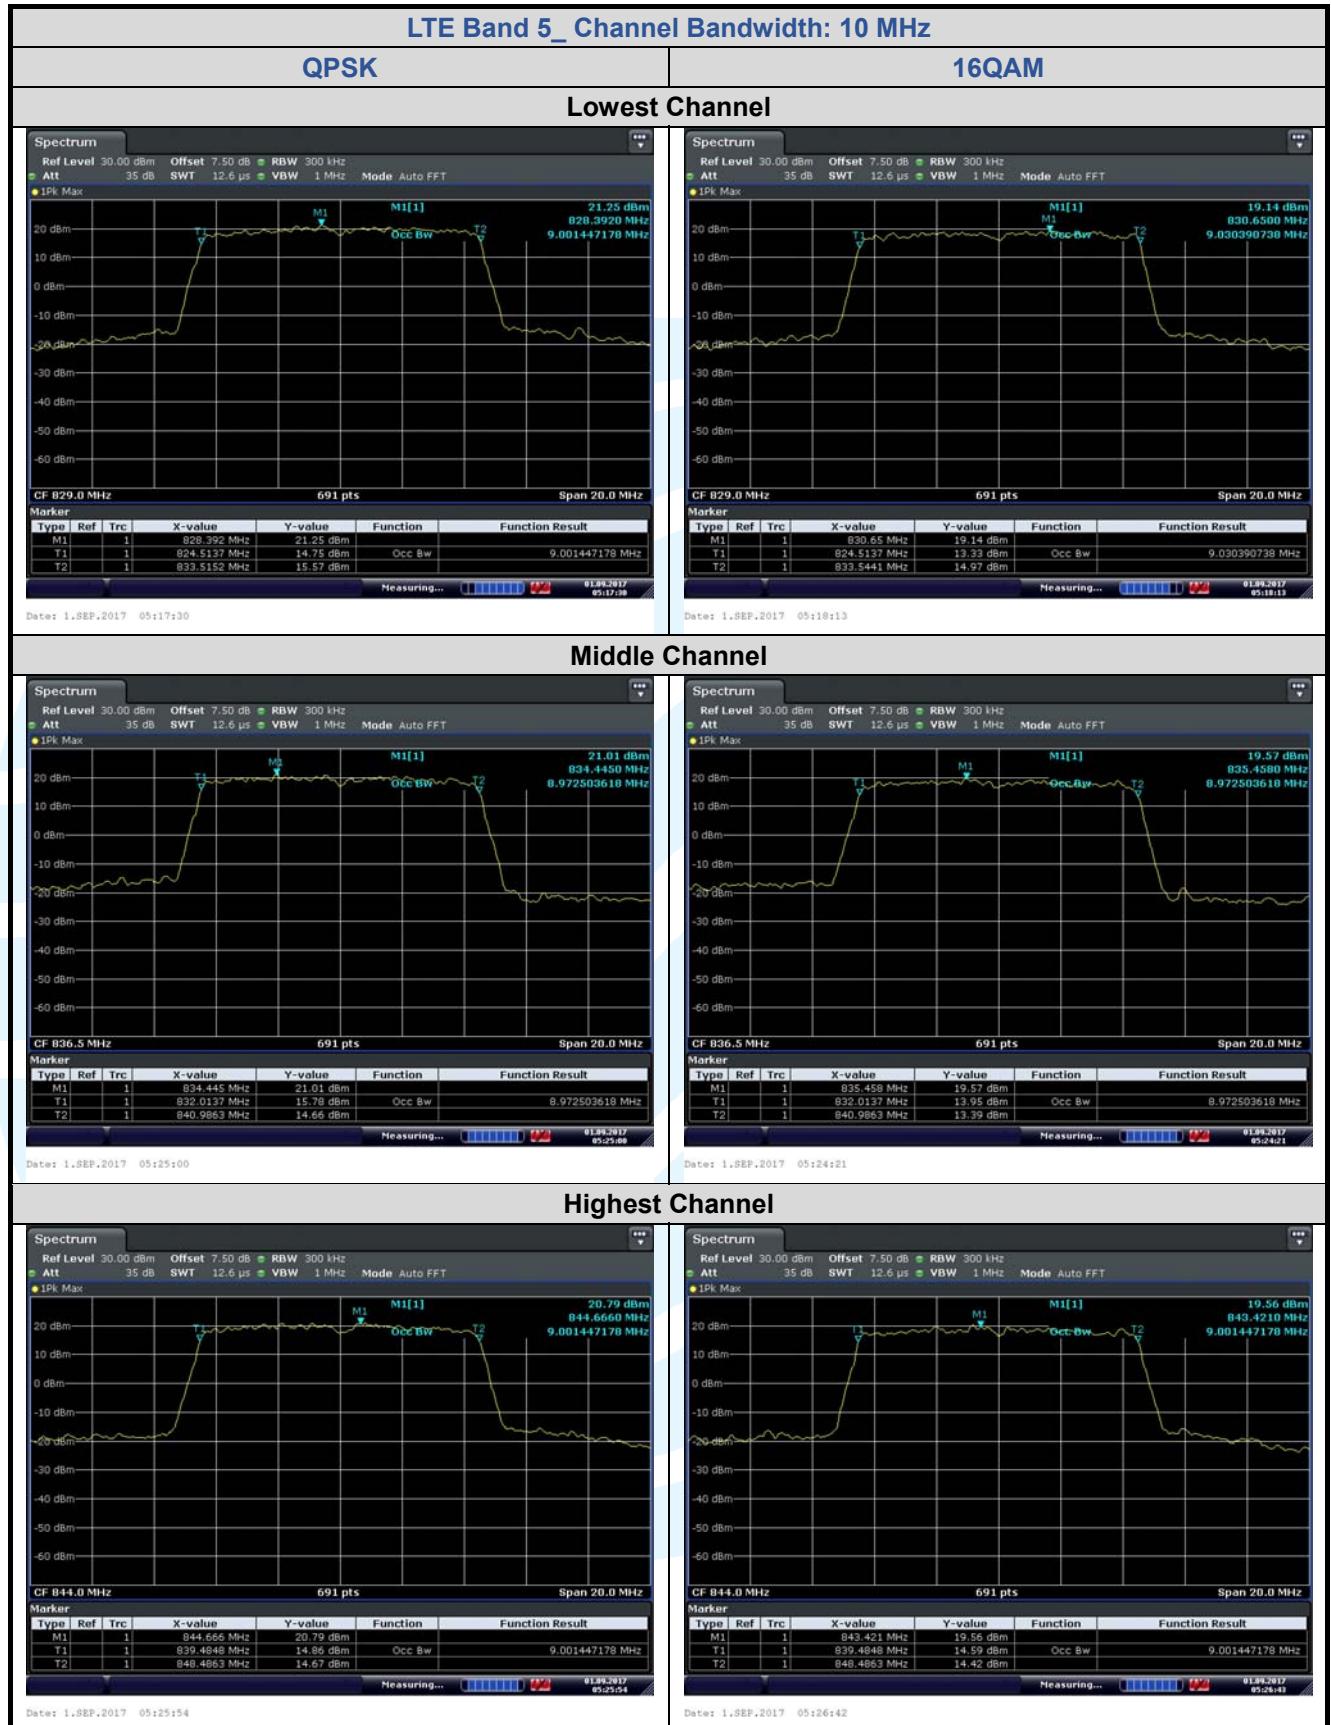

## 5.5BAND EDGE AT ANTENNA TERMINALS

**Test Requirement:** FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)

**Test Method:** ANSI/TIA/EIA-603-D 2010 & KDB 971168 D01v02r02

**Limit:**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13 dBm.

**Test Procedure:**

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

For each band edge measurement:

- 1) Set the spectrum analyzer span to include the block edge frequency.
- 2) Set a marker to point the corresponding band edge frequency in each test case.
- 3) Set display line at -13 dBm
- 4) Set resolution bandwidth to at least 1% of emission bandwidth.
- 5) Set spectrum analyzer with RMS detector.
- 6) Record the max trace plot into the test report

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.2.2 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Link mode

**Test Results:** Pass

The test plot as follows:

