

### System Check\_Head\_5750MHz

**DUT: D5GHzV2-SN:1006**

Communication System: UID 0, CW (0); Frequency: 5750 MHz;Duty Cycle: 1:1  
Medium:HSL\_5000 Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.361$  S/m;  $\epsilon_r = 36.365$ ;  
 $\rho = 1000$ kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.34, 5.34, 5.34); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW/Area Scan (71x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of Total (interpolated) = 63.24 V/m

**CW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 36.93 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 28.7 W/kg  
**SAR(1 g) = 7.55 W/kg; SAR(10 g) = 2.36 W/kg**  
Maximum value of SAR (measured) = 17.4 W/kg

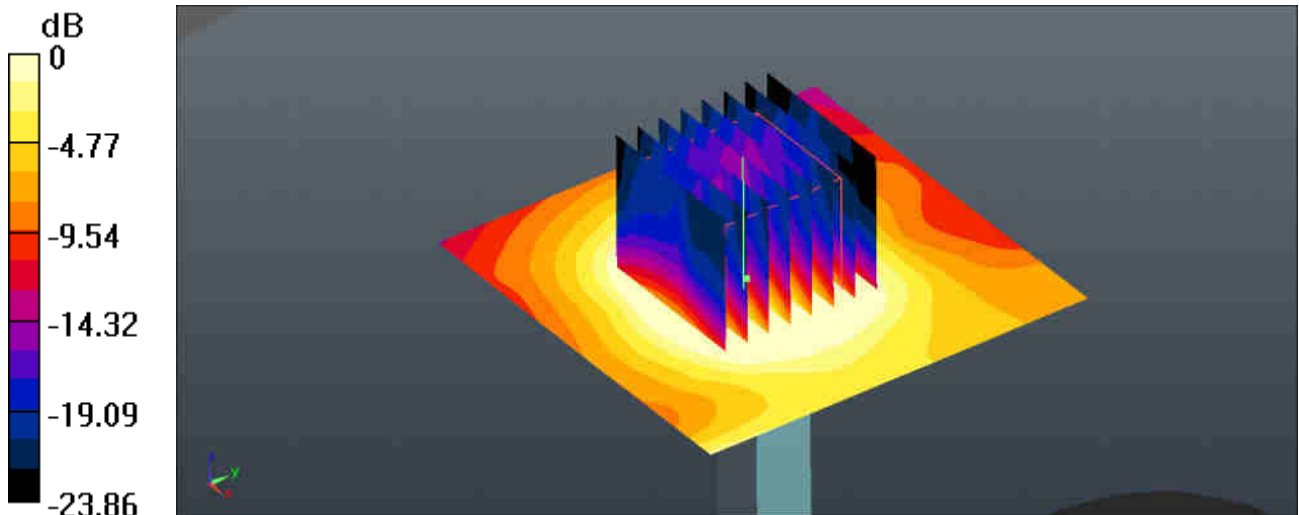

0 dB = 17.40 V/m = 24.81 dBV/m

### System Check\_Body\_750MHz

**DUT: D750V3 - SN:1065**

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium: MSL\_750 Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.967$  S/m;  $\epsilon_r = 55.673$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.43, 9.43, 9.43); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 3.34 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 50.28 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 3.04 W/kg  
**SAR(1 g) = 2.27 W/kg; SAR(10 g) = 1.51 W/kg**  
Maximum value of SAR (measured) = 3.15 W/kg

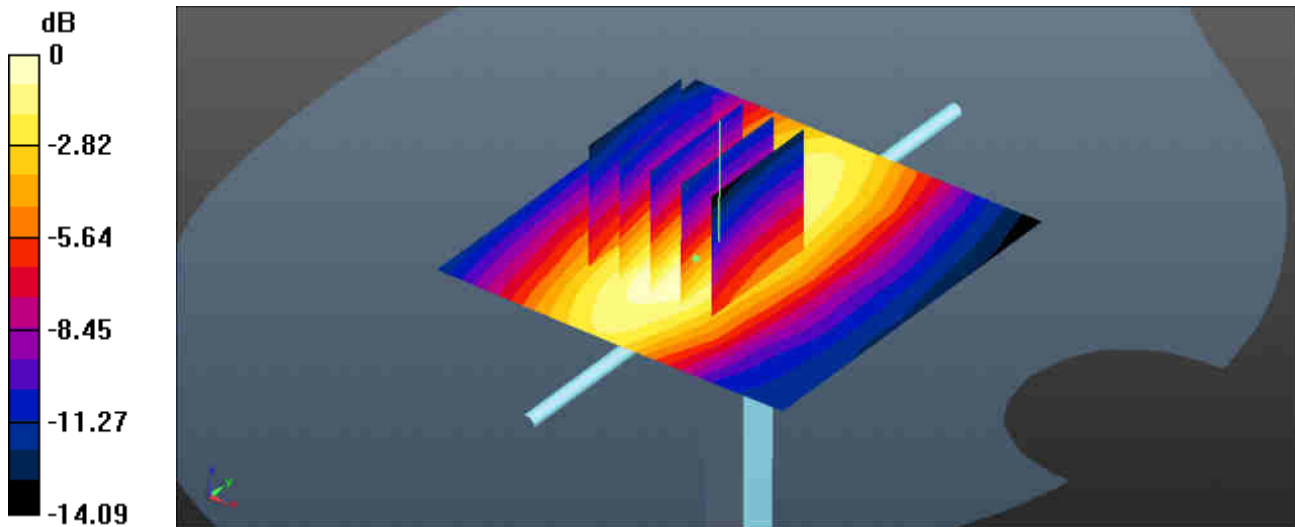

0 dB = 3.34 W/kg = 5.24 dBW/kg

### System Check\_Body\_835MHz

**DUT: D835V2 - SN:4d091**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL\_835 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.986 \text{ S/m}$ ;  $\epsilon_r = 54.083$ ;  $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature :  $23.4 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.21, 9.21, 9.21); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $2.38 \text{ W/kg}$

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $47.46 \text{ V/m}$ ; Power Drift =  $-0.18 \text{ dB}$   
Peak SAR (extrapolated) =  $4.07 \text{ W/kg}$   
**SAR(1 g) =  $2.38 \text{ W/kg}$ ; SAR(10 g) =  $1.57 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $2.36 \text{ W/kg}$

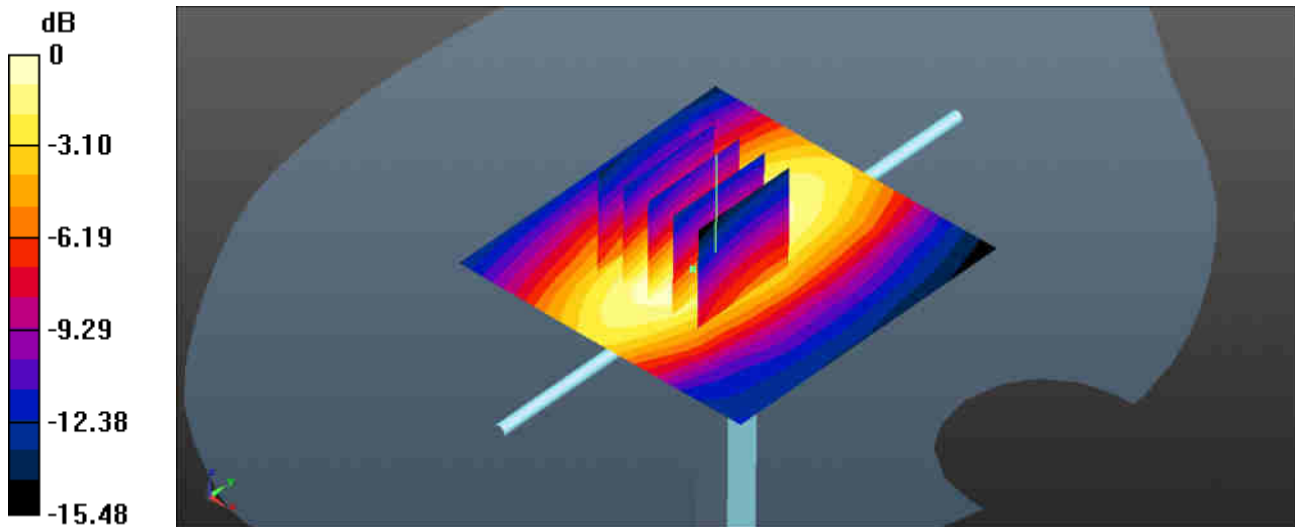

0 dB =  $2.38 \text{ W/kg} = 3.77 \text{ dBW/kg}$

### System Check\_Body\_1750MHz

#### DUT: D1750V2 - SN:1069

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: MSL\_1750 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.499$  S/m;  $\epsilon_r = 53.528$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.55, 7.55, 7.55); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 11.8 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 76.55 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 14.6 W/kg  
**SAR(1 g) = 9.05 W/kg; SAR(10 g) = 5.4 W/kg**  
Maximum value of SAR (measured) = 11.2 W/kg

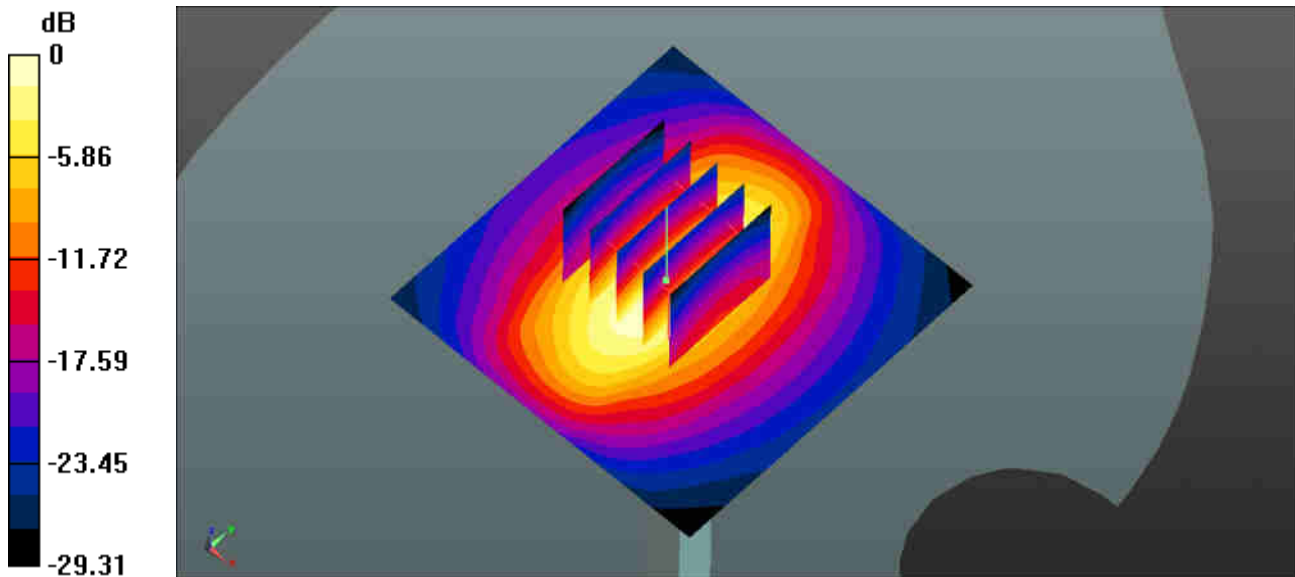

0 dB = 10.8 W/kg = 10.33 dBW/kg

### System Check\_Body\_1900MHz

#### DUT: D1900V2 - SN:5d118

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL\_1900 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.516$  S/m;  $\epsilon_r = 52.758$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.58, 7.58, 7.58); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 14.3 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 84.24 V/m; Power Drift = 0.18 dB  
Peak SAR (extrapolated) = 14.7 W/kg  
**SAR(1 g) = 9.82 W/kg; SAR(10 g) = 5.09 W/kg**  
Maximum value of SAR (measured) = 14.1 W/kg

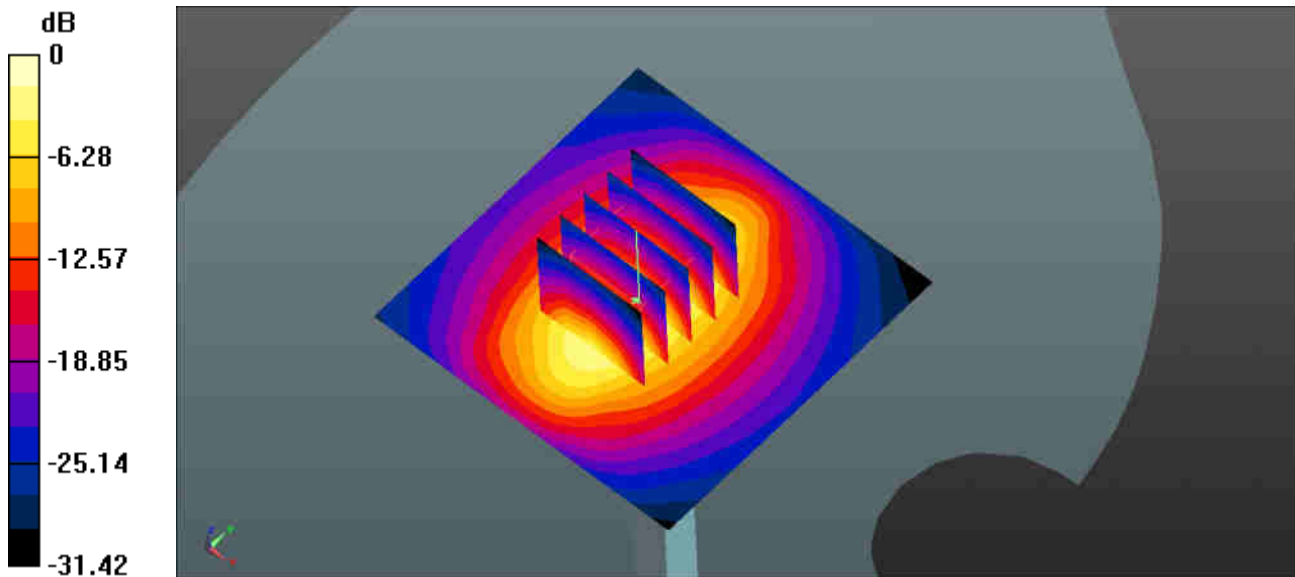

0 dB = 14.1 W/kg = 11.49 dBW/kg

### System Check\_Body\_2300MHz

**DUT: D2300V2 - SN:1055**

Communication System: UID 0, CW (0); Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: MSL\_2300 Medium parameters used:  $f = 2300$  MHz;  $\sigma = 1.814$  S/m;  $\epsilon_r = 53.271$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.87, 7.87, 7.87); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 20.0 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 87.09 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 26.5 W/kg  
**SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.25 W/kg**  
Maximum value of SAR (measured) = 19.9 W/kg

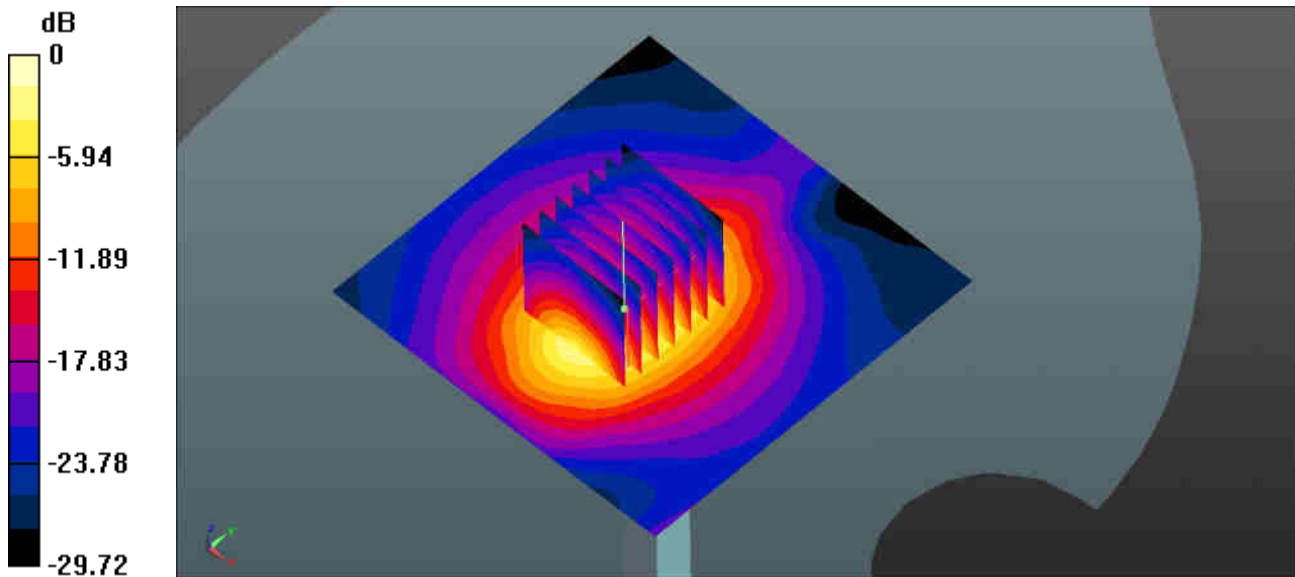

0 dB = 19.9 W/kg = 12.99 dBW/kg

### System Check\_Body\_2450MHz

**DUT: D2450V2 - SN:840**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL\_2450 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.026$  S/m;  $\epsilon_r = 52.75$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.27, 7.27, 7.27); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 20.4 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 79.50 V/m; Power Drift = 0.10 dB  
Peak SAR (extrapolated) = 23.4 W/kg  
**SAR(1 g) = 12.3 W/kg; SAR(10 g) = 6.24 W/kg**  
Maximum value of SAR (measured) = 19.9 W/kg

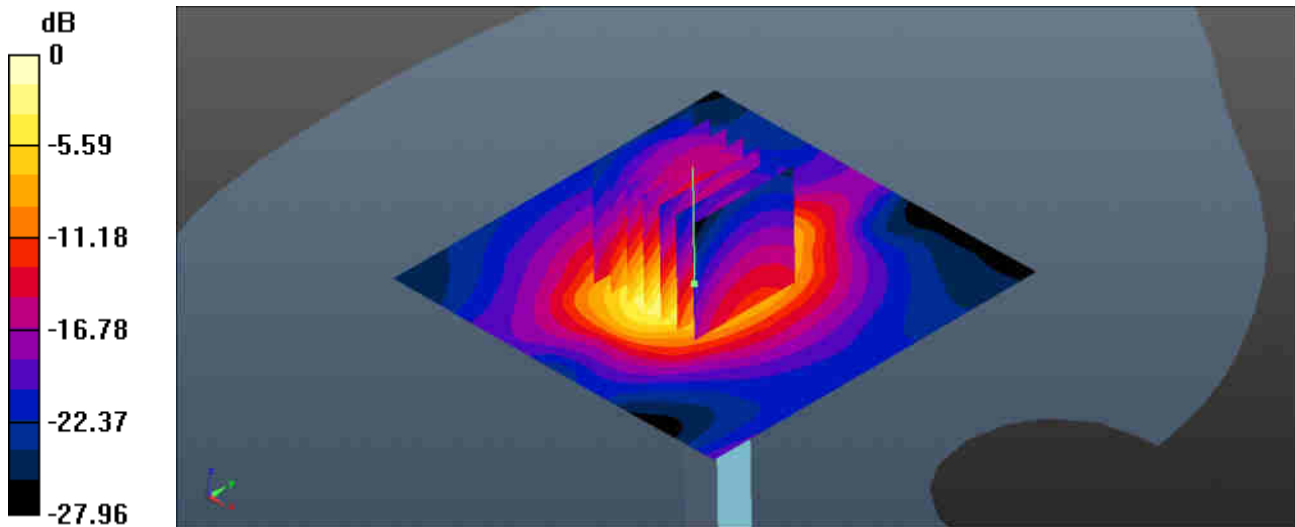

0 dB = 20.4 W/kg = 13.10 dBW/kg

### System Check\_Body\_2600MHz

#### DUT: D2600V2 - SN:1061

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: MSL\_2600 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.239$  S/m;  $\epsilon_r = 52.243$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.14, 7.14, 7.14); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 21.7 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 93.54 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 35.3 W/kg  
**SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.48 W/kg**  
Maximum value of SAR (measured) = 27.4 W/kg

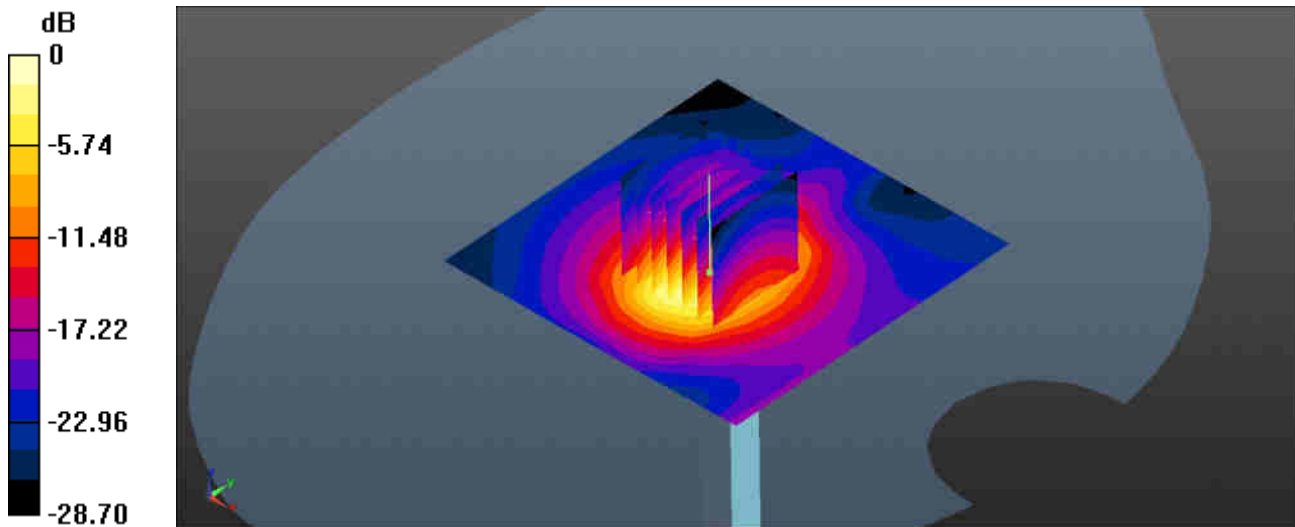

0 dB = 27.7 W/kg = 14.42 dBW/kg



### System Check\_Body\_5250MHz

#### DUT: D5GHzV2-SN:1006


Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1  
Medium: MSL\_5000 Medium parameters used:  $f = 5250$  MHz;  $\sigma = 5.506$  S/m;  $\epsilon_r = 47.956$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.72, 4.72, 4.72); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (71x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 17.3 W/kg

**Pin=100mW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 36.96 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 30.8 W/kg  
**SAR(1 g) = 7.12 W/kg; SAR(10 g) = 1.98 W/kg**  
Maximum value of SAR (measured) = 16.7 W/kg

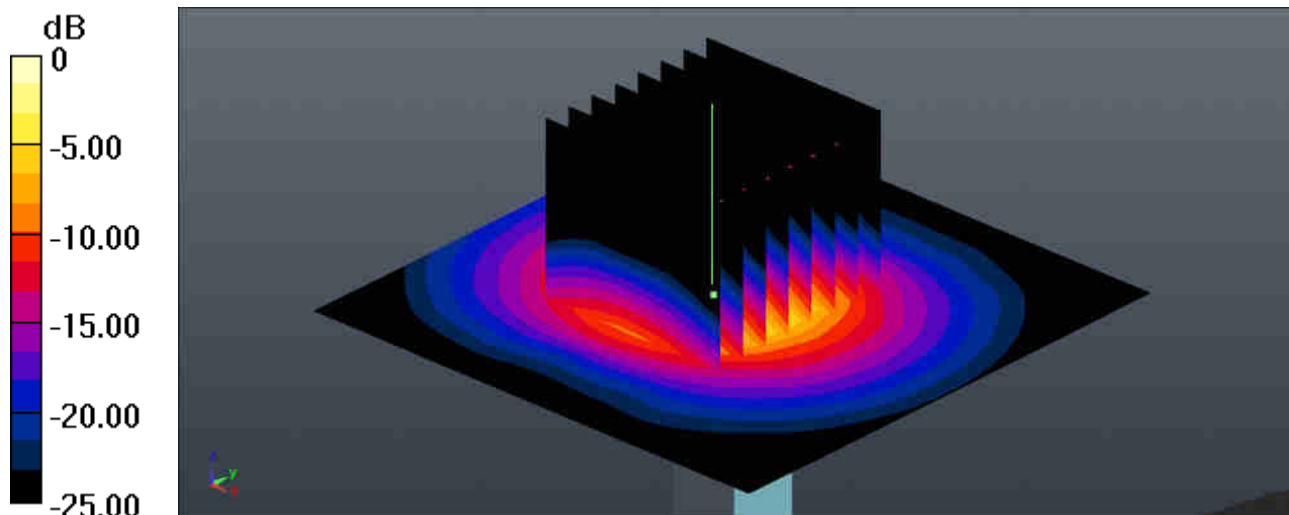

0 dB = 16.7 W/kg = 12.23 dBW/kg

### System Check\_Body\_5600MHz

#### DUT: D5GHzV2-SN:1006


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1  
Medium: MSL\_5000 Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.954$  S/m;  $\epsilon_r = 47.367$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.01, 4.01, 4.01); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (71x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 19.2 W/kg

**Pin=100mW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 36.74 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 33.8 W/kg  
**SAR(1 g) = 7.69 W/kg; SAR(10 g) = 2.13 W/kg**  
Maximum value of SAR (measured) = 18.6 W/kg

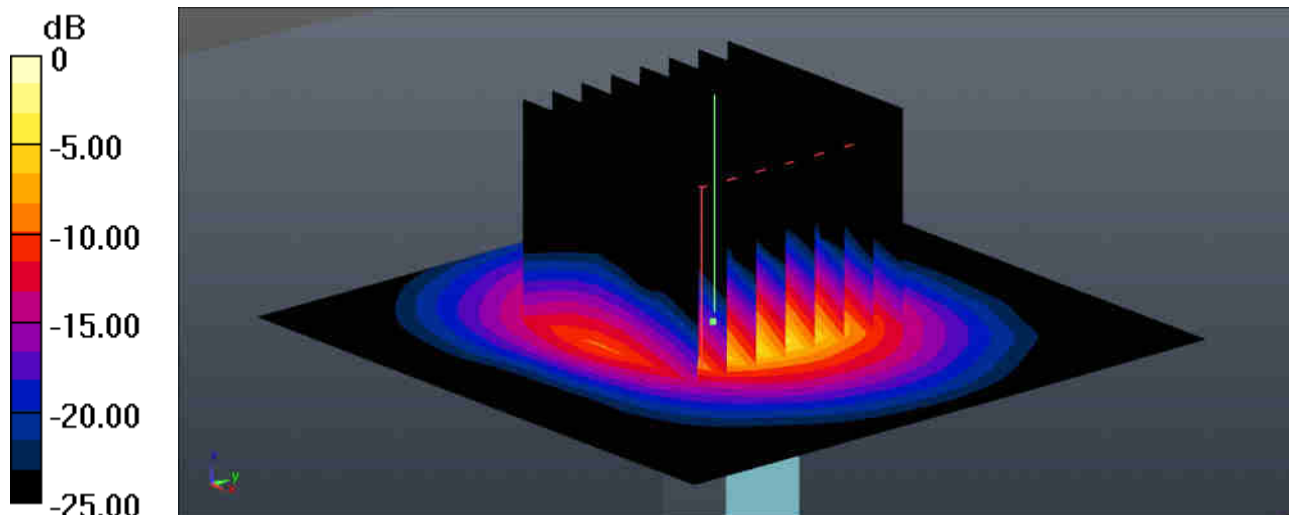

0 dB = 18.6 W/kg = 12.70 dBW/kg

### System Check\_Body\_5750MHz

#### DUT: D5GHzV2-SN:1006

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: MSL\_5000 Medium parameters used:  $f = 5750$  MHz;  $\sigma = 6.154$  S/m;  $\epsilon_r = 47.115$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.31, 4.31, 4.31); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (71x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 17.3 W/kg


**Pin=100mW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 34.97 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 31.8 W/kg

**SAR(1 g) = 6.92 W/kg; SAR(10 g) = 1.92 W/kg**

Maximum value of SAR (measured) = 17.1 W/kg

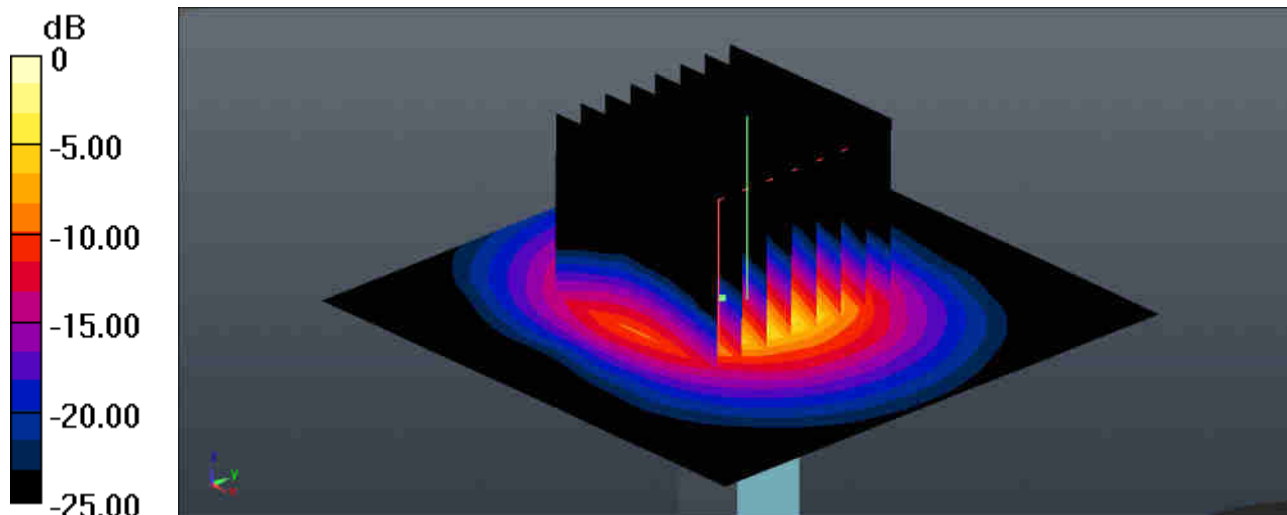

0 dB = 17.1 W/kg = 12.33 dBW/kg



## **Appendix B. Plots of High SAR Measurement**

The plots are shown as follows.

### #01\_GSM850\_GPRS 4 Tx slots\_Right Cheek\_0mm\_Ch128

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.08

Medium: HSL\_835 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 41.767$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.13, 9.13, 9.13); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch128/Area Scan (61x121x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.645 W/kg


**Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 7.403 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.674 W/kg

**SAR(1 g) = 0.535 W/kg; SAR(10 g) = 0.422 W/kg**

Maximum value of SAR (measured) = 0.609 W/kg

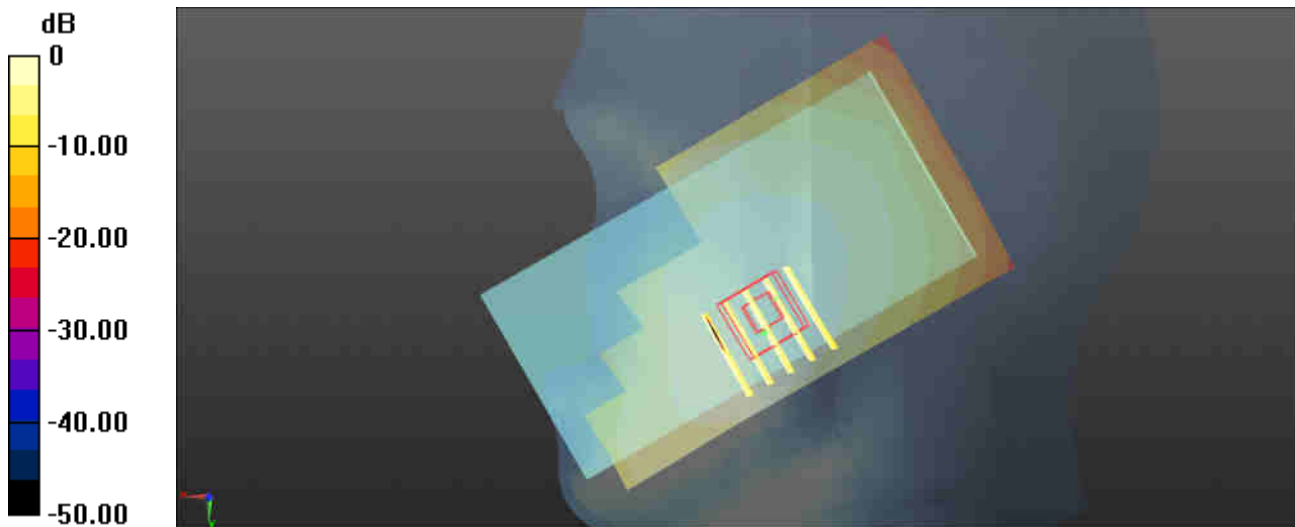

0 dB = 0.645 W/kg = -1.90 dBW/kg

### #02\_GSM1900\_GPRS 4 Tx slots\_Right Cheek\_0mm\_Ch810

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08  
Medium: HSL\_1900 Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.424$  S/m;  $\epsilon_r = 38.675$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.79, 7.79, 7.79); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch810/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.480 W/kg


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.448 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.626 W/kg

**SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.236 W/kg**

Maximum value of SAR (measured) = 0.485 W/kg

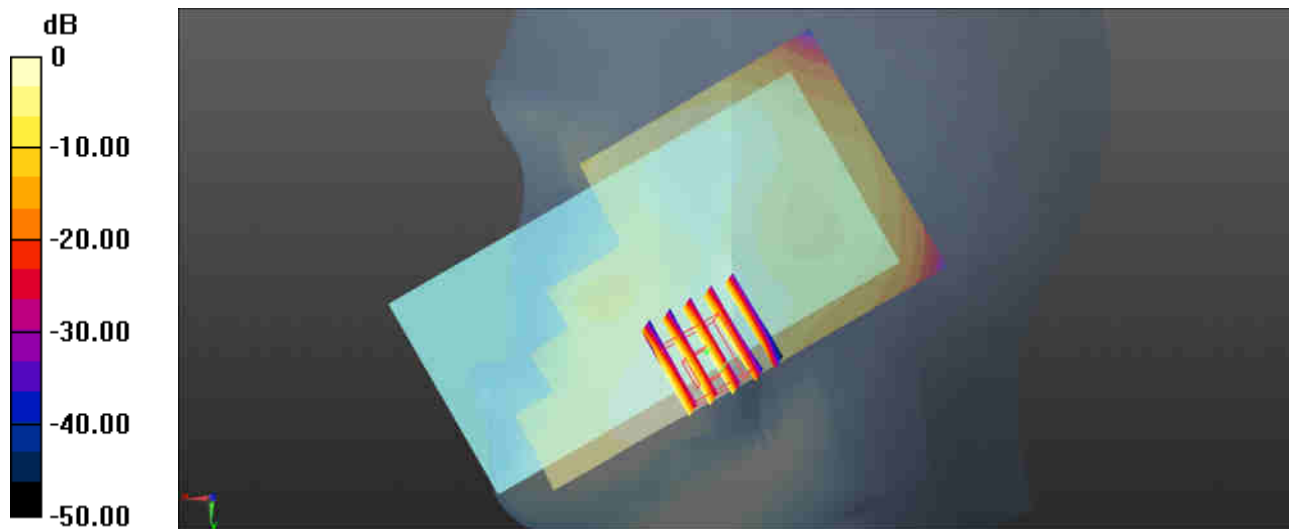

0 dB = 0.480 W/kg = -3.19 dBW/kg

**#03\_WCDMA Band V\_RMC12.2Kbps\_Right Cheek\_0mm\_Ch4233**


Communication System: UID 0, UMTS (0); Frequency: 846.6 MHz; Duty Cycle: 1:1  
 Medium: HSL\_835 Medium parameters used:  $f = 846.6 \text{ MHz}$ ;  $\sigma = 0.922 \text{ S/m}$ ;  $\epsilon_r = 41.47$ ;  
 $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.13, 9.13, 9.13); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch4233/Area Scan (61x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.267 \text{ W/kg}$

**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.431 \text{ V/m}$ ; Power Drift =  $0.16 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.289 \text{ W/kg}$   
**SAR(1 g) =  $0.233 \text{ W/kg}$ ; SAR(10 g) =  $0.181 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.262 \text{ W/kg}$

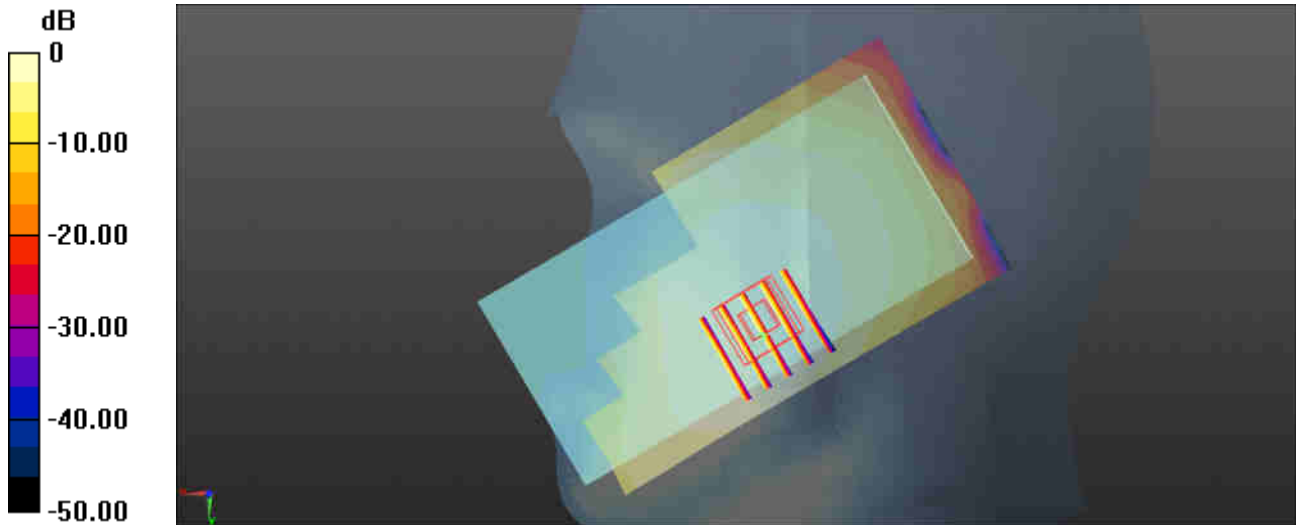

0 dB =  $0.267 \text{ W/kg} = -5.73 \text{ dBW/kg}$

**#04\_WCDMA Band IV\_RMC12.2Kbps\_Right Cheek\_0mm\_Ch1513**


Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1  
 Medium: HSL\_1750 Medium parameters used:  $f = 1752.6$  MHz;  $\sigma = 1.391$  S/m;  $\epsilon_r = 40.922$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(8.16, 8.16, 8.16); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch1513/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.161 W/kg

**Ch1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 4.647 V/m; Power Drift = 0.05 dB  
 Peak SAR (extrapolated) = 0.184 W/kg  
**SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.081 W/kg**  
 Maximum value of SAR (measured) = 0.154 W/kg

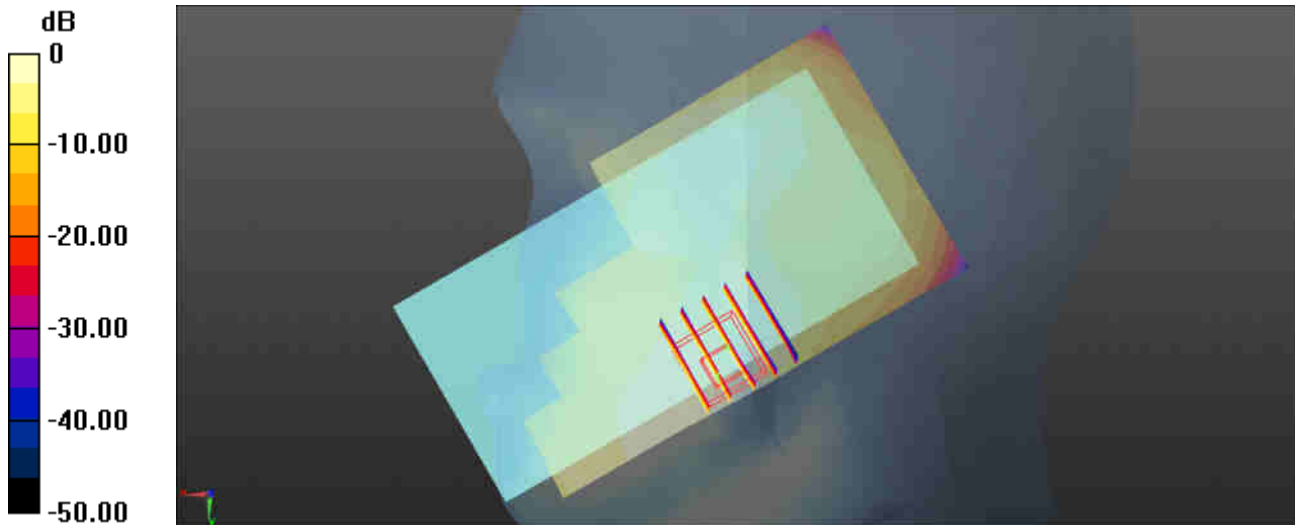

0 dB = 0.161 W/kg = -7.93 dBW/kg



**#05\_WCDMA Band II\_RMC12.2Kbps\_Right Cheek\_0mm\_Ch9538**


Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900 Medium parameters used:  $f = 907.6$  MHz;  $\sigma = 1.422$  S/m;  $\epsilon_r = 38.683$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.79, 7.79, 7.79); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9538/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.126 W/kg

**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 3.520 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.193 W/kg  
**SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.065 W/kg**  
Maximum value of SAR (measured) = 0.133 W/kg

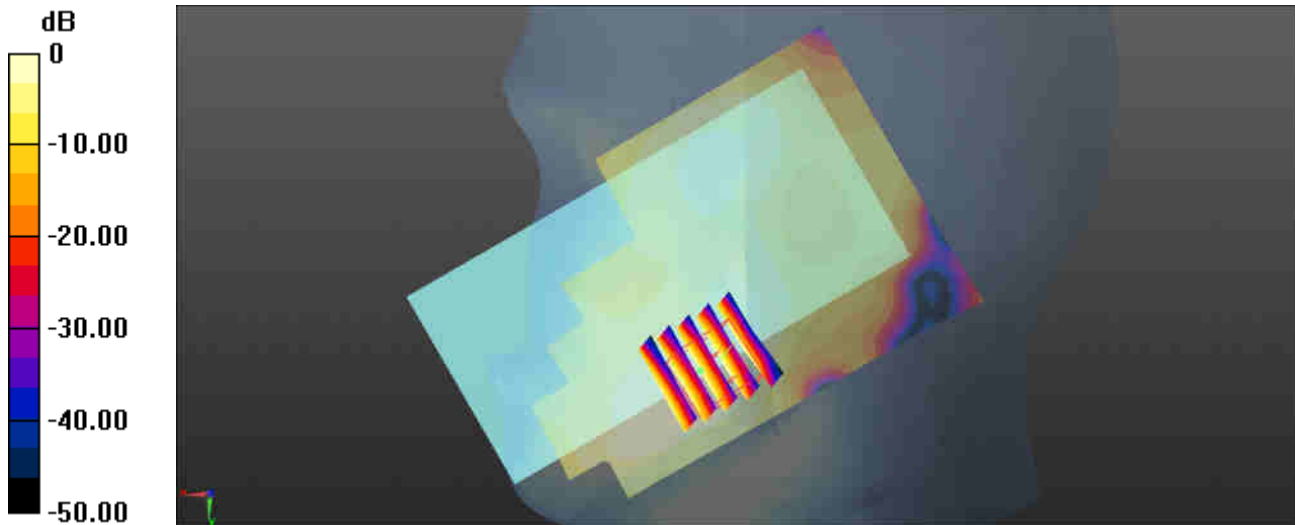

0 dB = 0.126 W/kg = -9.00 dBW/kg

**#06\_CDMA2000 BC10\_RC3 SO55\_Right Cheek\_0mm\_Ch684**


Communication System: UID 0, CDMA2000 (0); Frequency: 823.1 MHz; Duty Cycle: 1:1  
Medium: HSL\_835 Medium parameters used:  $f = 823.1$  MHz;  $\sigma = 0.899$  S/m;  $\epsilon_r = 41.779$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.13, 9.13, 9.13); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch684/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.210 W/kg

**Ch684/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 3.337 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 0.227 W/kg  
**SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.142 W/kg**  
Maximum value of SAR (measured) = 0.204 W/kg

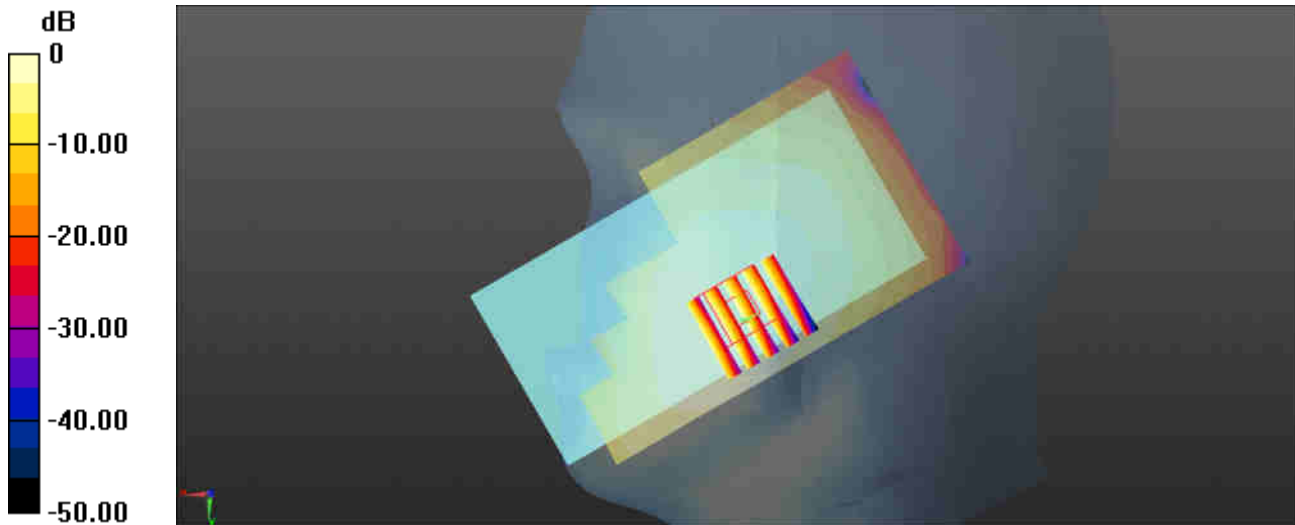

0 dB = 0.210 W/kg = -6.78 dBW/kg

**#07\_CDMA2000 BC0\_RC3 SO55\_Right Cheek\_0mm\_Ch384**

Communication System: UID 0, CDMA2000 (0); Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium: HSL\_835 Medium parameters used:  $f = 836.52$  MHz;  $\sigma = 0.912$  S/m;  $\epsilon_r = 41.604$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.13, 9.13, 9.13); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch384/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.223 W/kg

**Ch384/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 3.525 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 0.241 W/kg  
**SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.147 W/kg**  
Maximum value of SAR (measured) = 0.215 W/kg

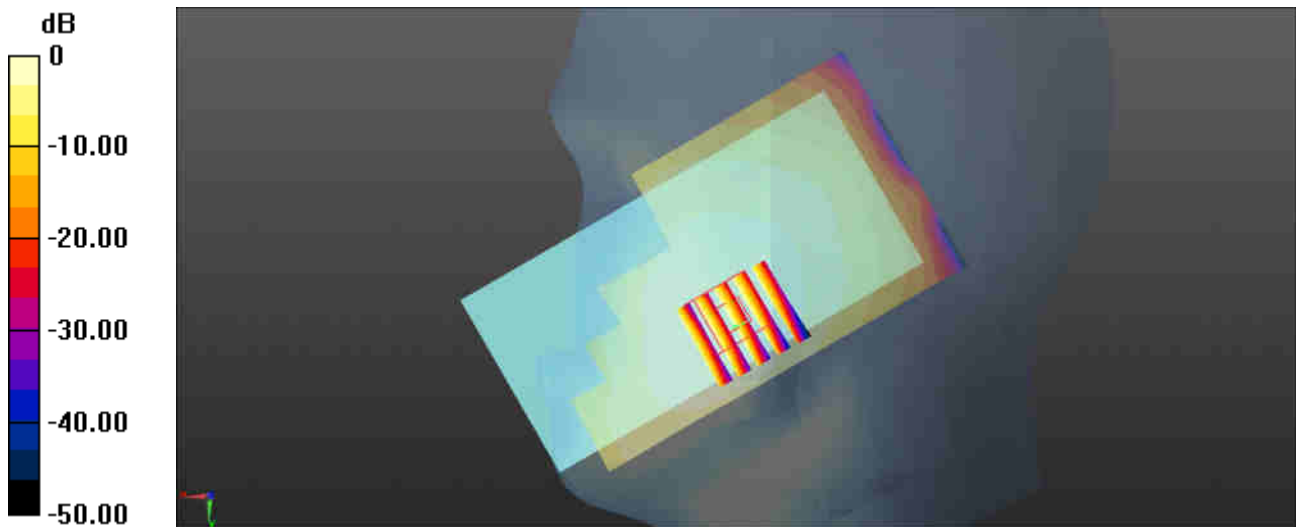

0 dB = 0.223 W/kg = -6.52 dBW/kg

**#08\_CDMA2000 BC1\_RC3 SO55\_Right Cheek\_0mm\_Ch25**


Communication System: UID 0, CDMA2000 (0); Frequency: 1851.25 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900 Medium parameters used:  $f = 1851.25$  MHz;  $\sigma = 1.361$  S/m;  $\epsilon_r = 38.948$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.79, 7.79, 7.79); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch25/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.166 W/kg

**Ch25/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 4.938 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 0.203 W/kg  
**SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.090 W/kg**  
Maximum value of SAR (measured) = 0.175 W/kg

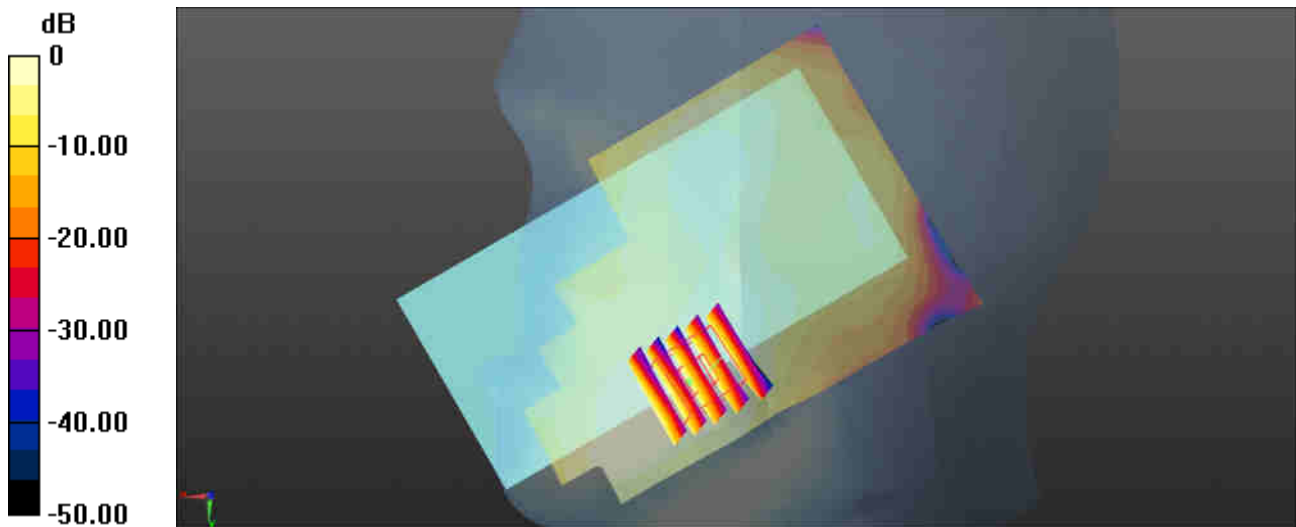

0 dB = 0.166 W/kg = -7.80 dBW/kg

**#09\_LTE Band 12\_10M\_QPSK\_1RB\_49Offset\_Right Cheek\_0mm\_Ch23095**


Communication System: UID 0, FDD\_LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_750 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.87$  S/m;  $\epsilon_r = 43.046$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.42, 9.42, 9.42); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch23095/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.125 W/kg

**Ch23095/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 3.571 V/m; Power Drift = -0.12 dB  
Peak SAR (extrapolated) = 0.134 W/kg  
**SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.091 W/kg**  
Maximum value of SAR (measured) = 0.124 W/kg

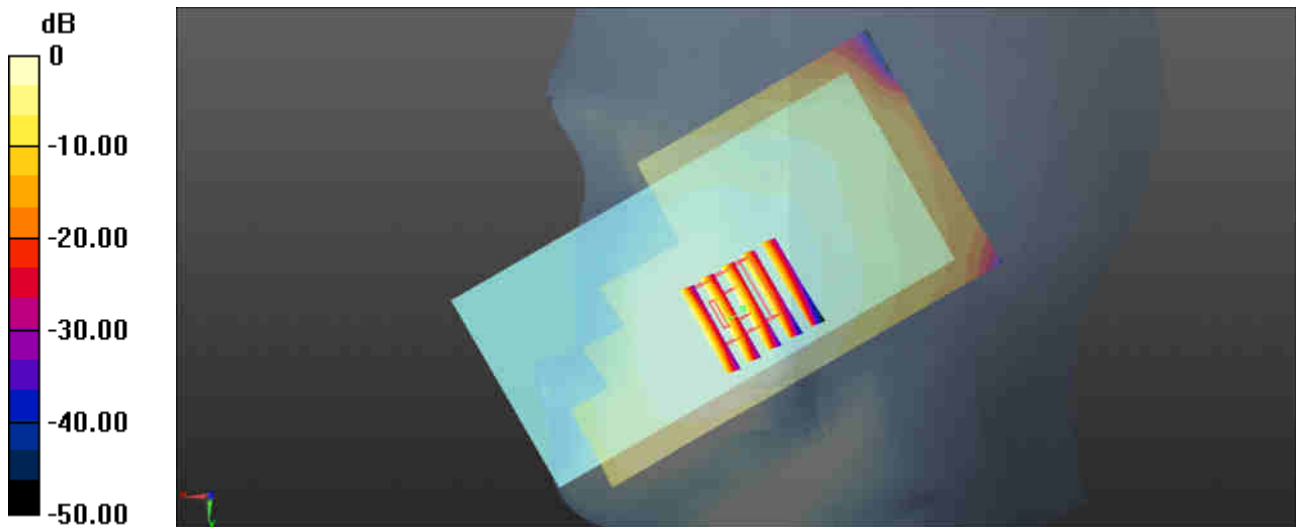

0 dB = 0.125 W/kg = -9.03 dBW/kg

**#10\_LTE Band 13\_10M\_QPSK\_1RB\_49Offset\_Right Cheek\_0mm\_Ch23230**


Communication System: UID 0, FDD\_LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1  
Medium: HSL\_835 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.86 \text{ S/m}$ ;  $\epsilon_r = 42.287$ ;  
 $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.42, 9.42, 9.42); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch23230/Area Scan (61x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.120 \text{ W/kg}$

**Ch23230/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $3.253 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
Peak SAR (extrapolated) =  $0.127 \text{ W/kg}$   
**SAR(1 g) =  $0.103 \text{ W/kg}$ ; SAR(10 g) =  $0.081 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $0.116 \text{ W/kg}$

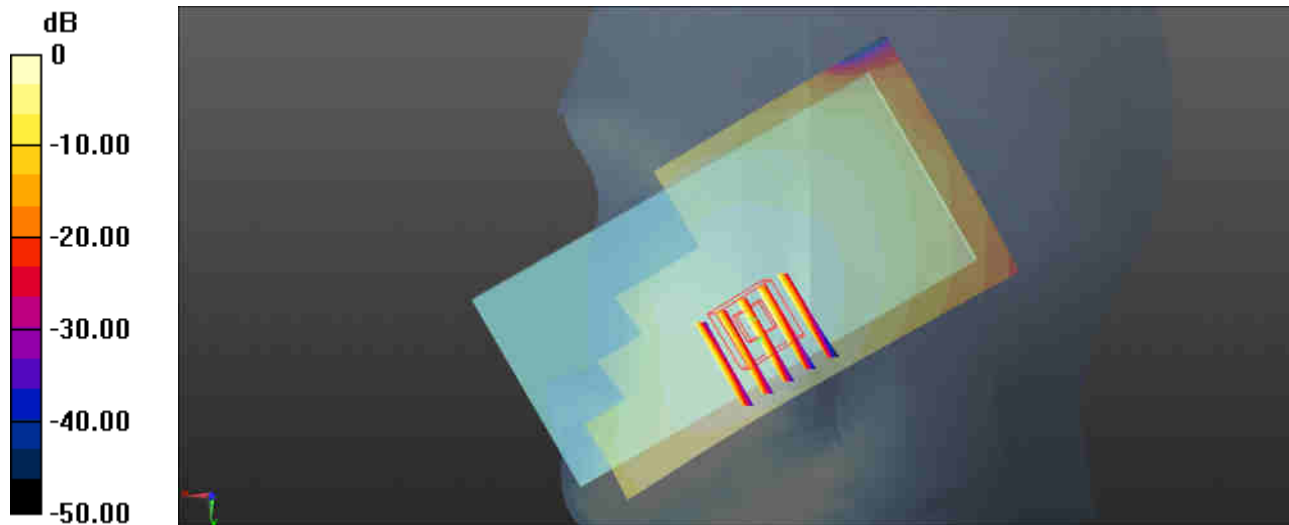

0 dB =  $0.120 \text{ W/kg}$  =  $-9.21 \text{ dBW/kg}$

**#11\_LTE Band 26\_15M\_QPSK\_1RB\_0Offset\_Right Cheek\_0mm\_Ch26865**


Communication System: UID 0, FDD\_LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1  
 Medium: HSL\_835 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.907$  S/m;  $\epsilon_r = 41.676$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.13, 9.13, 9.13); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch26865/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.175 W/kg

**Ch26865/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 4.934 V/m; Power Drift = -0.09 dB  
 Peak SAR (extrapolated) = 0.184 W/kg  
**SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.116 W/kg**  
 Maximum value of SAR (measured) = 0.166 W/kg

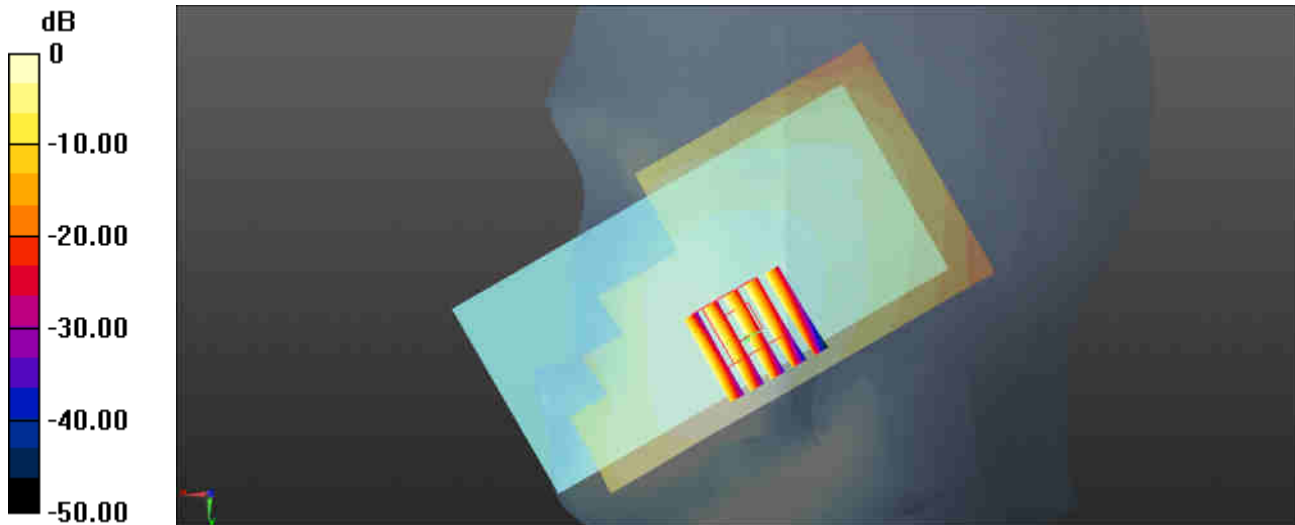

0 dB = 0.175 W/kg = -7.57 dBW/kg

**#12\_LTE Band 4\_20M\_QPSK\_1RB\_0Offset\_Left Cheek\_0mm\_Ch20175**


Communication System: UID 0, FDD\_LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium: HSL\_1750 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.37$  S/m;  $\epsilon_r = 41.012$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3753; ConvF(8.16, 8.16, 8.16); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20175/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.193 W/kg

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 4.653 V/m; Power Drift = 0.11 dB  
 Peak SAR (extrapolated) = 0.223 W/kg  
**SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.093 W/kg**  
 Maximum value of SAR (measured) = 0.183 W/kg

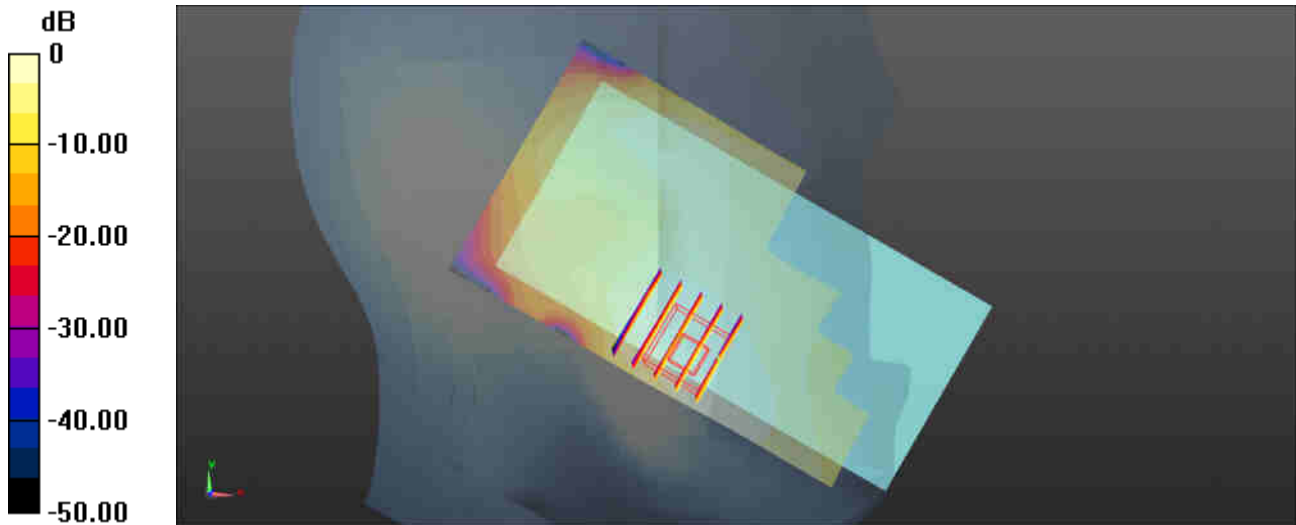

0 dB = 0.193 W/kg = -7.14 dBW/kg



**#13\_LTE Band 25\_20M\_QPSK\_1RB\_0Offset\_Left Cheek\_0mm\_Ch26590**


Communication System: UID 0, FDD\_LTE (0); Frequency: 1905 MHz; Duty Cycle: 1:1  
 Medium: HSL\_1900 Medium parameters used:  $f = 1905$  MHz;  $\sigma = 1.419$  S/m;  $\epsilon_r = 38.694$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.79, 7.79, 7.79); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch26590/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.208 W/kg

**Ch26590/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 4.887 V/m; Power Drift = 0.16 dB  
 Peak SAR (extrapolated) = 0.253 W/kg  
**SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.092 W/kg**  
 Maximum value of SAR (measured) = 0.199 W/kg

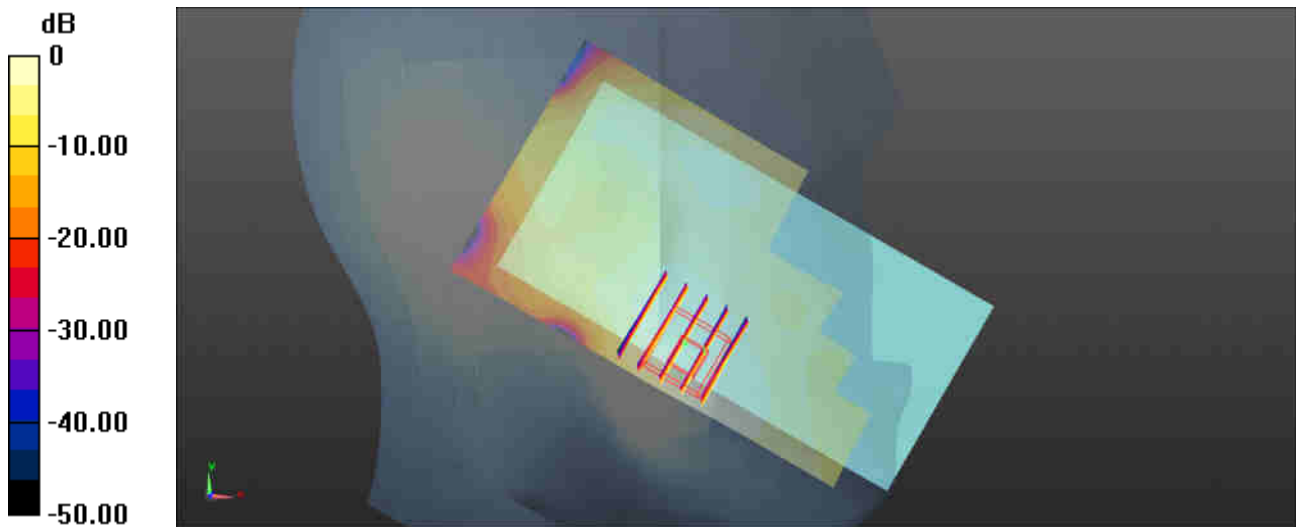

0 dB = 0.208 W/kg = -6.82 dBW/kg

**#14\_LTE Band 30\_10M\_QPSK\_1RB\_0Offset\_Right Cheek\_0mm\_Ch27710**


Communication System: UID 0, FDD\_LTE (0); Frequency: 2310 MHz;Duty Cycle: 1:1  
Medium: HSL\_2300 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.696$  S/m;  $\epsilon_r = 39.201$ ;  
 $\rho = 1000$ kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.35, 7.35, 7.35); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch27710/Area Scan (81x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.156 W/kg

**Ch27710/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 3.784 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.183 W/kg  
**SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.056 W/kg**  
Maximum value of SAR (measured) = 0.143 W/kg

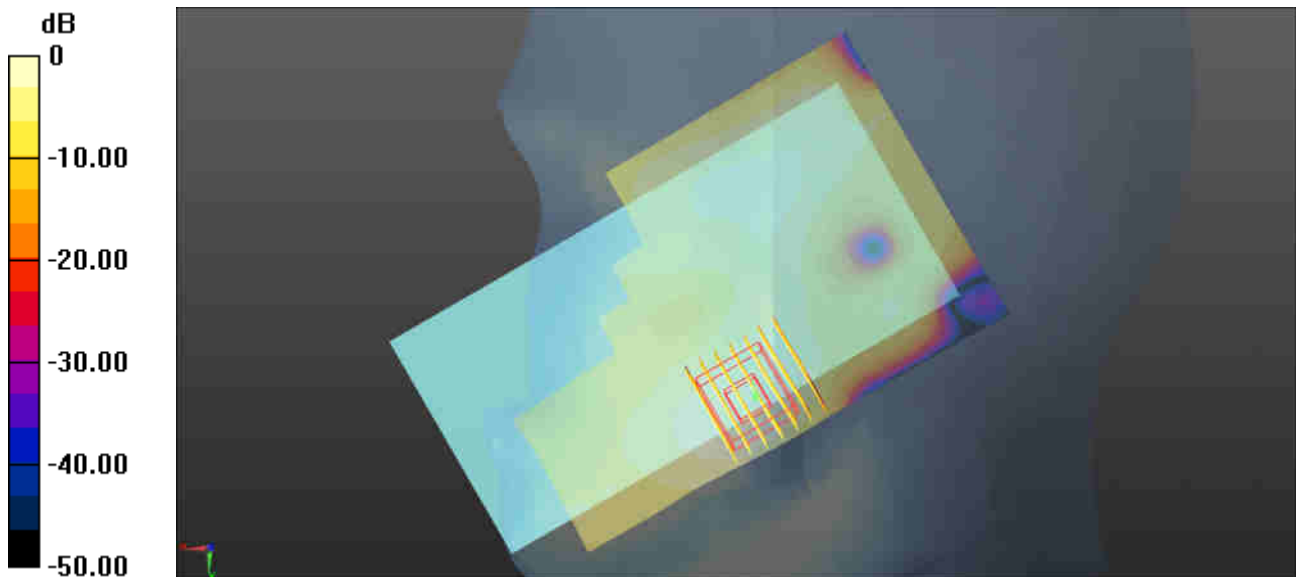

0 dB = 0.156 W/kg = -8.07 dBW/kg

**#15\_LTE Band 7\_20M\_QPSK\_1RB\_0Offset\_Left Cheek\_0mm\_Ch21350**


Communication System: UID 0, FDD\_LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 2.002$  S/m;  $\epsilon_r = 38.203$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(6.9, 6.9, 6.9); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch21350/Area Scan (81x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.188 W/kg

**Ch21350/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 3.030 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.238 W/kg  
**SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.063 W/kg**  
Maximum value of SAR (measured) = 0.178 W/kg

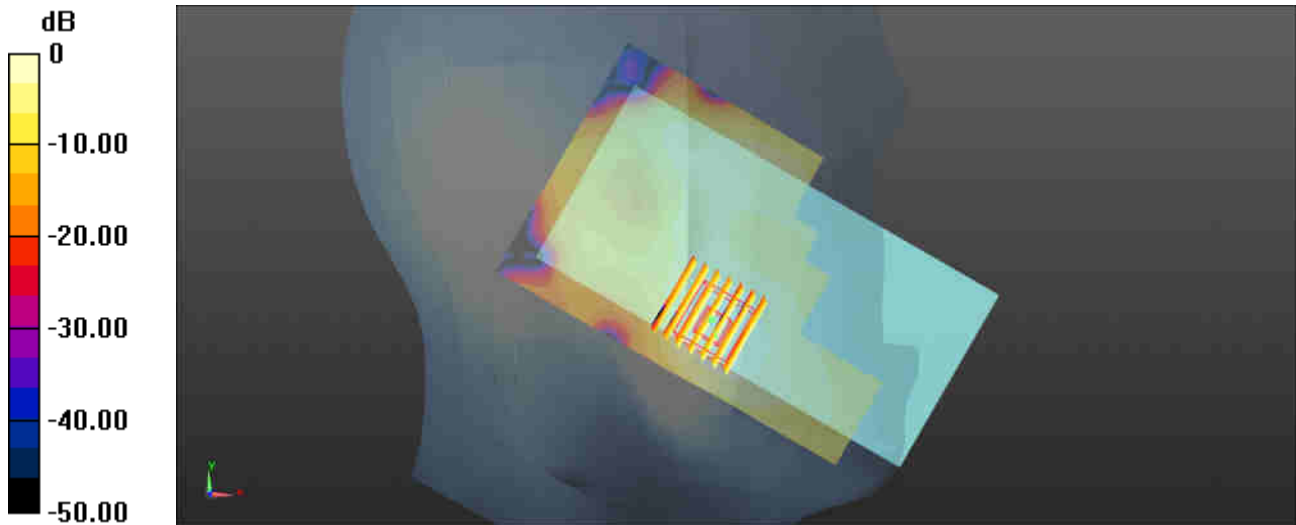

0 dB = 0.188 W/kg = -7.26 dBW/kg

**#16\_LTE Band 41\_20M\_QPSK\_1RB\_0Offset\_Left Cheek\_0mm\_Ch40620**

Communication System: UID 0, TDD\_LTE (0); Frequency: 2593 MHz;Duty Cycle: 1:1.59

Medium: HSL\_2600 Medium parameters used:  $f = 2593$  MHz;  $\sigma = 2.042$  S/m;  $\epsilon_r = 38.067$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(6.9, 6.9, 6.9); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch40620/Area Scan (81x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0836 W/kg


**Ch40620/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.649 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0960 W/kg

**SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0793 W/kg

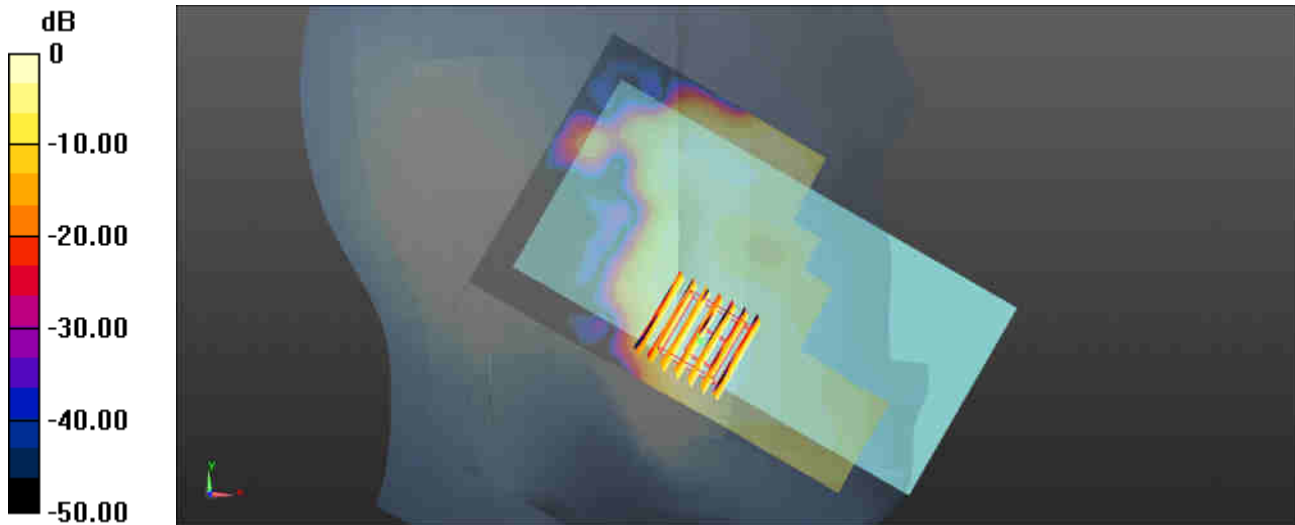

0 dB = 0.0836 W/kg = -10.78 dBW/kg

### #17\_WLAN2.4GHz\_802.11b 1Mbps\_Right Tilted\_0mm\_Ch6\_Ant 1


Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1015  
Medium: HSL\_2450 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.836$  S/m;  $\epsilon_r = 39.019$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.28, 7.28, 7.28); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch6/Area Scan (81x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.30 W/kg

**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 23.54 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 2.04 W/kg  
**SAR(1 g) = 0.845 W/kg; SAR(10 g) = 0.368 W/kg**  
Maximum value of SAR (measured) = 1.36 W/kg

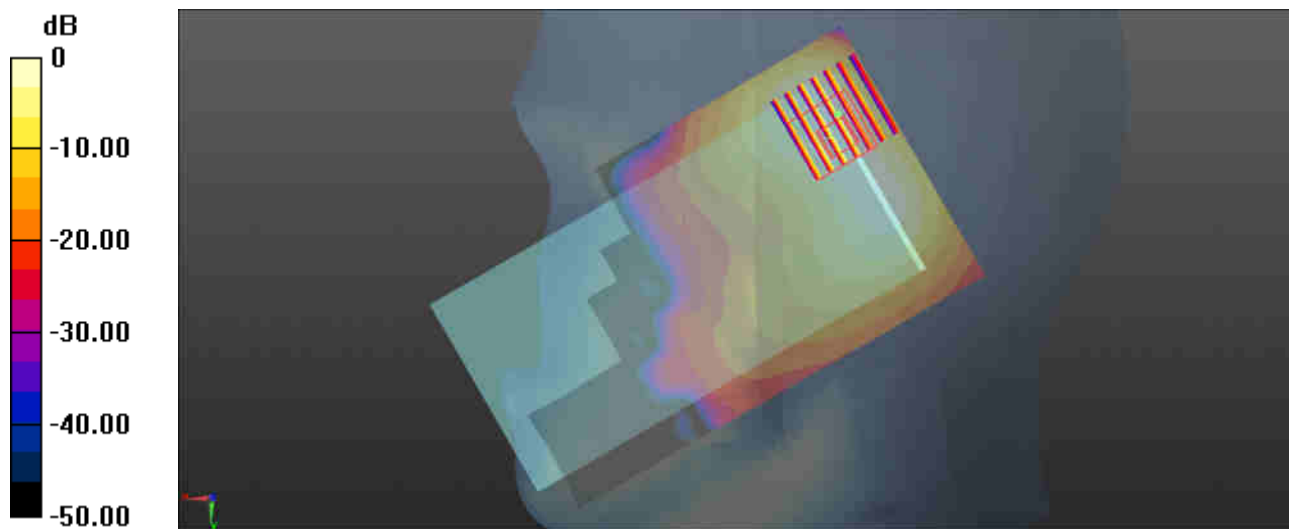

0 dB = 1.30 W/kg = 1.14 dBW/kg

### #18\_WLAN2.4GHz\_802.11b 1Mbps\_Right Cheek\_0mm\_Ch6\_Ant 2


Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1.010  
Medium: HSL\_2450 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.836$  S/m;  $\epsilon_r = 39.019$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.28, 7.28, 7.28); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch6/Area Scan (91x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.0827 W/kg

**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 1.305 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 0.0430 W/kg  
**SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.00689 W/kg**  
Maximum value of SAR (measured) = 0.0346 W/kg

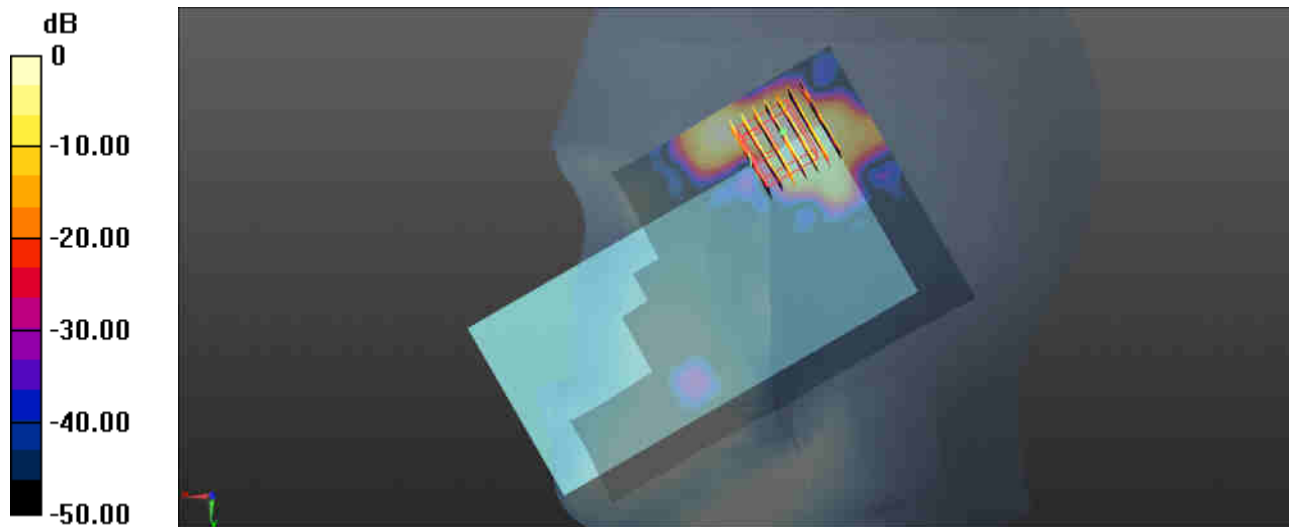

0 dB = 0.0827 W/kg = -10.82 dBW/kg

**#19\_WLAN2.4GHz\_802.11g 6Mbps\_Right Tilted\_0mm\_Ch1\_Ant 1+2**


Communication System: UID 0, WIFI (0); Frequency: 2412 MHz; Duty Cycle: 1:1.019  
Medium: HSL\_2450 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.805$  S/m;  $\epsilon_r = 39.119$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.28, 7.28, 7.28); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch1/Area Scan (81x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.00 W/kg

**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 20.52 V/m; Power Drift = 0.10 dB  
Peak SAR (extrapolated) = 1.59 W/kg  
**SAR(1 g) = 0.656 W/kg; SAR(10 g) = 0.289 W/kg**  
Maximum value of SAR (measured) = 1.06 W/kg

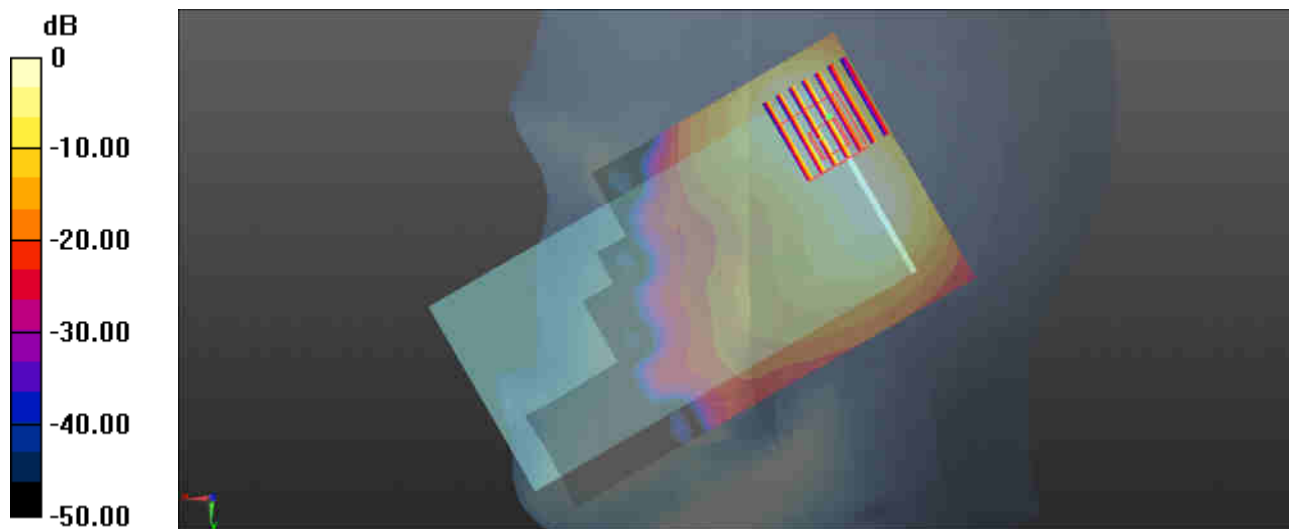

0 dB = 1.00 W/kg = 0.00 dBW/kg

**#20\_WLAN5.3GHz\_802.11a 6Mbps\_Right Tilted\_0mm\_Ant 1\_Ch64**

Communication System: UID 0, WIFI (0); Frequency: 5320 MHz;Duty Cycle: 1:1.019  
Medium: HSL\_5000 Medium parameters used:  $f = 5320$  MHz;  $\sigma = 4.926$  S/m;  $\epsilon_r = 37$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.39, 5.39, 5.39); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch64/Area Scan (81x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.274 W/kg


**Ch64/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.737 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.606 W/kg

**SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.027 W/kg**

Maximum value of SAR (measured) = 0.341 W/kg

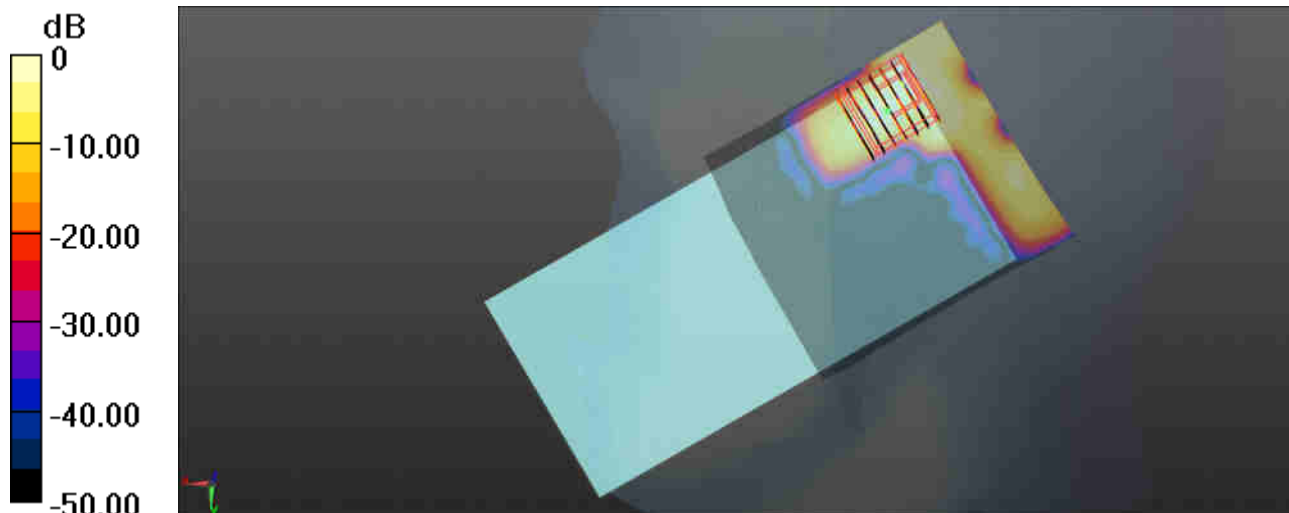

0 dB = 0.341 W/kg = -4.67 dBW/kg



**#21\_WLAN5.3GHz\_802.11a 6Mbps\_Right Tilted\_0mm\_Ant 2\_Ch60**


Communication System: UID 0, WIFI (0); Frequency: 5300 MHz;Duty Cycle: 1:1.019  
Medium: HSL\_5000 Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.909$  S/m;  $\epsilon_r = 37.032$ ;  
 $\rho = 1000$ kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.39, 5.39, 5.39); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch60/Area Scan (91x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.365 W/kg

**Ch60/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 1.718 V/m; Power Drift = -0.1 dB  
Peak SAR (extrapolated) = 0.396 W/kg  
**SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.013 W/kg**  
Maximum value of SAR (measured) = 0.168 W/kg

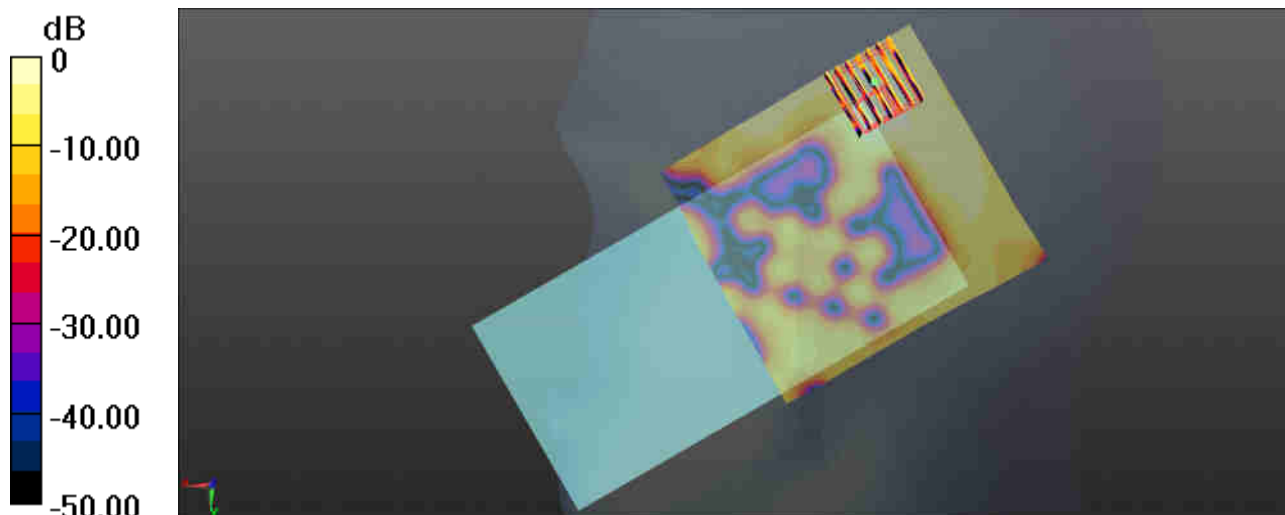

0 dB = 0.168 W/kg = -7.75 dBW/kg

**#22\_WLAN5.3GHz\_802.11a 6Mbps\_Right Tilted\_0mm\_Ant 1+2\_Ch64**

Communication System: UID 0, WIFI (0); Frequency: 5320 MHz; Duty Cycle: 1:1.019  
Medium: HSL\_5000 Medium parameters used:  $f = 5320$  MHz;  $\sigma = 4.926$  S/m;  $\epsilon_r = 37$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.39, 5.39, 5.39); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch64/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.22 W/kg


**Ch64/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.829 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.66 W/kg

**SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.143 W/kg**

Maximum value of SAR (measured) = 1.42 W/kg

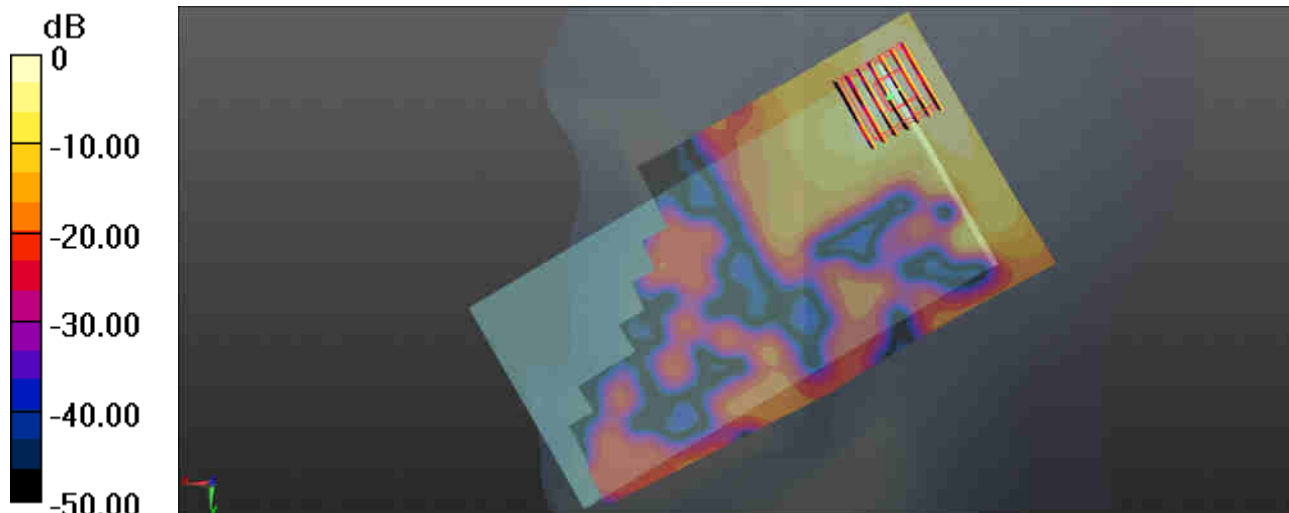

0 dB = 1.42 W/kg = 1.52 dBW/kg

**#23\_WLAN5.5GHz\_802.11a 6Mbps\_Right Cheek\_0mm\_Ant 1\_Ch100**


Communication System: UID 0, WIFI (0); Frequency: 5500 MHz; Duty Cycle: 1:1.019  
Medium: HSL\_5000 Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.104$  S/m;  $\epsilon_r = 36.731$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.04, 5.04, 5.04); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch100/Area Scan (81x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.270 W/kg

**Ch100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 0.6320 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 0.482 W/kg  
**SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.023 W/kg**  
Maximum value of SAR (measured) = 0.258 W/kg

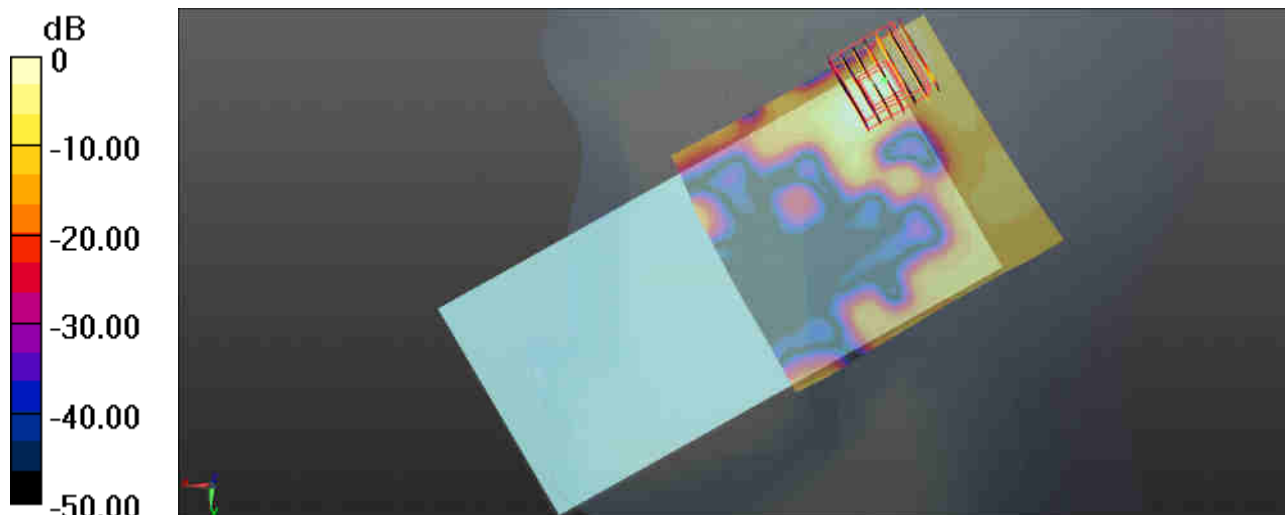

0 dB = 0.258 W/kg = -5.88 dBW/kg

**#24\_WLAN5.5GHz\_802.11a 6Mbps\_Right Tilted\_0mm\_Ant 2\_Ch116**


Communication System: UID 0, WIFI (0); Frequency: 5580 MHz;Duty Cycle: 1:1.019  
Medium: HSL\_5000 Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.187$  S/m;  $\epsilon_r = 36.63$ ;  
 $\rho = 1000$ kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.04, 5.04, 5.04); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch116/Area Scan (91x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.109 W/kg

**Ch116/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm,dz=1.4mm  
Reference Value = 0.2000 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 0.402 W/kg  
**SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.00655 W/kg**  
Maximum value of SAR (measured) = 0.0942 W/kg

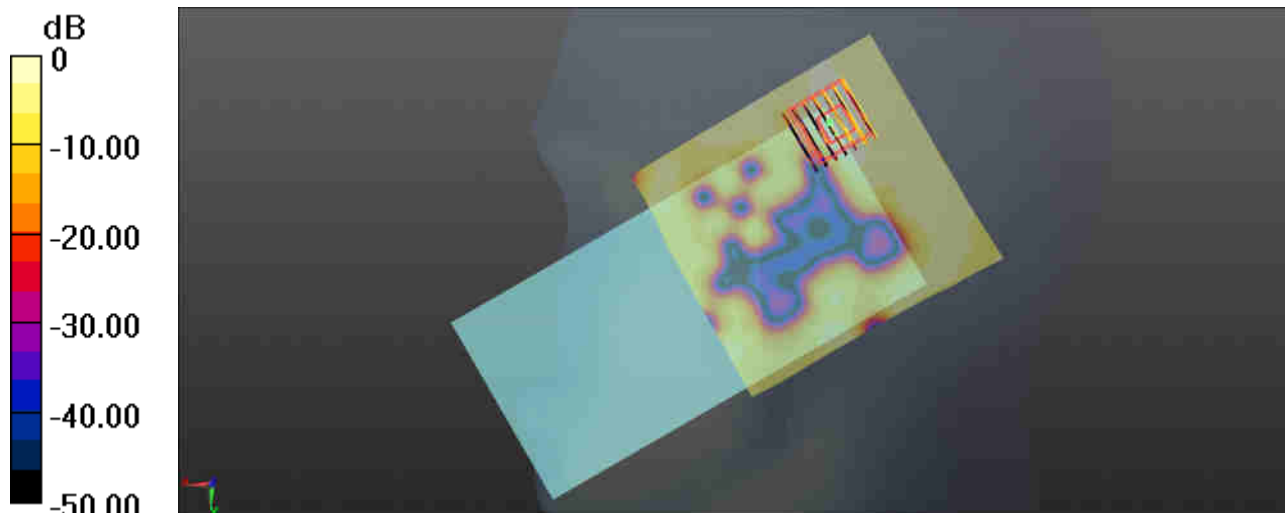

0 dB = 0.0942 W/kg = -10.26 dBW/kg

**#25\_WLAN5.5GHz\_802.11a 6Mbps\_Right Cheek\_0mm\_Ant 1+2\_Ch100**


Communication System: UID 0, WIFI (0); Frequency: 5500 MHz; Duty Cycle: 1:1.019  
Medium: HSL\_5000 Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.104$  S/m;  $\epsilon_r = 36.731$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.04, 5.04, 5.04); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch100/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.634 W/kg

**Ch100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 0 V/m; Power Drift = 0.10 dB  
Peak SAR (extrapolated) = 1.13 W/kg  
**SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.042 W/kg**  
Maximum value of SAR (measured) = 0.684 W/kg

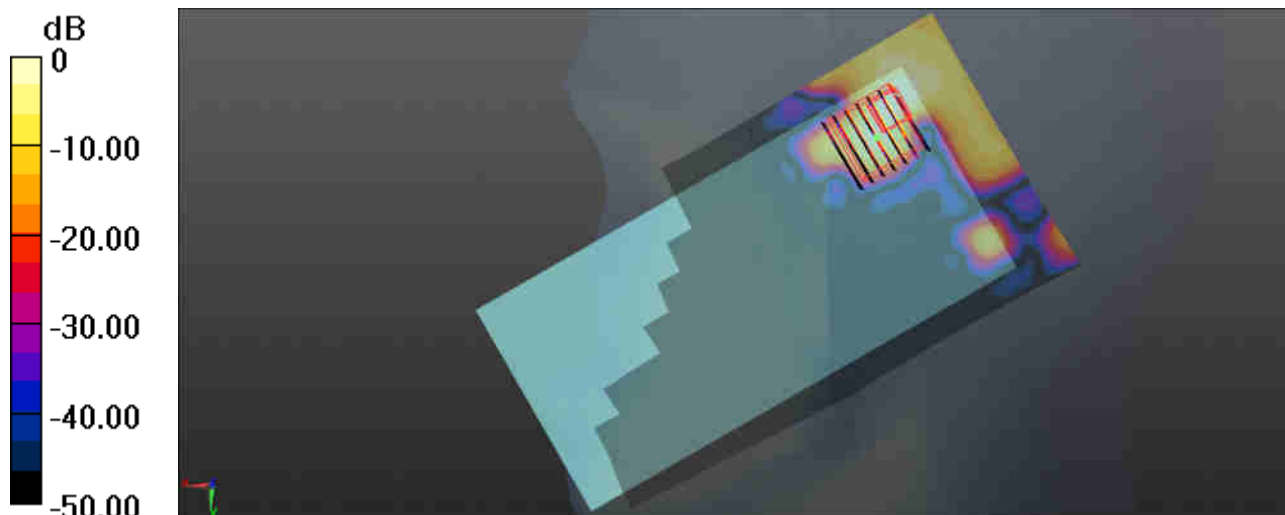

0 dB = 0.684 W/kg = -1.65 dBW/kg

**#26\_WLAN5.8GHz\_802.11a 6Mbps\_Right Tilted\_0mm\_Ant 1\_Ch149**


Communication System: UID 0, WIFI (0); Frequency: 5745 MHz; Duty Cycle: 1:1.019  
Medium: HSL\_5000 Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.356$  S/m;  $\epsilon_r = 36.379$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.34, 5.34, 5.34); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch149/Area Scan (81x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.520 W/kg

**Ch149/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 1.315 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 1.14 W/kg  
**SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.059 W/kg**  
Maximum value of SAR (measured) = 0.678 W/kg

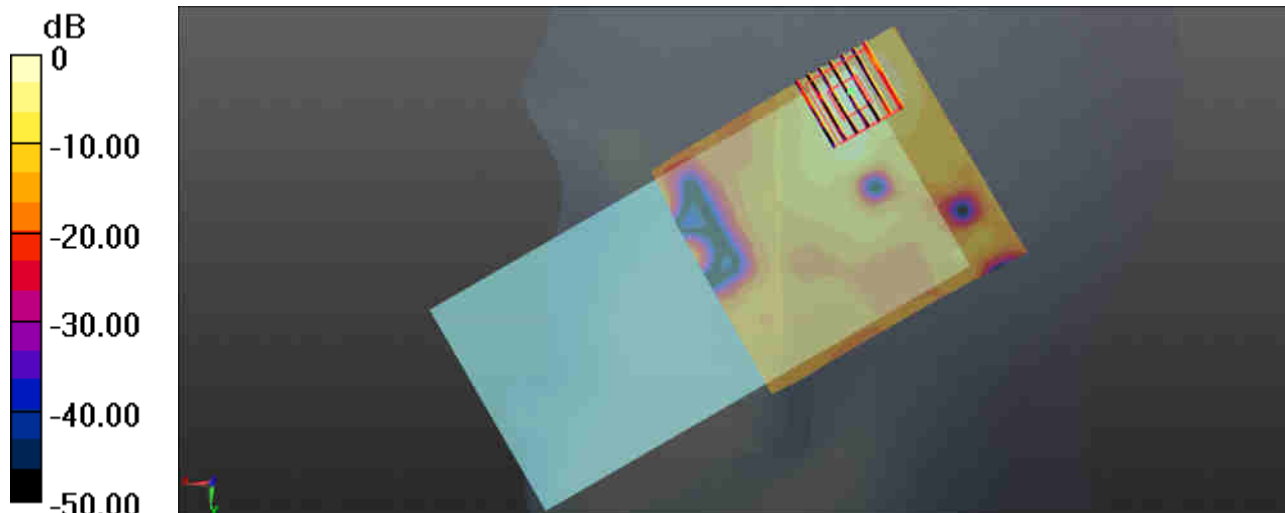

0 dB = 0.678 W/kg = -1.69 dBW/kg

**#27\_WLAN5.8GHz\_802.11a 6Mbps\_Right Cheek\_0mm\_Ant 2\_Ch149**


Communication System: UID 0, WIFI (0); Frequency: 5745 MHz; Duty Cycle: 1:1.019  
Medium: HSL\_5000 Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.356$  S/m;  $\epsilon_r = 36.379$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.34, 5.34, 5.34); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch149/Area Scan (11x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.0730 W/kg

**Ch149/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 0.6930 V/m; Power Drift = -0.11 dB  
Peak SAR (extrapolated) = 0.202 W/kg  
**SAR(1 g) = 0.0053 W/kg; SAR(10 g) = 0.00101 W/kg**  
Maximum value of SAR (measured) = 0.0589 W/kg

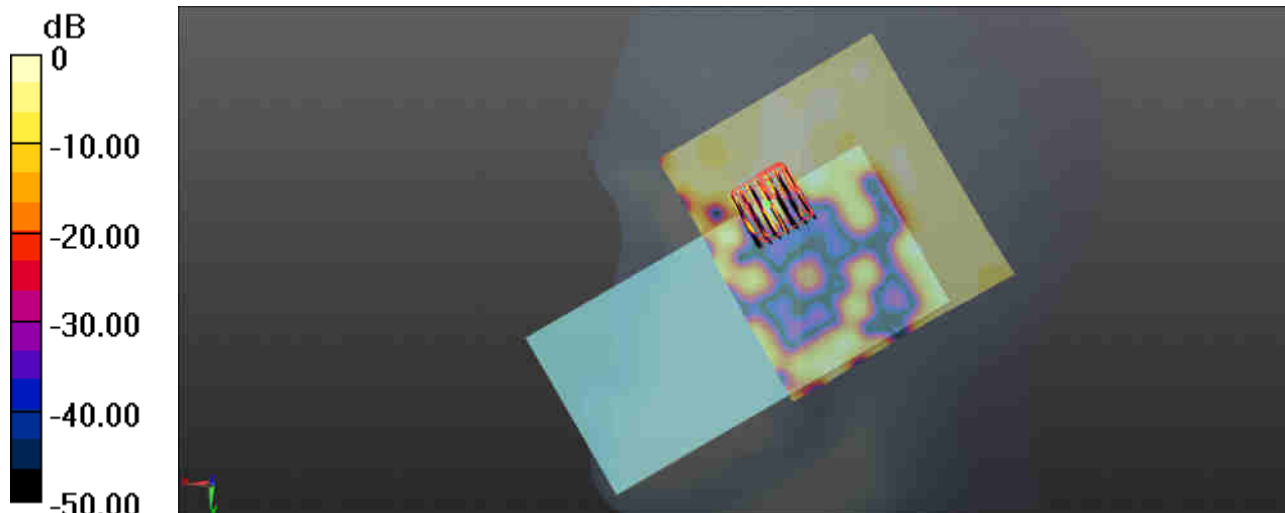

0 dB = 0.0589 W/kg = -12.30 dBW/kg

**#28\_WLAN5.8GHz\_802.11a 6Mbps\_Right Cheek\_0mm\_Ant 1+2\_Ch149**


Communication System: UID 0, WIFI (0); Frequency: 5745 MHz; Duty Cycle: 1:1.019  
Medium: HSL\_5000 Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.356$  S/m;  $\epsilon_r = 36.379$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.34, 5.34, 5.34); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch149/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.709 W/kg

**Ch149/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 0 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 1.51 W/kg  
**SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.082 W/kg**  
Maximum value of SAR (measured) = 0.868 W/kg

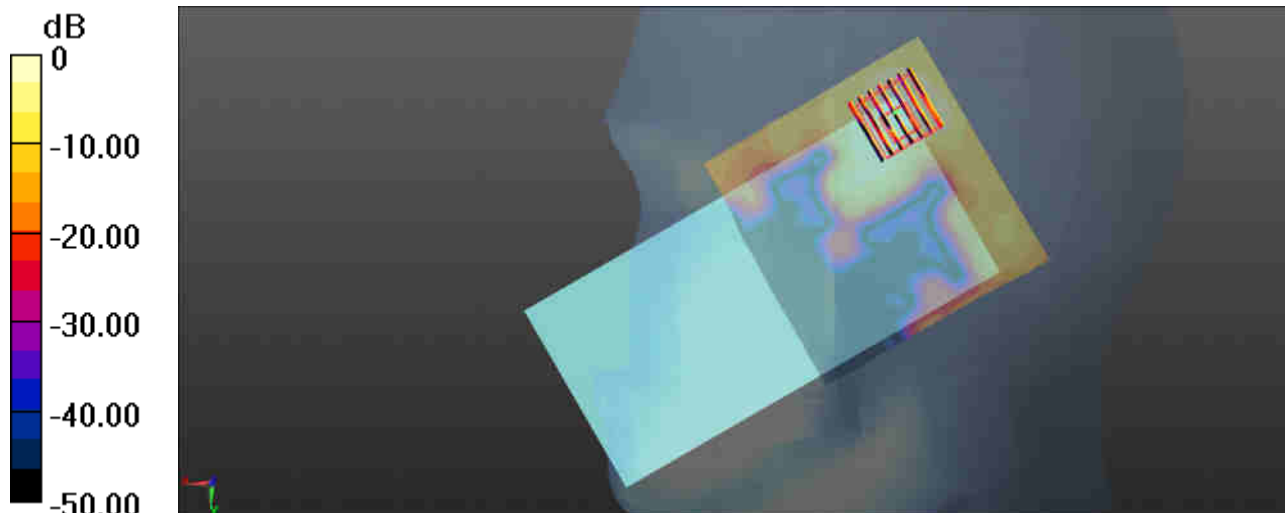

0 dB = 0.868 W/kg = -0.61 dBW/kg



### #29\_GSM850\_GPRS 4 Tx slots\_Front\_10mm\_Ch128

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.08  
Medium: MSL\_835 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.975$  S/m;  $\epsilon_r = 54.198$ ;

$$\rho = 1000 \text{ kg/m}^3$$

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.21, 9.21, 9.21); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch128/Area Scan (61x121x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.03 W/kg


**Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 24.78 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.768 W/kg; SAR(10 g) = 0.457 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

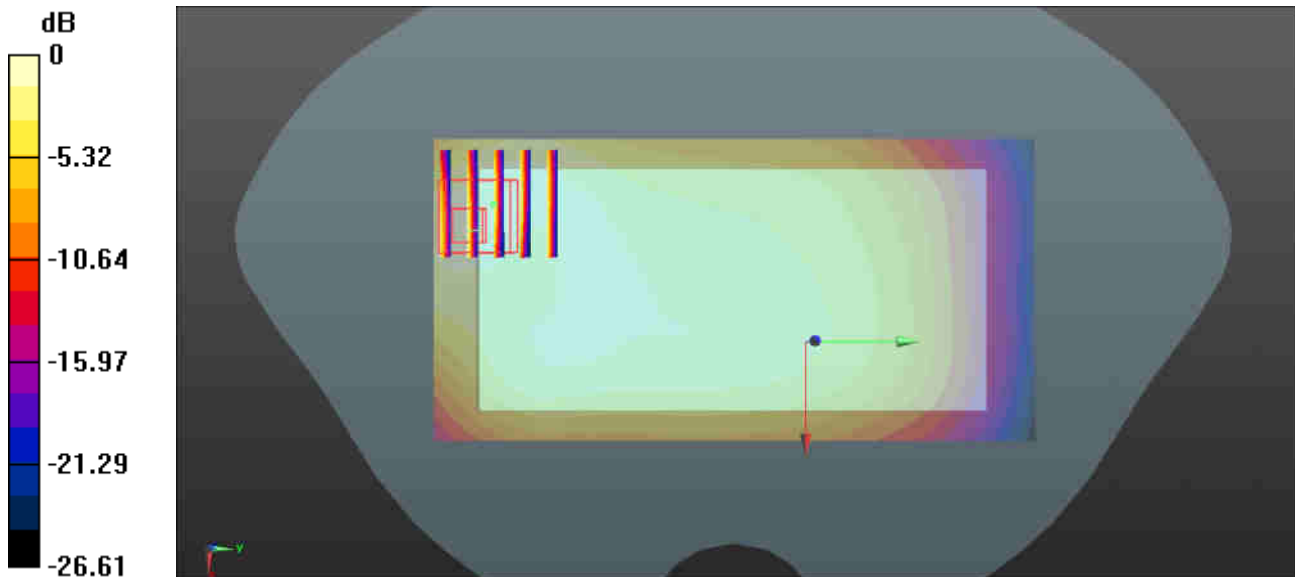

0 dB = 1.03 W/kg = 0.13 dBW/kg

**#30\_GSM1900\_GPRS 4 Tx slots\_Bottom Side\_10mm\_Ch810**

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08  
 Medium: MSL\_1900 Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.528$  S/m;  $\epsilon_r = 52.715$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(7.58, 7.58, 7.58); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch810/Area Scan (31x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.10 W/kg


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.37 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.29 W/kg

**SAR(1 g) = 0.735 W/kg; SAR(10 g) = 0.387 W/kg**

Maximum value of SAR (measured) = 1.03 W/kg

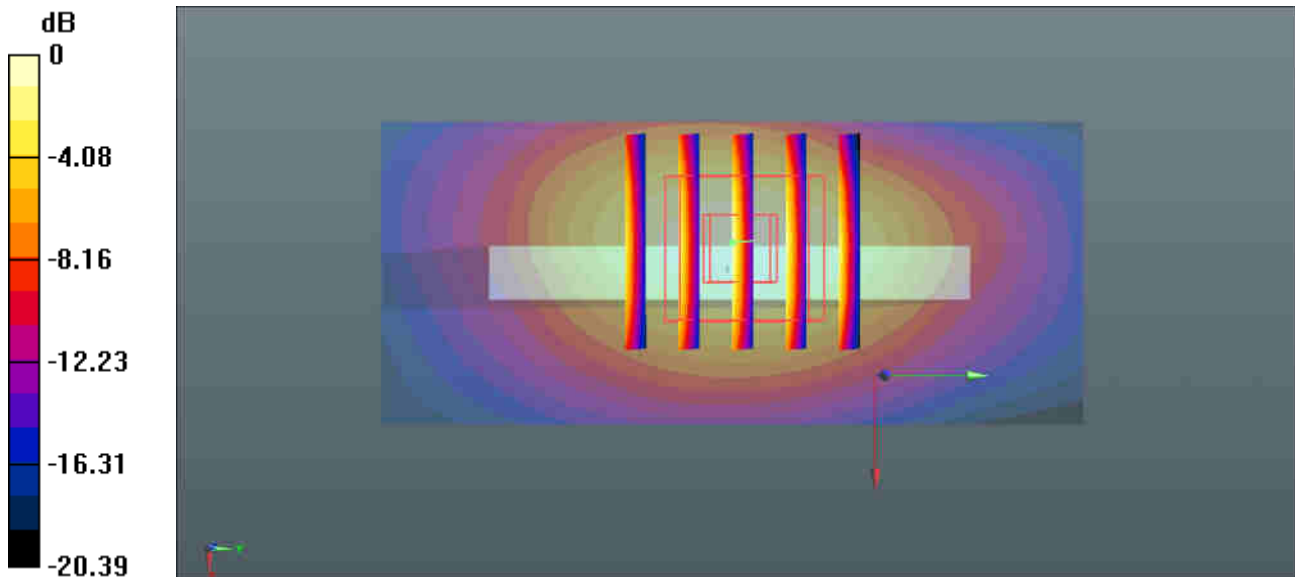

0 dB = 1.10 W/kg = 0.41 dBW/kg

**#31\_WCDMA Band V\_RMC12.2K\_Back\_10mm\_Ch4233**


Communication System: UID 0, UMTS (0); Frequency: 846.6 MHz; Duty Cycle: 1:1  
 Medium: MSL\_835 Medium parameters used:  $f = 846.6 \text{ MHz}$ ;  $\sigma = 0.998 \text{ S/m}$ ;  $\epsilon_r = 53.959$ ;  
 $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature :  $23.4 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.21, 9.21, 9.21); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch4233/Area Scan (61x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.514 \text{ W/kg}$

**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $15.97 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.623 \text{ W/kg}$   
**SAR(1 g) =  $0.372 \text{ W/kg}$ ; SAR(10 g) =  $0.217 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.507 \text{ W/kg}$

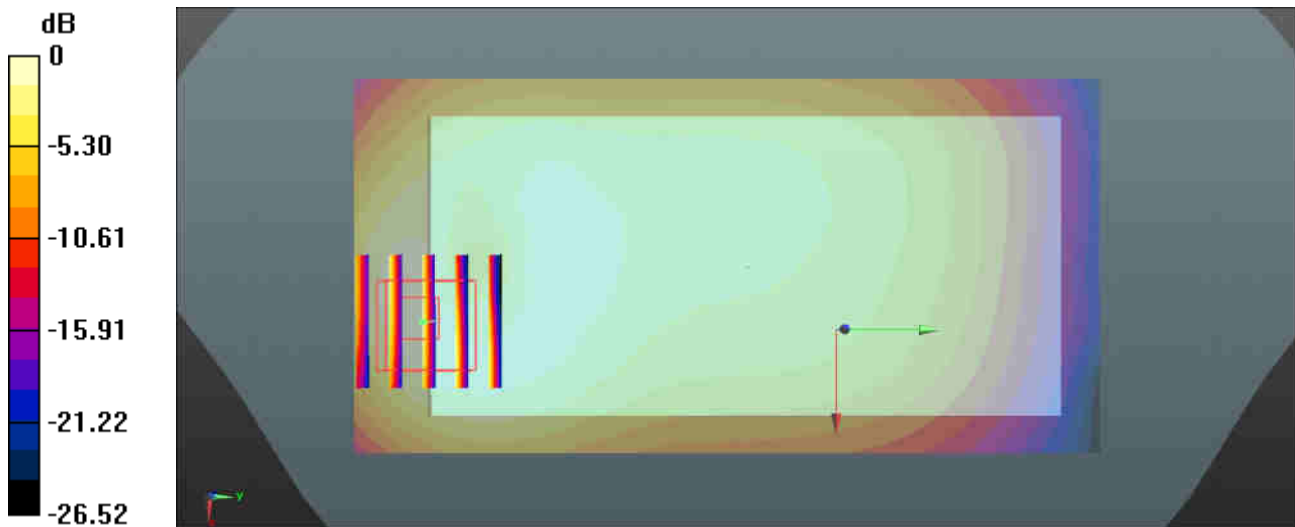

0 dB =  $0.514 \text{ W/kg} = -2.89 \text{ dBW/kg}$

**#32\_WCDMA Band IV\_RMC12.2Kbps\_Bottom Side 10mm\_Ch1312**


Communication System: UID 0, UMTS (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1  
 Medium: MSL\_1750 Medium parameters used:  $f = 1712.4$  MHz;  $\sigma = 1.457$  S/m;  $\epsilon_r = 53.66$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.55, 7.55, 7.55); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch1312/Area Scan (31x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 1.18 W/kg

**Ch1312/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 24.89 V/m; Power Drift = 0.03 dB  
 Peak SAR (extrapolated) = 1.50 W/kg  
**SAR(1 g) = 0.891 W/kg; SAR(10 g) = 0.485 W/kg**  
 Maximum value of SAR (measured) = 1.23 W/kg

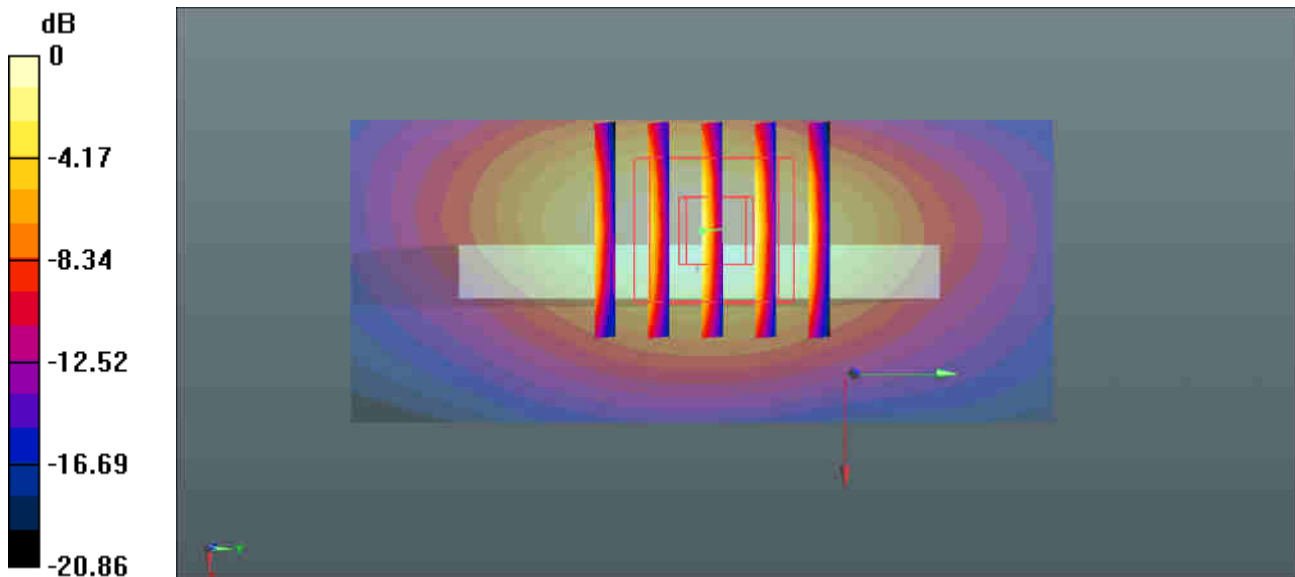

0 dB = 1.18 W/kg = 0.72 dBW/kg

**#33\_WCDMA Band II\_RMC12.2Kbps\_Bottom Side 10mm\_Ch9538**


Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1  
 Medium: MSL\_1900 Medium parameters used:  $f = 1907.6$  MHz;  $\sigma = 1.525$  S/m;  $\epsilon_r = 52.726$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.58, 7.58, 7.58); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9538/Area Scan (31x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.926 W/kg

**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 23.34 V/m; Power Drift = 0.09 dB  
 Peak SAR (extrapolated) = 1.09 W/kg  
**SAR(1 g) = 0.621 W/kg; SAR(10 g) = 0.337 W/kg**  
 Maximum value of SAR (measured) = 0.868 W/kg

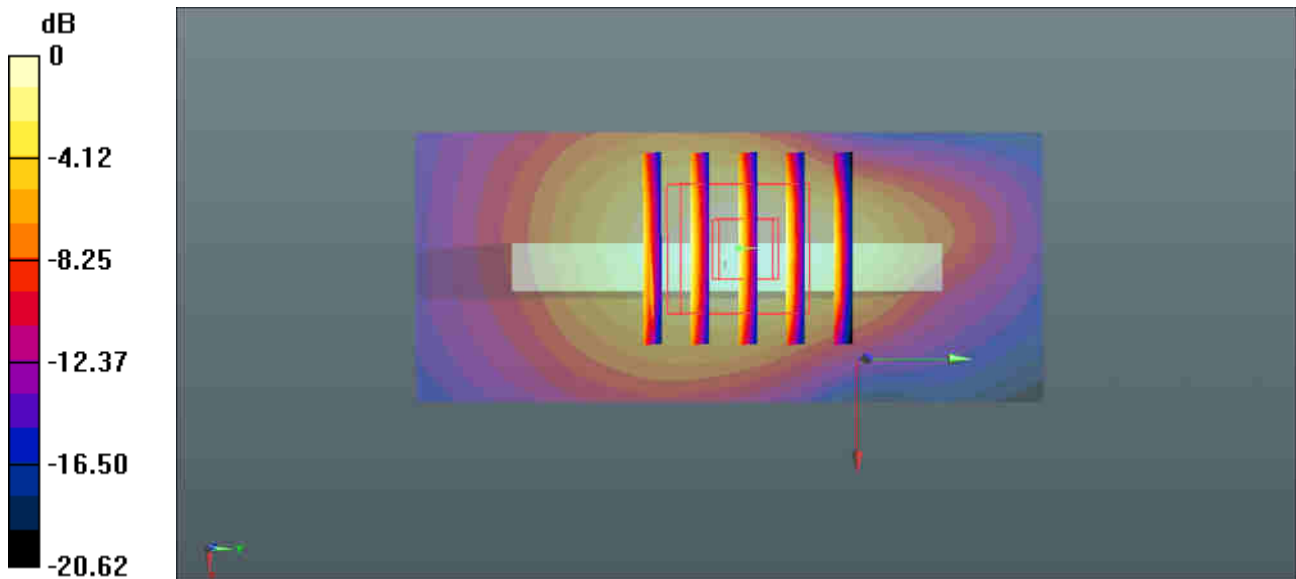

0 dB = 0.926 W/kg = -0.33 dBW/kg

**#34\_CDMA2000 BC10\_RTAP 153.6Kbps\_Front 10mm\_Ch476**


Communication System: UID 0, CDMA2000 (0); Frequency: 817.9 MHz; Duty Cycle: 1:1  
 Medium: MSL\_835 Medium parameters used:  $f = 817.9$  MHz;  $\sigma = 0.969$  S/m;  $\epsilon_r = 54.251$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.21, 9.21, 9.21); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch476/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.423 W/kg

**Ch476/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 16.44 V/m; Power Drift = -0.02 dB  
 Peak SAR (extrapolated) = 0.575 W/kg  
**SAR(1 g) = 0.340 W/kg; SAR(10 g) = 0.199 W/kg**  
 Maximum value of SAR (measured) = 0.453 W/kg

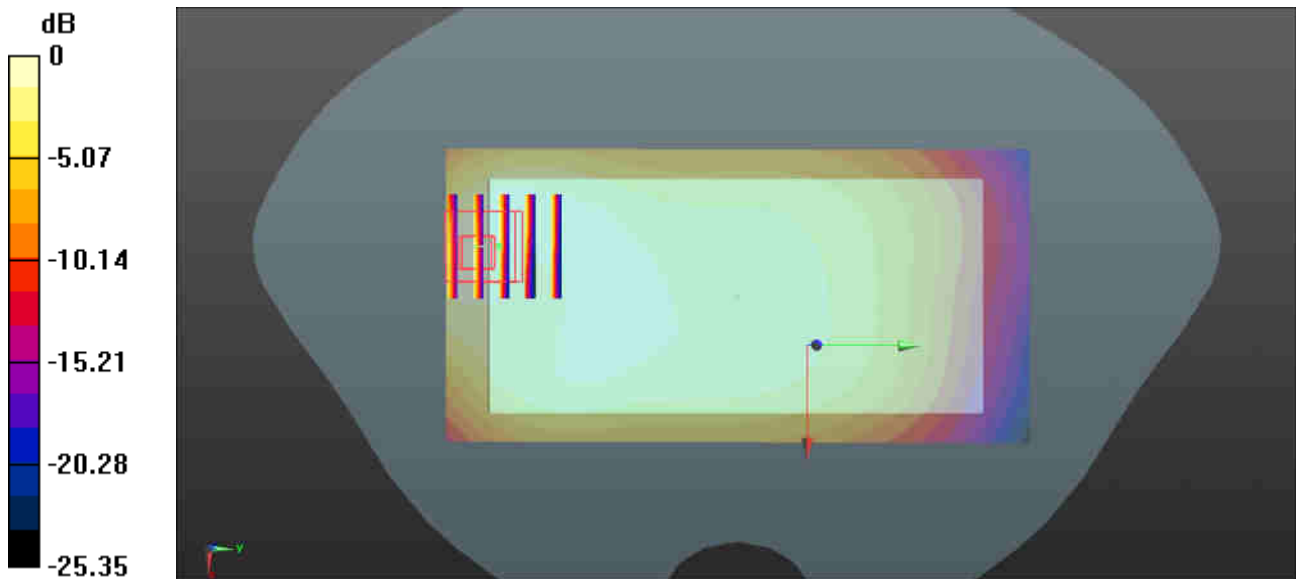

0 dB = 0.423 W/kg = -3.74 dBW/kg

**#35\_CDMA2000 BC0\_RTAP 153.6Kbps\_Front 10mm\_Ch1013**


Communication System: UID 0, CDMA2000 (0); Frequency: 824.7 MHz; Duty Cycle: 1:1  
 Medium: MSL\_835 Medium parameters used:  $f = 824.7$  MHz;  $\sigma = 0.977$  S/m;  $\epsilon_r = 54.183$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3753; ConvF(9.21, 9.21, 9.21); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch1013/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.414 W/kg

**Ch1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 15.90 V/m; Power Drift = 0.01 dB  
 Peak SAR (extrapolated) = 0.573 W/kg  
**SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.195 W/kg**  
 Maximum value of SAR (measured) = 0.462 W/kg

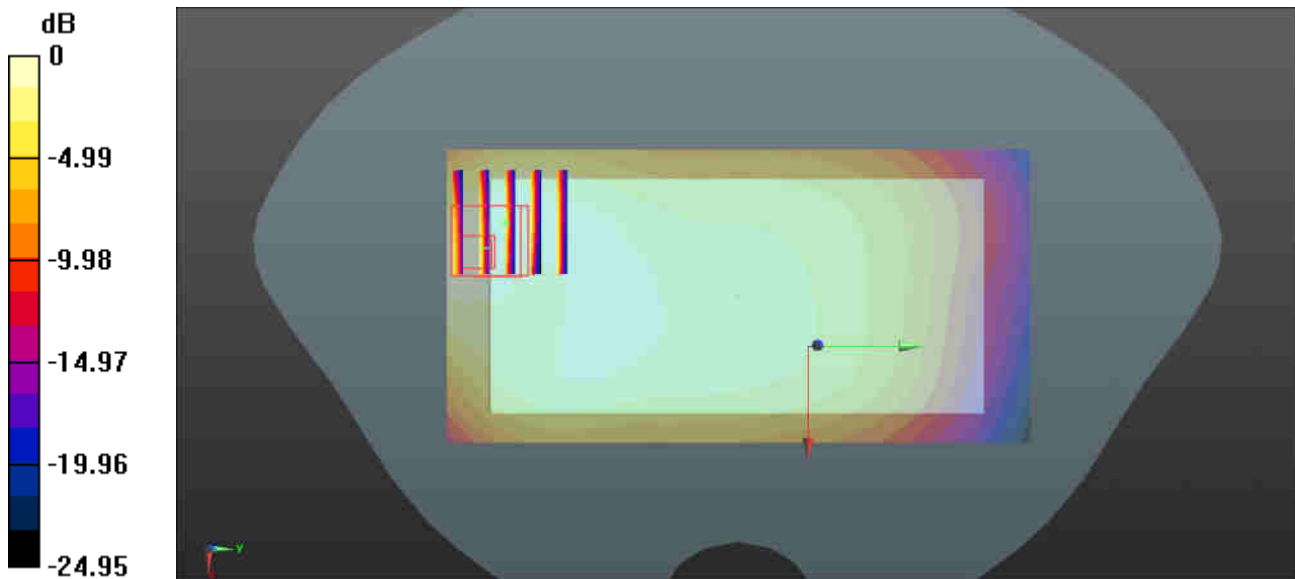

0 dB = 0.414 W/kg = -3.83 dBW/kg

**#36\_CDMA2000 BC1\_RTAP 153.6Kbps\_Bottom Side\_10mm\_Ch25**

Communication System: UID 0, CDMA2000 (0); Frequency: 1851.25 MHz; Duty Cycle: 1:1  
 Medium: MSL\_1900 Medium parameters used:  $f = 1851.25$  MHz;  $\sigma = 1.462$  S/m;  $\epsilon_r = 52.93$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.58, 7.58, 7.58); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch25/Area Scan (31x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.685 W/kg


**Ch25/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.22 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.763 W/kg

**SAR(1 g) = 0.444 W/kg; SAR(10 g) = 0.248 W/kg**

Maximum value of SAR (measured) = 0.603 W/kg

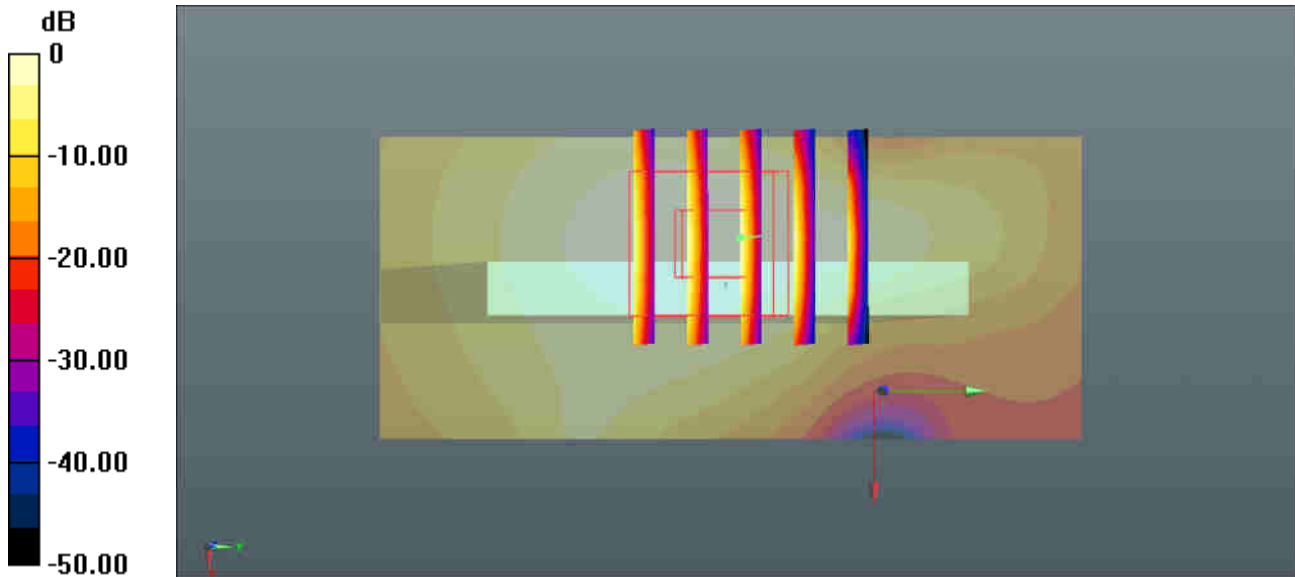

0 dB = 0.685 W/kg = -1.64 dBW/kg



**#37\_LTE Band 12\_10M\_QPSK\_1RB\_49Offset\_Back\_10mm\_Ch23095**


Communication System: UID 0, FDD\_LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium: MSL\_750 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.861$  S/m;  $\epsilon_r = 55.356$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.43, 9.43, 9.43); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch23095/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.313 W/kg

**Ch23095/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 14.02 V/m; Power Drift = -0.10 dB  
 Peak SAR (extrapolated) = 0.364 W/kg  
**SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.184 W/kg**  
 Maximum value of SAR (measured) = 0.311 W/kg

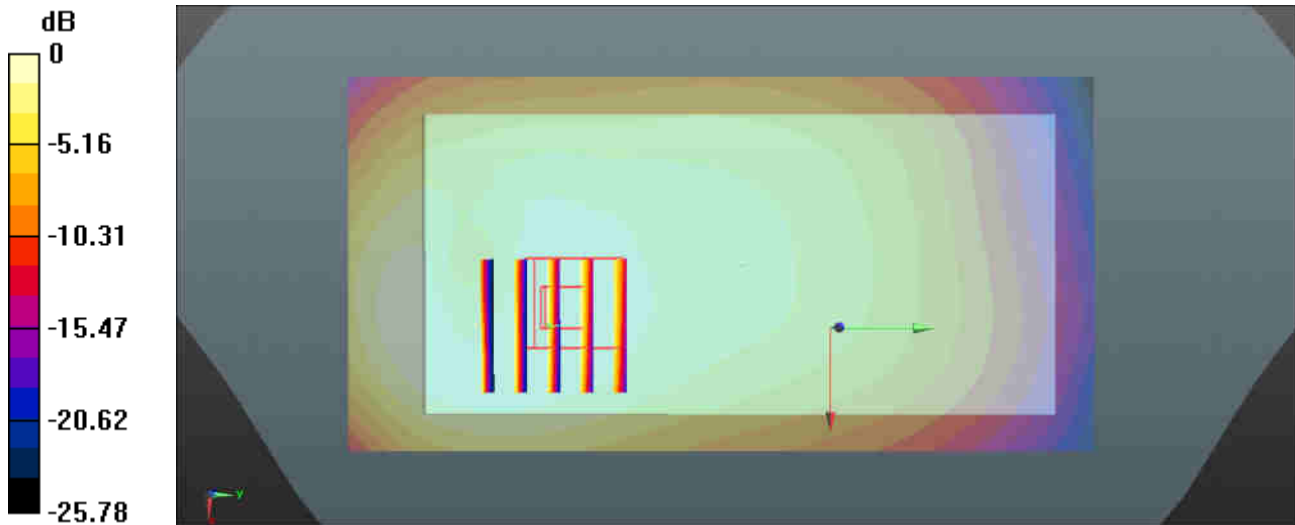

0 dB = 0.313 W/kg = -5.04 dBW/kg

**#38\_LTE Band 13\_10M\_QPSK\_1RB\_49Offset\_Back\_10mm\_Ch23230**

Communication System: UID 0, FDD\_LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium: MSL\_835 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.934 \text{ S/m}$ ;  $\epsilon_r = 54.584$ ;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.4 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.43, 9.43, 9.43); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch23230/Area Scan (61x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.326 \text{ W/kg}$


**Ch23230/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $13.89 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$

Peak SAR (extrapolated) =  $0.405 \text{ W/kg}$

**SAR(1 g) =  $0.238 \text{ W/kg}$ ; SAR(10 g) =  $0.140 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.325 \text{ W/kg}$

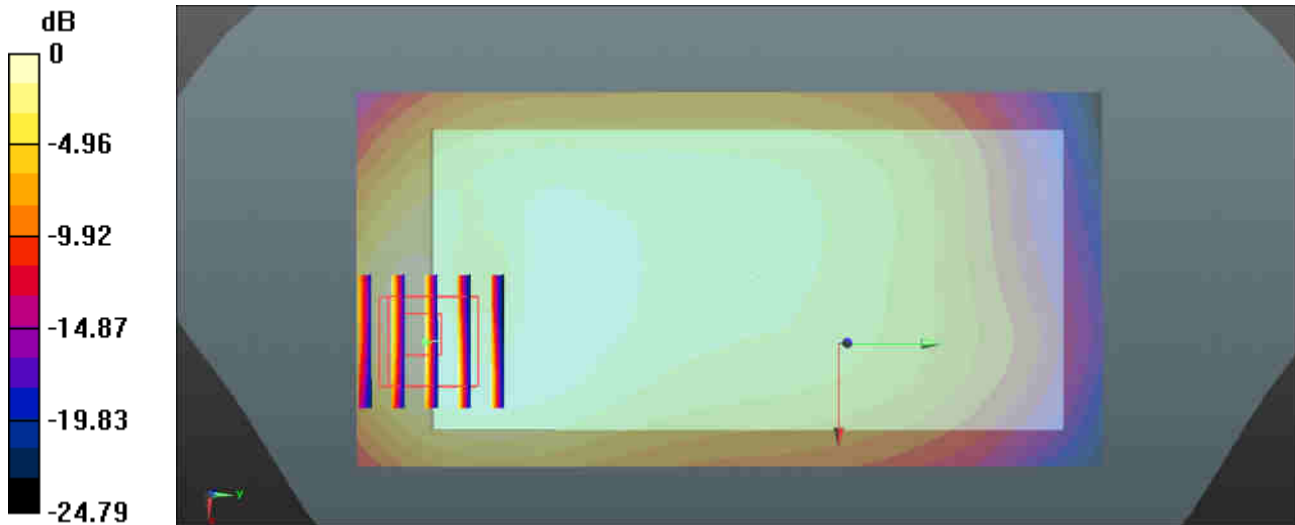

0 dB =  $0.326 \text{ W/kg} = -4.87 \text{ dBW/kg}$

**#39\_LTE Band 26\_15M\_QPSK\_1RB\_0Offset\_Back\_10mm\_Ch26865**


Communication System: UID 0, FDD\_LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1  
 Medium: MSL\_835 Medium parameters used:  $f = 831.5 \text{ MHz}$ ;  $\sigma = 0.983 \text{ S/m}$ ;  $\epsilon_r = 54.125$ ;  
 $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature :  $23.4 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.21, 9.21, 9.21); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch26865/Area Scan (61x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.468 \text{ W/kg}$

**Ch26865/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $15.93 \text{ V/m}$ ; Power Drift =  $0.07 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.574 \text{ W/kg}$   
**SAR(1 g) =  $0.342 \text{ W/kg}$ ; SAR(10 g) =  $0.200 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.464 \text{ W/kg}$

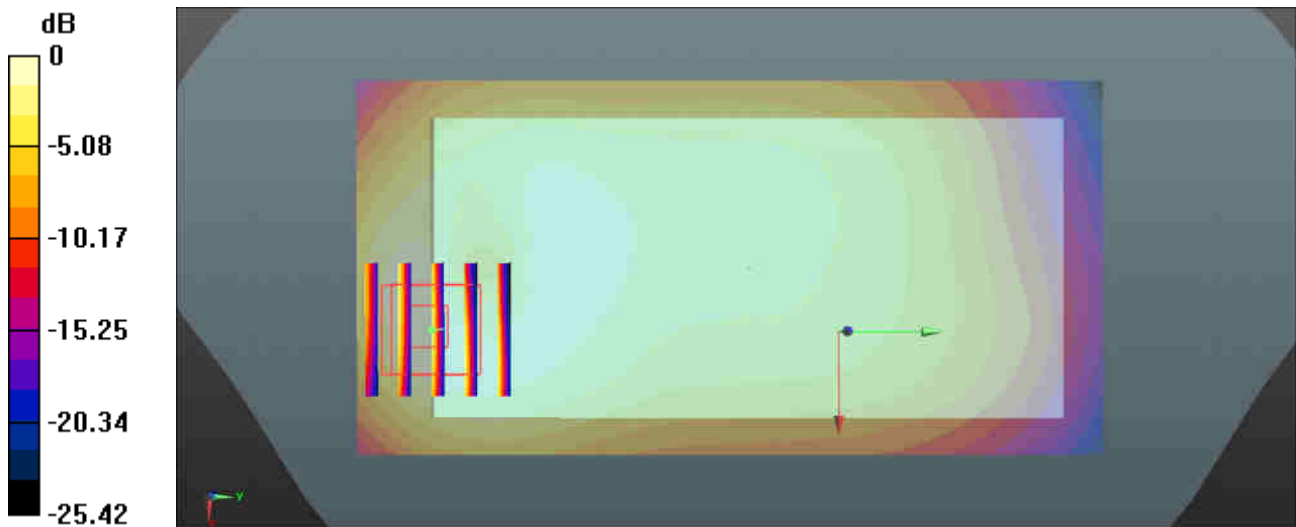

0 dB =  $0.468 \text{ W/kg} = -3.30 \text{ dBW/kg}$

**#40\_LTE Band 4\_20M\_QPSK\_1RB\_0Offset\_Bottom Side\_10mm\_Ch20175**


Communication System: UID 0, FDD\_LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: MSL\_1750 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.48$  S/m;  $\epsilon_r = 53.586$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.55, 7.55, 7.55); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20175/Area Scan (41x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.35 W/kg

**Ch20175/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 27.89 V/m; Power Drift = 0.17 dB  
Peak SAR (extrapolated) = 1.61 W/kg  
**SAR(1 g) = 0.931 W/kg; SAR(10 g) = 0.492 W/kg**  
Maximum value of SAR (measured) = 1.31 W/kg

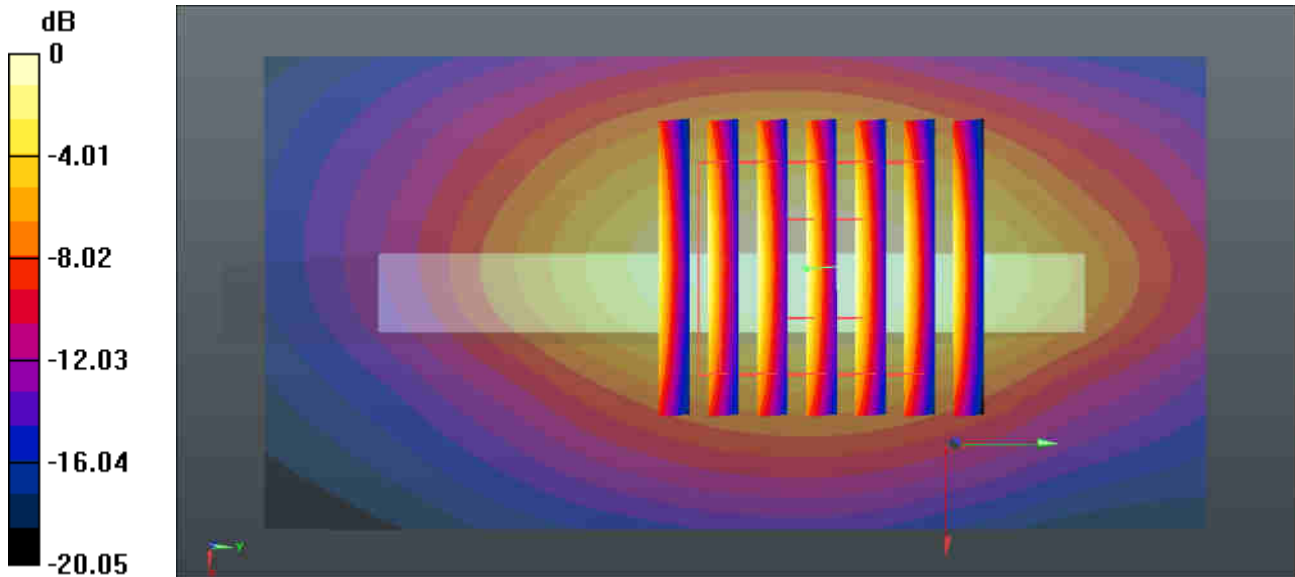

0 dB = 1.35 W/kg = 1.30 dBW/kg

**#41\_LTE Band 25\_20M\_QPSK\_1RB\_0Offset\_Bottom Side\_10mm\_Ch26590**


Communication System: UID 0, FDD\_LTE (0); Frequency: 1905 MHz; Duty Cycle: 1:1  
Medium: MSL\_1900 Medium parameters used:  $f = 1905$  MHz;  $\sigma = 1.522$  S/m;  $\epsilon_r = 52.734$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.58, 7.58, 7.58); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch26590/Area Scan (41x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.28 W/kg

**Ch26590/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 26.80 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 1.62 W/kg  
**SAR(1 g) = 0.890 W/kg; SAR(10 g) = 0.457 W/kg**  
Maximum value of SAR (measured) = 1.27 W/kg

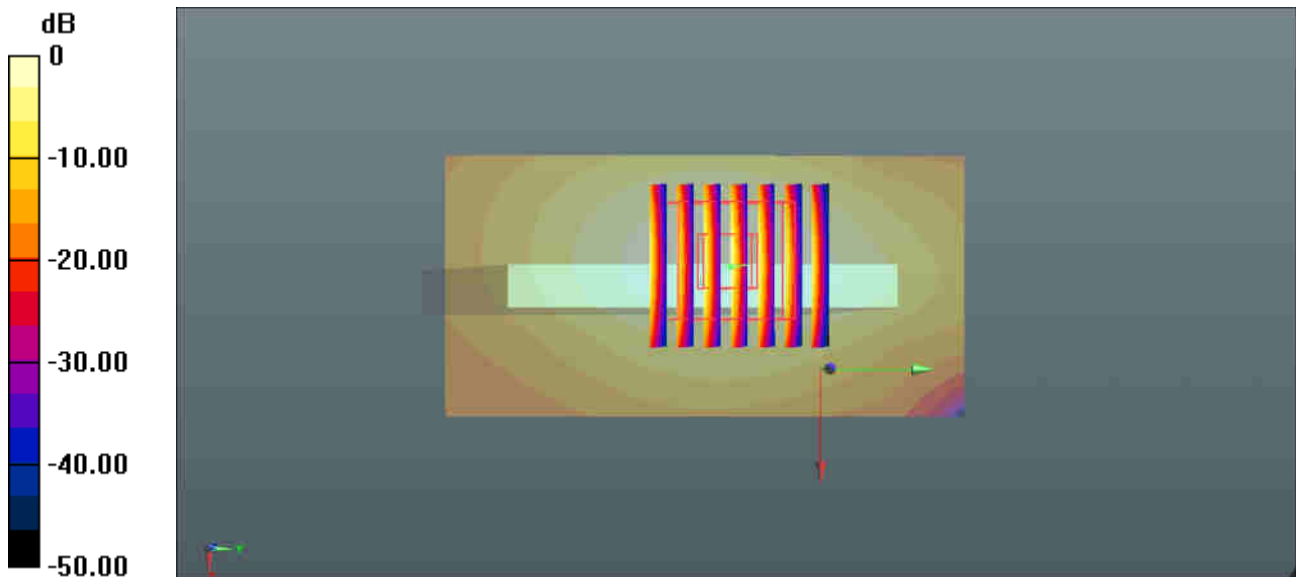

0 dB = 1.28 W/kg = 1.07 dBW/kg

**#42\_LTE Band 30\_10M\_QPSK\_1RB\_0Offset\_Bottom side\_10mm\_Ch27710**

Communication System: UID 0, FDD\_LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1  
Medium: MSL\_2300 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.817$  S/m;  $\epsilon_r = 54.846$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.87, 7.87, 7.87); Calibrated: 2017.5.26;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch27710/Area Scan (81x31x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.39 W/kg


**Ch27710/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.08 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.74 W/kg

**SAR(1 g) = 0.981 W/kg; SAR(10 g) = 0.529 W/kg**

Maximum value of SAR (measured) = 1.37 W/kg

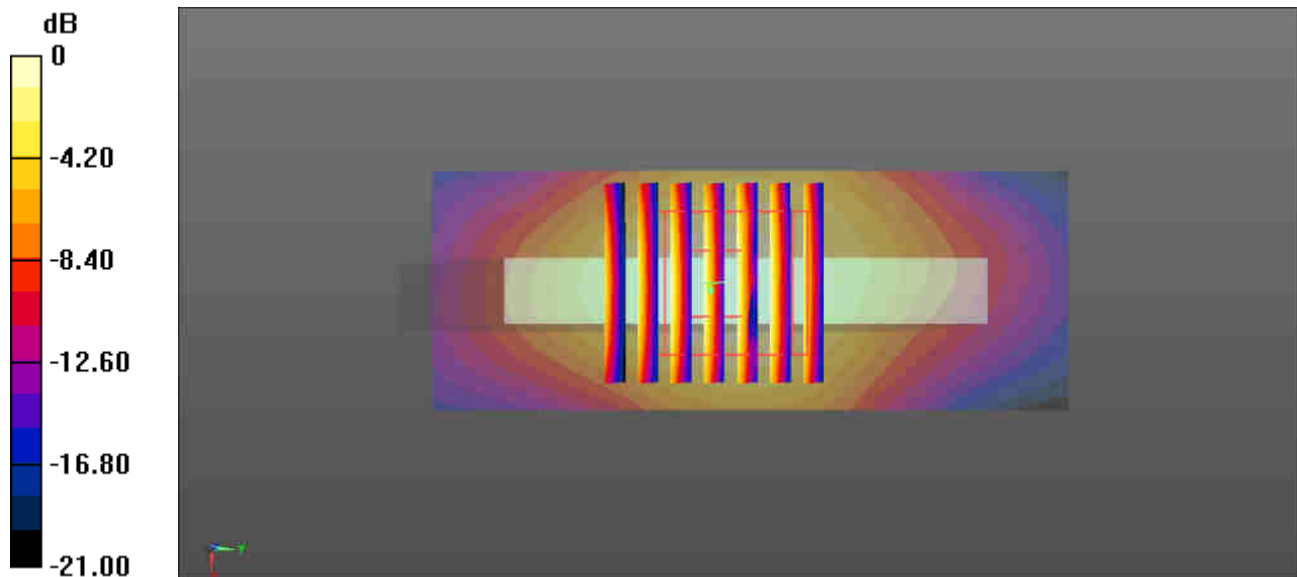

0 dB = 1.39 W/kg = 1.43 dBW/kg

**#43\_LTE Band 7\_20M\_QPSK\_1RB\_0Offset\_Back\_10mm\_Ch21350**


Communication System: UID 0, FDD\_LTE (0); Frequency: 2560 MHz;Duty Cycle: 1:1  
Medium: MSL\_2600 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 2.181$  S/m;  $\epsilon_r = 52.382$ ;  
 $\rho = 1000$ kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.14, 7.14, 7.14); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch21350/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.798 W/kg

**Ch21350/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 6.122 V/m; Power Drift = -0.11 dB  
Peak SAR (extrapolated) = 1.06 W/kg  
**SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.209 W/kg**  
Maximum value of SAR (measured) = 0.729 W/kg

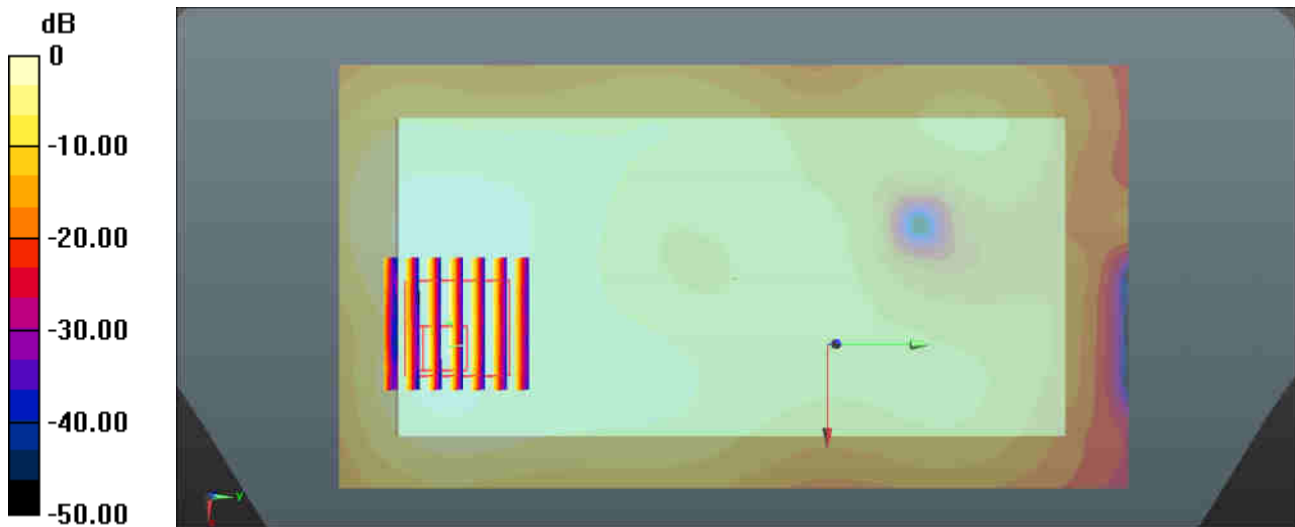

0 dB = 0.798 W/kg = -0.98 dBW/kg

**#44\_LTE Band 41\_20M\_QPSK\_1RB\_0Offset\_Back\_10mm\_Ch40620**


Communication System: UID 0, TDD\_LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59  
Medium: MSL\_2600 Medium parameters used:  $f = 2593$  MHz;  $\sigma = 2.229$  S/m;  $\epsilon_r = 52.261$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.14, 7.14, 7.14); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch40620/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.728 W/kg

**Ch40620/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 6.072 V/m; Power Drift = -0.10 dB  
Peak SAR (extrapolated) = 1.02 W/kg  
**SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.233 W/kg**  
Maximum value of SAR (measured) = 0.754 W/kg

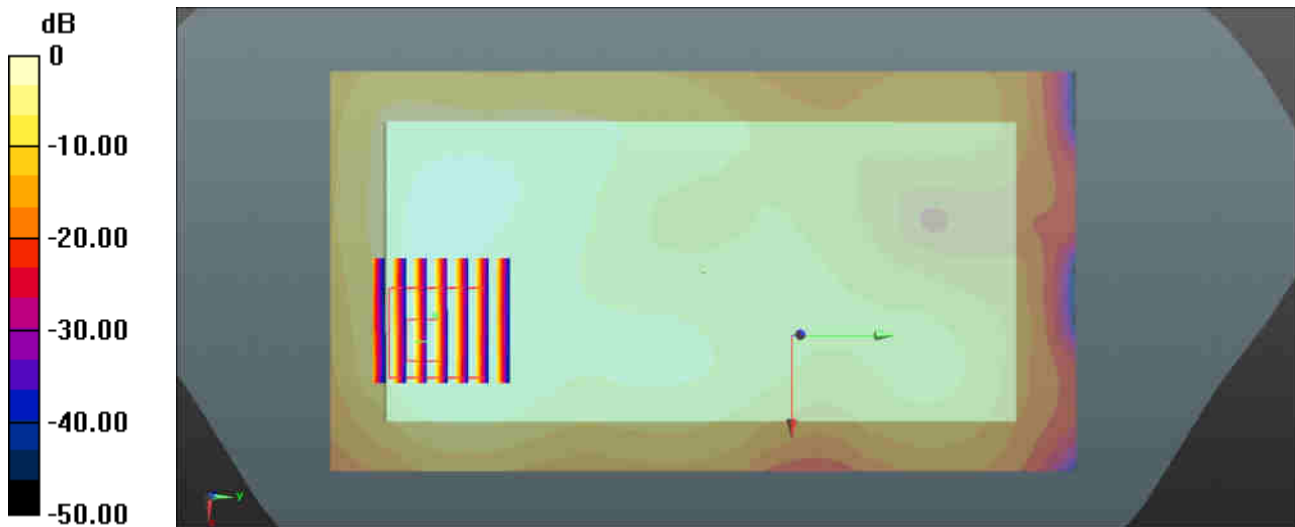

0 dB = 0.521 W/kg = -2.83 dBW/kg



### #45\_WLAN2.4GHz\_802.11b 1Mbps\_Top Side\_10mm\_Ch11\_Ant 1


Communication System: UID 0, WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1.015  
Medium: MSL\_2450 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 2.044$  S/m;  $\epsilon_r = 52.7$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.27, 7.27, 7.27); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch11/Area Scan (31x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.976 W/kg

**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 20.48 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 1.16 W/kg  
**SAR(1 g) = 0.609 W/kg; SAR(10 g) = 0.292 W/kg**  
Maximum value of SAR (measured) = 0.895 W/kg

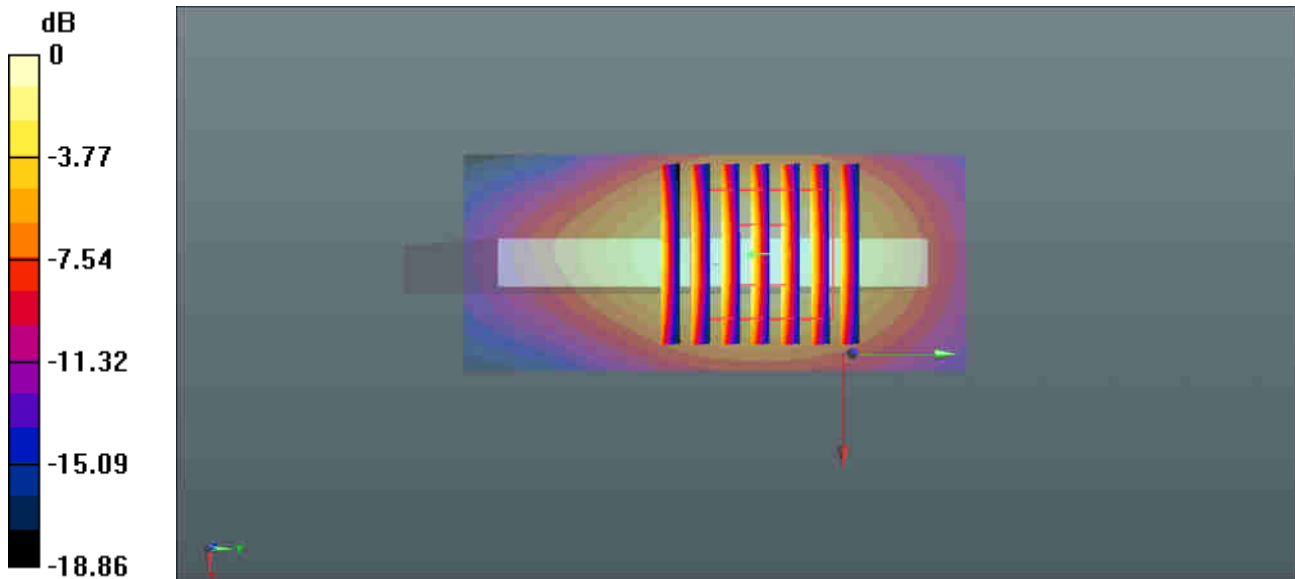

0 dB = 0.976 W/kg = -0.11 dBW/kg

**#46\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_10mm\_Ch6\_Ant 2**


Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1.01  
Medium: MSL\_2450 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 2.008$  S/m;  $\epsilon_r = 52.804$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.27, 7.27, 7.27); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch6/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.288 W/kg

**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 1.431 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.403 W/kg  
**SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.080 W/kg**  
Maximum value of SAR (measured) = 0.279 W/kg

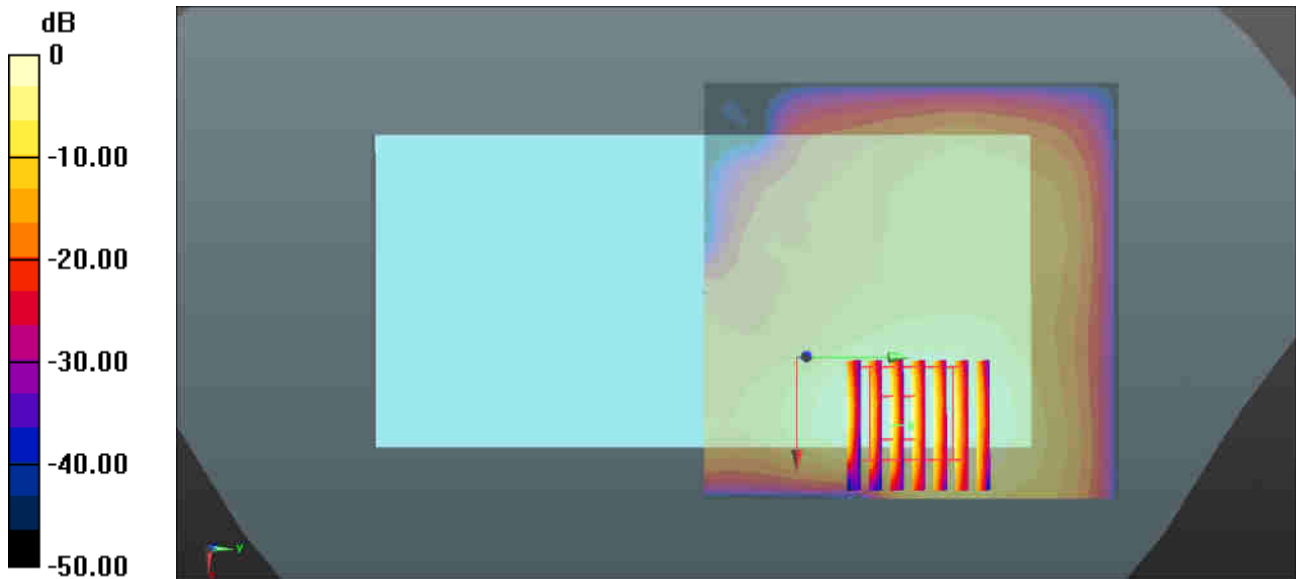

0 dB = 0.288 W/kg = -5.41 dBW/kg

**#47\_WLAN2.4GHz\_802.11g 6Mbps\_Top Side\_10mm\_Ch1\_Ant 1+2**


Communication System: UID 0, WIFI (0); Frequency: 2412 MHz; Duty Cycle: 1:1.019  
Medium: MSL\_2450 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.97$  S/m;  $\epsilon_r = 52.908$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.27, 7.27, 7.27); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch1/Area Scan (41x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.676 W/kg

**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 17.63 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 0.758 W/kg  
**SAR(1 g) = 0.408 W/kg; SAR(10 g) = 0.198 W/kg**  
Maximum value of SAR (measured) = 0.602 W/kg

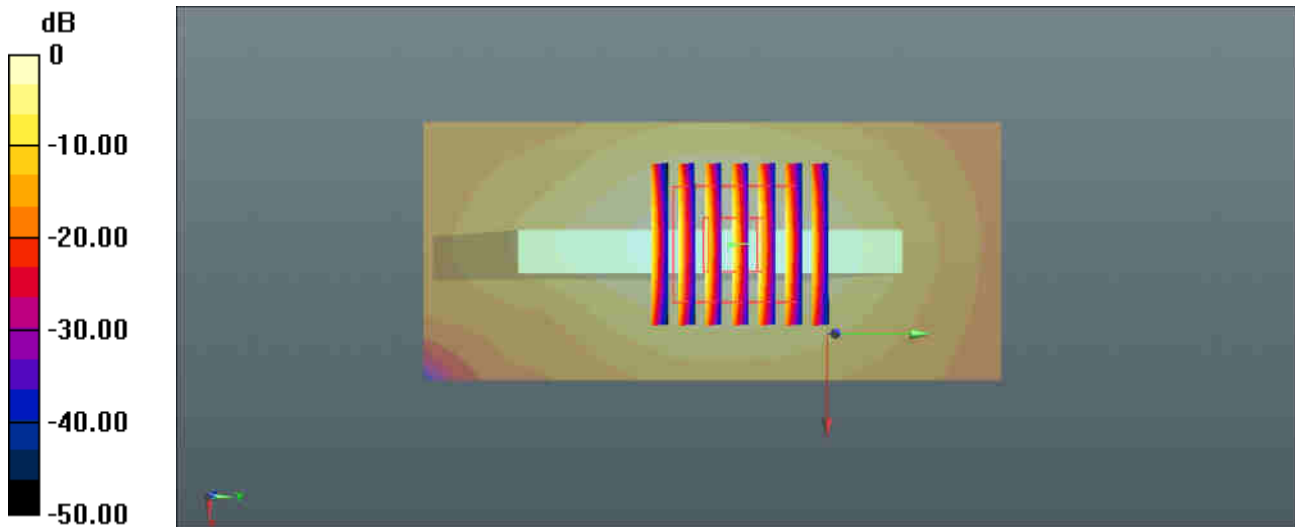

0 dB = 0.676 W/kg = -1.70 dBW/kg

**#48\_WLAN5.2GHz\_802.11a 6Mbps\_Back\_10mm\_Ant 1\_Ch36**


Communication System: UID 0, WIFI (0); Frequency: 5180 MHz;Duty Cycle: 1:1.019  
Medium: MSL\_5000 Medium parameters used:  $f = 5180$  MHz;  $\sigma = 5.414$  S/m;  $\epsilon_r = 48.074$ ;  
 $\rho = 1000$ kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.72, 4.72, 4.72); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch36/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 1.44 W/kg

**Ch36/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm,dz=1.4mm  
Reference Value = 0.1600 V/m; Power Drift = 0.11 dB  
Peak SAR (extrapolated) = 1.92 W/kg  
**SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.143 W/kg**  
Maximum value of SAR (measured) = 1.18 W/kg

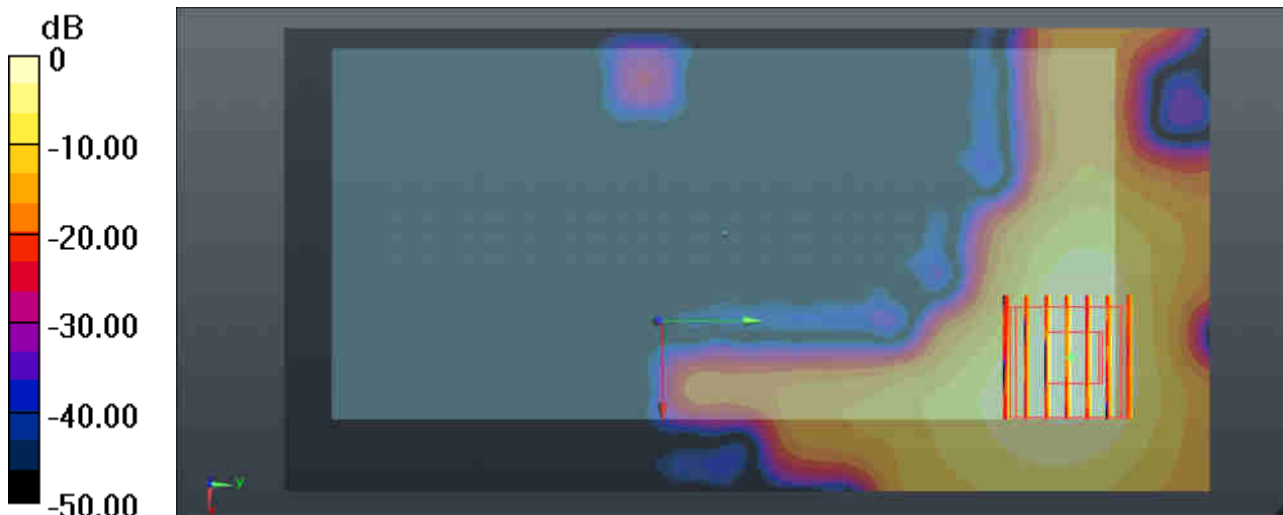

0 dB = 1.18 W/kg = 0.72 dBW/kg

**#49\_WLAN5.2GHz\_802.11a 6Mbps\_Back\_10mm\_Ant 2\_Ch48**


Communication System: UID 0, WIFI (0); Frequency: 5240 MHz; Duty Cycle: 1:1.019  
Medium: MSL\_5000 Medium parameters used:  $f = 5240$  MHz;  $\sigma = 5.493$  S/m;  $\epsilon_r = 47.962$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.72, 4.72, 4.72); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch48/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.871 W/kg

**Ch48/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 0.3740 V/m; Power Drift = 0.19 dB  
Peak SAR (extrapolated) = 1.33 W/kg  
**SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.102 W/kg**  
Maximum value of SAR (measured) = 0.810 W/kg

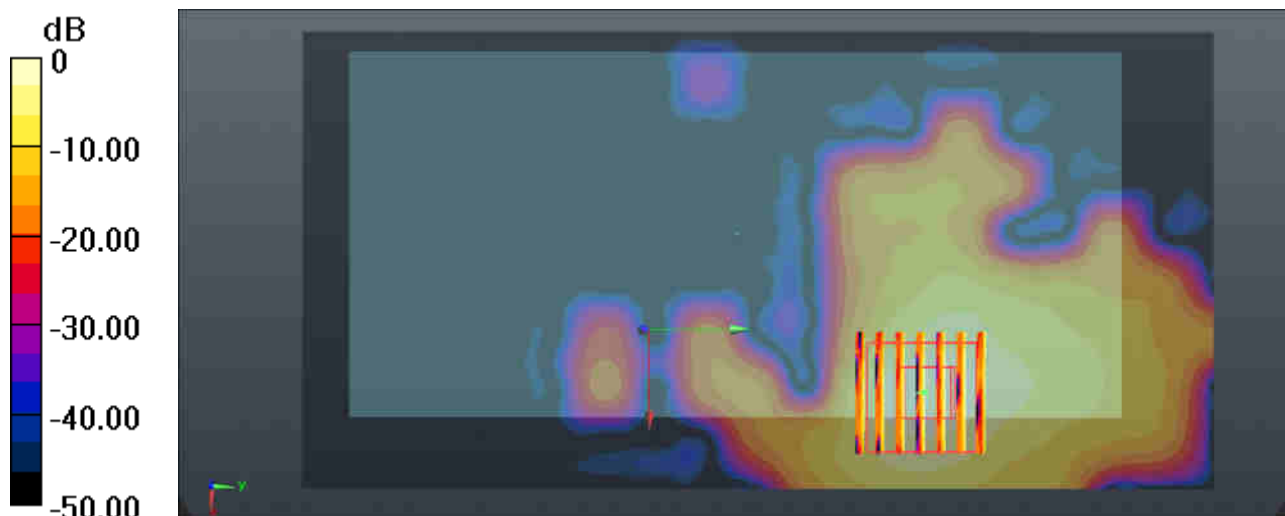

0 dB = 0.810 W/kg = -0.92 dBW/kg

**#50\_WLAN5.2GHz\_802.11a 6Mbps\_Back\_10mm\_Ant 1+2\_Ch44**


Communication System: UID 0, WIFI (0); Frequency: 5220 MHz; Duty Cycle: 1:1.019  
Medium: MSL\_5000 Medium parameters used:  $f = 5220$  MHz;  $\sigma = 5.462$  S/m;  $\epsilon_r = 48.007$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.72, 4.72, 4.72); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch44/Area Scan (91x191x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 2.19 W/kg

**Ch44/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 0.8070 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 3.75 W/kg  
**SAR(1 g) = 0.918 W/kg; SAR(10 g) = 0.282 W/kg**  
Maximum value of SAR (measured) = 2.25 W/kg

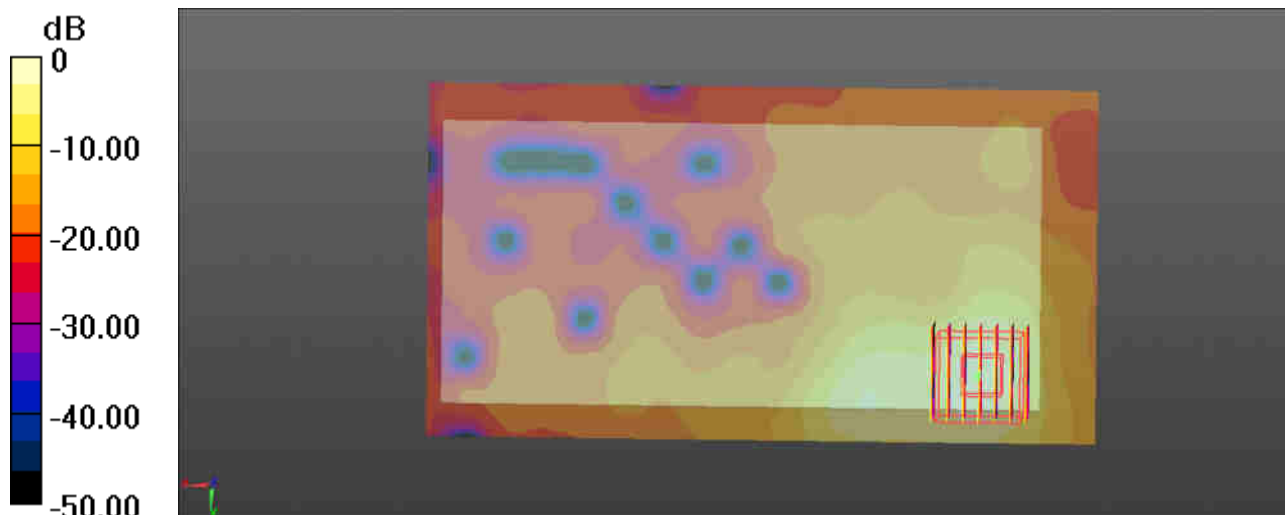

0 dB = 2.25 W/kg = 3.52 dBW/kg

### #51\_WLAN5.8GHz\_802.11a 6Mbps\_Back\_10mm\_Ant 1\_Ch149


Communication System: UID 0, WIFI (0); Frequency: 5745 MHz; Duty Cycle: 1:1.019  
Medium: MSL\_5000 Medium parameters used:  $f = 5745$  MHz;  $\sigma = 6.147$  S/m;  $\epsilon_r = 47.129$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.31, 4.31, 4.31); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch149/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 1.41 W/kg

**Ch149/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 0.7670 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 2.09 W/kg  
**SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.144 W/kg**  
Maximum value of SAR (measured) = 1.20 W/kg

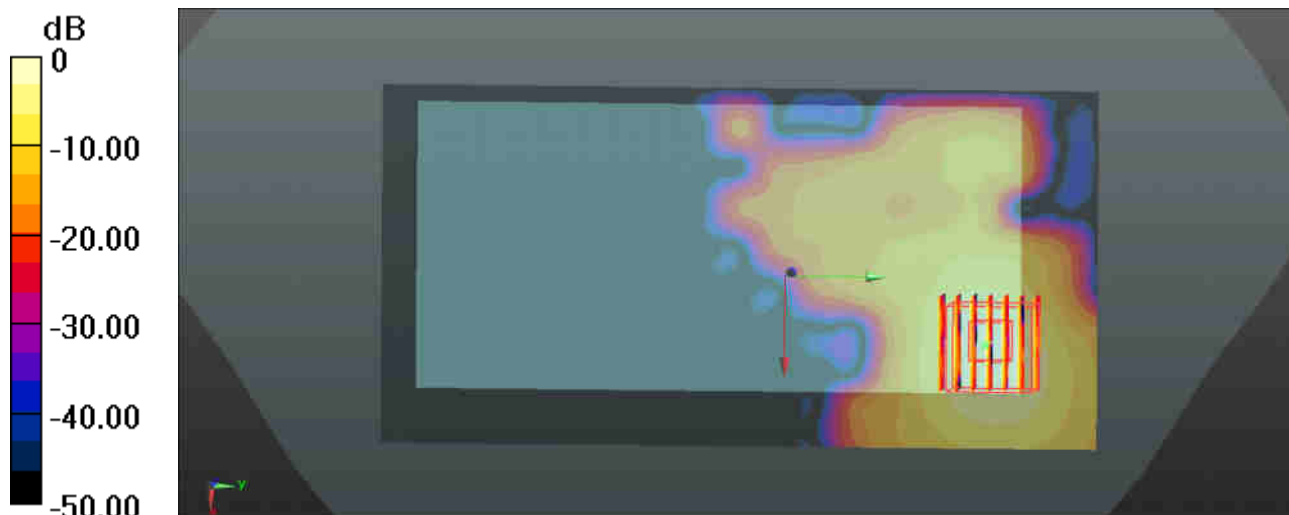

0 dB = 1.20 W/kg = 0.79 dBW/kg

**#52\_WLAN5.8GHz\_802.11a 6Mbps\_Back\_10mm\_Ant 2\_Ch149**


Communication System: UID 0, WIFI (0); Frequency: 5745 MHz; Duty Cycle: 1:1.019  
Medium: MSL\_5000 Medium parameters used:  $f = 5745$  MHz;  $\sigma = 6.147$  S/m;  $\epsilon_r = 47.129$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.31, 4.31, 4.31); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch149/Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.749 W/kg

**Ch149/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 0 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 1.21 W/kg  
**SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.082 W/kg**  
Maximum value of SAR (measured) = 0.682 W/kg

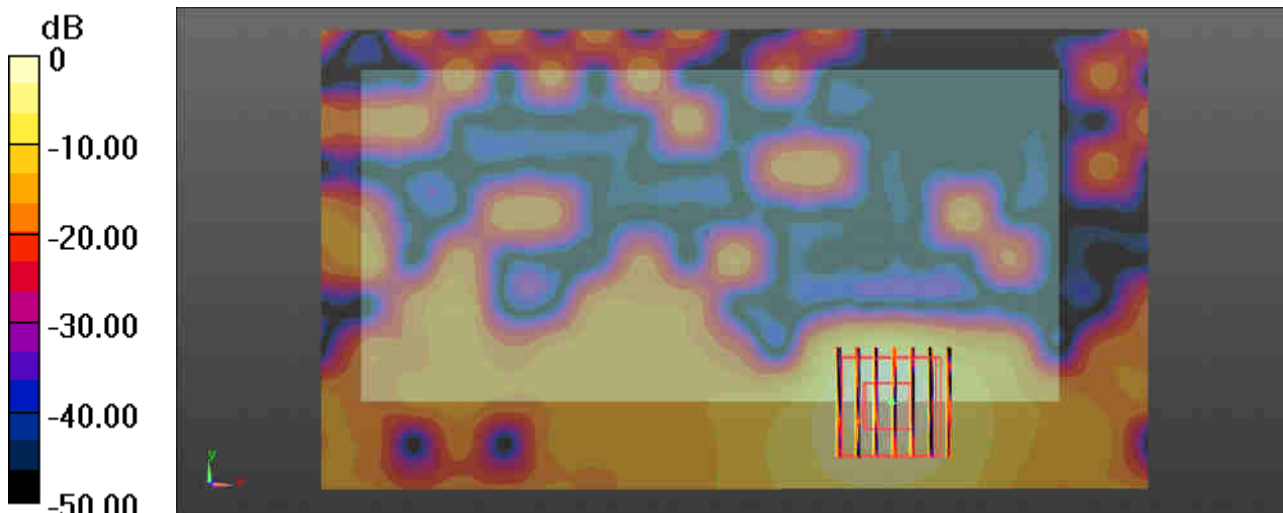

0 dB = 0.682 W/kg = -1.66 dBW/kg