



FCC Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Redmi
MODEL NAME : 22041219NY
FCC ID : 2AFZZ1219NY
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Feb. 21, 2022 ~ Feb. 24, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Reviewed by: Jason Jia / Supervisor

Approved by: Alex Wang / Manager



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Modification of EUT 7

 1.6. Test Location 8

 1.7. Test Software 8

 1.8. Applicable Standards 8

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1. Test Mode 9

 2.2. Connection Diagram of Test System 11

 2.3. Support Unit used in test configuration and system 12

 2.4. EUT Operation Test Setup 13

3. TEST RESULT 14

 3.1. Test of AC Conducted Emission Measurement 14

 3.2. Test of Radiated Emission Measurement 18

4. LIST OF MEASURING EQUIPMENT 23

5. UNCERTAINTY OF EVALUATION 24

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 7.31 dB at 0.152 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 7.43 dB at 901.060 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1. Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2. Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Redmi
Model Name	22041219NY
FCC ID	2AFZZ1219NY
EUT supports Radios application	GSM/WCDMA/LTE/5G NR/NFC/GNSS WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
IMEI Code	Conduction: 863160060064266/863160060064274 for Sample 1 863160060072129/863160060072137 for Sample 2 863160060072327/863160060072335 for Sample 3 Radiation: 863160060062906/863160060062914 for Sample 1 863160060072129/863160060072137 for Sample 2 863160060072327/863160060072335 for Sample 3
HW Version	P2
SW Version	MIUI 13
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are three samples under test, sample 1 is 1st source memory + Battery 1, sample 2 is 2nd source memory + Battery 2, and sample 3 is 3rd source memory + Battery 1. According to the difference, sample 1 perform full test and sample 2/3 verify the worst case.



	<p>5G NR n77: 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3800 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz; 5745 MHz ~ 5825 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz GNSS : 1559 MHz ~ 1610 MHz FM : 88 MHz ~ 108 MHz</p>
Antenna Type	<p>WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GNSS: PIFA Antenna NFC: Coil Antenna FM : External Earphone Antenna</p>
Type of Modulation	<p>GSM/GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK HSPA : QPSK HSPA+ : 16QAM DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM / 256QAM(Downlink Only) 5G NR: DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM) 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) :$\pi/4$-DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK FM</p>

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH07-KS	CN1257	314309

1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH07-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-SZ	AUDIX	E3	6.120613b

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: n5 Rx(Low) ANT 1 + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone + Battery + USB Cable1 (Charging from Adapter) + SIM1 for Sample 1
	Mode 2: LTE Band 12 Rx(Middle) ANT 4 + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery + USB Cable2 (Charging from Adapter) + SIM2 for Sample 1
	Mode 3: LTE Band 13 Rx(High) ANT 1 + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery + USB Cable1 (EUT (eMMC) USB Data Link to Notebook) + SIM1 for Sample 1
	Mode 4: LTE Band 13 Rx(High) ANT 1 + Bluetooth Idle + WLAN (5G) Idle + FM(98)MHz Rx + Earphone + Battery + USB Cable1 (Notebook USB Data Link to EUT (eMMC)) + SIM2 for Sample 1
	Mode 5: LTE Band 13 Rx(High) ANT 1 + Bluetooth Idle + WLAN (2.4G) Idle + NFC on + Earphone + Battery + USB Cable1 (EUT (SD) USB Data Link to Notebook) + SIM1 for Sample 1
	Mode 6: LTE Band 13 Rx(High) ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery + USB Cable1 (Notebook USB Data Link to EUT (SD)) + SIM2 for Sample 1
	Mode 7: LTE Band 13 Rx(High) ANT 1 + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone + Battery + USB Cable2 (EUT (eMMC) USB Data Link to Notebook) + SIM1 for Sample 1
	Mode 8: LTE Band 13 Rx(High) ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery + USB Cable1 (EUT (eMMC) USB Data Link to Notebook) + SIM2 for Sample 2
	Mode 9: LTE Band 13 Rx(High) ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery + USB Cable1 (EUT (eMMC) USB Data Link to Notebook) + SIM1 for Sample 3
	Mode 10 : LTE Band 13 Rx(High) ANT 1 + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery + USB Cable1 (EUT (eMMC) USB Data Link to Notebook) + SIM1 for Sample 2




Radiated Emissions	<p>Mode 1: n5 Rx(Low) ANT 1 + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone + Battery + USB Cable1 (Charging from Adapter) + SIM1 for Sample 1</p> <p>Mode 2: LTE Band 12 Rx(Middle) ANT 4 + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery + USB Cable2 (Charging from Adapter) + SIM2 for Sample 1</p> <p>Mode 3: LTE Band 13 Rx(High) ANT 1 + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery + USB Cable1 (EUT (eMMC) USB Data Link to Notebook) + SIM1 for Sample 1</p> <p>Mode 4: n5 Rx(Low) ANT 1 + Bluetooth Idle + WLAN (5G) Idle + FM(88)MHz Rx + Earphone + Battery + USB Cable1 (Notebook USB Data Link to EUT (eMMC)) + SIM 2 for Sample 1</p> <p>Mode 5: n5 Rx(Low) ANT 1 + Bluetooth Idle + WLAN (2.4G) Idle + NFC on + Earphone + Battery + USB Cable1 (EUT (SD) USB Data Link to Notebook) + SIM1 for Sample 1</p> <p>Mode 6: n5 Rx(Low) ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery + USB Cable1 (Notebook USB Data Link to EUT (SD)) + SIM2 for Sample 1</p> <p>Mode 7: n5 Rx(Low) ANT 1 + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone + Battery + USB Cable2 (Notebook USB Data Link to EUT (eMMC)) + SIM1 for Sample 1</p> <p>Mode 8: n5 Rx(Low) ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery + USB Cable1 (Notebook USB Data Link to EUT (eMMC)) + SIM2 for Sample 2</p> <p>Mode 9: n5 Rx(Low) ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery + USB Cable1 (Notebook USB Data Link to EUT (eMMC)) + SIM1 for Sample 3</p> <p>Mode 10 : n5 Rx(Low) ANT 1 + Bluetooth Idle + WLAN (5G) Idle + FM(88)MHz Rx + Earphone + Battery + USB Cable1 (Notebook USB Data Link to EUT (eMMC)) + SIM 2 for Sample 2</p>
--------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Remark:

1. The worst case of AC is mode 3; only the test data of this mode is reported.
2. The worst case of RE is mode 4; only the test data of this mode is reported.
3. Data Link with Notebook means data application transferred mode between EUT and Notebook.
4. Pre-scanned Low/Middle/High channel, the worst channel was recorded in this report.

2.2. Connection Diagram of Test System

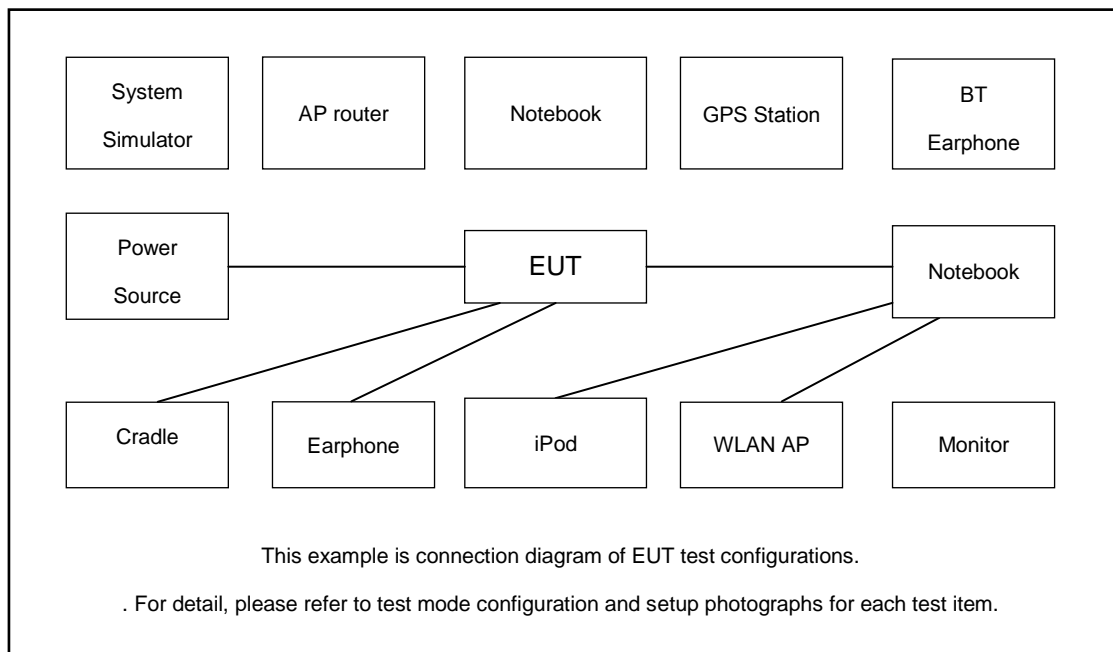

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	System Simulator	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
4.	Signal Generator	R&S	SMBV100A	N/A	N/A	N/A
5.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8 m
6.	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	Unshielded, 1.8 m
7.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
8.	Notebook	Lenovo	G480	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
9.	Notebook	Lenovo	S730-13IWL	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
10.	Hard Disk	Lenovo	F310	Fcc DoC	Shielded, 1.0m	N/A
11.	Hard Disk	KINGSHARE	KSP6120G	FCC DoC	N/A	N/A
12.	SD Card	Kingston	8GB	N/A	N/A	N/A
13.	SD Card	SanDisk	Uitra	N/A	N/A	N/A
14.	Earphone	MI	EM023	N/A	Unshielded, 1.25m	N/A



2.4. EUT Operation Test Setup

The EUT was in LTE or 5G NR idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on FM function to make the EUT receive continuous signals from FM station.
5. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
6. Turn on NFC function



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup





3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

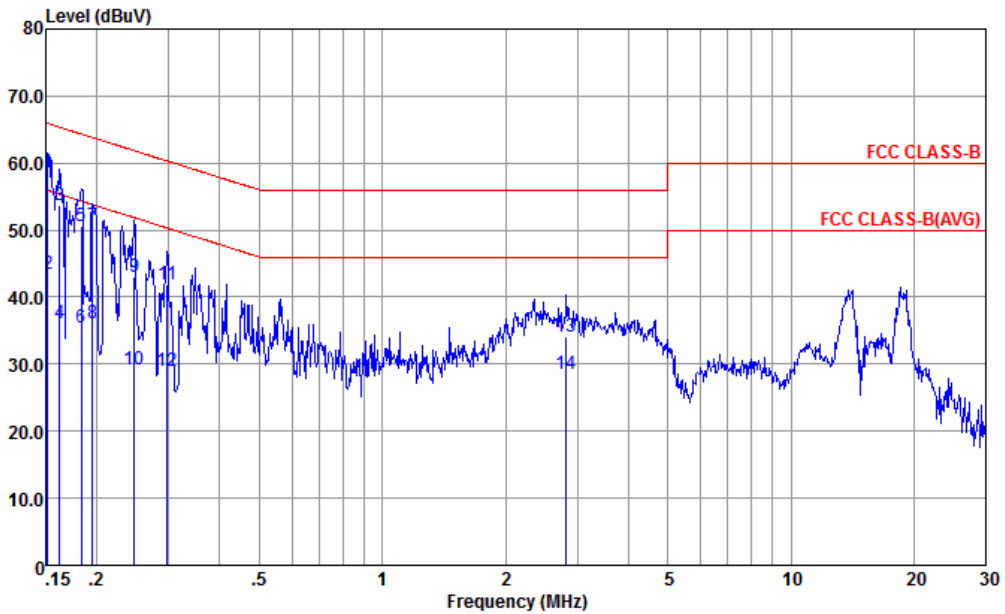


Site : CO01-KS
 Condition : FCC CLASS-B LISN-060105-L LINE
 Project : (FC) 211812
 mode : Mode 3

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.152	58.60	-7.31	65.91	48.10	0.02	10.48	QP
2	0.152	43.40	-12.51	55.91	32.90	0.02	10.48	Average
3	0.162	53.77	-11.57	65.34	43.29	0.03	10.45	QP
4	0.162	36.07	-19.27	55.34	25.59	0.03	10.45	Average
5	0.183	50.63	-13.70	64.33	40.20	0.03	10.40	QP
6	0.183	35.33	-19.00	54.33	24.90	0.03	10.40	Average
7	0.195	50.61	-13.19	63.80	40.20	0.04	10.37	QP
8	0.195	36.01	-17.79	53.80	25.60	0.04	10.37	Average
9	0.247	42.99	-18.87	61.86	32.59	0.06	10.34	QP
10	0.247	29.19	-22.67	51.86	18.79	0.06	10.34	Average
11	0.297	41.98	-18.34	60.32	31.60	0.07	10.31	QP
12	0.297	28.88	-21.44	50.32	18.50	0.07	10.31	Average
13	2.824	34.19	-21.81	56.00	23.80	0.15	10.24	QP
14	2.824	28.59	-17.41	46.00	18.20	0.15	10.24	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

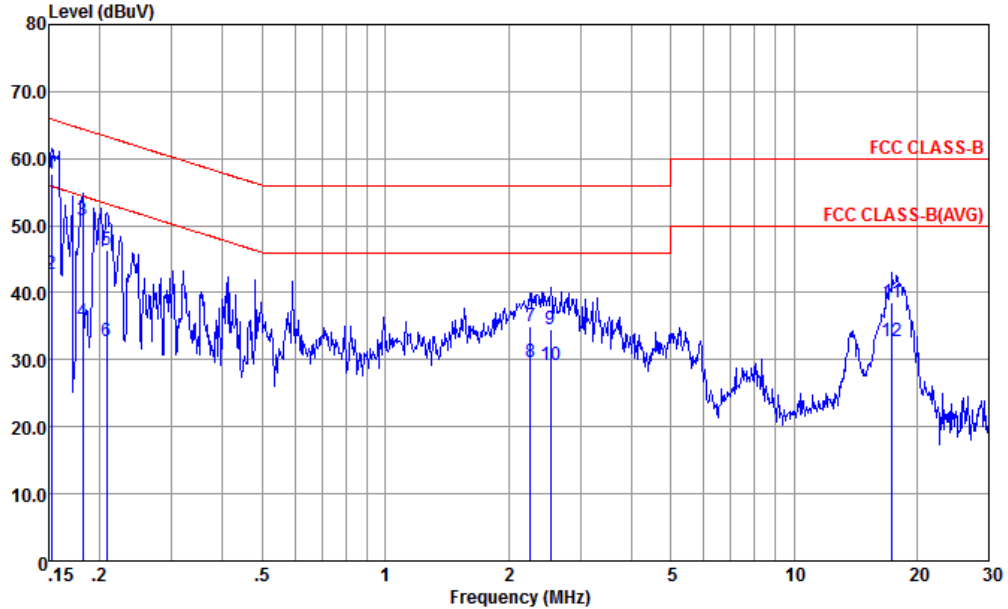

Site : CO01-KS
 Condition : FCC CLASS-B LISN-060105-N NEUTRAL
 Project : (FC) 211812
 mode : Mode 3

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.152	57.78	-8.09	65.87	47.20	0.11	10.47	QP
2	0.152	42.78	-13.09	55.87	32.20	0.11	10.47	Average
3	0.182	50.71	-13.71	64.42	40.21	0.10	10.40	QP
4	0.182	35.71	-18.71	54.42	25.21	0.10	10.40	Average
5	0.208	46.36	-16.91	63.27	35.90	0.10	10.36	QP
6	0.208	32.66	-20.61	53.27	22.20	0.10	10.36	Average
7	2.261	34.97	-21.03	56.00	24.60	0.14	10.23	QP
8	2.261	29.67	-16.33	46.00	19.30	0.14	10.23	Average
9	2.540	34.58	-21.42	56.00	24.19	0.15	10.24	QP
10	2.540	29.28	-16.72	46.00	18.89	0.15	10.24	Average
11	17.383	38.46	-21.54	60.00	27.59	0.42	10.45	QP
12	17.383	32.76	-17.24	50.00	21.89	0.42	10.45	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

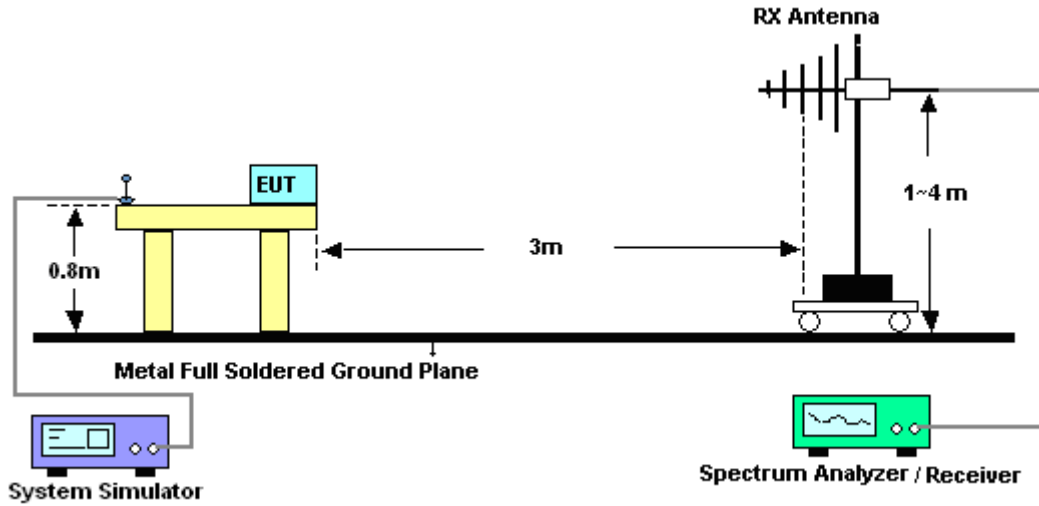


For radiated emissions above 1GHz

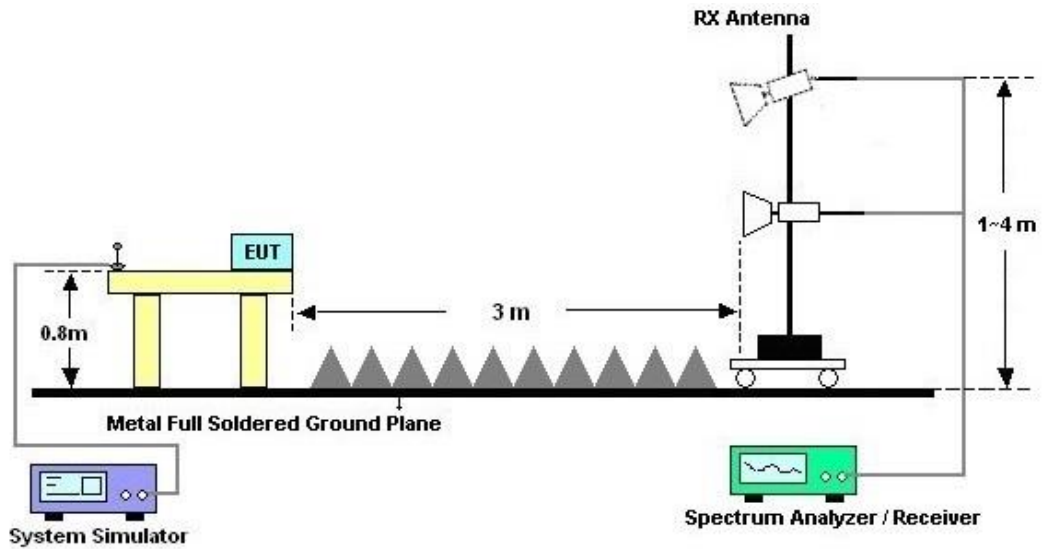



3.2.5. Test Result of Radiated Emission

Test Engineer :	Yoke Si	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal

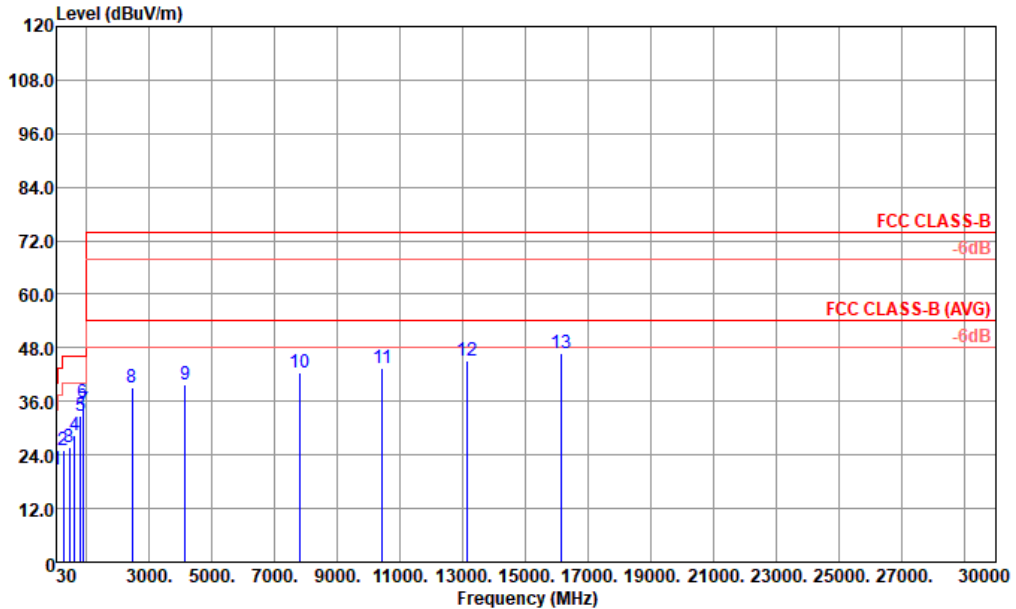


Site : 03CH07-KS
 Condition : FCC CLASS-B 3m CBL 6111D 59913 HORIZONTAL
 Project : 211812
 mode : 4

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	41.640	20.79	-19.21	40.00	34.04	18.50	0.65	32.40	---	---	Peak
2	263.770	24.99	-21.01	46.00	35.02	20.00	2.37	32.40	---	---	Peak
3	445.160	25.86	-20.14	46.00	32.29	22.90	3.07	32.40	---	---	Peak
4	624.610	28.32	-17.68	46.00	30.98	26.10	3.64	32.40	---	---	Peak
5	804.060	32.86	-13.14	46.00	32.90	27.92	4.12	32.08	---	---	Peak
6	873.900	35.64	-10.36	46.00	33.87	29.18	4.30	31.71	---	---	Peak
7	898.150	33.94	-12.06	46.00	32.20	28.90	4.36	31.52	---	---	Peak
8	2445.000	39.03	-34.97	74.00	64.34	32.15	7.48	64.94	---	---	Peak
9	4145.000	39.90	-34.10	74.00	61.87	33.43	9.89	65.29	---	---	Peak
10	7783.000	42.52	-31.48	74.00	59.10	35.90	13.90	66.38	---	---	Peak
11	10435.000	43.38	-30.62	74.00	56.47	37.65	16.25	66.99	---	---	Peak
12	13121.000	45.27	-28.73	74.00	53.43	39.20	18.26	65.62	---	---	Peak
13	16147.000	46.76	-27.24	74.00	49.41	41.30	20.45	64.40	---	---	Peak



Test Engineer :	Yoke Si	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical

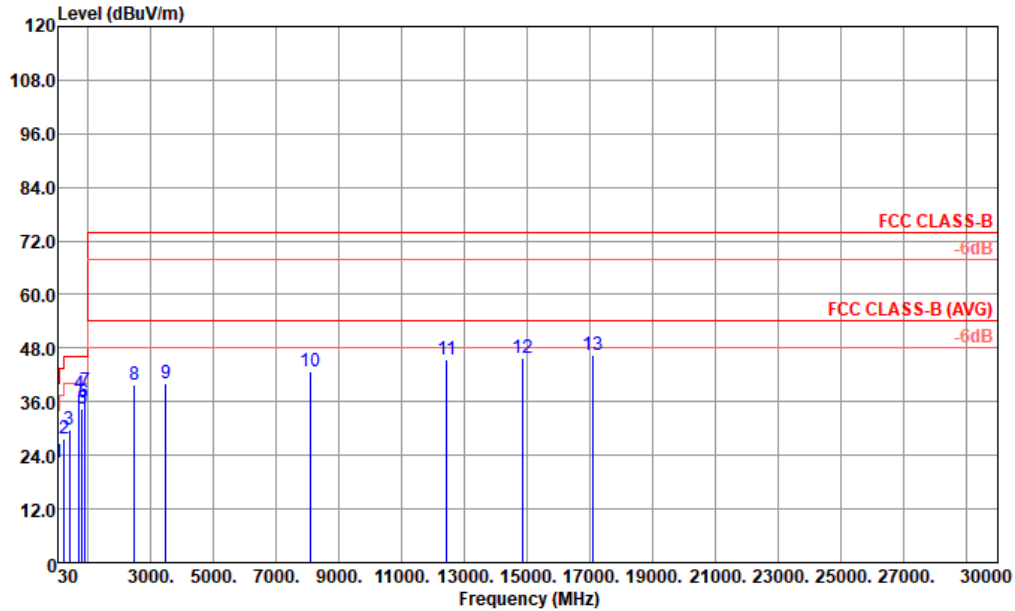

Site : 03CH07-KS
 Condition : FCC CLASS-B 3m CBL 6111D 59913 VERTICAL
 Project : 211812
 mode : 4

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	41.640	22.45	-17.55	40.00	35.70	18.50	0.65	32.40	---	---	Peak
2	239.520	27.67	-18.33	46.00	40.62	17.20	2.25	32.40	---	---	Peak
3	408.300	29.90	-16.10	46.00	37.29	22.06	2.95	32.40	---	---	Peak
4	720.640	37.81	-8.19	46.00	39.19	27.06	3.92	32.36	---	---	Peak
5	804.060	34.49	-11.51	46.00	34.53	27.92	4.12	32.08	---	---	Peak
6	873.900	35.89	-10.11	46.00	34.12	29.18	4.30	31.71	---	---	Peak
7	901.060	38.57	-7.43	46.00	36.77	28.92	4.37	31.49	---	---	Peak
8	2462.000	39.71	-34.29	74.00	65.01	32.13	7.50	64.93	---	---	Peak
9	3465.000	39.99	-34.01	74.00	62.77	32.87	8.99	64.64	---	---	Peak
10	8089.000	42.92	-31.08	74.00	59.57	35.93	13.80	66.38	---	---	Peak
11	12424.000	45.47	-28.53	74.00	54.33	39.16	17.83	65.85	---	---	Peak
12	14838.000	45.71	-28.29	74.00	51.26	39.87	19.39	64.81	---	---	Peak
13	17065.000	46.38	-27.62	74.00	47.76	42.48	21.05	64.91	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 21, 2021	Feb. 21, 2022	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Feb. 21, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 13, 2021	Feb. 21, 2022	Apr. 12, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Feb. 21, 2022	Oct. 13, 2022	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Ma x 30dBm	Oct. 16, 2021	Feb. 24, 2022	Oct. 15, 2022	Radiation (03CH07-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 10, 2021	Feb. 24, 2022	Oct. 09, 2022	Radiation (03CH07-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz-1GHz	Dec. 29, 2021	Feb. 24, 2022	Dec. 28, 2022	Radiation (03CH07-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	218652	1GHz~18GHz	Nov. 01, 2021	Feb. 24, 2022	Oct. 30, 2022	Radiation (03CH07-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Feb. 24, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Feb. 24, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan. 13, 2022	Feb. 24, 2022	Jan. 12, 2023	Radiation (03CH07-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5G Hz	Apr. 14, 2021	Feb. 24, 2022	Apr. 13, 2022	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	61601000247 3	N/A	NCR	Feb. 24, 2022	NCR	Radiation (03CH07-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Feb. 24, 2022	NCR	Radiation (03CH07-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Feb. 24, 2022	NCR	Radiation (03CH07-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94
-------------------------------------------------------------------------	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
-------------------------------------------------------------------------	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
-------------------------------------------------------------------------	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
-------------------------------------------------------------------------	--------