



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Xiaomi
MODEL NAME : 2210129SG
FCC ID : 2AFZZ129SG
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jul. 14, 2022 ~ Aug. 23, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT 4
1 GENERAL DESCRIPTION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test..... 5
1.4 Product Specification of Equipment Under Test..... 5
1.5 Modification of EUT 6
1.6 Testing Location 6
1.7 Test Software..... 7
1.8 Applicable Standards..... 7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8
2.1 Carrier Frequency and Channel 8
2.2 Test Mode 9
2.3 Connection Diagram of Test System 10
2.4 Support Unit used in test configuration and system 10
2.5 EUT Operation Test Setup 10
2.6 Measurement Results Explanation Example..... 11
3 TEST RESULT 12
3.1 6dB and 99% Bandwidth Measurement 12
3.2 Output Power Measurement..... 13
3.3 Power Spectral Density Measurement 14
3.4 Conducted Band Edges and Spurious Emission Measurement 16
3.5 Radiated Band Edges and Spurious Emission Measurement 17
3.6 AC Conducted Emission Measurement..... 21
3.7 Antenna Requirements 23
4 LIST OF MEASURING EQUIPMENT 24
5 UNCERTAINTY OF EVALUATION 25
APPENDIX A. CONDUCTED TEST RESULTS
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT
APPENDIX C. RADIATED SPURIOUS EMISSION
APPENDIX E. DUTY CYCLE PLOTS
APPENDIX F. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.64 dB at 2483.500 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.27 dB at 0.193 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Xiaomi
Model Name	2210129SG
FCC ID	2AFZZ129SG
IMEI Code	Conducted: 866583060070123/866583060070131 Conduction: 866583060044128/866583060044136 Radiation: 866583060043286/866583060043294
HW Version	P2
SW Version	MIUI 13
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	<MIMO Ant.1+2> 802.11b : 22.04 dBm (0.1600 W) 802.11g : 25.97 dBm (0.3954 W) 802.11n HT20 : 24.54 dBm (0.2844 W) 802.11n HT40 : 21.70 dBm (0.1479 W) 802.11 ax HE 20 : 25.71 dBm (0.3724 W) 802.11 ax HE 40 : 21.75 dBm (0.1496 W)
99% Occupied Bandwidth	<Ant.1> 802.11b : 14.106MHz 802.11g : 17.822MHz 802.11 ax HE T20 : 19.221MHz 802.11 ax HE 40 : 38.122MHz <Ant.2> 802.11b : 13.866MHz 802.11g : 17.063MHz 802.11 ax HE 20 : 19.181MHz



	802.11 ax HE 40 : 38.122MHz
Antenna Type / Gain	<Ant.1>: IFA Antenna type with gain -1.57 dBi <Ant.2>: IFA Antenna type with gain -1.44 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM / 4096QAM)

Note:

1. For WLAN SISO & CDD MIMO mode, the whole testing has assessed only MIMO mode by referring to the higher normal conducted power.
2. For 802.11n & 802.11ax mode, the whole testing have assessed only 802.11ax HE20/HE40 by referring to the higher output power.
3. 802.11ax support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power/PSD/RSE, the full RU power > partial RU, therefore the full RU perform full test and Partial RU verified power/PSD/RSE.
4. WIFI Ant. 1 / Ant. 2 corresponding to EUT Photo Ant. 15 / Ant. 16

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309



1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


MIMO Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :GSM850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable (Charging from Adapter)
Remark:	
<ol style="list-style-type: none"> For Radiated Test Cases, The tests were performance with Adapter and USB Cable The Co-location modes are combined from the worst cases of WLAN and WWAN. 	

Simultaneous transmission
802.11ax HE20_Tx_Ch11 + LTE Band41_BW_20M Link

2.3 Connection Diagram of Test System

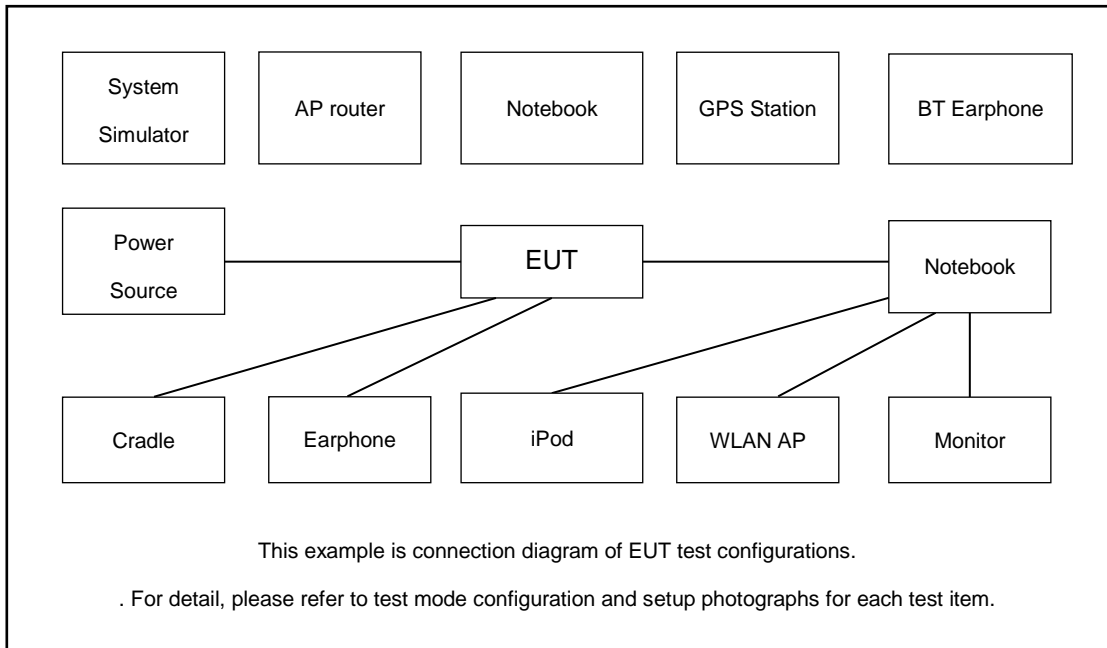

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	BT Base Station	R&S	CBT	N/A	N/A	Unshielded, 1.8m
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
4.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.6 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.6 + 10 = 15.6 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

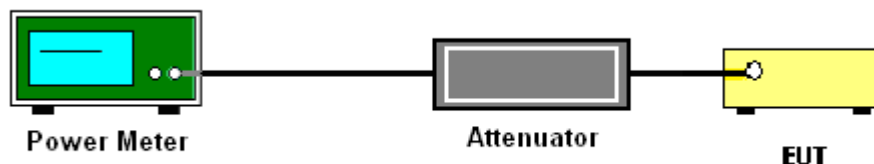

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.


If measurements performed using method (2) plus $10 \log(N)$ exceeds the emission limit, the test should choose method (1) before declaring that the device fails the emission limit.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

Method (2): Measure and add $10 \log(N)$ dB, where N is the number of outputs. (N=2)

3.3.4 Test Setup

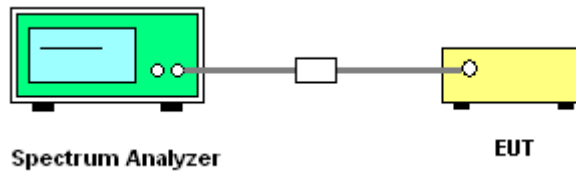

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

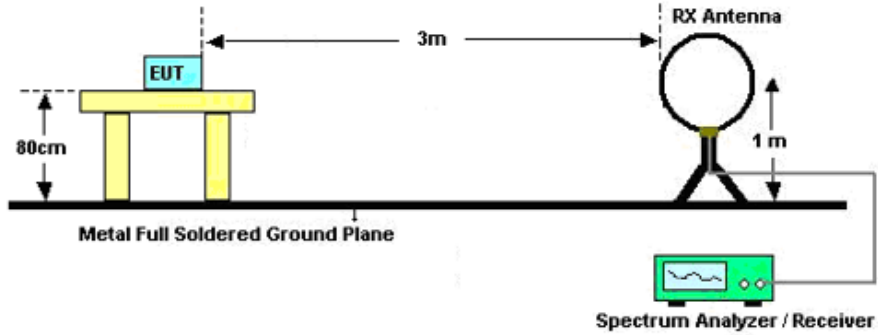

For radiated emissions from 30MHz to 1GHz

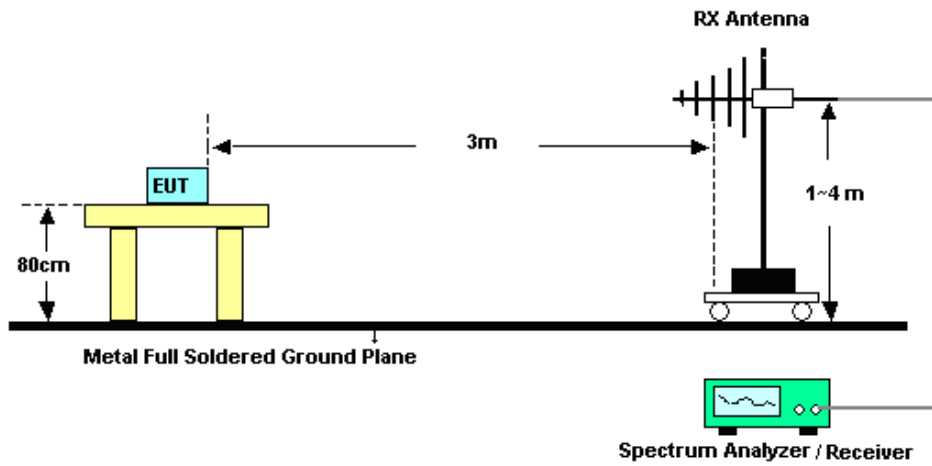

For radiated emissions above 1GHz

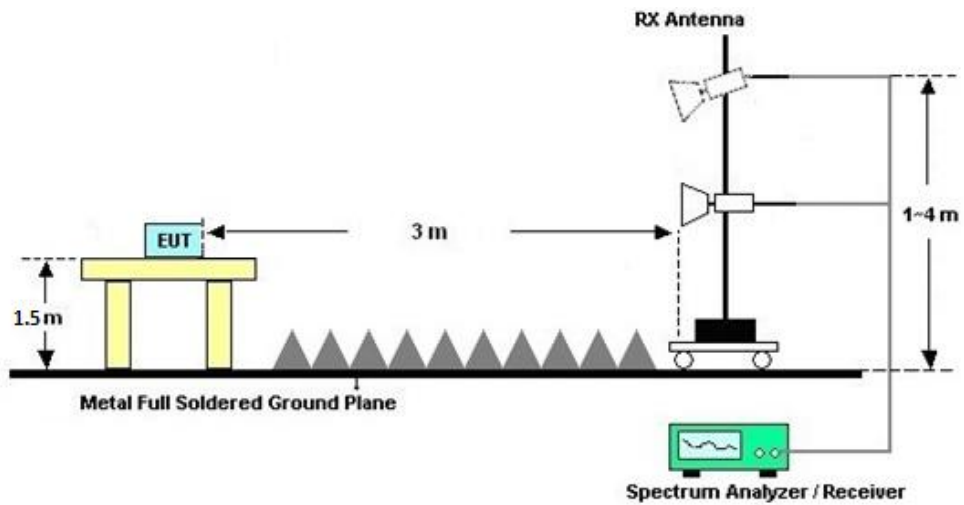



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

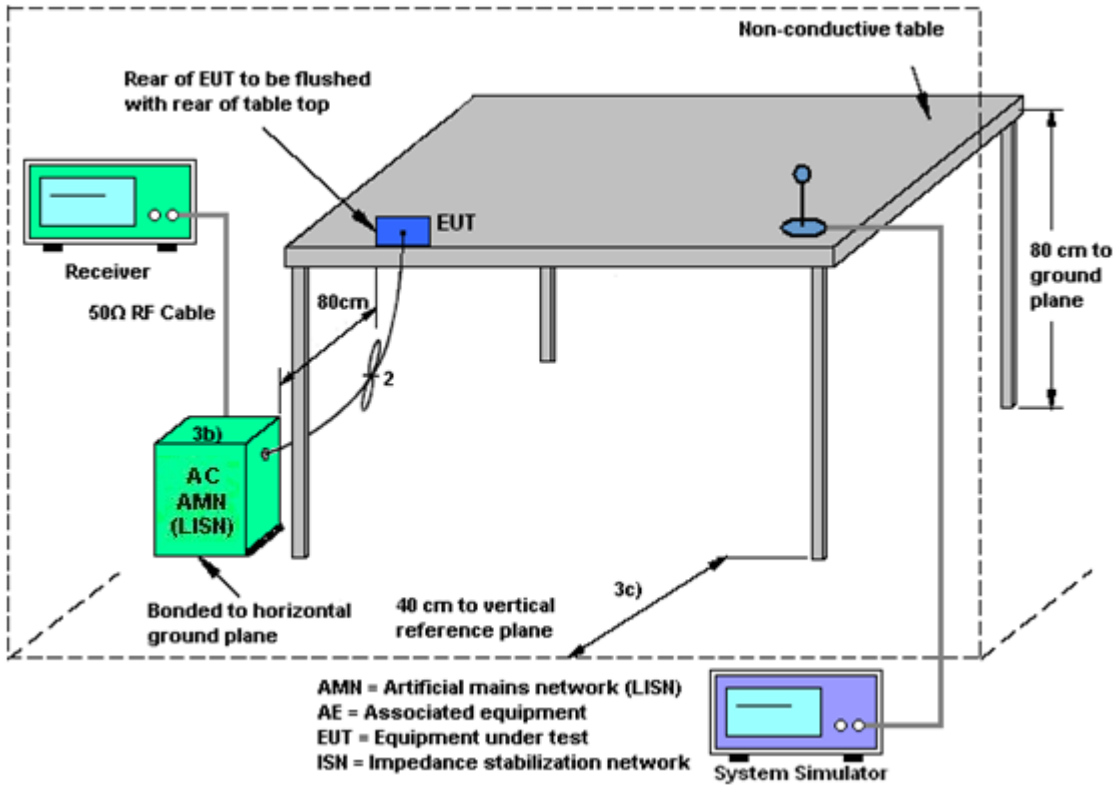

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
	Ant. 1	Ant. 2	DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
2.4 GHz	-1.57	-1.44	-1.44	1.51	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Jul. 27, 2022~ Aug. 23, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Jul. 27, 2022~ Aug. 23, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Jul. 27, 2022~ Aug. 23, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz;M ax 30dBm	Oct. 16, 2021	Jul. 14, 2022~ Aug. 23, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 44	10Hz~44G,MAX 30dB	Mar. 24, 2022	Jul. 14, 2022~ Aug. 23, 2022	Mar. 23, 2023	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jul. 14, 2022~ Aug. 23, 2022	Oct. 29, 2022	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May 24 ,2022	Jul. 14, 2022~ Aug. 23, 2022	May 23, 2023	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2021	Jul. 14, 2022~ Aug. 23, 2022	Nov. 07, 2022	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Jul. 14, 2022~ Aug. 23, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 11, 2022	Jul. 14, 2022~ Aug. 23, 2022	Jul. 10, 2023	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2022	Jul. 14, 2022~ Aug. 23, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2012228	1Ghz-18Ghz	Oct. 16, 2021	Jul. 14, 2022~ Aug. 23, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY532703 16	500MHz~26.5G Hz	Oct. 16, 2021	Jul. 14, 2022~ Aug. 23, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Jul. 14, 2022~ Aug. 23, 2022	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 14, 2022~ Aug. 23, 2022	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 14, 2022~ Aug. 23, 2022	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 20, 2022	Aug. 03, 2022	Apr. 19, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Aug. 03, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 14, 2021	Aug. 03, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Aug. 03, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results



Case No. : FR271606C	
Ambient Condition: 25 °C, 45 %RH,	
Test Date: 2022.7.27~2022.8.23	Test Engineer: Jiang Jun



DTS Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant1	2412	8.56	2407.48	2416.04	0.5	PASS
	Ant2	2412	8.56	2407.48	2416.04	0.5	PASS
	Ant1	2437	8.56	2432.48	2441.04	0.5	PASS
	Ant2	2437	8.08	2432.96	2441.04	0.5	PASS
	Ant1	2462	7.56	2458.00	2465.56	0.5	PASS
	Ant2	2462	7.56	2458.00	2465.56	0.5	PASS
11G-CDD	Ant1	2412	16.08	2403.84	2419.92	0.5	PASS
	Ant2	2412	16.32	2403.84	2420.16	0.5	PASS
	Ant1	2437	16.04	2428.84	2444.88	0.5	PASS
	Ant2	2437	16.32	2428.84	2445.16	0.5	PASS
	Ant1	2457	15.76	2448.84	2464.60	0.5	PASS
	Ant2	2457	16.04	2448.84	2464.88	0.5	PASS
	Ant1	2462	16.04	2453.84	2469.88	0.5	PASS
	Ant2	2462	15.68	2453.84	2469.52	0.5	PASS
11AX20MIMO	Ant1	2412	18.60	2402.64	2421.24	0.5	PASS
	Ant2	2412	19.04	2402.48	2421.52	0.5	PASS
	Ant1	2437	17.68	2427.80	2445.48	0.5	PASS
	Ant2	2437	18.88	2427.56	2446.44	0.5	PASS
	Ant1	2462	18.48	2452.56	2471.04	0.5	PASS
	Ant2	2462	18.20	2452.60	2470.80	0.5	PASS
11AX40MIMO	Ant1	2422	37.84	2403.12	2440.96	0.5	PASS
	Ant2	2422	37.52	2403.20	2440.72	0.5	PASS
	Ant1	2437	37.36	2418.12	2455.48	0.5	PASS
	Ant2	2437	37.52	2418.12	2455.64	0.5	PASS
	Ant1	2452	37.92	2432.96	2470.88	0.5	PASS
	Ant2	2452	37.60	2433.04	2470.64	0.5	PASS




Test Graphs

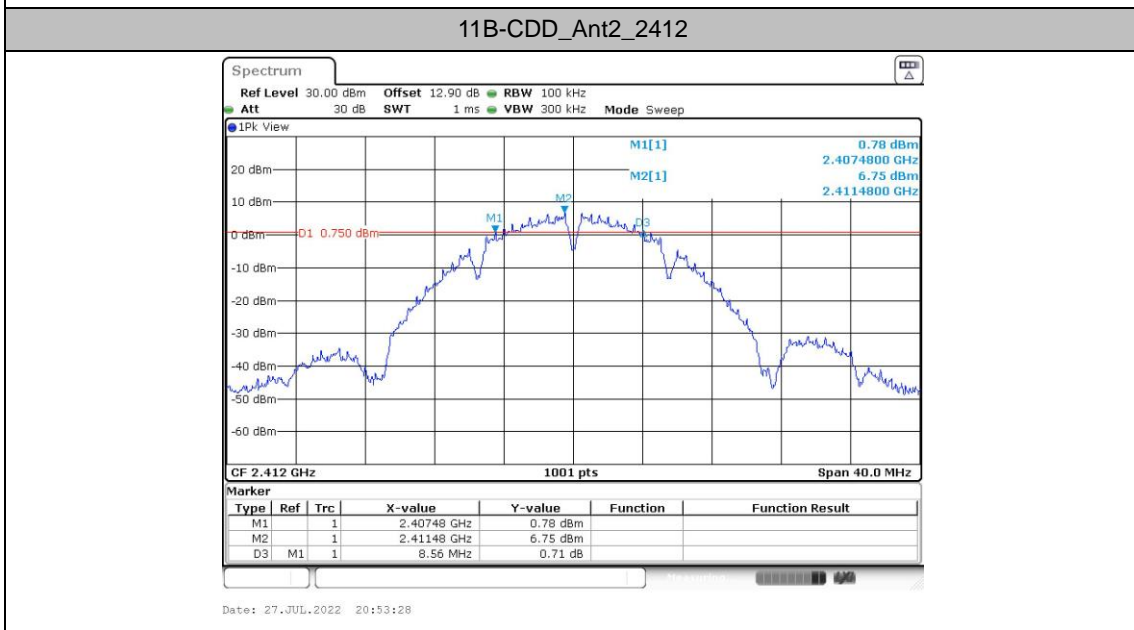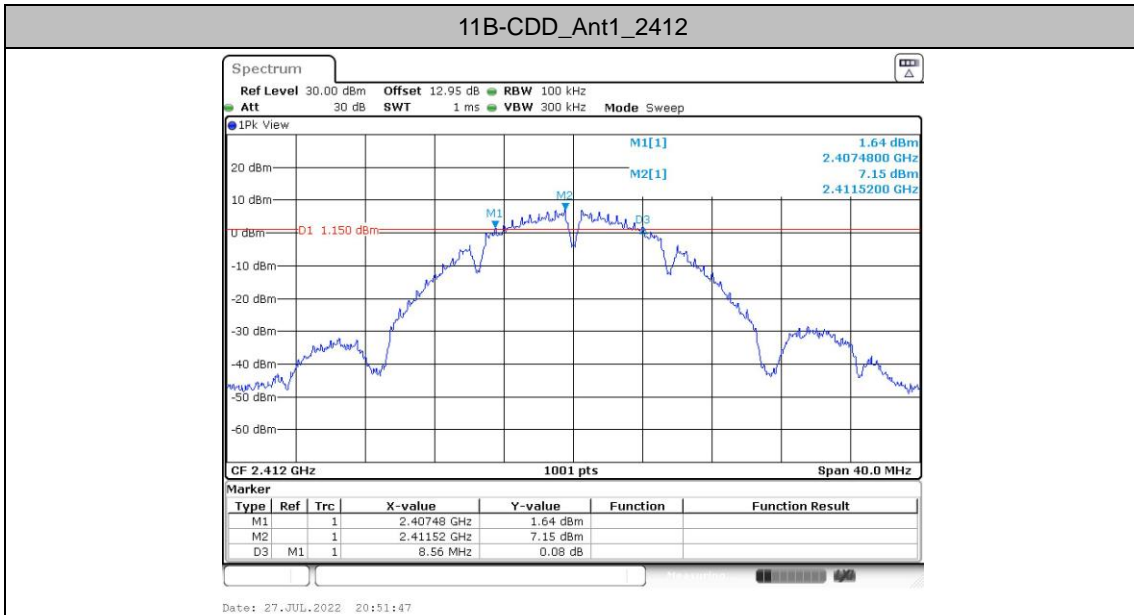




11B-CDD_Ant1_2437

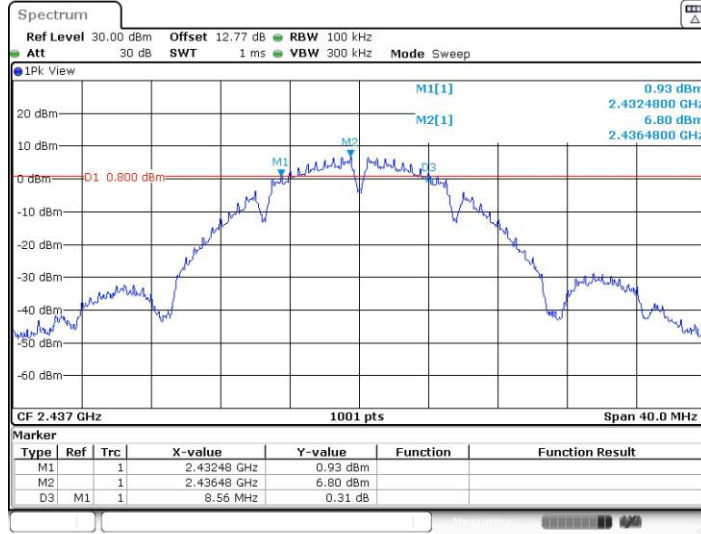

Date: 27.JUL.2022 20:55:27


11B-CDD_Ant2_2437

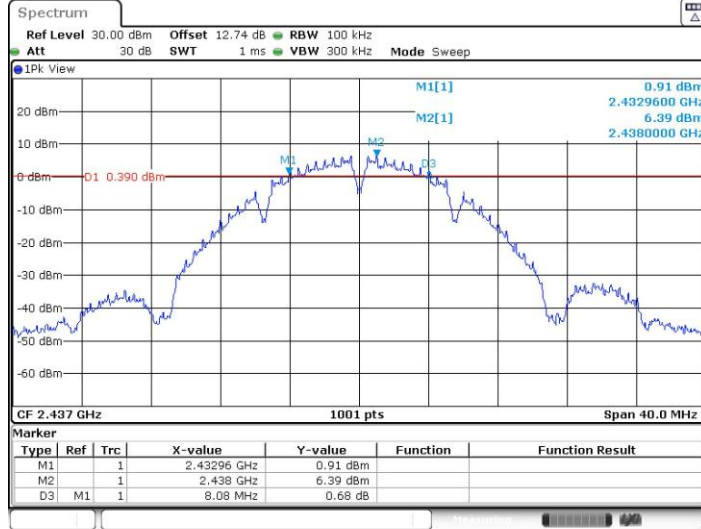

Date: 27.JUL.2022 20:56:55




11B-CDD_Ant1_2462

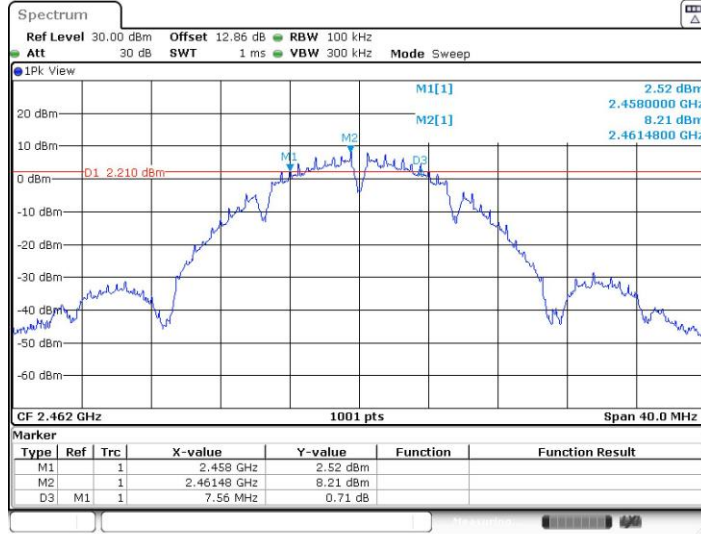

Date: 27.JUL.2022 20:58:40


11B-CDD_Ant2_2462

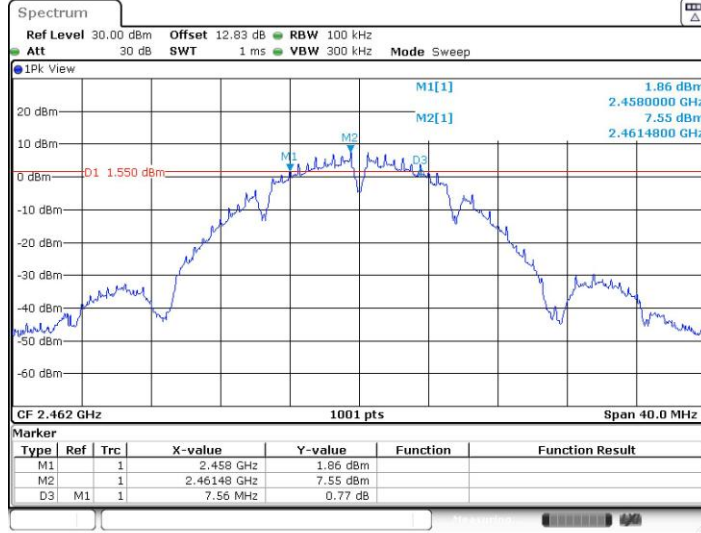

Date: 27.JUL.2022 21:00:21




11G-CDD_Ant1_2412

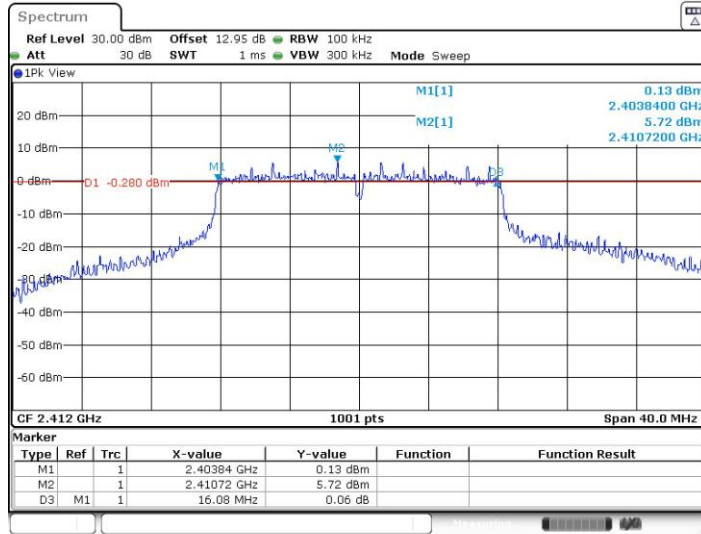

Date: 27.JUL.2022 21:02:13


11G-CDD_Ant2_2412

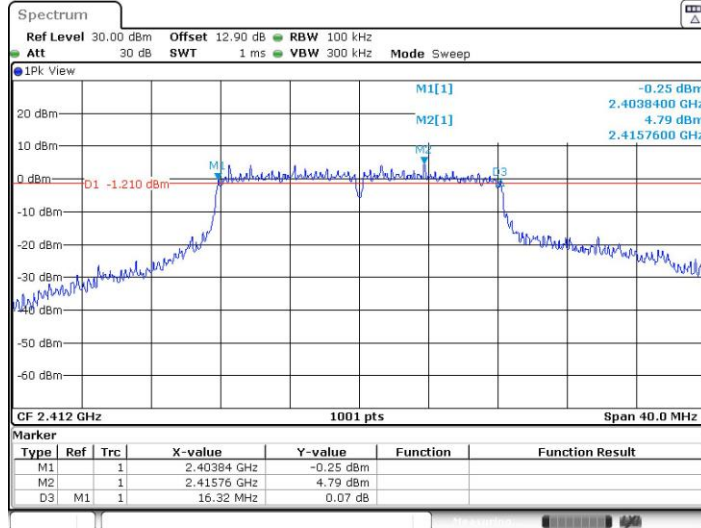

Date: 27.JUL.2022 21:03:59




11G-CDD_Ant1_2437

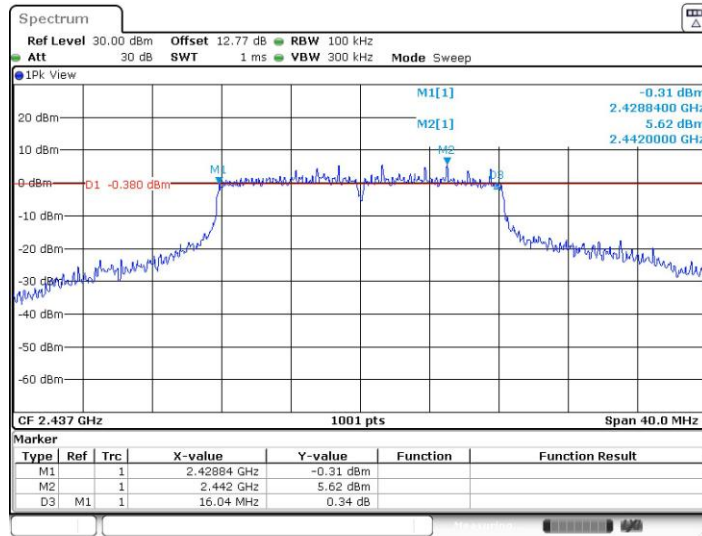

Date: 27.JUL.2022 21:05:46


11G-CDD_Ant2_2437

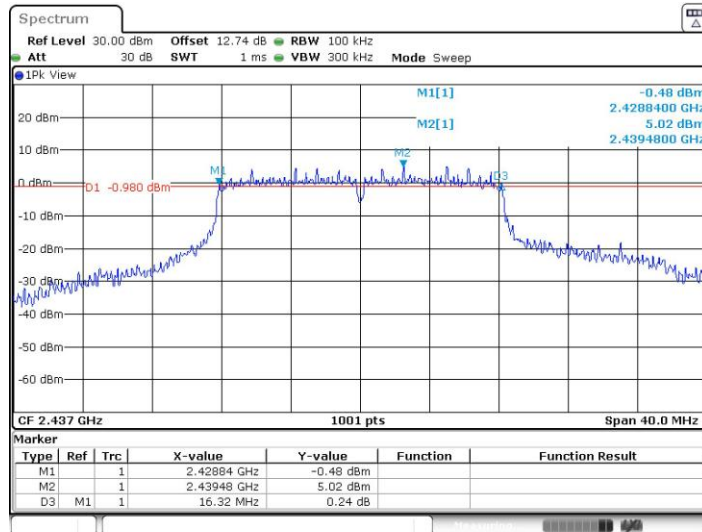

Date: 27.JUL.2022 21:07:15




11G-CDD_Ant1_2457

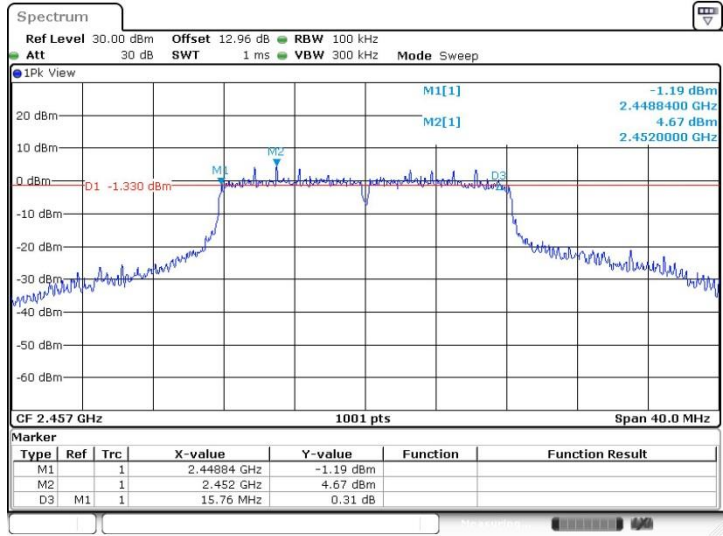


Date: 23.AUG.2022 12:16:28

11G-CDD_Ant2_2457

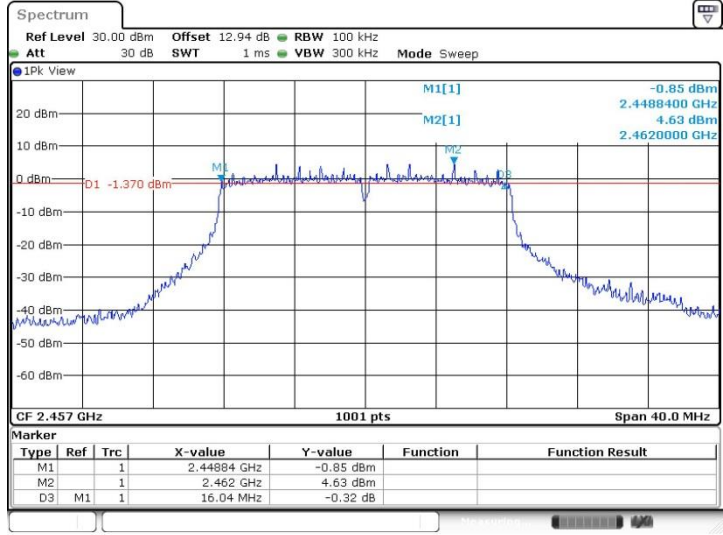


Date: 23.AUG.2022 12:18:09

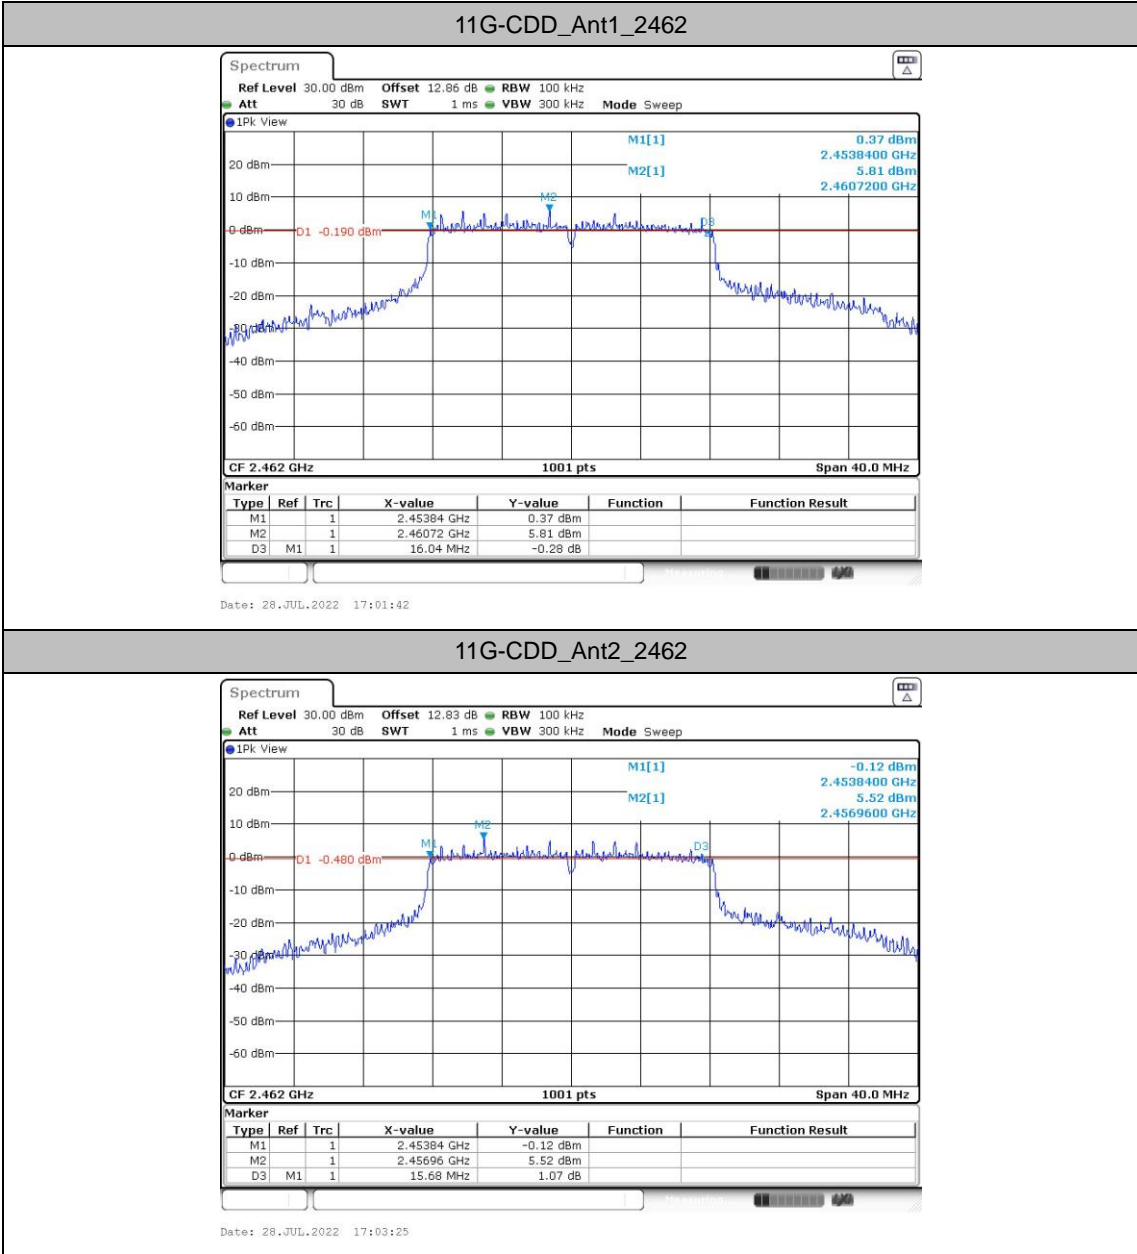




11AX20MIMO_Ant1_2412

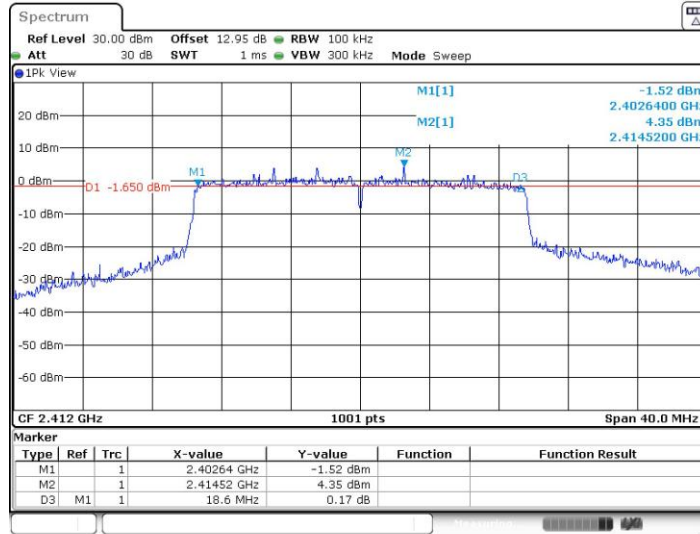

Date: 28.JUL.2022 17:05:10


11AX20MIMO_Ant2_2412

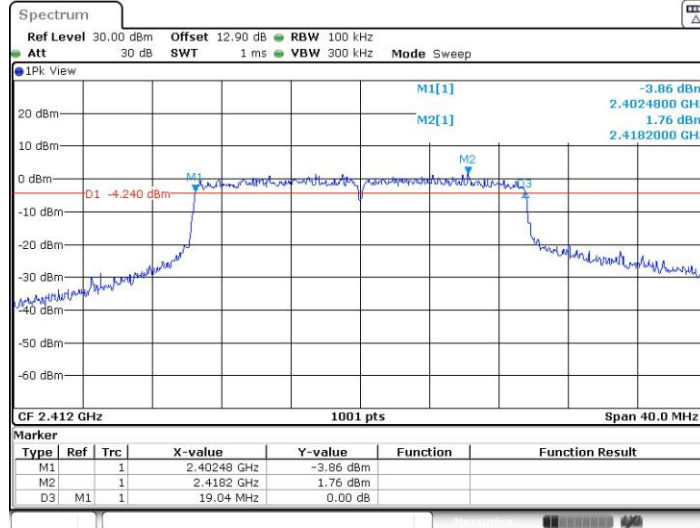

Date: 28.JUL.2022 17:06:57




11AX20MIMO_Ant1_2437

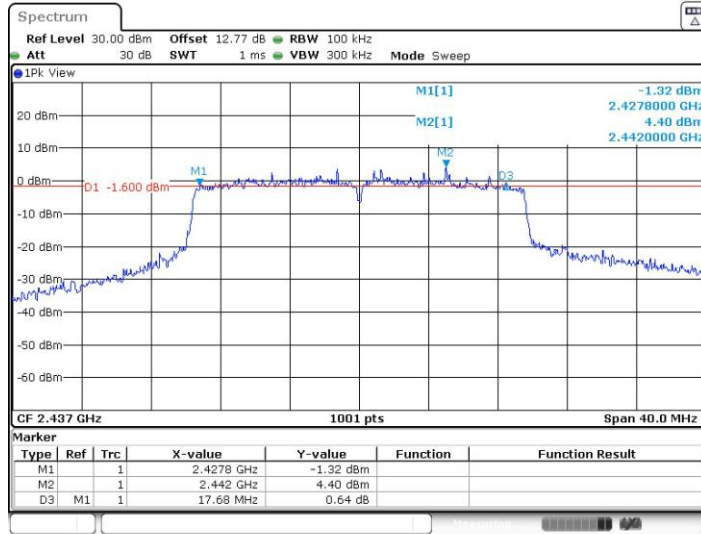

Date: 28.JUL.2022 17:09:55


11AX20MIMO_Ant2_2437

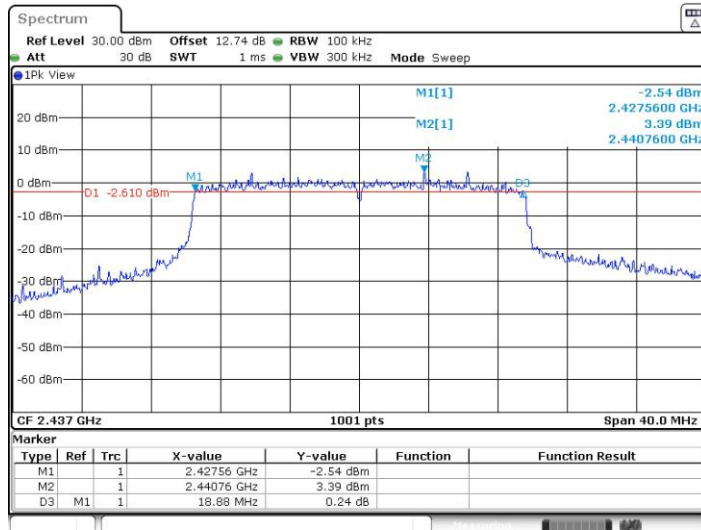

Date: 28.JUL.2022 17:11:26




11AX20MIMO_Ant1_2462

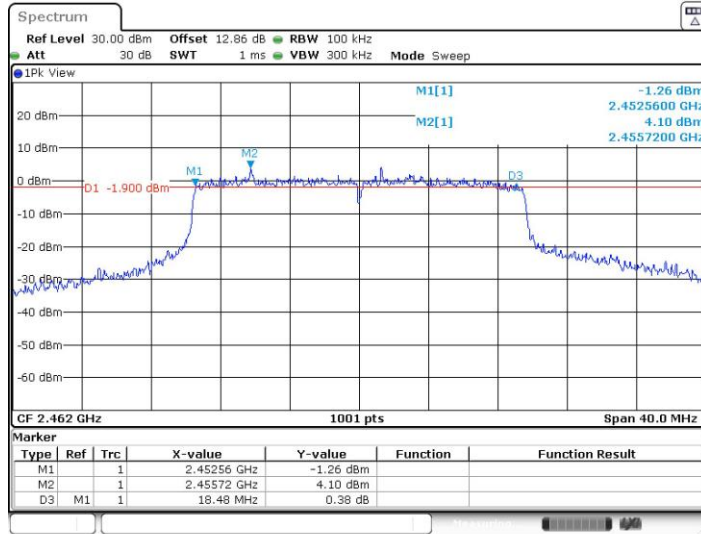

Date: 28.JUL.2022 17:13:13


11AX20MIMO_Ant2_2462

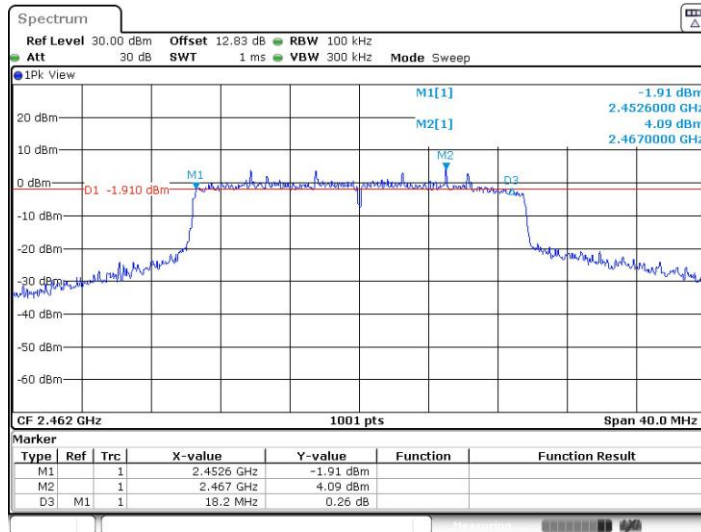

Date: 28.JUL.2022 17:14:59




11AX40MIMO_Ant1_2422

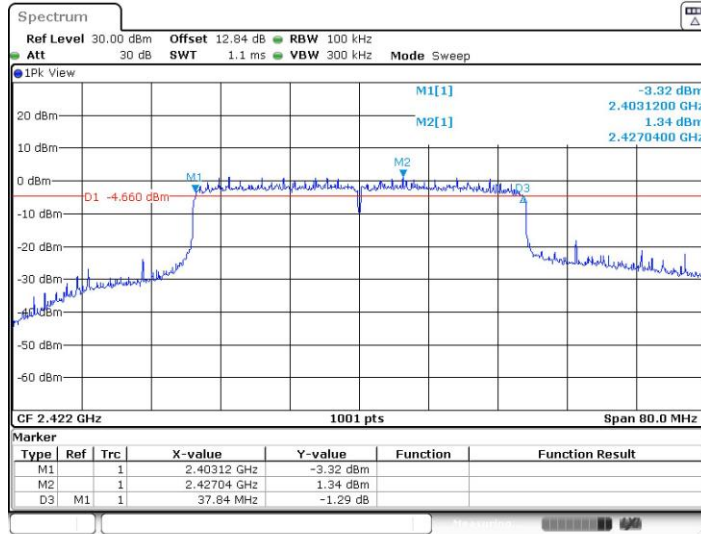


Date: 28.JUL.2022 17:16:47

11AX40MIMO_Ant2_2422

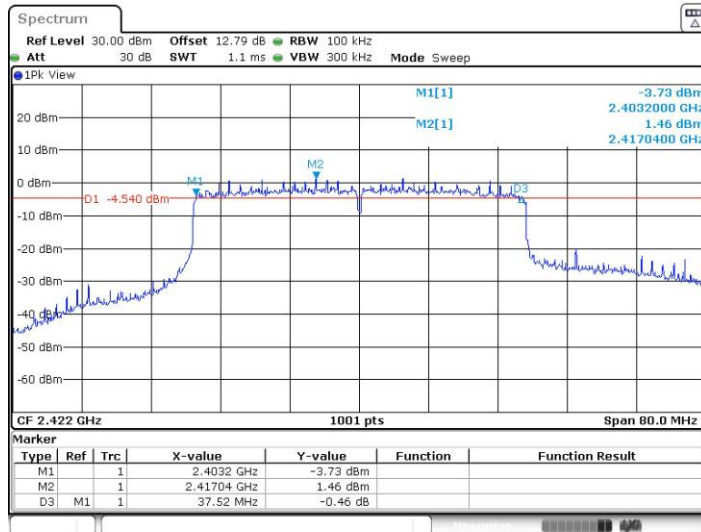


Date: 28.JUL.2022 17:18:30

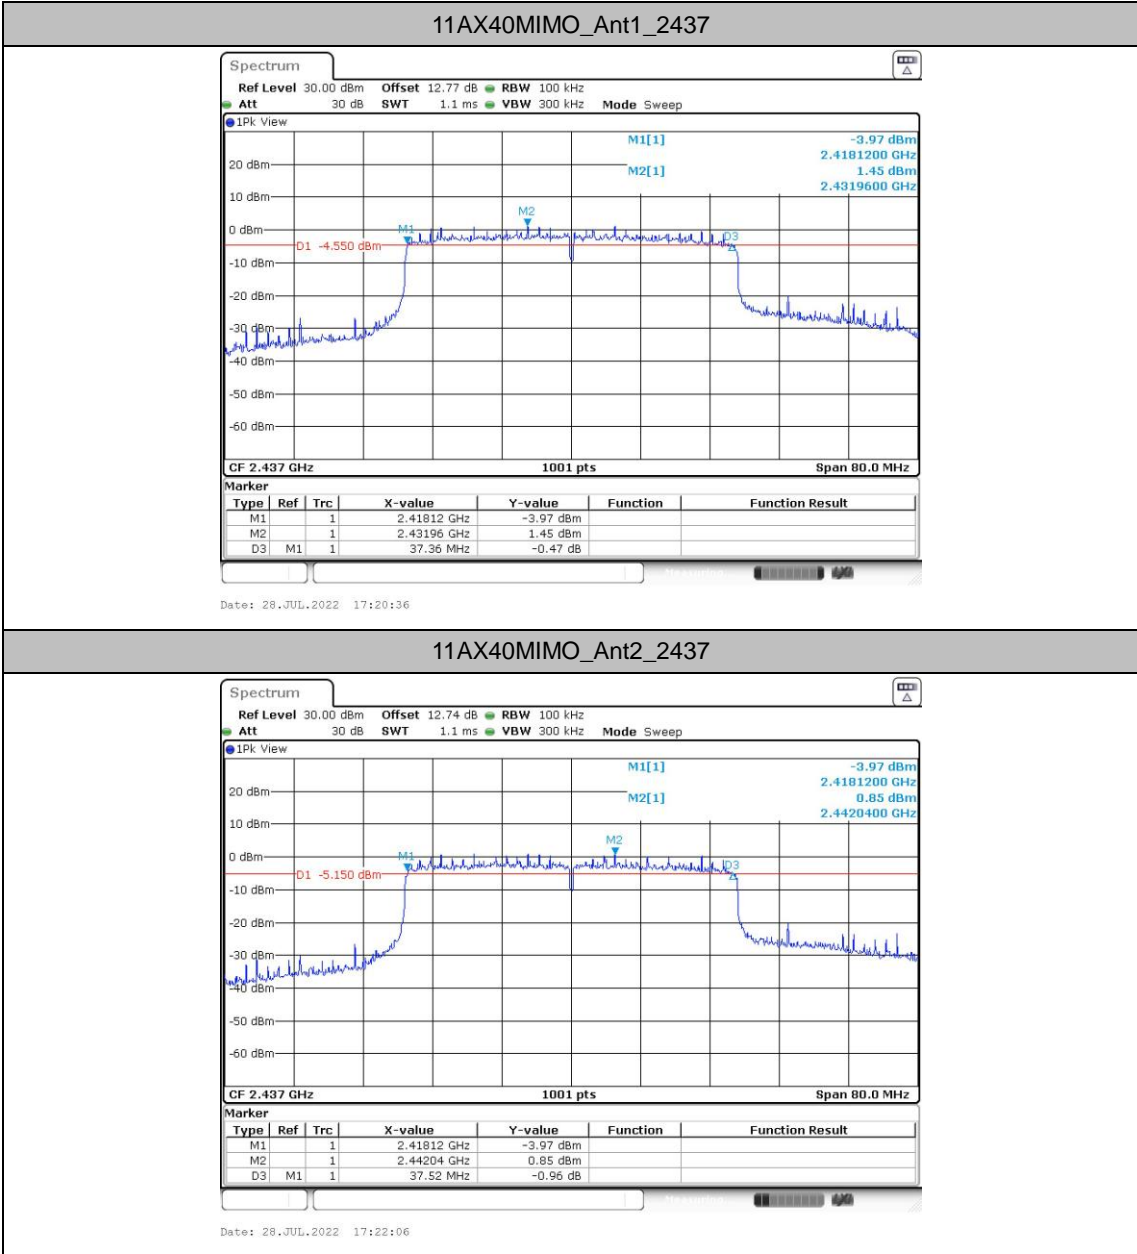




11AX40MIMO_Ant1_2452

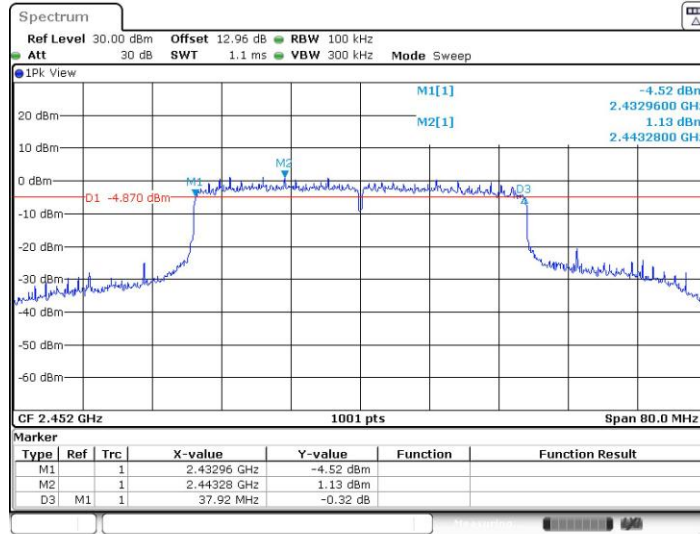

Date: 28.JUL.2022 17:23:52

11AX40MIMO_Ant2_2452

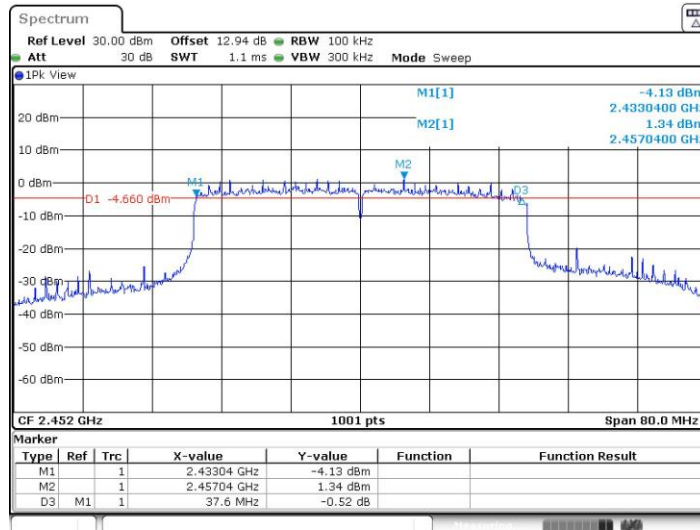

Date: 28.JUL.2022 17:25:36





Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant1	2412	14.106	2404.887	2418.993	---	---
	Ant2	2412	13.706	2405.127	2418.833	---	---
	Ant1	2437	14.066	2429.967	2444.033	---	---
	Ant2	2437	13.706	2430.087	2443.793	---	---
	Ant1	2462	13.906	2455.007	2468.913	---	---
	Ant2	2462	13.866	2454.967	2468.833	---	---
11G-CDD	Ant1	2412	17.822	2403.489	2421.311	---	---
	Ant2	2412	16.943	2403.688	2420.631	---	---
	Ant1	2437	17.542	2428.528	2446.071	---	---
	Ant2	2437	16.903	2428.688	2445.591	---	---
	Ant1	2457	16.583	2448.728	2465.312	---	---
	Ant2	2457	16.543	2448.728	2465.272	---	---
	Ant1	2462	17.263	2453.568	2470.831	---	---
	Ant2	2462	17.063	2453.608	2470.671	---	---
11AX20MIMO	Ant1	2412	19.221	2402.410	2421.630	---	---
	Ant2	2412	19.181	2402.450	2421.630	---	---
	Ant1	2437	19.181	2427.410	2446.590	---	---
	Ant2	2437	19.141	2427.410	2446.550	---	---
	Ant1	2462	19.141	2452.450	2471.590	---	---
	Ant2	2462	19.181	2452.410	2471.590	---	---
11AX40MIMO	Ant1	2422	38.122	2402.979	2441.101	---	---
	Ant2	2422	38.122	2402.979	2441.101	---	---
	Ant1	2437	38.042	2417.979	2456.021	---	---
	Ant2	2437	38.122	2417.979	2456.101	---	---
	Ant1	2452	38.122	2432.899	2471.021	---	---
	Ant2	2452	38.122	2432.899	2471.021	---	---




Test Graphs

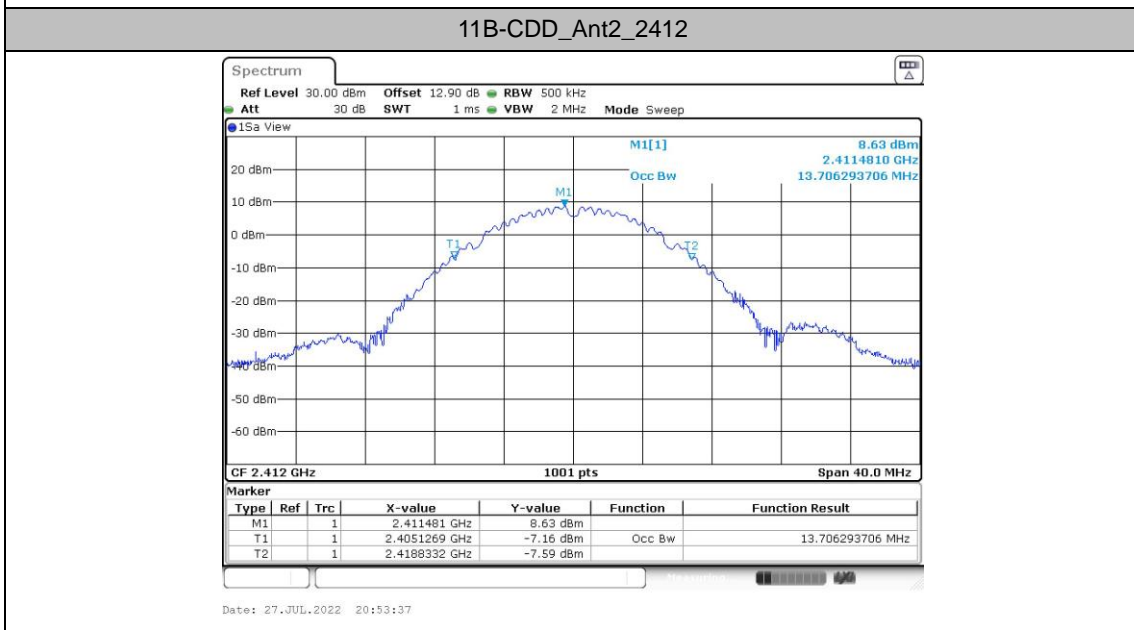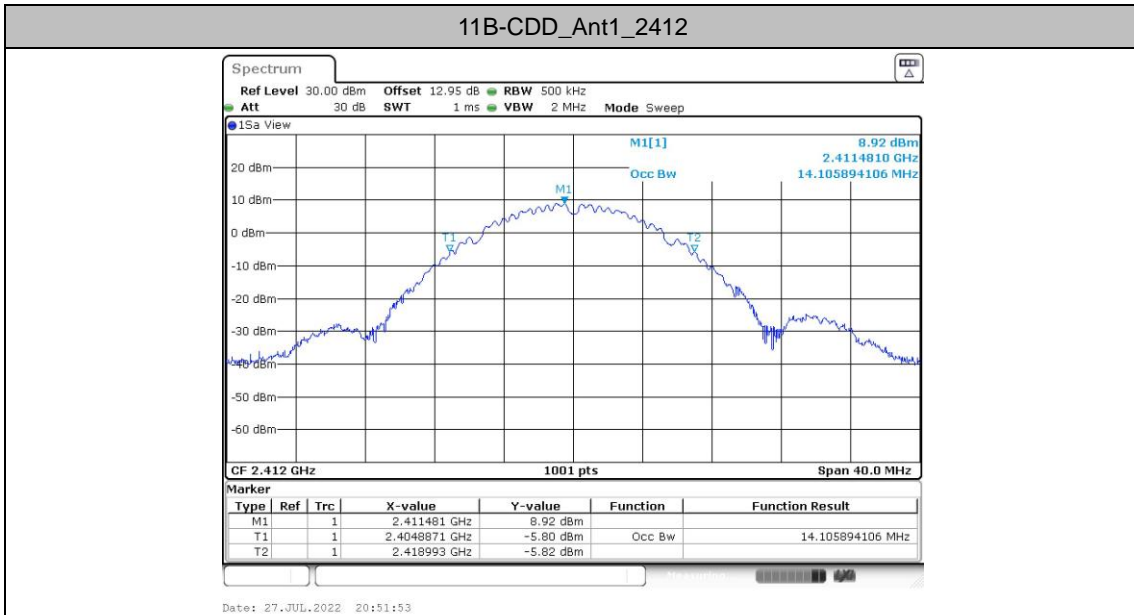




11B-CDD_Ant1_2437

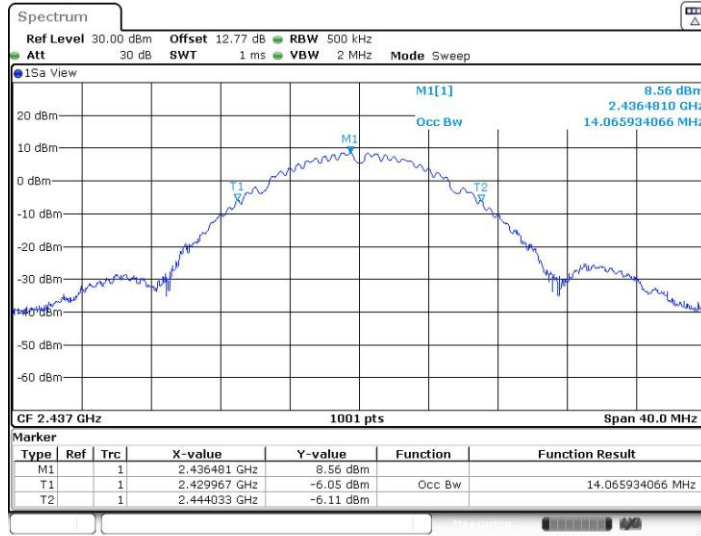

Date: 27.JUL.2022 20:55:35


11B-CDD_Ant2_2437

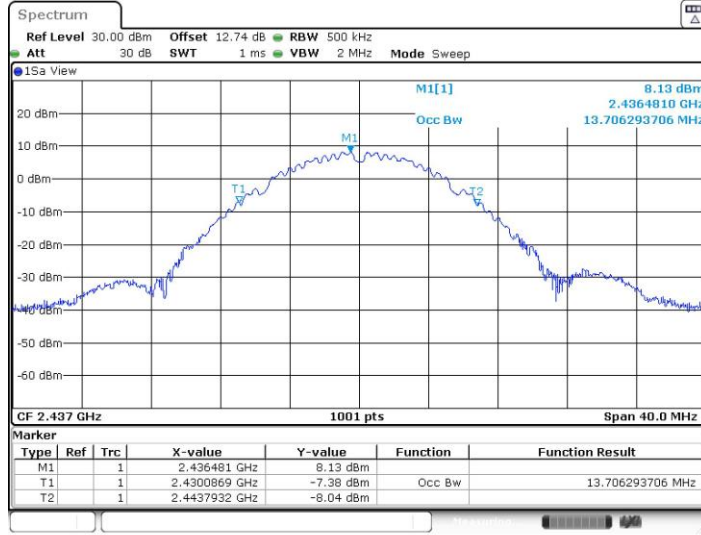

Date: 27.JUL.2022 20:57:03




11B-CDD_Ant1_2462

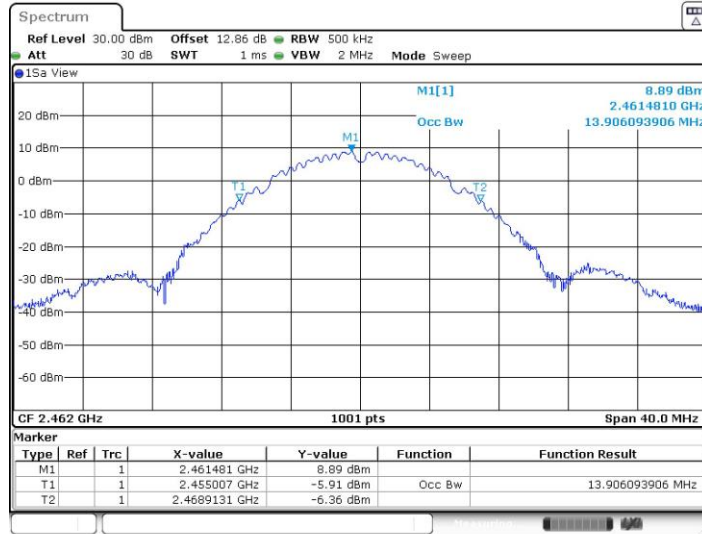

Date: 27.JUL.2022 20:58:48


11B-CDD_Ant2_2462

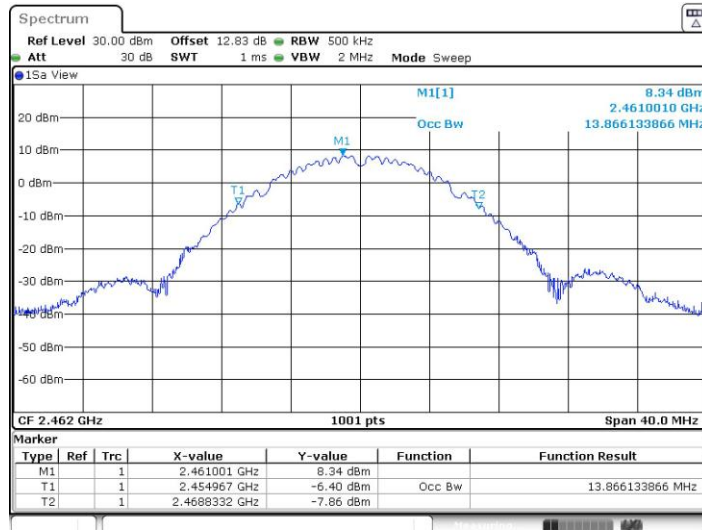

Date: 27.JUL.2022 21:00:28




11G-CDD_Ant1_2412

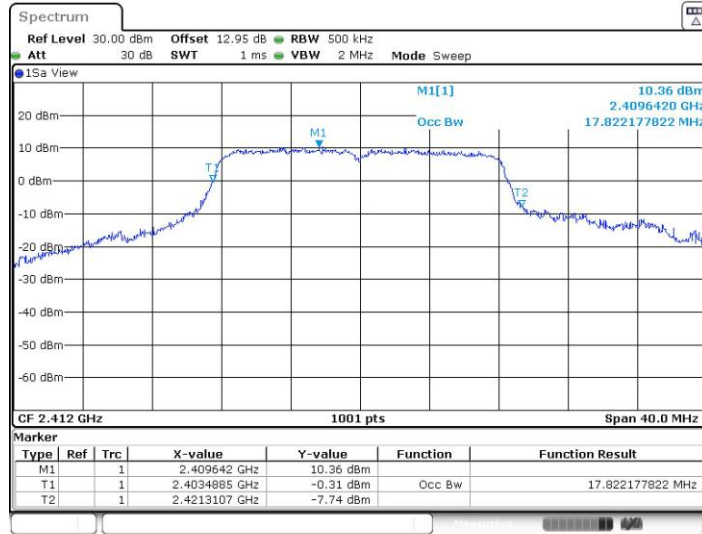

Date: 27.JUL.2022 21:02:21


11G-CDD_Ant2_2412

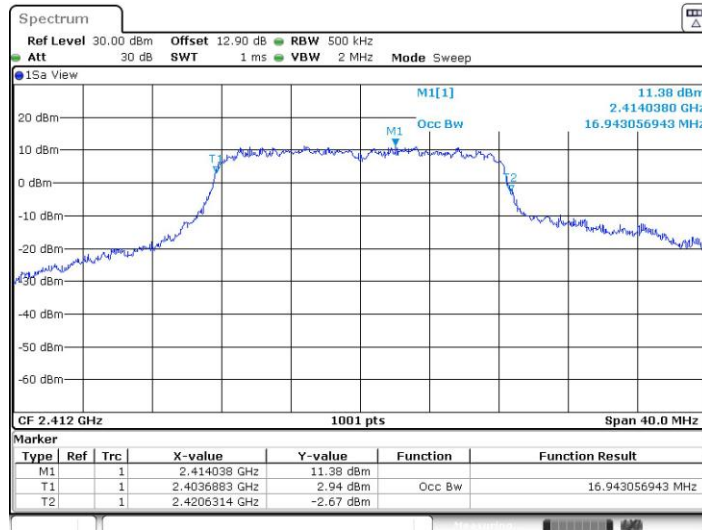


Date: 27.JUL.2022 21:04:07



11G-CDD_Ant1_2437

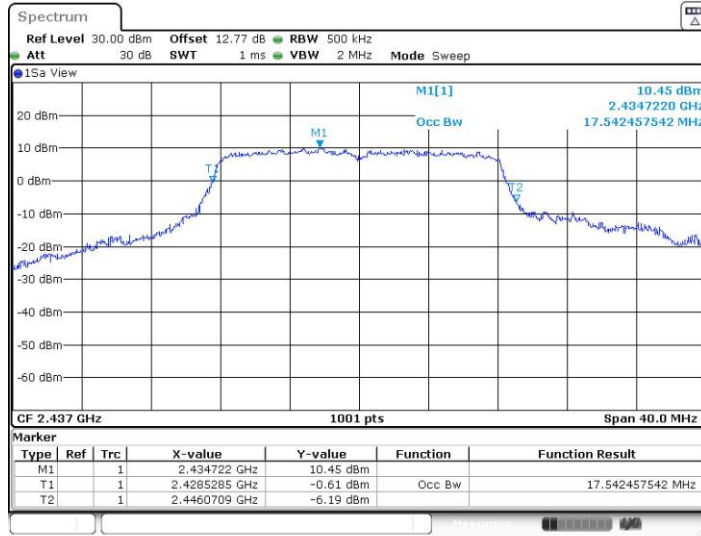


11G-CDD_Ant2_2437

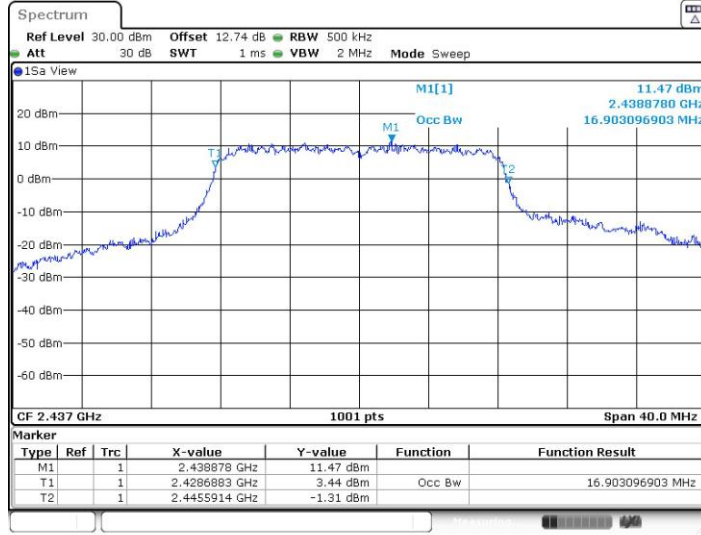




11G-CDD_Ant1_2457

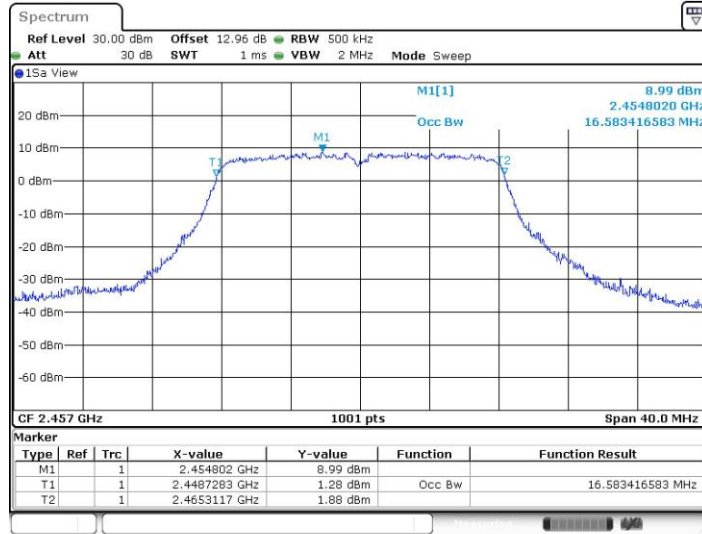

Date: 23.AUG.2022 12:16:34


11G-CDD_Ant2_2457

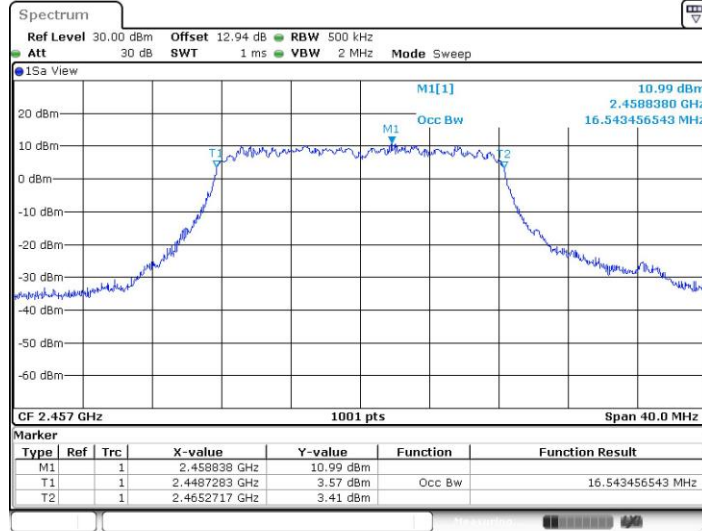

Date: 23.AUG.2022 12:18:16




11G-CDD_Ant1_2462

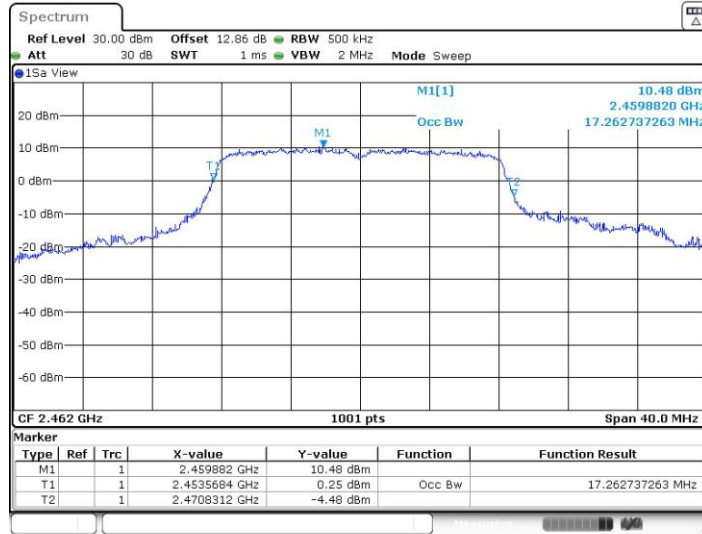

Date: 28.JUL.2022 17:01:48


11G-CDD_Ant2_2462

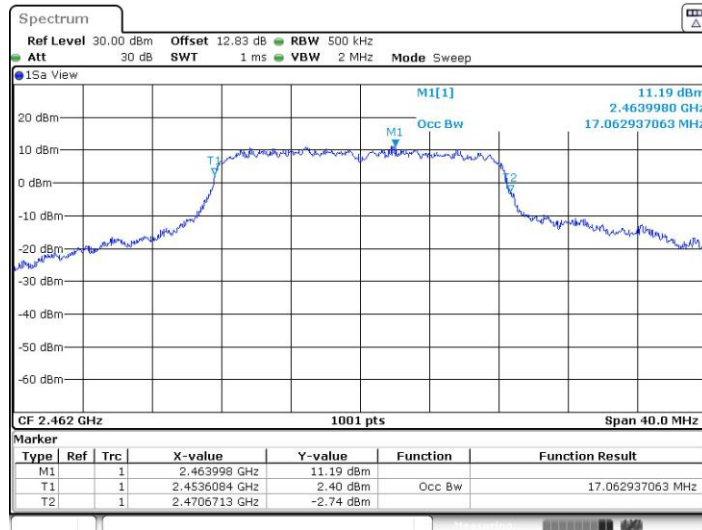

Date: 28.JUL.2022 17:03:33




11AX20MIMO_Ant1_2412

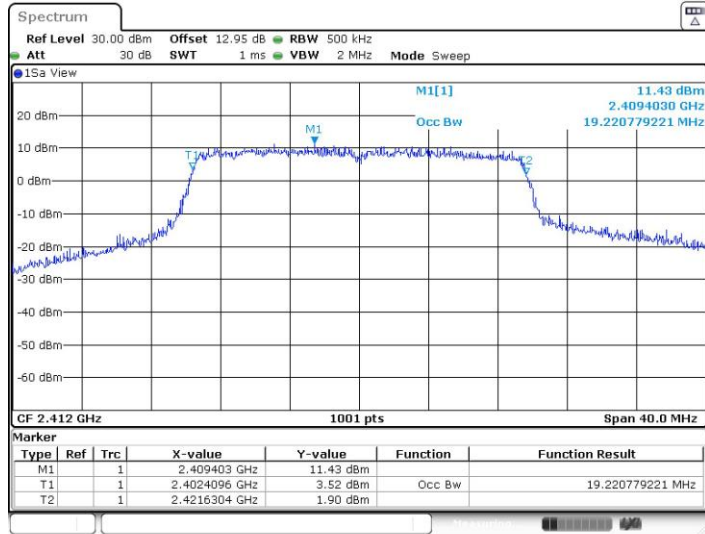

Date: 28.JUL.2022 17:05:18


11AX20MIMO_Ant2_2412

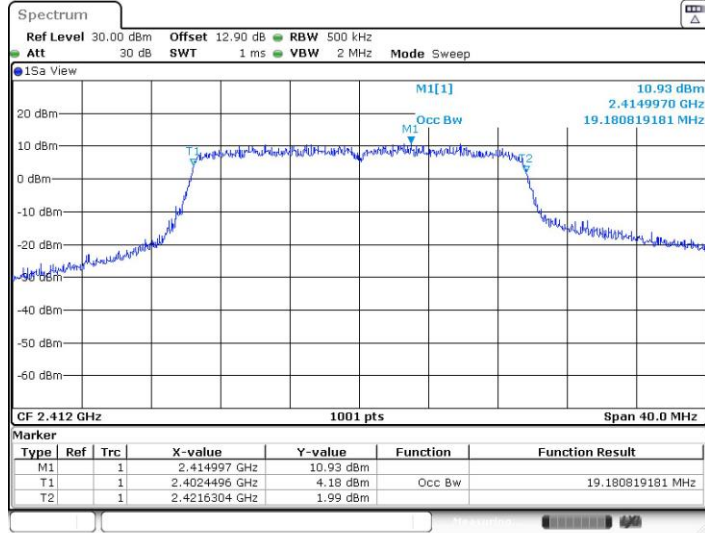

Date: 28.JUL.2022 17:07:04




11AX20MIMO_Ant1_2437

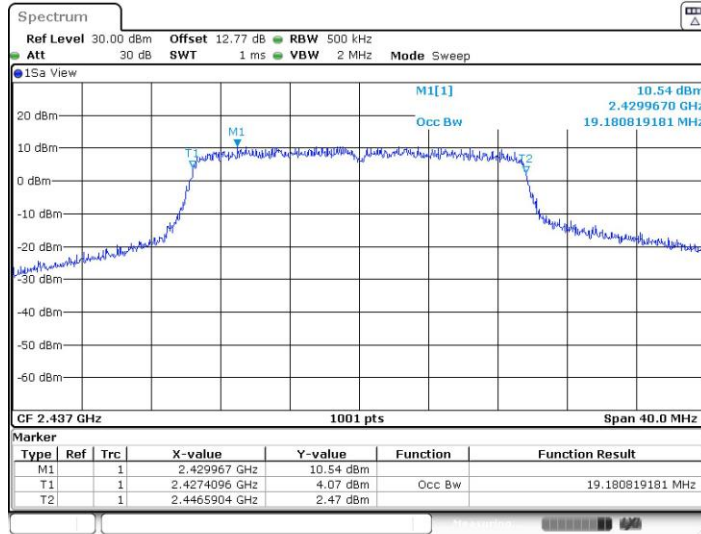

Date: 28.JUL.2022 17:10:03


11AX20MIMO_Ant2_2437

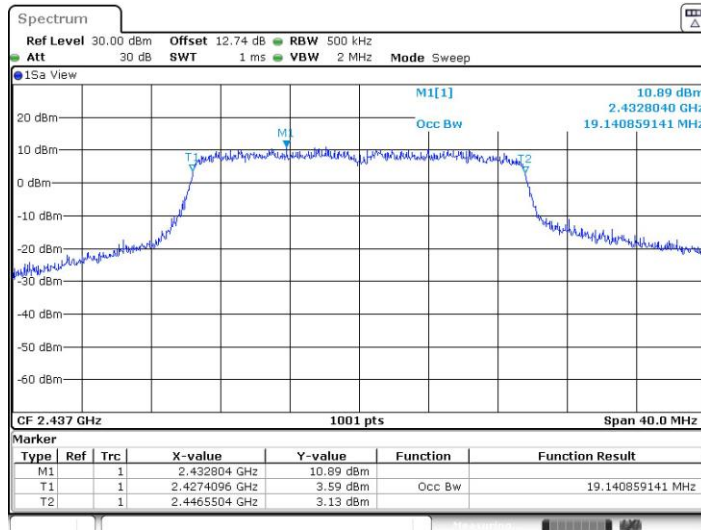

Date: 28.JUL.2022 17:11:33




11AX20MIMO_Ant1_2462

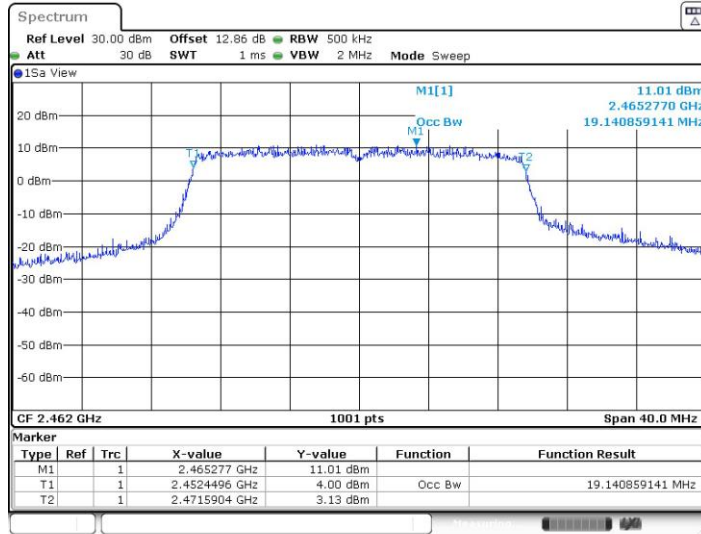

Date: 28.JUL.2022 17:13:20


11AX20MIMO_Ant2_2462

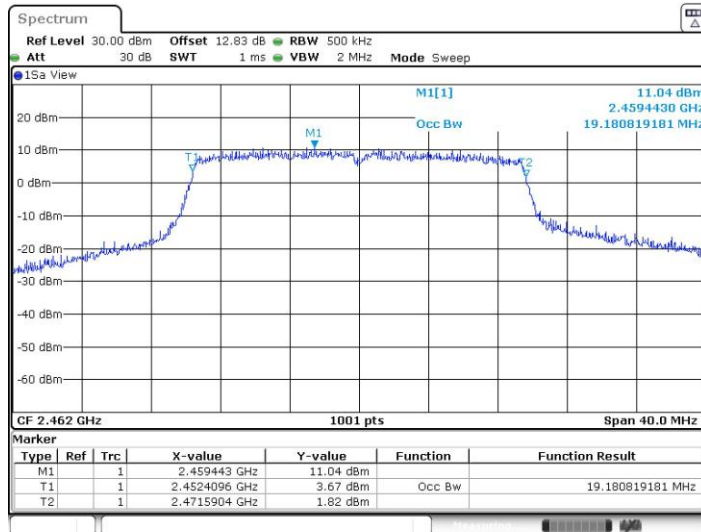

Date: 28.JUL.2022 17:15:05




11AX40MIMO_Ant1_2422

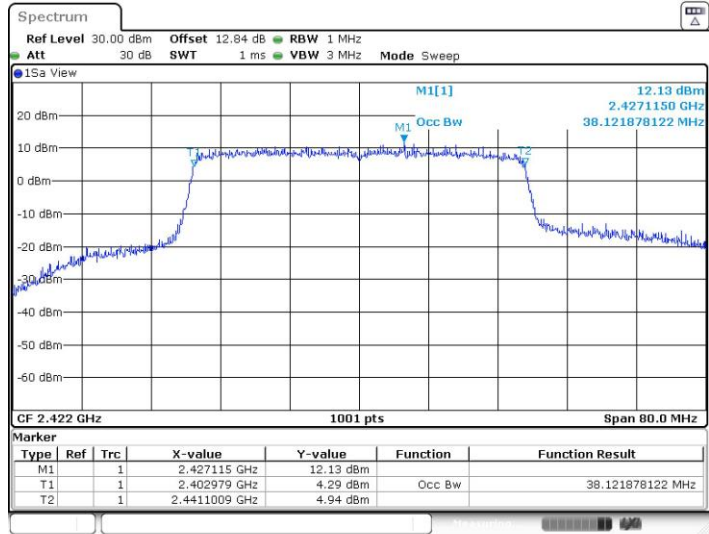

Date: 28.JUL.2022 17:16:55


11AX40MIMO_Ant2_2422

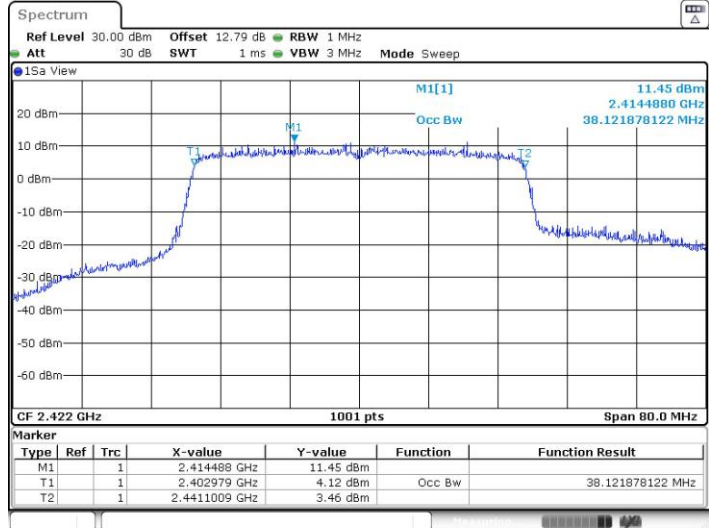

Date: 28.JUL.2022 17:18:38




11AX40MIMO_Ant1_2437

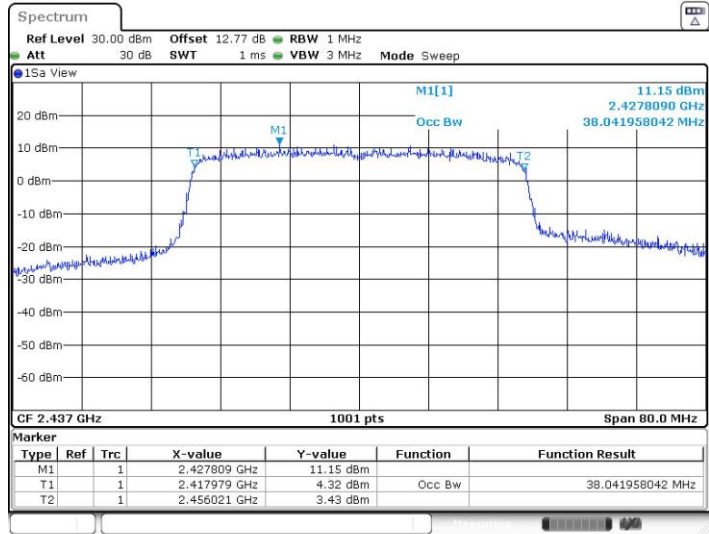

Date: 28.JUL.2022 17:20:44


11AX40MIMO_Ant2_2437

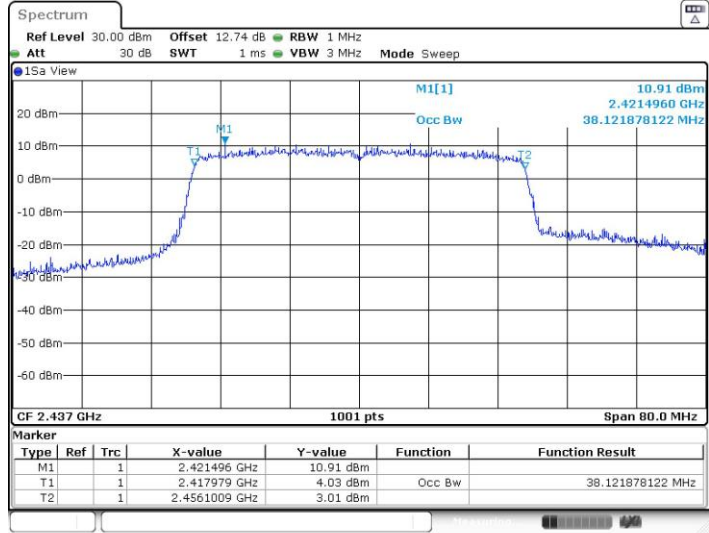

Date: 28.JUL.2022 17:22:14




11AX40MIMO_Ant1_2452

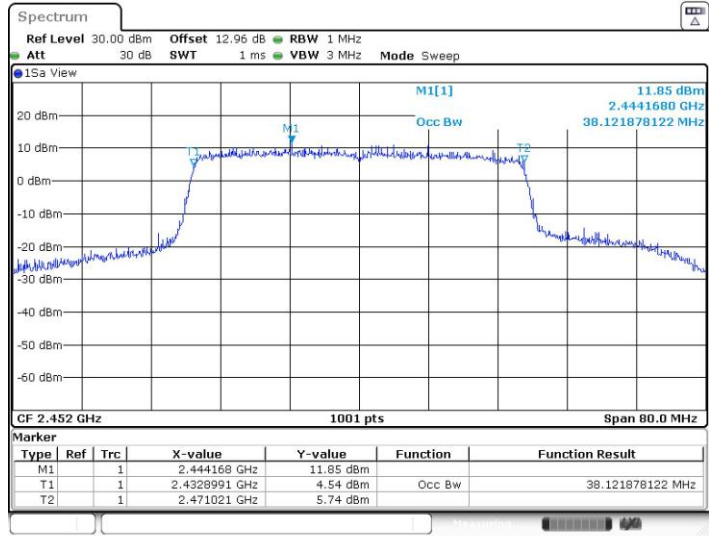

Date: 28.JUL.2022 17:24:00

11AX40MIMO_Ant2_2452

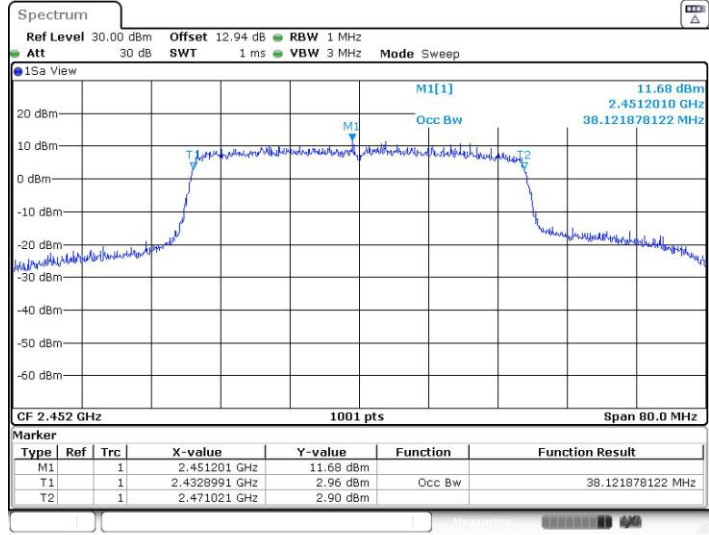

Date: 28.JUL.2022 17:25:43



Maximum power spectral density

Test Result


TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B-CDD	Ant1	2412	-5.76	≤8.00	PASS
	Ant2	2412	-6.17	≤8.00	PASS
	total	2412	-2.95	≤8.00	PASS
	Ant1	2437	-6.93	≤8.00	PASS
	Ant2	2437	-7.39	≤8.00	PASS
	total	2437	-4.14	≤8.00	PASS
	Ant1	2462	-7.95	≤8.00	PASS
	Ant2	2462	-8.48	≤8.00	PASS
	total	2462	-5.20	≤8.00	PASS
11G-CDD	Ant1	2412	-9.18	≤8.00	PASS
	Ant2	2412	-10.99	≤8.00	PASS
	total	2412	-6.98	≤8.00	PASS
	Ant1	2437	-10.3	≤8.00	PASS
	Ant2	2437	-10.25	≤8.00	PASS
	total	2437	-7.26	≤8.00	PASS
	Ant1	2457	-11.56	≤8.00	PASS
	Ant2	2457	-11.62	≤8.00	PASS
	total	2457	-8.58	≤8.00	PASS
	Ant1	2462	-13.11	≤8.00	PASS
	Ant2	2462	-12.88	≤8.00	PASS
	total	2462	-9.98	≤8.00	PASS
11AX20MIMO	Ant1	2412	-11.06	≤8.00	PASS
	Ant2	2412	-11.11	≤8.00	PASS
	total	2412	-8.07	≤8.00	PASS
	Ant1	2437	-10.96	≤8.00	PASS
	Ant2	2437	-11.11	≤8.00	PASS
	total	2437	-8.02	≤8.00	PASS
	Ant1	2462	-12.61	≤8.00	PASS
	Ant2	2462	-12.6	≤8.00	PASS
	total	2462	-9.59	≤8.00	PASS
11AX40MIMO	Ant1	2422	-16.23	≤8.00	PASS
	Ant2	2422	-16.93	≤8.00	PASS
	total	2422	-13.56	≤8.00	PASS
	Ant1	2437	-16.23	≤8.00	PASS



	Ant2	2437	-15.67	≤8.00	PASS
	total	2437	-12.93	≤8.00	PASS
	Ant1	2452	-17.53	≤8.00	PASS
	Ant2	2452	-18.11	≤8.00	PASS
	total	2452	-14.80	≤8.00	PASS




Test Graphs

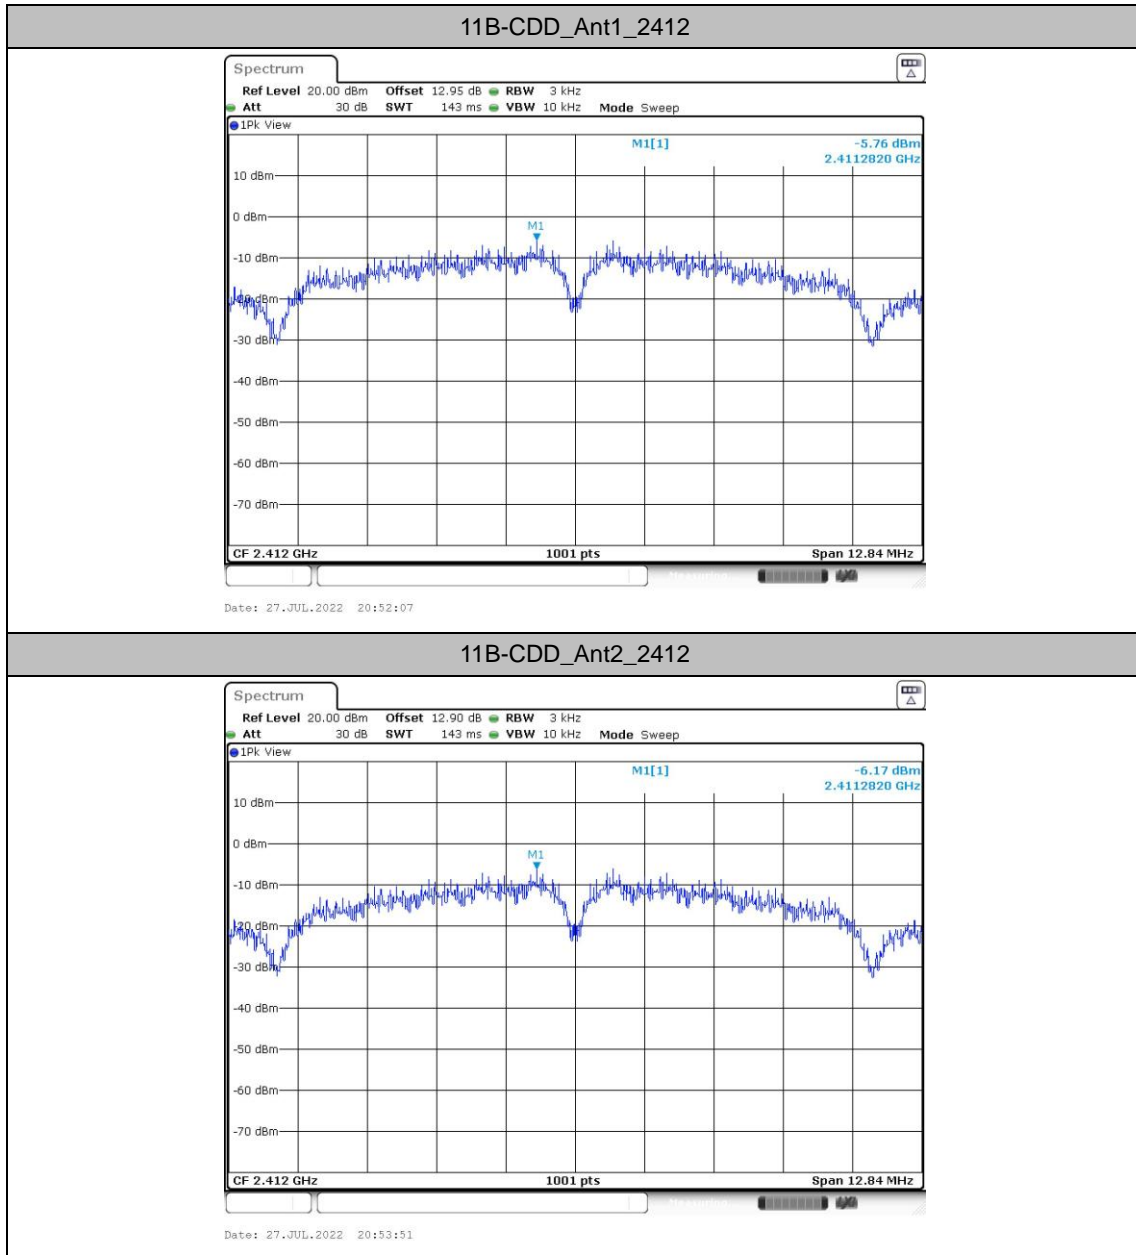




11B-CDD_Ant1_2437

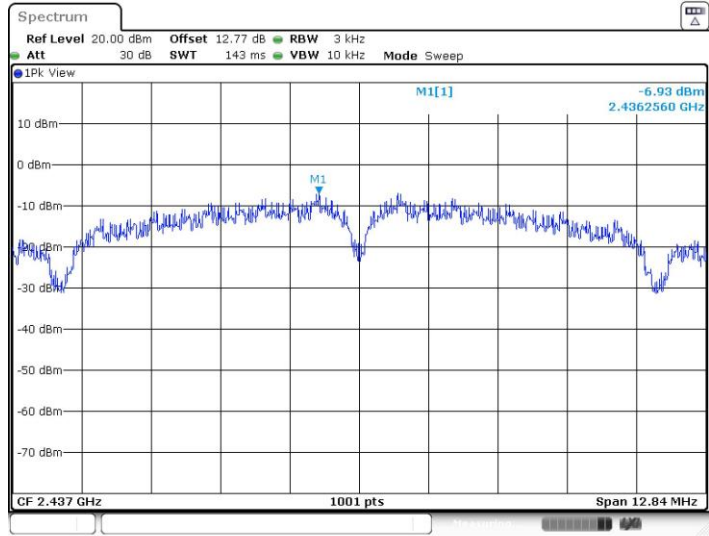

Date: 27.JUL.2022 20:55:49


11B-CDD_Ant2_2437

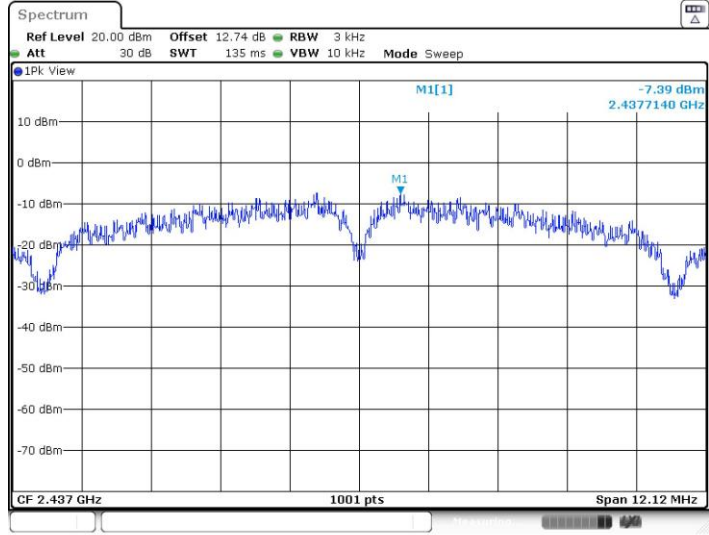

Date: 27.JUL.2022 20:57:17




11B-CDD_Ant1_2462

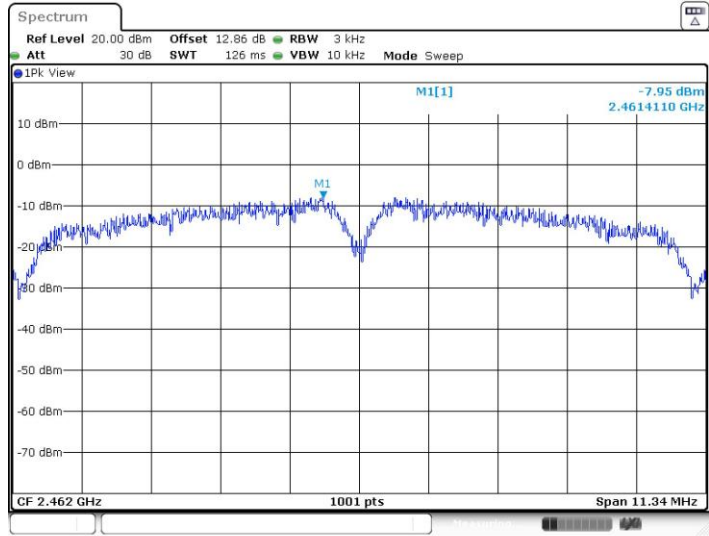

Date: 27.JUL.2022 20:59:00


11B-CDD_Ant2_2462

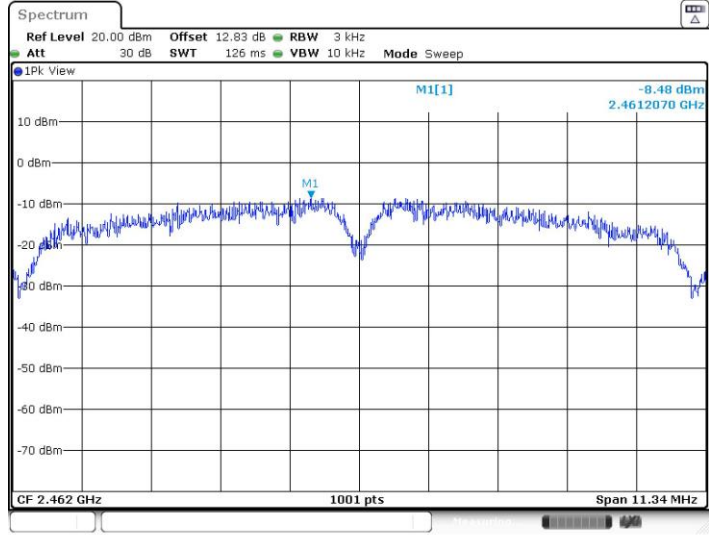

Date: 27.JUL.2022 21:00:41



11G-CDD_Ant1_2412

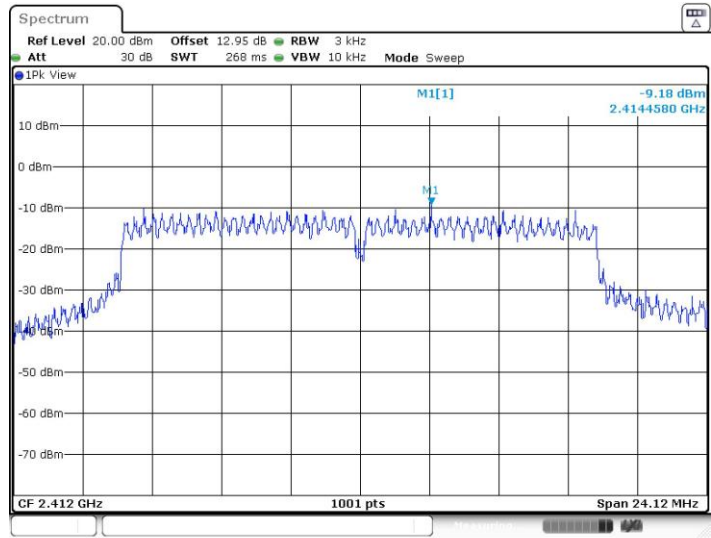

11G-CDD_Ant2_2412

