



RF TEST REPORT

Applicant Xiaomi Communications Co., Ltd.

FCC ID 2AFZZ33L2G

Product Mobile Phone

Brand Redmi

Model 220233L2G

Report No. R2112A1138-R5

Issue Date January 20, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2020)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report.....	4
1.2. Test facility	4
1.3. Testing Location	4
2. General Description of Equipment under Test.....	5
2.1. Applicant and Manufacturer Information.....	5
2.2. General information.....	5
3. Applied Standards	6
4. Test Configuration	7
5. Test Case Results	8
5.1. Maximum output power	8
5.2. 99% Bandwidth and 6dB Bandwidth	10
5.3. Band Edge	14
5.4. Power Spectral Density	16
5.5. Spurious RF Conducted Emissions.....	20
5.6. Unwanted Emission	23
5.7. Conducted Emission	37
6. Main Test Instruments.....	40
ANNEX A: The EUT Appearance	42
ANNEX B: Test Setup Photos	43
ANNEX C: Product Change Description	44

Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Maximum conducted output power	15.247(b)(3)	PASS
2	6 dB bandwidth	15.247(a)(2)	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Unwanted Emissions	15.247(d),15.205,15.209	PASS
7	Conducted Emissions	15.207	PASS
Date of Testing: (Original) April 28, 2020 ~ June 1, 2020 (Variant) December 27, 2021~January 10, 2022			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

220233L2G (Report No.: R2112A1138-R5) is a variant model of M2006C3LG (Report No.: R2004A0237-R5). Test values partial duplicated from Original for variant. There is only verifying Maximum output power and test Unwanted Emission and Conducted Emission for variant in this report.

The Difference between M2006C3LG and 220233L2G refer to the following table:

Difference		M2006C3LG (Original)	220233L2G (Variant)
Rear Camera		13M	13M+2M
Finger Print Sensor		not support	support
RF PA Supplier	RF Part	RF band are same between 220233L2G RF PA and M2006C3LG RF PA.	
	RF SW Part	Modem has been changed to adjust PA used and bias. Calibration files have also been updated to improve GSM linearized character, WCDMA performance under extreme condition and LTE current consumption performance.	
	RF HW PART	There are no change of DRX Saw and Duplexer.	
		M2006C3LG RF PA: --TXM+PA --TXM—VC7916-53M --PA-- VC7643-62M	220233L2G RF PA: --TXM+PA --TXM—OM8816-62M --PA-- HS8443-61M
		There are no change of DRX Saw and Duplexer. Except of TXM and PA changes, The capacitance and inductance on the RF path also have some difference.	
Others	The same	The same	

The detailed product change description please refers to the Difference Declaration Letter.

1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

Applicant	Xiaomi Communications Co., Ltd.
Applicant address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer	Xiaomi Communications Co., Ltd.
Manufacturer address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

2.2. General information

EUT Description		
Model	220233L2G	
IMEI	Original (M2006C3LG)	IMEI 1: 863234040033848 IMEI 2: 863234040038441
	Variant (220233L2G)	IMEI 1: 862643060049503 IMEI 2: 862643060049511
Hardware Version	P2	
Software Version	MIUI 12.5	
Antenna Type	Fixed Internal Antenna	
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)	
Antenna Gain	Frequency(MHz)	Gain (dBi)
	2402	-1.1
	2441	0.4
	2480	0.5
Test Mode	Bluetooth V5.0 LE	
Modulation Type	BLE :GFSK	
Max. Conducted Power	BLE : -2.28 dBm	
Operating Frequency Range(s)	BLE: 2402 ~2480 MHz	
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.		

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15C (2020) Radio Frequency Devices

ANSI C63.10 (2013)

Reference standard:

KDB 558074 D01 15.247 Meas Guidance v05r02

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the loop antenna is vertical, the others are vertical and horizontal. and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Band	Data Rate
Bluetooth(Low Energy) V5.0	2Mbps
Bluetooth(Low Energy) V4.2	1Mbps

5. Test Case Results

5.1. Maximum output power


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to Power meter with a known loss. The EUT is max power transmission with proper modulation.

Test Setup



Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1W$ (30dBm)
----------------------	-------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

Test Results

BLE V4.2

Band	T _{on} (ms)	T _(on+off) (ms)	Duty cycle	Duty cycle correction Factor(dB)
BLE	2.13	2.50	0.852	0.696
Note: when Duty cycle>0.98, Duty cycle correction Factor not required.				

Network Standards	Carrier frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
Bluetooth (Low Energy)	2402	-4.35	-3.65	30	PASS
	2440	-3.03	-2.33	30	PASS
	2480	-5.16	-4.46	30	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					

BLE V5.0

Band	T _{on} (ms)	T _(on+off) (ms)	Duty cycle	Duty cycle correction Factor(dB)
BLE	1.07	1.87	0.572	2.425
Note: when Duty cycle>0.98, Duty cycle correction Factor not required.				

Network Standards	Carrier frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
Bluetooth (Low Energy)	2402	-6.05	-3.63	30	PASS
	2440	-4.70	-2.28	30	PASS
	2480	-6.78	-4.36	30	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					

5.2. 99% Bandwidth and 6dB Bandwidth

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer.
Dector=Peak, Trace mode=max hold.

The EUT was connected to the spectrum analyzer through a known loss cable. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.

Test Setup



Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

Test Results:

BLE V4.2

Network Standards	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
Bluetooth (Low Energy)	2402	1.0292	0.6655	500	PASS
	2440	1.0284	0.6654	500	PASS
	2480	1.0290	0.6648	500	PASS

BLE V5.0

Network Standards	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
Bluetooth (Low Energy)	2402	2.0604	1.167	500	PASS
	2440	2.0597	1.152	500	PASS
	2480	2.0615	1.168	500	PASS



99% bandwidth

BLE V4.2 Carrier frequency (MHz): 2402



BLE V5.0 Carrier frequency (MHz): 2402



BLE V4.2 Carrier frequency (MHz): 2440




BLE V5.0 Carrier frequency (MHz): 2440



BLE V4.2 Carrier frequency (MHz): 2480



BLE V5.0 Carrier frequency (MHz): 2480

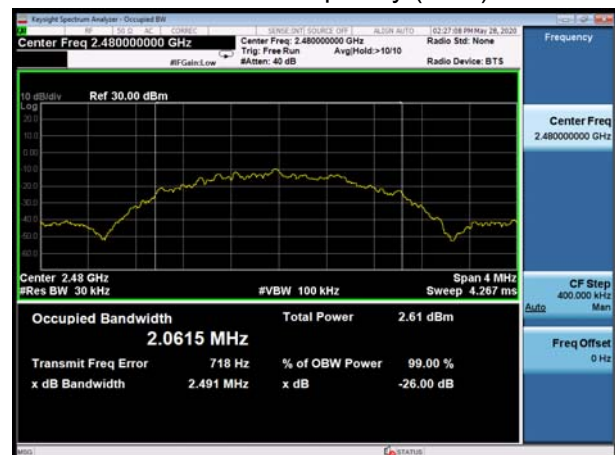



6 dB bandwidth

BLE V4.2 Carrier frequency (MHz): 2402



BLE V5.0 Carrier frequency (MHz): 2402



BLE V4.2 Carrier frequency (MHz): 2440




BLE V5.0 Carrier frequency (MHz): 2440



BLE V4.2 Carrier frequency (MHz): 2480



BLE V5.0 Carrier frequency (MHz): 2480

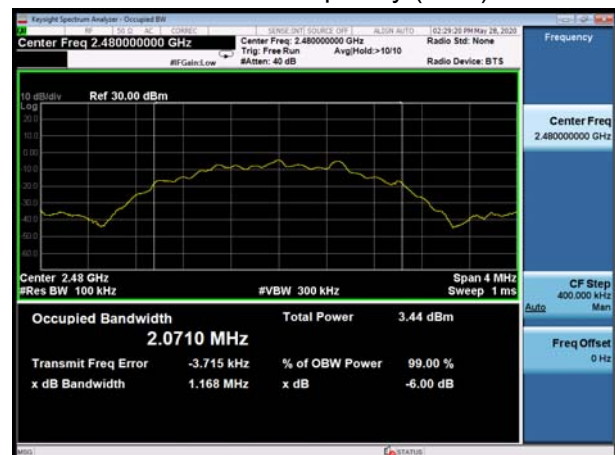

5.3. Band Edge


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup



Limits


Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
2GHz-3GHz	1.407 dB

Test Results: PASS

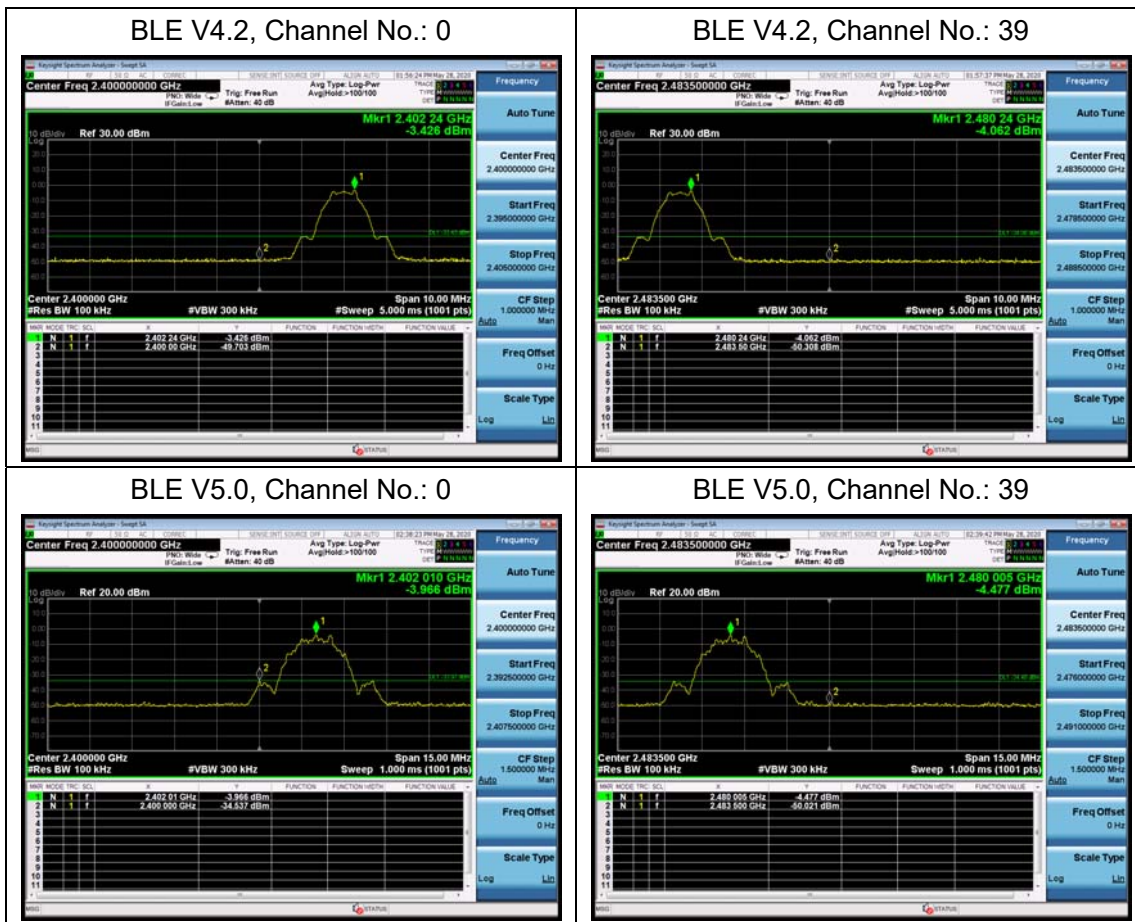

5.4. Power Spectral Density

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss.

The EUT is max power transmission with proper modulation.

Method AVGPSD-2 was used for this test.

- Measure the duty cycle(D)of the transmitter output signal as described in 11.6
- Set instrument center frequency to DTS channel center frequency
- Set span to at least 1.5 times the OBW
- Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{Kh}$
- Set VBW $\geq [3 \times \text{RBW}]$
- Detector= power averaging(rms) or sample detector (when rms not available)
- Ensure that the number of measurement points in the sweep $2[2 \times \text{span}/\text{RBW}]$
- Sweep time =auto couple
- Do not use sweep triggering; allow sweep to "free run"
- Employ trace averaging(rms) mode over a minimum of 100 traces
- Use the peak marker function to determine the maximum amplitude level
- Add $[10 \log(1/ D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time
- If measured value exceeds requirement specified by regulatory agency then reduce RBW(but o less than 3 kHz) and repeat(note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

Test setup



Limits

Rule Part 15.247(e) specifies that" For digitally modulated systems, the power spectral density



conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. "

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

Test Results:
BLE V4.2

Network Standards	Channel Number	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
Bluetooth (Low Energy)	0	-25.88	-25.18	8	PASS
	19	-24.66	-23.96	8	PASS
	39	-26.42	-25.73	8	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor

BLE V5.0


Network Standards	Channel Number	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
Bluetooth (Low Energy)	0	-29.93	-27.50	8	PASS
	19	-28.78	-26.35	8	PASS
	39	-29.89	-27.46	8	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor

BLE V4.2, Channel No.: 0




BLE V5.0, Channel No.: 0

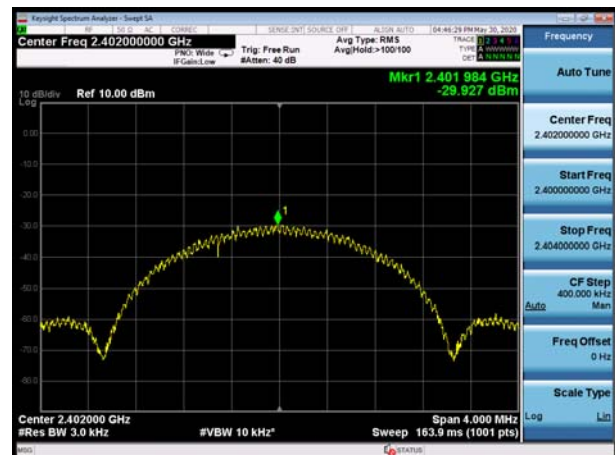

BLE V4.2, Channel No.: 19




BLE V5.0, Channel No.: 19

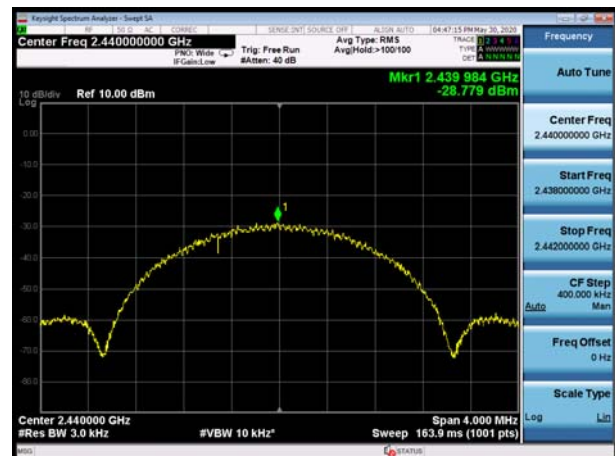

BLE V4.2, Channel No.: 39



BLE V5.0, Channel No.: 39

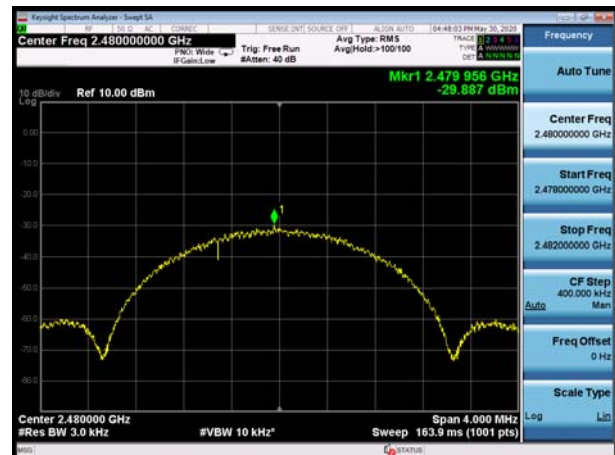

5.5. Spurious RF Conducted Emissions

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100 kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

Test setup



Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. ”

Network Standards	Carrier frequency (MHz)	Reference value (dBm)	Limit
Bluetooth V4.2 (Low Energy)	2402	-3.37	-33.37
	2440	-2.51	-32.51
	2480	-4.00	-34.00
Network Standards	Carrier frequency (MHz)	Reference value (dBm)	Limit
Bluetooth V5.0 (Low Energy)	2402	-4.31	-34.31
	2440	-5.47	-35.47
	2480	-4.41	-34.41

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is




with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB




Test Results:


BLE V4.2, Channel No.: 0

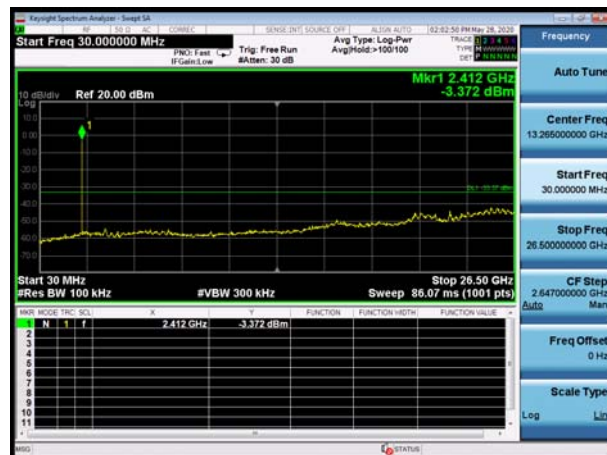


BLE V5.0, Channel No.: 0

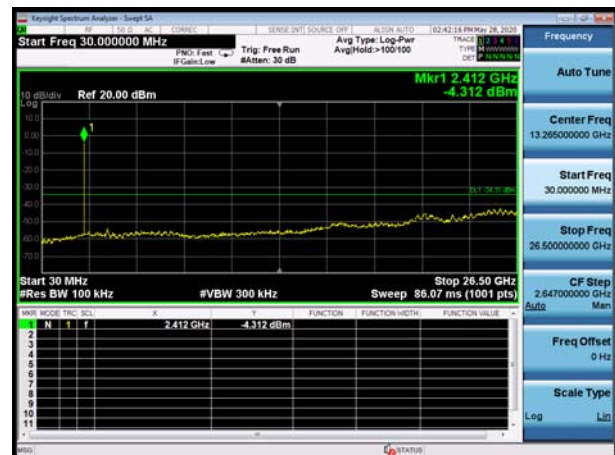


BLE V4.2, Channel No.: 19

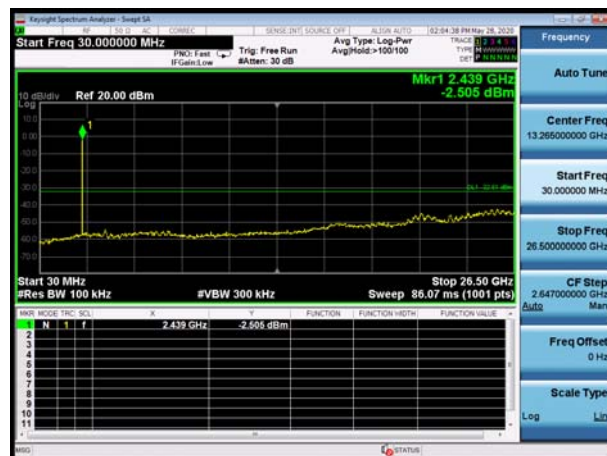


BLE V5.0, Channel No.: 19

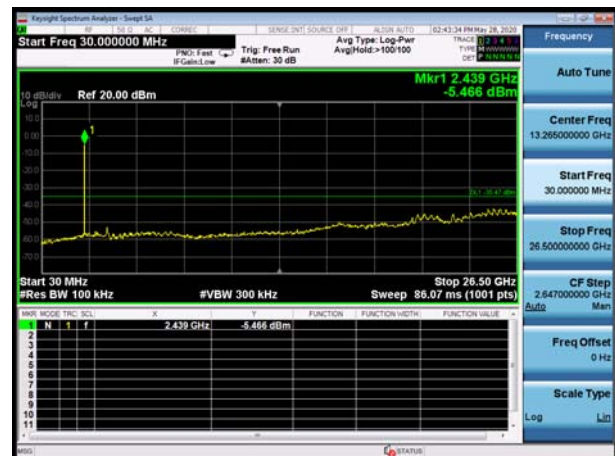

BLE V4.2, Channel No.: 39

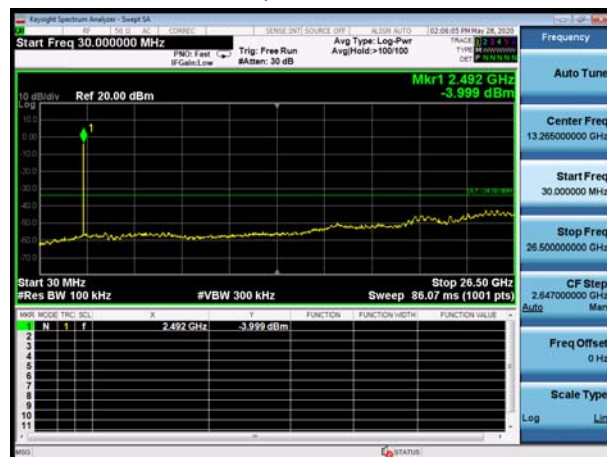

BLE V5.0, Channel No.: 39

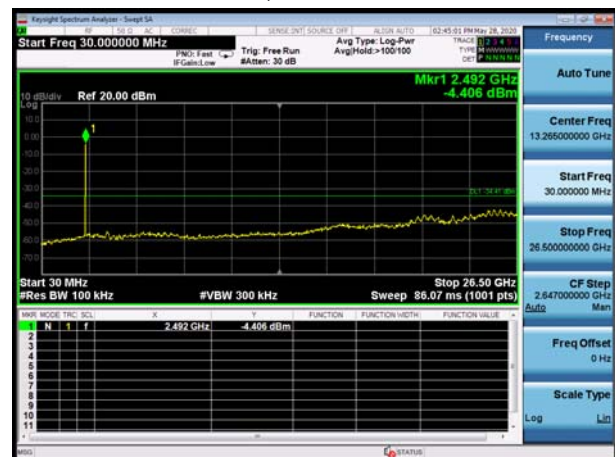

5.6. Unwanted Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10-2013.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage

averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.


2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.


The test is in transmitting mode.

Test setup


9KHz ~ 30MHz

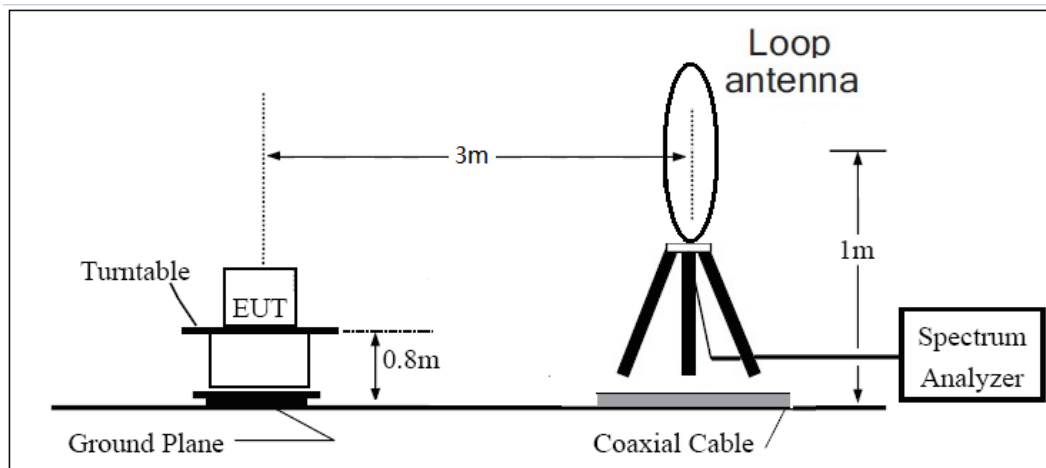

30MHz ~ 1GHz

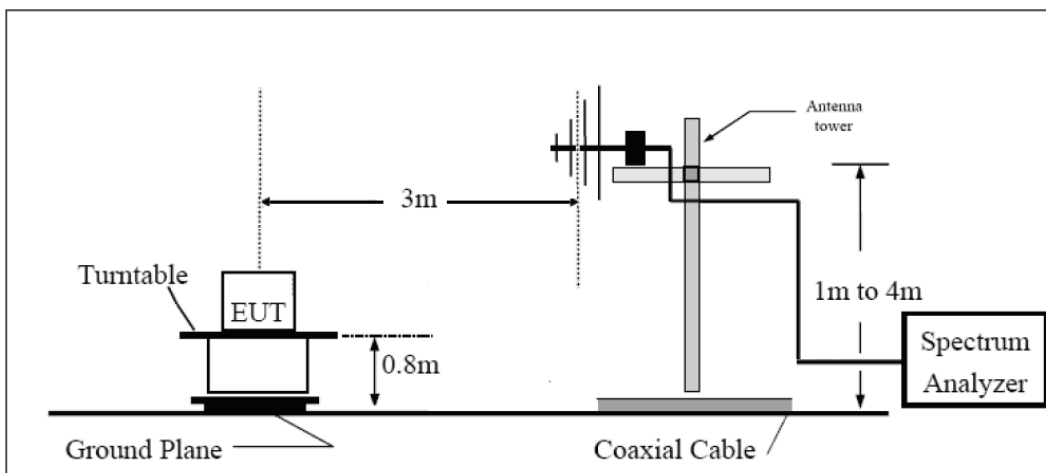

Above 1GHz

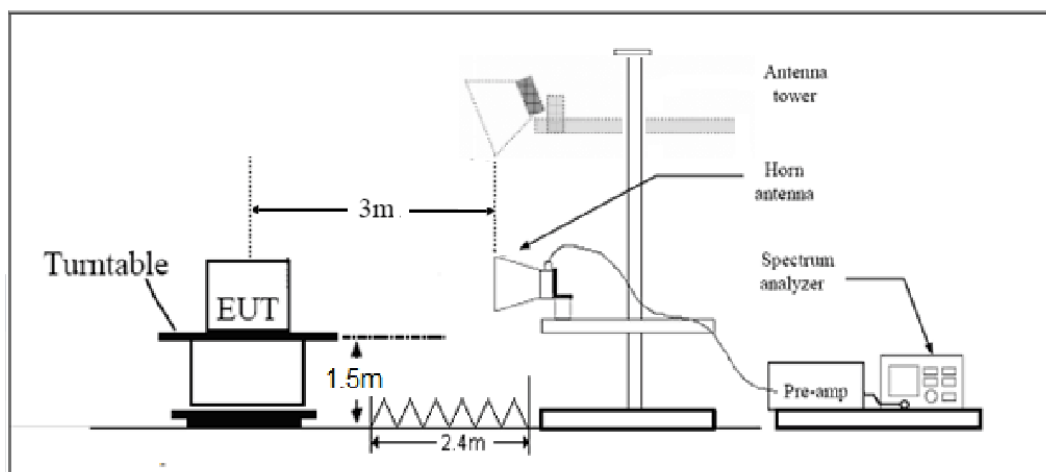

Note: Area side:2.4mX3.6m

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB

Test Results:


During the test, the Radiates Emission was performed in all modes, BLE-1M was selected as the worst condition. The test data of the worst-case condition was recorded in this report.

The signal beyond the limit is carrier.

A font (Level in dB_{μV/m}) in the test plot =(level in dB μ V/m)

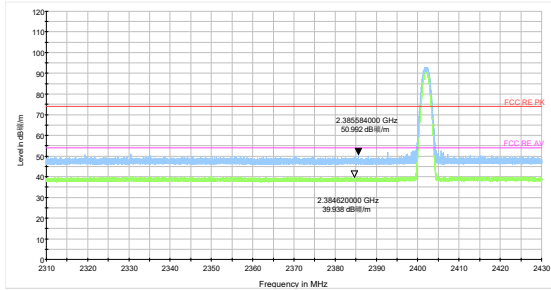

BLE Channel 0 Peak & Average

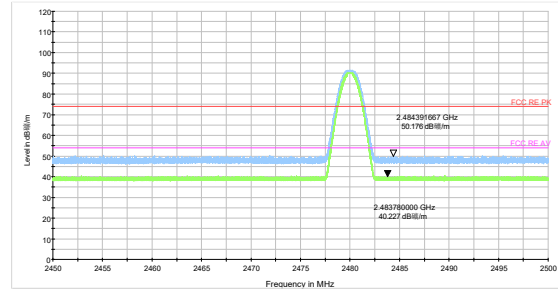

BLE Channel 39 Peak & Average

Result of RE

Test result


Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9 kHz-30MHz and 18GHz-26.5GHz are more than 20dB below the limit are not reported.

A font (Level in dB μ V/m) in the test plot =(level in dB μ V/m)

The following graphs display the maximum values of horizontal and vertical by software.
For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, BLE-Channel 39 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Continuous TX mode:

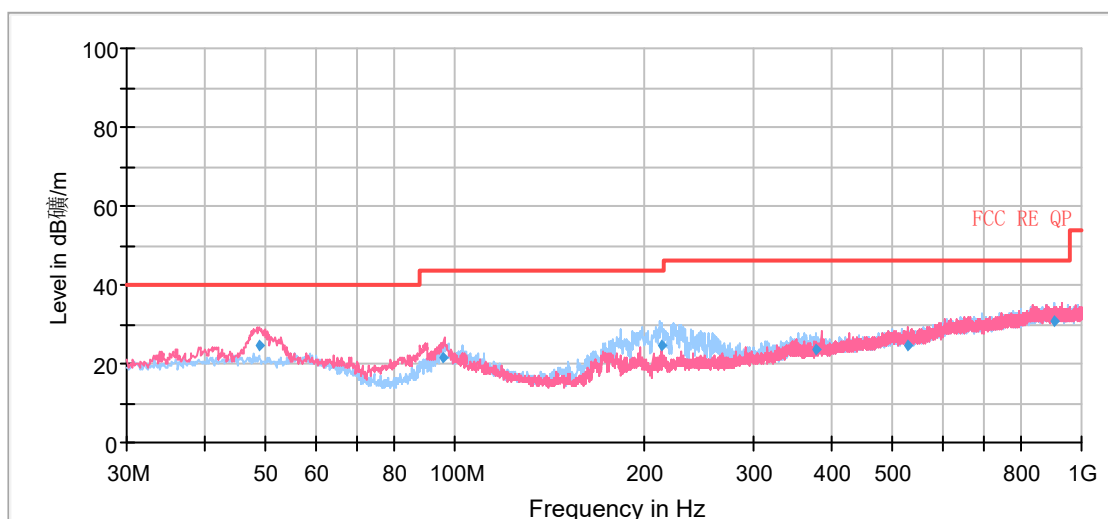

Radiates Emission from 30MHz to 1GHz


Frequency (MHz)	Quasi-Peak (dB μ V/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dB μ V/m)
48.833750	24.79	100.0	V	334.0	14	15.21	40.00
95.927500	21.68	100.0	V	311.0	12	21.82	43.50
214.086250	24.62	125.0	H	264.0	12	18.88	43.50
377.821250	23.63	100.0	H	64.0	17	22.37	46.00
528.982500	24.73	105.0	V	0.0	20	21.27	46.00
907.683750	30.70	100.0	H	94.0	25	15.30	46.00

Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)


2. Margin = Limit – Quasi-Peak

During the test, the Radiates Emission from 1GHz to 18GHz was performed in all modes, BLE-1M was selected as the worst condition. The test data of the worst-case condition was recorded in this report.

BLE-Channel 0

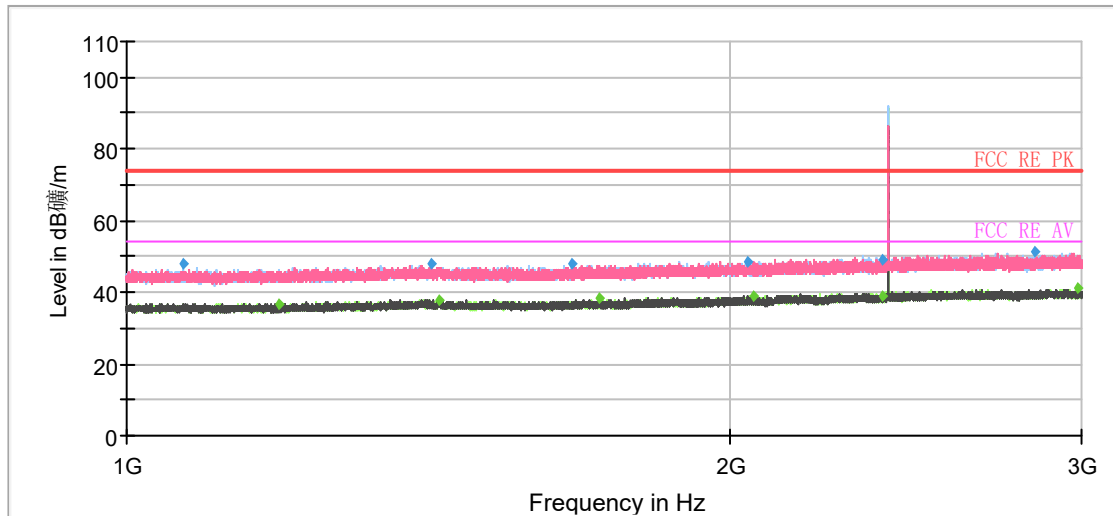

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

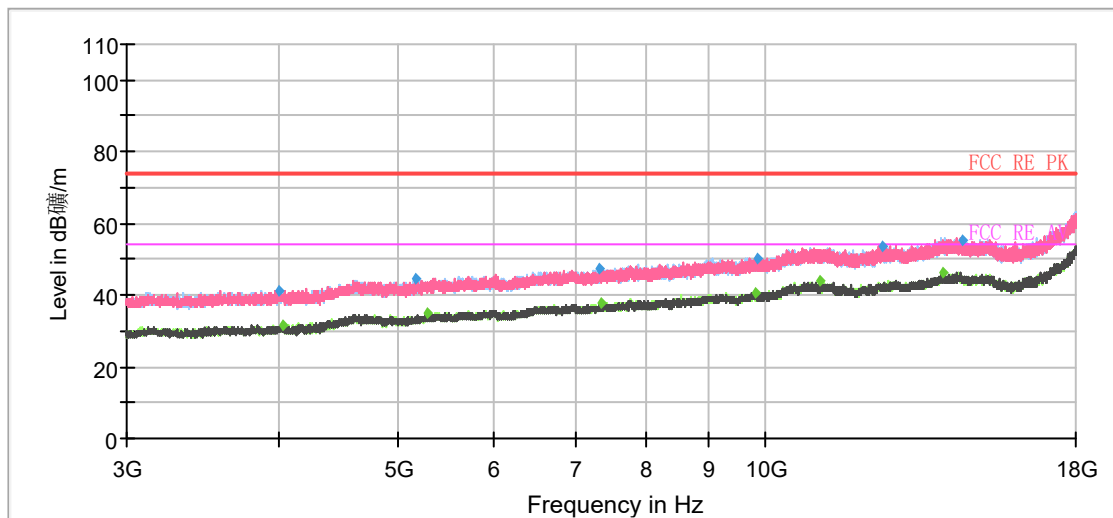


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1067.066667	47.98	---	74.00	26.02	100.0	H	283.0	-9
1190.466667	---	36.78	54.00	17.22	200.0	V	5.0	-9
1420.333333	47.68	---	74.00	26.32	100.0	H	203.0	-7
1432.066667	---	37.83	54.00	16.17	200.0	V	85.0	-7
1667.666667	47.68	---	74.00	26.32	200.0	H	356.0	-6
1723.800000	---	38.22	54.00	15.78	100.0	H	36.0	-6
2042.866667	48.39	---	74.00	25.61	200.0	V	12.0	-5
2056.866667	---	38.98	54.00	15.02	200.0	V	163.0	-5
2386.533333	---	39.04	54.00	14.96	100.0	V	312.0	-4
2387.800000	49.03	---	74.00	24.97	100.0	H	74.0	-4
2839.533333	51.05	---	74.00	22.95	100.0	H	36.0	-3
2988.200000	---	40.94	54.00	13.06	200.0	H	81.0	-3


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

BLE-Channel 19

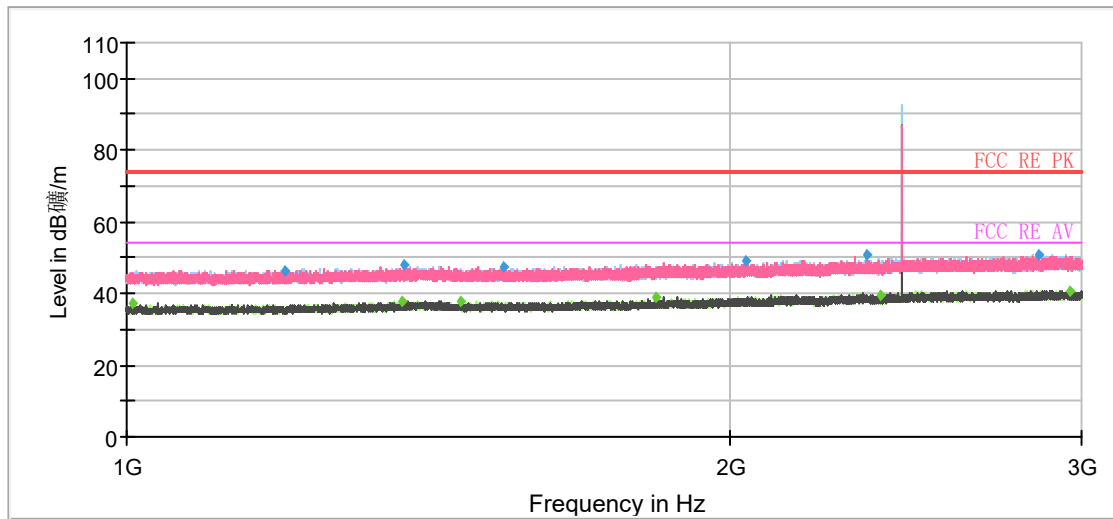

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

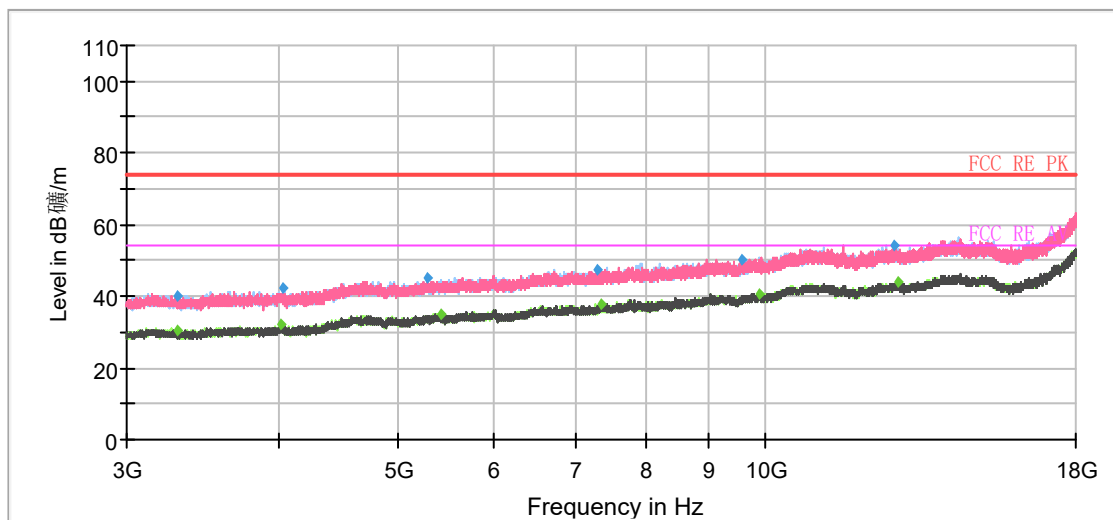


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1006.066667	---	37.06	54.00	16.94	100.0	V	338.0	-10
1200.600000	46.49	---	74.00	27.51	100.0	V	0.0	-9
1371.266667	---	38.03	54.00	15.97	100.0	H	61.0	-7
1374.466667	48.18	---	74.00	25.82	100.0	V	302.0	-7
1469.466667	---	37.91	54.00	16.09	200.0	V	257.0	-7
1542.133333	47.39	---	74.00	26.61	200.0	H	329.0	-7
1839.866667	---	38.94	54.00	15.06	100.0	H	110.0	-6
2040.600000	48.80	---	74.00	25.20	200.0	H	227.0	-5
2343.133333	50.52	---	74.00	23.48	100.0	V	9.0	-4
2382.666667	---	39.23	54.00	14.77	200.0	V	74.0	-4
2854.400000	50.76	---	74.00	23.24	100.0	V	338.0	-3
2958.066667	---	40.71	54.00	13.29	100.0	H	74.0	-3


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

BLE-Channel 39

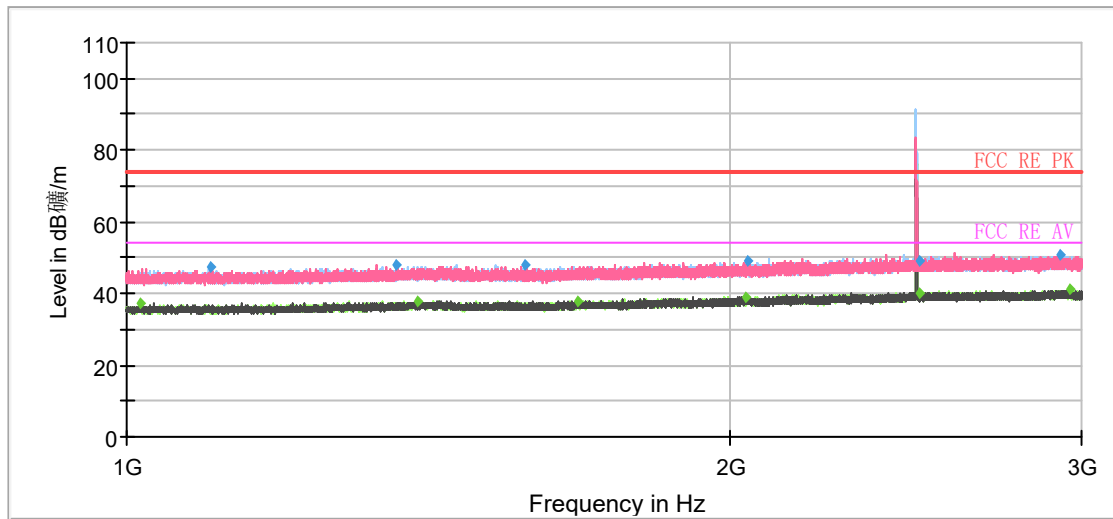

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

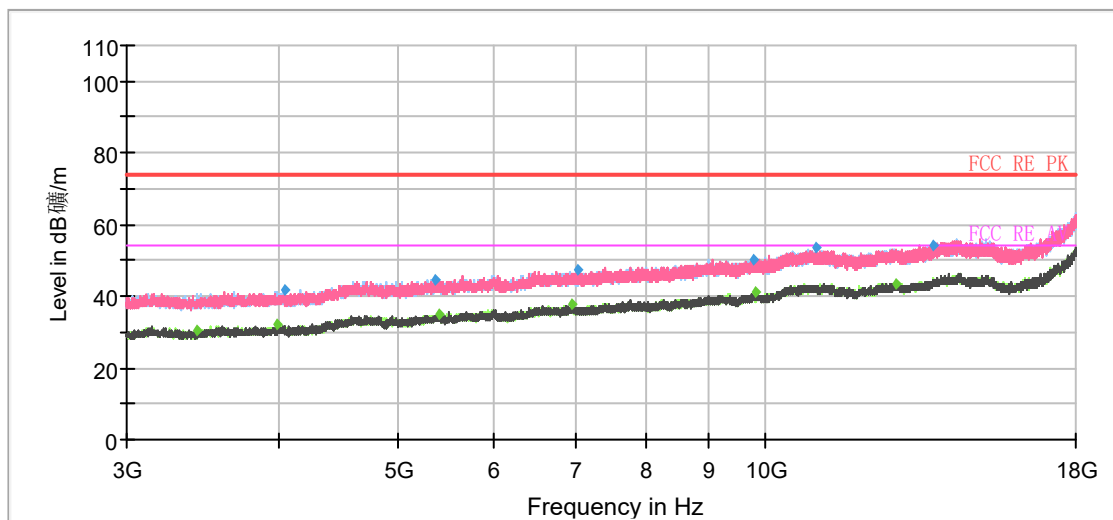


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1015.733333	---	37.34	54.00	16.66	100.0	H	14.0	-10
1100.733333	47.10	---	74.00	26.90	100.0	V	104.0	-9
1363.800000	48.05	---	74.00	25.95	100.0	H	22.0	-7
1398.466667	---	37.97	54.00	16.03	200.0	H	159.0	-7
1580.533333	48.18	---	74.00	25.82	100.0	H	123.0	-6
1678.866667	---	37.95	54.00	16.05	200.0	H	184.0	-6
2036.466667	---	38.94	54.00	15.06	100.0	V	91.0	-5
2043.000000	49.01	---	74.00	24.99	100.0	H	22.0	-5
2490.800000	49.13	---	74.00	24.87	200.0	V	0.0	-4
2491.933333	---	40.21	54.00	13.79	200.0	H	26.0	-4
2925.533333	50.56	---	74.00	23.44	200.0	V	217.0	-3
2962.266667	---	41.13	54.00	12.87	100.0	H	22.0	-3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

During the test, the Radiates Emission from 18GHz to 26.5GHz was performed in all modes with all channels, BLE-Channel 39 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

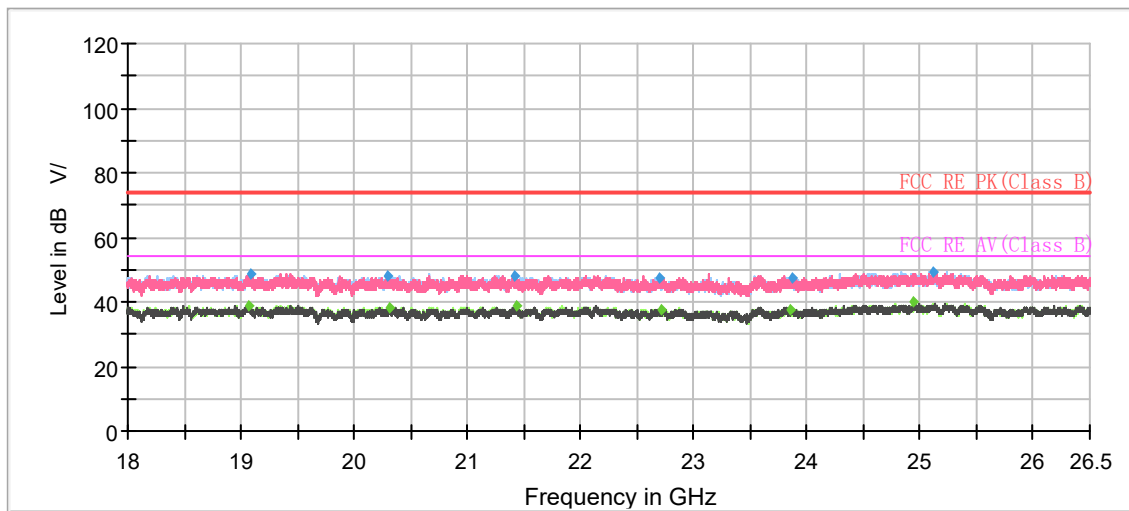

Radiates Emission from 18GHz to 26.5GHz

5.7. Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

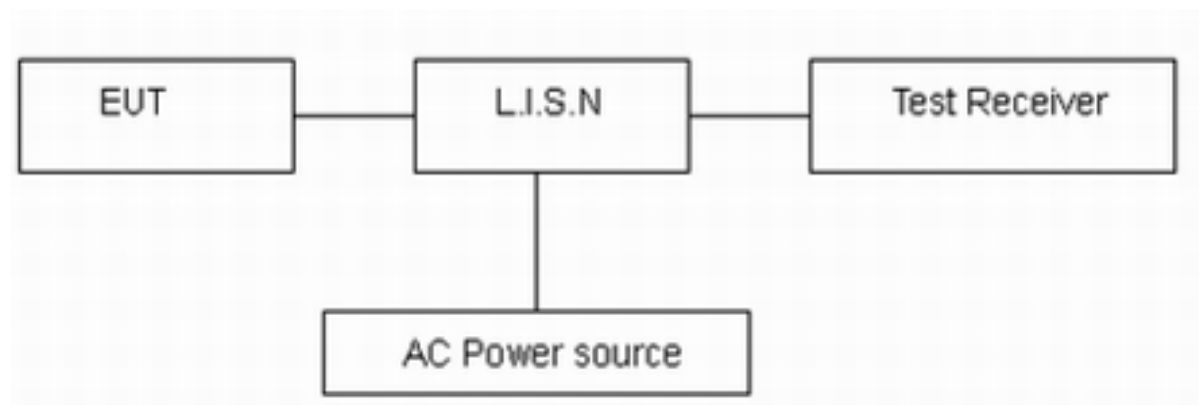

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

*: Decreases with the logarithm of the frequency.


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

Test Results:

Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes (BLE) with all channels, BLE-Channel 39 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.


A font (Level in dB μ V/m) in the test plot =(level in dB μ V/m)

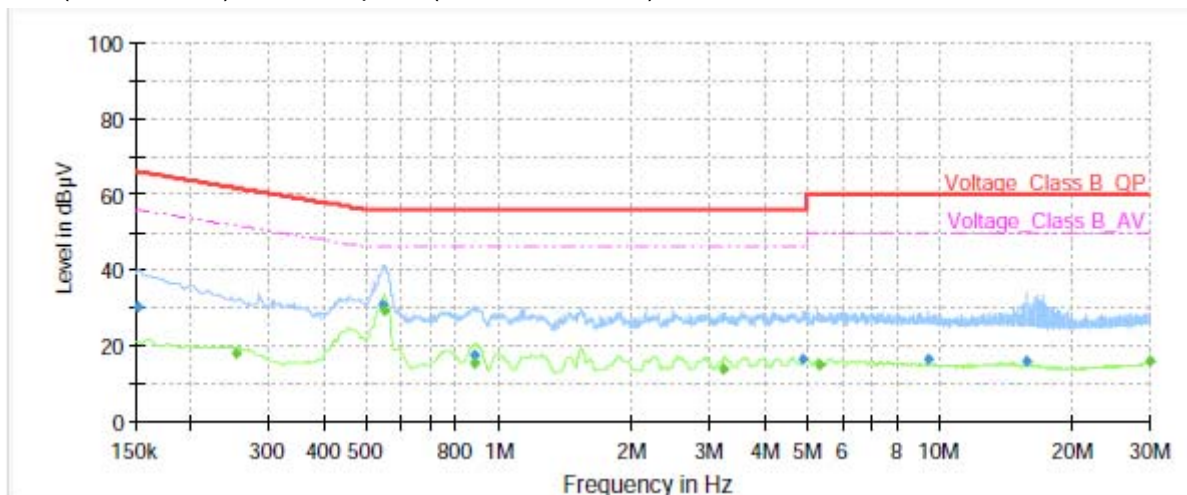

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.15	30.41	---	65.88	35.47	70.0	9.000	L1	ON	21
0.25	---	17.93	51.64	33.71	70.0	9.000	L1	ON	21
0.55	31.01	---	56.00	24.99	70.0	9.000	L1	ON	20
0.55	---	29.09	46.00	16.91	70.0	9.000	L1	ON	20
0.88	17.42	---	56.00	38.58	70.0	9.000	L1	ON	20
0.88	---	15.37	46.00	30.63	70.0	9.000	L1	ON	20
3.25	---	13.73	46.00	32.27	70.0	9.000	L1	ON	19
4.92	16.25	---	56.00	39.75	70.0	9.000	L1	ON	19
5.32	---	14.88	50.00	35.12	70.0	9.000	L1	ON	19
9.44	16.38	---	60.00	43.62	70.0	9.000	L1	ON	20
15.80	16.07	---	60.00	43.93	70.0	9.000	L1	ON	20
29.97	---	15.64	50.00	34.36	70.0	9.000	L1	ON	20

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 KHz to 30 MHz

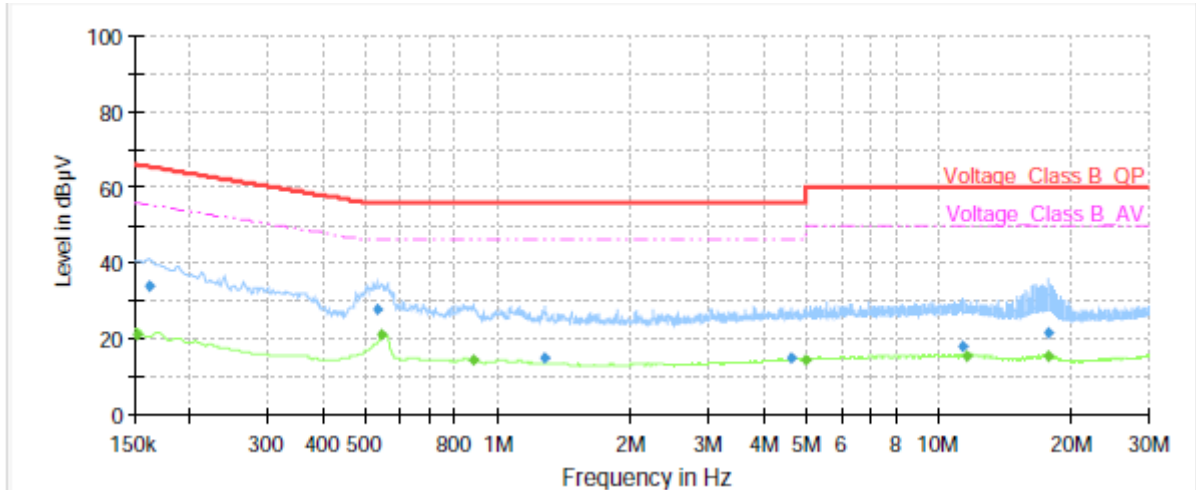

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.15	---	21.01	55.88	34.87	70.0	9.000	N	ON	21
0.16	33.96	---	65.40	31.44	70.0	9.000	N	ON	21
0.53	27.65	---	56.00	28.35	70.0	9.000	N	ON	20
0.55	---	20.95	46.00	25.05	70.0	9.000	N	ON	20
0.88	---	14.59	46.00	31.41	70.0	9.000	N	ON	20
1.28	14.84	---	56.00	41.16	70.0	9.000	N	ON	20
4.62	15.12	---	56.00	40.88	70.0	9.000	N	ON	19
5.00	---	14.32	46.00	31.68	70.0	9.000	N	ON	19
11.29	18.04	---	60.00	41.96	70.0	9.000	N	ON	20
11.56	---	15.51	50.00	34.49	70.0	9.000	N	ON	20
17.75	21.38	---	60.00	38.62	70.0	9.000	N	ON	20
17.84	---	15.23	50.00	34.77	70.0	9.000	N	ON	20

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz

6. Main Test Instruments

Original: April 28, 2020 ~ June 1, 2020

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Spectrum Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
EMI Test Receiver	R&S	ESCI	100948	2019-05-19	2020-05-18
EMI Test Receiver	R&S	ESCI	100948	2020-05-18	2021-05-17
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-201	2017-11-18	2020-11-17
Double Ridged Waveguide Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Standard Gain Horn	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
EMI Test Receiver	R&S	ESR	101667	2019-05-19	2020-05-18
EMI Test Receiver	R&S	ESR	101667	2020-05-18	2021-05-17
LISN	R&S	ENV216	101171	2018-12-15	2021-12-14
Spectrum Analyzer	Agilent	N9010A	MY47191109	2019-05-19	2020-05-18
Spectrum Analyzer	Agilent	N9010A	MY47191109	2020-05-18	2021-05-17
Power Meter	R&S	NRP2	104306	2019-05-19	2020-05-18
Power Meter	R&S	NRP2	104306	2020-05-18	2021-05-17
Power Sensor	R&S	NRP-Z21	104799	2019-05-19	2020-05-18
Power Sensor	R&S	NRP-Z21	104799	2020-05-18	2021-05-17
20dB Attenuator	Star River Highlight	UCL-TS2S-20	18013001	2019-12-15	2020-12-14
RF Cable	Agilent	SMA 15cm	0001	2019-12-13	2020-06-12
Software	R&S	EMC32	9.26.0	/	/



Variant: December 27, 2021~January 10, 2022

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Spectrum Analyzer	R&S	FSV30	103591	2021-05-15	2022-05-14
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	391	2019-12-16	2021-12-15
Double Ridged Waveguide Horn Antenna	Schwarzbeck	BBHA 9120D	430	2018-07-07	2023-07-06
EMI Test Receiver	R&S	ESR	102389	2021-12-13	2022-12-12
EMI Test Receiver	R&S	ESR	101667	2021-05-15	2022-05-14
LISN	R&S	ENV216	101171	2020-12-13	2022-12-12
Software	R&S	EMC32	9.26.01	/	/



ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.



ANNEX C: Product Change Description

The Product Change Description are submitted separately.

*******END OF REPORT *******