



RF TEST REPORT

Applicant Xiaomi Communications Co., Ltd.
FCC ID 2AFZZC3LG
Product Mobile Phone
Brand Redmi
Model M2006C3LG
Report No. R2004A0237-R1
Issue Date June 8, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR 47 Part 22H (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report	4
1.2. Test facility	4
1.3. Testing Location	4
2. General Description of Equipment under Test	5
2.3. Applicant and Manufacturer Information	5
2.4. General Information	5
3. Applied Standards	7
4. Test Configuration	8
5. Test Case Results	10
5.1. RF Power Output and Effective Radiated Power	10
5.2. Occupied Bandwidth	15
5.3. Band Edge Compliance	24
5.4. Peak-to-Average Power Ratio (PAPR)	32
5.5. Frequency Stability	35
5.6. Spurious Emissions at Antenna Terminals	40
5.7. Radiates Spurious Emission	46
6. Main Test Instruments	52

Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Radiated Power	2.1046 22.913(a)(5)	PASS
2	Occupied Bandwidth	2.1049	PASS
3	Band Edge Compliance	2.1051 / 22.917(a)	PASS
4	Peak-to-Average Power Ratio	22.913(d)/ KDB 971168 D01(5.7)	PASS
5	Frequency Stability	2.1055 / 22.355	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
7	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS

Date of Testing: April 28, 2020 ~ June 1, 2020

Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.



1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

2.3. Applicant and Manufacturer Information

Applicant	Xiaomi Communications Co., Ltd.
Applicant address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer	Xiaomi Communications Co., Ltd.
Manufacturer address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

2.4. General Information

EUT Description		
Model	M2006C3LG	
IMEI	IMEI 1:863234040033848 IMEI 2:863234040038441	
Hardware Version	P2	
Software Version	MIUI 12	
Power Supply	Battery/AC adapter	
Antenna Type	PIFA Antenna	
Antenna Gain	Frequency(MHz)	Gain (dBi)
	820	-3.98
	840	-3.42
	860	-3.04
Test Mode(s)	GSM 850; WCDMA Band V;LTE Band 5;	
Test Modulation	(GSM)GMSK,8PSK; (WCDMA) BPSK, QPSK,16QAM; (LTE)QPSK 16QAM;	
GPRS Multislot Class	33	
EGPRS Multislot Class	33	
HSDPA UE Category	24	
HSUPA UE Category	7	
DC-HSDPA UE Category	7	
HSPA+ UE Category	7	
LTE Category	4	
Maximum E.R.P.	GSM 850:	26.8dBm
	WCDMA Band V:	17.5dBm
	LTE Band 5:	17.56dBm
Rated Power Supply Voltage	3.85V	
Extreme Voltage	Minimum: 3.6V Maximum: 4.4V	
Extreme Temperature	Lowest: 0°C Highest: +40°C	



Operating Frequency Range(s)		Band	Tx (MHz)	Rx (MHz)
		GSM850	824 ~ 849	869 ~ 894
		WCDMA Band V	824 ~ 849	869 ~ 894
		LTE Band 5	824 ~ 849	869 ~ 894
EUT Accessory				
Battery		Manufacturer: Dongguan NVT Technology Co., Ltd Model: BN56 Power Rating: 3.85Vdc, 4900mAh Type: Li-ion, Y		
Adapter 1		Manufacturer: DONGGUAN AOHA POWER TECHNOLOGY CO., LTD. Model: MDY-09-EQ Power Rating: I/P:100-240 Vac, 0.35 A, O/P: 5Vdc,2A		
Adapter 2		Manufacturer: Jiangsu Chenyang Electron Co., Ltd. Model: MDY-09-EQ Power Rating: I/P:100-240 Vac, 0.35 A, O/P: 5Vdc,2A		
USB Cable		Manufacturer: Shenzhen Dokocom Energy Technology Co., Ltd. Model: H52210 0.8 meter, non-shielded cable, with w/o ferrite core		
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant. 2. There is more than one Adapter, each one should be applied throughout the compliance test respectively, and however, only the worst case (Adapter 1) will be recorded in this report.				

Item	Configure 1	Configure 2
Software	The same	The same
Hardware	The same	The same
SIM card slot	The same	The same
Components on PCB	WIFI RF Connect	WIFI RF Connect Change to 0 Ω resistance
Other	The same	The same
Note: Customer declaration, two configures is the same, except for Components on PCB. There are more than one Configure, each one should be applied throughout the compliance test respectively, however, only the worst case (Configure 1) will be recorded in this report.		



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 22H (2019)

ANSI C63.26 (2015)

Reference standard:

FCC CFR47 Part 2 (2019)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

There is more than one SIM card slot, each one should be applied throughout the compliance test respectively, and however, only the worst case (SIM 1) will be recorded in this report.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions were investigated. Subsequently, only the worst case emissions are reported.

The following testing in GSM/WCDMA/LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation	
	GSM 850	WCDMA Band V
RF Power Output and Effective Radiated power	GSM GPRS EGPRS	RMC HSDPA/HSUPA DC-HSDPA/HSPA+
Occupied Bandwidth	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Band Edge Compliance	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Peak-to-Average Power Ratio	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Frequency Stability	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Spurious Emissions at Antenna Terminals	GSM	RMC
Radiates Spurious Emission	GSM	RMC

Test modes are chosen as the worst case configuration below for LTE Band 5.

Test items	Bandwidth (MHz)				Modulation		RB			Test Channel		
	1.4	3	5	10	QPSK	16QAM	1	50%	100%	L	M	H
RF power output and Effective Radiated power	O	O	O	O	O	O	O	O	O	O	O	O



Occupied Bandwidth	O	O	O	O	O	O	-	-	O	-	O	-
Band Edge Compliance	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	O	O	O	O	O	O	O
Spurious Emissions at Antenna Terminals	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	O	-	O	O	O	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.											

5. Test Case Results

5.1. RF Power Output and Effective Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).

a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.

b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).

c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.

d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$

e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$

f) The maximum ERP is the maximum value determined in the preceding step.

g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:


$$EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$$

where: dBd refers to gain relative to an ideal dipole.


$$EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test Setup

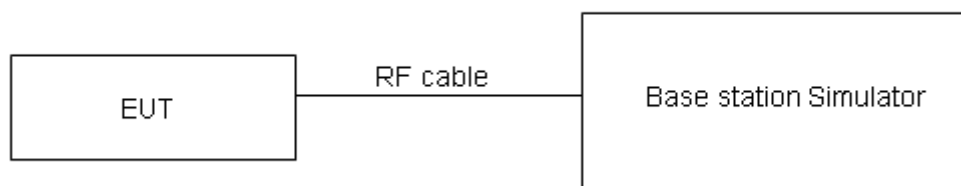

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

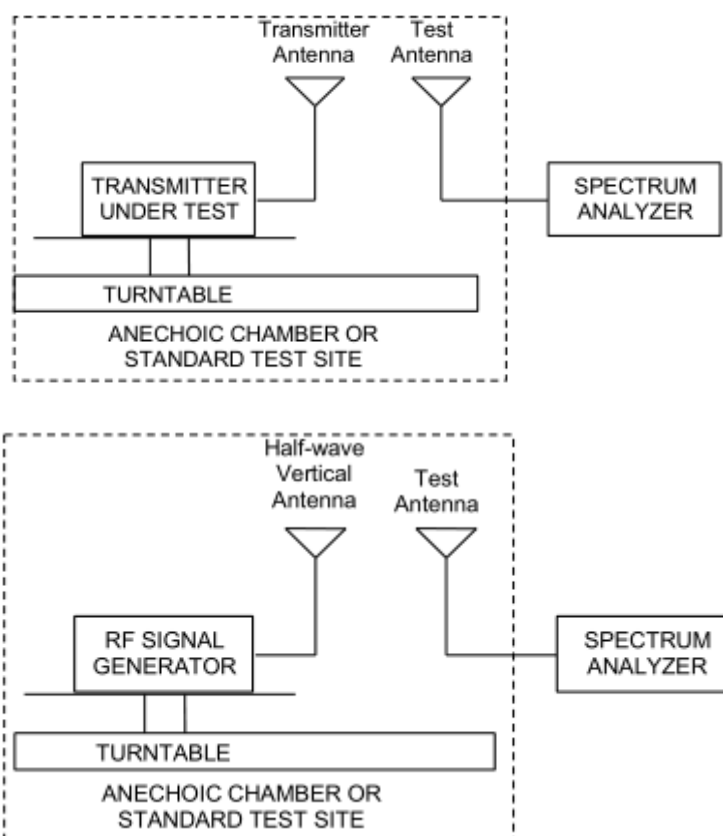

Limits

No specific RF power output requirements in part 2.1046.

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	$\leq 7 \text{ W}$ (38.45 dBm)
-------	--------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4 \text{ dB}$ for RF power output, $k = 2$, $U = 1.19 \text{ dB}$ for ERP .

Test Results

GSM 850		Conducted Power (dBm)			ERP (dBm)		
		Channel 128	Channel 190	Channel 251	Channel 128	Channel 190	Channel 251
		824.2 (MHz)	836.6 (MHz)	848.8 (MHz)	824.2 (MHz)	836.6 (MHz)	848.8 (MHz)
GSM	Results	32.37	32.34	32.29	26.80	26.77	26.72
GPRS/EGPRS (GMSK)	1TXslot	32.35	32.36	32.29	26.78	26.79	26.72
	2TXslots	30.80	30.77	30.73	25.23	25.20	25.16
	3TXslots	28.72	28.70	28.63	23.15	23.13	23.06
	4TXslots	27.65	27.61	27.57	22.08	22.04	22.00
EGPRS (8PSK)	1TXslot	27.24	27.25	27.26	21.67	21.68	21.69
	2TXslots	25.73	25.61	25.79	20.16	20.04	20.22
	3TXslots	23.09	23.18	23.59	17.52	17.61	18.02
	4TXslots	22.60	22.68	23.01	17.03	17.11	17.44

WCDMA Band V		Conducted Power (dBm)			ERP (dBm)		
		Channel 4132	Channel 4183	Channel 4233	Channel 4132	Channel 4183	Channel 4233
		826.4 (MHz)	836.6 (MHz)	846.6 (MHz)	826.4 (MHz)	836.6 (MHz)	846.6 (MHz)
RMC	12.2k	23.02	23.01	23.07	17.45	17.44	17.50
AMR	12.2k	22.92	22.92	22.94	17.35	17.35	17.37
HSDPA	Sub - Test 1	21.44	21.43	21.49	15.87	15.86	15.92
	Sub - Test 2	21.43	21.42	21.48	15.86	15.85	15.91
	Sub - Test 3	21.42	21.41	21.47	15.85	15.84	15.90
	Sub - Test 4	21.41	21.40	21.46	15.84	15.83	15.89
HSUPA	Sub - Test 1	19.90	19.89	19.95	14.33	14.32	14.38
	Sub - Test 2	19.89	19.88	19.94	14.32	14.31	14.37
	Sub - Test 3	20.87	20.87	20.93	15.30	15.30	15.36
	Sub - Test 4	19.86	19.86	19.92	14.29	14.29	14.35
	Sub - Test 5	20.85	20.85	20.91	15.28	15.28	15.34
DC-HSDPA	Sub - Test 1	21.36	21.37	21.41	15.79	15.80	15.84
	Sub - Test 2	21.35	21.36	21.40	15.78	15.79	15.83
	Sub - Test 3	21.43	21.35	21.41	15.86	15.78	15.84
	Sub - Test 4	21.42	21.34	21.40	15.85	15.77	15.83
HSPA+	16QAM	21.91	21.92	21.97	16.34	16.35	16.40



LTE Band 5				Conducted Power(dBm)			ERP (dBm)		
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				20407 /824.7	20525 /836.5	20643 /848.3	20407 /824.7	20525 /836.5	20643 /848.3
1.4MHz	QPSK	1	0	22.82	22.92	22.78	17.25	17.35	17.21
		1	2	22.96	22.98	22.84	17.39	17.41	17.27
		1	5	22.84	22.86	22.87	17.27	17.29	17.30
		3	0	22.94	23.06	23.04	17.37	17.49	17.47
		3	2	22.94	23.13	22.99	17.37	17.56	17.42
		3	3	22.90	23.09	22.98	17.33	17.52	17.41
		6	0	22.08	22.14	22.08	16.51	16.57	16.51
	16QAM	1	0	21.94	22.06	22.10	16.37	16.49	16.53
		1	2	21.92	22.07	22.14	16.35	16.50	16.57
		1	5	22.09	22.00	22.20	16.52	16.43	16.63
		3	0	21.99	22.05	21.89	16.42	16.48	16.32
		3	2	21.98	22.05	22.03	16.41	16.48	16.46
		3	3	21.94	22.00	21.86	16.37	16.43	16.29
		6	0	20.96	21.11	21.07	15.39	15.54	15.50
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				20415 /825.5	20525 /836.5	20635 /847.5	20415 /825.5	20525 /836.5	20635 /847.5
3MHz	QPSK	1	0	22.84	22.96	22.81	17.27	17.39	17.24
		1	7	22.94	23.01	22.88	17.37	17.44	17.31
		1	14	22.87	22.91	22.91	17.30	17.34	17.34
		8	0	22.04	22.18	22.17	16.47	16.61	16.60
		8	4	22.06	22.23	22.11	16.49	16.66	16.54
		8	7	22.00	22.20	22.08	16.43	16.63	16.51
		15	0	22.08	22.18	22.11	16.51	16.61	16.54
	16QAM	1	0	21.97	22.08	22.13	16.40	16.51	16.56
		1	7	21.95	22.07	22.18	16.38	16.50	16.61
		1	14	22.11	22.04	22.23	16.54	16.47	16.66
		8	0	21.10	21.18	21.01	15.53	15.61	15.44
		8	4	21.09	21.18	21.15	15.52	15.61	15.58
		8	7	21.04	21.12	20.99	15.47	15.55	15.42
		15	0	20.99	21.15	21.10	15.42	15.58	15.53
BW	Modulation	RB	RB	Channel/Frequency(MHz)					



	n	size	offset	20425 /826.5	20525 /836.5	20625 /846.5	20425 /826.5	20525 /836.5	20625 /846.5
5MHz	QPSK	1	0	22.81	22.94	22.77	17.24	17.37	17.20
		1	13	22.92	22.97	22.85	17.35	17.40	17.28
		1	24	22.84	22.86	22.87	17.27	17.29	17.30
		12	0	22.01	22.13	22.13	16.44	16.56	16.56
		12	6	22.04	22.19	22.06	16.47	16.62	16.49
		12	13	21.98	22.18	22.04	16.41	16.61	16.47
		25	0	22.08	22.17	22.09	16.51	16.60	16.52
	16QAM	1	0	21.94	22.04	22.10	16.37	16.47	16.53
		1	13	21.92	22.05	22.15	16.35	16.48	16.58
		1	24	22.08	22.02	22.19	16.51	16.45	16.62
		12	0	21.08	21.14	20.98	15.51	15.57	15.41
		12	6	21.06	21.13	21.11	15.49	15.56	15.54
		12	13	21.01	21.07	20.95	15.44	15.50	15.38
		25	0	20.97	21.11	21.05	15.40	15.54	15.48
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				20450 /829	20525 /836.5	20600 /844	20450 /829	20525 /836.5	20600 /844
10MHz	QPSK	1	0	22.79	22.87	22.75	17.22	17.30	17.18
		1	25	22.92	22.97	22.84	17.35	17.40	17.27
		1	49	22.81	22.84	22.83	17.24	17.27	17.26
		25	0	21.99	22.09	22.10	16.42	16.52	16.53
		25	13	22.02	22.15	22.03	16.45	16.58	16.46
		25	25	21.94	22.14	22.01	16.37	16.57	16.44
		50	0	22.07	22.10	22.04	16.50	16.53	16.47
	16QAM	1	0	22.09	22.01	22.05	16.52	16.44	16.48
		1	25	21.89	22.04	22.12	16.32	16.47	16.55
		1	49	22.06	21.97	22.17	16.49	16.40	16.60
		25	0	21.05	21.13	20.96	15.48	15.56	15.39
		25	13	21.02	21.10	21.07	15.45	15.53	15.50
		25	25	20.99	21.03	20.92	15.42	15.46	15.35
		50	0	20.95	21.07	21.02	15.38	15.50	15.45

5.2. Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 3kHz, VBW is set to 10kHz for GSM 850,

RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band V,

RBW is set to 30 kHz, VBW is set to 91kHz for LTE Band 5 (1.4MHz),


RBW is set to 62 kHz, VBW is set to 180kHz for LTE Band 5 (3MHz),

RBW is set to 100 kHz, VBW is set to 300kHz for LTE Band 5 (5MHz),

RBW is set to 200 kHz, VBW is set to 620kHz for LTE Band 5 (10MHz),

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

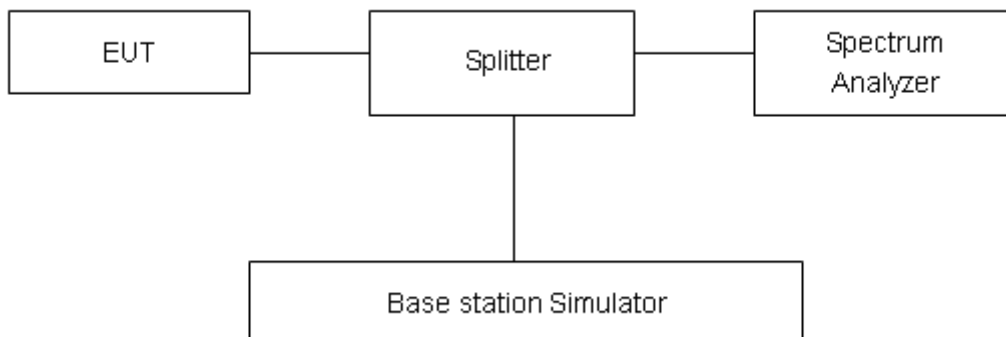

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.


Test Result

Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
GSM 850 (GSM)	128	824.2	0.2448	0.3115
	190	836.6	0.246	0.3108
	251	848.8	0.246	0.3135
GPRS 850 (GMSK)	128	824.2	0.2475	0.3153
	190	836.6	0.2498	0.3173
	251	848.8	0.2494	0.3163
EGPRS 850 (8-PSK)	128	824.2	0.2544	0.3156
	190	836.6	0.2495	0.3212
	251	848.8	0.251	0.3147
WCDMA Band V (RMC)	4132	826.4	4.1532	4.687
	4183	836.6	4.1559	4.657
	4233	846.6	4.1748	4.679



LTE Band 5						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	20407	824.7	1.0897	1.271
			20525	836.5	1.0904	1.27
			20643	848.3	1.0955	1.298
		3	20415	825.5	2.6936	2.9
			20525	836.5	2.6966	2.931
			20635	847.5	2.6969	2.93
		5	20425	826.5	4.5173	4.928
			20525	836.5	4.5032	4.875
			20625	846.5	4.4952	4.943
		10	20450	829	8.9932	9.701
			20525	836.5	8.9617	9.677
			20600	844	8.9738	9.637
	16QAM	1.4	20407	824.7	1.0962	1.275
			20525	836.5	1.1002	1.324
			20643	848.3	1.0916	1.285
		3	20415	825.5	2.6855	2.896
			20525	836.5	2.6843	2.910
			20635	847.5	2.6820	2.924
		5	20425	826.5	4.5068	4.850
			20525	836.5	4.4915	4.882
			20625	846.5	4.4990	4.883
		10	20450	829	9.0114	9.703
			20525	836.5	8.9696	9.599
			20600	844	9.0034	9.746

GSM 850 CH-Low

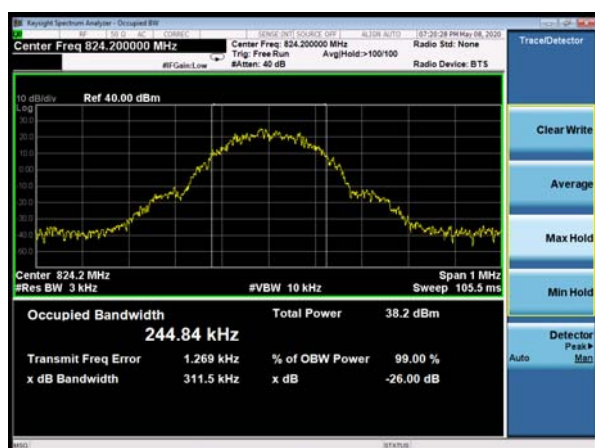


GSM 850 GPRS CH-Low



GSM 850 CH-Middle




GSM 850 GPRS CH-Middle

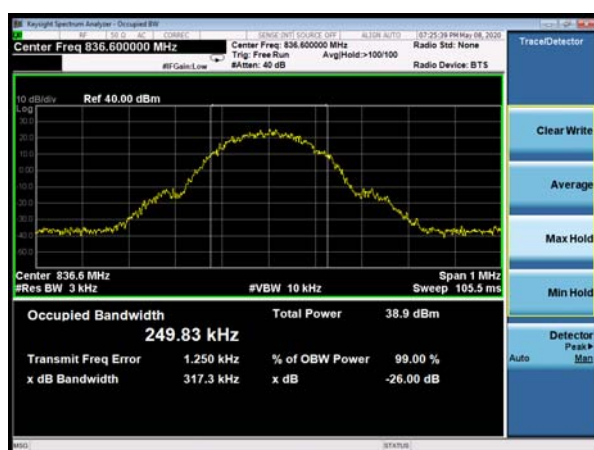


GSM 850 CH-High



GSM 850 GPRS CH-High

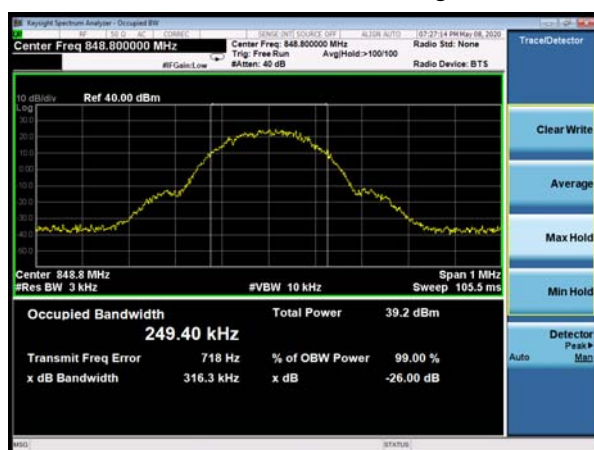

GSM 850 EGPRS CH-Low

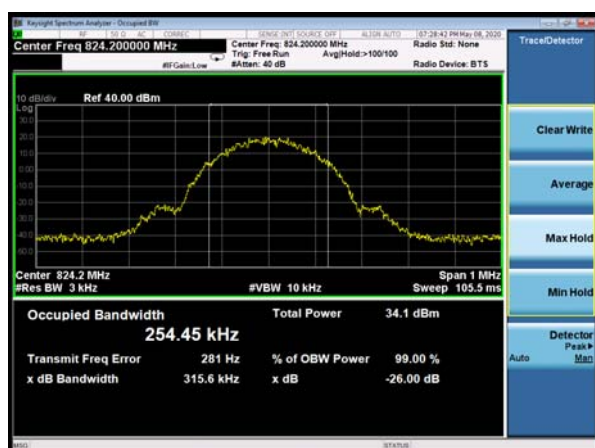


WCDMA Band V CH-Low



GSM 850 EGPRS CH-Middle




WCDMA Band V CH-Middle

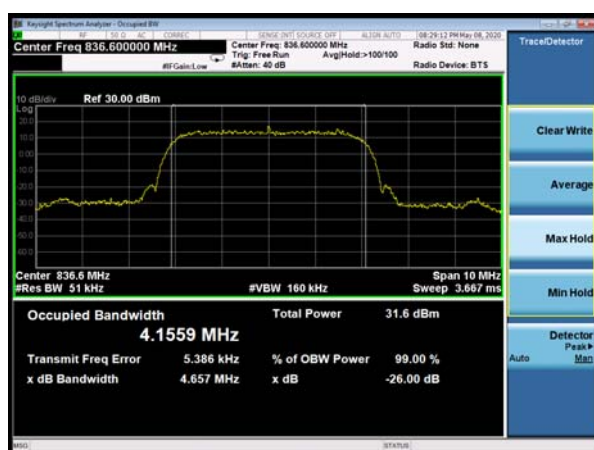

GSM 850 EGPRS CH-High




WCDMA Band V CH-High

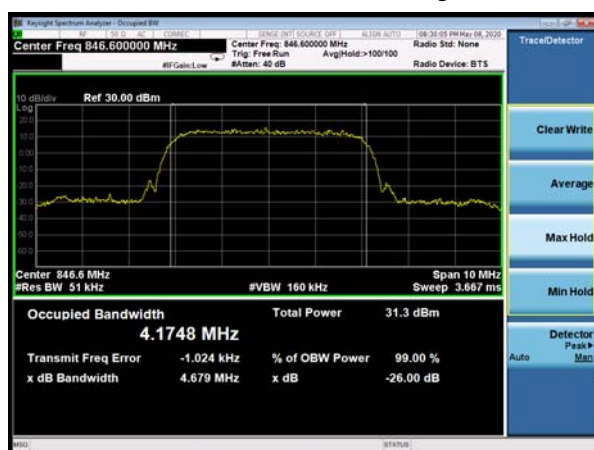





LTE Band 5 QPSK 1.4MHz CH-Low

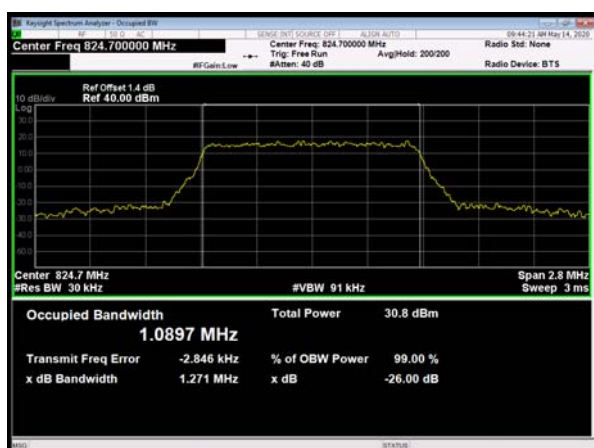


LTE Band 5 QPSK 3MHz CH-Low

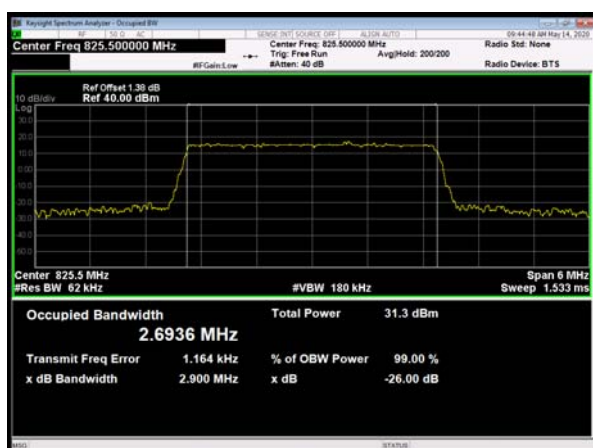


LTE Band 5 QPSK 1.4MHz CH-Middle

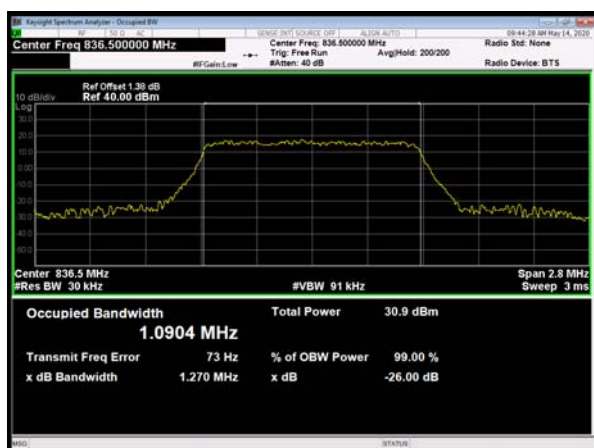


LTE Band 5 QPSK 3MHz CH-Middle

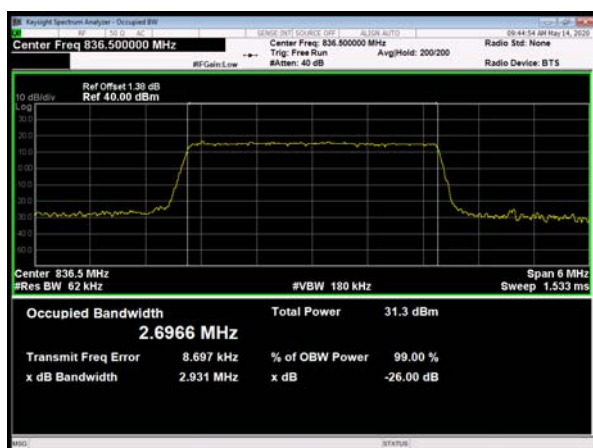

LTE Band 5 QPSK 1.4MHz CH-High

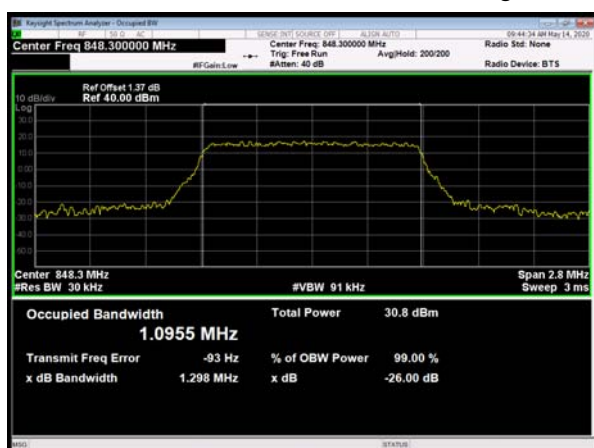


LTE Band 5 QPSK 3MHz CH-High

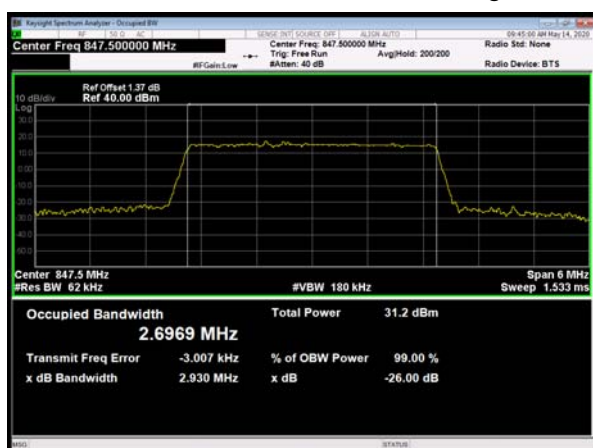





LTE Band 5 QPSK 5MHz CH-Low

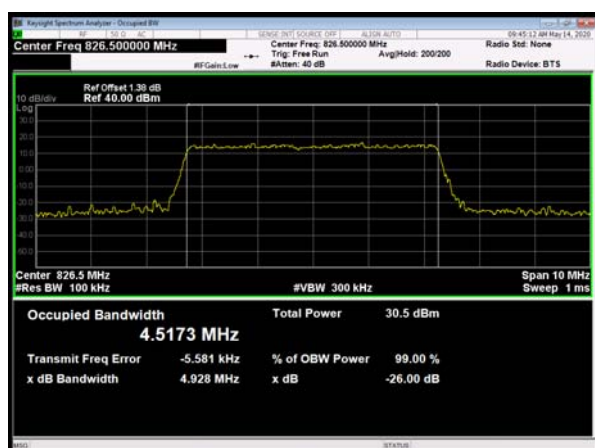


LTE Band 5 QPSK 10MHz CH-Low

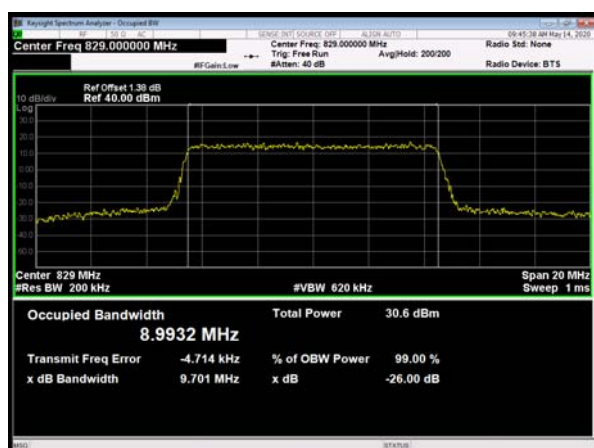


LTE Band 5 QPSK 5MHz CH-Middle

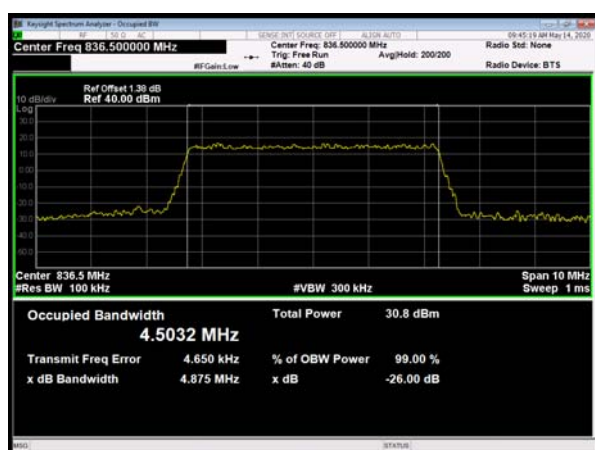


LTE Band 5 QPSK 10MHz CH-Middle

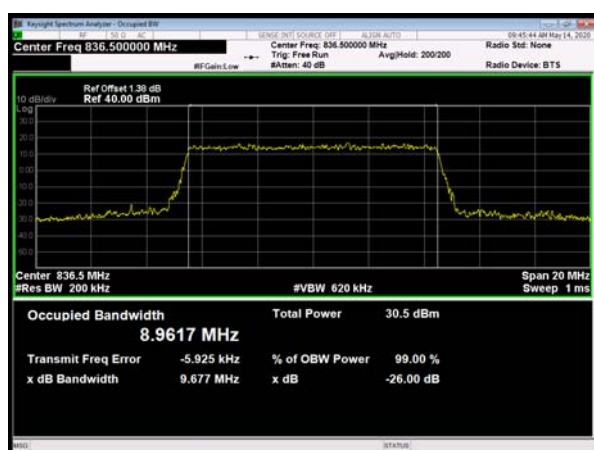

LTE Band 5 QPSK 5MHz CH-High

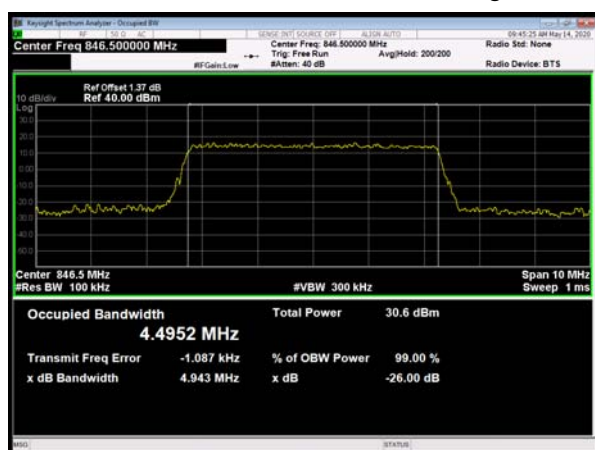


LTE Band 5 QPSK 10MHz CH-High

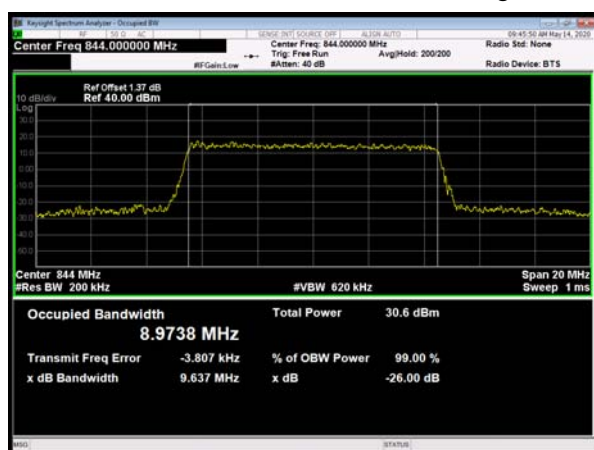




LTE Band 5 16QAM 1.4MHz CH-Low

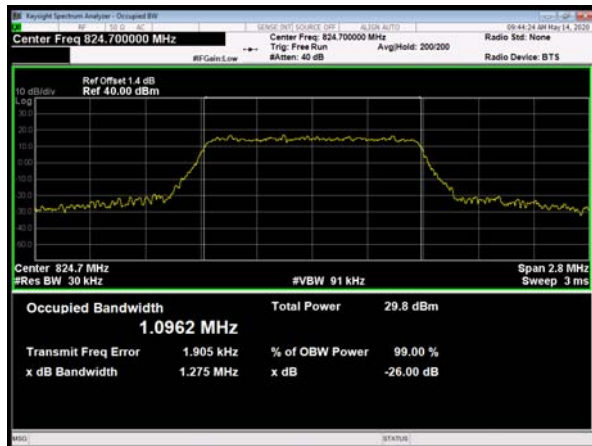


LTE Band 5 16QAM 3MHz CH-Low




LTE Band 5 16QAM 1.4MHz CH-Middle

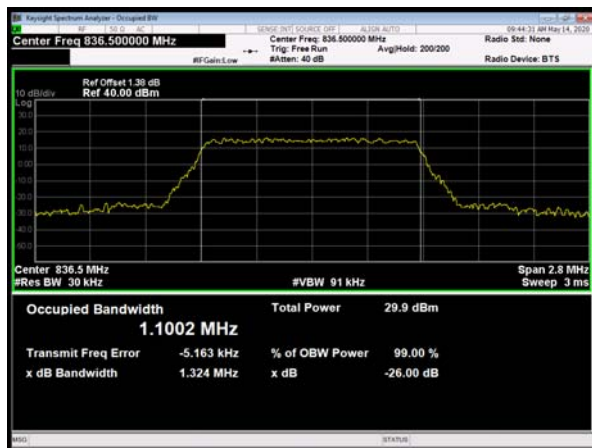


LTE Band 5 16QAM 3MHz CH-Middle

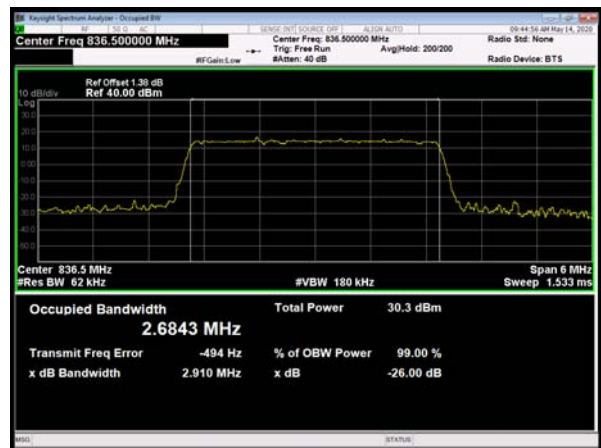

LTE Band 5 16QAM 1.4MHz CH-High

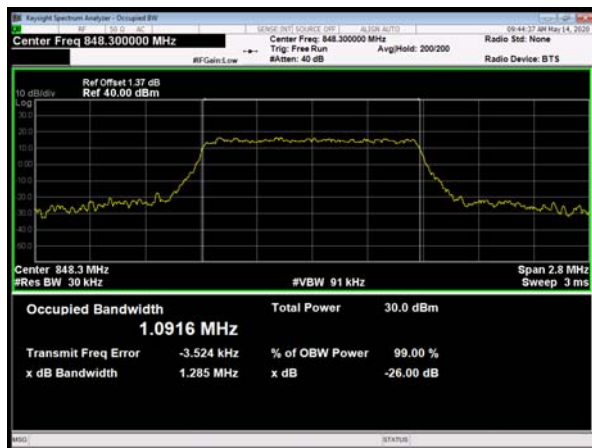


LTE Band 5 16QAM 3MHz CH-High

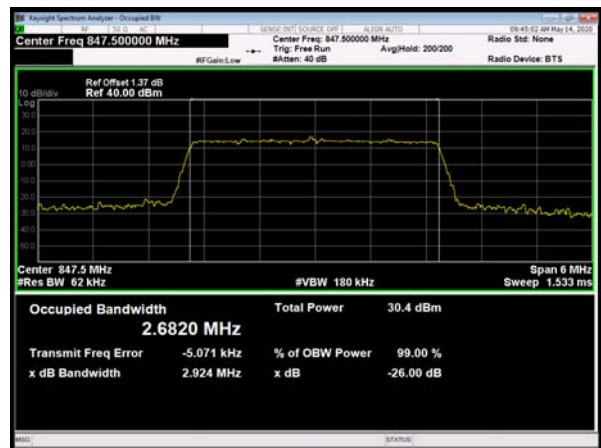





LTE Band 5 16QAM 5MHz CH-Low

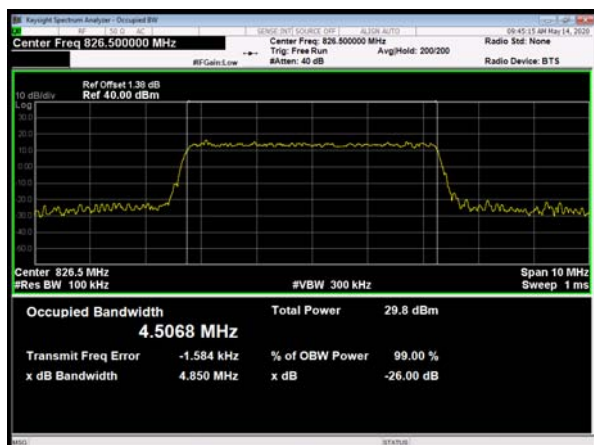


LTE Band 5 16QAM 10MHz CH-Low

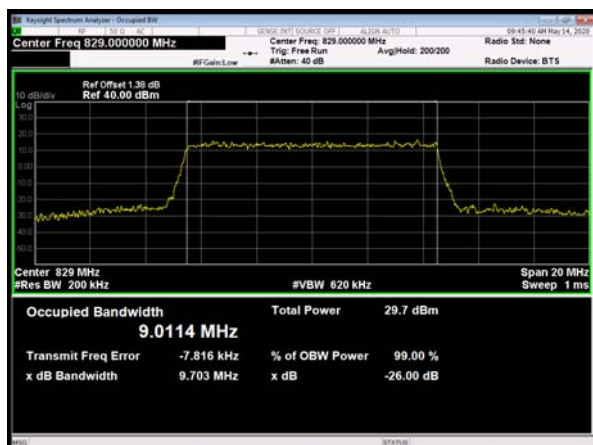


LTE Band 5 16QAM 5MHz CH-Middle

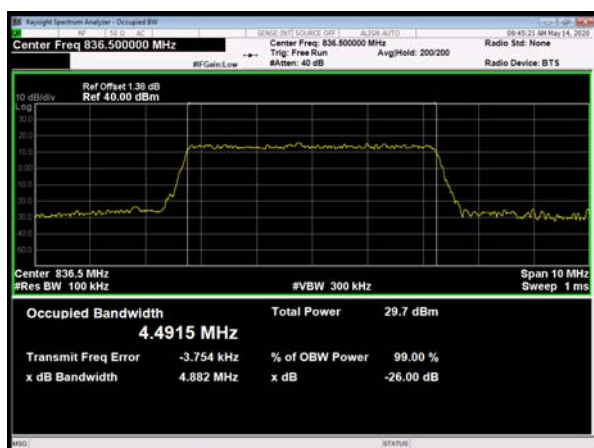


LTE Band 5 16QAM 10MHz CH-Middle

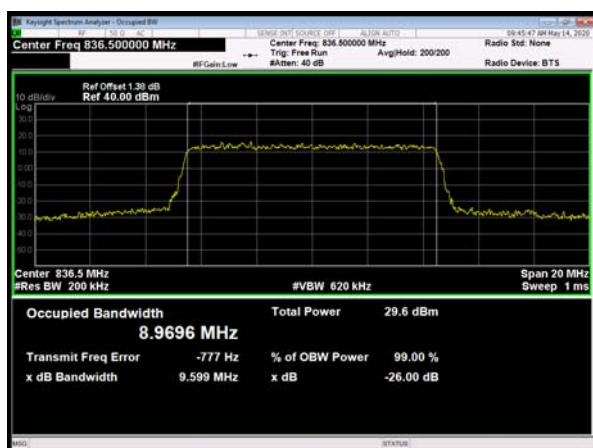

LTE Band 5 16QAM 5MHz CH-High

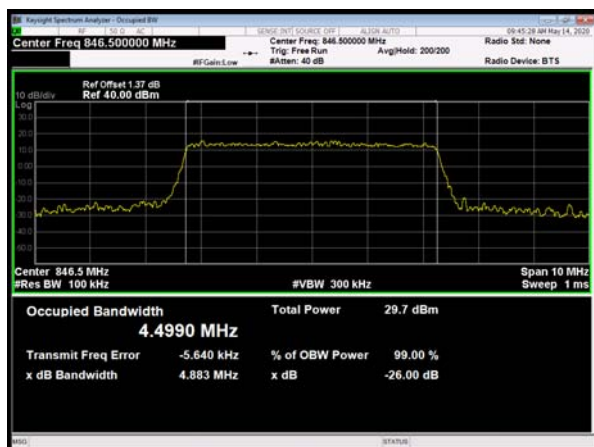

LTE Band 5 16QAM 10MHz CH-High

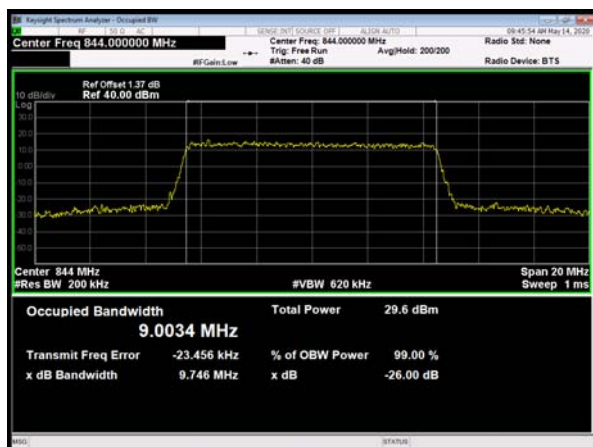

5.3. Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used.

RBW is set to 3kHz,VBW is set to 10kHz for GSM 850,

RBW is set to 51kHz,VBW is set to 160kHz for WCDMA Band V,

RBW is set to 15kHz, VBW is set to 43kHz for LTE Band 5 (1.4MHz),


RBW is set to 30kHz,VBW is set to 91kHz for LTE Band 5 (3MHz),

RBW is set to 51kHz,VBW is set to 150kHz for LTE Band 5 (5MHz),

RBW is set to 100kHz,VBW is set to 300kHz for LTE Band 5 (10MHz),

Spectrum analyzer plots are included on the following pages.

Test Setup

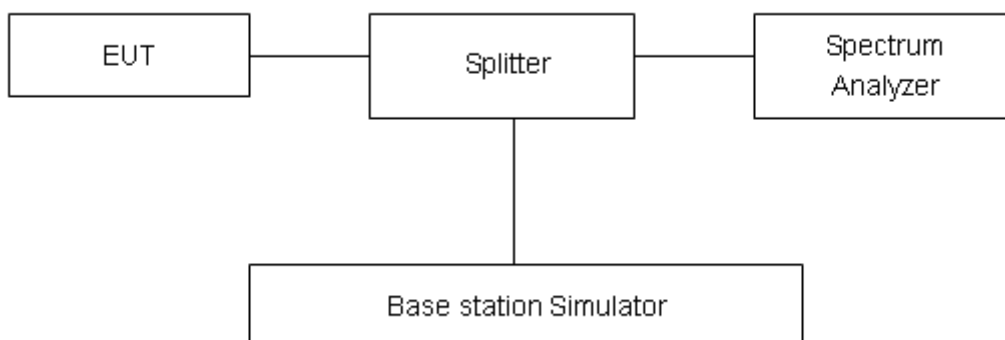

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.



Test Result:

GSM 850 CH-Low



GSM 850 CH-High



GSM 850 GPRS CH-Low




GSM 850 GPRS CH-High



GSM 850 EGPRS CH-Low



GSM 850 EGPRS CH-High

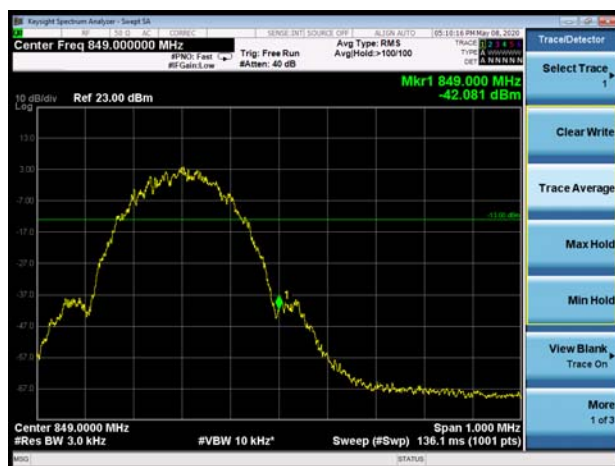


WCDMA Band V CH-Low




WCDMA Band V CH-High




LTE Band 5 QPSK 1.4MHz CH-Low 1RB

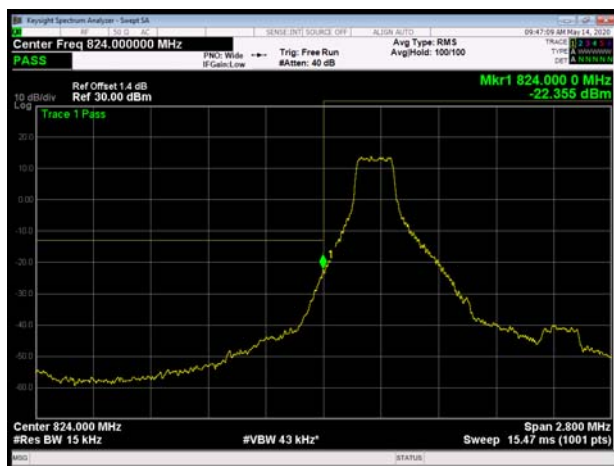


LTE Band 5 QPSK 1.4MHz CH-High 1RB

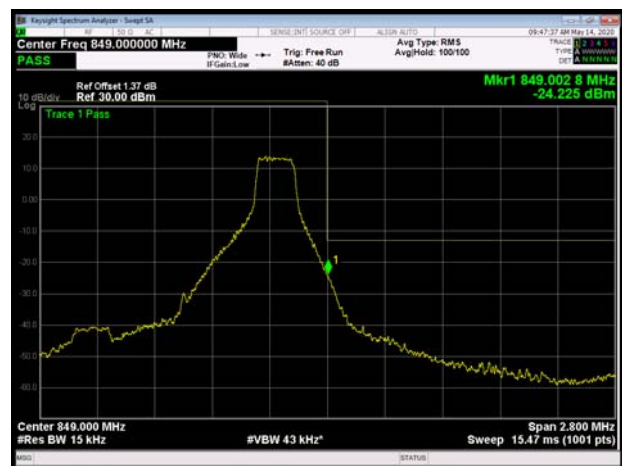


LTE Band 5 QPSK 1.4MHz CH-Low 100%RB

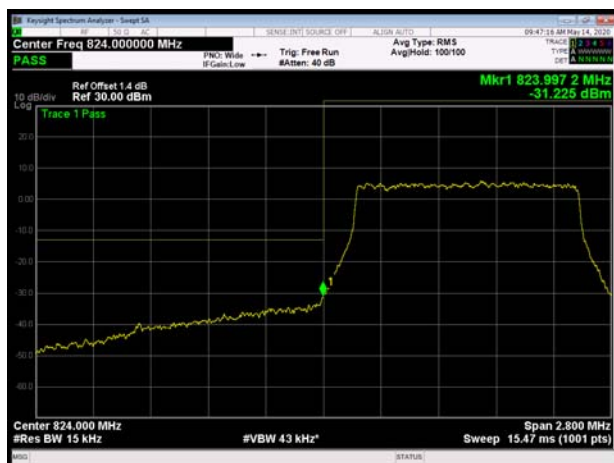


LTE Band 5 QPSK 1.4MHz CH-High 100%RB

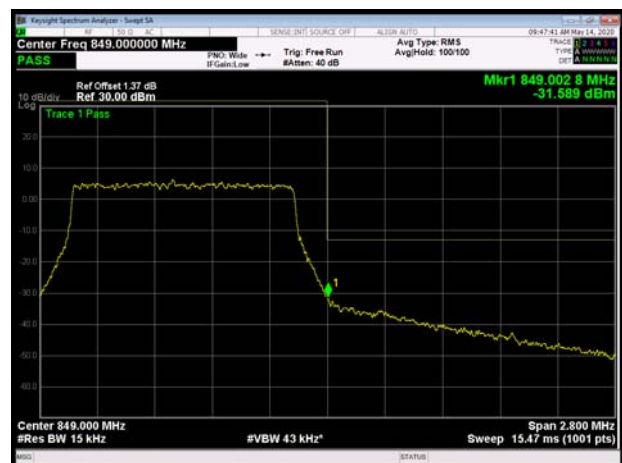


LTE Band 5 QPSK 3MHz CH-Low 1RB

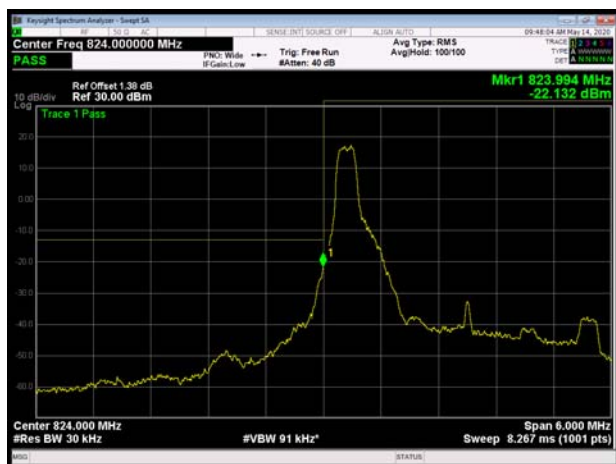


LTE Band 5 QPSK 3MHz CH-High 1RB

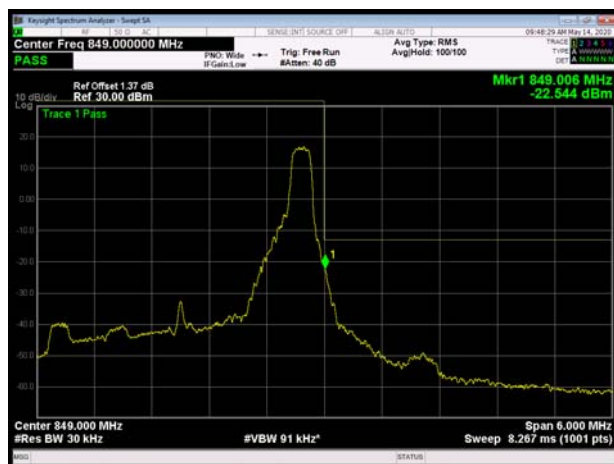


LTE Band 5 QPSK 3MHz CH-Low 100%RB

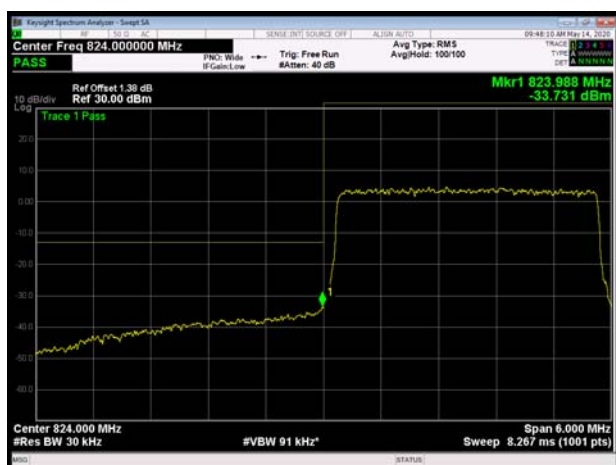


LTE Band 5 QPSK 3MHz CH-High 100%RB

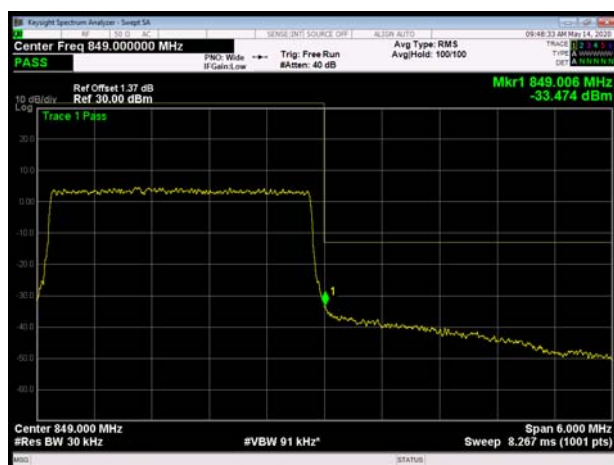


LTE Band 5 QPSK 5MHz CH-Low 1RB

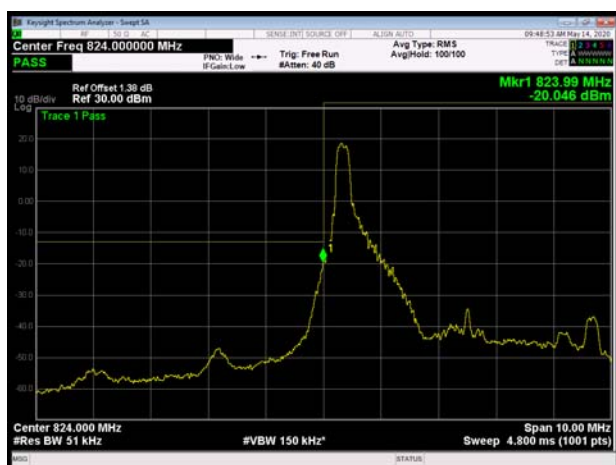

LTE Band 5 QPSK 5MHz CH-High 1RB

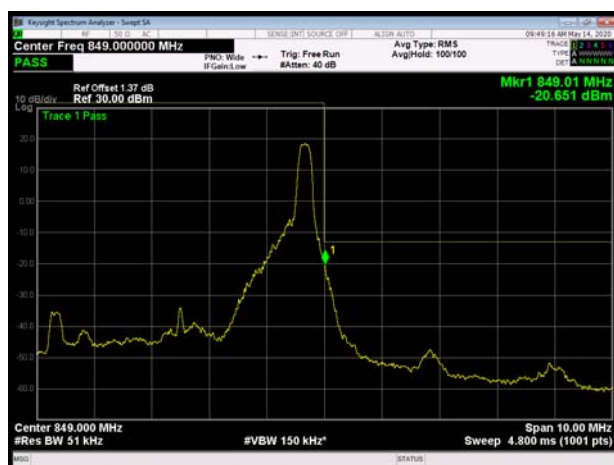

LTE Band 5 QPSK 5MHz CH-Low 100%RB

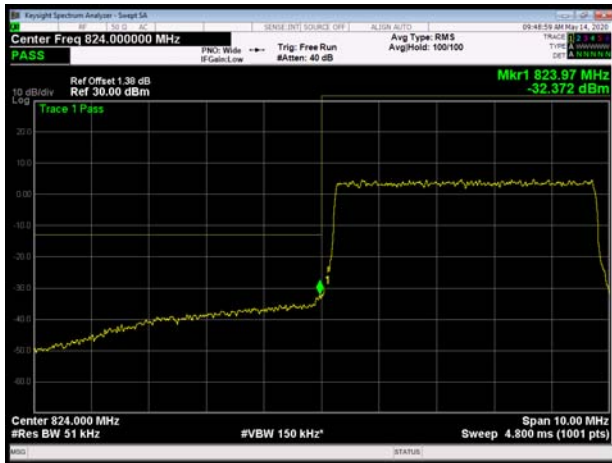

LTE Band 5 QPSK 5MHz CH-High 100%RB




LTE Band 5 QPSK 10MHz CH-Low 1RB




LTE Band 5 QPSK 10MHz CH-High 1RB




LTE Band 5 QPSK 10MHz CH-Low 100%RB

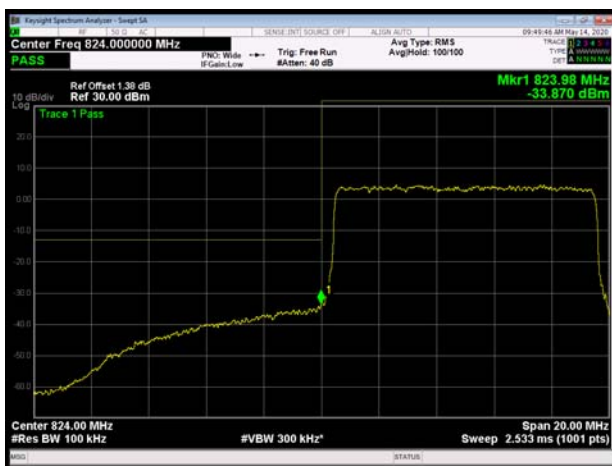


LTE Band 5 QPSK 10MHz CH-High 100%RB

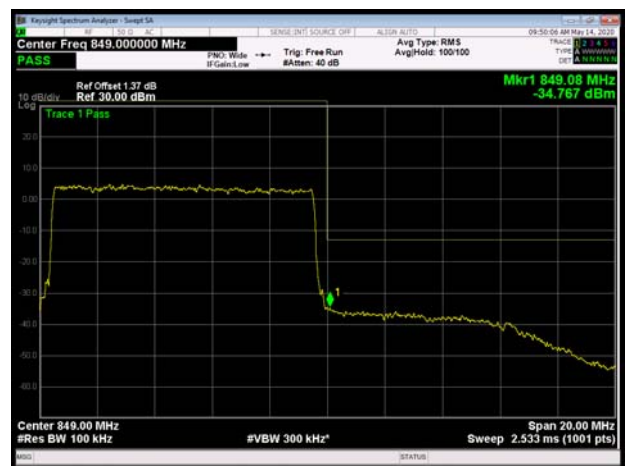


LTE Band 5 16QAM 1.4MHz CH-Low 1RB

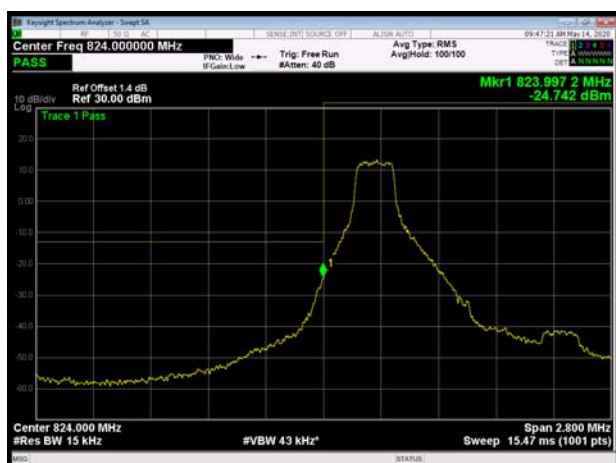


LTE Band 5 16QAM 1.4MHz CH-High 1RB

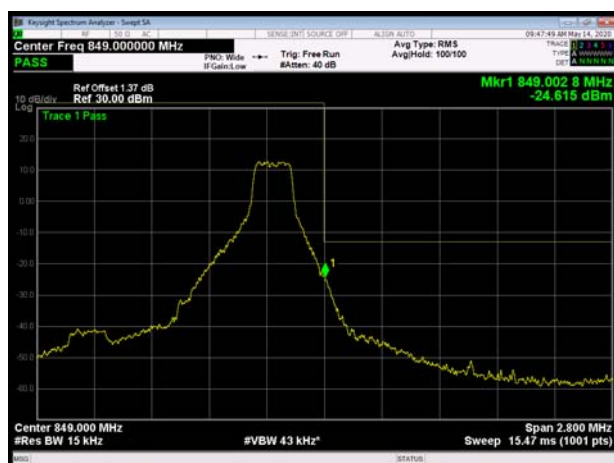


LTE Band 5 16QAM 1.4MHz CH-Low 100%RB

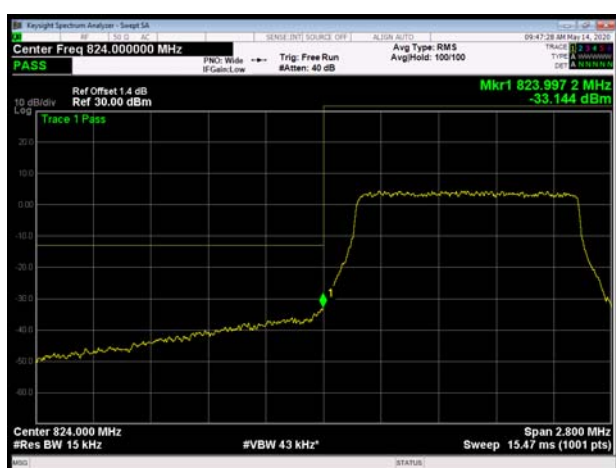


LTE Band 5 16QAM 1.4MHz CH-High 100%RB

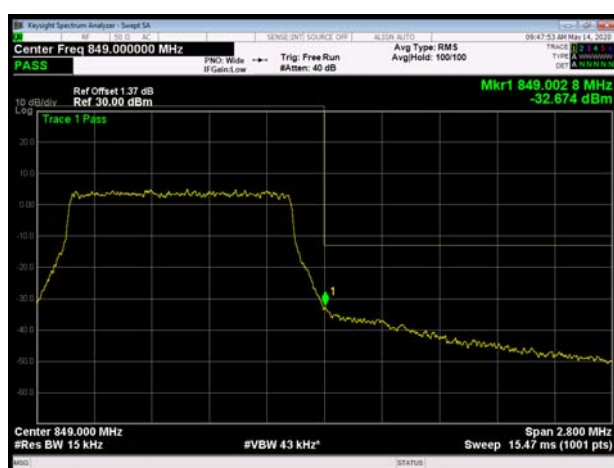


LTE Band 5 16QAM 3MHz CH-Low 1RB

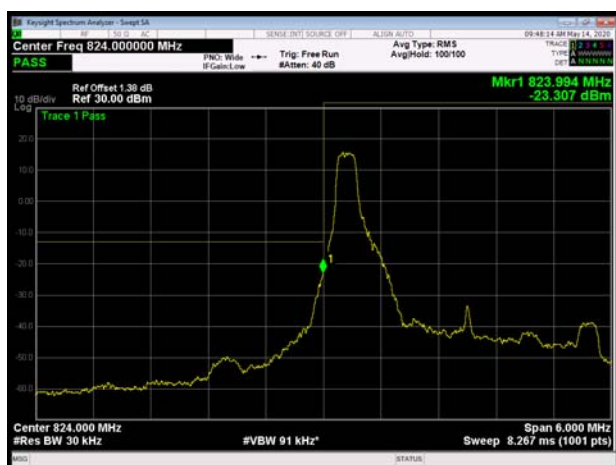

LTE Band 5 16QAM 3MHz CH-High 1RB

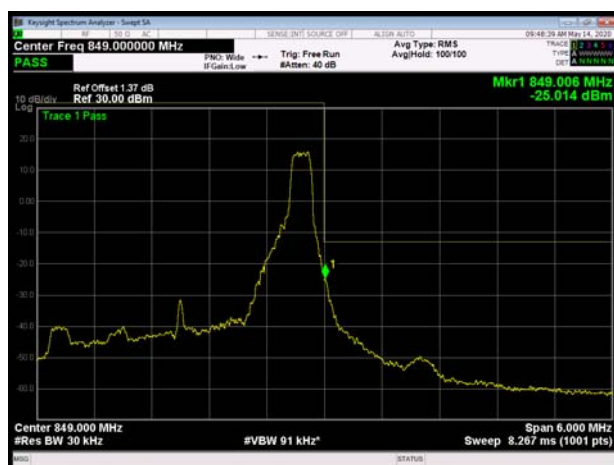


LTE Band 5 16QAM 3MHz CH-Low 100%RB

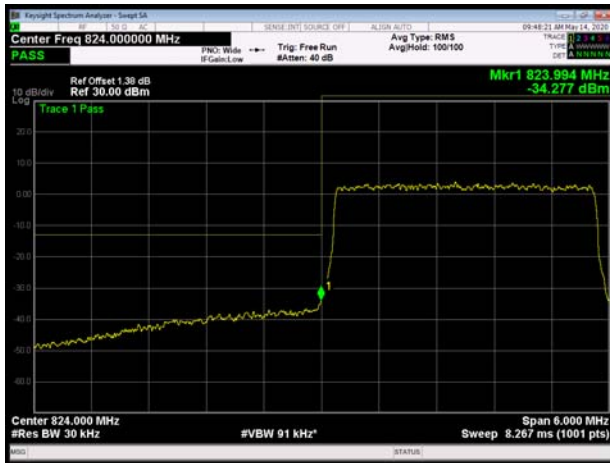


LTE Band 5 16QAM 3MHz CH-High 100%RB




LTE Band 5 16QAM 5MHz CH-Low 1RB

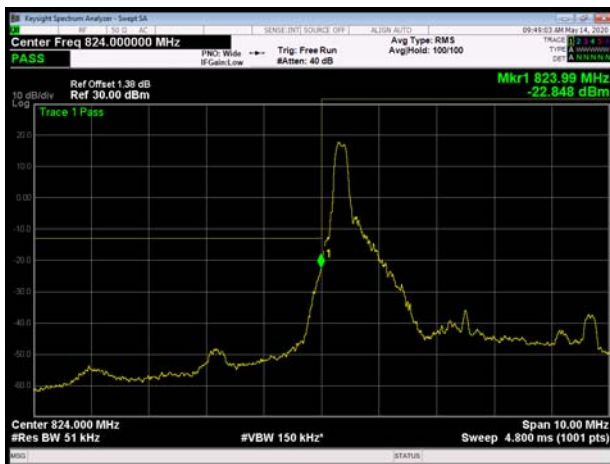


LTE Band 5 16QAM 5MHz CH-High 1RB

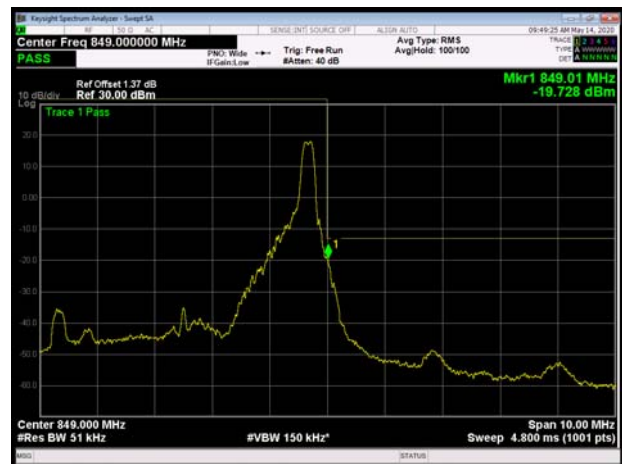

LTE Band 5 16QAM 5MHz CH-Low 100%RB

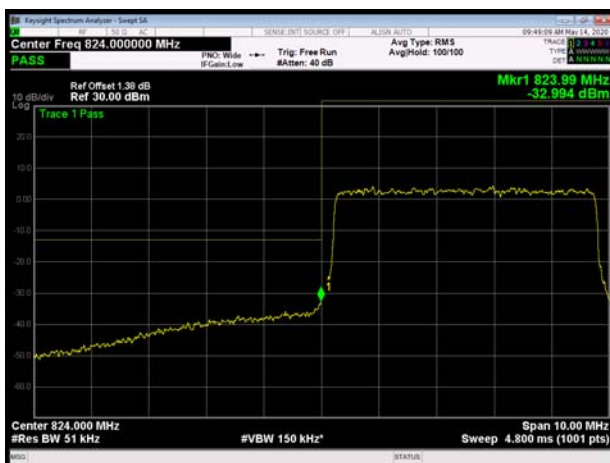

LTE Band 5 16QAM 5MHz CH-High 100%RB

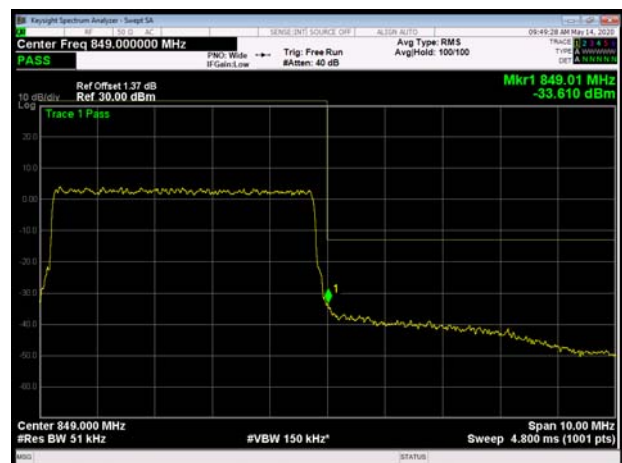




LTE Band 5 16QAM 10MHz CH-Low 1RB




LTE Band 5 16QAM 10MHz CH-High 1RB



LTE Band 5 16QAM 10MHz CH-Low 100%RB

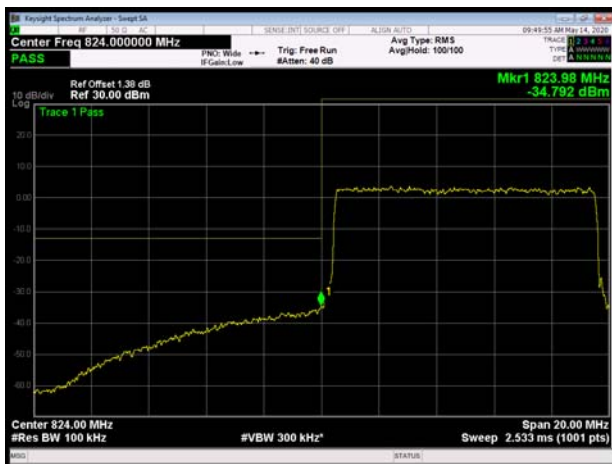

LTE Band 5 16QAM 10MHz CH-High 100%RB

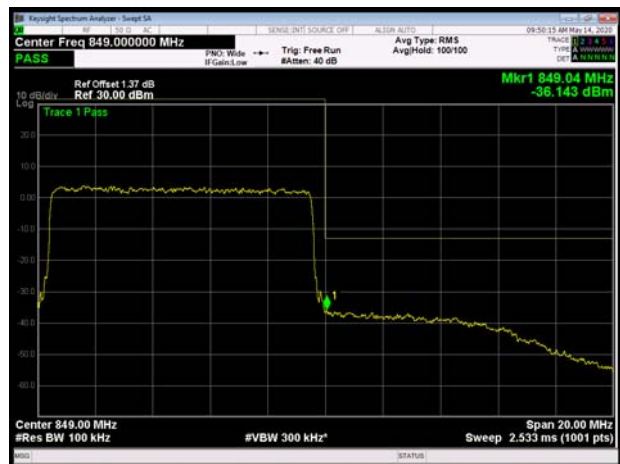

5.4. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as P_{Pk} . And measure the total average power and record as P_{Avg} . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

Test Setup

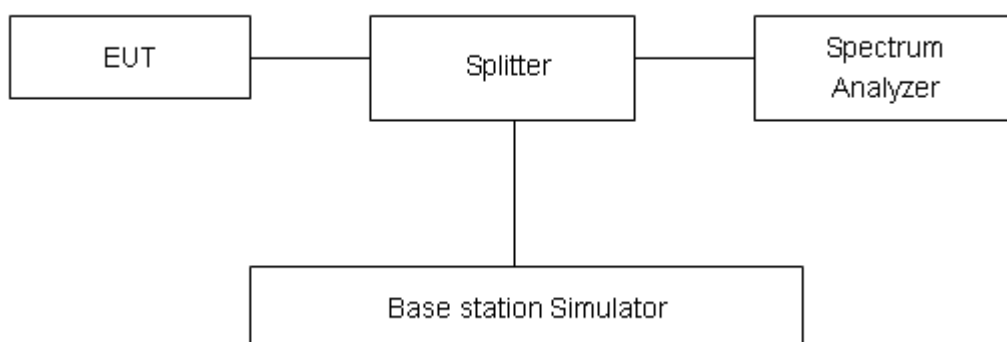

Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.



Test Results

Mode	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
GSM 850 (GSM)	128	824.2	33.13	32.37	0.76	≤13	PASS
	190	836.6	33.19	32.34	0.85	≤13	PASS
	251	848.8	33.03	32.29	0.74	≤13	PASS
GPRS 850 (GMSK)	128	824.2	33.19	32.35	0.84	≤13	PASS
	190	836.6	33.17	32.36	0.81	≤13	PASS
	251	848.8	33.02	32.29	0.73	≤13	PASS
EGPRS 850 (8-PSK)	128	824.2	28.58	27.24	1.34	≤13	PASS
	190	836.6	28.51	27.25	1.26	≤13	PASS
	251	848.8	28.64	27.26	1.38	≤13	PASS
WCDMA Band V (RMC)	4132	826.4	25.70	22.62	3.08	≤13	PASS
	4183	836.6	25.83	22.75	3.08	≤13	PASS
	4233	846.6	25.67	22.59	3.08	≤13	PASS

LTE Band 5								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	20407	824.7	27.83	22.88	4.95	≤13	PASS
		20525	836.5	28.12	22.85	5.27	≤13	PASS
		20643	848.3	28.02	22.82	5.20	≤13	PASS
	3	20415	825.5	27.85	22.75	5.10	≤13	PASS
		20525	836.5	28.12	22.78	5.34	≤13	PASS
		20635	847.5	27.88	22.69	5.19	≤13	PASS
	5	20425	826.5	27.95	22.76	5.19	≤13	PASS
		20525	836.5	28.17	22.75	5.42	≤13	PASS
		20625	846.5	27.97	22.74	5.23	≤13	PASS
	10	20450	829	28.15	22.79	5.36	≤13	PASS
		20525	836.5	28.15	22.77	5.38	≤13	PASS
		20600	844	27.89	22.68	5.21	≤13	PASS
16QAM	1.4	20407	824.7	27.62	21.88	5.74	≤13	PASS
		20525	836.5	28.09	21.89	6.20	≤13	PASS
		20643	848.3	27.90	21.85	6.05	≤13	PASS
	3	20415	825.5	27.65	21.76	5.89	≤13	PASS
		20525	836.5	28.00	21.78	6.22	≤13	PASS
		20635	847.5	27.80	21.80	6.00	≤13	PASS



	5	20425	826.5	27.77	21.78	5.99	≤13	PASS
		20525	836.5	27.87	21.74	6.13	≤13	PASS
		20625	846.5	27.80	21.78	6.02	≤13	PASS
	10	20450	829	27.95	21.80	6.15	≤13	PASS
		20525	836.5	27.93	21.79	6.14	≤13	PASS
		20600	844	27.76	21.78	5.98	≤13	PASS

5.5. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +55°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +55°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.6 V and 4.4 V, with a nominal voltage of 3.85V.

Test setup

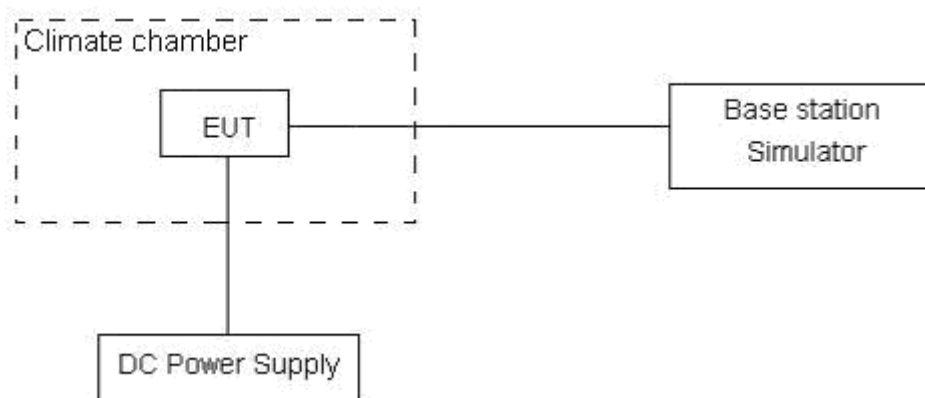

Limits

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	≤ 2.5 ppm
--------	----------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01$ ppm.

Test Result

GSM850						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	GMSK	8PSK	GMSK	8PSK	
Normal (25℃)	Normal	6.23	6.24	0.00331	0.00332	PASS
Extreme (55℃)		12.34	12.29	0.00657	0.00653	PASS
Extreme (50℃)		9.74	8.79	0.00518	0.00467	PASS
Extreme (40℃)		4.59	4.84	0.00244	0.00257	PASS
Extreme (30℃)		1.66	10.34	0.00088	0.00550	PASS
Extreme (20℃)		15.77	9.24	0.00839	0.00492	PASS
Extreme (10℃)		15.87	3.92	0.00844	0.00208	PASS
Extreme (0℃)		6.36	1.41	0.00338	0.00075	PASS
Extreme (-10℃)		17.57	14.86	0.00935	0.00790	PASS
Extreme (-20℃)		17.39	12.33	0.00925	0.00656	PASS
Extreme (-30℃)		2.77	2.15	0.00147	0.00114	PASS
25℃	LV	11.81	12.06	0.00628	0.00642	PASS
	HV	12.83	2.20	0.00683	0.00117	PASS

WCDMA B5						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	BPSK	QPSK	BPSK	QPSK	
Normal (25℃)	Normal	11.56	11.16	0.00615	0.00594	PASS
Extreme (55℃)		8.89	17.87	0.00473	0.00951	PASS
Extreme (50℃)		6.98	10.97	0.00371	0.00584	PASS
Extreme (40℃)		16.77	10.96	0.00892	0.00583	PASS
Extreme (30℃)		11.43	14.63	0.00608	0.00778	PASS
Extreme (20℃)		5.11	4.47	0.00272	0.00238	PASS
Extreme (10℃)		9.55	10.20	0.00508	0.00543	PASS
Extreme (0℃)		10.48	16.20	0.00557	0.00862	PASS
Extreme (-10℃)		8.35	11.49	0.00444	0.00611	PASS
Extreme (-20℃)		7.87	4.29	0.00419	0.00228	PASS
Extreme (-30℃)		8.43	9.16	0.00448	0.00487	PASS
25℃	LV	15.98	17.43	0.00850	0.00927	PASS
	HV	6.75	16.11	0.00359	0.00857	PASS



LTE B5						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	1.4MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	5.04	1.21	0.00268	0.00064	PASS
Extreme (55℃)		13.92	7.54	0.00740	0.00401	PASS
Extreme (50℃)		4.02	8.66	0.00214	0.00461	PASS
Extreme (40℃)		14.13	17.41	0.00752	0.00926	PASS
Extreme (30℃)		6.61	5.48	0.00352	0.00292	PASS
Extreme (20℃)		12.18	16.22	0.00648	0.00863	PASS
Extreme (10℃)		8.89	4.10	0.00473	0.00218	PASS
Extreme (0℃)		6.47	8.55	0.00344	0.00455	PASS
Extreme (-10℃)		10.44	17.43	0.00555	0.00927	PASS
Extreme (-20℃)		7.80	5.78	0.00415	0.00307	PASS
Extreme (-30℃)		5.58	10.31	0.00297	0.00548	PASS
25℃	LV	2.13	16.10	0.00113	0.00856	PASS
	HV	8.37	2.43	0.00445	0.00129	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	3MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	16.07	7.81	0.00855	0.00416	PASS
Extreme (55℃)		13.89	6.27	0.00739	0.00334	PASS
Extreme (50℃)		9.90	9.37	0.00527	0.00499	PASS
Extreme (40℃)		15.13	17.14	0.00805	0.00911	PASS
Extreme (30℃)		13.23	1.90	0.00704	0.00101	PASS
Extreme (20℃)		13.62	2.92	0.00725	0.00155	PASS
Extreme (10℃)		13.22	1.86	0.00703	0.00099	PASS
Extreme (0℃)		11.57	14.39	0.00616	0.00765	PASS
Extreme (-10℃)		4.06	2.64	0.00216	0.00141	PASS
Extreme (-20℃)		9.59	17.70	0.00510	0.00942	PASS
Extreme (-30℃)		3.55	6.16	0.00189	0.00328	PASS
25℃	LV	14.82	16.38	0.00788	0.00871	PASS
	HV	11.92	13.28	0.00634	0.00706	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	15.35	15.10	0.00817	0.00803	PASS



Extreme (55℃)		4.44	13.25	0.00236	0.00705	PASS
Extreme (50℃)		12.50	10.47	0.00665	0.00557	PASS
Extreme (40℃)		16.42	8.87	0.00873	0.00472	PASS
Extreme (30℃)		11.58	9.13	0.00616	0.00485	PASS
Extreme (20℃)		13.30	17.18	0.00708	0.00914	PASS
Extreme (10℃)		1.66	17.99	0.00088	0.00957	PASS
Extreme (0℃)		12.84	2.94	0.00683	0.00156	PASS
Extreme (-10℃)		4.47	5.83	0.00238	0.00310	PASS
Extreme (-20℃)		15.00	15.26	0.00798	0.00812	PASS
Extreme (-30℃)		10.06	9.92	0.00535	0.00528	PASS
25℃		LV	13.03	1.51	0.00693	0.00080
	HV	12.45	1.70	0.00662	0.00091	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	13.52	13.48	0.00719	0.00717	PASS
Extreme (55℃)		6.78	14.19	0.00361	0.00755	PASS
Extreme (50℃)		2.67	15.55	0.00142	0.00827	PASS
Extreme (40℃)		7.54	13.54	0.00401	0.00720	PASS
Extreme (30℃)		8.94	4.21	0.00476	0.00224	PASS
Extreme (20℃)		6.52	15.07	0.00347	0.00802	PASS
Extreme (10℃)		10.27	12.24	0.00546	0.00651	PASS
Extreme (0℃)		9.83	5.45	0.00523	0.00290	PASS
Extreme (-10℃)		10.36	16.88	0.00551	0.00898	PASS
Extreme (-20℃)		12.21	5.00	0.00650	0.00266	PASS
Extreme (-30℃)		13.47	7.13	0.00716	0.00380	PASS
25℃	LV	16.39	4.65	0.00872	0.00248	PASS
	HV	15.80	7.39	0.00841	0.00393	PASS

5.6. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier.

The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.

RBW is set to 1 kHz (0.009MHz~ 0.15 MHz),


RBW is set to 10 kHz (0.15 MHz~ 30 MHz)

RBW is set to 100 kHz (30MHz~1000 MHz)

RBW is set to 1000 kHz (above 1000MHz)

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

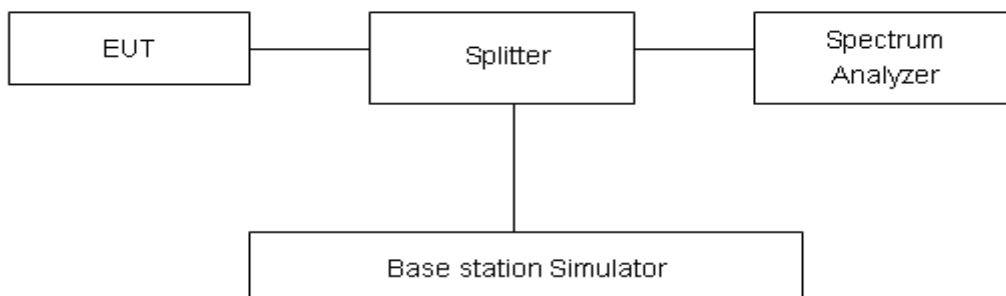

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.



Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-18GHz	1.407 dB




Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.


GSM 850 CH-Low 9kHz ~ 9GHz

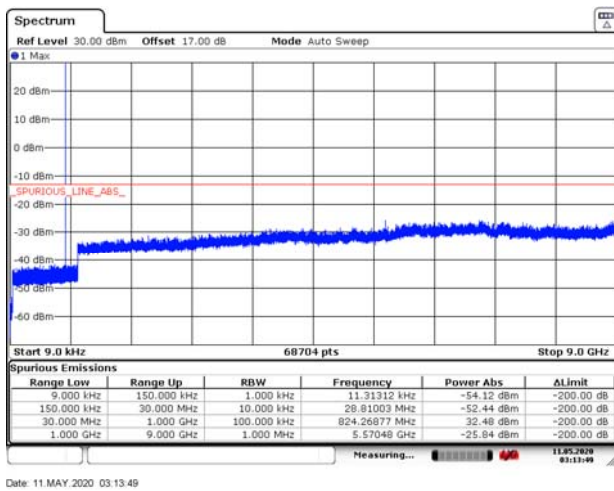


GPRS 850 CH-Low 9kHz ~ 9GHz

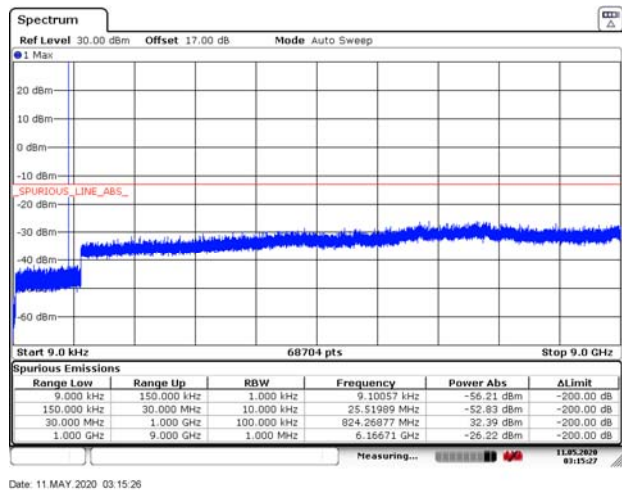


GSM 850 CH- Middle 9kHz ~ 9GHz

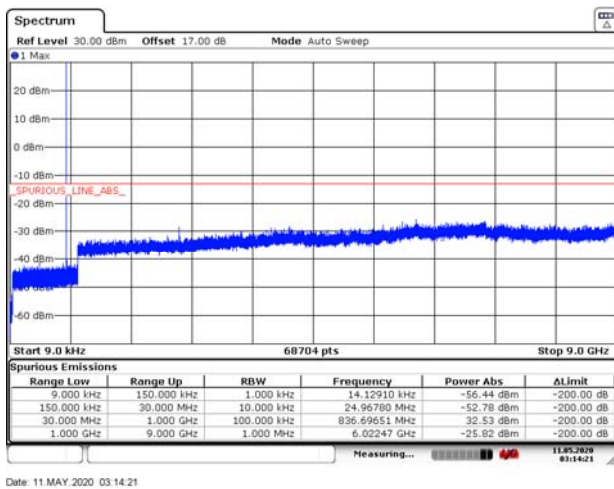


GPRS 850 CH- Middle 9kHz ~ 9GHz

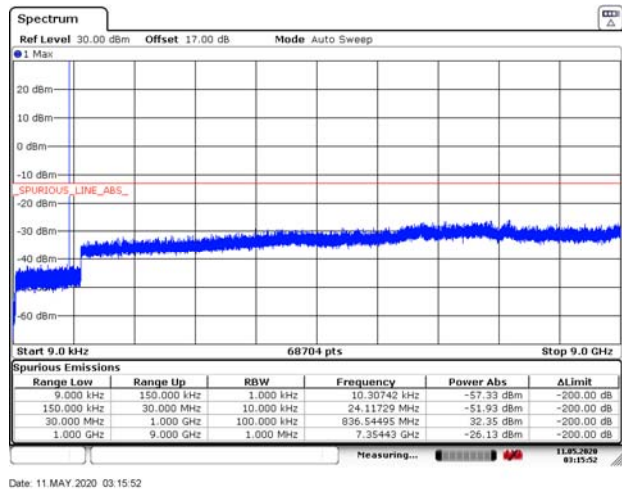

GSM 850 CH-High 9kHz ~ 9GHz

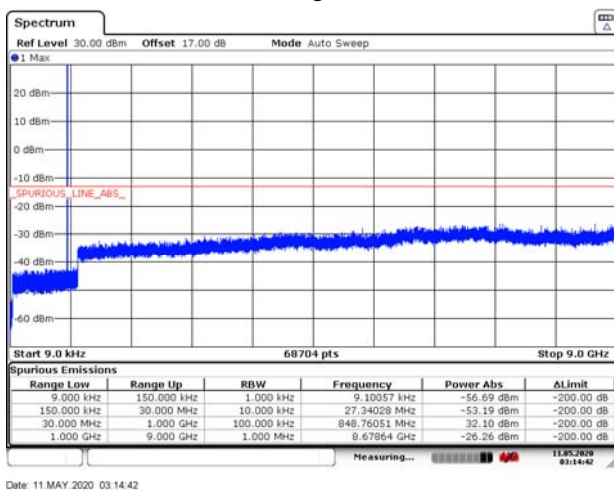


GPRS 850 CH-High 9kHz ~ 9GHz

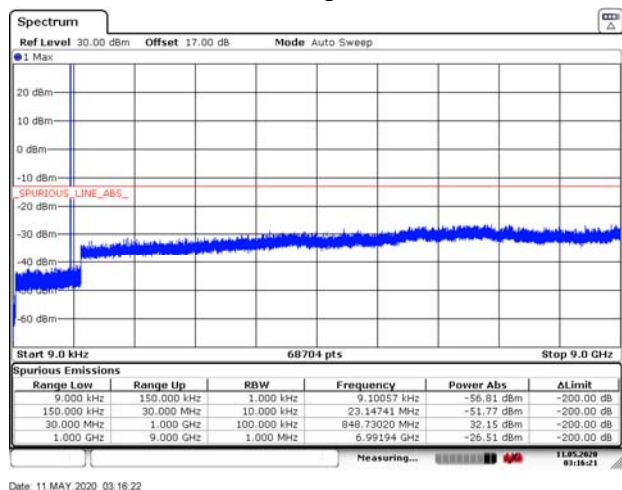




EGPRS 850 CH-Low 9kHz ~ 9GHz

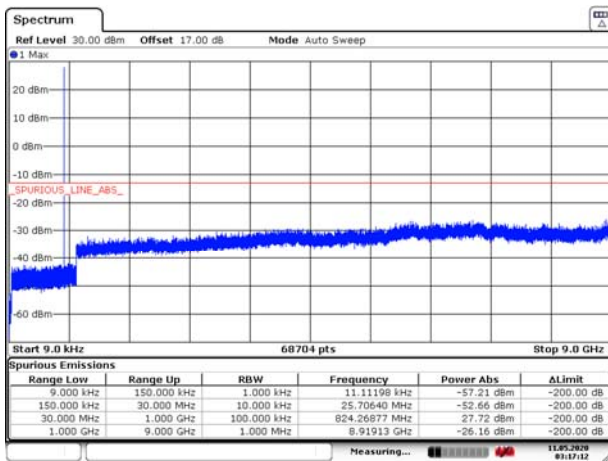


Date: 11 MAY 2020 03:17:12

WCDMA BAND V CH-Low 9kHz ~ 9GHz

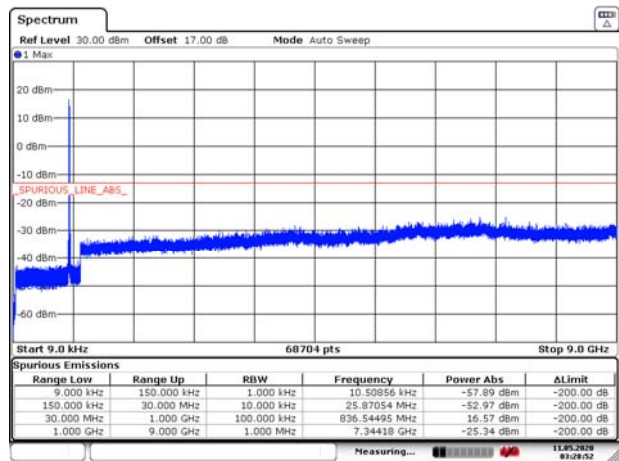


Date: 11 MAY 2020 03:28:52

EGPRS 850 CH- Middle 9kHz ~ 9GHz

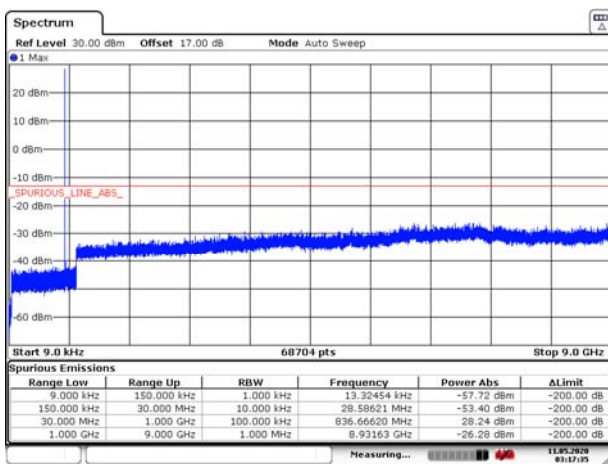


Date: 11 MAY 2020 03:17:34

WCDMA BAND V CH- Middle 9kHz ~ 9GHz

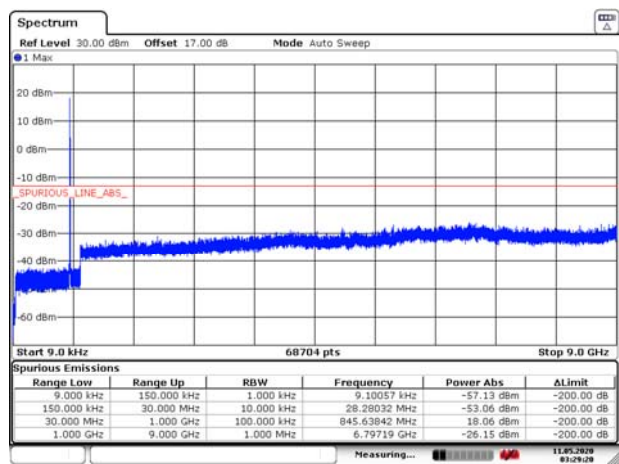


Date: 11 MAY 2020 03:29:20

EGPRS 850 CH-High 9kHz ~ 9GHz

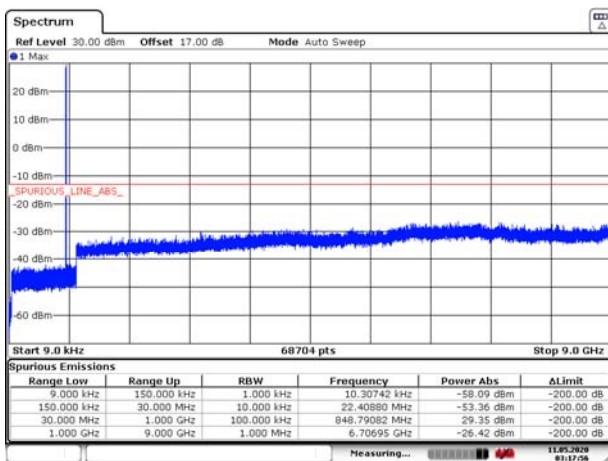


Date: 11 MAY 2020 03:17:56

WCDMA BAND V CH-High 9kHz ~ 9GHz

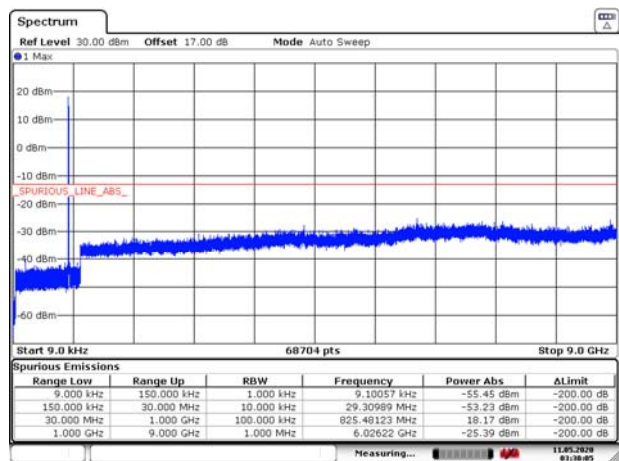


Date: 11 MAY 2020 03:30:05


LTE Band 5 1.4MHz CH-Low 9kHz~10GHz

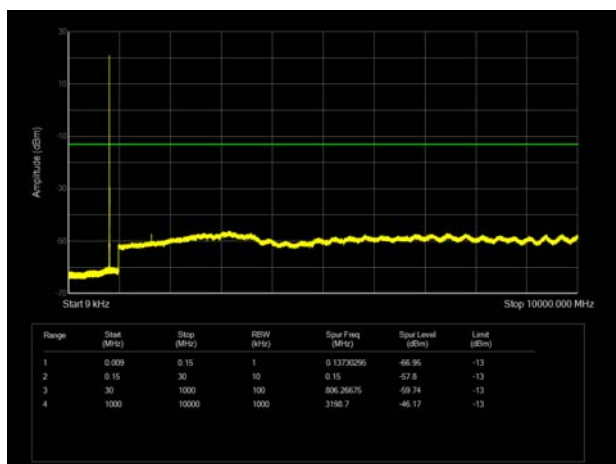


LTE Band 5 3MHz CH-Low 9kHz~10GHz

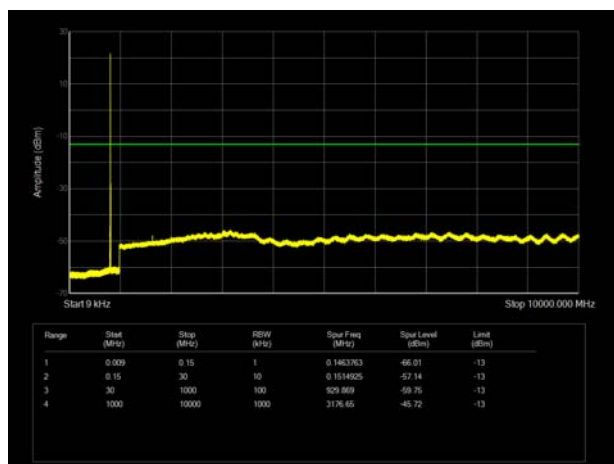


LTE Band 5 1.4MHz CH-Middle 9kHz~10GHz

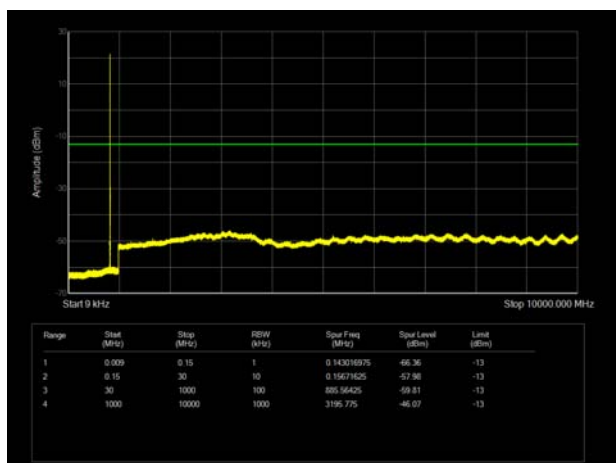


LTE Band 5 3MHz CH-Middle 9kHz~10GHz

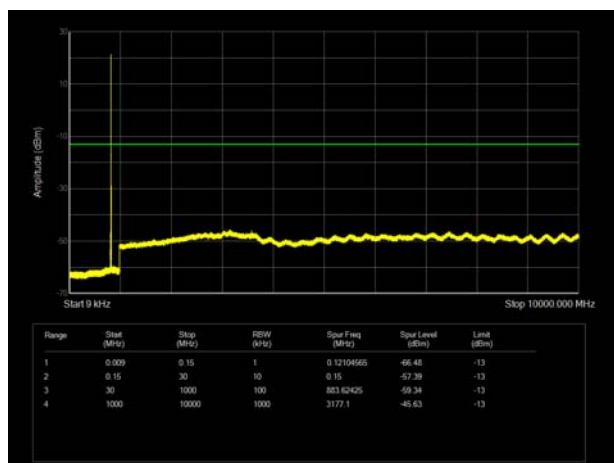


LTE Band 5 1.4MHz CH-High 9kHz~10GHz

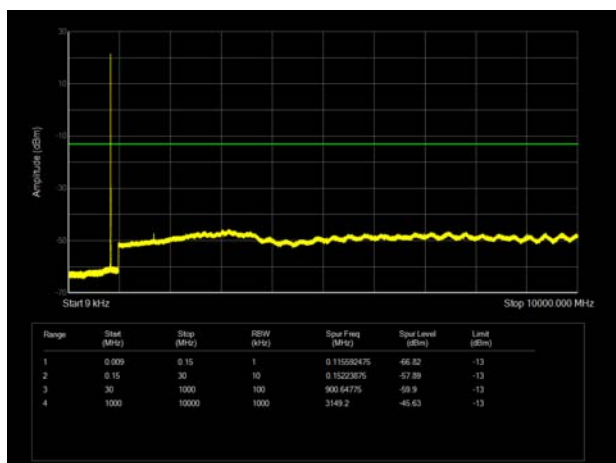


LTE Band 5 3MHz CH-High 9kHz~10GHz

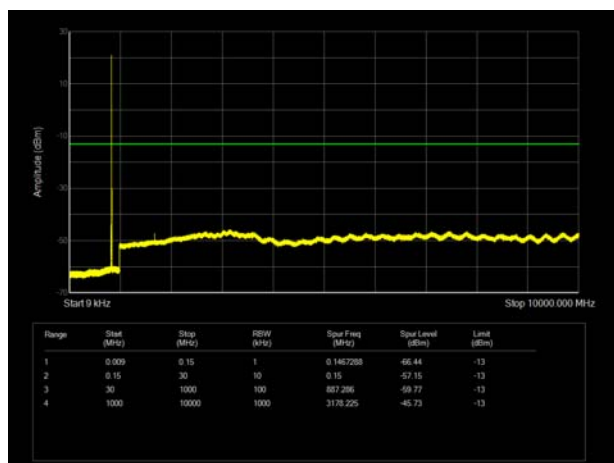


LTE Band 5 5MHz CH-Low 9kHz~10GHz

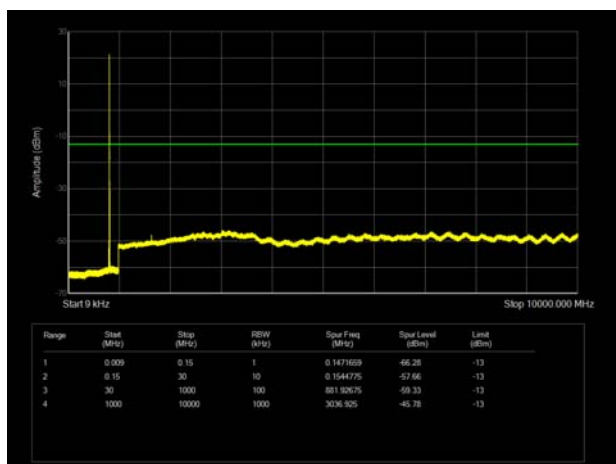


LTE Band 5 10MHz CH-Low 9kHz~10GHz

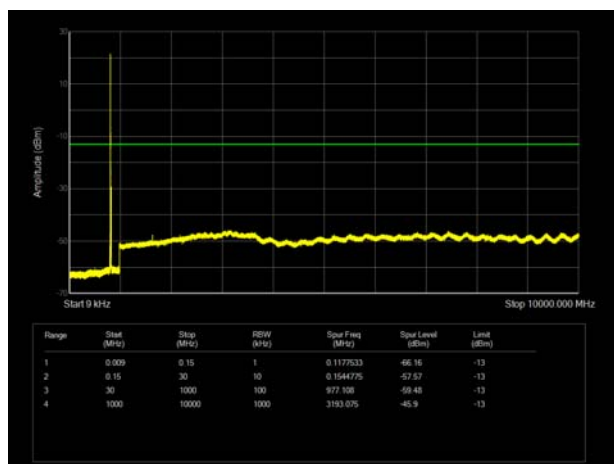


LTE Band 5 5MHz CH-Middle 9kHz~10GHz

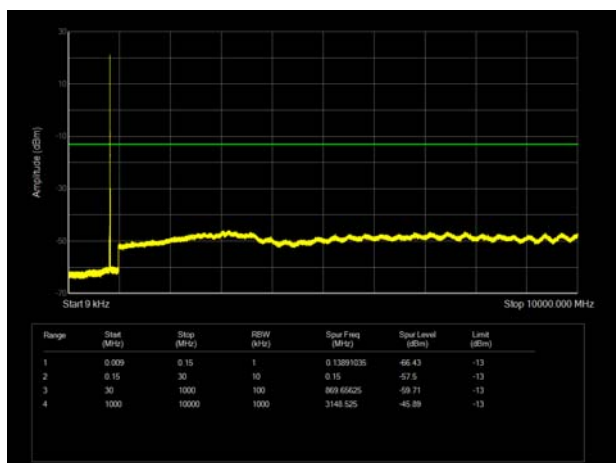


LTE Band 5 10MHz CH-Middle 9kHz~10GHz

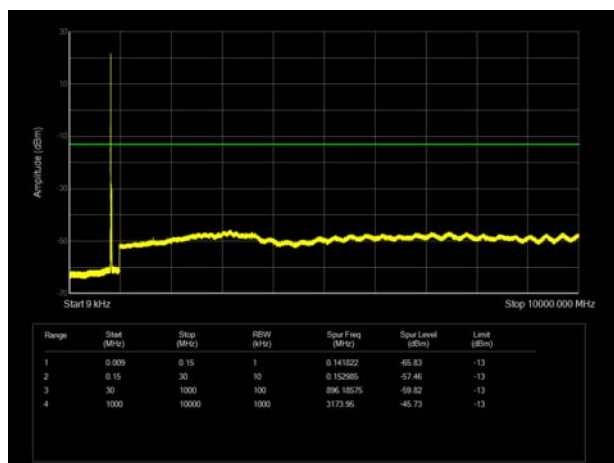

LTE Band 5 5MHz CH-High 9kHz~10GHz

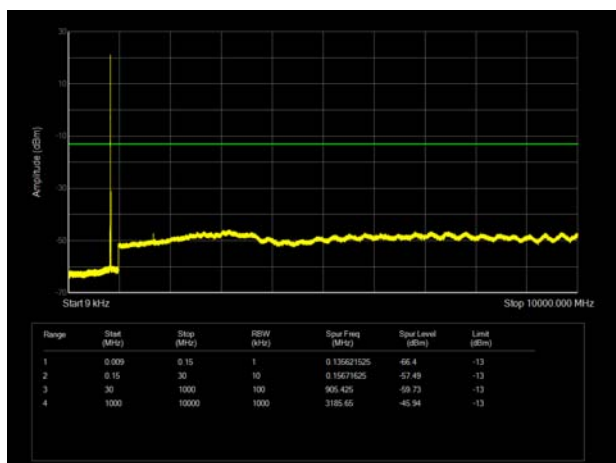

LTE Band 5 10MHz CH-High 9kHz~10GHz

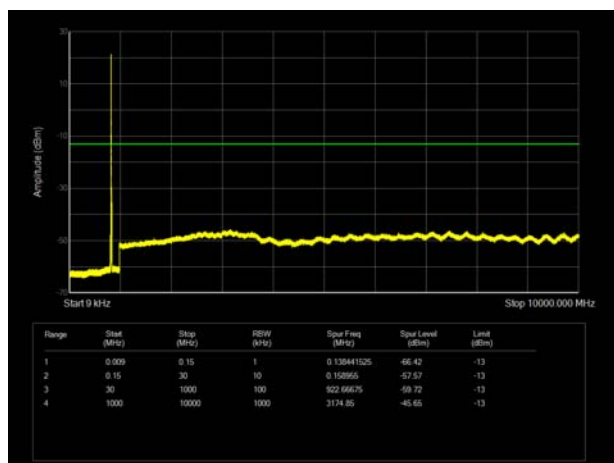

5.7. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
The measurement results are amend as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

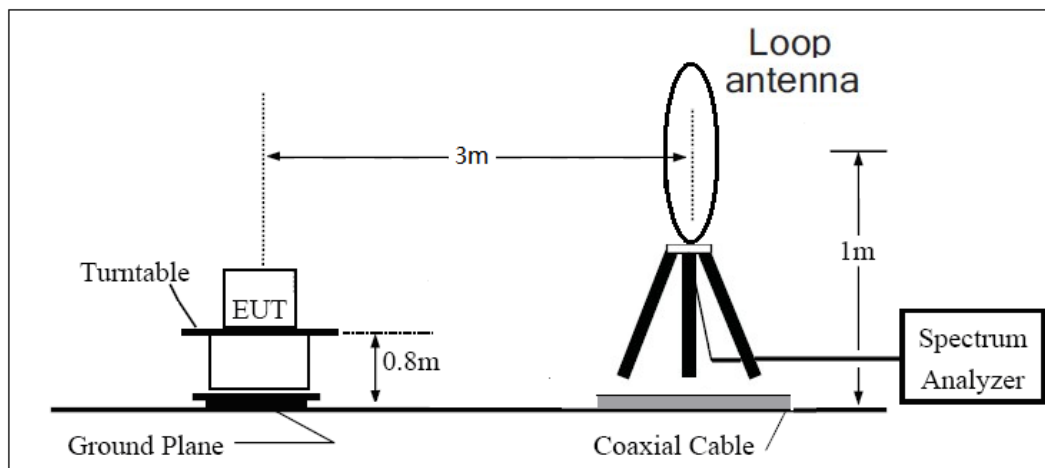

30MHz ~ 1GHz

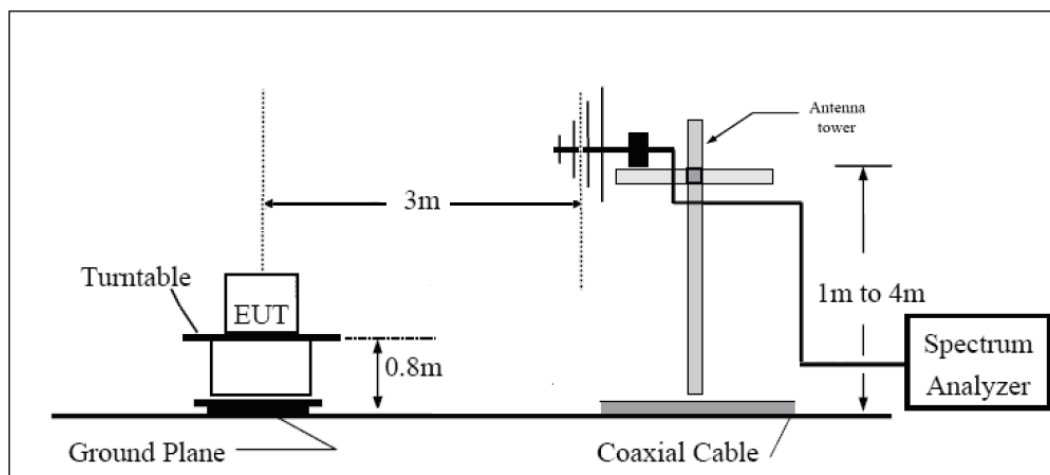

Above 1GHz

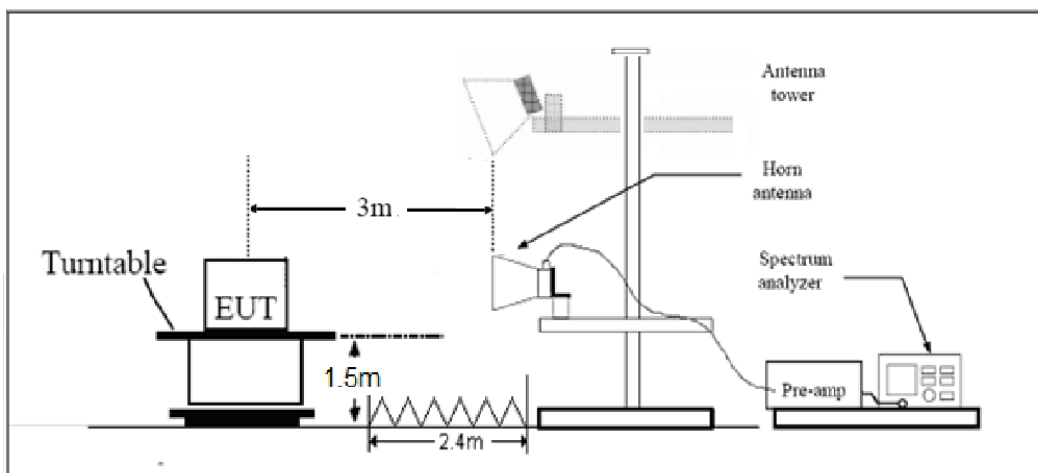



Note: Area side:2.4mX3.6m

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

GSM 850 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1648.4	-59.91	2.00	10.75	Horizontal	-53.31	-13.00	40.31	180
3	2472.6	-55.14	2.51	11.05	Horizontal	-48.75	-13.00	35.75	0
4	3346.4	-59.26	4.20	11.15	Horizontal	-54.46	-13.00	41.46	45
5	4183.0	-59.69	5.20	11.15	Horizontal	-55.89	-13.00	42.89	0
6	5019.6	-58.29	5.50	11.95	Horizontal	-53.99	-13.00	40.99	180
7	5856.2	-59.97	5.70	13.55	Horizontal	-54.27	-13.00	41.27	270
8	6692.8	-57.14	6.30	13.75	Horizontal	-51.84	-13.00	38.84	315
9	7529.4	-56.20	6.80	13.85	Horizontal	-51.30	-13.00	38.30	180
10	8366.0	-54.66	6.90	14.25	Horizontal	-49.46	-13.00	36.46	0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.

WCDMA Band V CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.2	-67.29	2.00	10.75	Horizontal	-60.69	-13.00	47.69	135
3	2509.8	-67.82	2.51	11.05	Horizontal	-61.43	-13.00	48.43	270
4	3346.4	-63.31	4.20	11.15	Horizontal	-58.51	-13.00	45.51	180
5	4183.0	-60.40	5.20	11.15	Horizontal	-56.60	-13.00	43.60	90
6	5019.6	-60.18	5.50	11.95	Horizontal	-55.88	-13.00	42.88	270
7	5856.2	-60.91	5.70	13.55	Horizontal	-55.21	-13.00	42.21	315
8	6692.8	-57.95	6.30	13.75	Horizontal	-52.65	-13.00	39.65	180
9	7529.4	-55.34	6.80	13.85	Horizontal	-50.44	-13.00	37.44	45
10	8366.0	-56.53	6.90	14.25	Horizontal	-51.33	-13.00	38.33	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-64.94	2.00	10.75	Horizontal	-58.34	-13.00	45.34	270
3	2509.5	-65.91	2.51	11.05	Horizontal	-59.52	-13.00	46.52	135
4	3346.0	-63.95	4.20	11.15	Horizontal	-59.15	-13.00	46.15	270
5	4182.5	-60.73	5.20	11.15	Horizontal	-56.93	-13.00	43.93	0
6	5019.0	-59.14	5.50	11.95	Horizontal	-54.84	-13.00	41.84	225
7	5855.5	-61.67	5.70	13.55	Horizontal	-55.97	-13.00	42.97	315
8	6692.0	-58.64	6.30	13.75	Horizontal	-53.34	-13.00	40.34	90
9	7528.5	-55.68	6.80	13.85	Horizontal	-50.78	-13.00	37.78	180
10	8365.0	-55.53	6.90	14.25	Horizontal	-50.33	-13.00	37.33	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-66.73	2.00	10.75	Horizontal	-60.13	-13.00	47.13	45
3	2509.5	-65.59	2.51	11.05	Horizontal	-59.20	-13.00	46.20	315
4	3466.2	-63.56	4.20	11.15	Horizontal	-58.76	-13.00	45.76	225
5	4215.9	-60.45	5.20	11.15	Horizontal	-56.65	-13.00	43.65	180
6	5165.6	-59.46	5.50	11.95	Horizontal	-55.16	-13.00	42.16	135
7	5815.3	-61.26	5.70	13.55	Horizontal	-55.56	-13.00	42.56	270
8	6765.0	-57.51	6.30	13.75	Horizontal	-52.21	-13.00	39.21	315
9	7614.7	-55.86	6.80	13.85	Horizontal	-50.96	-13.00	37.96	180
10	8464.4	-56.31	6.90	14.25	Horizontal	-51.11	-13.00	38.11	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



LTE Band 5 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-66.60	2.00	10.75	Horizontal	-60.00	-13.00	47.00	135
3	2509.5	-65.98	2.51	11.05	Horizontal	-59.59	-13.00	46.59	45
4	3346.0	-64.07	4.20	11.15	Horizontal	-59.27	-13.00	46.27	0
5	4182.5	-61.31	5.20	11.15	Horizontal	-57.51	-13.00	44.51	180
6	5019.0	-59.58	5.50	11.95	Horizontal	-55.28	-13.00	42.28	315
7	5855.5	-61.37	5.70	13.55	Horizontal	-55.67	-13.00	42.67	90
8	6692.0	-57.95	6.30	13.75	Horizontal	-52.65	-13.00	39.65	225
9	7528.5	-56.24	6.80	13.85	Horizontal	-51.34	-13.00	38.34	180
10	8365.0	-55.79	6.90	14.25	Horizontal	-50.59	-13.00	37.59	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2019-05-19	2020-05-18
Base Station Simulator	R&S	CMW500	113824	2020-05-17	2021-05-16
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2019-05-19	2020-05-18
Spectrum Analyzer	Key sight	N9010A	MY50210259	2020-05-17	2021-05-16
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2019-05-19	2020-05-18
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2020-05-17	2021-05-16
Signal Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
Signal generator	R&S	SMB 100A	102594	2020-05-17	2021-05-16
Signal generator	R&S	SMB 100A	102594	2020-05-18	2021-05-17
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2020-05-17	2021-05-16
Preamplifier	R&S	SCU18	102327	2020-05-18	2021-05-17
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2019-05-20	2020-05-21
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2020-05-21	2021-05-22
RF Cable	Agilent	SMA 15cm	0001	2019-12-13	2020-06-12



Software	R&S	EMC32	9.26.0	/	/
----------	-----	-------	--------	---	---

*****END OF REPORT *****