

FCC TEST REPORT (PART 24)



Applicant:	Xiaomi Communications Co., Ltd.
Address:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

Manufacturer or Supplier:	Xiaomi Communications Co., Ltd.
Address:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Product:	Mobile Phone
Brand Name:	POCO
Model Name:	2310FPCA4G
FCC ID:	2AFZZCA4G
Date of tests:	Aug. 07, 2023 ~ Sep. 23, 2023

The tests have been carried out according to the requirements of the following standard:

- FCC PART 24, Subpart E**
 FCC PART 2
 ANSI/TIA/EIA-603-D
 ANSI/TIA/EIA-603-E
 ANSI C63.26-2015

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
	
Date: Sep. 23, 2023	Date: Sep. 23, 2023

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	6
1.2 TEST SITE AND INSTRUMENTS	7
2 GENERAL INFORMATION	10
2.1 GENERAL DESCRIPTION OF EUT	10
2.2 CONFIGURATION OF SYSTEM UNDER TEST	13
2.3 DESCRIPTION OF SUPPORT UNITS	14
2.4 TEST ITEM AND TEST CONFIGURATION.....	14
2.5 EUT OPERATING CONDITIONS	17
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	17
3 TEST TYPES AND RESULTS	18
3.1 OUTPUT POWER MEASUREMENT	18
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	18
3.1.2 TEST PROCEDURES	18
3.1.3 TEST SETUP	19
3.1.4 TEST RESULTS	19
3.2 FREQUENCY STABILITY MEASUREMENT	47
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	47
3.2.2 TEST PROCEDURE	47
3.2.3 TEST SETUP	47
3.2.4 TEST RESULTS	48
3.3 OCCUPIED BANDWIDTH MEASUREMENT.....	49
3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	49
3.3.2 TEST SETUP	49
3.3.3 TEST PROCEDURES	49
3.3.4 TEST RESULTS	50
3.4 BAND EDGE MEASUREMENTC	51
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	51
3.4.2 TEST SETUP	51
3.4.3 TEST PROCEDURES.....	52
3.4.4. TEST RESULTS	53
3.5 CONDUCTED SPURIOUS EMISSIONS.....	54
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	54
3.5.2 TEST PROCEDURE	54
3.5.3 TEST SETUP	54
3.5.4 TEST RESULTS	55
3.6 RADIATED EMISSION MEASUREMENT	56
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	56
3.6.2 TEST PROCEDURES.....	56



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

3.6.3 DEVIATION FROM TEST STANDARD	56
3.6.4 TEST SETUP	57
3.6.5 TEST RESULTS	59
3.7 PEAK TO AVERAGE RATIO.....	95
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	95
3.7.2 TEST SETUP	95
3.7.3 TEST PROCEDURES	95
3.7.4 TEST RESULTS	96
4 PHOTOGRAPHS OF THE TEST CONFIGURATION	97
5 INFORMATION ON THE TESTING LABORATORIES	98
6 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	99
7 APPENDIX	100
GSM1900	100
WCDMA BAND2	119
LTE BAND2	133



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P23080017RF05	Original release	Sep. 23, 2023



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	LAB
§2.1046	Conducted Output Power	Compliance	A
§24.232(c)	Equivalent Isotropic Radiated Power	Compliance	A
§2.1055 §24.235	Frequency Stability	Compliance	A
§2.1049	Occupied Bandwidth	Compliance	A
§24.232(d)	Peak to average ratio	Compliance	A
§24.238(a)(b)	Band Edge Measurements	Compliance	A
§2.1051 §24.238(a)(b)	Conducted Spurious Emissions	Compliance	A
§2.1053 §24.238(a)(b)	Radiated Spurious Emissions	Compliance	A/B

Note: This report refers to the data of W7L-P23080006RF05 (model: 23100RN82L), the difference of 23100RN82L and 2310FPCA4G is model and FCC-ID, 2310FPCA4G remove some components and LTE B13&26, add NFC function. This report verifies power and RSE worse case. So this report updates power and RSE worse case (EDGE 1900) .

Test Lab Information Reference:

Lab A

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

Lab Address:

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Accredited Test Lab Cert 3939.01

The FCC Site Registration No. is 525120; The Designation No. is CN1171.

Lab B:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zhuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01

The FCC Site Registration No. is 434559; The Designation No. is CN1325.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions (9KHz~30MHz)	$\pm 2.68\text{dB}$
Radiated emissions & Radiated Power (30MHz~1GHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GHz ~6GHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GHz ~18GHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GHz ~40GHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$
Peak to average ratio	$\pm 0.76\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 28,23	Mar. 27,24
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.10,23	May.09,24
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.03,22	Sep.02,23
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.02,23	Sep.01,24
Bilog Antenna	ETS-LINDGRE N	3143B	00161965	Feb. 18,23	Feb. 17,24
Horn Antenna	ETS-LINDGRE N	3117	00168692	Feb. 18,23	Feb. 17,24
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K- SG/QMS-00361	15433	Sep.04, 22	Sep.03, 23
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K- SG/QMS-00361	15433	Sep.03, 23	Sep.02, 24
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 14,23	Feb. 13,24
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 06,23	May. 05,24
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.10,23	May.09,24
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 17,23	Feb.16,24
3m Semi-anechoic Chamber	ETS-LINDGRE N	9m*6m*6m	Euroshieldpn- CT0001143-121 6	May. 22, 23	May. 21,26
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120	3.1.36	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	50HF-010-SMA	May. 06,23	May. 05,24
Power Meter	Anritsu	ML2495A	1506002	Feb. 14,23	Feb. 13,24
Power Sensor	Anritsu	MA2411B	1339352	Feb. 14,23	Feb. 13,24
Temperature Chamber	ESPEC	SH-242	93000855	May. 06,23	May. 05,24
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 14,23	Feb. 13,24
Base station R&S CMW500	Rohde&Schwa rz	CMW500	153085	May.10,23	May.09,24
DC Source	Kikusui/JP	PMX18-5A	N/A	Aug. 12,22	Aug. 11,23
DC Source	Kikusui/JP	PMX18-5A	N/A	Aug. 11,23	Aug. 10,24

- NOTE:** 1. The calibration interval of the above test instruments is 12 months or 36 months, and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,22	Aug.29,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Vector Signal Generator	R&S	SMBV100B	102176	Feb.16,22	Feb.15,24
Signal Generator	R&S	SMB100A	182185	Feb.16,22	Feb.15,24
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESR26	101734	Feb.25,22	Feb.24,24
EMI TEST Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.28,22	Feb.27,24
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.23,22	Feb.22,24
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,22	Aug.21,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,22	Feb.22,24
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.27,22	Jun.26,24
Test Software	EMC32	EMC32	N/A	N/A	N/A
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	Oct.01,22	Sep.30,24
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W12.14	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.28,23	Oct.27,23
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.28,23	Oct.27,23
Temperature Chamber	votsch	VT4002	58566078100050	May.31,22	May.30,24



Test Report No.: W7L-P23080017RF05

- NOTE:**
1. The calibration interval of the above test instruments is 6 months or 12 months or 36 months, and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 434559; The Designation No. is CN1325.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Mobile Phone	
BRAND NAME	POCO	
MODEL NAME	2310FPCA4G	
MODULATION TYPE	GSM/GPRS: GMSK EDGE: 8PSK WCDMA: BPSK, QPSK LTE Band 2: QPSK, 16QAM, 64QAM	
FREQUENCY RANGE	GSM, EDGE	1850.2MHz ~ 1909.8MHz
	WCDMA	1852.4MHz ~ 1907.6MHz
	LTE Band 2 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1909.3MHz
	LTE Band 2 Channel Bandwidth: 3MHz	1851.5MHz ~ 1908.5MHz
	LTE Band 2 Channel Bandwidth: 5MHz	1852.5MHz ~ 1907.5MHz
	LTE Band 2 Channel Bandwidth: 10MHz	1855.0MHz ~ 1905.0MHz
	LTE Band 2 Channel Bandwidth: 15MHz	1857.5MHz ~ 1902.5MHz
	LTE Band 2 Channel Bandwidth: 20MHz	1860.0MHz ~ 1900.0MHz
	MAX. EIRP POWER	GSM
EDGE		169.82mW
WCDMA		105.2mW
LTE Band 2 Channel Bandwidth: 1.4MHz		100.46mW
LTE Band 2 Channel Bandwidth: 3MHz		101.39mW
LTE Band 2 Channel Bandwidth: 5MHz		100mW
LTE Band 2 Channel Bandwidth: 10MHz		100.69mW
LTE Band 2 Channel Bandwidth: 15MHz		102.09mW
LTE Band 2 Channel Bandwidth: 20MHz		102.57mW



EMISSION DESIGNATOR	GSM	251KGXW
	EDGE	243KG7W
	WCDMA	4M19F9W
	LTE Band 2 Channel Bandwidth: 1.4MHz	QPSK: 1M09G7D
		16QAM: 1M10W7D
		64QAM: 1M10W7D
	LTE Band 2 Channel Bandwidth: 3MHz	QPSK: 2M69G7D
		16QAM: 2M69W7D
		64QAM: 2M69W7D
	LTE Band 2 Channel Bandwidth: 5MHz	QPSK: 4M49G7D
		16QAM: 4M50W7D
		64QAM: 4M50W7D
	LTE Band 2 Channel Bandwidth: 10MHz	QPSK: 9M00G7D
		16QAM: 8M99W7D
64QAM: 9M00W7D		
LTE Band 2 Channel Bandwidth: 15MHz	QPSK: 13M5G7D	
	16QAM: 13M5W7D	
	64QAM: 13M5W7D	
LTE Band 2 Channel Bandwidth: 20MHz	QPSK: 18M0G7D	
	16QAM: 17M9W7D	
	64QAM: 18M0W7D	
ANTENNA TYPE	ANT 0(UP): PIFA Antenna with -4.2dBi gain for GSM1900/ WCDMA II/LTE B2 ANT 1(DOWN): PIFA Antenna with -4.7dBi gain for GSM1900/ WCDMA II/LTE B2	
HW VERSION	LLDM572	
SW VERSION	MIUI 14	
IMEI	863772060015765	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	USB cable1: non-shielded cable, with w/o ferrite core, 1.0 meter USB cable2: non-shielded cable, with w/o ferrite core, 1.0 meter	
EXTREME TEMPERATURE	0-40 °C	
EXTREME VOLTAGE	3.6V - 4.25V	



NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Physically, the EUT provides two completed transmitters and two receivers.





MODULATION MODE	TX FUNCTION
GSM/GPRS/EDGE	2TX/2RX
WCDMA	2TX/2RX
LTE	2TX/2RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in the test report.



2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

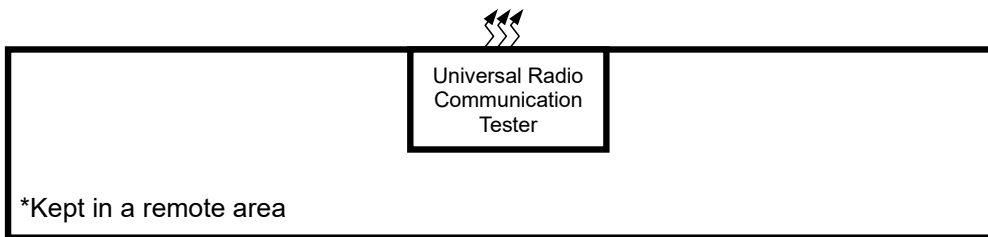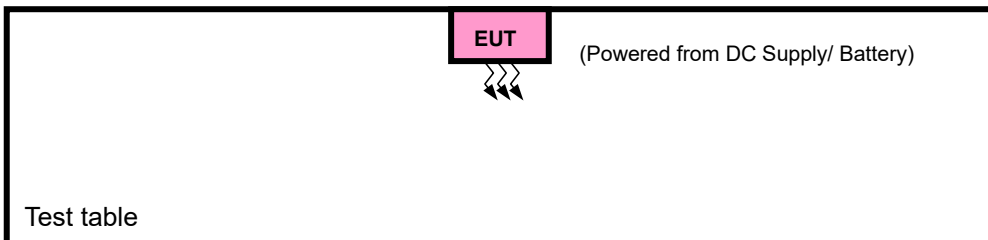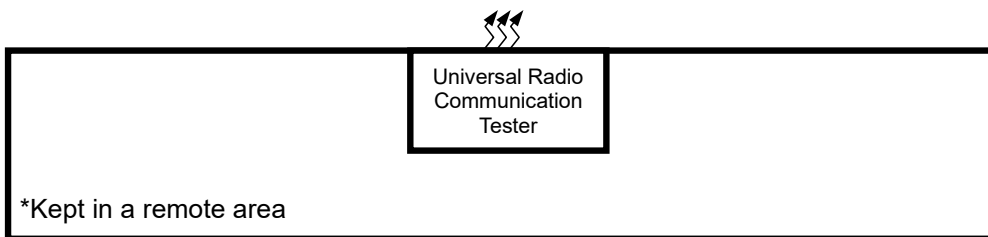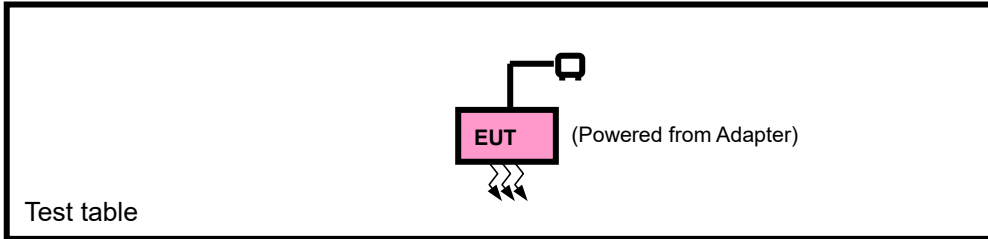



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	Kikusui/JP	PMX18-5A	0000001	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in EIRP and radiated emission was found when positioned on X-plane for GSM/EDGE/ WCDMA/ LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter with GSM or WCDMA or LTE link
B	EUT + DC source with GSM or WCDMA or LTE link

GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	EIRP	512 to 810	512, 661, 810	GSM, EDGE
B	FREQUENCY STABILITY	512 to 810	512, 661, 810	GSM, EDGE
A	OCCUPIED BANDWIDTH	512 to 810	512, 661, 810	GSM, EDGE
A	PEAK TO AVERAGE RATIO	512 to 810	512, 661, 810	GSM, EDGE
A	BAND EDGE	512 to 810	512, 810	GSM, EDGE
A	CONDUCTED EMISSION	512 to 810	512, 661, 810	GSM, EDGE
A	RADIATED EMISSION	512 to 810	512, 661, 810	GSM, EDGE



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

WCDMA

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
B	FREQUENCY STABILITY	9262 to 9538	9262, 9400, 9538	WCDMA
A	OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA
A	PEAK TO AVERAGE RATIO	9262 to 9538	9262, 9400, 9538	WCDMA
A	BAND EDGE	9262 to 9538	9262, 9538	WCDMA
A	CONDCUDED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA
A	RADIATED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA

LTE BAND 2 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	18700 to 19100	18700, 18900, 19100	20MHz	QPSK	100 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM, 64QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM, 64QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM, 64QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM, 64QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM, 64QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM, 64QAM	100 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset

A	BAND EDGE	18607 to 19193	18607	1.4MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
			19193	1.4MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset		
		18615 to 19185	18615	3MHz	QPSK, 16QAM, 64QAM	1 RB / 5 RB Offset		
			19185	3MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset		
		18625 to 19175	18625	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
			19175	5MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset		
		18650 to 19150	18650	10MHz	QPSK, 16QAM, 64QAM	1 RB / 14 RB Offset		
			19150	10MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset		
		18675 to 19125	18675	15MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
			19125	15MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset		
		18700 to 19100	18700	20MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset		
			19100	20MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset		
		A	CONDCUDETED EMISSION	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
				18615 to 19185	18615, 18900, 19185	3MHz	QPSK	1 RB / 0 RB Offset
18625 to 19175	18625, 18900, 19175			5MHz	QPSK	1 RB / 0 RB Offset		
18650 to 19150	18650, 18900, 19150			10MHz	QPSK	1 RB / 0 RB Offset		
18675 to 19125	18675, 18900, 19125			15MHz	QPSK	1 RB / 0 RB Offset		
18700 to 19100	18700, 18900, 19100			20MHz	QPSK	1 RB / 0 RB Offset		
A	RADIATED EMISSION	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset		
		18615 to 19185	18900	3MHz	QPSK	1 RB / 0 RB Offset		
		18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset		
		18650 to 19150	18900	10MHz	QPSK	1 RB / 0 RB Offset		
		18675 to 19125	18900	15MHz	QPSK	1 RB / 0 RB Offset		
		18700 to 19100	18900	20MHz	QPSK	1 RB / 0 RB Offset		

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	25deg. C, 57%RH	DC 5V By Adapter	Jace Hu
FREQUENCY STABILITY	See Note	DC 3.6/3.84/4.25 By DC Source	James Fu
OCCUPIED BANDWIDTH	23deg. C, 61%RH	DC 5V By Adapter	James Fu
PEAK TO AVERAGE RATIO	23deg. C, 61%RH	DC 5V By Adapter	James Fu
BAND EDGE	23deg. C, 61%RH	DC 5V By Adapter	James Fu
CONDCUDED EMISSION	23deg. C, 61%RH	DC 5V By Adapter	James Fu
RADIATED EMISSION	23deg. C, 70%RH	DC 5V By Adapter	Jace Hu

Note: LV = Low voltage (3.6V); NV = Normal voltage (3.84V); HV= High voltage (4.25V).
NT = Normal temperature (25°C)

2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.



3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP.

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_{T} = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_{C} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:


The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Ant 0(UP):

Band	GSM1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
GSM	29.61	29.60	29.53
GPRS (GMSK, 1Tx-slot)	29.60	29.58	29.52
GPRS (GMSK, 2Tx-slot)	28.94	28.91	28.82
GPRS (GMSK, 3Tx-slot)	27.23	27.21	27.10
GPRS (GMSK, 4Tx-slot)	26.28	26.26	26.16
EDGE (8PSK, 1Tx-slot)	26.50	25.97	26.14
EDGE (8PSK, 2Tx-slot)	23.10	22.88	22.89
EDGE (8PSK, 3Tx-slot)	20.71	20.56	20.52
EDGE (8PSK, 4Tx-slot)	19.76	19.48	19.54

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880	1907.6
RMC 12.2K	24.40	24.42	24.36
HSDPA Subtest-1	23.45	23.43	23.30
HSDPA Subtest-2	23.45	23.41	23.26
HSDPA Subtest-3	22.44	22.43	22.32
HSDPA Subtest-4	22.44	22.51	22.35
DC-HSDPA Subtest-1	23.45	23.44	23.26
DC-HSDPA Subtest-2	23.41	23.43	23.31
DC-HSDPA Subtest-3	22.47	22.52	22.28
DC-HSDPA Subtest-4	22.37	22.46	22.26
HSUPA Subtest-1	21.93	21.93	21.78
HSUPA Subtest-2	21.41	21.51	21.29
HSUPA Subtest-3	22.44	22.49	22.35
HSUPA Subtest-4	20.96	20.96	20.77
HSUPA Subtest-5	22.46	22.44	22.34
HSPA+ Subtest-1	21.46	21.46	21.31



LTE BAND 2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1909.3 MHz
2/ 1.4	QPSK	1	0	24.10	24.02	24.10
		1	2	24.22	24.16	24.21
		1	5	23.88	23.79	23.90
		3	0	24.15	24.08	24.20
		3	1	24.21	24.15	24.12
		3	3	24.08	24.04	24.10
		6	0	23.23	23.19	23.10
	16QAM	1	0	23.24	23.24	23.14
		1	2	23.46	23.27	23.29
		1	5	23.17	22.98	23.05
		3	0	23.13	23.09	23.17
		3	1	23.18	23.14	23.10
		3	3	23.12	23.06	23.06
		6	0	22.12	22.14	22.02
	64QAM	1	0	22.07	21.99	22.02
		1	2	22.25	22.20	22.17
		1	5	21.92	21.82	21.87
		3	0	22.11	21.94	22.03
		3	1	22.06	22.01	22.01
		3	3	22.00	21.96	21.96
		6	0	21.05	20.93	21.00



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

Band/BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz
2 / 3	QPSK	1	0	24.16	24.06	24.12
		1	7	24.22	24.11	24.26
		1	14	23.84	23.86	23.90
		8	0	23.10	23.10	23.12
		8	3	23.27	23.10	23.18
		8	7	23.18	23.05	23.11
		15	0	23.14	23.10	23.16
	16QAM	1	0	23.28	23.25	23.13
		1	7	23.43	23.30	23.24
		1	14	23.15	23.03	23.07
		8	0	22.12	22.01	22.06
		8	3	22.16	22.08	22.18
		8	7	22.08	21.99	22.09
		15	0	22.08	22.07	22.02
	64QAM	1	0	22.06	22.01	21.95
		1	7	22.16	22.14	22.21
		1	14	21.95	21.82	21.88
		8	0	21.09	21.05	21.10
		8	3	21.10	21.01	20.93
		8	7	20.99	20.92	20.97
		15	0	21.01	20.94	20.96



Band/BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz
2 / 5	QPSK	1	0	24.14	24.01	24.09
		1	12	24.20	24.16	24.16
		1	24	23.92	23.84	23.85
		12	0	23.17	23.09	23.23
		12	6	23.18	23.07	23.12
		12	13	23.09	22.99	23.14
		25	0	23.22	23.17	23.10
	16QAM	1	0	23.23	23.15	23.20
		1	12	23.48	23.28	23.22
		1	24	23.14	23.03	23.00
		12	0	22.15	22.07	22.15
		12	6	22.10	22.15	22.08
		12	13	22.02	22.06	22.08
		25	0	22.08	22.09	22.04
	64QAM	1	0	22.04	22.03	22.05
		1	12	22.23	22.20	22.20
		1	24	21.93	21.84	21.85
		12	0	21.06	20.98	21.02
		12	6	21.04	20.97	21.02
		12	13	20.90	20.90	20.87
		25	0	20.98	20.98	20.93



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

Band/BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz
2/ 10	QPSK	1	0	24.13	24.05	24.09
		1	24	24.23	24.10	24.23
		1	49	23.89	23.85	23.88
		25	0	23.15	23.09	23.19
		25	12	23.26	23.12	23.09
		25	25	23.18	23.02	23.10
		50	0	23.15	23.08	23.15
	16QAM	1	0	23.25	23.16	23.12
		1	24	23.38	23.23	23.31
		1	49	23.14	23.08	23.06
		25	0	22.08	22.01	22.12
		25	12	22.19	22.14	22.16
		25	25	22.07	22.00	22.04
		50	0	22.14	22.05	22.06
	64QAM	1	0	22.11	22.02	21.99
		1	24	22.15	22.11	22.12
		1	49	22.00	21.89	21.95
		25	0	21.08	20.99	21.03
		25	12	21.08	21.00	20.96
		25	25	20.91	20.90	20.94
		50	0	21.04	20.92	21.04



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

Band/BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz
2/ 15	QPSK	1	0	24.06	24.07	24.13
		1	37	24.29	24.15	24.28
		1	74	23.86	23.84	23.91
		36	0	23.18	23.14	23.11
		36	19	23.29	23.15	23.19
		36	39	23.17	23.02	23.06
		75	0	23.19	23.12	23.17
	16QAM	1	0	23.25	23.23	23.10
		1	37	23.43	23.25	23.26
		1	74	23.20	23.07	23.08
		36	0	22.16	22.01	22.07
		36	19	22.10	22.14	22.10
		36	39	22.04	22.09	22.09
		75	0	22.15	22.16	22.00
	64QAM	1	0	22.05	22.06	22.02
		1	37	22.18	22.10	22.11
		1	74	21.92	21.91	21.88
		36	0	21.09	21.00	21.02
		36	19	21.05	21.04	20.97
		36	39	20.95	20.98	20.96
		75	0	21.04	20.91	21.01



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

Band/BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz
2/ 20	QPSK	1	0	24.17	24.12	24.14
		1	50	24.26	24.20	24.31
		1	99	23.93	23.87	23.93
		50	0	23.20	23.16	23.23
		50	25	23.30	23.15	23.20
		50	50	23.19	23.08	23.15
		100	0	23.26	23.20	23.17
	16QAM	1	0	23.29	23.25	23.22
		1	50	23.48	23.34	23.34
		1	99	23.24	23.10	23.10
		50	0	22.19	22.11	22.17
		50	25	22.20	22.19	22.18
		50	50	22.14	22.10	22.10
		100	0	22.16	22.16	22.11
	64QAM	1	0	22.12	22.08	22.05
		1	50	22.27	22.22	22.21
		1	99	22.02	21.92	21.95
		50	0	21.16	21.05	21.12
		50	25	21.13	21.07	21.04
		50	50	21.00	20.99	20.99
		100	0	21.06	20.99	21.05



Ant 1(DOWN):

Band	GSM1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
GSM	29.75	29.78	29.70
GPRS (GMSK, 1Tx-slot)	29.73	29.76	29.69
GPRS (GMSK, 2Tx-slot)	29.04	29.05	28.98
GPRS (GMSK, 3Tx-slot)	27.32	27.33	27.25
GPRS (GMSK, 4Tx-slot)	26.26	26.27	26.21
EDGE (8PSK, 1Tx-slot)	26.23	26.32	25.94
EDGE (8PSK, 2Tx-slot)	24.99	25.14	24.76
EDGE (8PSK, 3Tx-slot)	22.78	22.80	22.44
EDGE (8PSK, 4Tx-slot)	21.54	21.61	21.29

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880	1907.6
RMC 12.2K	24.53	24.49	24.50
HSDPA Subtest-1	23.43	23.49	23.43
HSDPA Subtest-2	23.43	23.48	23.42
HSDPA Subtest-3	22.48	22.40	22.49
HSDPA Subtest-4	22.52	22.47	22.50
DC-HSDPA Subtest-1	23.44	23.42	23.42
DC-HSDPA Subtest-2	23.52	23.44	23.39
DC-HSDPA Subtest-3	22.48	22.47	22.41
DC-HSDPA Subtest-4	22.51	22.44	22.40
HSUPA Subtest-1	22.02	21.96	21.96
HSUPA Subtest-2	21.45	21.48	21.45
HSUPA Subtest-3	22.43	22.48	22.43
HSUPA Subtest-4	21.02	20.90	20.97
HSUPA Subtest-5	22.50	22.44	22.46
HSPA+ Subtest-1	21.43	21.49	21.48



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

LTE BAND 2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1909.3 MHz
2/ 1.4	QPSK	1	0	23.78	23.74	23.73
		1	2	23.99	23.94	23.90
		1	5	23.60	23.54	23.47
		3	0	24.01	23.97	23.92
		3	1	23.98	23.89	23.88
		3	3	23.92	23.75	23.81
		6	0	22.88	22.86	22.81
	16QAM	1	0	23.06	22.89	22.85
		1	2	23.16	23.00	23.00
		1	5	22.73	22.72	22.58
		3	0	22.95	22.97	22.84
		3	1	22.96	22.84	22.83
		3	3	22.84	22.72	22.83
		6	0	21.94	21.92	21.85
	64QAM	1	0	21.77	21.74	21.77
		1	2	21.88	21.79	21.86
		1	5	21.72	21.67	21.59
		3	0	21.87	21.71	21.67
		3	1	21.69	21.73	21.58
		3	3	21.68	21.68	21.56
		6	0	20.71	20.61	20.68



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

Band/BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz
2 / 3	QPSK	1	0	23.78	23.71	23.76
		1	7	23.99	23.94	23.92
		1	14	23.65	23.55	23.49
		8	0	23.03	22.85	22.89
		8	3	23.03	22.86	22.87
		8	7	22.83	22.70	22.78
		15	0	22.93	22.82	22.87
	16QAM	1	0	22.97	22.92	22.84
		1	7	23.14	22.96	22.98
		1	14	22.77	22.75	22.65
		8	0	21.98	21.89	21.91
		8	3	21.94	21.88	21.80
		8	7	21.84	21.79	21.78
		15	0	21.95	21.91	21.88
	64QAM	1	0	21.73	21.79	21.71
		1	7	21.88	21.79	21.81
		1	14	21.63	21.56	21.62
		8	0	20.83	20.73	20.61
		8	3	20.73	20.79	20.66
		8	7	20.70	20.70	20.53
		15	0	20.73	20.71	20.57



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

Band/BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz
2 / 5	QPSK	1	0	23.86	23.69	23.70
		1	12	23.89	23.88	23.86
		1	24	23.66	23.49	23.48
		12	0	23.04	22.91	22.91
		12	6	22.94	22.85	22.94
		12	13	22.93	22.74	22.73
		25	0	22.88	22.79	22.90
	16QAM	1	0	23.08	22.97	22.88
		1	12	23.18	23.01	22.97
		1	24	22.75	22.78	22.63
		12	0	21.94	21.92	21.84
		12	6	21.95	21.95	21.85
		12	13	21.91	21.76	21.76
		25	0	21.88	21.87	21.81
	64QAM	1	0	21.80	21.77	21.77
		1	12	21.98	21.79	21.81
		1	24	21.70	21.57	21.55
		12	0	20.81	20.71	20.67
		12	6	20.73	20.74	20.62
		12	13	20.62	20.67	20.59
		25	0	20.75	20.64	20.59



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

Band/BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz
2/ 10	QPSK	1	0	23.78	23.78	23.72
		1	24	24.00	23.92	23.88
		1	49	23.61	23.54	23.48
		25	0	22.98	22.95	22.89
		25	12	22.96	22.80	22.84
		25	25	22.88	22.73	22.82
		50	0	22.93	22.91	22.85
	16QAM	1	0	23.05	22.89	22.81
		1	24	23.21	23.01	23.00
		1	49	22.75	22.78	22.60
		25	0	21.98	21.98	21.92
		25	12	21.84	21.91	21.89
		25	25	21.93	21.74	21.80
		50	0	21.96	21.84	21.83
	64QAM	1	0	21.83	21.83	21.69
		1	24	21.96	21.82	21.79
		1	49	21.61	21.65	21.51
		25	0	20.84	20.68	20.68
		25	12	20.74	20.81	20.64
		25	25	20.67	20.68	20.61
		50	0	20.74	20.69	20.66



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

Band/BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz
2/ 15	QPSK	1	0	23.88	23.78	23.72
		1	37	24.00	23.88	23.94
		1	74	23.57	23.61	23.48
		36	0	23.06	22.86	22.85
		36	19	22.94	22.85	22.90
		36	39	22.84	22.77	22.79
		75	0	22.89	22.91	22.81
	16QAM	1	0	23.03	22.94	22.87
		1	37	23.14	23.04	23.04
		1	74	22.77	22.80	22.60
		36	0	21.94	21.88	21.87
		36	19	21.87	21.94	21.91
		36	39	21.91	21.72	21.83
		75	0	21.94	21.84	21.91
	64QAM	1	0	21.84	21.76	21.75
		1	37	21.87	21.84	21.82
		1	74	21.69	21.59	21.59
		36	0	20.76	20.70	20.60
		36	19	20.70	20.81	20.62
		36	39	20.72	20.65	20.53
		75	0	20.74	20.60	20.65



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

Band/BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz
2/ 20	QPSK	1	0	23.89	23.79	23.76
		1	50	24.01	23.95	23.97
		1	99	23.68	23.61	23.57
		50	0	23.07	22.97	22.94
		50	25	23.03	22.91	22.94
		50	50	22.93	22.80	22.83
		100	0	22.99	22.91	22.93
	16QAM	1	0	23.09	22.98	22.91
		1	50	23.21	23.07	23.05
		1	99	22.80	22.81	22.68
		50	0	21.99	21.99	21.93
		50	25	21.96	21.96	21.91
		50	50	21.94	21.83	21.85
		100	0	21.96	21.94	21.93
	64QAM	1	0	21.85	21.84	21.77
		1	50	21.99	21.85	21.89
		1	99	21.72	21.68	21.63
		50	0	20.87	20.75	20.72
		50	25	20.77	20.81	20.69
		50	50	20.73	20.71	20.61
		100	0	20.82	20.71	20.69



EIRP POWER (dBm)

Ant 0(UP):

GSM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	29.61	-4.2	25.41	347.54	2
661	1880.0	29.6	-4.2	25.4	346.74	2
810	1909.8	29.53	-4.2	25.33	341.19	2

EDGE

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	26.5	-4.2	22.3	169.82	2
661	1880.0	25.97	-4.2	21.77	150.31	2
810	1909.8	26.14	-4.2	21.94	156.31	2

WCDMA

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
9262	1852.4	24.4	-4.2	20.2	104.71	2
9400	1880	24.42	-4.2	20.22	105.2	2
9538	1907.6	24.36	-4.2	20.16	103.75	2



LTE BAND 2

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	24.22	-4.2	20.02	100.46	2
18900	1880.0	24.16	-4.2	19.96	99.08	2
19193	1909.3	24.21	-4.2	20.01	100.23	2

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	23.46	-4.2	19.26	84.33	2
18900	1880.0	23.27	-4.2	19.07	80.72	2
19193	1909.3	23.29	-4.2	19.09	81.1	2

CHANNEL BANDWIDTH: 1.4MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.25	-4.2	18.05	63.83	2
18900	1880.0	22.2	-4.2	18	63.1	2
19193	1908.3	22.17	-4.2	17.97	62.66	2



CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	24.22	-4.2	20.02	100.46	2
18900	1880.0	24.11	-4.2	19.91	97.95	2
19185	1908.5	24.26	-4.2	20.06	101.39	2

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	23.43	-4.2	19.23	83.75	2
18900	1880.0	23.3	-4.2	19.1	81.28	2
19185	1908.5	23.24	-4.2	19.04	80.17	2

CHANNEL BANDWIDTH: 3MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.16	-4.2	17.96	62.52	2
18900	1880.0	22.14	-4.2	17.94	62.23	2
19185	1908.5	22.21	-4.2	18.01	63.24	2



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	24.2	-4.2	20	100	2
18900	1880.0	24.16	-4.2	19.96	99.08	2
19175	1907.5	24.16	-4.2	19.96	99.08	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	23.48	-4.2	19.28	84.72	2
18900	1880.0	23.28	-4.2	19.08	80.91	2
19175	1907.5	23.22	-4.2	19.02	79.8	2

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.23	-4.2	18.03	63.53	2
18900	1880.0	22.2	-4.2	18	63.1	2
19175	1907.5	22.2	-4.2	18	63.1	2



CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	24.23	-4.2	20.03	100.69	2
18900	1880.0	24.1	-4.2	19.9	97.72	2
19150	1905.0	24.23	-4.2	20.03	100.69	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	23.38	-4.2	19.18	82.79	2
18900	1880.0	23.23	-4.2	19.03	79.98	2
19150	1905.0	23.31	-4.2	19.11	81.47	2

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	22.15	-4.2	17.95	62.37	2
18900	1880.0	22.11	-4.2	17.91	61.8	2
19150	1905.0	22.12	-4.2	17.92	61.94	2



CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	24.29	-4.2	20.09	102.09	2
18900	1880.0	24.15	-4.2	19.95	98.86	2
19125	1902.5	24.28	-4.2	20.08	101.86	2

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	23.43	-4.2	19.23	83.75	2
18900	1880.0	23.25	-4.2	19.05	80.35	2
19125	1902.5	23.26	-4.2	19.06	80.54	2

CHANNEL BANDWIDTH: 15MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.18	-4.2	17.98	62.81	2
18900	1880.0	22.1	-4.2	17.9	61.66	2
19125	1902.5	22.11	-4.2	17.91	61.8	2



CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	24.26	-4.2	20.06	101.39	2
18900	1880	24.2	-4.2	20	100	2
19100	1900	24.31	-4.2	20.11	102.57	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	23.48	-4.2	19.28	84.72	2
18900	1880	23.34	-4.2	19.14	82.04	2
19100	1900	23.34	-4.2	19.14	82.04	2

CHANNEL BANDWIDTH: 20MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	22.27	-4.2	18.07	64.12	2
18900	1880	22.22	-4.2	18.02	63.39	2
19100	1900	22.21	-4.2	18.01	63.24	2



Ant 1(DOWN):

GSM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	29.75	-4.7	25.05	319.89	2
661	1880.0	29.72	-4.7	25.02	317.69	2
810	1909.8	29.7	-4.7	25	316.23	2

EDGE

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	26.23	-4.7	21.53	142.23	2
661	1880.0	26.32	-4.7	21.62	145.21	2
810	1909.8	25.94	-4.7	21.24	133.05	2

WCDMA

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
9262	1852.4	24.53	-4.7	19.83	96.16	2
9400	1880	24.49	-4.7	19.79	95.28	2
9538	1907.6	24.5	-4.7	19.8	95.5	2



LTE BAND 2

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	24.29	-4.7	19.59	90.99	2
18900	1880.0	24.25	-4.7	19.55	90.16	2
19193	1909.3	24.2	-4.7	19.5	89.13	2

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	23.44	-4.7	18.74	74.82	2
18900	1880.0	23.28	-4.7	18.58	72.11	2
19193	1909.3	23.28	-4.7	18.58	72.11	2

CHANNEL BANDWIDTH: 1.4MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.16	-4.7	17.46	55.72	2
18900	1880.0	22.07	-4.7	17.37	54.58	2
19193	1908.3	22.14	-4.7	17.44	55.46	2



CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	24.27	-4.7	19.57	90.57	2
18900	1880.0	24.22	-4.7	19.52	89.54	2
19185	1908.5	24.2	-4.7	19.5	89.13	2

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	23.42	-4.7	18.72	74.47	2
18900	1880.0	23.24	-4.7	18.54	71.45	2
19185	1908.5	23.26	-4.7	18.56	71.78	2

CHANNEL BANDWIDTH: 3MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.16	-4.7	17.46	55.72	2
18900	1880.0	22.07	-4.7	17.37	54.58	2
19185	1908.5	22.09	-4.7	17.39	54.83	2



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	24.17	-4.7	19.47	88.51	2
18900	1880.0	24.16	-4.7	19.46	88.31	2
19175	1907.5	24.14	-4.7	19.44	87.9	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	23.46	-4.7	18.76	75.16	2
18900	1880.0	23.29	-4.7	18.59	72.28	2
19175	1907.5	23.25	-4.7	18.55	71.61	2

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.26	-4.7	17.56	57.02	2
18900	1880.0	22.07	-4.7	17.37	54.58	2
19175	1907.5	22.09	-4.7	17.39	54.83	2



CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	24.28	-4.7	19.58	90.78	2
18900	1880.0	24.2	-4.7	19.5	89.13	2
19150	1905.0	24.16	-4.7	19.46	88.31	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	23.49	-4.7	18.79	75.68	2
18900	1880.0	23.29	-4.7	18.59	72.28	2
19150	1905.0	23.28	-4.7	18.58	72.11	2

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	22.24	-4.7	17.54	56.75	2
18900	1880.0	22.11	-4.7	17.41	55.08	2
19150	1905.0	22.07	-4.7	17.37	54.58	2



CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	24.28	-4.7	19.58	90.78	2
18900	1880.0	24.16	-4.7	19.46	88.31	2
19125	1902.5	24.22	-4.7	19.52	89.54	2

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	23.42	-4.7	18.72	74.47	2
18900	1880.0	23.32	-4.7	18.62	72.78	2
19125	1902.5	23.32	-4.7	18.62	72.78	2

CHANNEL BANDWIDTH: 15MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.15	-4.7	17.45	55.59	2
18900	1880.0	22.12	-4.7	17.42	55.21	2
19125	1902.5	22.1	-4.7	17.4	54.95	2



CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	24.29	-4.7	19.59	90.99	2
18900	1880	24.23	-4.7	19.53	89.74	2
19100	1900	24.25	-4.7	19.55	90.16	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	23.49	-4.7	18.79	75.68	2
18900	1880	23.35	-4.7	18.65	73.28	2
19100	1900	23.33	-4.7	18.63	72.95	2

CHANNEL BANDWIDTH: 20MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-Lc} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	22.27	-4.7	17.57	57.15	2
18900	1880	22.13	-4.7	17.43	55.34	2
19100	1900	22.17	-4.7	17.47	55.85	2



3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.2.2 TEST PROCEDURE

- The device is placed in the oven room. The oven room could control the temperatures and humidity. Power warms up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be recording the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be holding $\pm 0.5^{\circ}\text{C}$ during the measurement testing. Each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

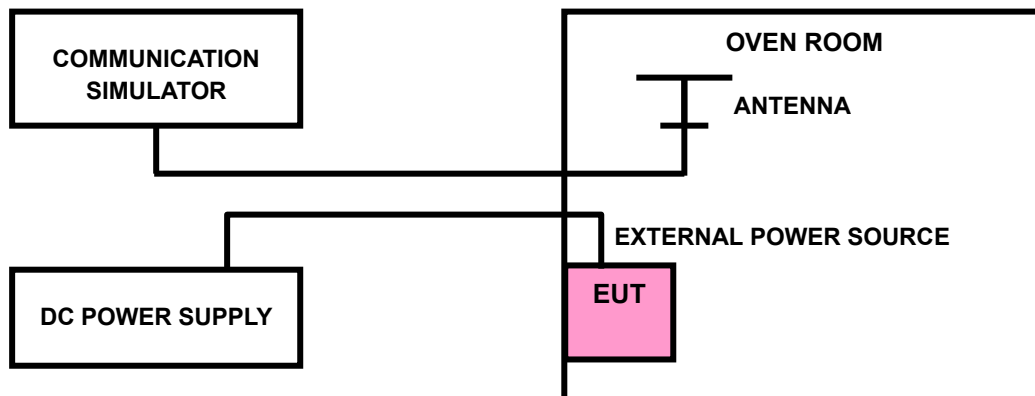



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

3.2.4 TEST RESULTS

Please Refer to Appendix Of this test report.




3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band is such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage. 0.5 % of the total mean power of a given emission.

3.3.2 TEST SETUP

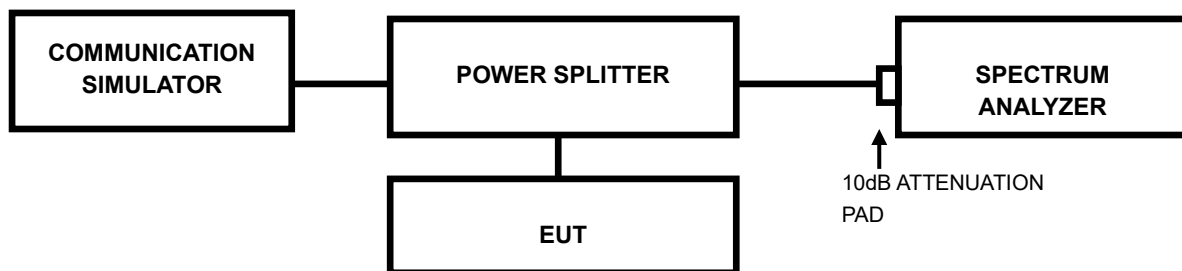

3.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

3.3.4 TEST RESULTS

Please Refer to Appendix Of this test report.




3.4 BAND EDGE MEASUREMENTC

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

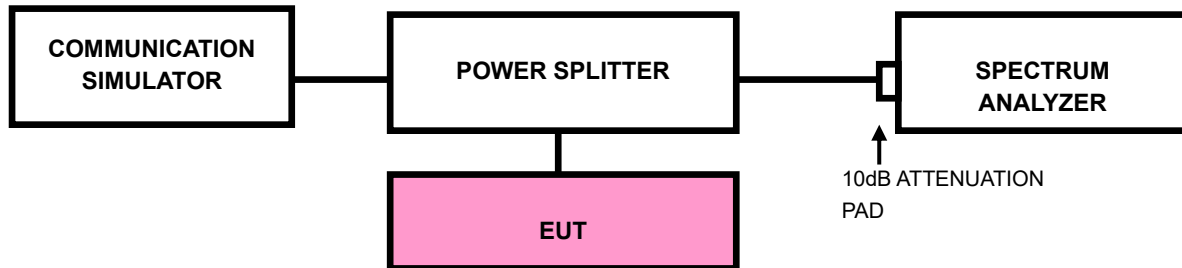



3.4.3 TEST PROCEDURES

- a) All measurements were done at low and high operational frequency range.
- b) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- c) Tune the analyzer to the nominal center frequency of the emission bandwidth (EBW)
- d) Set the resolution bandwidth (RBW) $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
- e) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- f) Set the video bandwidth (VBW) to $\geq 3 \times$ RBW.
- g) Select the average power (RMS) display detector.
- h) Set the number of measurement points to ≥ 1001 .
- i) Use auto-coupled sweep time.
- j) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- k) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- l) Record the max trace plot into the test report.



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

3.4.4. TEST RESULTS

Please Refer to Appendix Of this test report.



3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle, and high operational frequency range.
- b. Measuring frequency range is from 30MHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

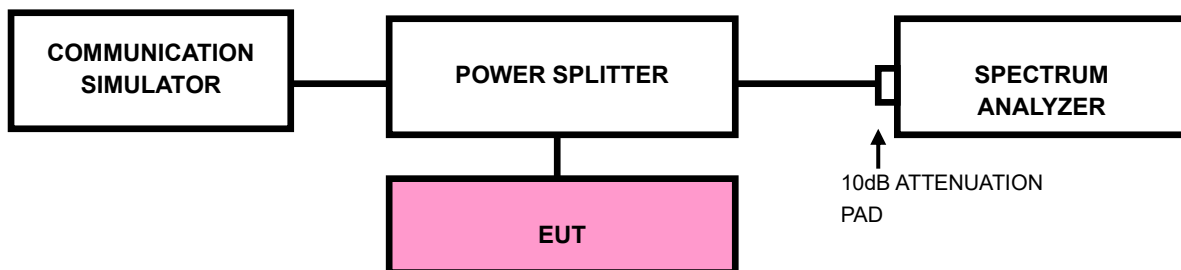



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix Of this test report.



3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13dBm .

3.6.2 TEST PROCEDURES

- a. The substitute method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator exports the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved the receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


3.6.3 DEVIATION FROM TEST STANDARD

No deviation




3.6.4 TEST SETUP

< Frequency Range below 30MHz >

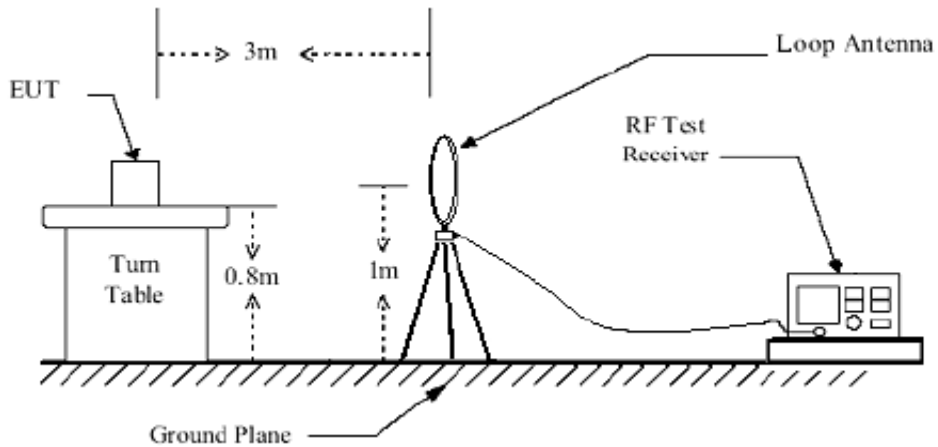


< Frequency Range 30MHz~1GHz >

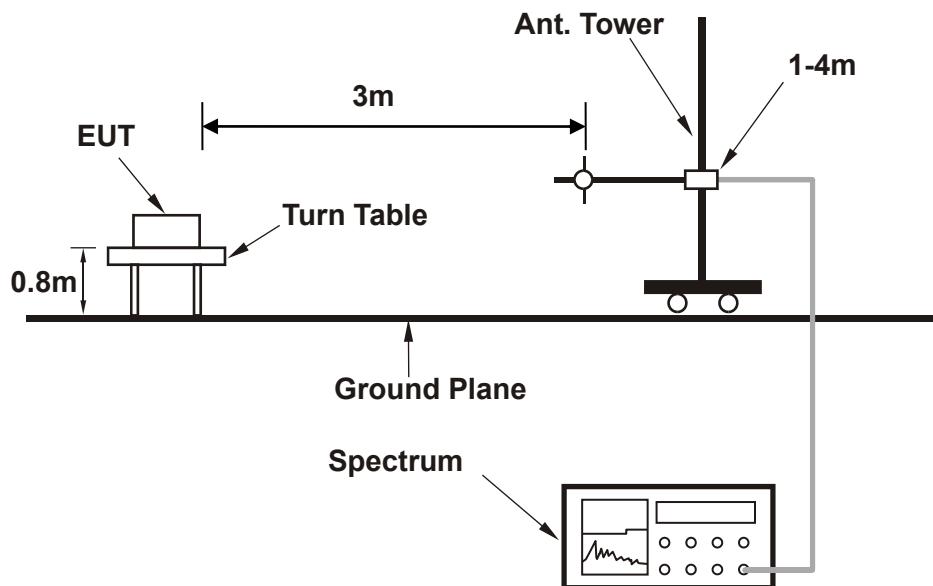



<Frequency Range above 1GHz>

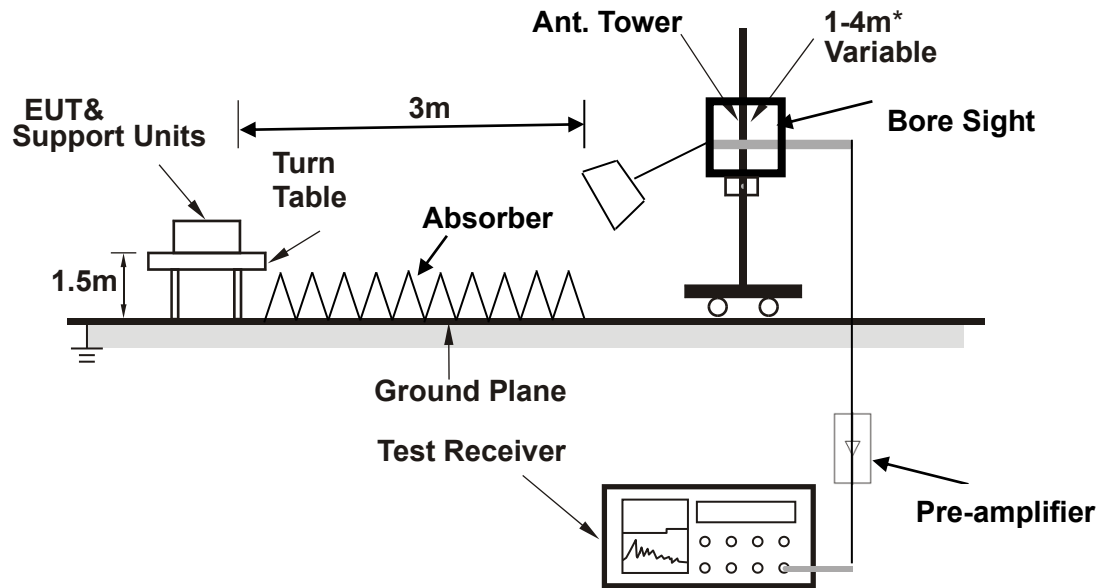

Note: Above 1G is a directional antenna

Depending on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

EDGE1900(Ant0) (UP):

CHANNEL BANDWIDTH: 512 ~ 810

MODE	TX channel 661	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	37.760	-49.52	-13.00	36.52	6.93	H	5	1
1	58.130	-52.58	-13.00	39.58	3.25	H	22.5	2
1	99.840	-60.29	-13.00	47.29	-4.53	H	92.6	1
1	229.820	-44.00	-13.00	31.00	8.27	H	92.6	1
1	451.950	-56.50	-13.00	43.50	7.30	H	43.6	1
1	859.350	-51.44	-13.00	38.44	13.67	H	190.6	1

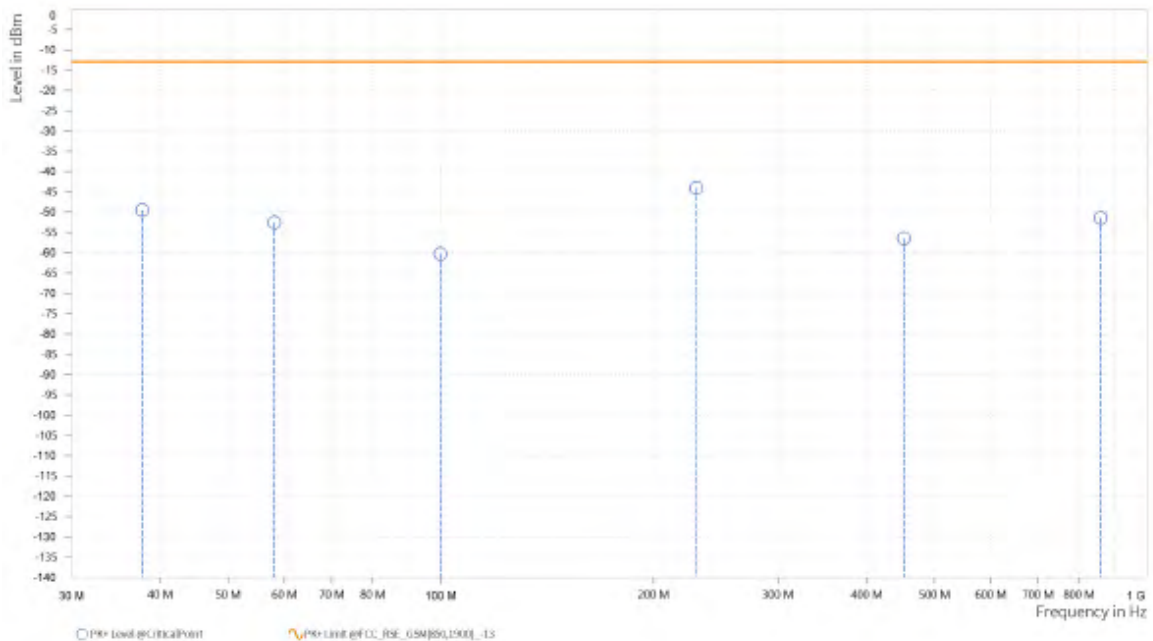




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

MODE	TX channel 661	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	32.910	-55.89	-13.00	42.89	0.25	V	2.3	2
1	58.130	-52.00	-13.00	39.00	3.30	V	141.5	1
1	99.840	-45.86	-13.00	32.86	11.79	V	122.8	2
1	209.935	-50.12	-13.00	37.12	-0.19	V	288.6	1
1	429.155	-56.18	-13.00	43.18	6.99	V	239.6	1
1	859.350	-51.98	-13.00	38.98	13.10	V	24.8	2

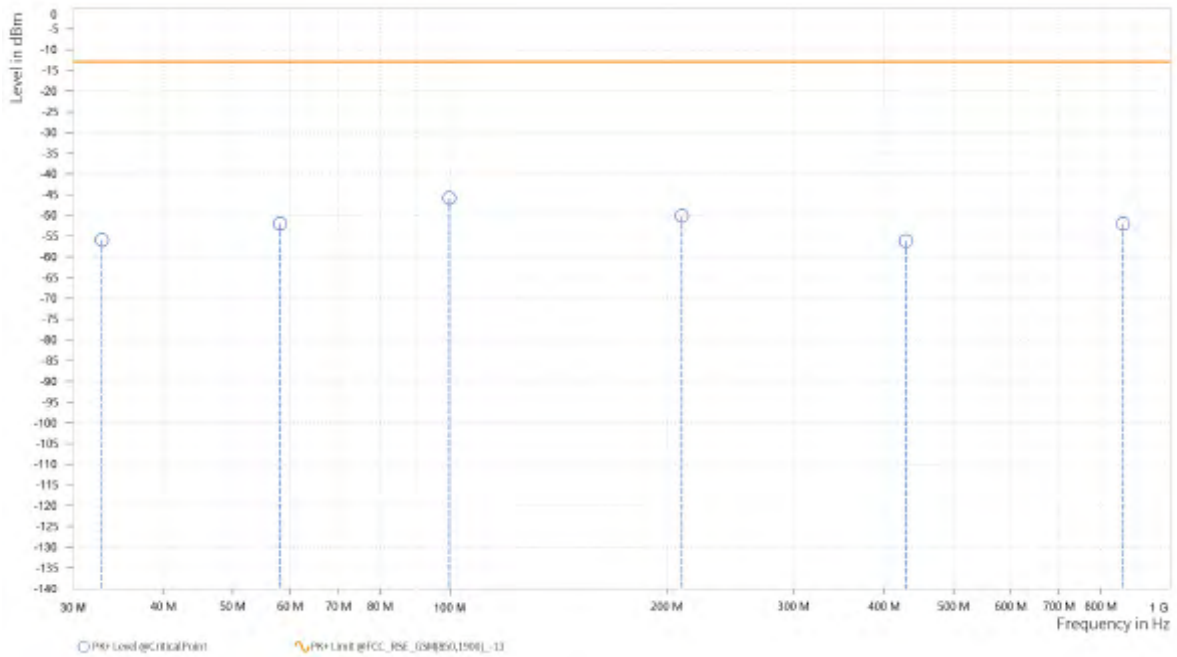



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

ABOVE 1GHz DATA

Note: For higher frequency, the emission is too low to be detected.


WORST-CASE DATA

GSM 1900(Ant0) (UP):

CH 512

MODE	TX channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3700.400	-50.96	-58.80	-13.00	-37.96	7.84	Peak	Horizontal
2	5560.000	-51.42	-62.01	-13.00	-38.42	10.59	Peak	Horizontal

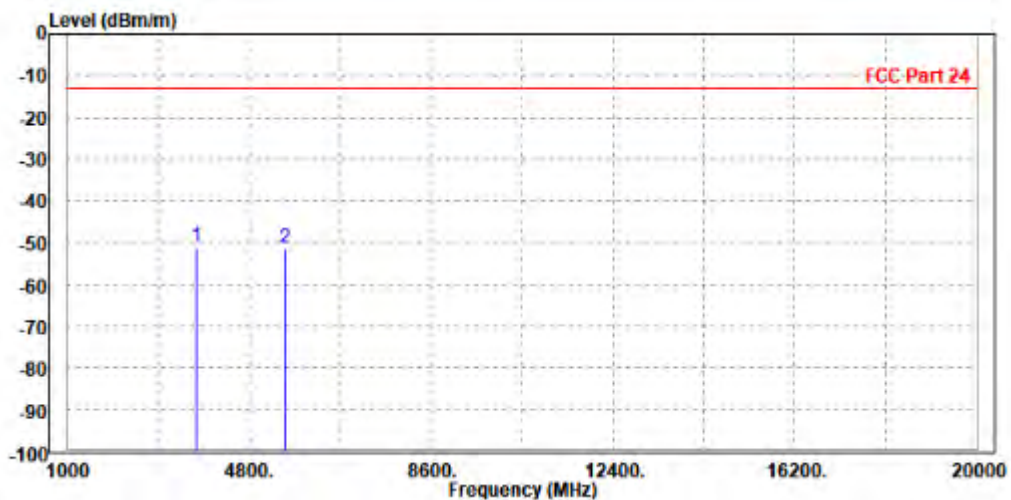




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

MODE	TX channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3698.000	-51.14	-58.75	-13.00	-38.14	7.61	Peak	Vertical
2 PP	5550.600	-51.00	-61.87	-13.00	-38.00	10.87	Peak	Vertical

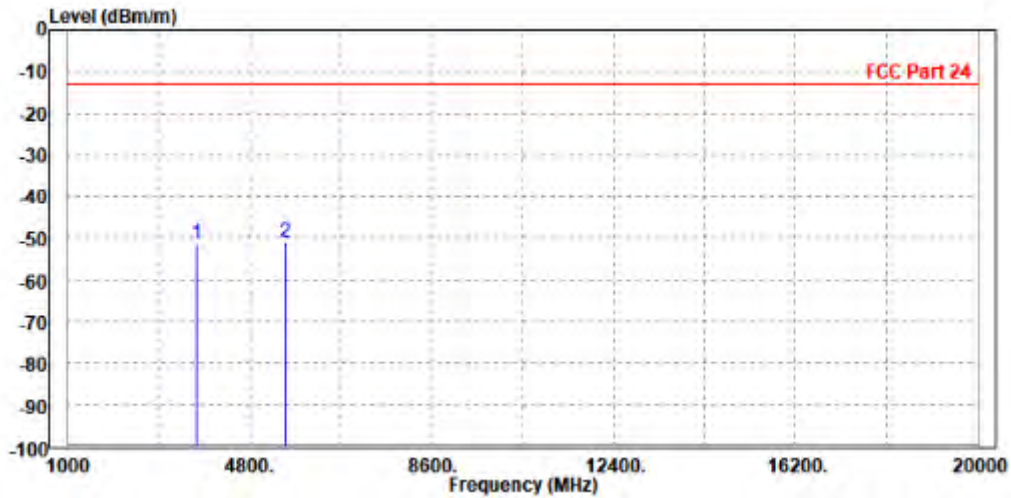




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

CH 661

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-50.95	-58.93	-13.00	-37.95	7.98	Peak	Horizontal
2 PP	5640.000	-49.30	-60.04	-13.00	-36.30	10.74	Peak	Horizontal

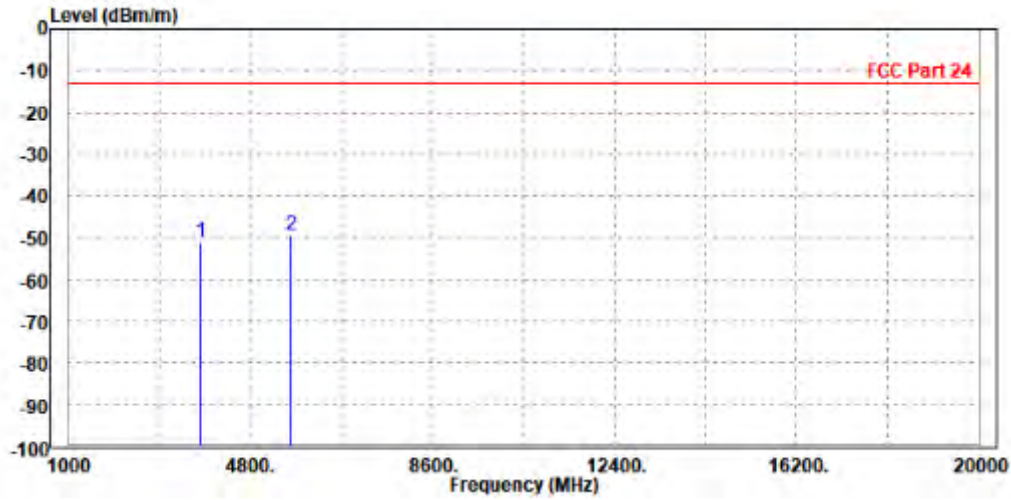




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-51.80	-59.50	-13.00	-38.80	7.70	Peak	Vertical
2 PP	5636.000	-50.29	-61.41	-13.00	-37.29	11.12	Peak	Vertical

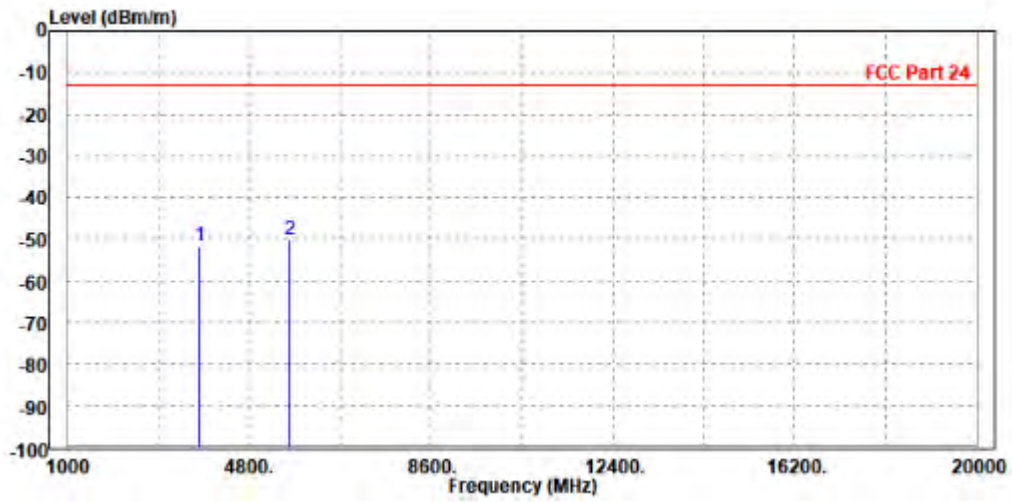




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

CH 810

MODE	TX channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-51.42	-59.54	-13.00	-38.42	8.12	Peak	Horizontal
2 PP	5729.400	-51.23	-62.14	-13.00	-38.23	10.91	Peak	Horizontal

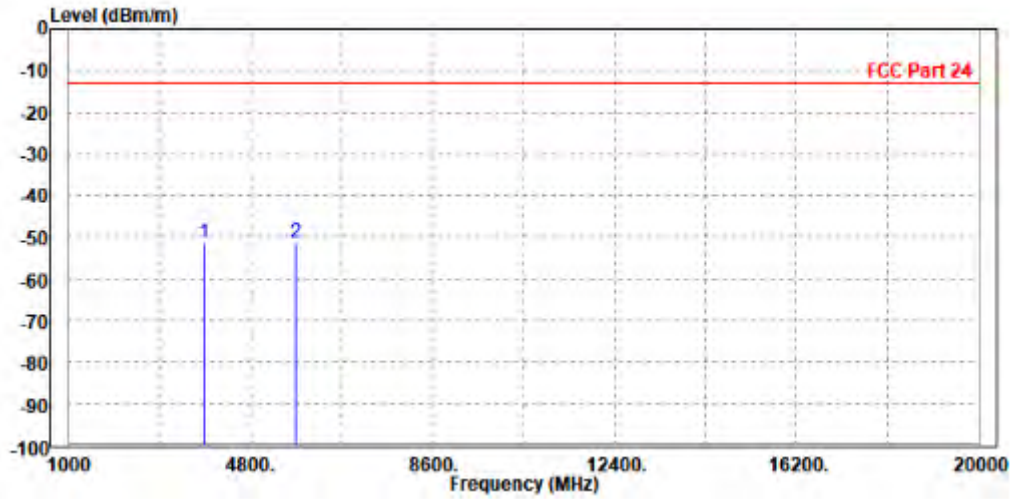




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

MODE	TX channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3819.600	-51.28	-59.06	-13.00	-38.28	7.78	Peak	Vertical
2 PP	5731.000	-50.37	-61.76	-13.00	-37.37	11.39	Peak	Vertical

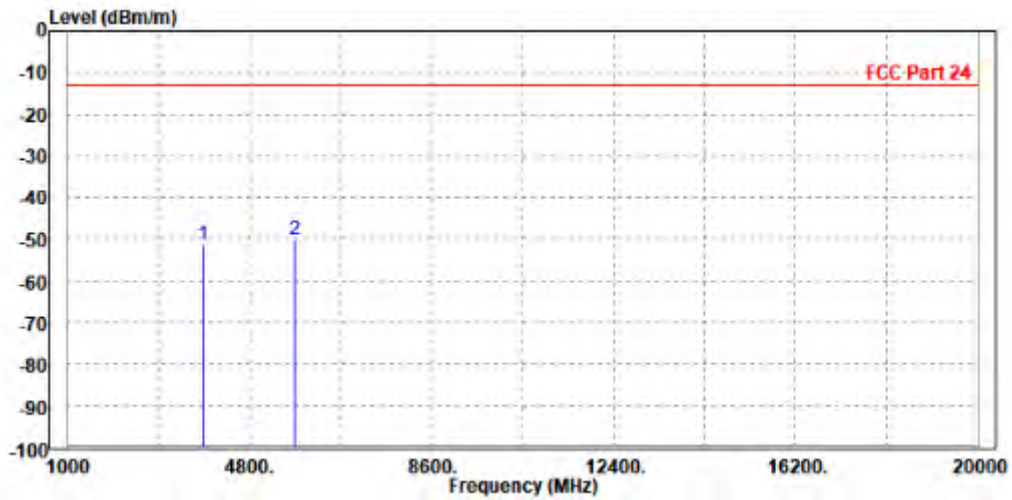



BUREAU
VERITAS


Test Report No.: W7L-P23080017RF05

EDGE 1900(Ant1) (DOWN):

CH 512

MODE	TX channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3700.400	-51.99	-59.83	-13.00	-38.99	7.84	Peak	Horizontal
2 PP	5560.000	-50.01	-60.60	-13.00	-37.01	10.59	Peak	Horizontal

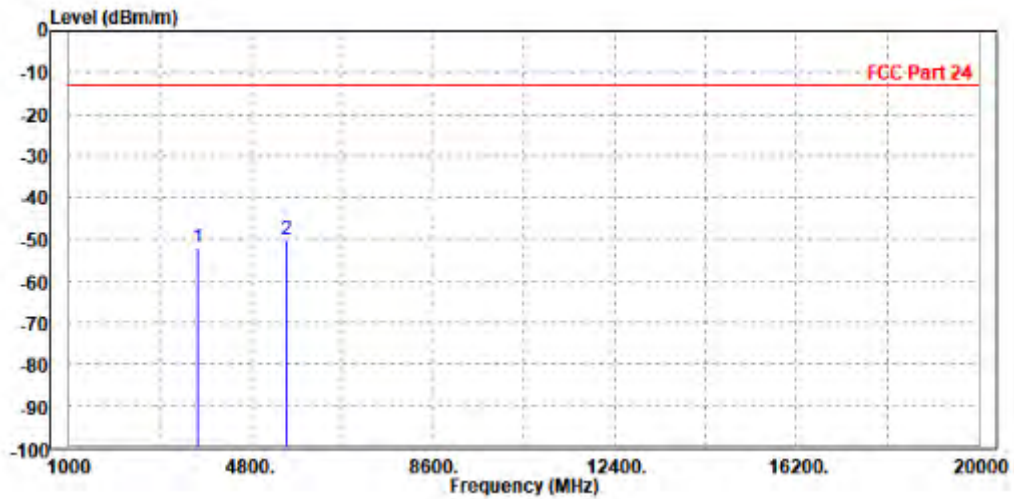




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

MODE	TX channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3698.000	-50.63	-58.24	-13.00	-37.63	7.61	Peak	Vertical
2 PP	5550.600	-49.89	-60.76	-13.00	-36.89	10.87	Peak	Vertical

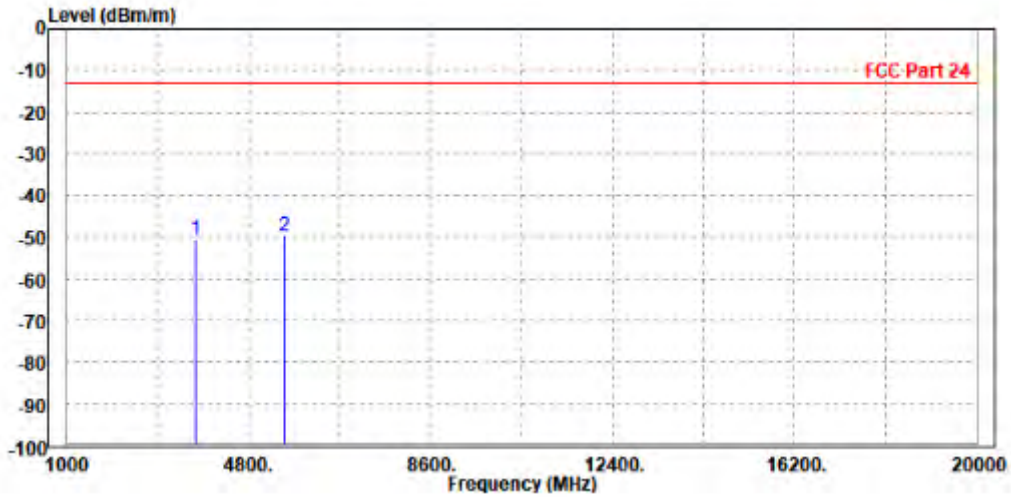




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

CH 661

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,760.000	-49.02	-13.00	36.02	23.12	H	359	1
4	5,640.000	-45.14	-13.00	32.14	26.20	H	236.1	1

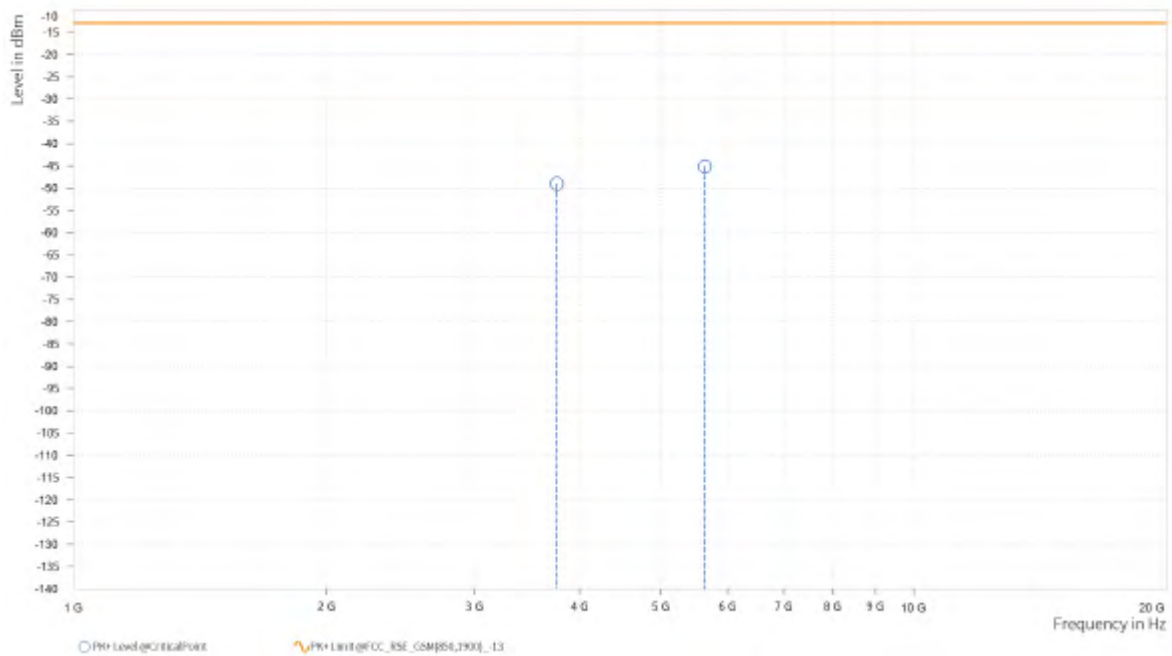




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,760.000	-48.49	-13.00	35.49	23.61	V	124	2
4	5,640.000	-46.18	-13.00	33.18	26.55	V	1	1

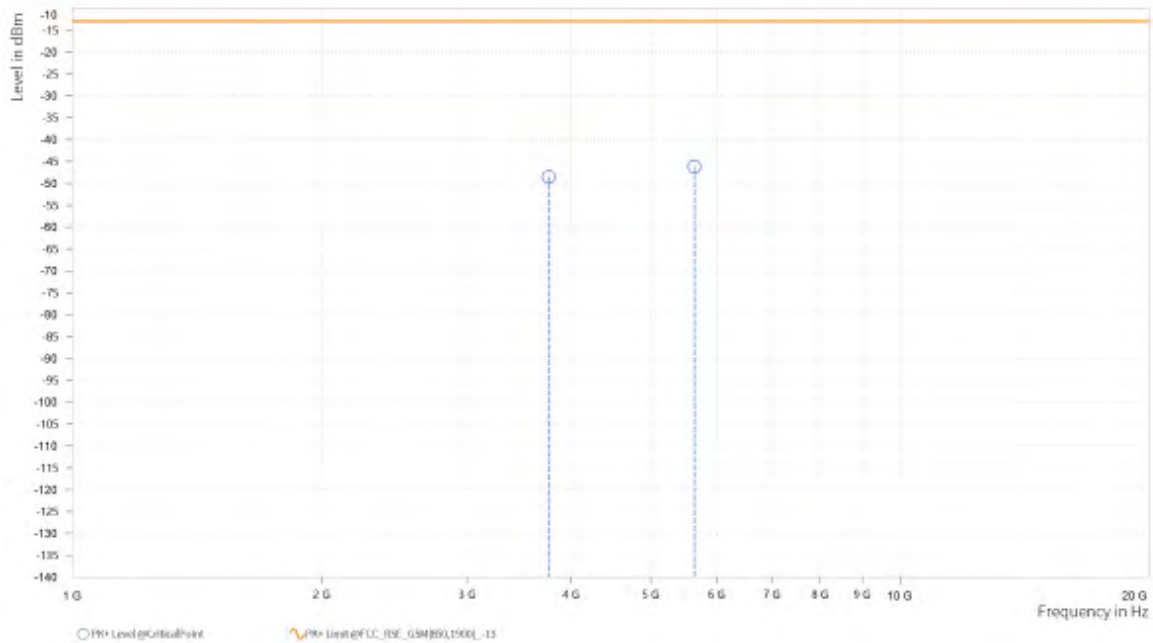




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

CH 810

MODE	TX channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3812.000	-50.23	-58.35	-13.00	-37.23	8.12	Peak	Horizontal
2	5729.400	-50.88	-61.79	-13.00	-37.88	10.91	Peak	Horizontal

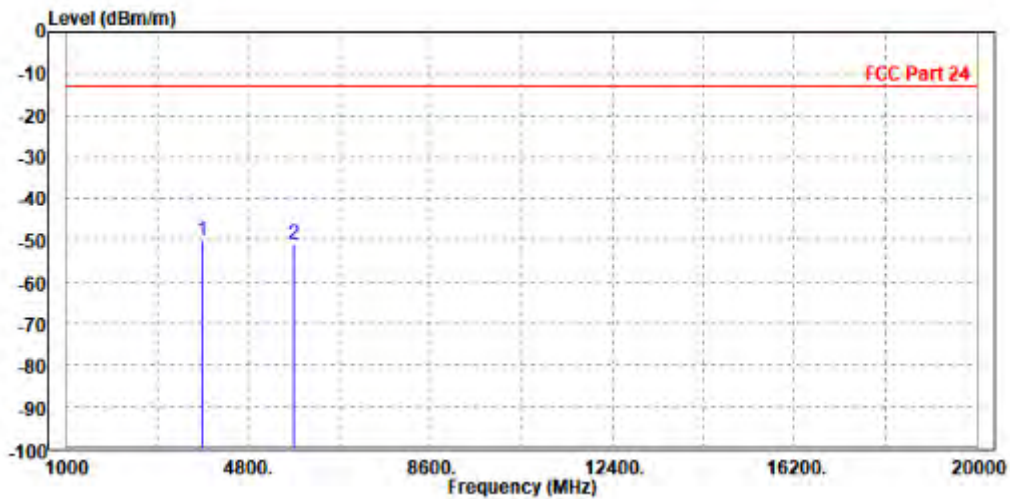




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

MODE	TX channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3819.600	-52.17	-59.95	-13.00	-39.17	7.78	Peak	Vertical
2 PP	5731.000	-49.85	-61.24	-13.00	-36.85	11.39	Peak	Vertical

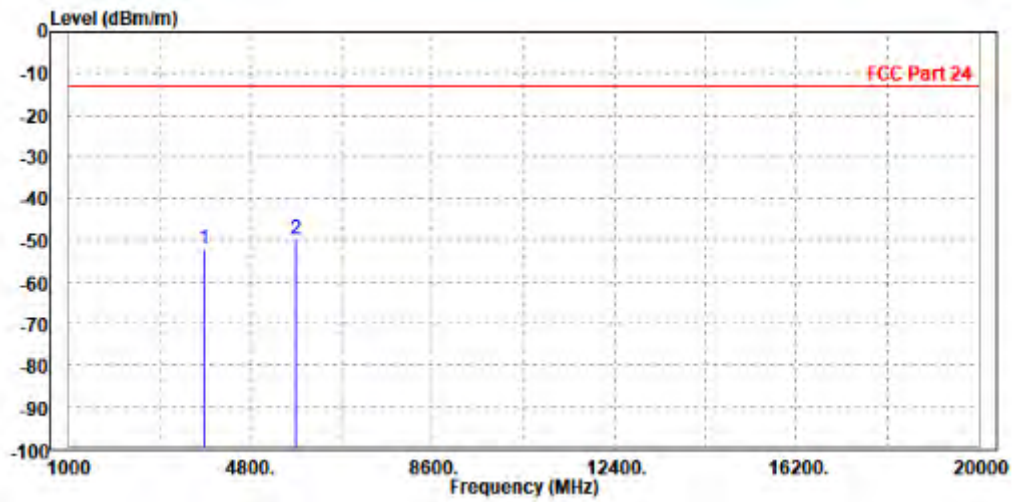



**BUREAU
VERITAS**


Test Report No.: W7L-P23080017RF05

WCDMA Band II(Ant1) (DOWN):

CH 9262

MODE	TX channel 9262	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3698.000	-50.89	-58.72	-13.00	-37.89	7.83	Peak	Horizontal
2	PP 5557.200	-50.10	-60.68	-13.00	-37.10	10.58	Peak	Horizontal

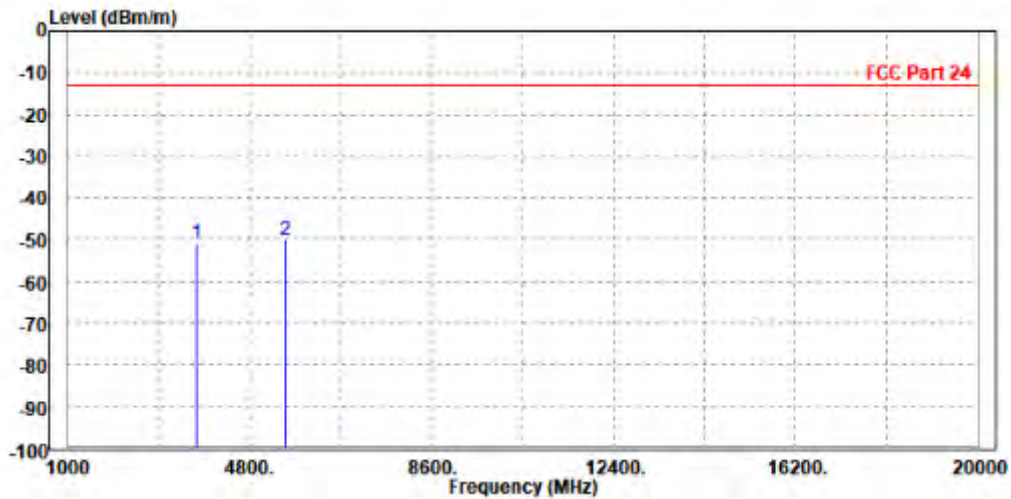




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

MODE	TX channel 9262	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3704.800	-50.50	-58.12	-13.00	-37.50	7.62	Peak	Vertical
2 PP	5560.000	-49.91	-60.81	-13.00	-36.91	10.90	Peak	Vertical

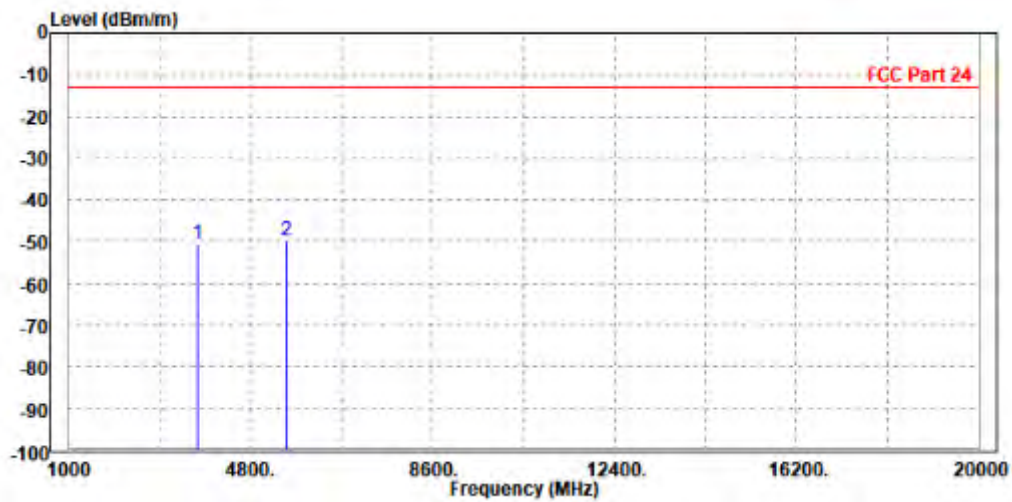




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

CH 9400

MODE	TX channel 9400	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-51.48	-59.47	-13.00	-38.48	7.99	Peak	Horizontal
2 PP	5636.000	-50.20	-60.93	-13.00	-37.20	10.73	Peak	Horizontal

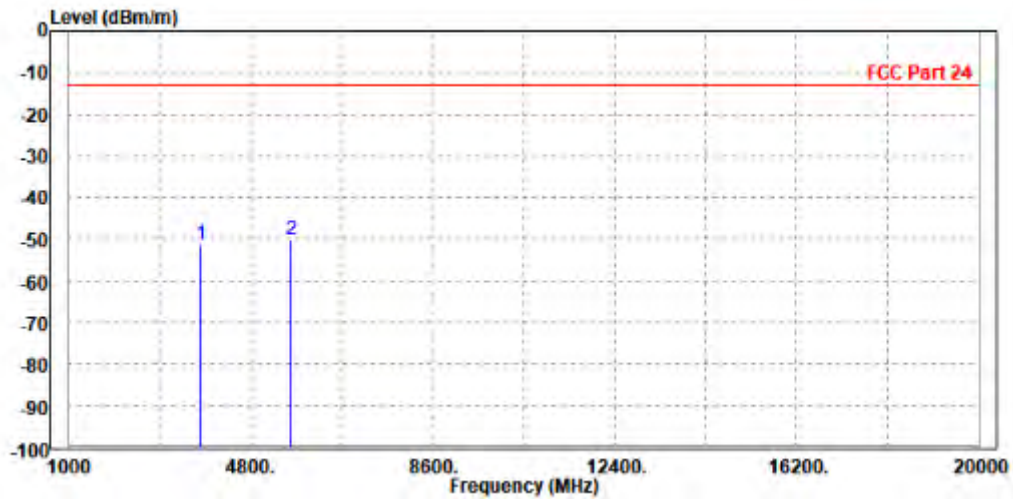




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

MODE	TX channel 9400	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-50.61	-58.30	-13.00	-37.61	7.69	Peak	Vertical
2 PP	5640.000	-48.69	-59.82	-13.00	-35.69	11.13	Peak	Vertical

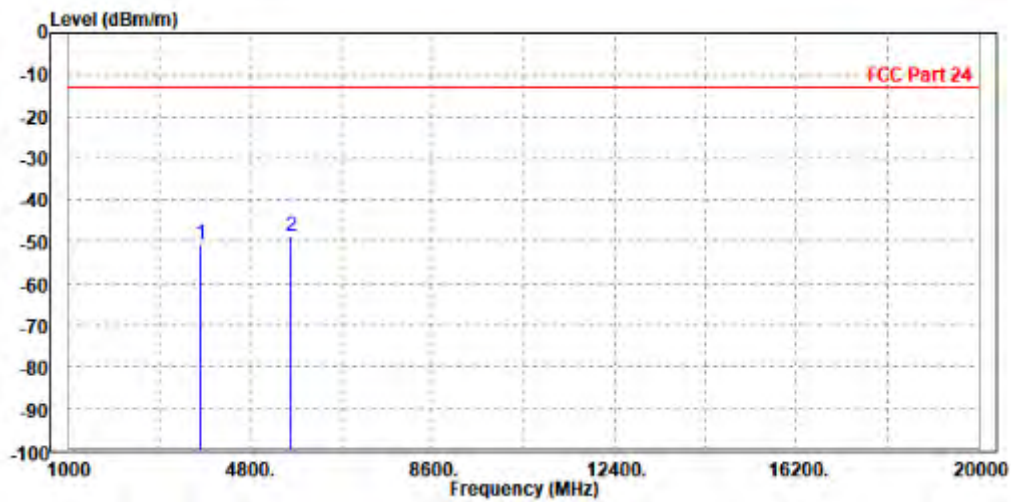




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

CH 9538

MODE	TX channel 9538	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-51.31	-59.43	-13.00	-38.31	8.12	Peak	Horizontal
2 PP	5722.800	-50.65	-61.55	-13.00	-37.65	10.90	Peak	Horizontal

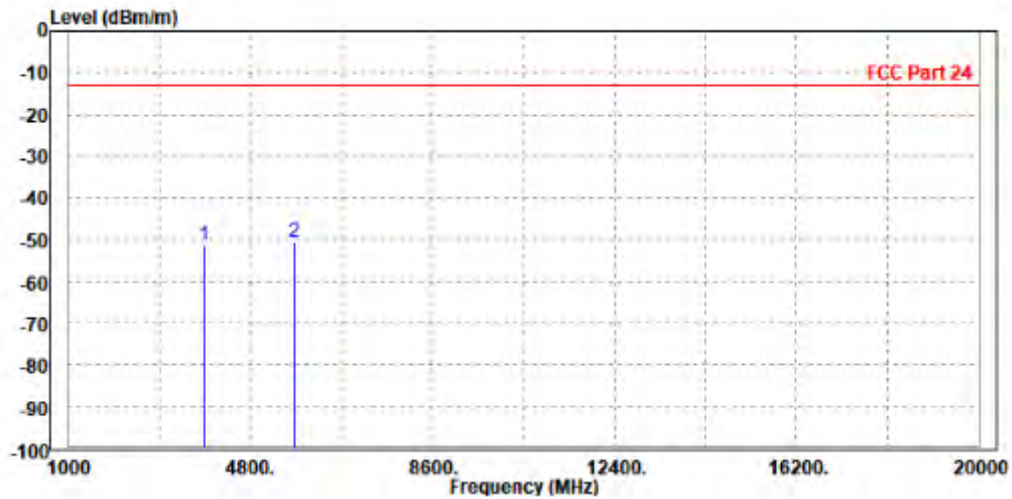




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

MODE	TX channel 9538	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-51.15	-58.92	-13.00	-38.15	7.77	Peak	Vertical
2 PP	5722.800	-49.55	-60.91	-13.00	-36.55	11.36	Peak	Vertical

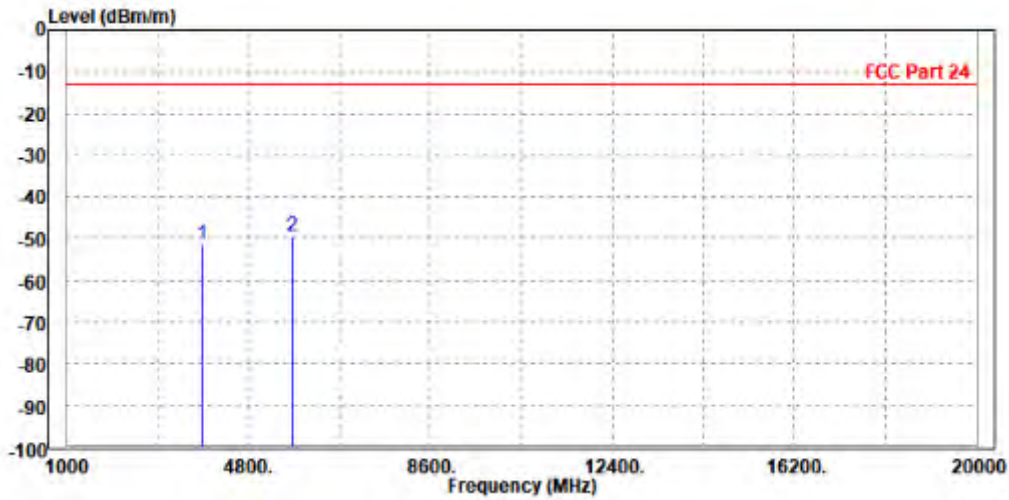



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05


LTE Band 2(Ant1) (DOWN):

CHANNEL BANDWIDTH: 1.4MHz / QPSK

CH18607

MODE	TX channel 18607	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3717.000	-51.55	-59.43	-13.00	-38.55	7.88	Peak	Horizontal
2 PP	5552.100	-50.59	-61.16	-13.00	-37.59	10.57	Peak	Horizontal

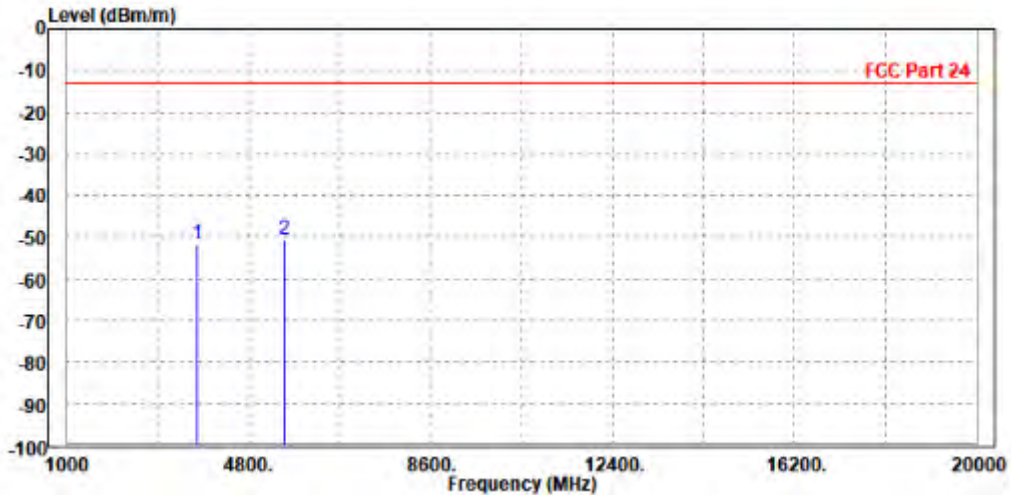




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

MODE	TX channel 18607	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3710.400	-51.18	-58.80	-13.00	-38.18	7.62	Peak	Vertical
2 PP	5560.000	-50.41	-61.31	-13.00	-37.41	10.90	Peak	Vertical

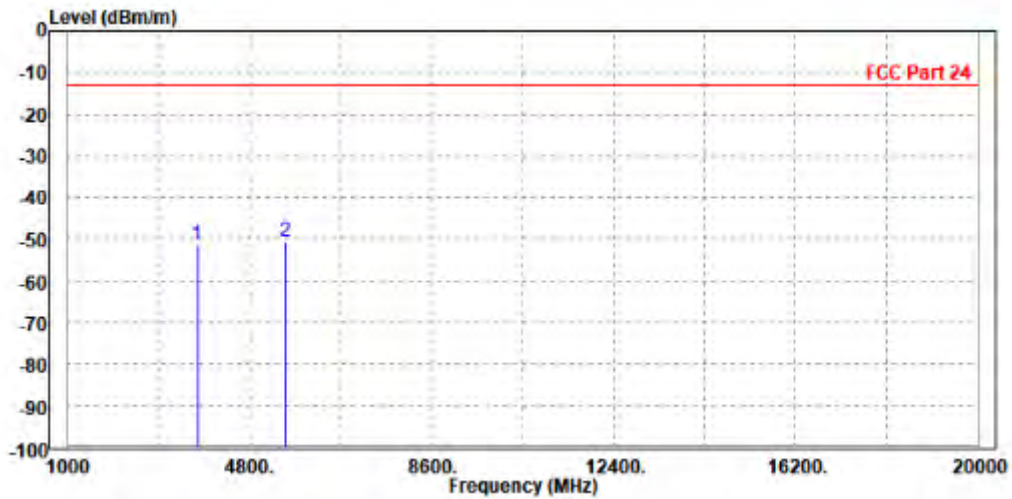




CH18900

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-51.67	-59.66	-13.00	-38.67	7.99	Peak	Horizontal
2 PP	5636.000	-50.34	-61.07	-13.00	-37.34	10.73	Peak	Horizontal

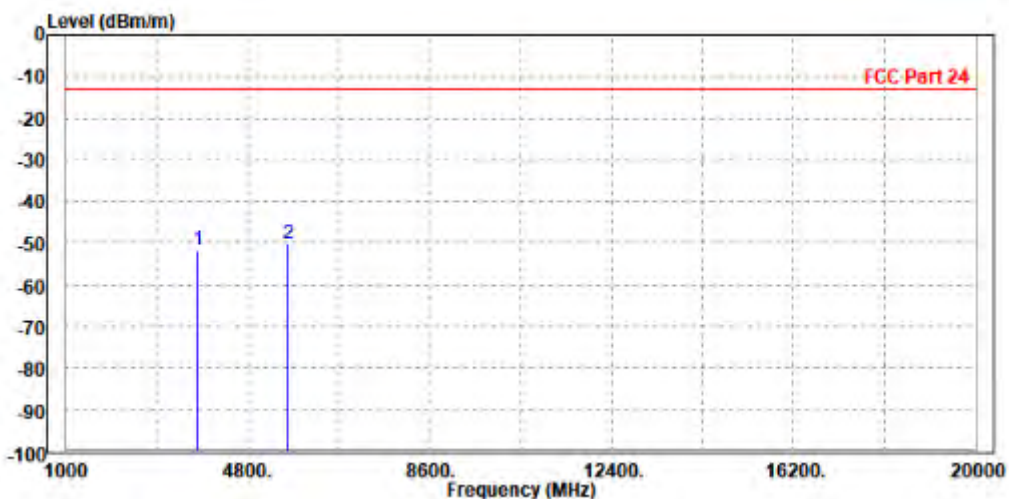




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-50.32	-58.01	-13.00	-37.32	7.69	Peak	Vertical
2 PP	5640.000	-49.29	-60.42	-13.00	-36.29	11.13	Peak	Vertical

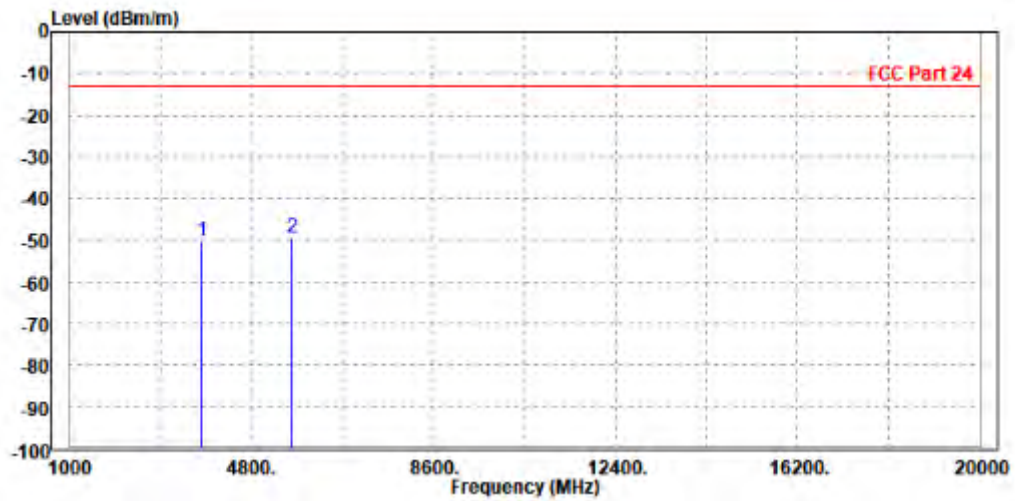




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

CH19193

MODE	TX channel 19193	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3818.600	-51.11	-59.25	-13.00	-38.11	8.14	Peak	Horizontal
2	5731.000	-51.14	-62.05	-13.00	-38.14	10.91	Peak	Horizontal

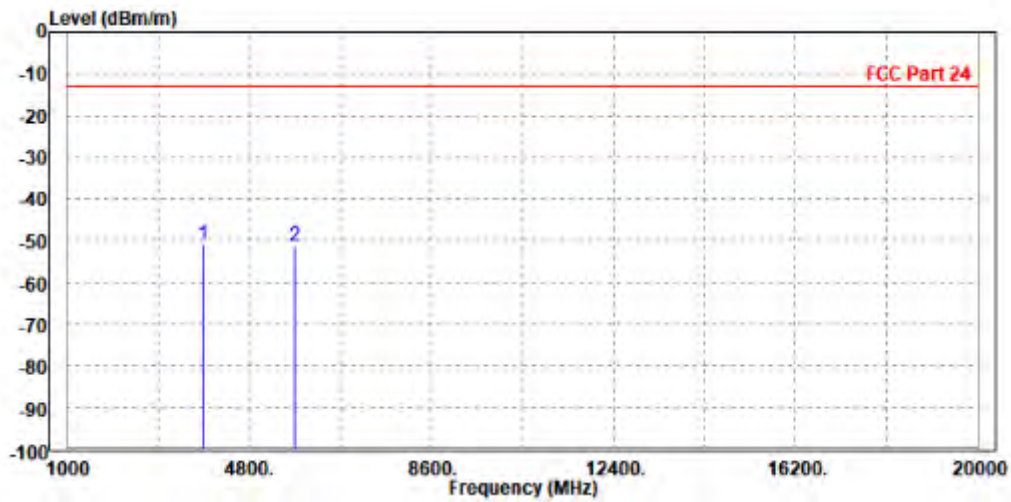




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

MODE	TX channel 19193	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-51.38	-59.15	-13.00	-38.38	7.77	Peak	Vertical
2 PP	5727.900	-50.36	-61.74	-13.00	-37.36	11.38	Peak	Vertical

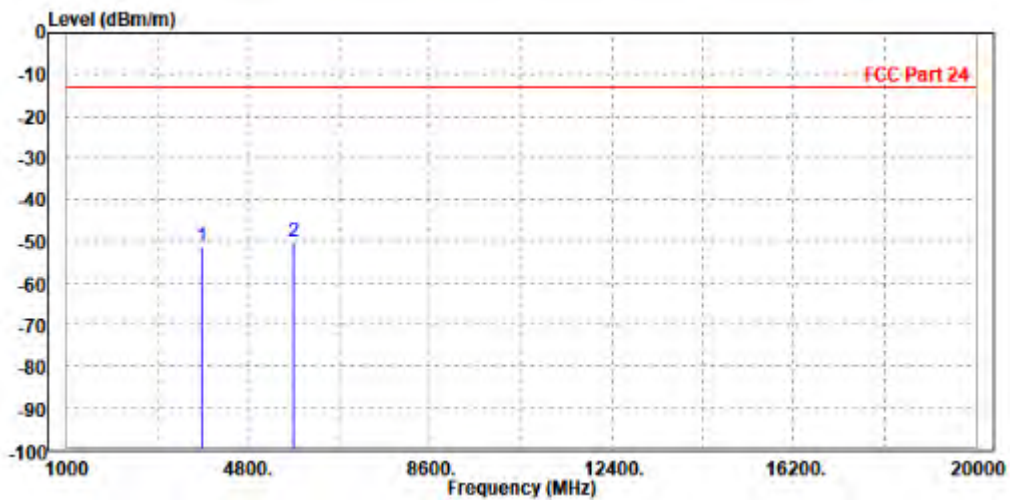




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-52.50	-60.48	-13.00	-39.50	7.98	Peak	Horizontal
2 PP	5640.000	-50.58	-61.32	-13.00	-37.58	10.74	Peak	Horizontal

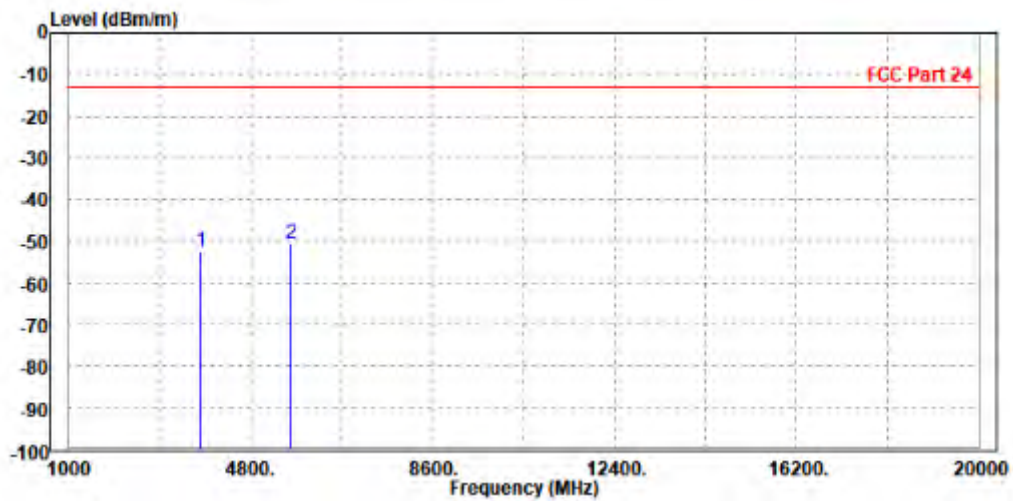




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-51.93	-59.63	-13.00	-38.93	7.70	Peak	Vertical
2 PP	5636.000	-50.55	-61.67	-13.00	-37.55	11.12	Peak	Vertical

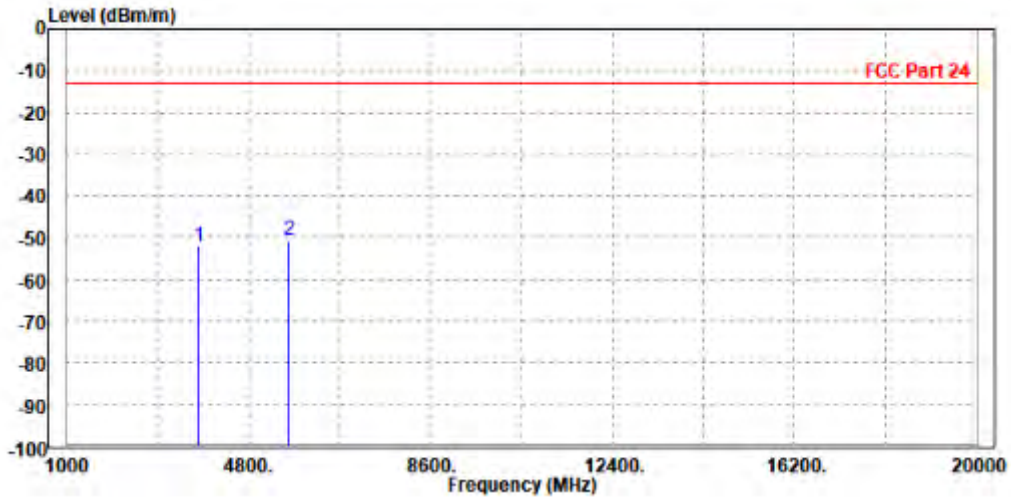




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-52.64	-60.63	-13.00	-39.64	7.99	Peak	Horizontal
2 PP	5636.000	-50.72	-61.45	-13.00	-37.72	10.73	Peak	Horizontal

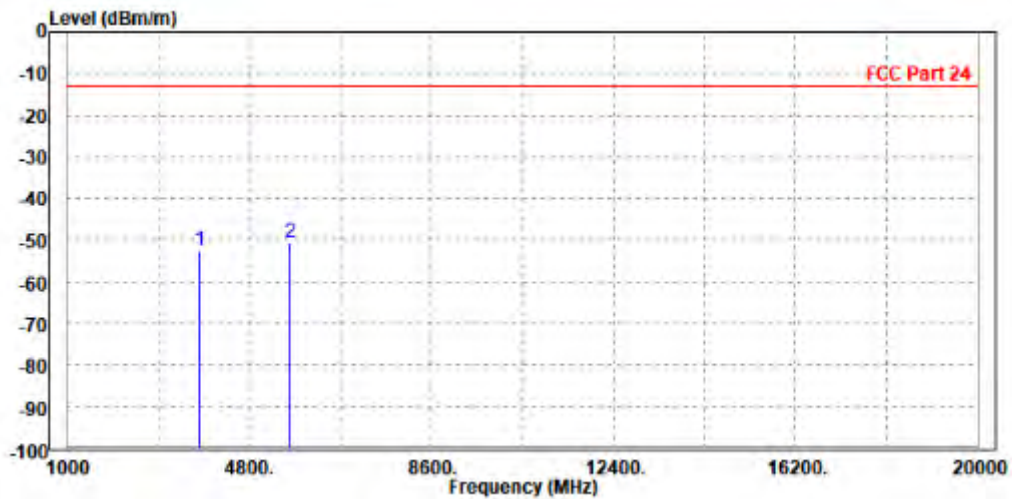




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-52.51	-60.20	-13.00	-39.51	7.69	Peak	Vertical
2 PP	5640.000	-49.77	-60.90	-13.00	-36.77	11.13	Peak	Vertical

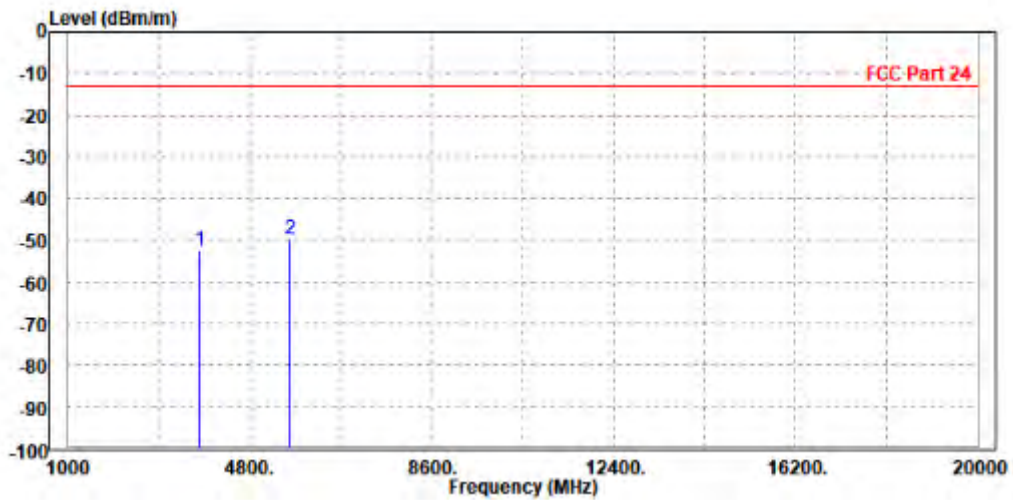




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-52.49	-60.48	-13.00	-39.49	7.99	Peak	Horizontal
2	5636.000	-51.18	-61.91	-13.00	-38.18	10.73	Peak	Horizontal

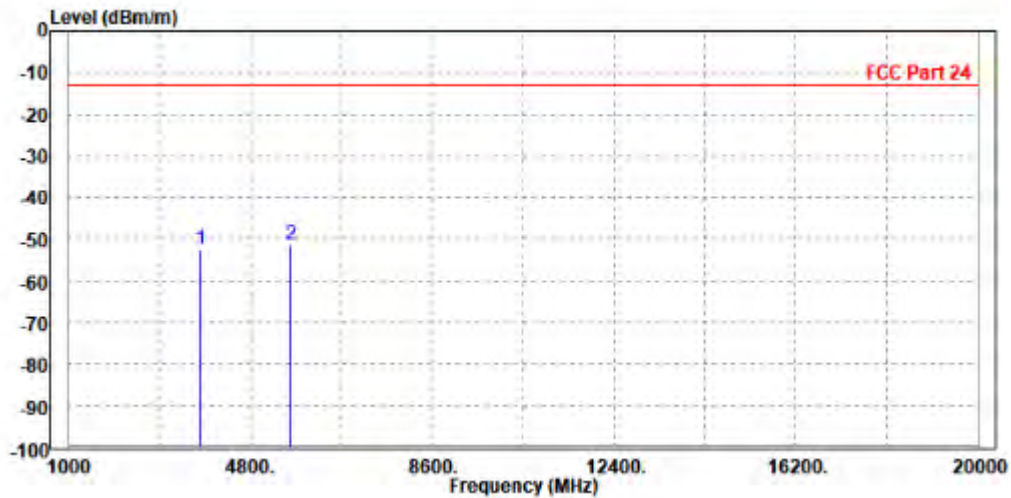




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-53.50	-61.19	-13.00	-40.50	7.69	Peak	Vertical
2 PP	5640.000	-50.66	-61.79	-13.00	-37.66	11.13	Peak	Vertical

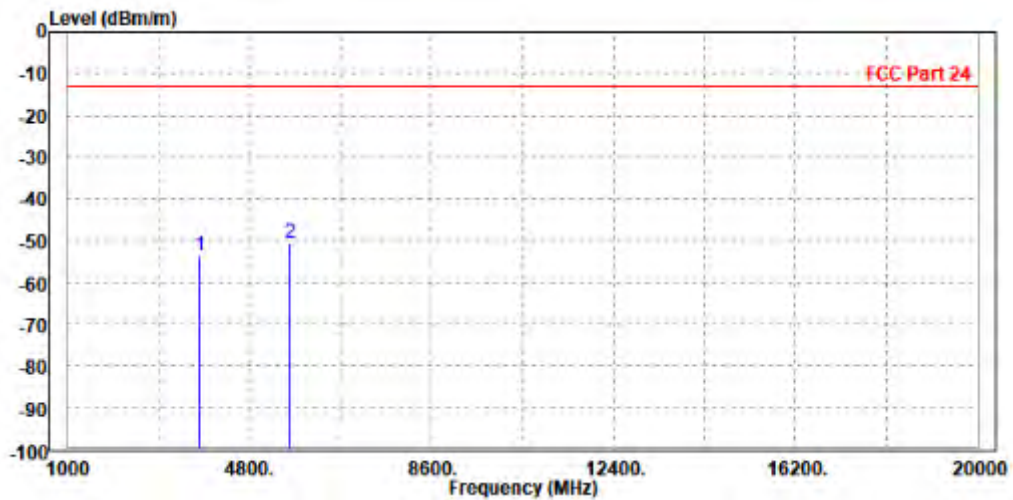




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-51.42	-59.40	-13.00	-38.42	7.98	Peak	Horizontal
2 PP	5640.000	-49.96	-60.70	-13.00	-36.96	10.74	Peak	Horizontal

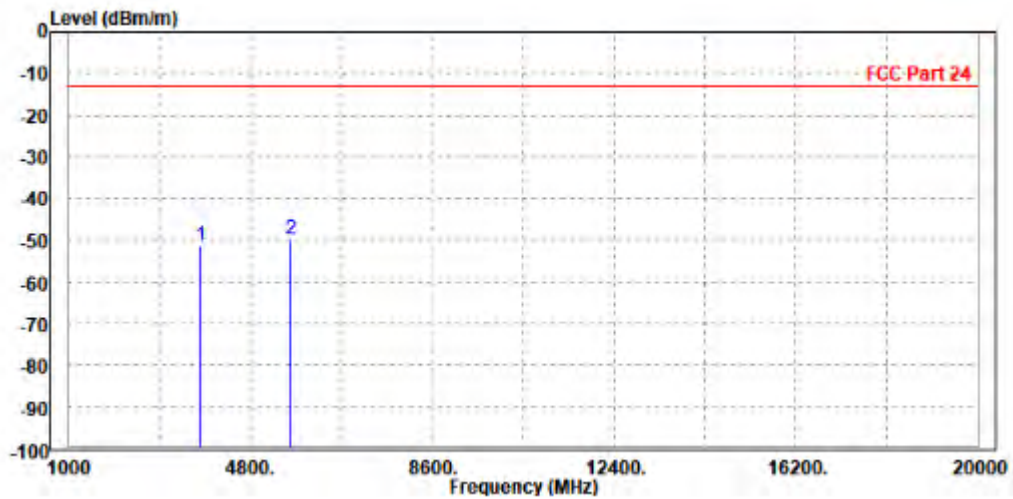




BUREAU VERITAS

Test Report No.: W7L-P23080017RF05

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-51.41	-59.11	-13.00	-38.41	7.70	Peak	Vertical
2 PP	5636.000	-50.33	-61.45	-13.00	-37.33	11.12	Peak	Vertical

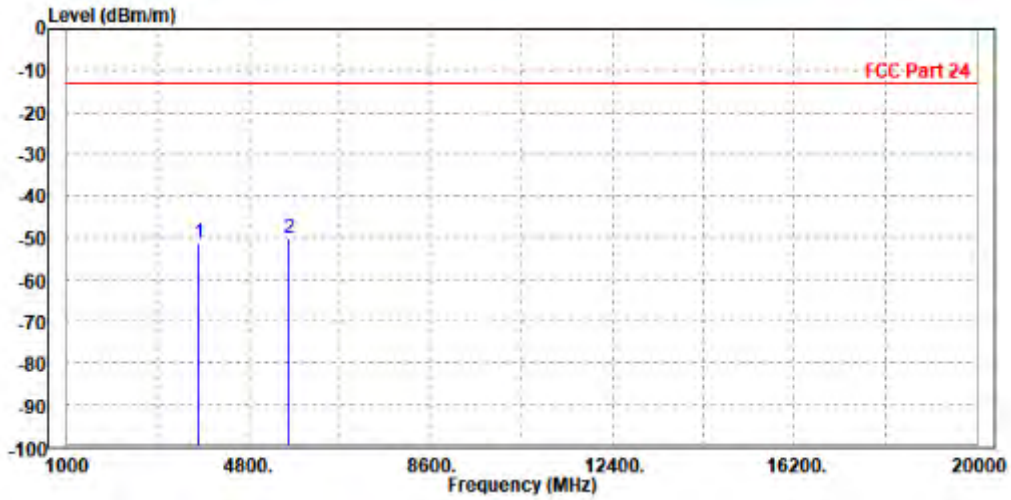




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-51.94	-59.93	-13.00	-38.94	7.99	Peak	Horizontal
2 PP	5636.000	-51.65	-62.38	-13.00	-38.65	10.73	Peak	Horizontal

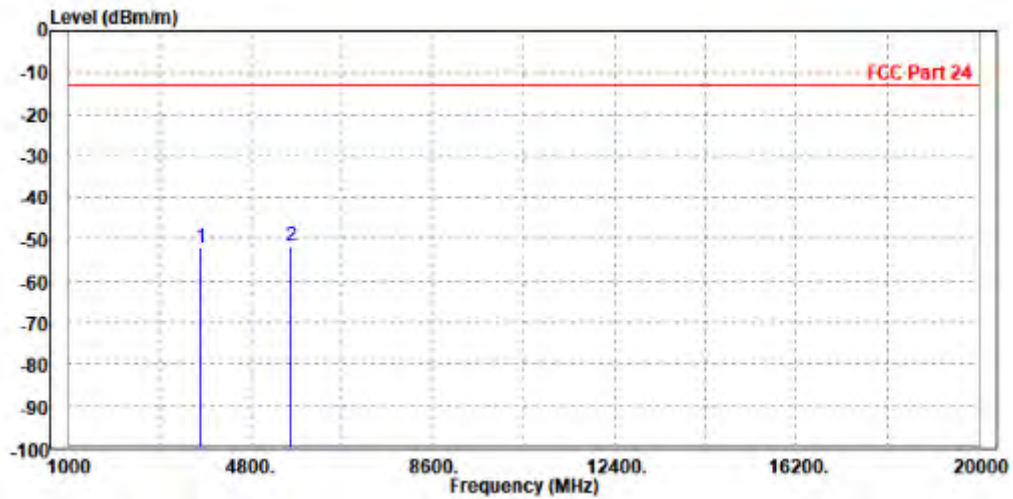




**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-52.28	-59.97	-13.00	-39.28	7.69	Peak	Vertical
2 PP	5640.000	-50.00	-61.13	-13.00	-37.00	11.13	Peak	Vertical

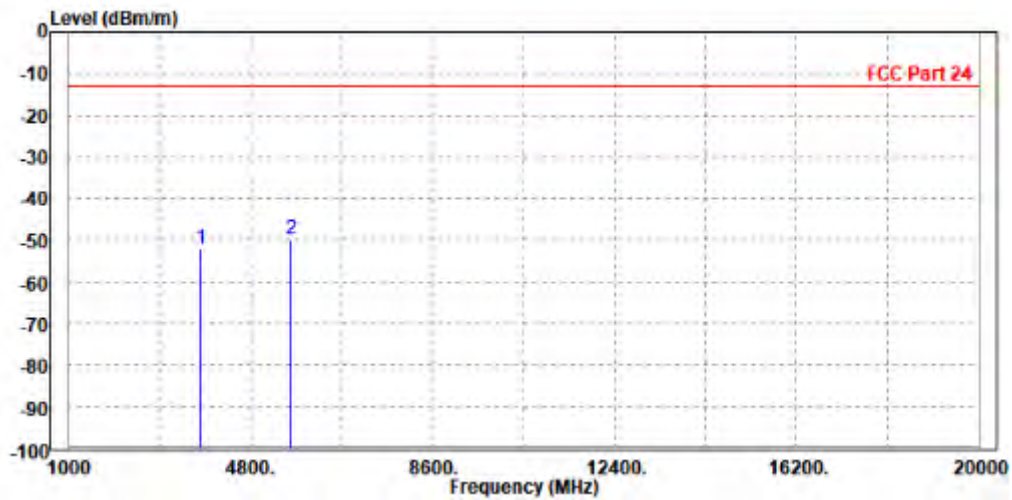




3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.7.2 TEST SETUP

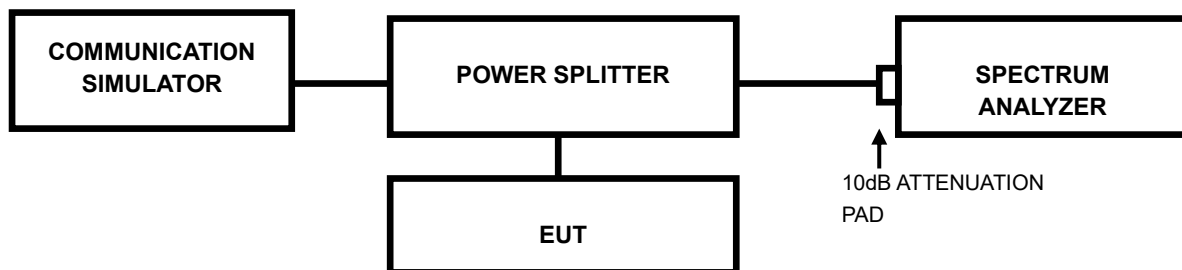

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth.
2. Set the number of counts to a value that stabilizes the measured CCDF curve.
3. Record the maximum PAPR level associated with a probability of 0.1%.



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

3.7.4 TEST RESULTS

Please Refer to Appendix Of this test report.



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

5 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.sw@bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



Test Report No.: W7L-P23080017RF05

6 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

7 APPENDIX

GSM1900

PEAK-TO-AVERAGE RATIO(CCDF)

Test Result

Band	Channel	Result(dB)	Limit(dB)	Verdict
GSM1900	512	2.69	13	PASS
GSM1900	661	2.65	13	PASS
GSM1900	810	2.62	13	PASS
EGPRS1900	512	6.14	13	PASS
EGPRS1900	661	6.14	13	PASS
EGPRS1900	810	6.07	13	PASS



BUREAU VERITAS

Test Report No.: W7L-P23080017RF05


Test Graphs






BUREAU VERITAS


Test Report No.: W7L-P23080017RF05

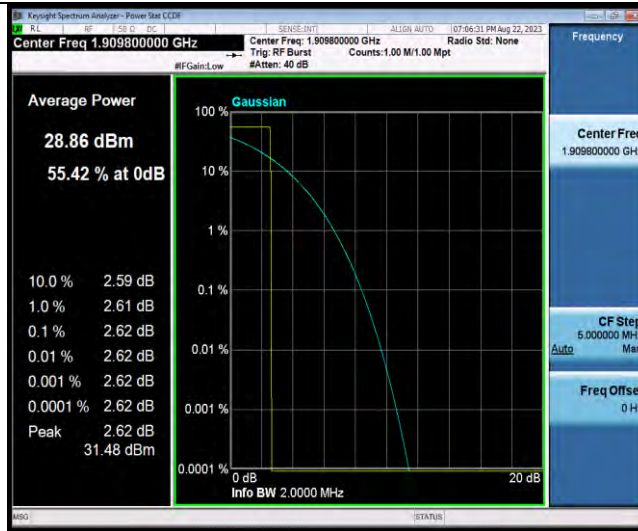

EGPRS1900-512

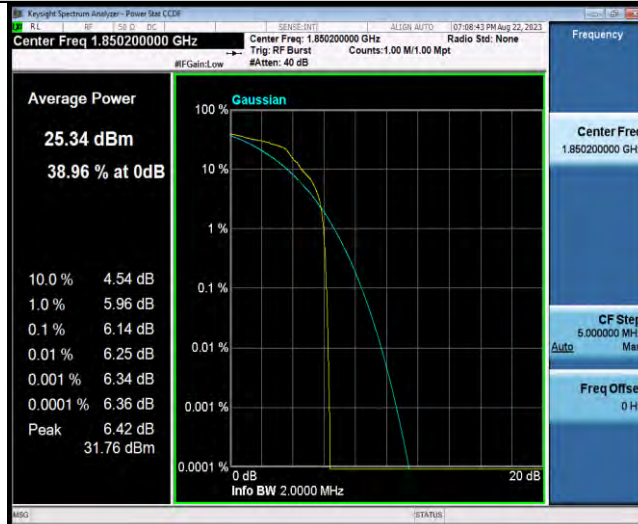

EGPRS1900-661

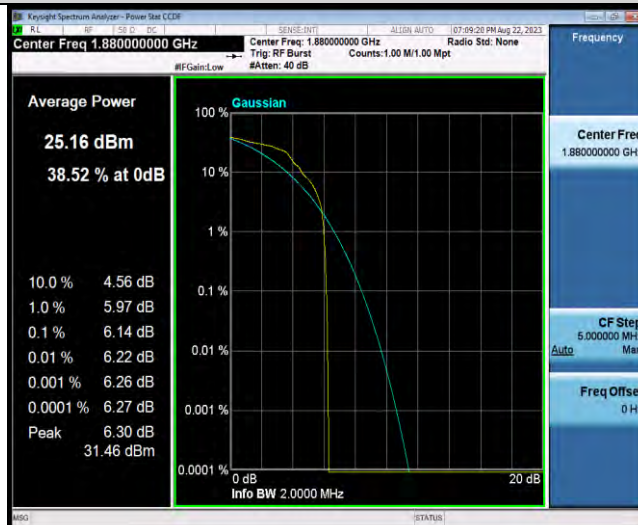


EGPRS1900-810



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

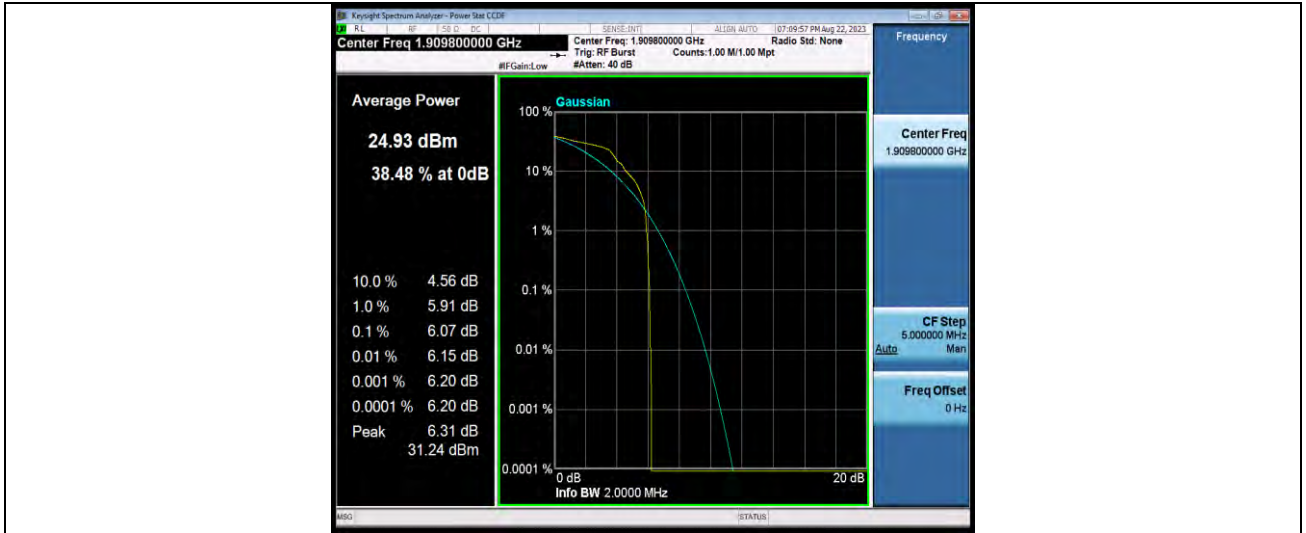



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

26DB BANDWIDTH AND OCCUPIED BANDWIDTH

Test Result


Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	Verdict
GSM1900	512	0.24395	0.3084	---	PASS
GSM1900	661	0.24581	0.3182	---	PASS
GSM1900	810	0.25052	0.3109	---	PASS
EGPRS1900	512	0.24259	0.3009	---	PASS
EGPRS1900	661	0.24148	0.3019	---	PASS
EGPRS1900	810	0.24062	0.3010	---	PASS



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05


Test Graphs

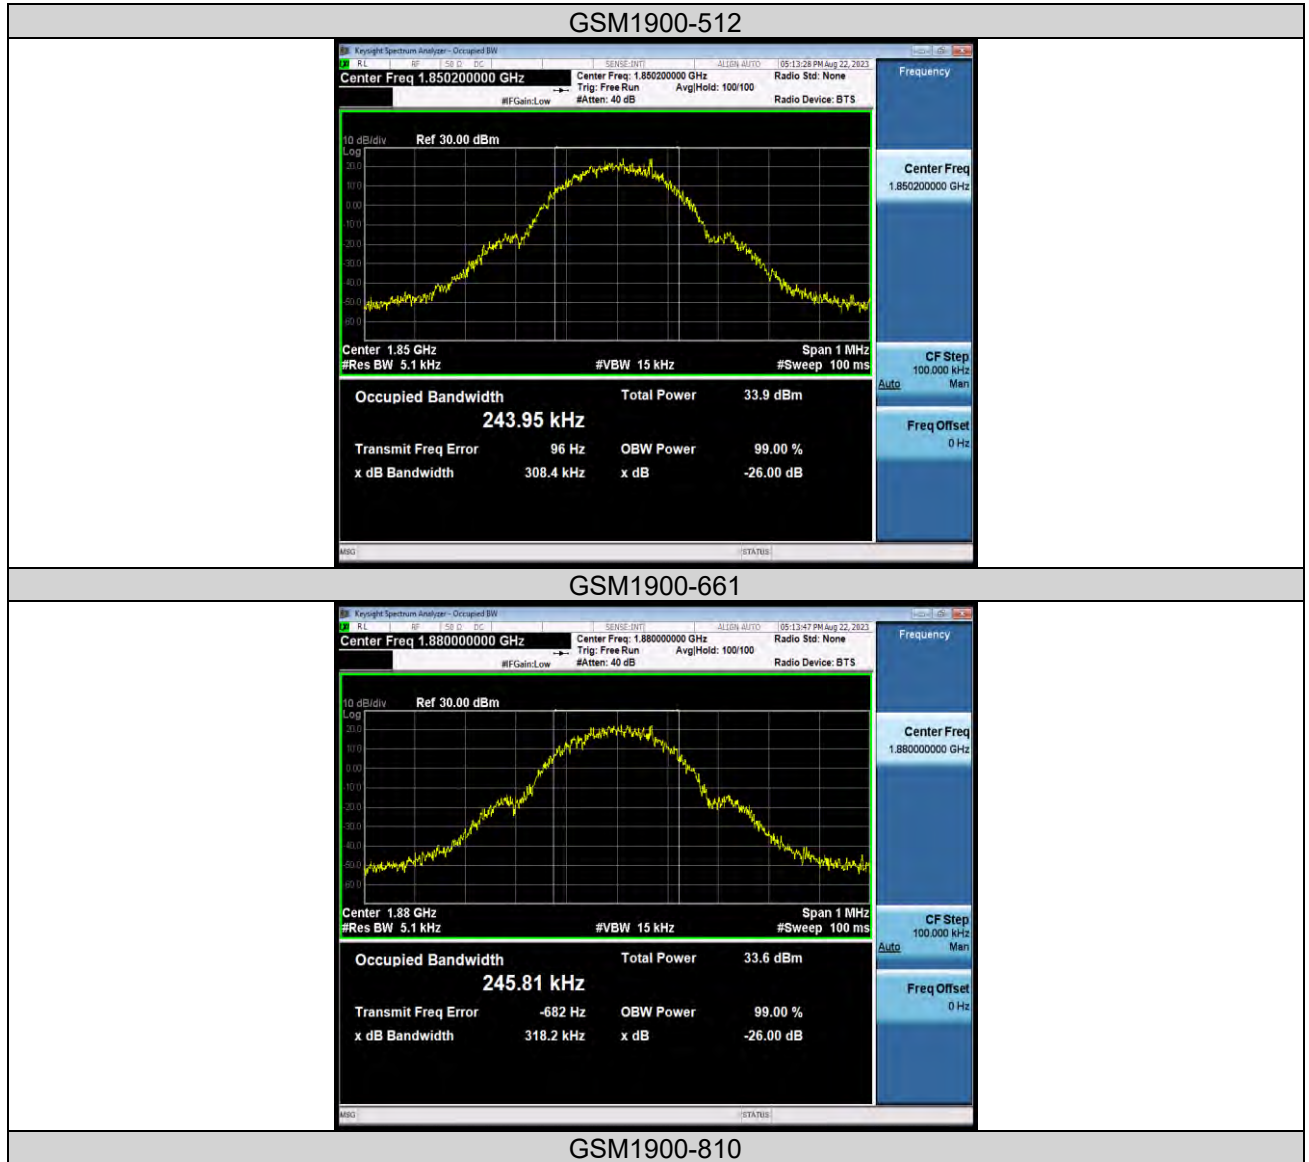




BUREAU VERITAS


Test Report No.: W7L-P23080017RF05

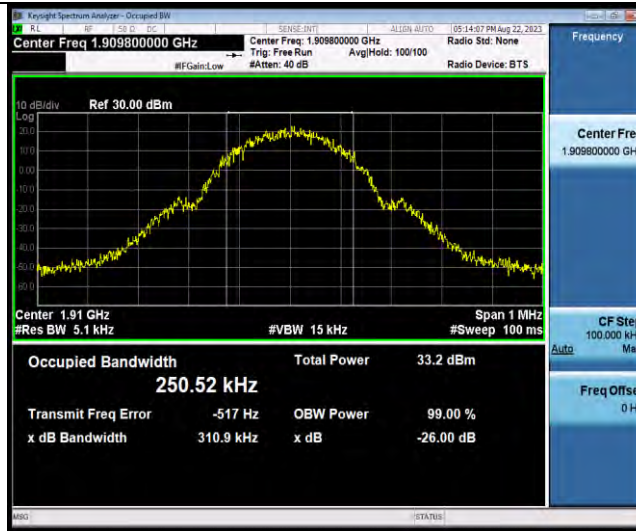

EGPRS1900-512

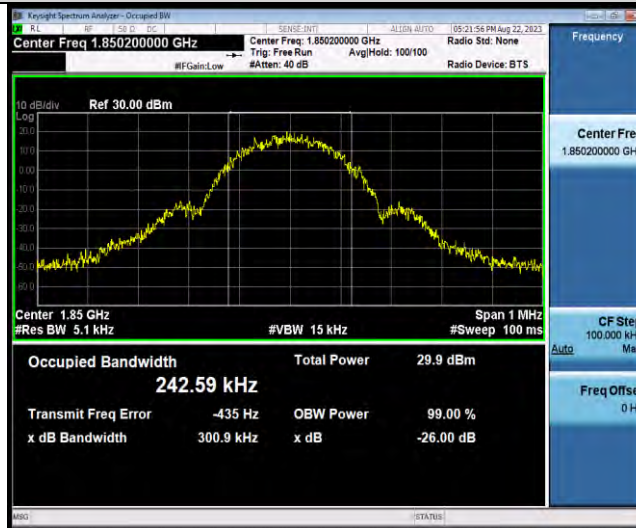

EGPRS1900-661

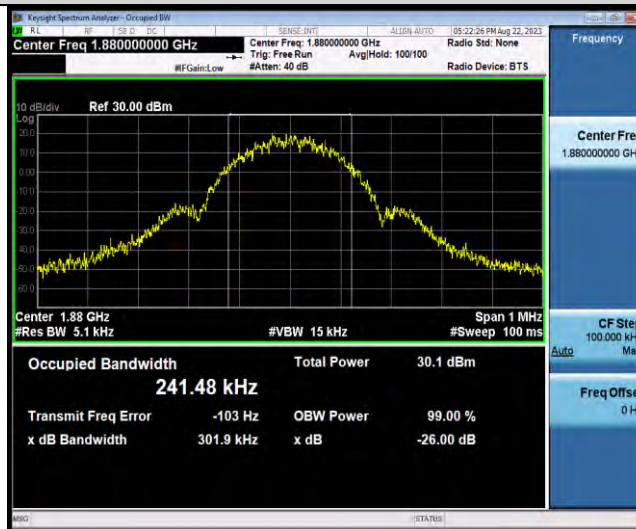


EGPRS1900-810



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

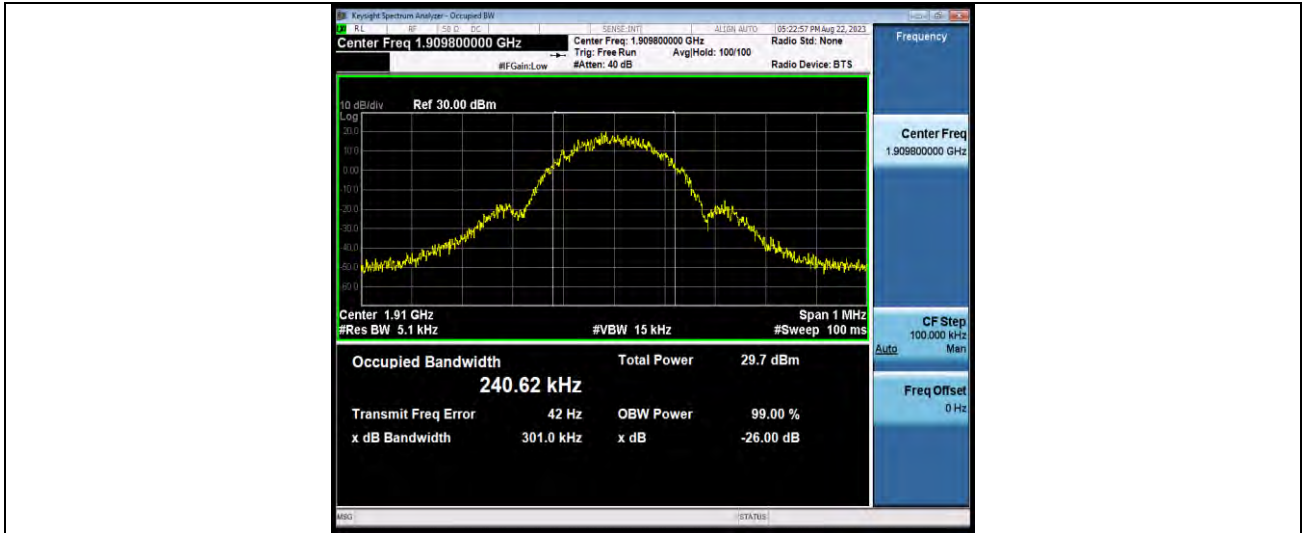



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

BAND EDGE

Test Result


Band	Channel	Freq (MHz)	Result (dBm)	Limit(dBm)	Verdict
GSM1900	512	1849.97	-27.34	-13	PASS
GSM1900	810	1910.03	-27.10	-13	PASS
EGPRS1900	512	1850.00	-29.17	-13	PASS
EGPRS1900	810	1910.03	-31.06	-13	PASS



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

Test Graphs

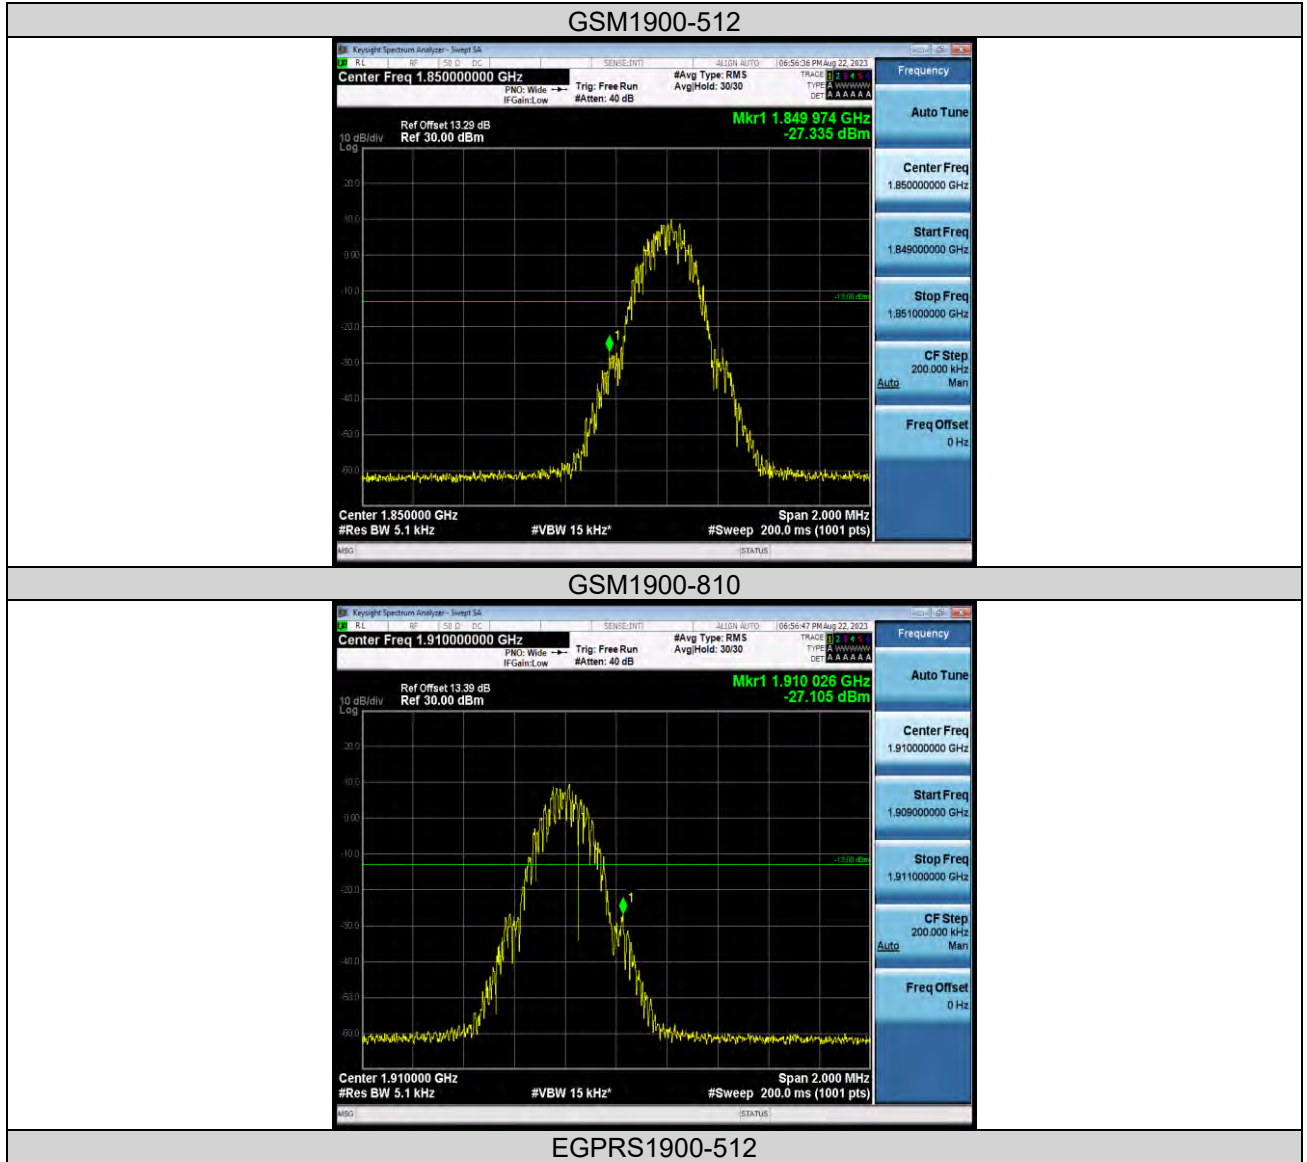




BUREAU VERITAS

Test Report No.: W7L-P23080017RF05



EGPRS1900-810

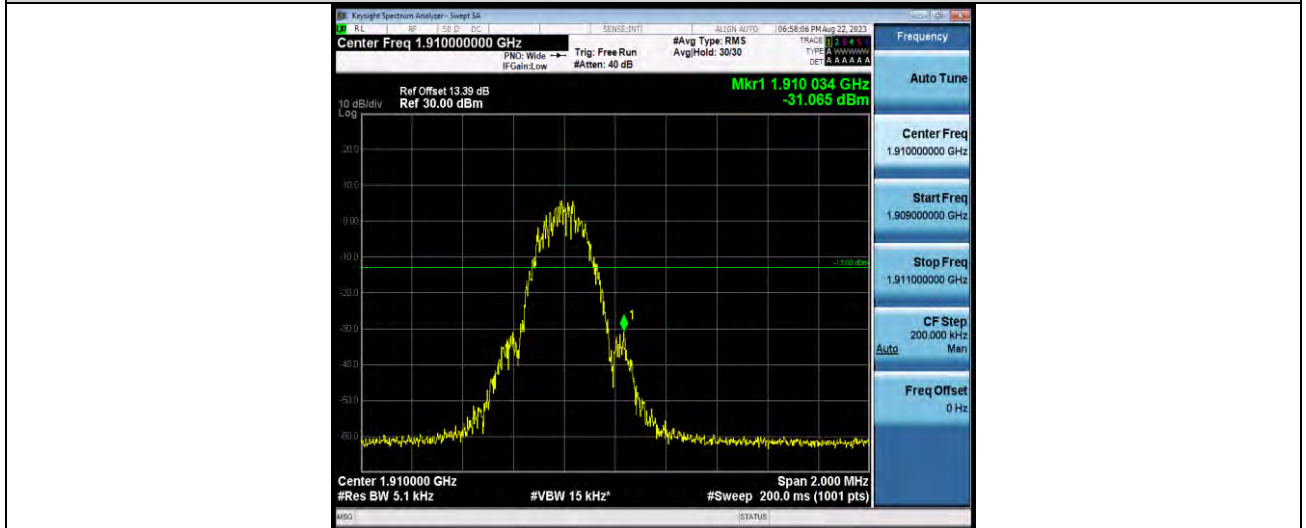



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

CONDUCTED SPURIOUS EMISSION

Test Result


Band	Channel	Frequency Range(MHz)	Max.Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM1900	512	30~1000MHz	891.52	-40.25	-13	PASS
GSM1900	512	1000~20000MHz	19089.9	-32.31	-13	PASS
GSM1900	661	30~1000MHz	770.85	-40.91	-13	PASS
GSM1900	661	1000~20000MHz	19175.4	-31.6	-13	PASS
GSM1900	810	30~1000MHz	898.15	-37.72	-13	PASS
GSM1900	810	1000~20000MHz	19267.23	-32	-13	PASS
EGPRS1900	512	30~1000MHz	864.75	-40.28	-13	PASS
EGPRS1900	512	1000~20000MHz	18996.17	-31.8	-13	PASS
EGPRS1900	661	30~1000MHz	938.11	-40.67	-13	PASS
EGPRS1900	661	1000~20000MHz	19025.3	-32.07	-13	PASS
EGPRS1900	810	30~1000MHz	895.98	-40.02	-13	PASS
EGPRS1900	810	1000~20000MHz	19101.3	-32.02	-13	PASS



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05


Test Graphs

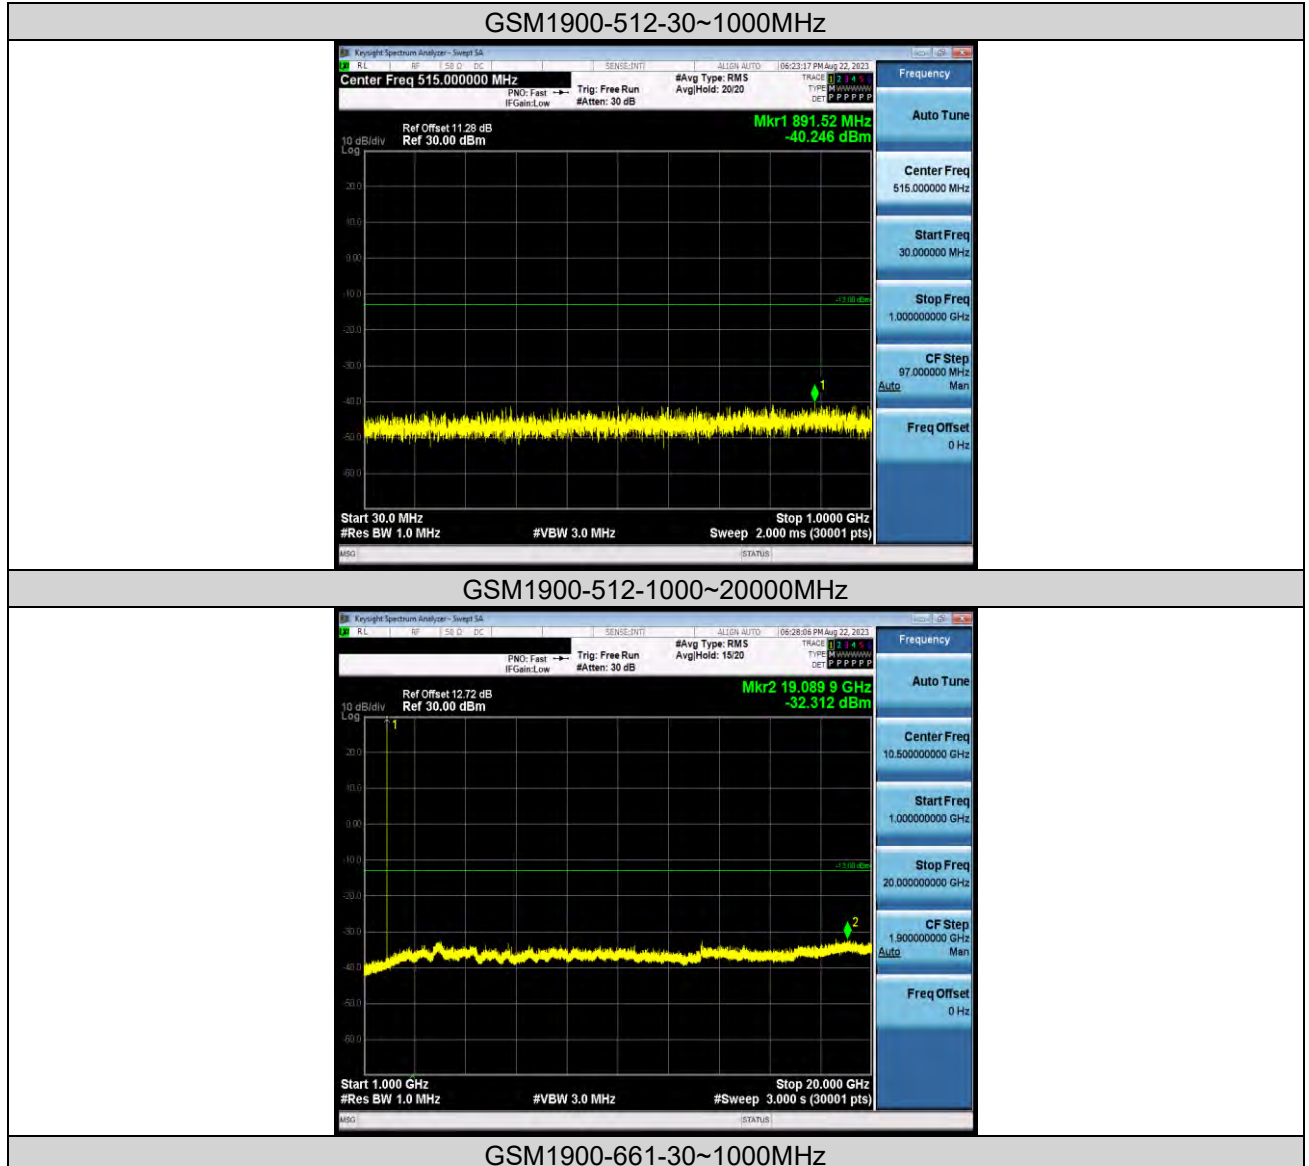



BUREAU VERITAS


Test Report No.: W7L-P23080017RF05

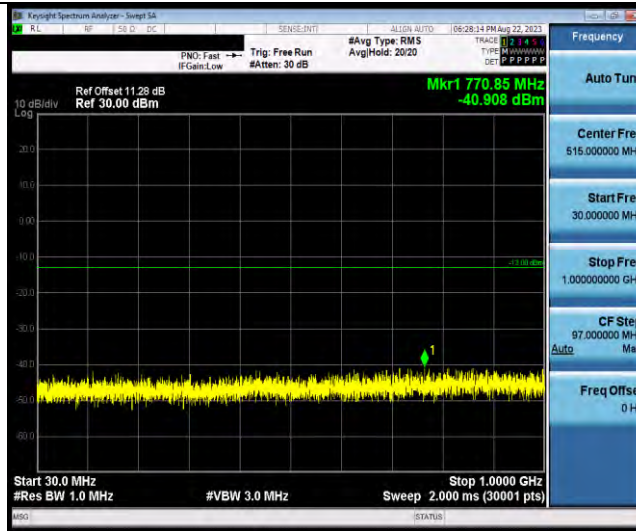

GSM1900-661-1000~2000MHz



GSM1900-810-30~1000MHz

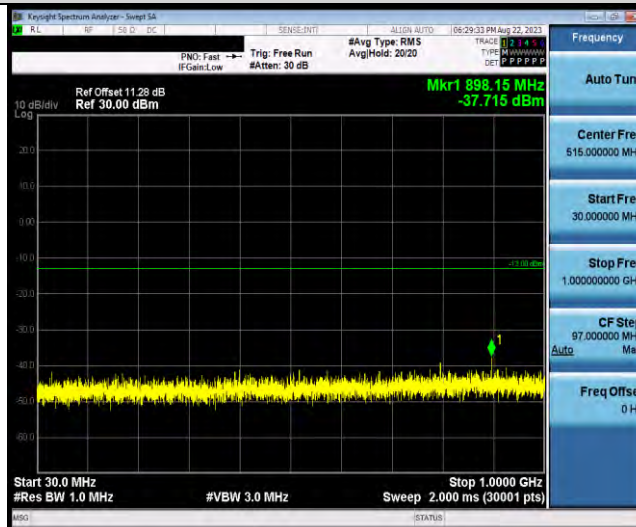

GSM1900-810-1000~2000MHz

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




BUREAU VERITAS

Test Report No.: W7L-P23080017RF05

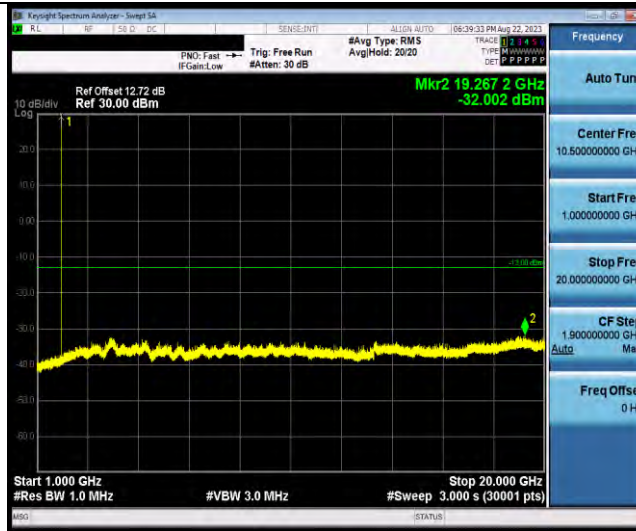

EGPRS1900-512-30~1000MHz

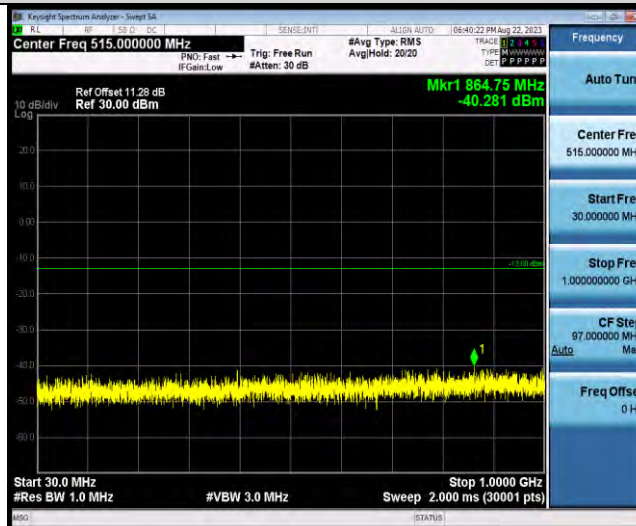

EGPRS1900-512-1000~2000MHz




EGPRS1900-661-30~1000MHz



BUREAU VERITAS


Test Report No.: W7L-P23080017RF05

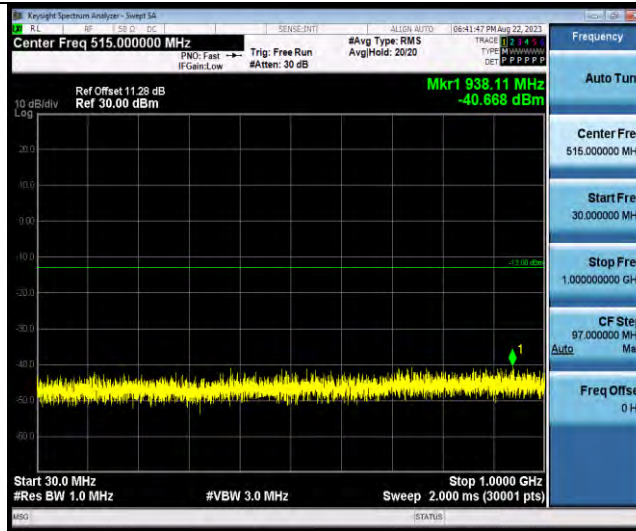

EGPRS1900-661-1000~20000MHz



EGPRS1900-810-30~1000MHz

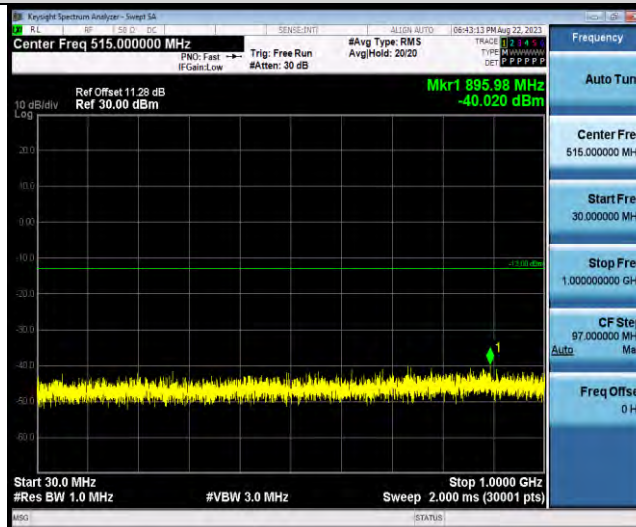

EGPRS1900-810-1000~20000MHz

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China


Tel: +86 755 8869 6566
Fax: +86 755 8869 6577

Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

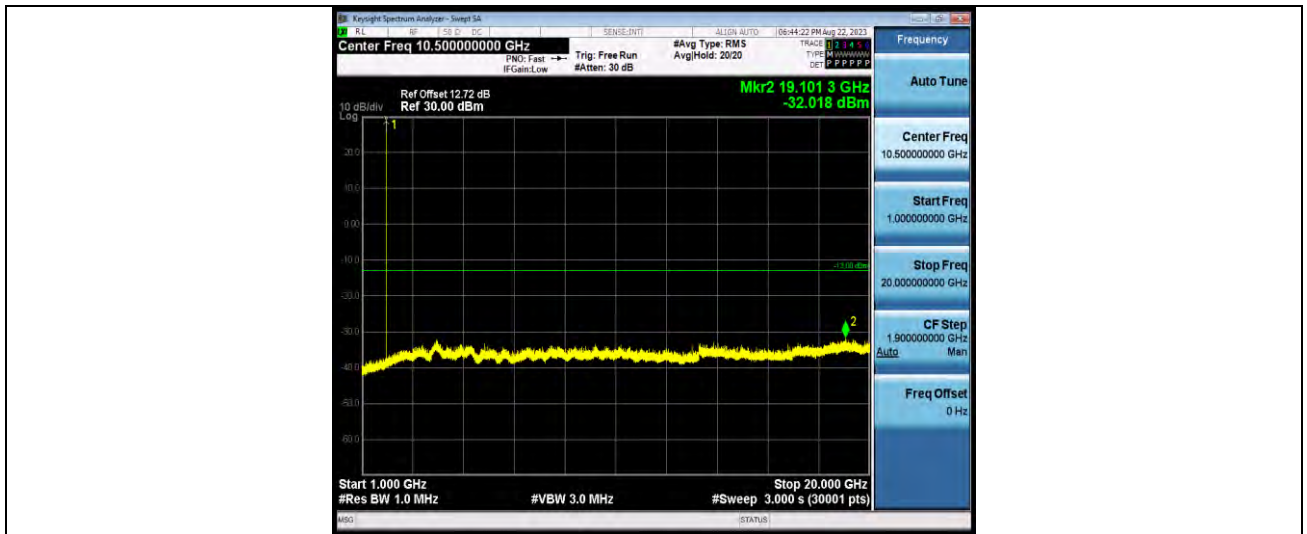

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan
Avenue, North Area, Hi-Tech Industrial Park, Nanshan
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



FREQUENCY STABILITY

Test Result

Voltage							
Band	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
GSM1900	512	LV	NT	8.43	0.004556	±2.5	PASS
GSM1900	512	NV	NT	8.33	0.004502	±2.5	PASS
GSM1900	512	HV	NT	8.27	0.004470	±2.5	PASS
GSM1900	661	LV	NT	7.52	0.004000	±2.5	PASS
GSM1900	661	NV	NT	7.33	0.003899	±2.5	PASS
GSM1900	661	HV	NT	6.49	0.003452	±2.5	PASS
GSM1900	810	LV	NT	8.78	0.004597	±2.5	PASS
GSM1900	810	NV	NT	8.65	0.004529	±2.5	PASS
GSM1900	810	HV	NT	12.46	0.006524	±2.5	PASS

Temperature							
Band	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
GSM1900	512	NV	-30	0.16	0.000086	±2.5	PASS
GSM1900	512	NV	-20	0.68	0.000368	±2.5	PASS
GSM1900	512	NV	-10	-1.19	-0.000643	±2.5	PASS
GSM1900	512	NV	0	6.01	0.003248	±2.5	PASS
GSM1900	512	NV	10	11.53	0.006232	±2.5	PASS
GSM1900	512	NV	20	1.55	0.000838	±2.5	PASS
GSM1900	512	NV	30	10.14	0.005480	±2.5	PASS
GSM1900	512	NV	40	5.00	0.002702	±2.5	PASS
GSM1900	512	NV	50	6.68	0.003610	±2.5	PASS
GSM1900	661	NV	-30	10.23	0.005441	±2.5	PASS
GSM1900	661	NV	-20	6.62	0.003521	±2.5	PASS
GSM1900	661	NV	-10	3.42	0.001819	±2.5	PASS
GSM1900	661	NV	0	11.40	0.006064	±2.5	PASS
GSM1900	661	NV	10	5.88	0.003128	±2.5	PASS
GSM1900	661	NV	20	3.42	0.001819	±2.5	PASS
GSM1900	661	NV	30	13.27	0.007059	±2.5	PASS
GSM1900	661	NV	40	9.69	0.005154	±2.5	PASS
GSM1900	661	NV	50	3.91	0.002080	±2.5	PASS
GSM1900	810	NV	-30	11.95	0.006257	±2.5	PASS
GSM1900	810	NV	-20	3.65	0.001911	±2.5	PASS
GSM1900	810	NV	-10	4.81	0.002519	±2.5	PASS
GSM1900	810	NV	0	13.33	0.006980	±2.5	PASS
GSM1900	810	NV	10	5.36	0.002807	±2.5	PASS
GSM1900	810	NV	20	4.46	0.002335	±2.5	PASS
GSM1900	810	NV	30	6.78	0.003550	±2.5	PASS
GSM1900	810	NV	40	6.13	0.003210	±2.5	PASS
GSM1900	810	NV	50	7.46	0.003906	±2.5	PASS



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

MAX Deviation calculation

Frequency Stability	Frequency (MHz)	Limit Line(MHz)	Result
$f_L - \text{MAX}(\Delta f) $	1850.078012	≥ 1850	PASS
$f_H + \text{MAX}(\Delta f) $	1909.674753	≤ 1910	

- Note :
1. $|\text{MAX}(\Delta f)|$ = Max Deviation
 2. f_L = Occ low channel $f_L(-13\text{dBm/MHz})$
 3. f_H = Occ High channel $f_H(-13\text{dBm/MHz})$
 4. $|\text{MAX}(\Delta f)| = 13.33 \text{ Hz}$.



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

WCDMA BAND2

PEAK-TO-AVERAGE RATIO

Test Result


Band	Channel	Peak-to-Average Ratio(dB)	Limit(dBm)	Verdict
Band2	9262	2.88	13	PASS
Band2	9400	2.93	13	PASS
Band2	9538	2.79	13	PASS



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05


Test Graphs

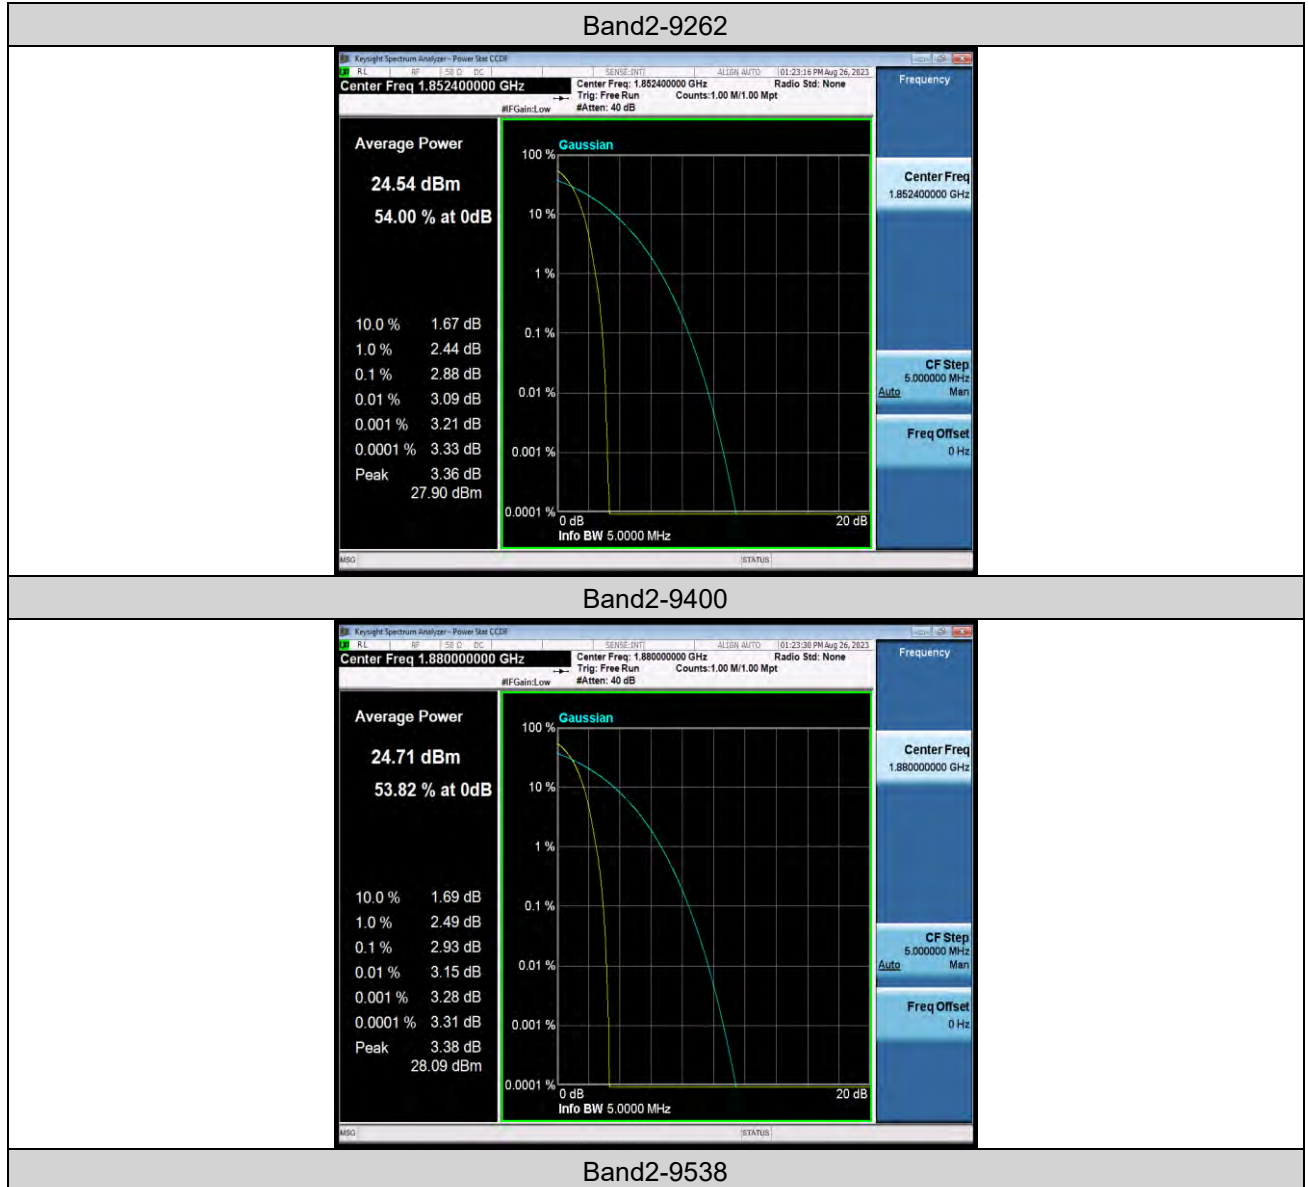



**BUREAU
VERITAS**

Test Report No.: W7L-P23080017RF05

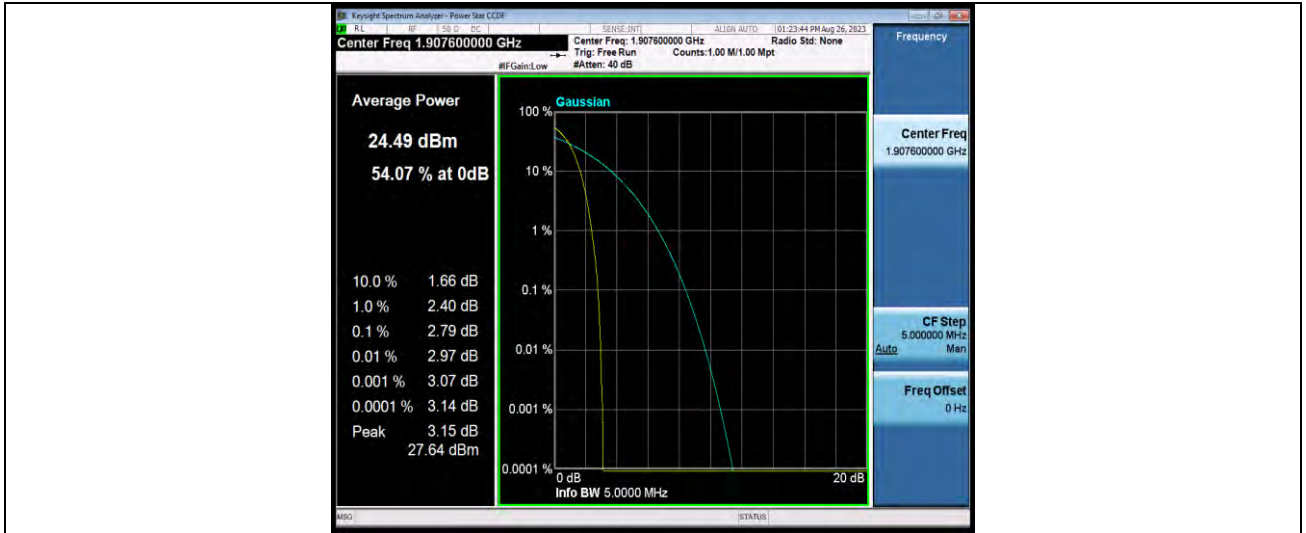



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

26DB BANDWIDTH AND OCCUPIED BANDWIDTH

Test Result


Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit(kHz)	Verdict
Band2	9262	4.1755	4.715	---	PASS
Band2	9400	4.1819	4.709	---	PASS
Band2	9538	4.1865	4.711	---	PASS



BUREAU VERITAS

Test Report No.: W7L-P23080017RF05


Test Graphs

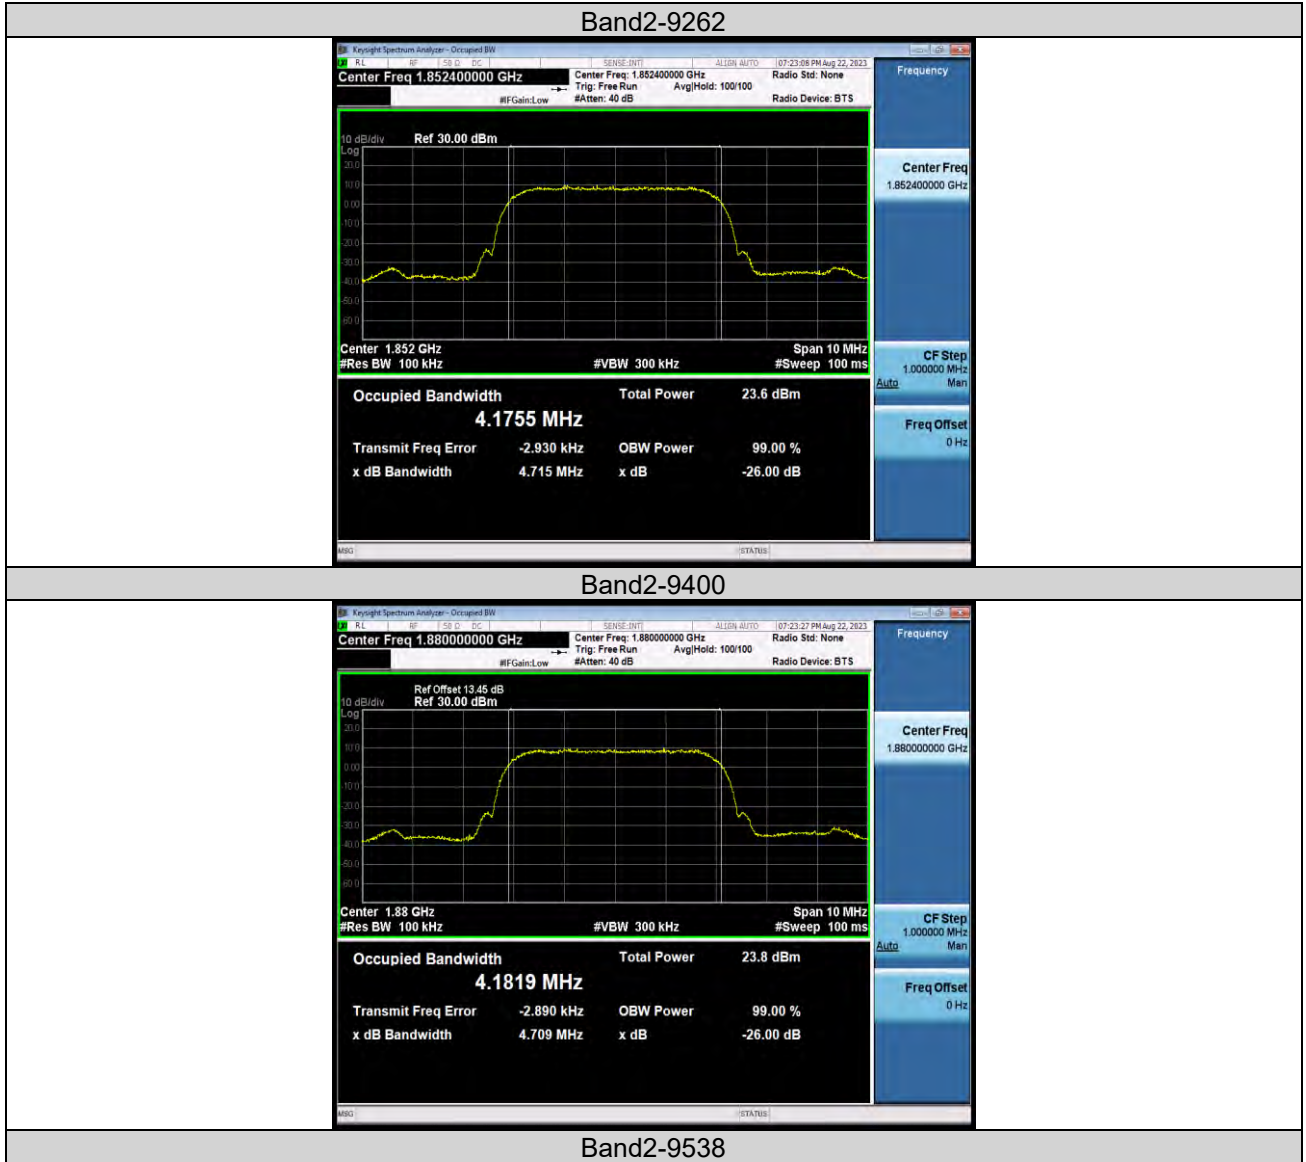



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

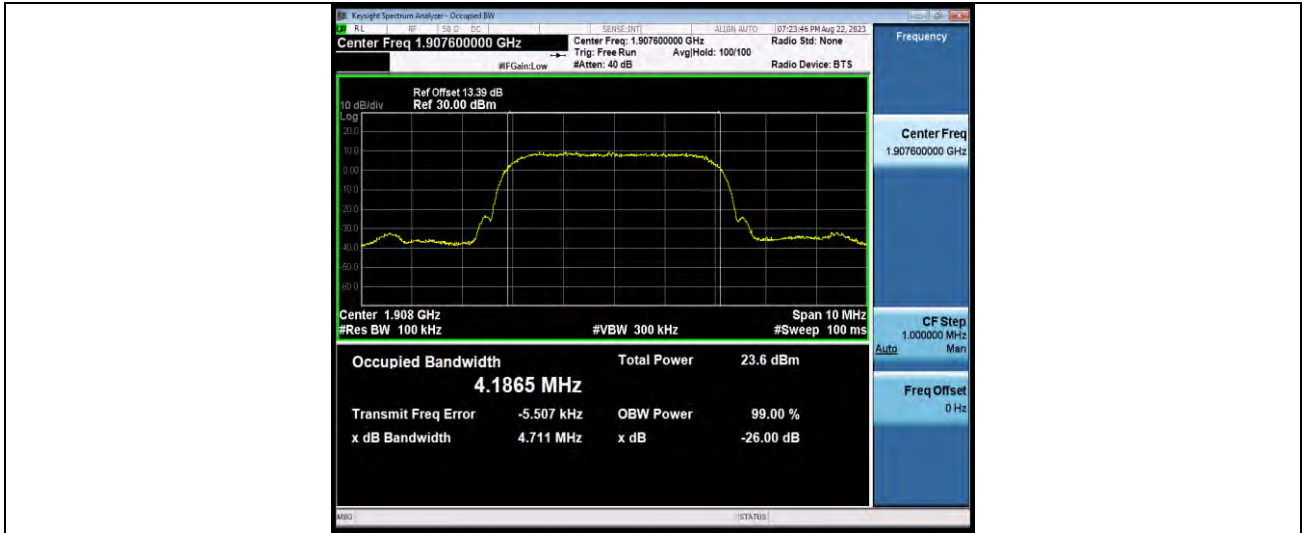



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

BAND EDGE

Test Result

Band	Channel	Frequency (MHz)	Result (dBm)	Limit(dBm)	Verdict
Band2	9262	1849.86	-25.43	-13	PASS
Band2	9538	1910.11	-26.89	-13	PASS



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

Test Graphs





BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

CONDUCTED SPURIOUS EMISSION

Test Result

Band	Channel	Frequency Range (Mhz)	Frequency (dBm)	Result (dBm)	Limit (dBm)	Verdict
Band2	9262	30~1000MHz	884.02	-39.52	-13	PASS
Band2	9262	1000~20000MHz	19135.5	-32.36	-13	PASS
Band2	9400	30~1000MHz	759.99	-40.06	-13	PASS
Band2	9400	1000~20000MHz	19210.87	-31.78	-13	PASS
Band2	9538	30~1000MHz	768.53	-40.58	-13	PASS
Band2	9538	1000~20000MHz	19146.27	-31.41	-13	PASS



BUREAU
VERITAS

Test Report No.: W7L-P23080017RF05

Test Graphs

