



# FCC RF Test Report

**APPLICANT** : Xiaomi Communications Co., Ltd.  
**EQUIPMENT** : Mobile Phone  
**BRAND NAME** : Xiaomi  
**MODEL NAME** : 2306EPN60G  
**FCC ID** : 2AFZZN60G  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System  
**TEST DATE(S)** : May 10, 2023 ~ Jun. 02, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 6

    1.5 Modification of EUT ..... 6

    1.6 Testing Location ..... 7

    1.7 Test Software..... 7

    1.8 Applicable Standards..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Carrier Frequency and Channel ..... 8

    2.2 Test Mode..... 9

    2.3 Connection Diagram of Test System..... 9

    2.4 Support Unit used in test configuration and system ..... 10

    2.5 EUT Operation Test Setup ..... 10

    2.6 Measurement Results Explanation Example..... 10

**3 TEST RESULT ..... 11**

    3.1 6dB Bandwidth Measurement ..... 11

    3.2 Output Power Measurement..... 12

    3.3 Power Spectral Density Measurement ..... 13

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 14

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 15

    3.6 AC Conducted Emission Measurement..... 19

    3.7 Antenna Requirements ..... 21

**4 LIST OF MEASURING EQUIPMENT ..... 22**

**5 MEASUREMENT UNCERTAINTY ..... 23**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR350505C	Rev. 01	Initial issue of report	Jun. 12, 2023



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.16 dB at 2484.34 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.93 dB at 0.191 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1 General Description

## 1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

## 1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Xiaomi
Model Name	2306EPN60G
FCC ID	2AFZZN60G
IMEI Code	Conducted: 864825060085862/864825060085870 Conduction: 864825060101180/864825060101198 Radiation: 8648250606699343/8648250606699350
HW Version	P2.0
SW Version	MIUI 14
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Channel Frequency Range</b>	2412 MHz ~ 2462 MHz
<b>Maximum (Peak) Output Power to antenna</b>	<MIMO Ant.17+6> 802.11b : 23.05 dBm (0.2018 W) 802.11g : 28.57 dBm (0.7194 W) 802.11n HT20 : 28.35 dBm (0.6839 W) 802.11ax HE20 : 28.44 dBm (0.6982 W)
<b>Antenna Type / Gain</b>	Ant.17: Fixed Internal Antenna with gain -2.62 dBi Ant.6: Fixed Internal Antenna with gain -1.72 dBi
<b>Type of Modulation</b>	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.
2. For WLAN2.4GHz SISO & MIMO mode, the whole testing has assessed only MIMO mode to cover SISO mode. WLAN MIMO only support CDD mode.
3. For 802.11n HT20 & 11ax HE20, the full testing assessed 802.11ax HE20 by referring to the maximum output power.
4. 802.11ax support full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) are tested for conducted Power/PSD, the full RU Power/PSD > partial RU, therefore the full RU perform full test and Partial RU verified Bandedge and Spurious.
5. The device does not support 802.11ax channel puncture mode.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH08-KS TH01-KS	CN1257	314309

### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH08-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

### MIMO Antenna


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11ax HE20	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :GSM 850 Idle+ WLAN Link(2.4G)+ BT Link+ USB Cable(Charging From Adapter)

Simultaneous transmission
Bluetooth LE(2Mbps) CH39 (2480MHz)+ 802.11ax HE20 CH11 (2462MHz)+ LTE Band 13(BW=5M)

Remark: For Radiated Test Cases, The tests were performance with Adapter and USB Cable.

## 2.3 Connection Diagram of Test System

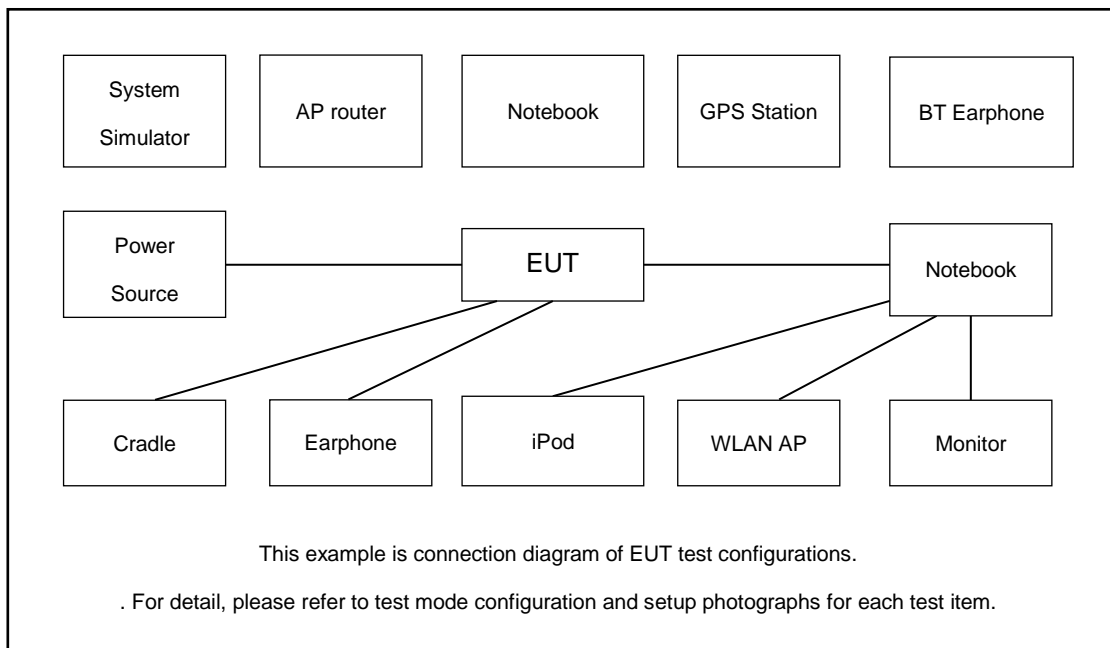



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
3.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 2.11 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset}(dB) &= \text{RF cable loss}(dB) + \text{attenuator factor}(dB). \\
 &= 2.11 + 10 = 12.11 \text{ (dB)}
 \end{aligned}$$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

##### 3.1.4 Test Setup



##### 3.1.5 Test Result of 6dB Occupied Bandwidth

Please refer to Appendix A.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

### 3.2.4 Test Setup

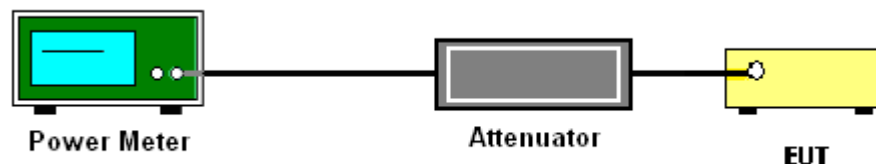

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

#### 3.3.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.  
I Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

#### 3.3.4 Test Setup

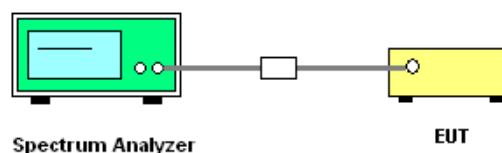

#### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

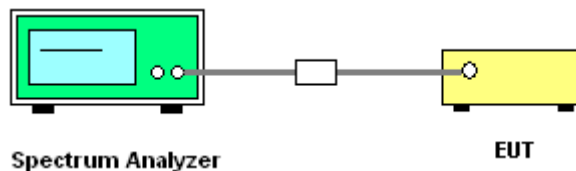

### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




### 3.5.4 Test Setup


For radiated emissions below 30MHz

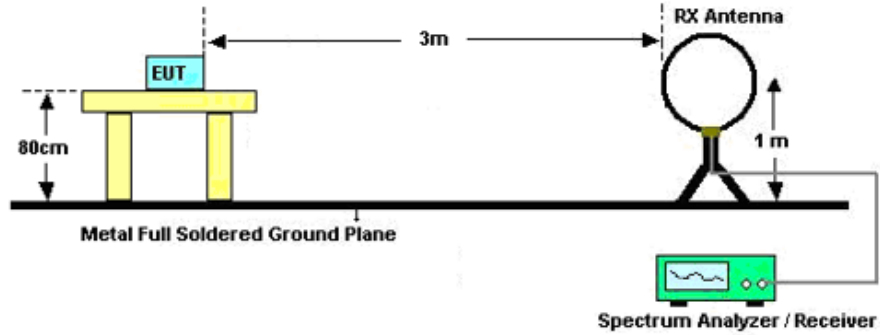

For radiated emissions from 30MHz to 1GHz

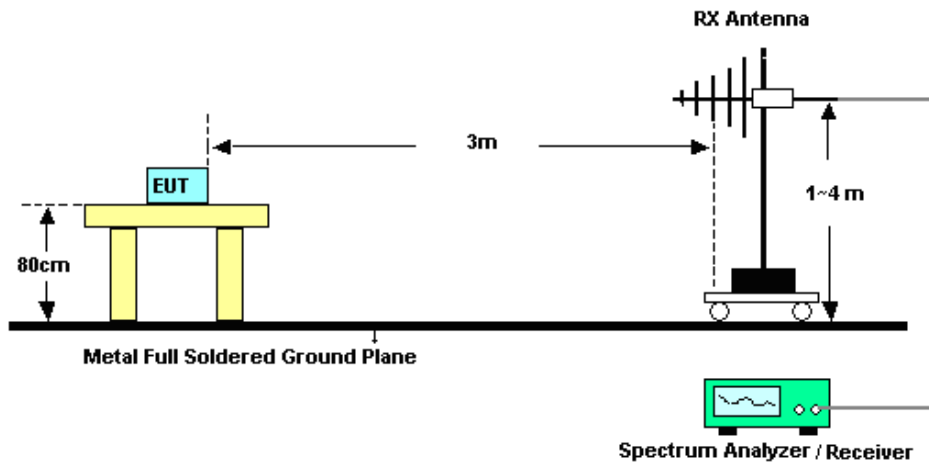

For radiated emissions above 1GHz

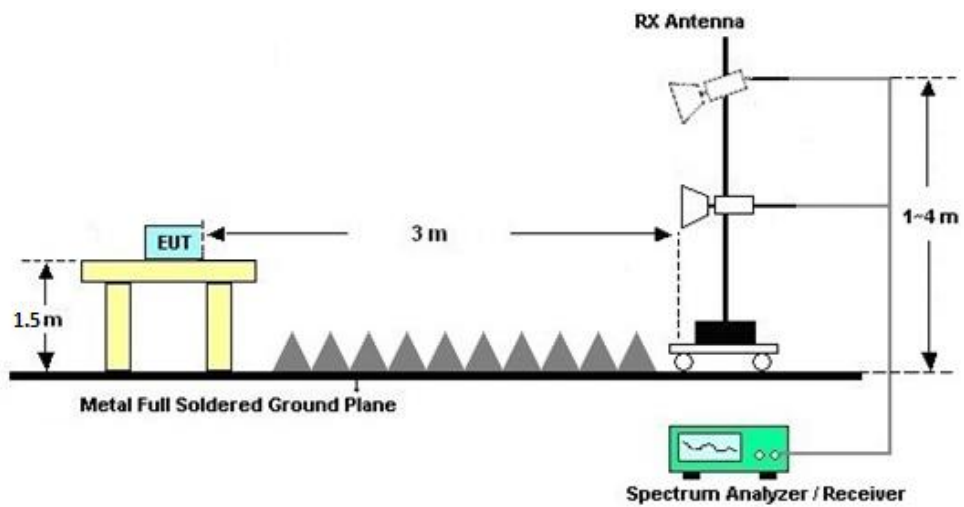



### **3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.

## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.6.4 Test Setup

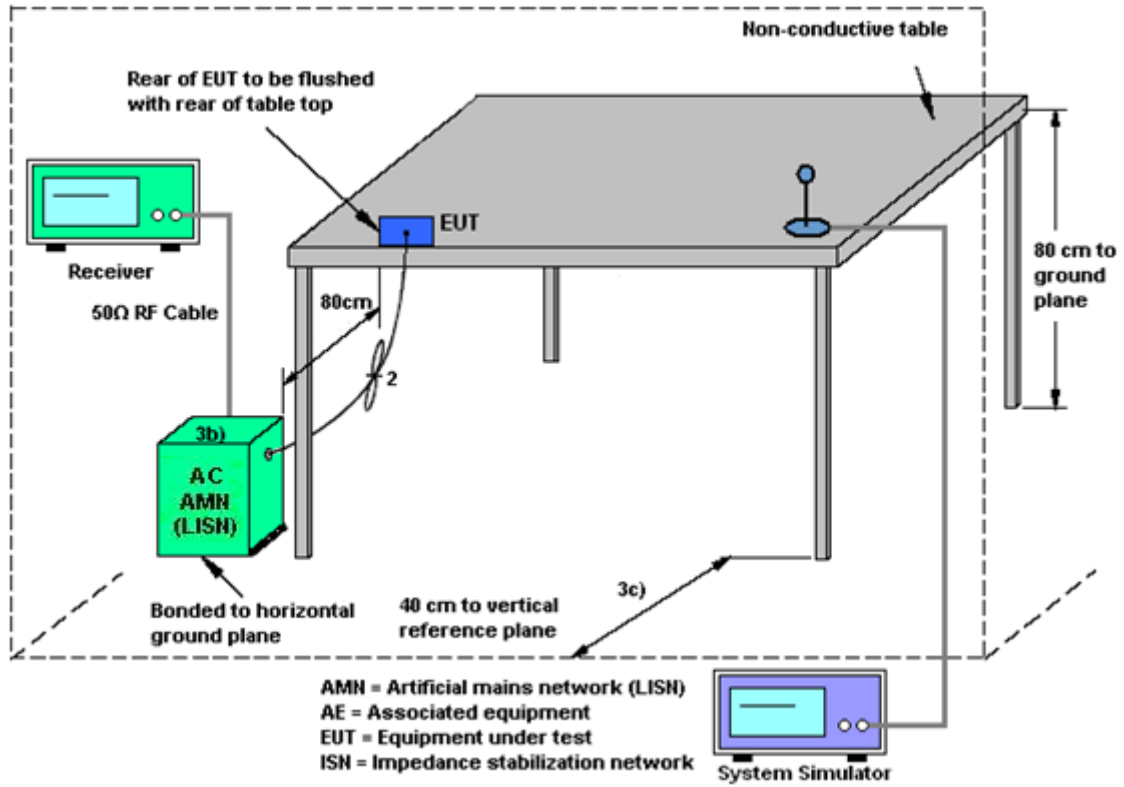

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



### 3.7 Antenna Requirements

#### 3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

#### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain =  $10 \log(N_{ANT}/N_{SS}=1)$  dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ .

Directional gain may be calculated by using the formulas applicable to equal gain antennas with  $G_{ANT}$  set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain  $G_{ANT}$  is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<b>&lt;CDD Modes&gt;</b>						
	<b>Ant. 17</b>	<b>Ant. 6</b>	<b>DG for Power</b>	<b>DG for PSD</b>	<b>Power Limit Reduction</b>	<b>PSD Limit Reduction</b>
	<b>(dBi)</b>	<b>(dBi)</b>	<b>(dBi)</b>	<b>(dBi)</b>	<b>(dB)</b>	<b>(dB)</b>
<b>2.4 GHz</b>	-2.62	-1.72	-1.72	0.85	0.00	0.00



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	May 10, 2023~ May 31, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	May 10, 2023~ May 31, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	May 10, 2023~ May 31, 2023	Jan. 04, 2024	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY572901 51	3Hz~8.5GHz;Max x 30dBm	Jul. 11, 2022	Jun. 01, 2023	Jul. 10, 2023	Radiation (03CH08-KS)
Spectrum Analyzer	R&S	FSV40	101932	10kHz~40GHz;Max x 30dBm	Oct. 12, 2022	Jun. 01, 2023	Oct. 11, 2023	Radiation (03CH08-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Jun. 01, 2023	Oct. 15, 2023	Radiation (03CH08-KS)
Bilog Antenna	TESEQ& VGT	CBL 61110	59915	30MHz-1GHz	Aug. 26, 2022	Jun. 01, 2023	Aug. 25, 2023	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jul. 08, 2022	Jun. 01, 2023	Jul. 07, 2023	Radiation (03CH08-KS)
high gain Amplifier	EM	EM01G18GA	060845	1Ghz-18Ghz	Jan. 05, 2023	Jun. 01, 2023	Jan. 04, 2024	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2023	Jun. 01, 2023	Jan. 07, 2024	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan. 05, 2023	Jun. 01, 2023	Jan. 04, 2024	Radiation (03CH08-KS)
Amplifier	EM	EM01G18GA	060834	1Ghz-18Ghz	Oct. 12, 2022	Jun. 01, 2023	Oct. 11, 2023	Radiation (03CH08-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2023	Jun. 01, 2023	Jan. 04, 2024	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002 473	N/A	NCR	Jun. 01, 2023	NCR	Radiation (03CH08-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Jun. 01, 2023	NCR	Radiation (03CH08-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Jun. 01, 2023	NCR	Radiation (03CH08-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 16, 2023	Jun. 02, 2023	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Jun. 02, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Jun. 02, 2023	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Jun. 02, 2023	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.1 %
Conducted Power Spectral Density	±0.40 dB

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.28dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.90dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26dB
---	--------

----- THE END -----



## Appendix A. Conducted Test Results



Report Number : FR350505C

Test Engineer:	Jiang Jun	Temperature:	21~25	°C
Test Date:	2023.5.10~2023.5.31	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**Peak Output Power**

2.4GHz Band MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant17	Ant6	SUM	Ant17	Ant6	Ant17	Ant6	Ant17	Ant6	Ant17	Ant6	
11b	1Mbps	2	1	2412	20.16	19.26	22.74	30.00		-1.72		21.02		36.00	Pass	
11b	1Mbps	2	6	2437	20.41	19.63	23.05	30.00		-1.72		21.33		36.00	Pass	
11b	1Mbps	2	11	2462	19.56	18.96	22.28	30.00		-1.72		20.56		36.00	Pass	
11g	6Mbps	2	1	2412	24.54	24.63	27.60	30.00		-1.72		25.88		36.00	Pass	
11g	6Mbps	2	6	2437	25.67	25.45	28.57	30.00		-1.72		26.85		36.00	Pass	
11g	6Mbps	2	11	2462	24.82	25.15	28.00	30.00		-1.72		26.28		36.00	Pass	
HT20	MCS0	2	1	2412	22.72	22.76	25.75	30.00		-1.72		24.03		36.00	Pass	
HT20	MCS0	2	6	2437	25.33	25.35	28.35	30.00		-1.72		27.06		36.00	Pass	
HT20	MCS0	2	11	2462	24.96	25.05	28.02	30.00		-1.72		26.30		36.00	Pass	

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Peak Output Power**

2.4GHz Band MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant17	Ant6	SUM	Ant17	Ant6	Ant17	Ant6	Ant17	Ant6	Ant17	Ant6	
HE20	MCS0	2	1	2412	Full	22.75	22.82	25.80	30.00		-1.72		24.08		36.00	Pass	
HE20	MCS0	2	1	2412	26/0	16.48	15.65	19.10	30.00		-1.72		17.38		36.00	Pass	
HE20	MCS0	2	1	2412	52/37	18.54	19.64	22.14	30.00		-1.72		20.42		36.00	Pass	
HE20	MCS0	2	1	2412	106/53	21.13	22.07	24.64	30.00		-1.72		22.92		36.00	Pass	
HE20	MCS0	2	6	2437	Full	25.34	25.52	28.44	30.00		-1.72		26.72		36.00	Pass	
HE20	MCS0	2	6	2437	26/0	19.27	18.91	22.10	30.00		-1.72		20.38		36.00	Pass	
HE20	MCS0	2	6	2437	52/37	21.52	20.87	24.22	30.00		-1.72		22.50		36.00	Pass	
HE20	MCS0	2	6	2437	106/53	23.56	23.71	26.65	30.00		-1.72		24.93		36.00	Pass	
HE20	MCS0	2	11	2462	Full	25.15	25.08	28.13	30.00		-1.72		26.41		36.00	Pass	
HE20	MCS0	2	11	2462	26/8	18.47	18.94	21.72	30.00		-1.72		20.00		36.00	Pass	
HE20	MCS0	2	11	2462	52/40	20.85	21.89	24.41	30.00		-1.72		22.69		36.00	Pass	
HE20	MCS0	2	11	2462	106/54	22.45	23.31	25.91	30.00		-1.72		24.19		36.00	Pass	

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Average Output Power**

2.4GHz Band MIMO																		
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant 1	Ant 2	Ant17	Ant6	SUM	Ant17	Ant6	Ant17	Ant6	Ant17	Ant6	Ant17	Ant6	
11b	1Mbps	2	1	2412	0.00	0.00	17.12	16.81	19.98	30.00		-1.72		18.26		36.00		Pass
11b	1Mbps	2	6	2437	0.00	0.00	17.61	17.09	20.37	30.00		-1.72		18.65		36.00		Pass
11b	1Mbps	2	11	2462	0.00	0.00	16.92	16.39	19.67	30.00		-1.72		17.95		36.00		Pass
11g	6Mbps	2	1	2412	0.13	0.13	15.28	15.25	18.28	30.00		-1.72		16.56		36.00		Pass
11g	6Mbps	2	6	2437	0.13	0.13	16.75	16.48	19.63	30.00		-1.72		17.91		36.00		Pass
11g	6Mbps	2	11	2462	0.13	0.13	16.08	15.94	19.02	30.00		-1.72		17.30		36.00		Pass
HT20	MCS0	2	1	2412	0.14	0.14	12.67	12.76	15.73	30.00		-1.72		14.01		36.00		Pass
HT20	MCS0	2	6	2437	0.14	0.14	16.64	16.43	19.55	30.00		-1.72		17.83		36.00		Pass
HT20	MCS0	2	11	2462	0.14	0.14	15.48	15.42	18.46	30.00		-1.72		16.74		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Average Output Power**

2.4GHz Band MIMO																				
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)			Average Conducted Power with duty factor (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant17	Ant6	SUM	Ant17	Ant6	SUM	Ant17	Ant6	Ant17	Ant6	Ant17	Ant6	Ant17	Ant6	
HE20	MCS0	2	1	2412	Full	0.21	0.21	12.76	12.89	15.84	30.00	30.00	-1.72	14.12	36.00	Pass				
HE20	MCS0	2	1	2412	26/0	0.03	0.03	6.68	5.39	9.09	30.00	30.00	-1.72	7.37	36.00	Pass				
HE20	MCS0	2	1	2412	52/37	0.03	0.03	8.30	9.06	11.71	30.00	30.00	-1.72	9.99	36.00	Pass				
HE20	MCS0	2	1	2412	106/53	0.10	0.10	10.29	11.05	13.70	30.00	30.00	-1.72	11.98	36.00	Pass				
HE20	MCS0	2	6	2437	Full	0.21	0.21	16.94	16.69	19.83	30.00	30.00	-1.72	18.11	36.00	Pass				
HE20	MCS0	2	6	2437	26/0	0.03	0.03	8.68	8.42	11.56	30.00	30.00	-1.72	9.84	36.00	Pass				
HE20	MCS0	2	6	2437	52/37	0.03	0.03	11.21	10.41	13.84	30.00	30.00	-1.72	12.12	36.00	Pass				
HE20	MCS0	2	6	2437	106/53	0.10	0.10	13.67	13.91	16.80	30.00	30.00	-1.72	15.08	36.00	Pass				
HE20	MCS0	2	11	2462	Full	0.21	0.21	15.62	15.53	18.59	30.00	30.00	-1.72	16.87	36.00	Pass				
HE20	MCS0	2	11	2462	26/8	0.03	0.03	8.01	8.98	11.53	30.00	30.00	-1.72	9.81	36.00	Pass				
HE20	MCS0	2	11	2462	52/40	0.03	0.03	10.36	11.51	13.98	30.00	30.00	-1.72	12.26	36.00	Pass				
HE20	MCS0	2	11	2462	106/54	0.10	0.10	11.85	12.94	15.44	30.00	30.00	-1.72	13.72	36.00	Pass				

Note: Measured power (dBm) has offset with cable loss.



Ambient Condition: 25 °C, 45 %RH
Test Date: 2023.5.10~2023.5.31 <span style="float: right;">Test Engineer: Jiang Jun</span>


### DTS Bandwidth

#### Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant17	2412	6.56	2409.00	2415.56	0.5	PASS
	Ant6	2412	7.08	2408.48	2415.56	0.5	PASS
	Ant17	2437	8.08	2432.96	2441.04	0.5	PASS
	Ant6	2437	8.08	2432.48	2440.56	0.5	PASS
	Ant17	2462	7.56	2458.00	2465.56	0.5	PASS
	Ant6	2462	7.08	2458.48	2465.56	0.5	PASS
11G-CDD	Ant17	2412	13.16	2407.00	2420.16	0.5	PASS
	Ant6	2412	16.28	2403.88	2420.16	0.5	PASS
	Ant17	2437	16.28	2428.88	2445.16	0.5	PASS
	Ant6	2437	14.44	2428.84	2443.28	0.5	PASS
	Ant17	2462	15.76	2453.84	2469.60	0.5	PASS
	Ant6	2462	15.92	2454.24	2470.16	0.5	PASS
11AX20MIMO	Ant17	2412	18.16	2403.00	2421.16	0.5	PASS
	Ant6	2412	18.92	2402.60	2421.52	0.5	PASS
	Ant17	2437	17.84	2428.36	2446.20	0.5	PASS
	Ant6	2437	16.92	2427.60	2444.52	0.5	PASS
	Ant17	2462	17.48	2452.80	2470.28	0.5	PASS
	Ant6	2462	17.00	2453.20	2470.20	0.5	PASS




Test Graphs

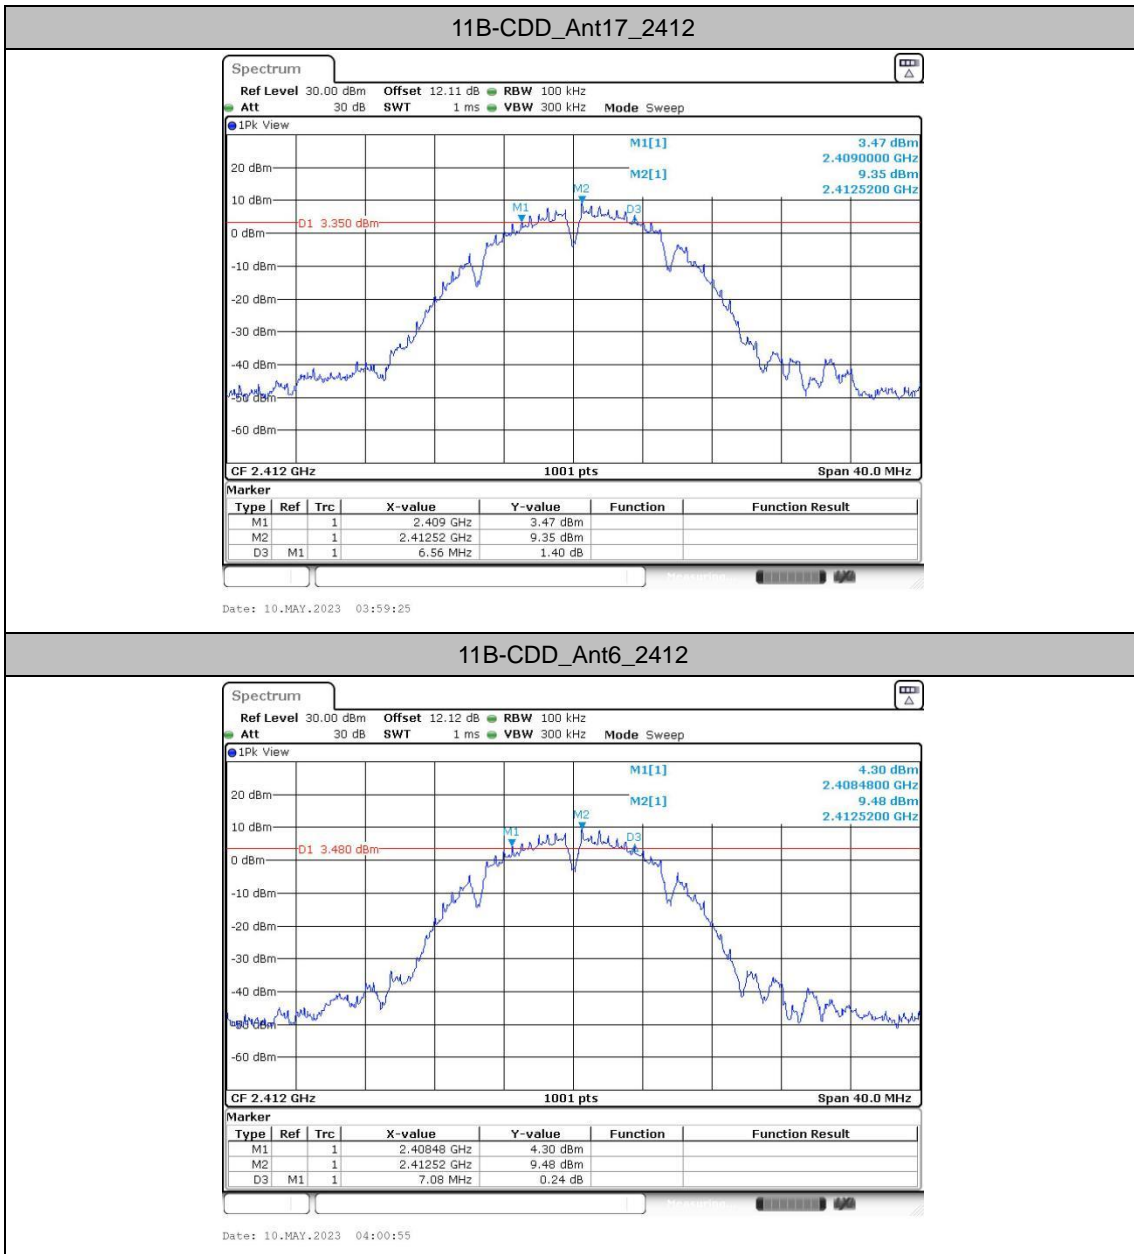




11B-CDD\_Ant17\_2437

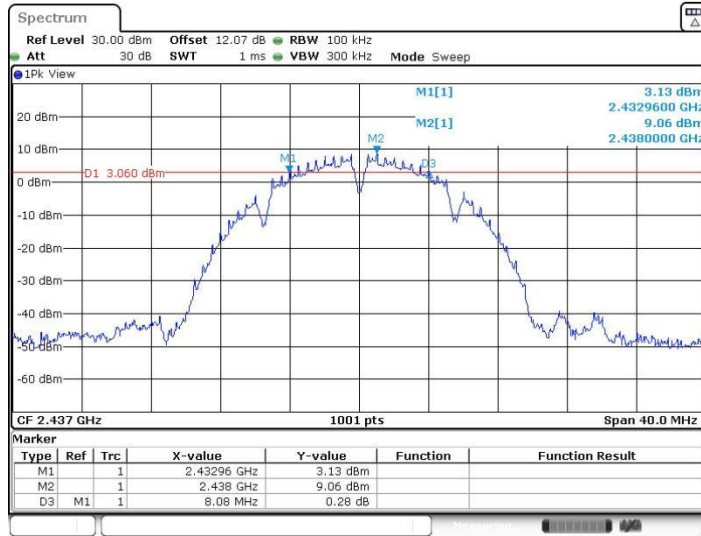

Date: 10.MAY.2023 04:03:59

11B-CDD\_Ant6\_2437

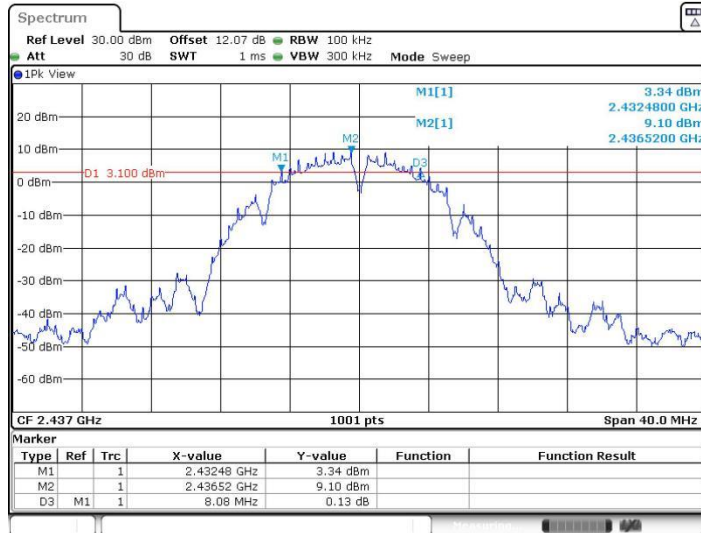


Date: 10.MAY.2023 04:05:11






11B-CDD\_Ant17\_2462

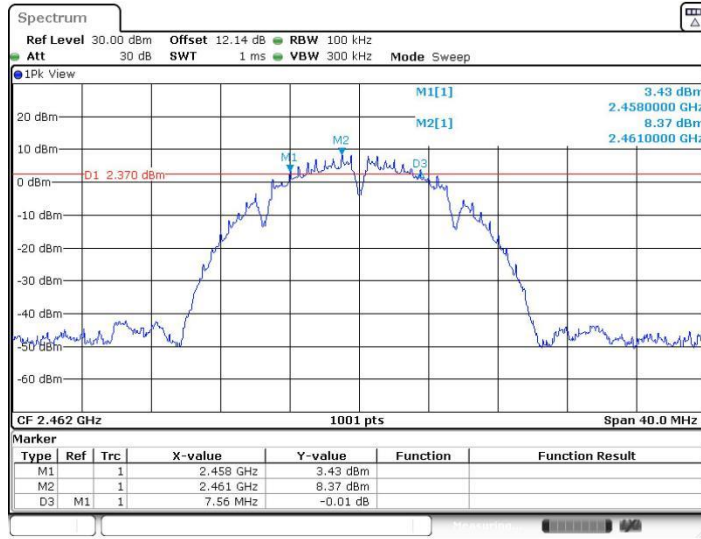


11B-CDD\_Ant6\_2462

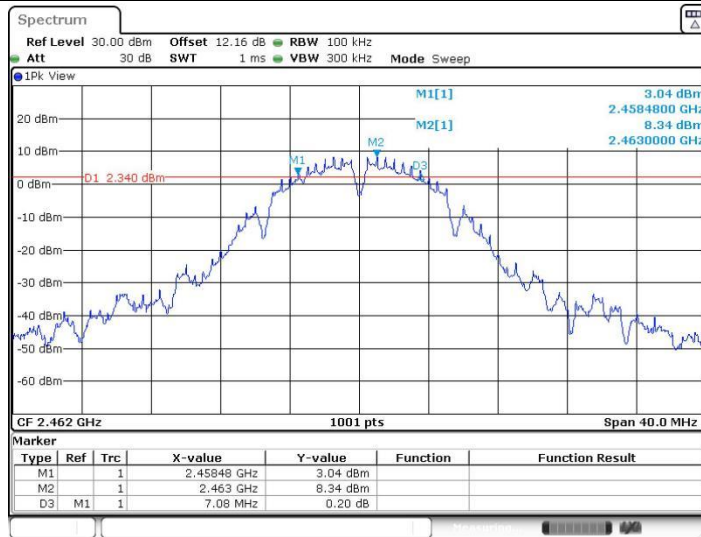




11G-CDD\_Ant17\_2412

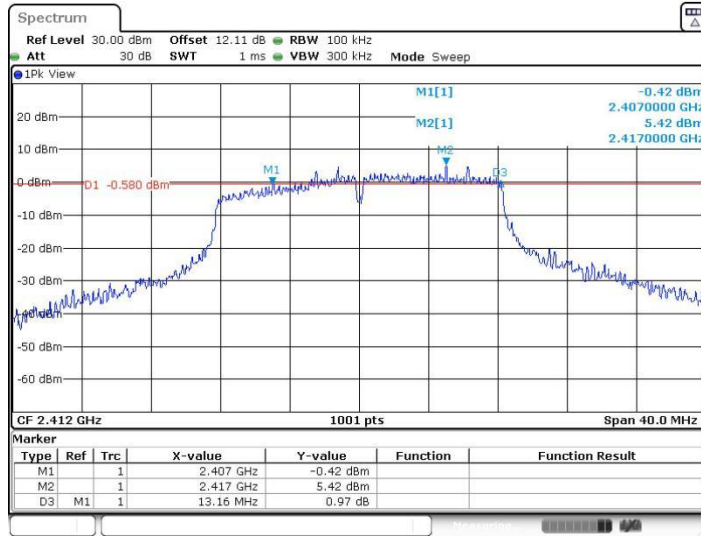


11G-CDD\_Ant6\_2412

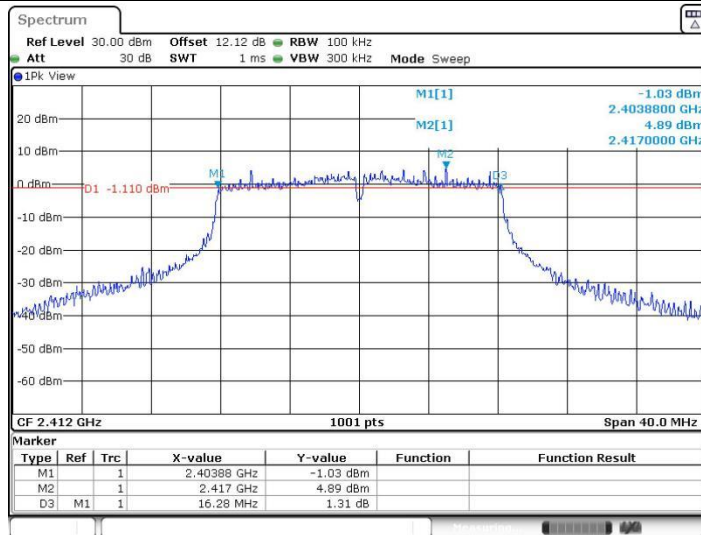




11G-CDD\_Ant17\_2437

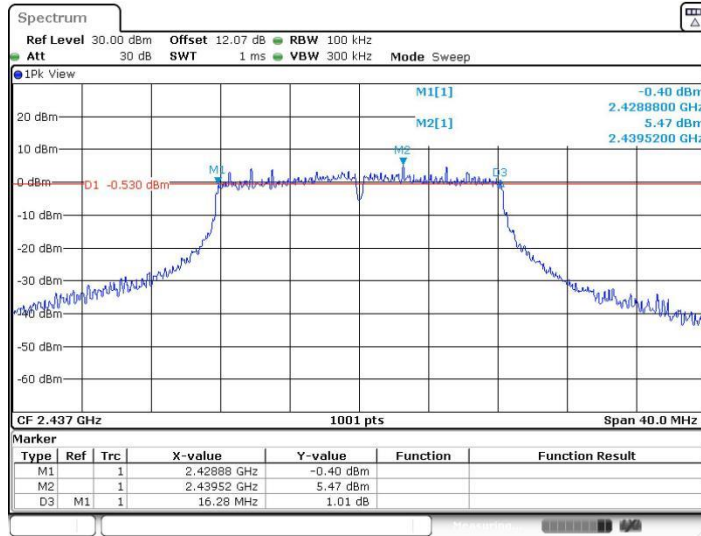


11G-CDD\_Ant6\_2437

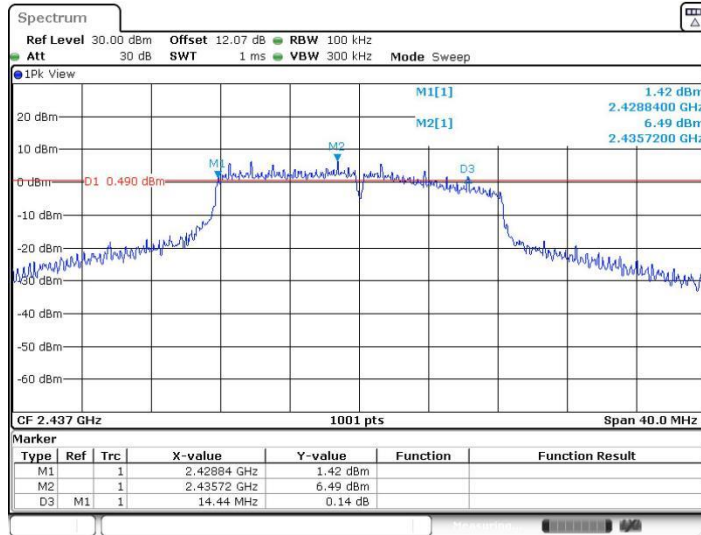






11G-CDD\_Ant17\_2462

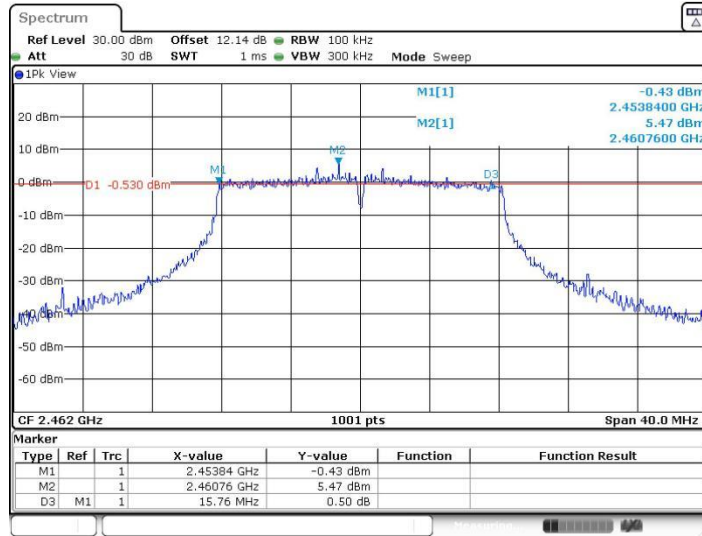

11G-CDD\_Ant6\_2462

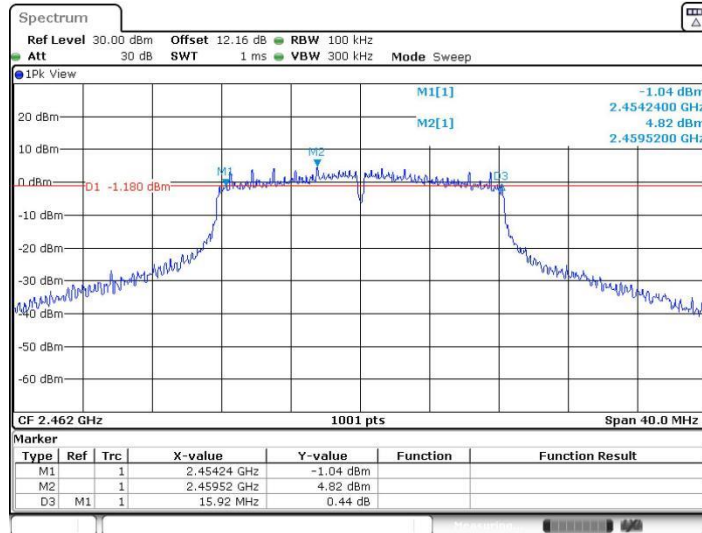


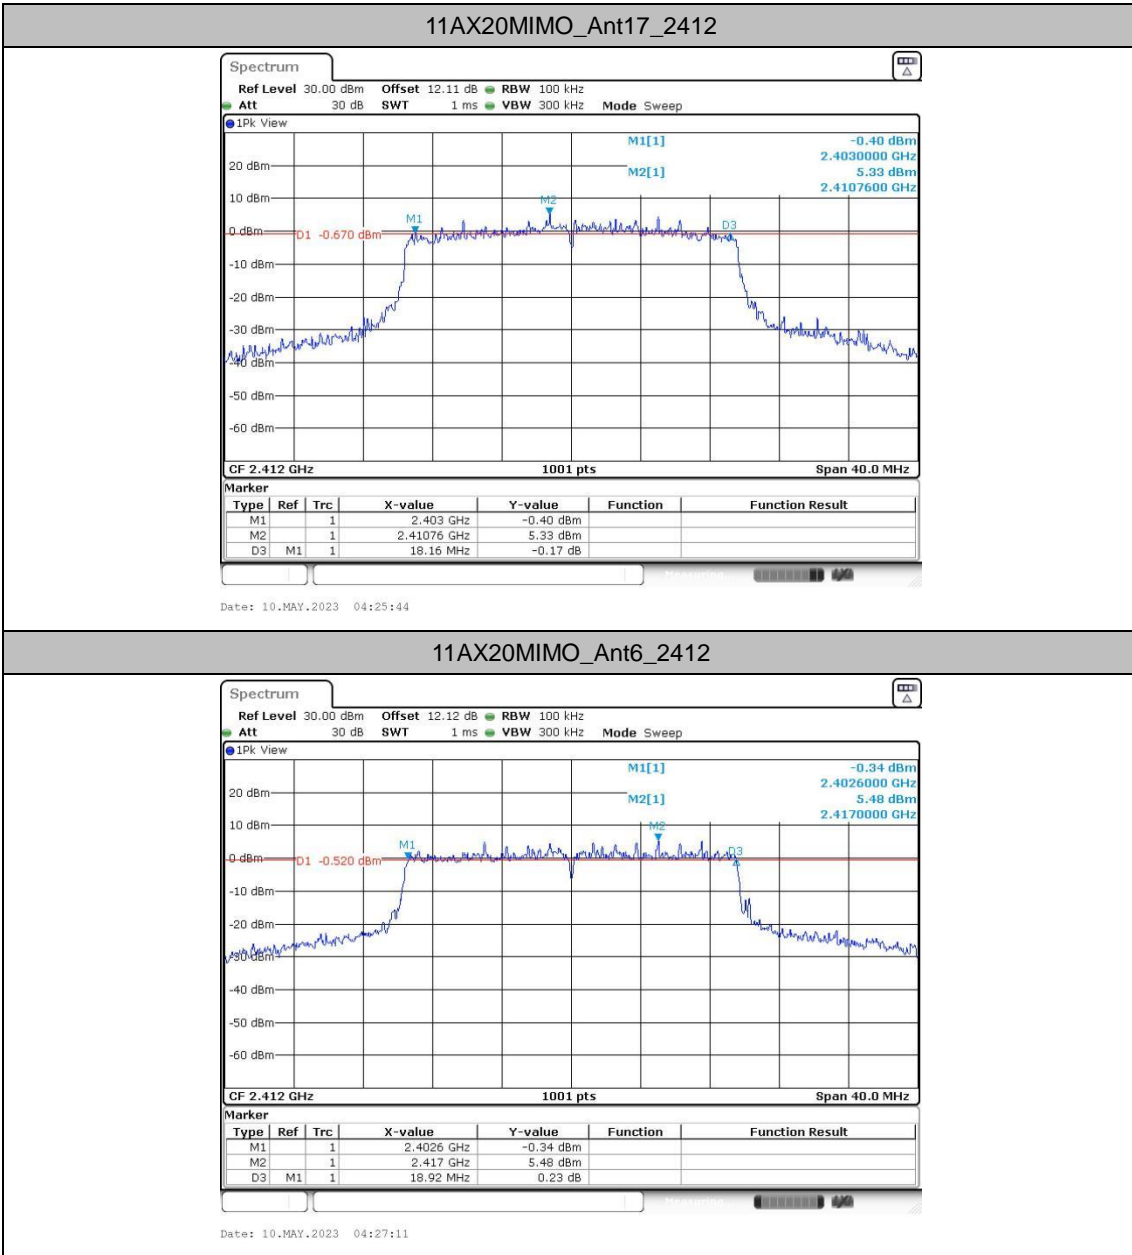

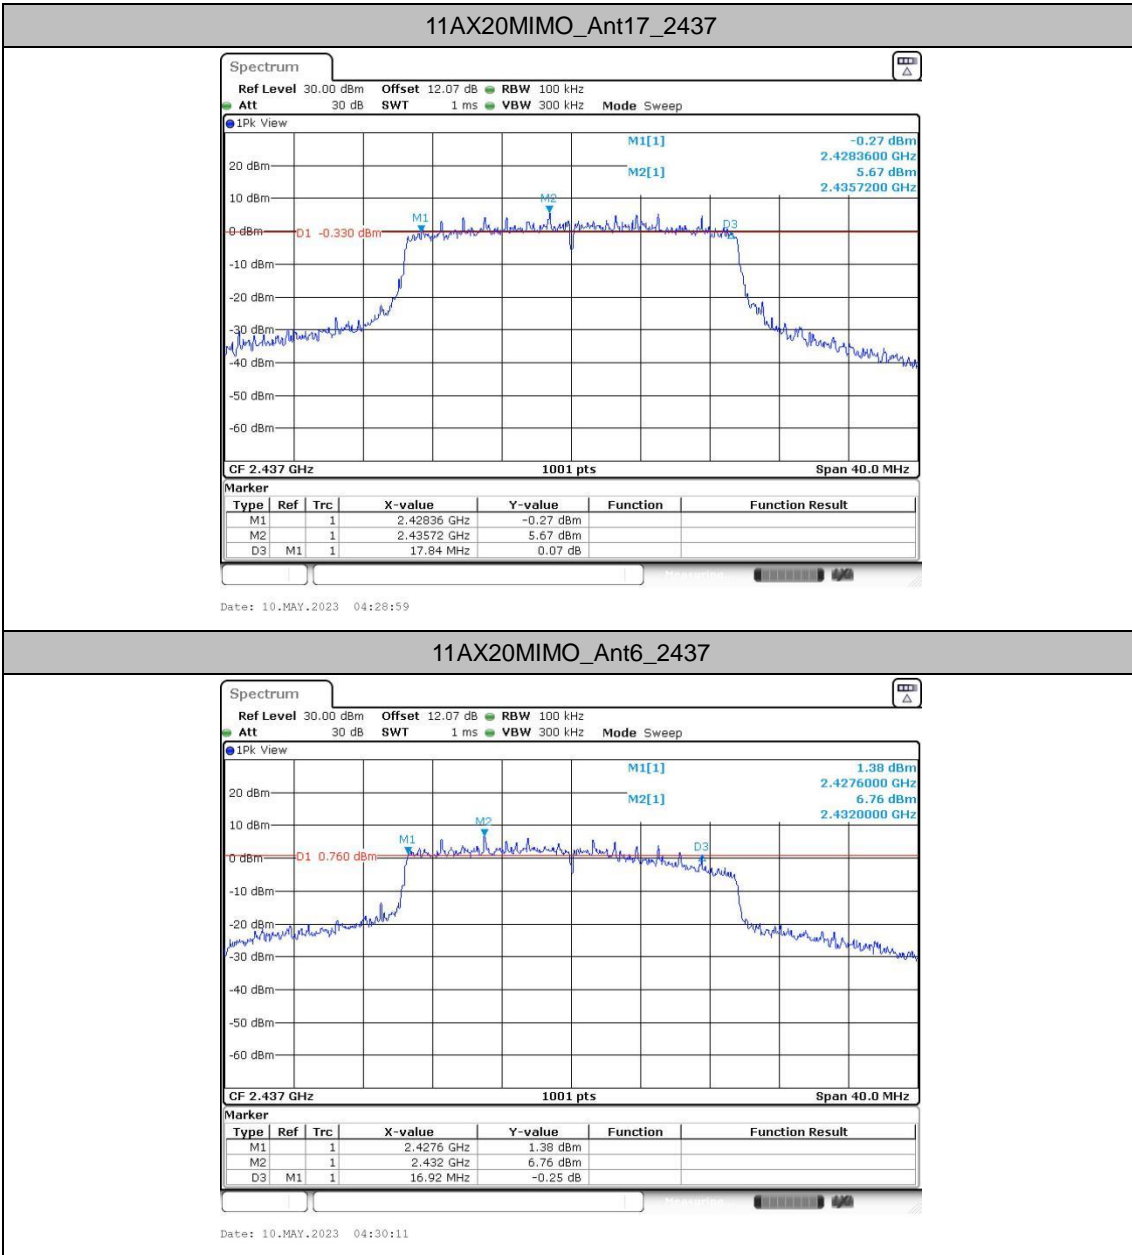




11AX20MIMO\_Ant17\_2462

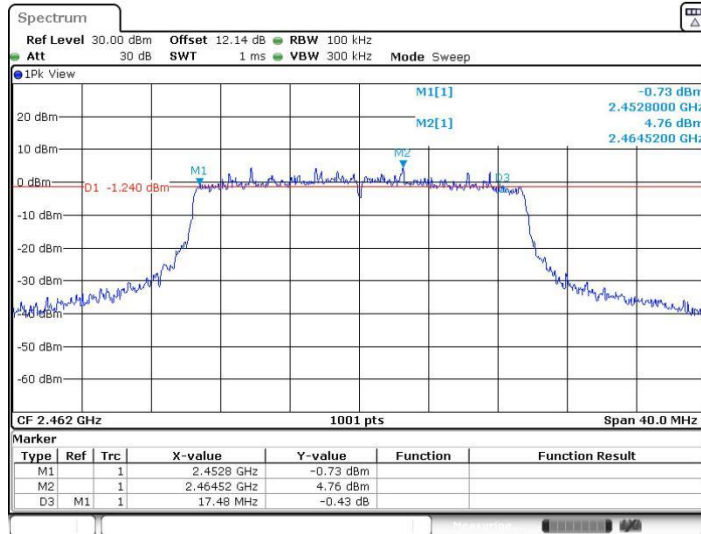

Date: 10.MAY.2023 04:31:42

11AX20MIMO\_Ant6\_2462

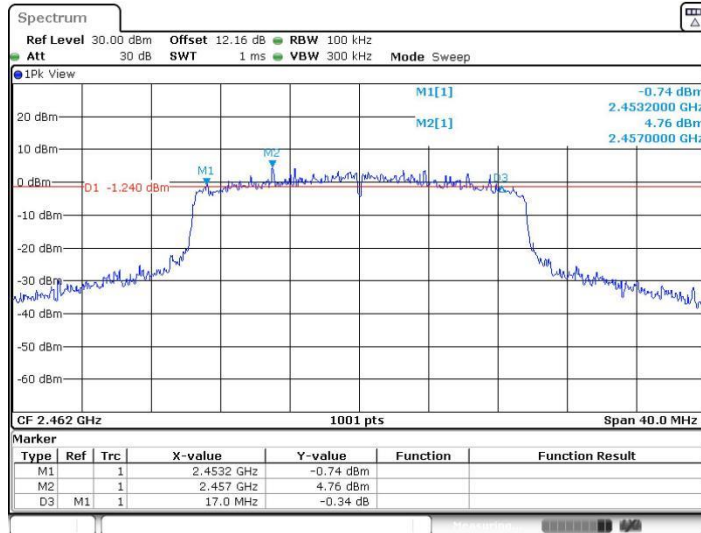

Date: 10.MAY.2023 04:33:09



### Occupied Channel Bandwidth


#### Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]
11B-CDD	Ant17	2412	12.587	2406.1259	2418.7133
	Ant6	2412	12.348	2405.8861	2418.2338
	Ant17	2437	12.747	2430.6863	2443.4336
	Ant6	2437	11.668	2430.7263	2442.3946
	Ant17	2462	12.787	2455.5664	2468.3536
	Ant6	2462	11.788	2456.0859	2467.8741
11G-CDD	Ant17	2412	17.023	2403.8482	2420.8711
	Ant6	2412	16.783	2403.6484	2420.4316
	Ant17	2437	17.103	2428.4885	2445.5914
	Ant6	2437	17.263	2428.0090	2445.2717
	Ant17	2462	17.103	2453.4086	2470.5115
	Ant6	2462	16.623	2453.6883	2470.3117
11AX20MIMO	Ant17	2412	19.061	2402.4895	2421.5504
	Ant6	2412	19.381	2402.3297	2421.7103
	Ant17	2437	19.181	2427.4496	2446.6304
	Ant6	2437	19.181	2427.1698	2446.3506
	Ant17	2462	19.141	2452.4096	2471.5504
	Ant6	2462	18.981	2452.4895	2471.4705






Test Graphs

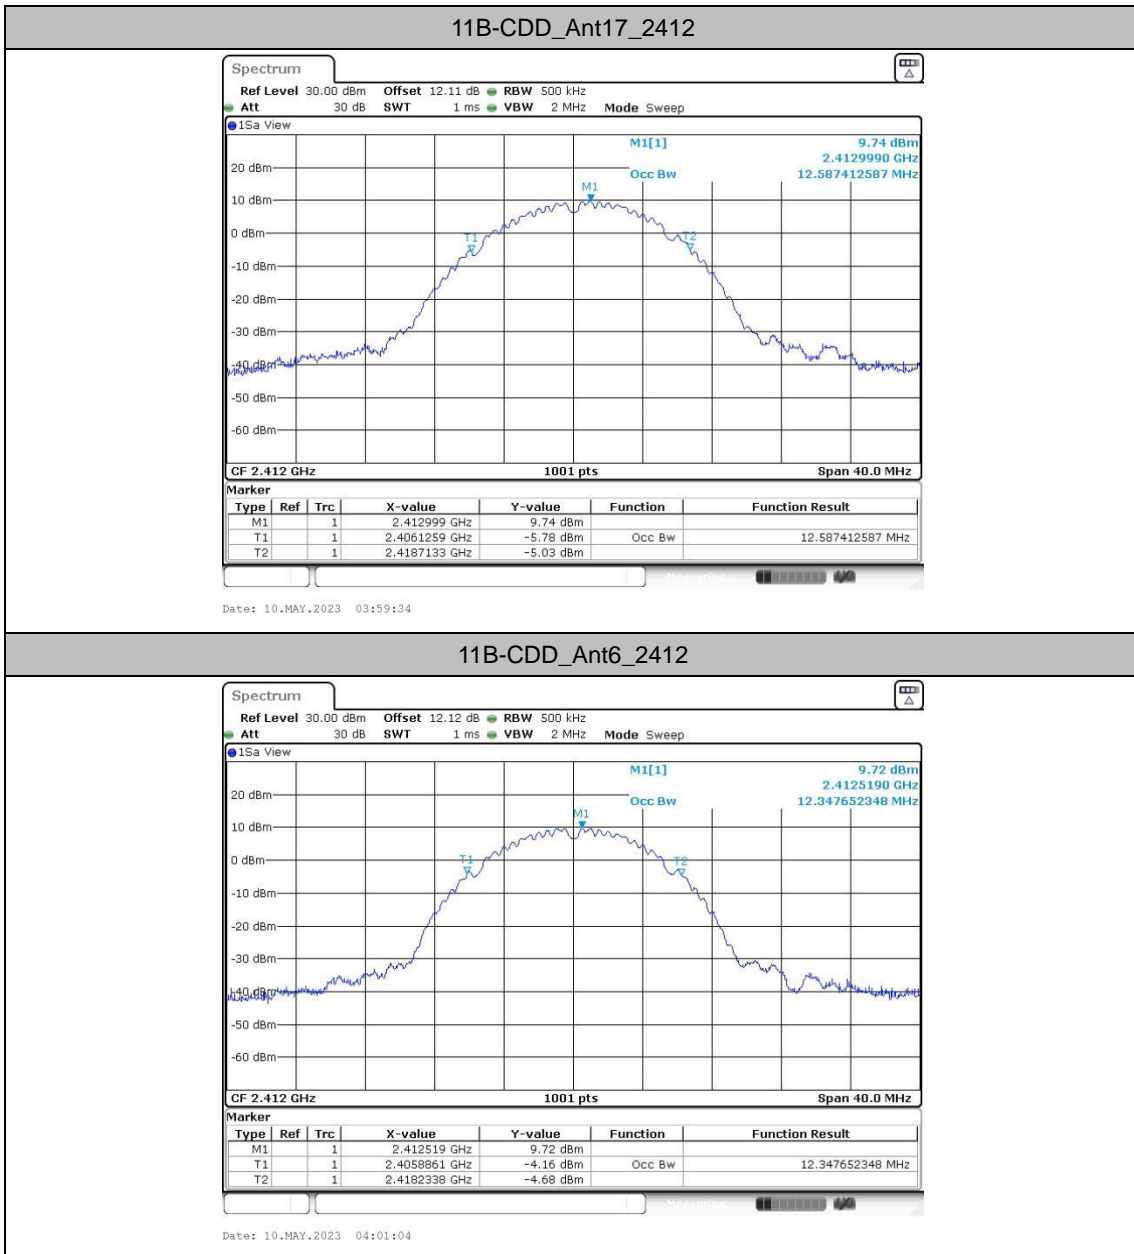



11B-CDD\_Ant17\_2437

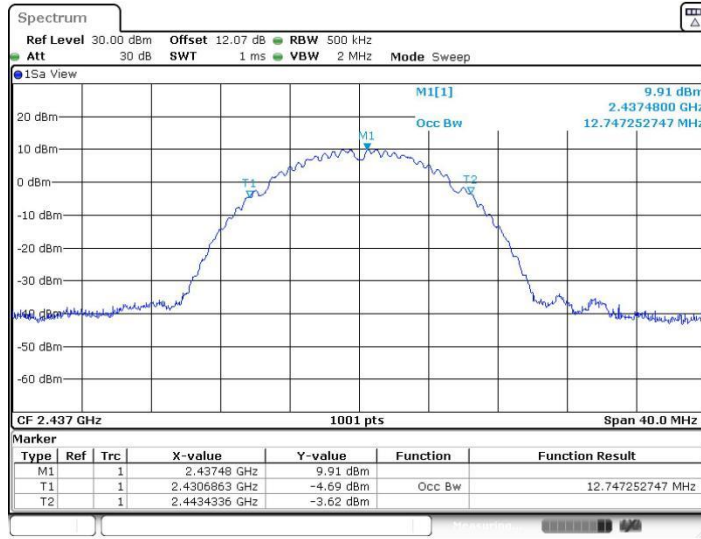

Date: 10.MAY.2023 04:04:07


11B-CDD\_Ant6\_2437



Date: 10.MAY.2023 04:05:20




11B-CDD\_Ant17\_2462

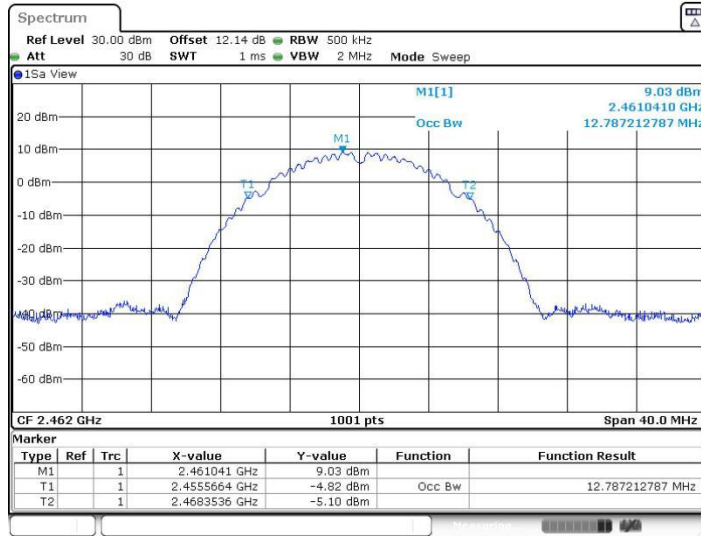

Date: 10.MAY.2023 04:06:51


11B-CDD\_Ant6\_2462

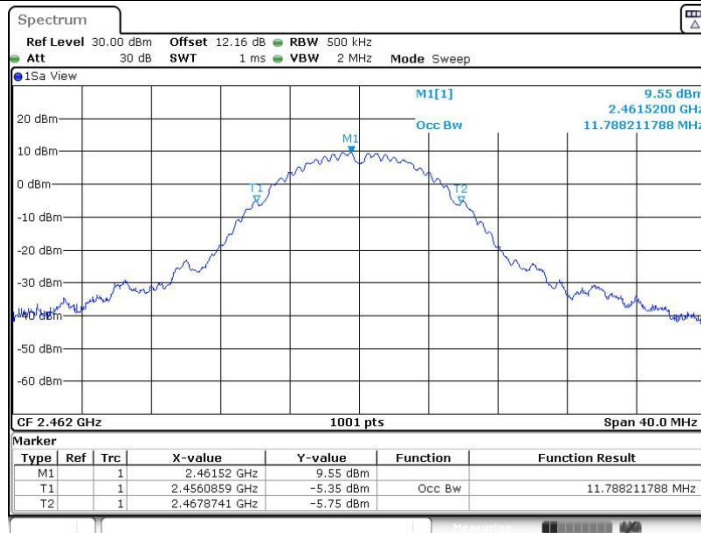

Date: 10.MAY.2023 04:08:21




11G-CDD\_Ant17\_2412

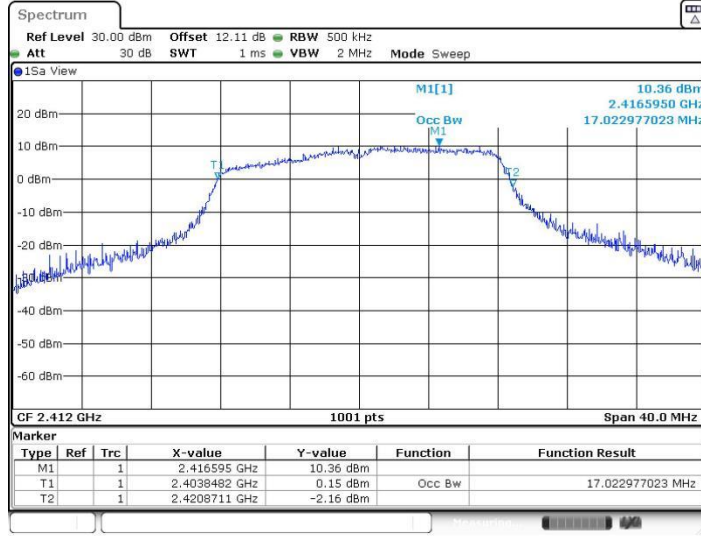


Date: 10.MAY.2023 04:15:31

11G-CDD\_Ant6\_2412

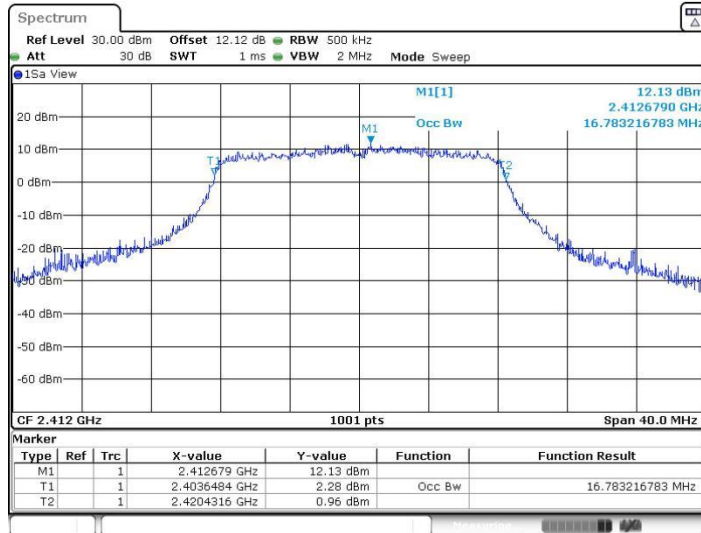


Date: 10.MAY.2023 04:17:00

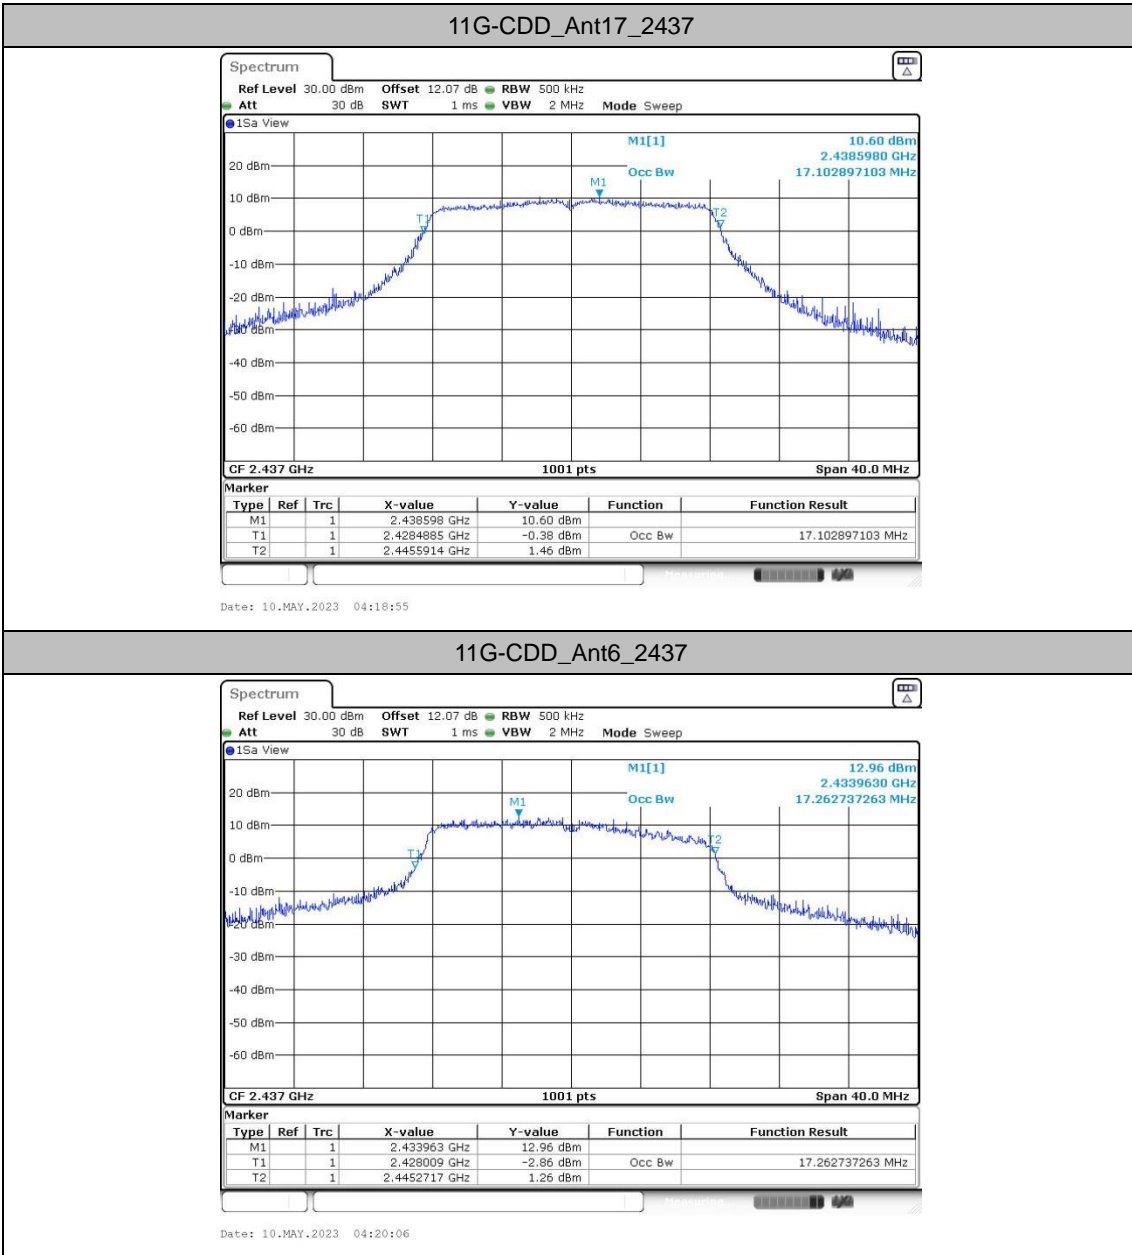




11G-CDD\_Ant17\_2462

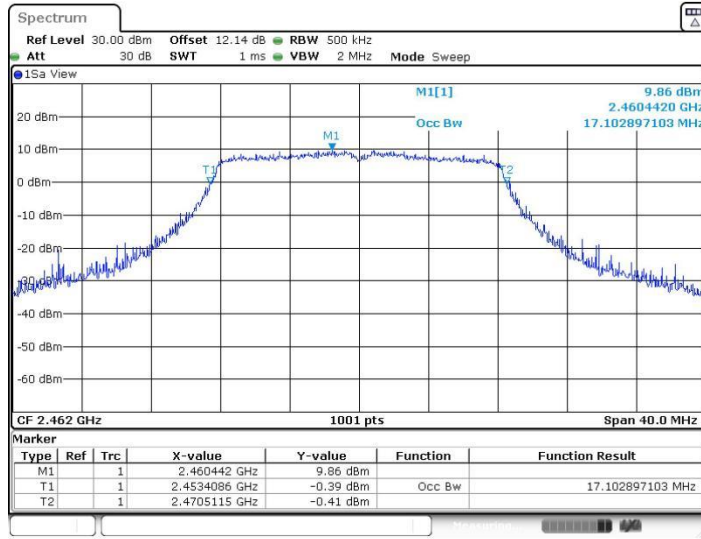

Date: 10.MAY.2023 04:22:07


11G-CDD\_Ant6\_2462

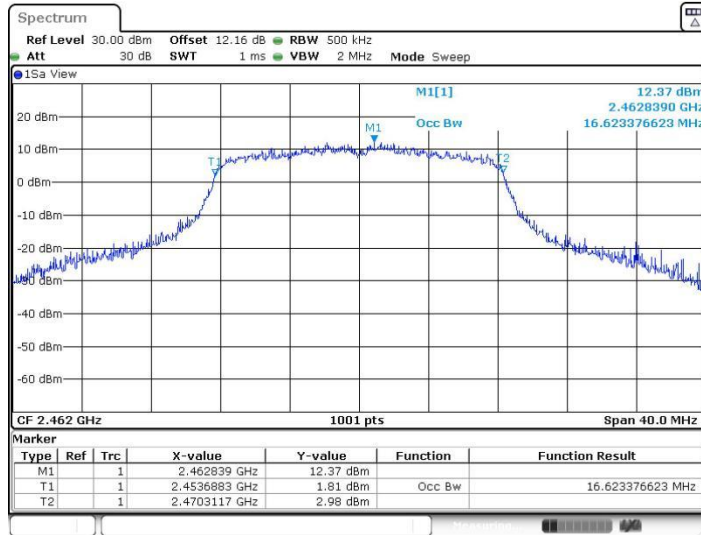

Date: 10.MAY.2023 04:23:33




11AX20MIMO\_Ant17\_2412

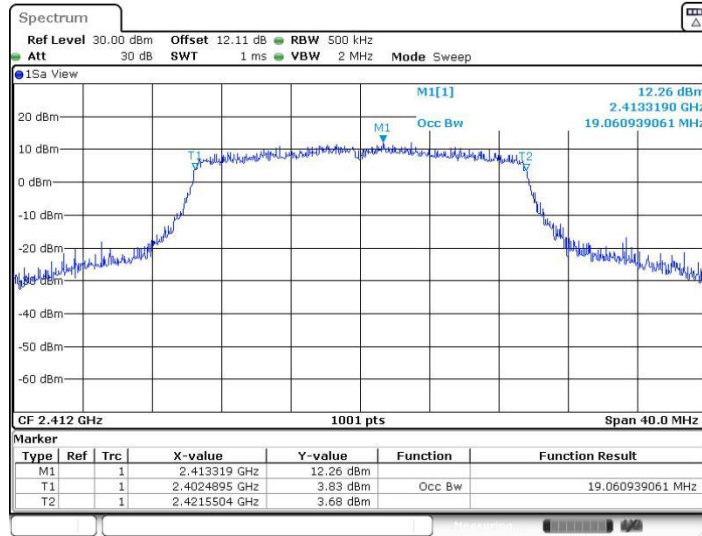

Date: 10.MAY.2023 04:25:53


11AX20MIMO\_Ant6\_2412

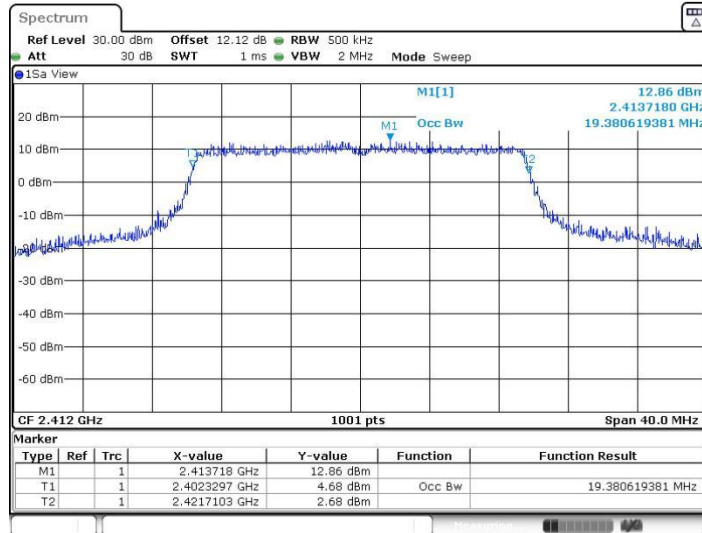

Date: 10.MAY.2023 04:27:20




11AX20MIMO\_Ant17\_2437

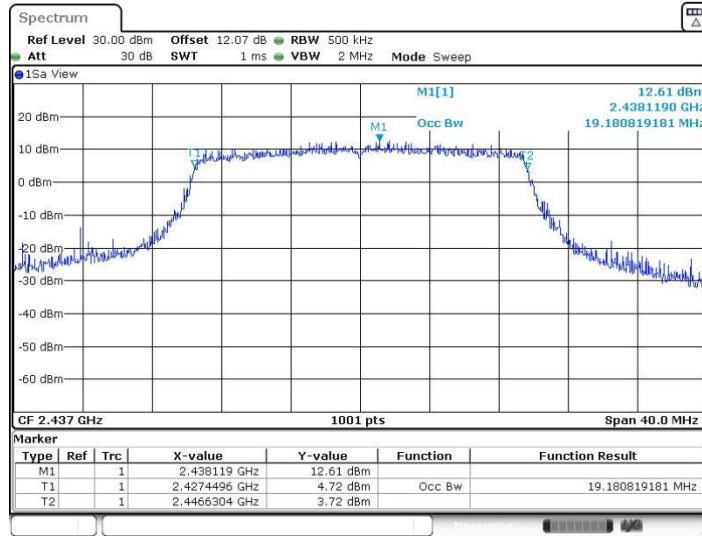

Date: 10.MAY.2023 04:29:09

11AX20MIMO\_Ant6\_2437

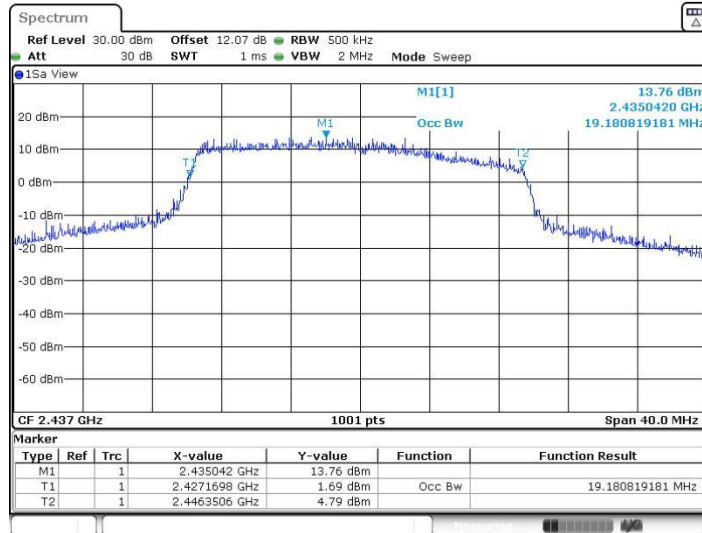


Date: 10.MAY.2023 04:30:19






11AX20MIMO\_Ant17\_2462

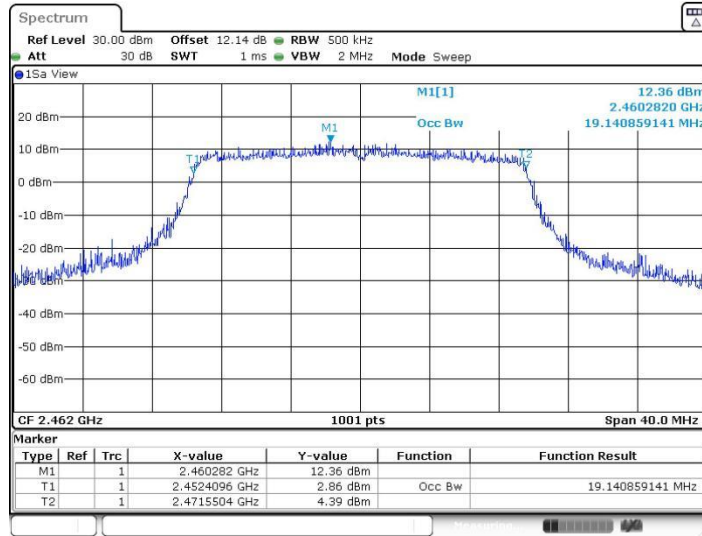

11AX20MIMO\_Ant6\_2462

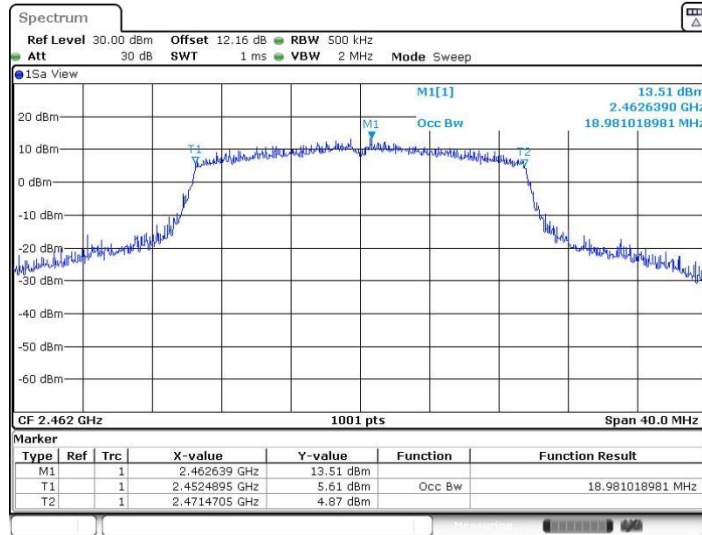




### Maximum power spectral density

#### Test Result

TestMode	Antenna	Freq(MHz)	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B-CDD	Ant17	2412	-5.09	≤8.00	PASS
	Ant6	2412	-4.66	≤8.00	PASS
	total	2412	-1.86	≤8.00	PASS
	Ant17	2437	-5.46	≤8.00	PASS
	Ant6	2437	-5.12	≤8.00	PASS
	total	2437	-2.28	≤8.00	PASS
	Ant17	2462	-4.43	≤8.00	PASS
	Ant6	2462	-4.08	≤8.00	PASS
	total	2462	-1.24	≤8.00	PASS
11G-CDD	Ant17	2412	-8.71	≤8.00	PASS
	Ant6	2412	-7.56	≤8.00	PASS
	total	2412	-5.09	≤8.00	PASS
	Ant17	2437	-8.28	≤8.00	PASS
	Ant6	2437	-6.16	≤8.00	PASS
	total	2437	-4.08	≤8.00	PASS
	Ant17	2462	-7.21	≤8.00	PASS
	Ant6	2462	-7.8	≤8.00	PASS
	total	2462	-4.48	≤8.00	PASS
11AX20MIMO	Ant17	2412	-10.71	≤8.00	PASS
	Ant6	2412	-11.95	≤8.00	PASS
	total	2412	-8.28	≤8.00	PASS
	Ant17	2437	-9.25	≤8.00	PASS
	Ant6	2437	-6.88	≤8.00	PASS
	total	2437	-4.89	≤8.00	PASS
	Ant17	2462	-9.13	≤8.00	PASS
	Ant6	2462	-9.09	≤8.00	PASS
	total	2462	-6.10	≤8.00	PASS




### Test Graphs

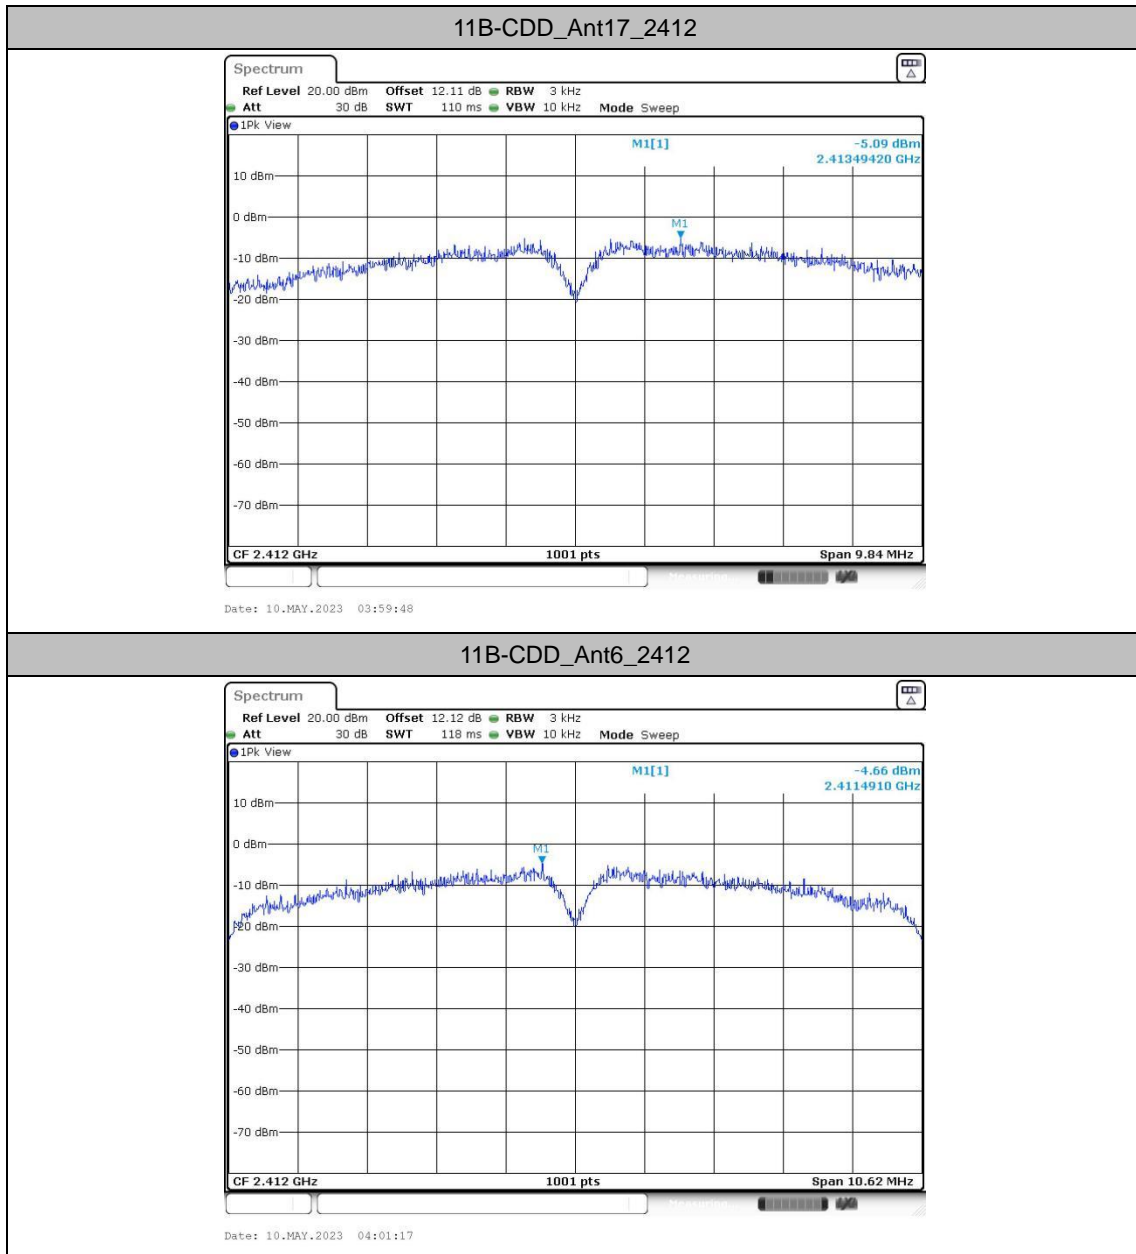




11B-CDD\_Ant17\_2437

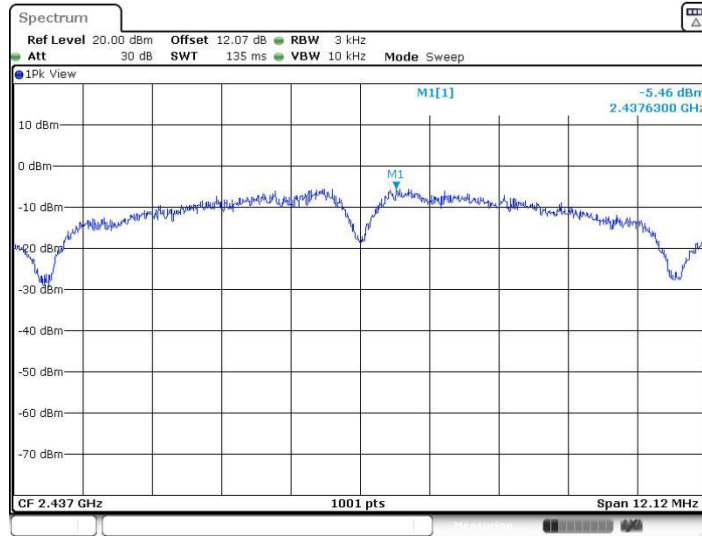

Date: 10.MAY.2023 04:04:21


11B-CDD\_Ant6\_2437

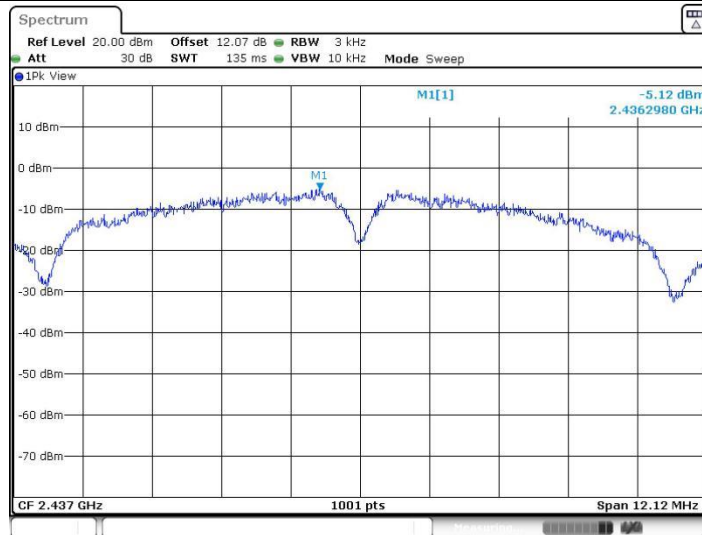

Date: 10.MAY.2023 04:05:33




11B-CDD\_Ant17\_2462

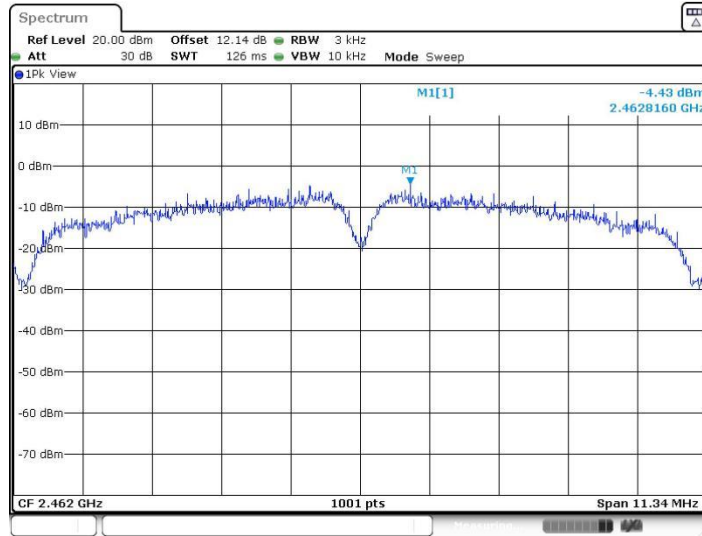

Date: 10.MAY.2023 04:07:05


11B-CDD\_Ant6\_2462

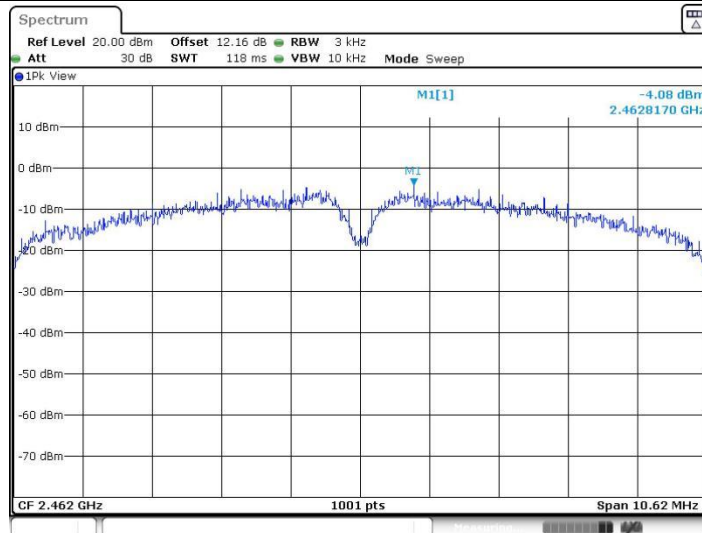

Date: 10.MAY.2023 04:08:34




11G-CDD\_Ant17\_2412

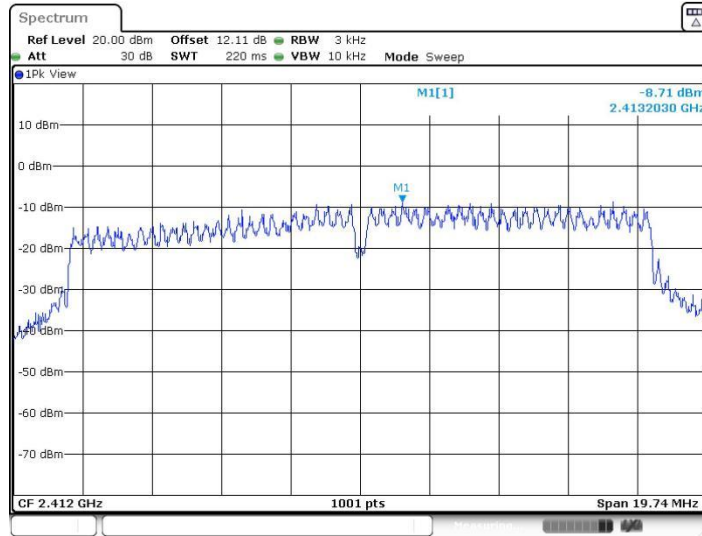

Date: 10.MAY.2023 04:15:45


11G-CDD\_Ant6\_2412

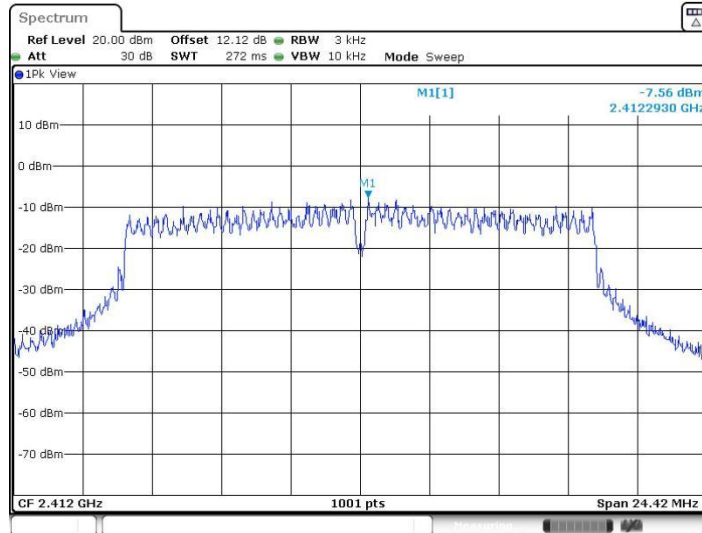

Date: 10.MAY.2023 04:17:13




11G-CDD\_Ant17\_2437

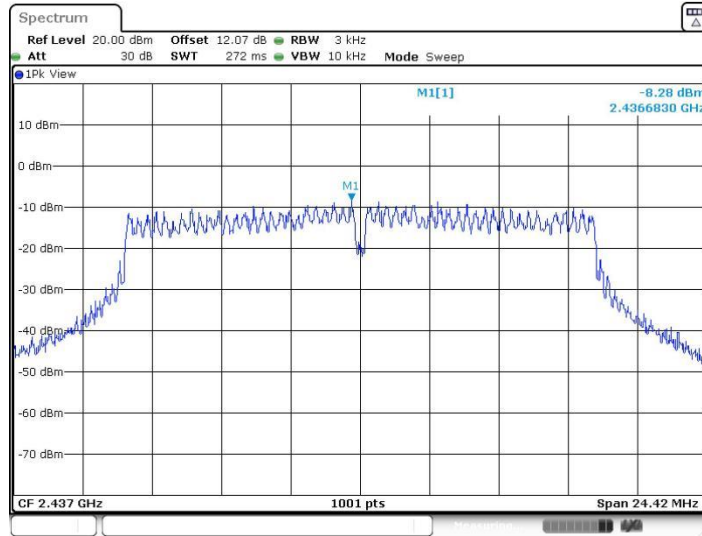

Date: 10.MAY.2023 04:19:09


11G-CDD\_Ant6\_2437

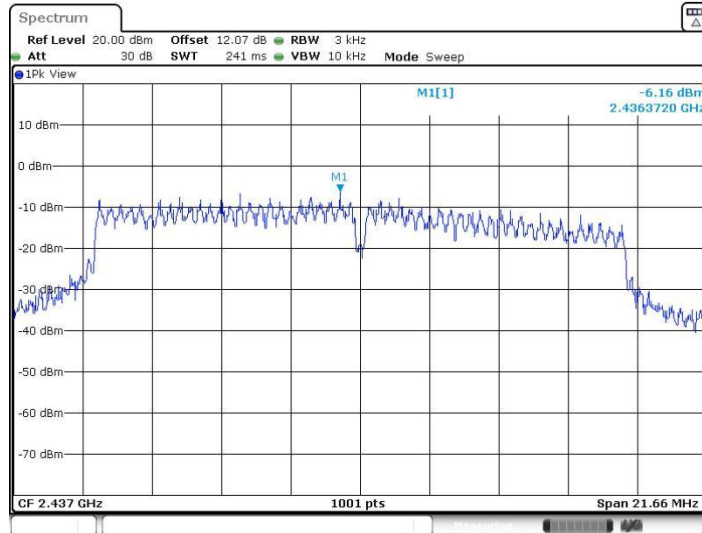

Date: 10.MAY.2023 04:20:19




11G-CDD\_Ant17\_2462

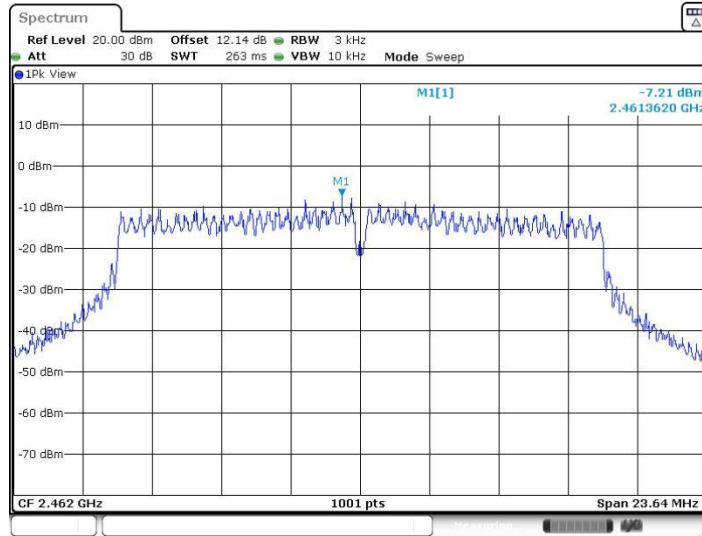

Date: 10.MAY.2023 04:22:20

11G-CDD\_Ant6\_2462

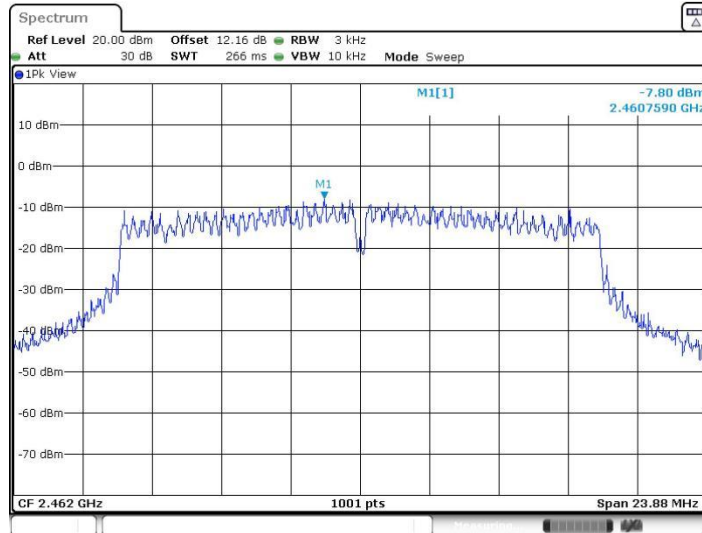


Date: 10.MAY.2023 04:23:46






11AX20MIMO\_Ant17\_2412

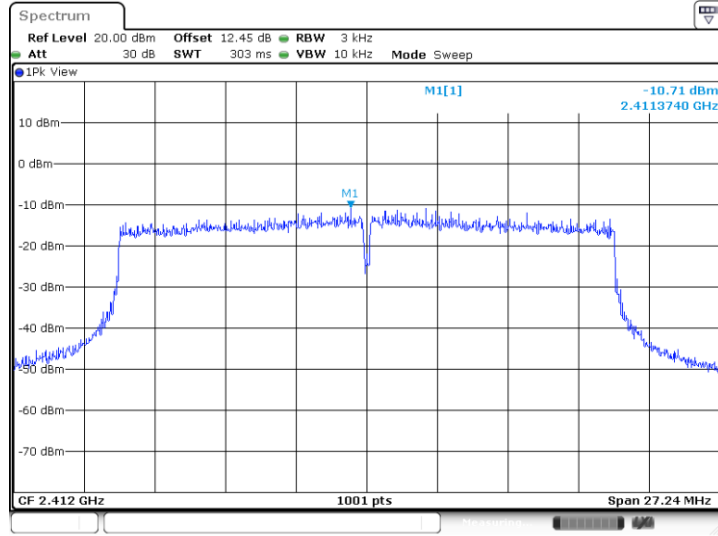

Date: 31.MAY.2023 07:18:44


11AX20MIMO\_Ant6\_2412

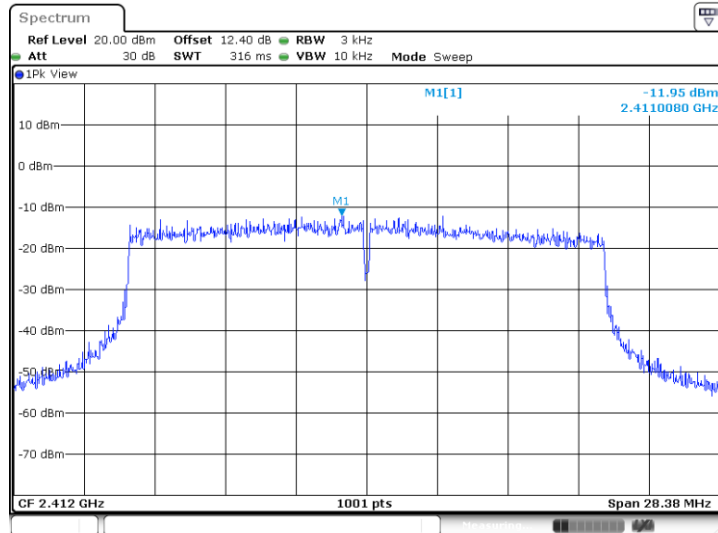

Date: 31.MAY.2023 07:19:36




11AX20MIMO\_Ant17\_2437

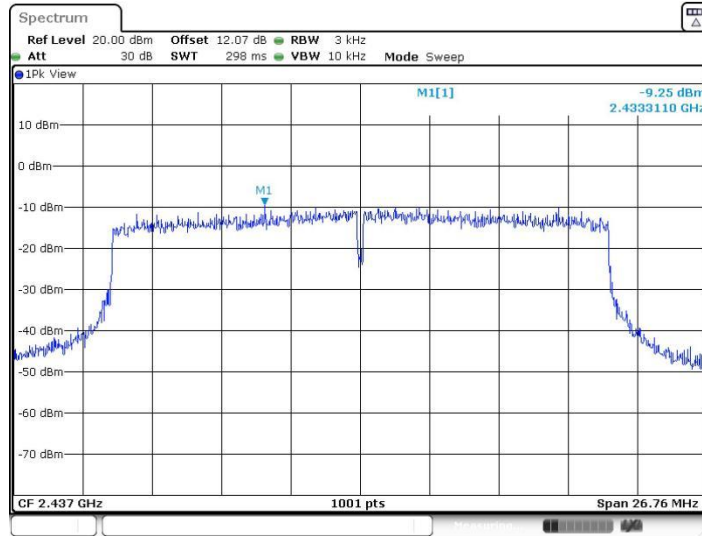

Date: 10.MAY.2023 04:29:22


11AX20MIMO\_Ant6\_2437

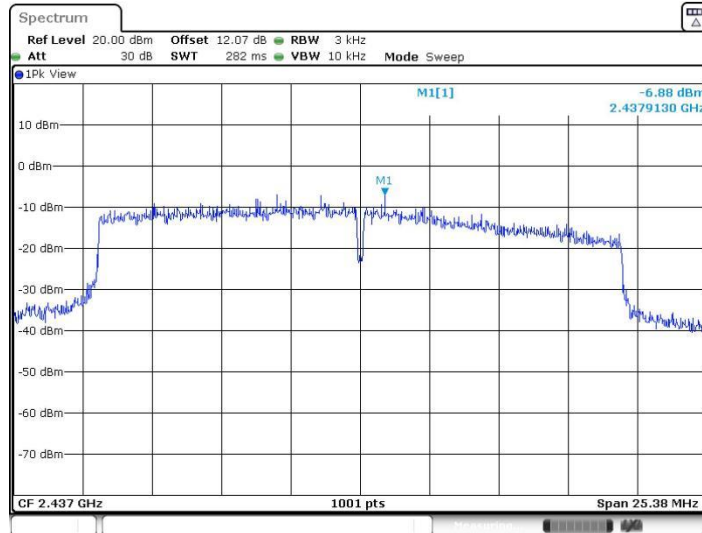

Date: 10.MAY.2023 04:30:32




11AX20MIMO\_Ant17\_2462

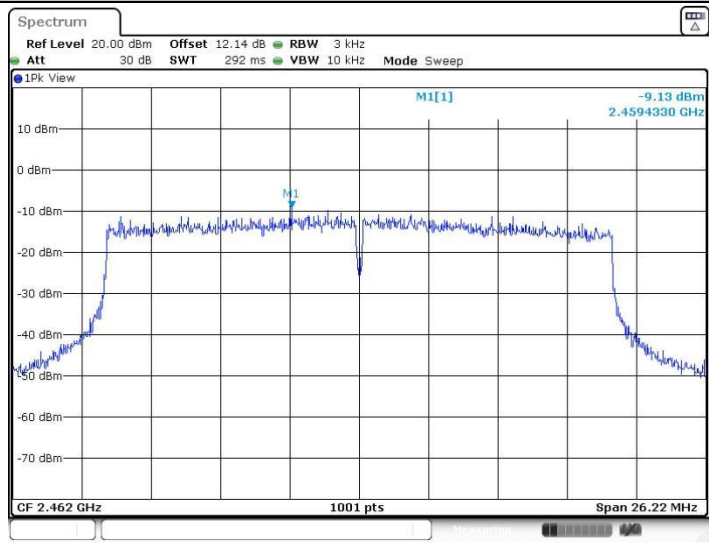

Date: 10.MAY.2023 04:32:04

11AX20MIMO\_Ant6\_2462

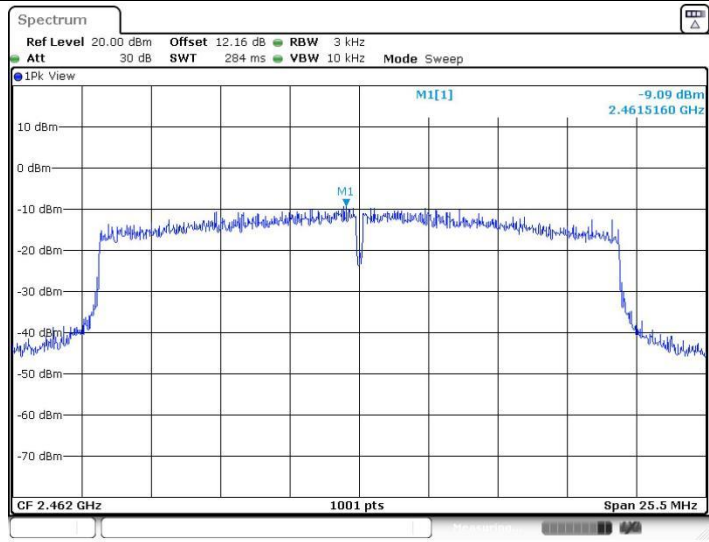

Date: 10.MAY.2023 04:33:31



### Reference level measurement

#### Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
11B-CDD	Ant17	2412	2412.50	9.03
	Ant6	2412	2411.49	9.35
	Ant17	2437	2436.49	9.52
	Ant6	2437	2437.51	9.70
	Ant17	2462	2462.49	8.66
	Ant6	2462	2462.51	9.00
11G-CDD	Ant17	2412	2413.29	5.64
	Ant6	2412	2413.27	5.93
	Ant17	2437	2435.73	5.80
	Ant6	2437	2431.99	6.47
	Ant17	2462	2460.73	5.45
	Ant6	2462	2460.72	5.63
11AX20MIMO	Ant17	2412	2413.26	5.34
	Ant6	2412	2417.01	5.40
	Ant17	2437	2435.76	5.73
	Ant6	2437	2432.01	6.76
	Ant17	2462	2460.71	4.57
	Ant6	2462	2460.75	5.93