



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Redmi
MODEL NAME : 2303ERA42L
FCC ID : 2AFZZRA42L
STANDARD : 47 CFR Part 2, 22(H)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Feb. 03, 2023 ~ Feb. 12, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY 3
SUMMARY OF TEST RESULT 4
1 GENERAL DESCRIPTION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 5
1.5 Modification of EUT 5
1.6 Maximum ERP Power and Emission Designator 6
1.7 Testing Location 6
1.8 Test Software 6
1.9 Applicable Standards 7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8
2.1 Test Mode 8
2.2 Connection Diagram of Test System 9
2.3 Support Unit used in test configuration and system 9
2.4 Measurement Results Explanation Example 9
2.5 Frequency List of Low/Middle/High Channels 10
3 CONDUCTED TEST ITEMS 11
3.1 Measuring Instruments 11
3.2 Test Setup 11
3.3 Test Result of Conducted Test 11
3.4 Conducted Output Power and ERP 12
3.5 Peak-to-Average Ratio 13
3.6 Occupied Bandwidth 14
3.7 Conducted Band Edge 15
3.8 Conducted Spurious Emission 16
3.9 Frequency Stability 17
4 RADIATED TEST ITEMS 18
4.1 Measuring Instruments 18
4.2 Test Setup 18
4.3 Test Result of Radiated Test 19
4.4 Radiated Spurious Emission 20
5 LIST OF MEASURING EQUIPMENT 21
6 UNCERTAINTY OF EVALUATION 22
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG1N1601-06A	Rev. 01	Initial issue of report	Feb. 23, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	-	Report Only	-
	§22.913(a)(5)	Effective Radiated Power (Band 26)	ERP < 7 Watt	PASS	-
3.5	N/A	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	-	Report Only	-
3.7	§2.1051 §22.917(a)	Conducted Band Edge Measurement (Band 26)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.8	§2.1051 §22.917(a)	Conducted Spurious Emission (Band 26)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm	PASS	-
4.4	§2.1053 §22.917(a)	Radiated Spurious Emission (Band 26)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 46.68 dB at 2488.000 MHz

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Redmi
Model Name	2303ERA42L
FCC ID	2AFZZRA42L
IMEI Code	Conducted: 865153060013589/865153060013597 Radiation : 865153060015808/865153060015816
HW Version	P1
SW Version	MIUI14
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 26 : 824 MHz ~ 849 MHz
Rx Frequency	LTE Band 26 : 869 MHz ~ 894 MHz
Bandwidth	LTE Band 26 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz
Maximum Output Power to Antenna	Ant1: LTE Band 26 : 24.45 dBm Ant2: LTE Band 26 : 24.50 dBm
Antenna Gain	Ant1: LTE Band 26 : -3.36 dBi Ant2: LTE Band 26 : -3.45 dBi
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM (Downlink only)

Note: The maximum ERP is calculated from max output power and antenna gain, only the maximum ERP of antenna 1 is shown in the report.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Maximum ERP Power and Emission Designator

LTE Band 26		QPSK		16QAM/64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
1.4	824.7 ~ 848.3	0.0767	1M09G7D	0.0597	1M10W7D
3	825.5 ~ 847.5	0.0767	2M70G7D	0.0596	2M70W7D
5	826.5 ~ 846.5	0.0759	4M48G7D	0.0586	4M49W7D
10	829.0 ~ 844.0	0.0773	9M01G7D	0.0600	9M05W7D
15	831.5 ~ 841.5	0.0783	13M5G7D	0.0607	13M4W7D
CH26790	824.0	0.0783	13M4G7D	0.0598	13M4W7D

Note: All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24al



1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (Z-Plane)

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	26	v	v	v	v	v	-	v	v	v	v		v	v	v	v
Peak-to-Average Ratio	26					v	-	v	v	v			v		v	
26dB and 99% Bandwidth	26	v	v	v	v	v	-	v	v				v	v	v	
Conducted Band Edge	26	v	v	v	v	v	-	v	v	v	v		v	v		v
Conducted Spurious Emission	26	v	v	v	v	v	-	v				v		v	v	v
Frequency Stability	26				v		-	v					v		v	
E.R.P	26	v	v	v	v	v	-	v	v	v	v			v	v	v
Radiated Spurious Emission	26	Worst Case												v		
Note	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 															

2.2 Connection Diagram of Test System

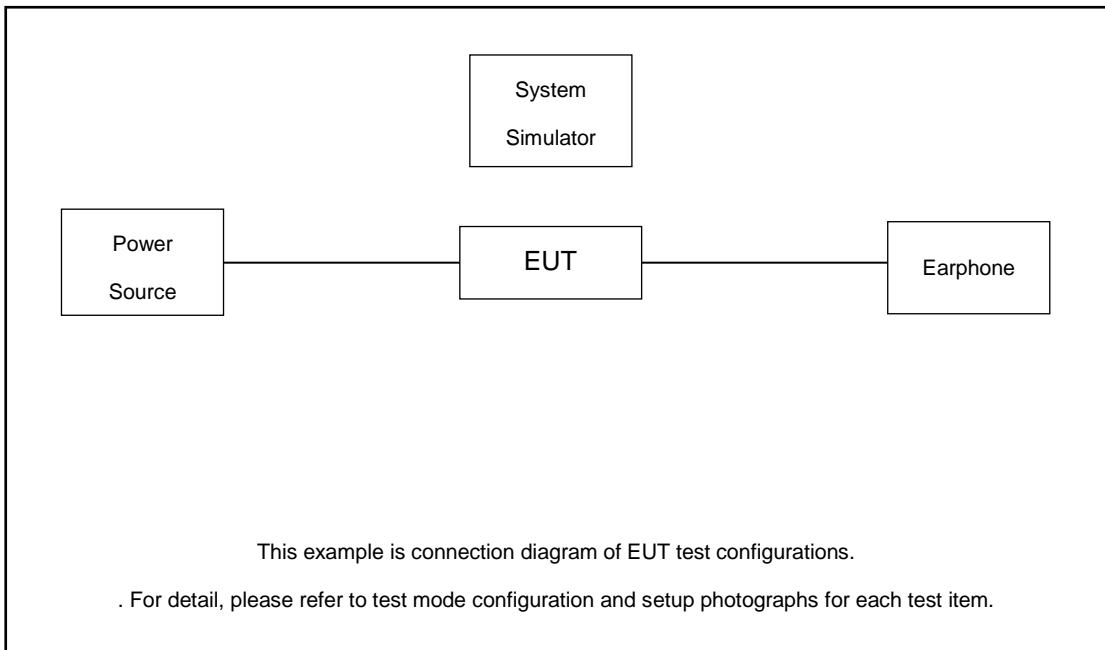

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 4.8 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 4.8 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	26865	26915	26965
	Frequency	831.5	836.5	841.5
10	Channel	26840	26915	26990
	Frequency	829	836.5	844
5	Channel	26815	26915	27015
	Frequency	826.5	836.5	846.5
3	Channel	26805	26915	27025
	Frequency	825.5	836.5	847.5
1.4	Channel	26797	26915	27033
	Frequency	824.7	836.5	848.3

3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission



3.2.3 Frequency Stability

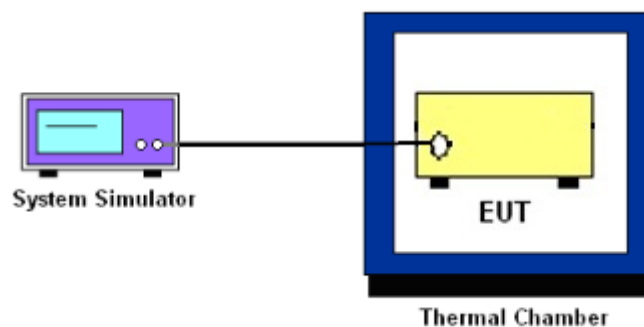

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and ERP

3.4.1 Description of the Conducted Output Power Measurement and ERP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for Band 26.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB) = -13dBm.

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= P(W)- [43 + 10log(P)] (dB)
= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
= -13dBm.



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

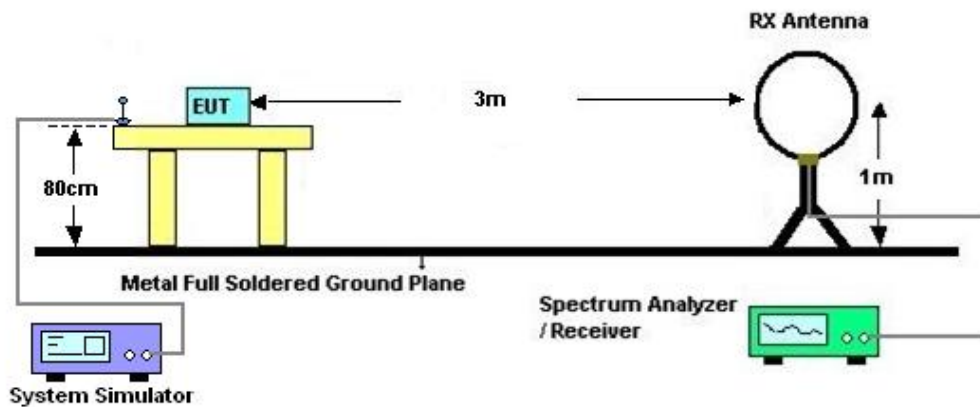

4.2.2 For radiated test from 30MHz to 1GHz

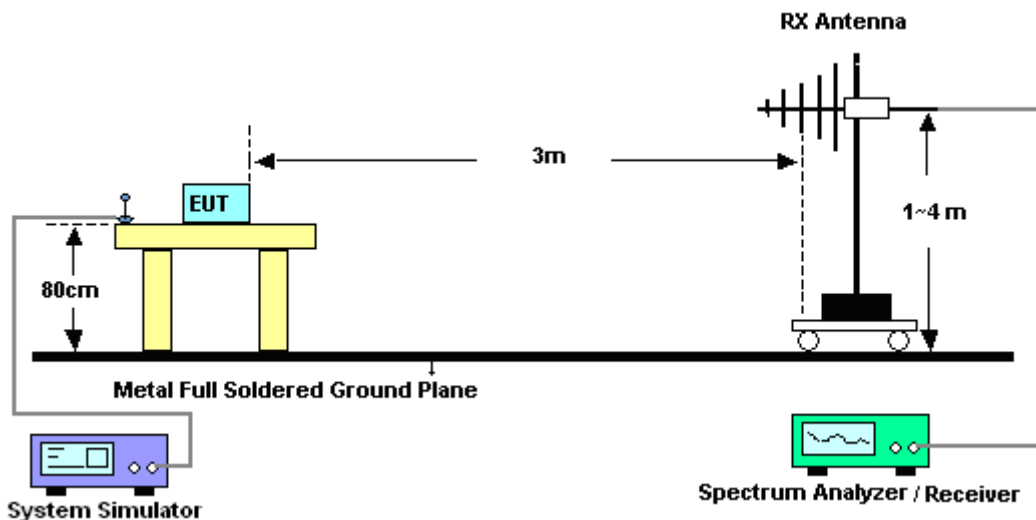

4.2.3 For radiated test above 1GHz

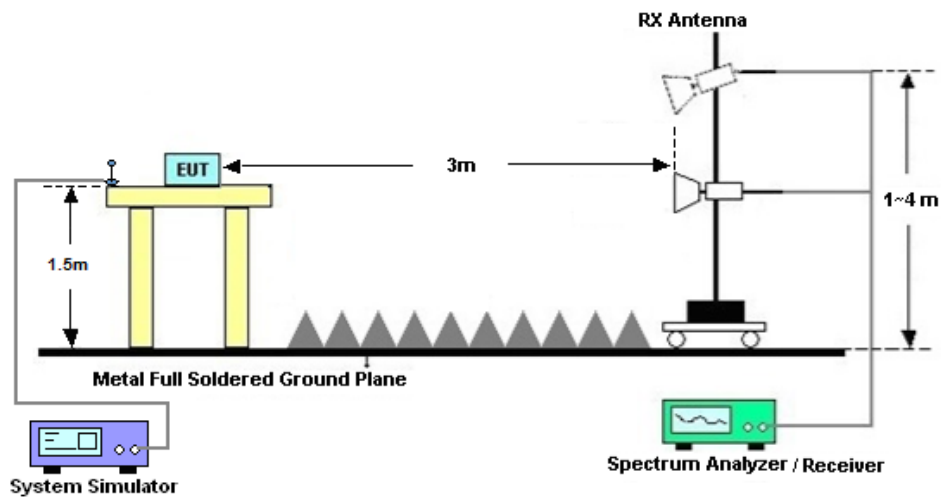

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)] \text{ (dB)}$
= $[30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
= -13dBm.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Feb. 12, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	Aug. 26, 2022	Feb. 12, 2023	Aug. 25, 2023	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 15, 2022	Feb. 12, 2023	Jul. 14, 2023	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz~44G,MAX 30dB	Oct. 12, 2022	Feb. 03, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 29, 2022	Feb. 03, 2023	Oct. 28, 2023	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May 24, 2022	Feb. 03, 2023	May 23, 2023	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Oct. 16, 2022	Feb. 03, 2023	Oct. 15, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2023	Feb. 03, 2023	Jan. 07, 2024	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	May 24, 2022	Feb. 03, 2023	May 23, 2023	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2023	Feb. 03, 2023	Jan. 04, 2024	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz-18Ghz	Oct. 12, 2022	Feb. 03, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 12, 2022	Feb. 03, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Feb. 03, 2023	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Feb. 03, 2023	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Feb. 03, 2023	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.1 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) and ERP


BW [MHz]	Modulation	RB Size	RB Offset	(For FCC)Power Low Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)			
								L	M	H	
Channel				26790	26865	26915	26965	ERP(W)			
Frequency (MHz)				824	831.5	836.5	841.5	L	M	H	
15	QPSK	1	0	24.45	24.36	24.45	24.41	0.0783	0.0767	0.0783	0.0776
15	QPSK	1	74	24.31	24.29	24.41	24.35	0.0759	0.0755	0.0776	0.0766
15	QPSK	75	0	23.42	23.36	23.42	23.33	0.0618	0.0610	0.0618	0.0605
15	16QAM	1	0	23.28	23.22	23.34	23.23	0.0598	0.0590	0.0607	0.0592
15	64QAM	1	0	22.12	22.17	22.32	22.17	0.0458	0.0463	0.0480	0.0463
Channel				26840	26840	26915	26990	ERP(W)			
Frequency (MHz)					829	836.5	844	L	M	H	
10	QPSK	1	0		24.27	24.39	24.24	0.0752	0.0773	0.0746	
10	16QAM	1	0		23.11	23.29	23.16	0.0575	0.0600	0.0582	
Channel					26815	26915	27015	ERP(W)			
Frequency (MHz)					826.5	836.5	846.5	L	M	H	
5	QPSK	1	0		24.28	24.31	24.26	0.0753	0.0759	0.0750	
5	16QAM	1	0		23.12	23.19	23.07	0.0577	0.0586	0.0570	
Channel					26815	26915	27025	ERP(W)			
Frequency (MHz)					825.5	836.5	847.5	L	M	H	
3	QPSK	1	0		24.20	24.36	24.35	0.0740	0.0767	0.0766	
3	16QAM	1	0		23.13	23.26	23.12	0.0578	0.0596	0.0577	
Channel					26797	26915	27033	ERP(W)			
Frequency (MHz)					824.7	836.5	848.3	L	M	H	
1.4	QPSK	1	0	24.26	24.36	24.25	0.0750	0.0767	0.0748		
1.4	16QAM	1	0	23.14	23.27	23.11	0.0579	0.0597	0.0575		



LTE Band 26

Peak-to-Average Ratio

Mode	LTE Band 26 / 15MHz			
RB Size	Full RB	Full RB	Full RB	Limit: 13dB
Mod.	QPSK	16QAM	64QAM	Result
Middle CH	4.58	5.36	5.86	PASS

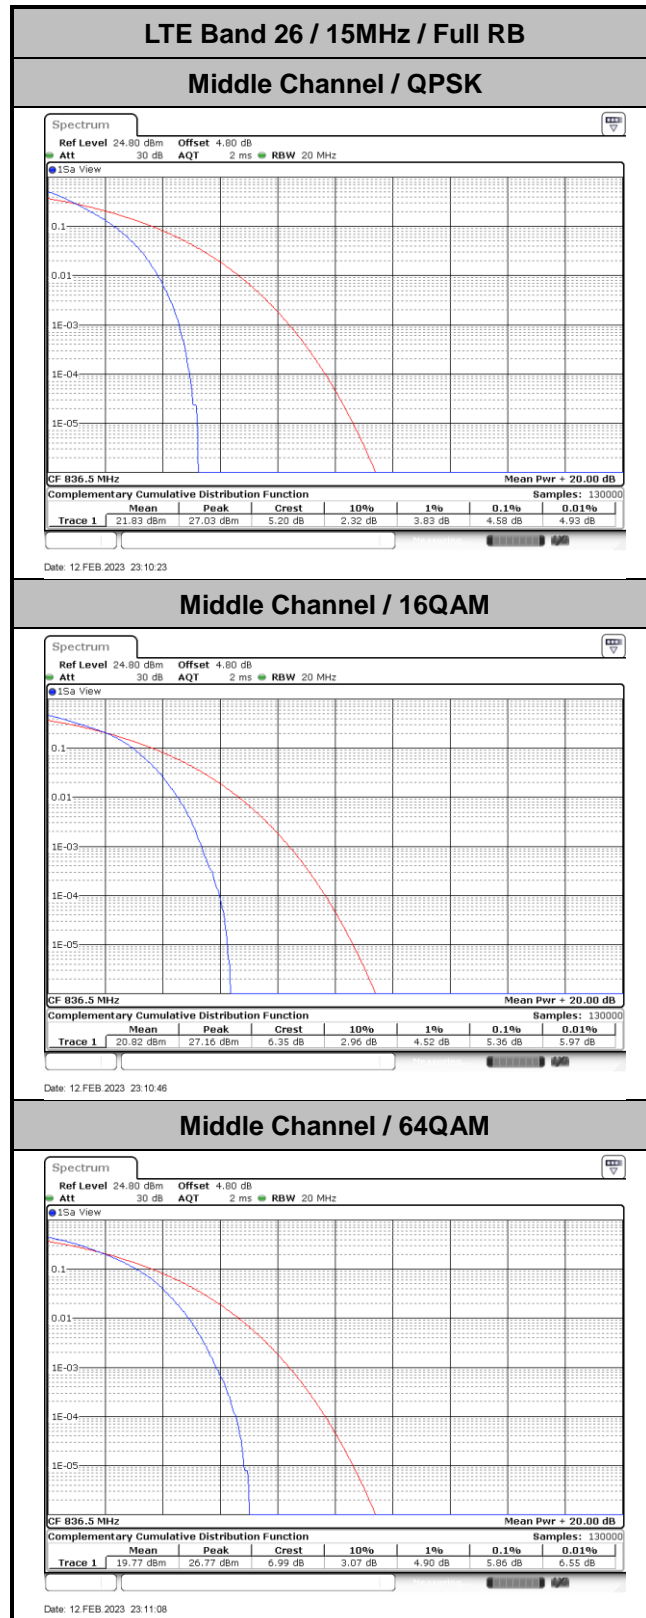




26dB Bandwidth

Mode	LTE Band 26 : 26dB BW(MHz)									
	1.4MHz		3MHz		5MHz		10MHz		15MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	1.28	1.29	3.03	2.99	4.88	4.87	9.83	9.87	14.42	14.24




LTE Band 26

Middle Channel / 1.4MHz / QPSK

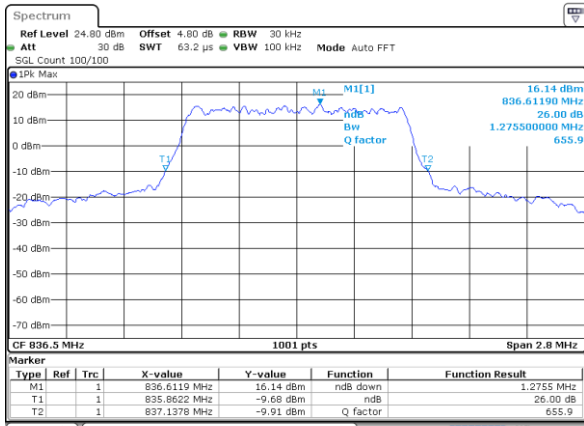

Date: 12 FEB 2023 23:24:26


Middle Channel / 1.4MHz / 16QAM

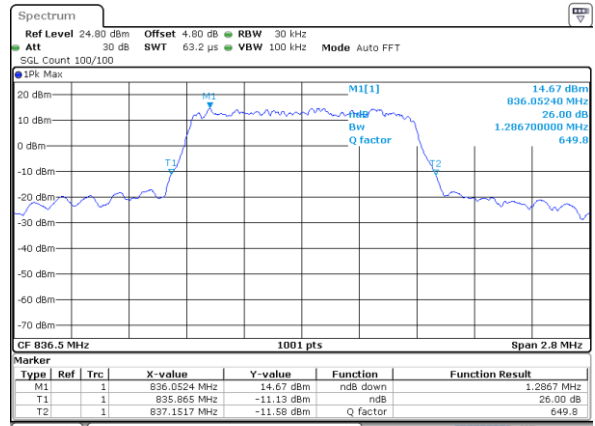

Date: 12 FEB 2023 23:25:29


LTE Band 26

Middle Channel / 3MHz / QPSK

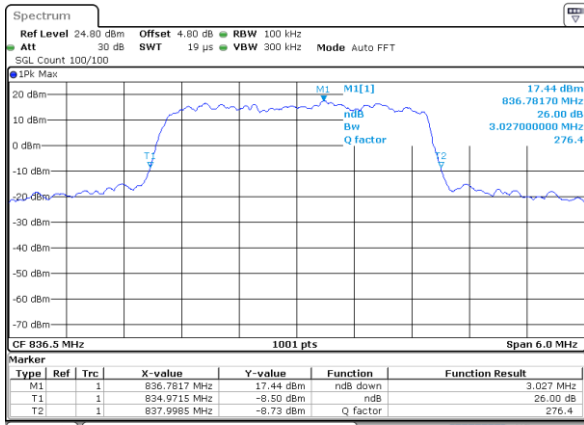

Date: 12 FEB 2023 23:22:10


Middle Channel / 3MHz / 16QAM

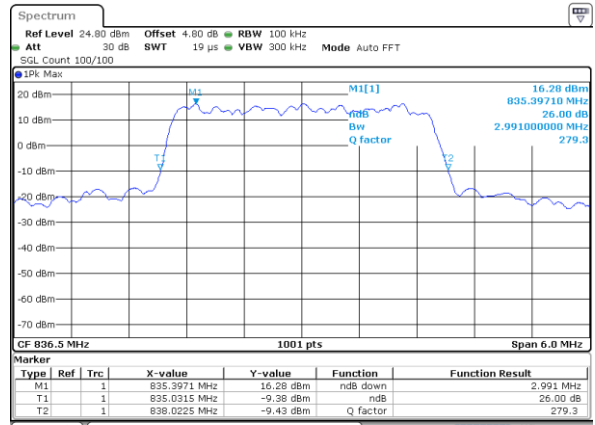

Date: 12 FEB 2023 23:23:05


LTE Band 26

Middle Channel / 5MHz / QPSK

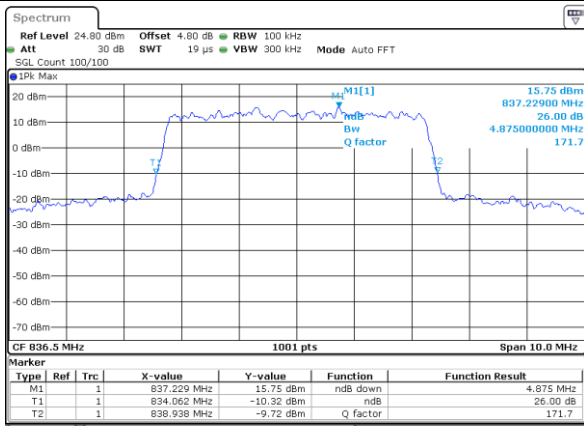

Date: 12 FEB 2023 23:14:47

Middle Channel / 5MHz / 16QAM

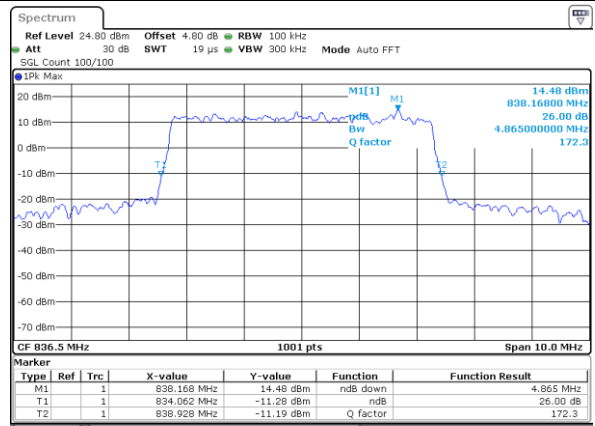


Date: 12 FEB 2023 23:15:41

LTE Band 26




Middle Channel / 10MHz / QPSK

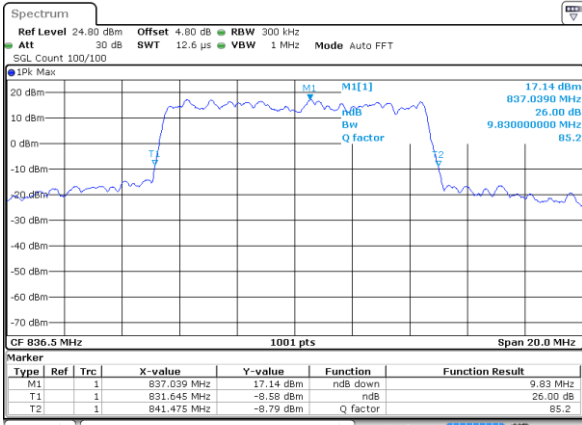

Date: 12 FEB 2023 23:11:31


Middle Channel / 10MHz / 16QAM

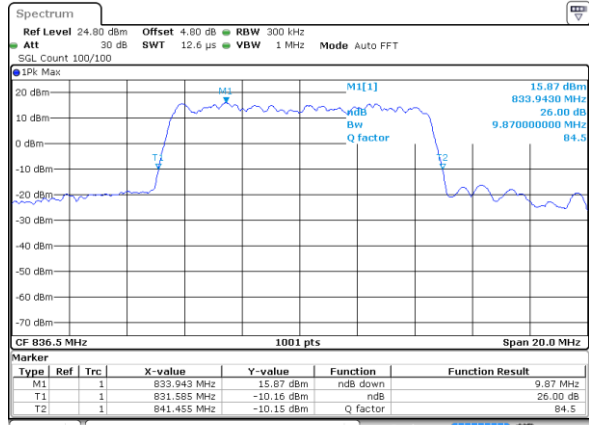

Date: 12 FEB 2023 23:12:34


LTE Band 26

Middle Channel / 15MHz / QPSK

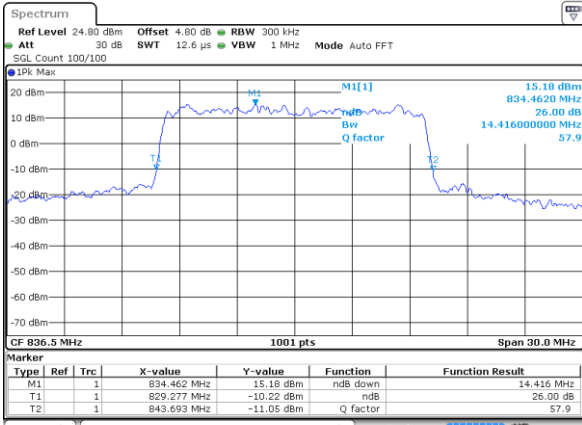

Date: 12 FEB 2023 23:09:18

Middle Channel / 15MHz / 16QAM

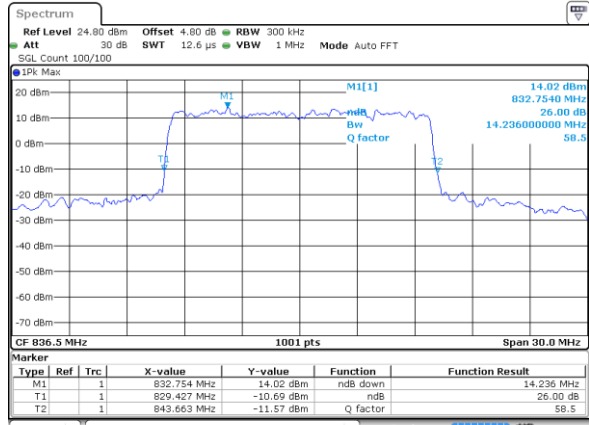

Date: 12 FEB 2023 23:09:39



Occupied Bandwidth


Mode	LTE Band 26 : 99%OBW(MHz)									
	1.4MHz		3MHz		5MHz		10MHz		15MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	1.09	1.10	2.70	2.70	4.48	4.49	9.01	9.05	13.46	13.43

Mode	LTE Band 26 : 99%OBW(MHz)	
BW	15MHz(CH26790)	
Mod.	QPSK	16QAM
Lowest CH	13.43	13.43




LTE Band 26

Middle Channel / 1.4MHz / QPSK

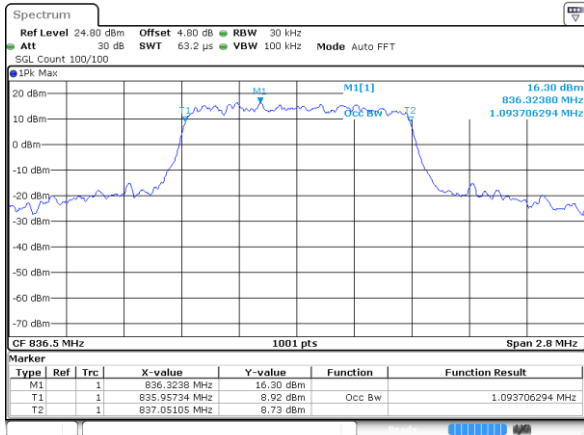

Date: 12 FEB 2023 23:23:48


Middle Channel / 1.4MHz / 16QAM

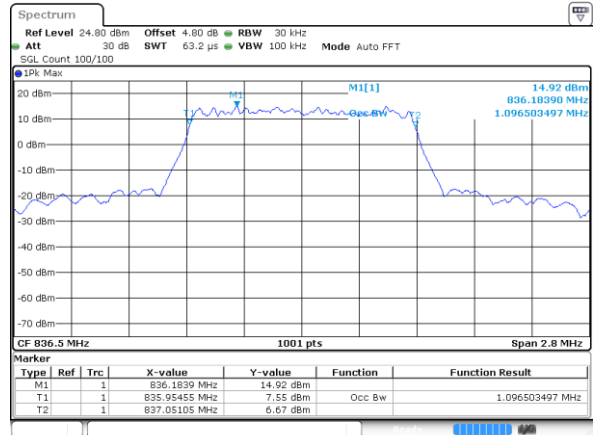

Date: 12 FEB 2023 23:24:58


LTE Band 26

Middle Channel / 3MHz / QPSK

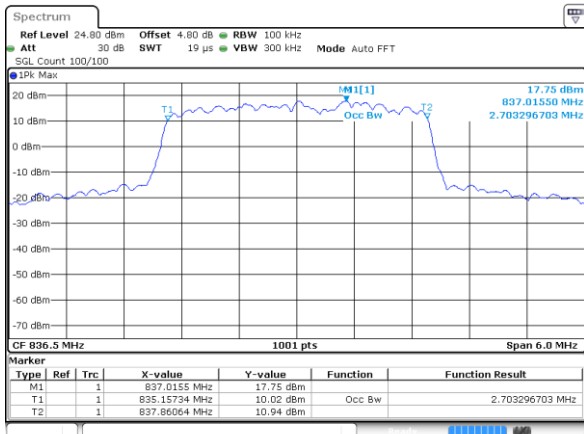

Date: 12 FEB 2023 23:21:49


Middle Channel / 3MHz / 16QAM

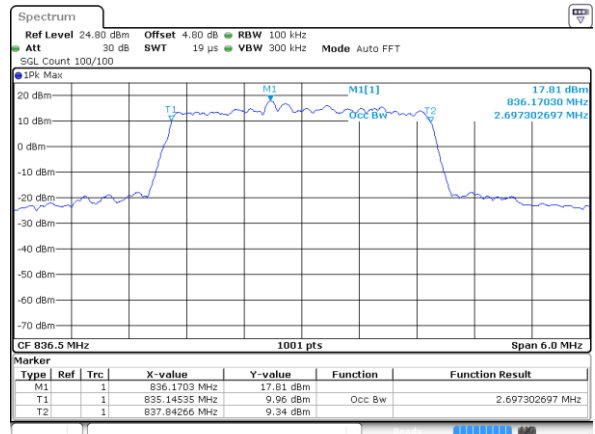

Date: 12 FEB 2023 23:22:33


LTE Band 26

Middle Channel / 5MHz / QPSK

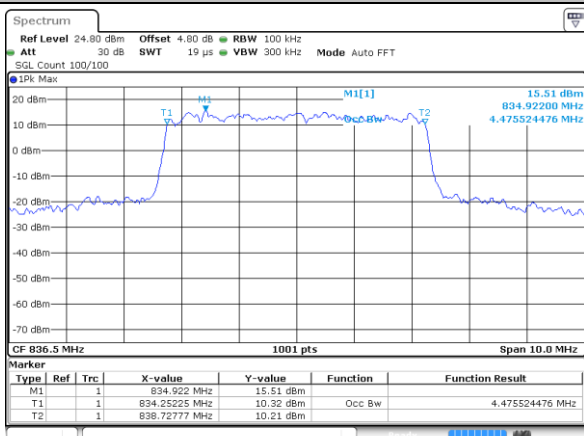

Date: 12 FEB 2023 23:14:27

Middle Channel / 5MHz / 16QAM

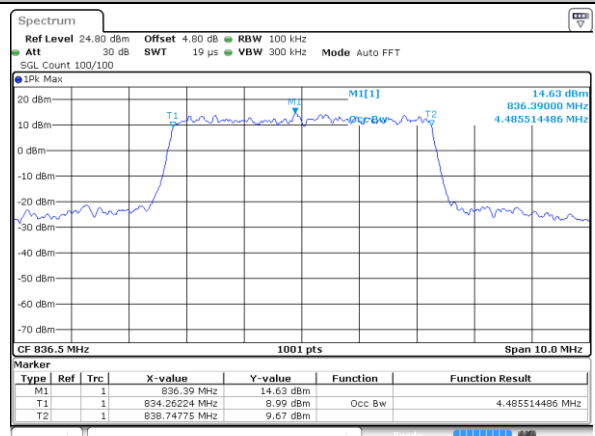


Date: 12 FEB 2023 23:15:16

LTE Band 26




Middle Channel / 10MHz / QPSK

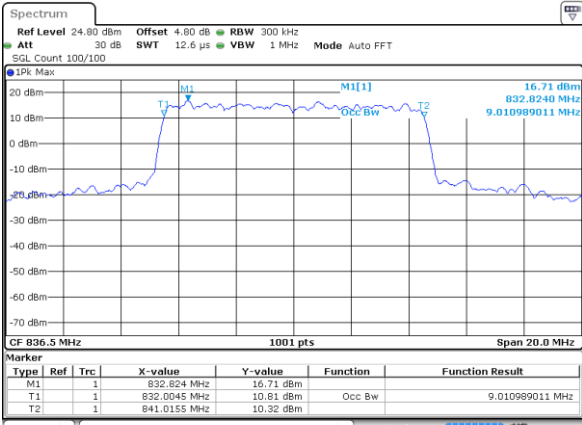

Date: 12 FEB 2023 23:11:52


Middle Channel / 10MHz / 16QAM

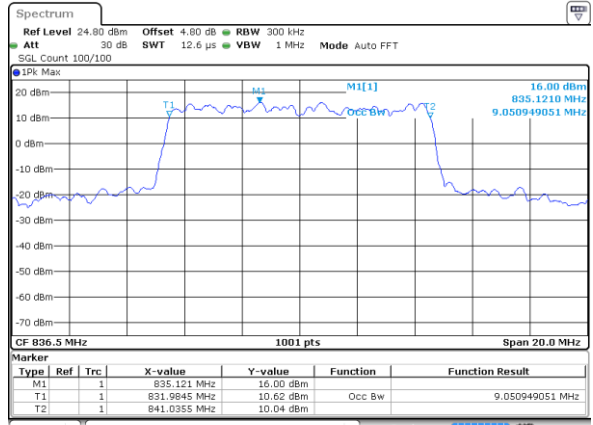

Date: 12 FEB 2023 23:12:13


LTE Band 26

Middle Channel / 15MHz / QPSK

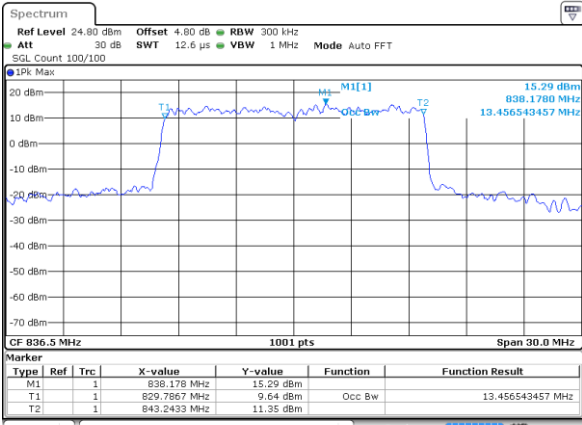

Date: 12 FEB 2023 23:08:56

Middle Channel / 15MHz / 16QAM

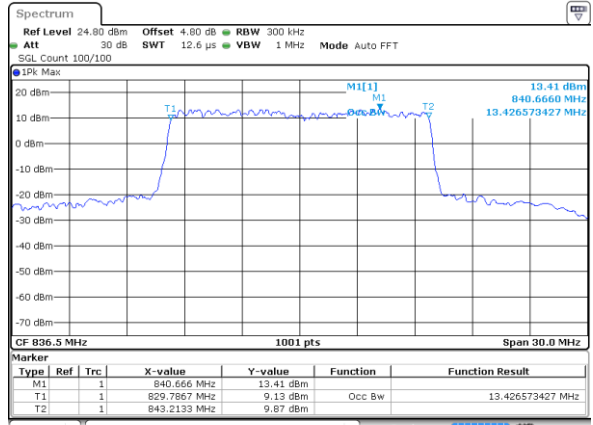


Date: 12 FEB 2023 23:10:00




LTE Band 26

Lowest Channel / 15MHz / QPSK

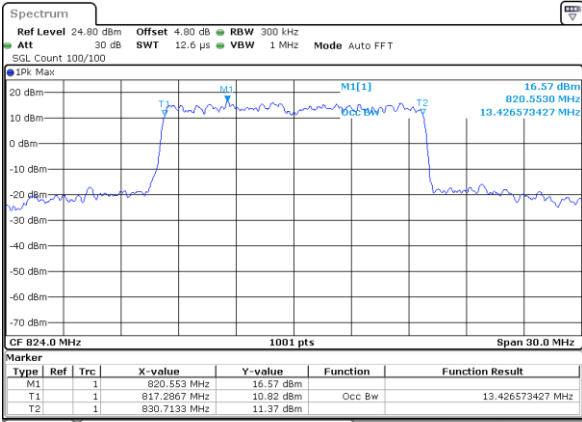

Date: 13.FEB.2023 03:14:24


Lowest Channel / 15MHz / 16QAM

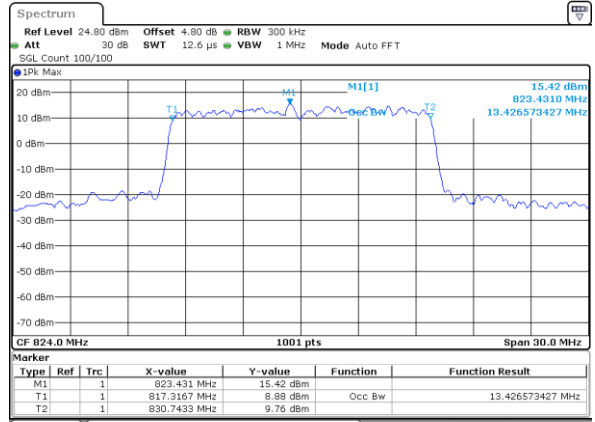

Date: 13.FEB.2023 03:15:28




Conducted Band Edge

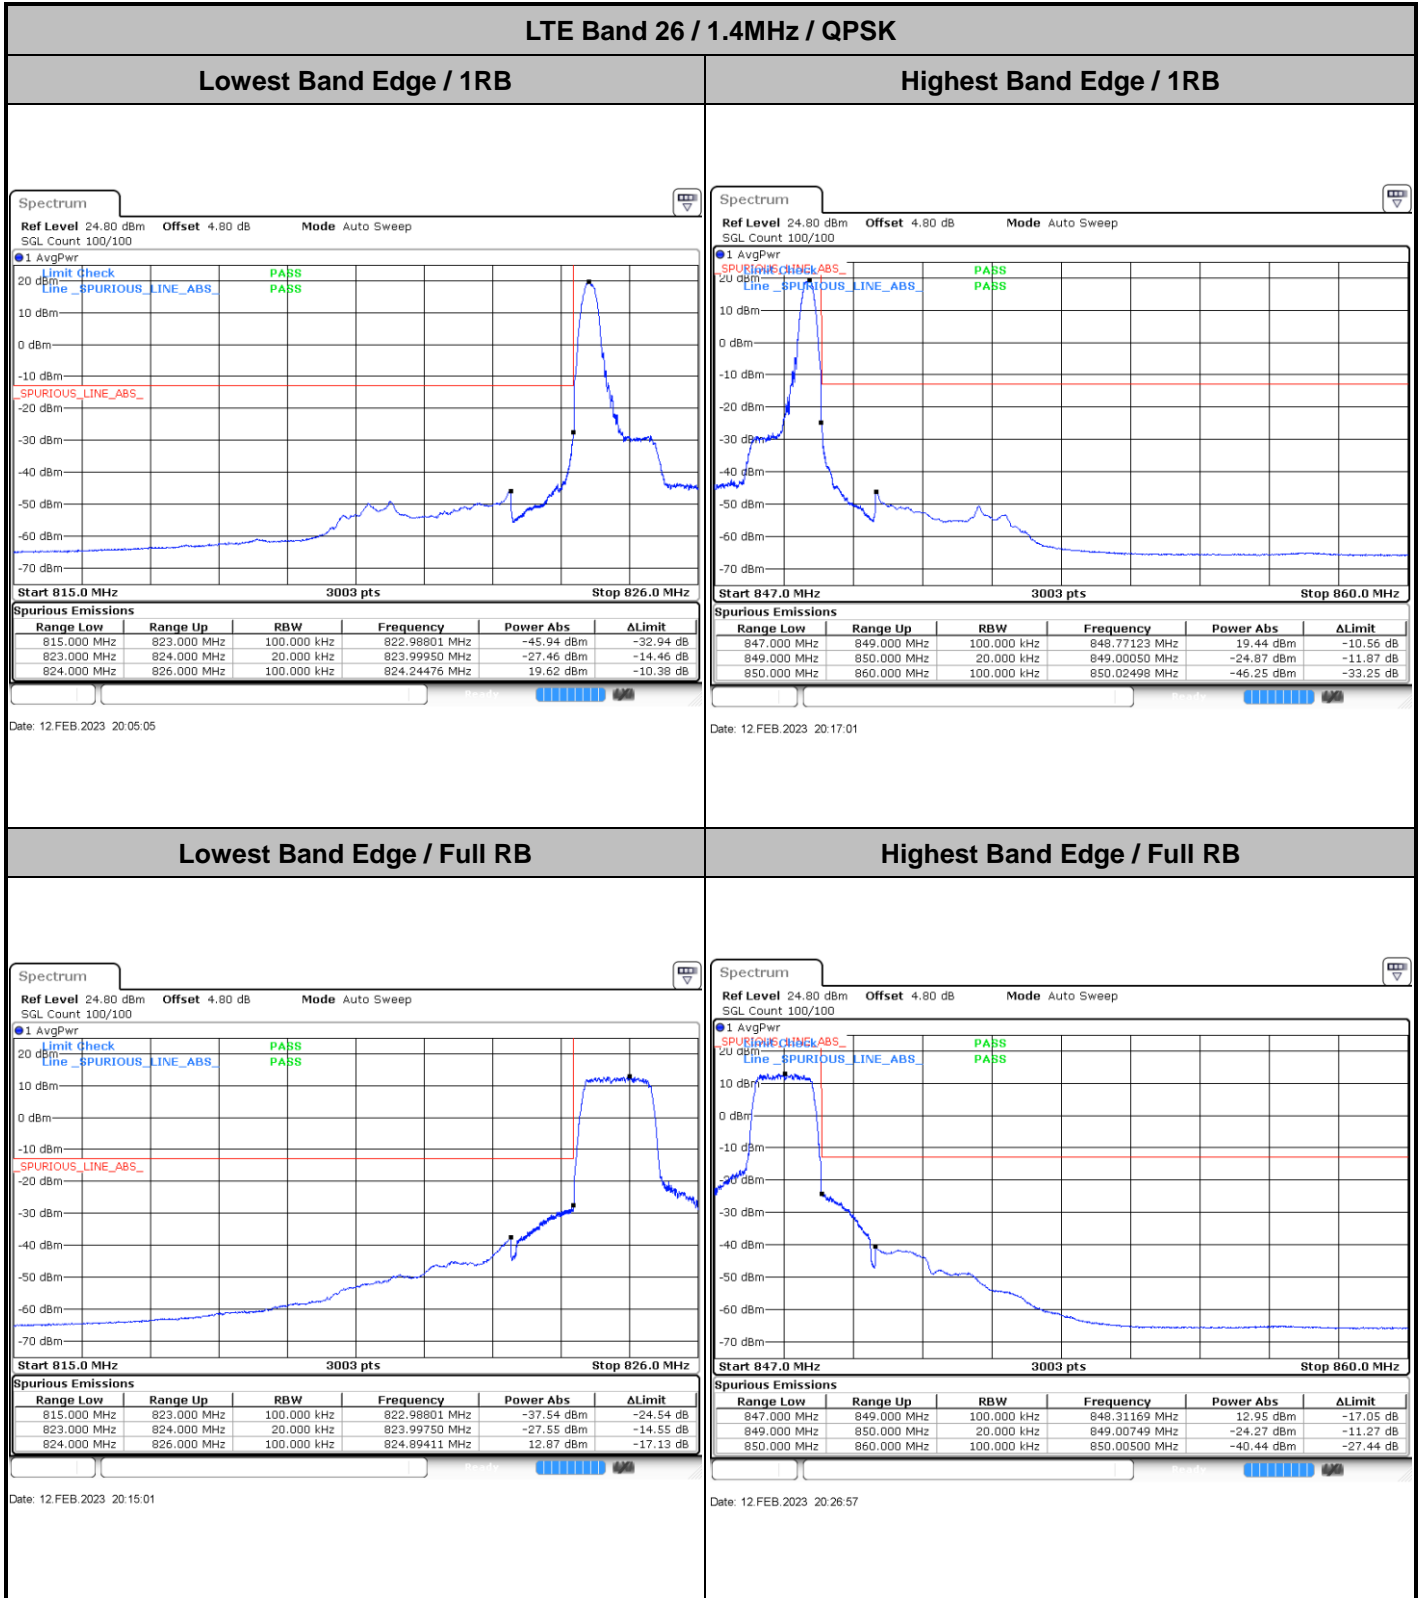




LTE Band 26 / 1.4MHz / 16QAM

Lowest Band Edge / 1 RB

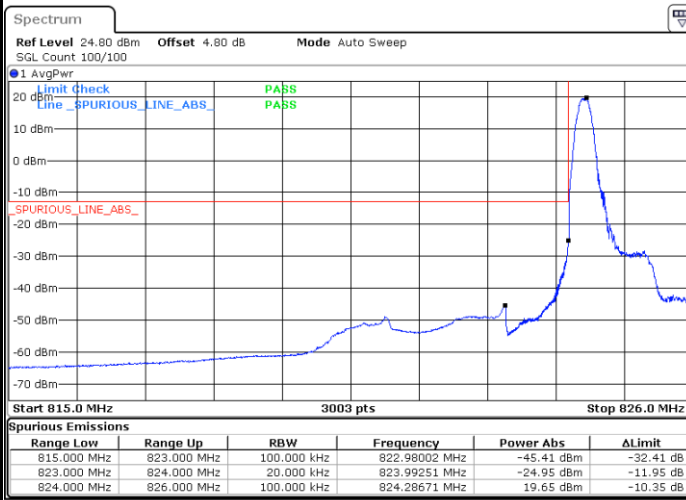


Date: 12.FEB.2023 20:07:05

Highest Band Edge / 1 RB

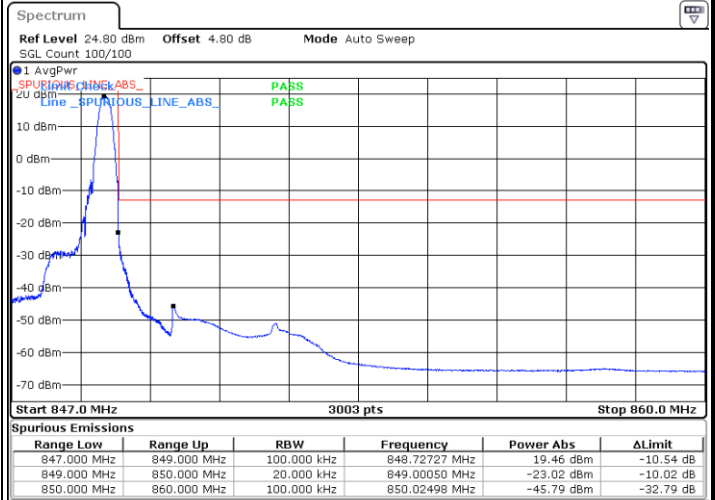


Date: 12.FEB.2023 20:19:00

Lowest Band Edge / Full RB

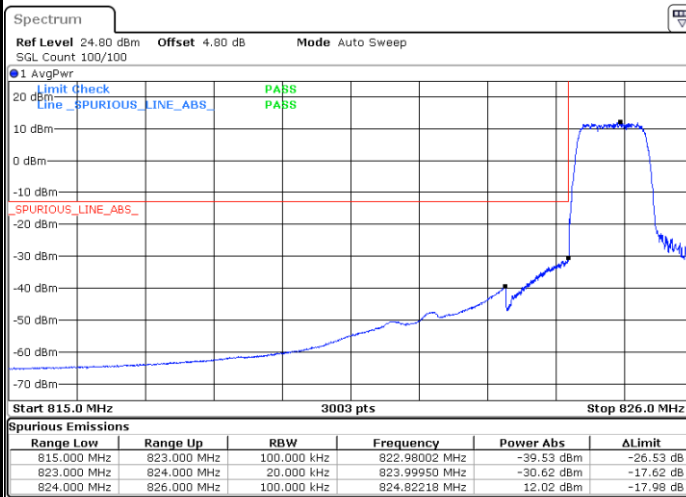

Date: 12.FEB.2023 20:13:02

Highest Band Edge / Full RB

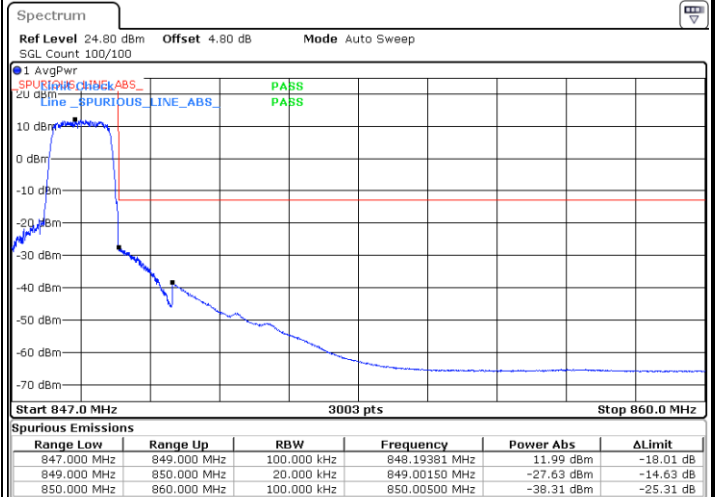


Date: 12.FEB.2023 20:24:58




LTE Band 26 / 1.4MHz / 64QAM

Lowest Band Edge / 1 RB

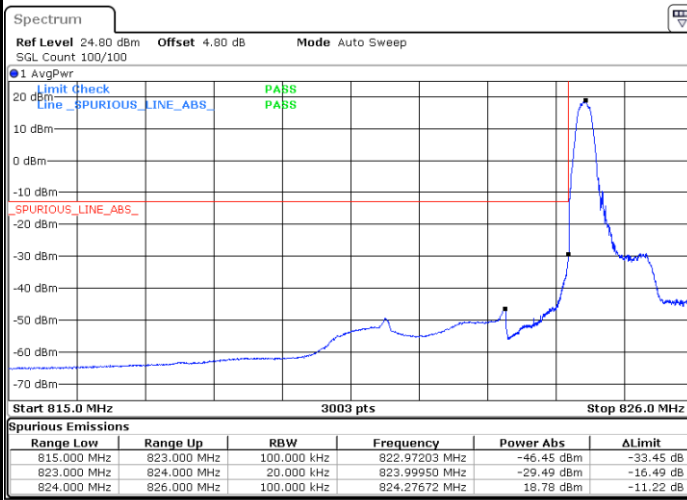


Date: 12.FEB.2023 20:09:04

Highest Band Edge / 1 RB

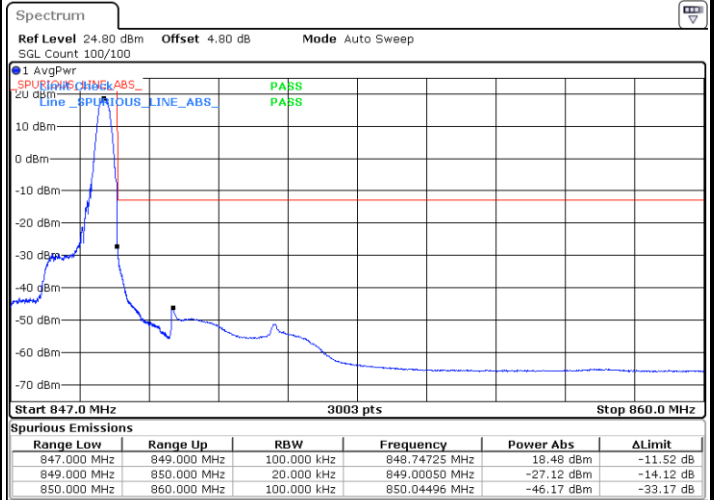


Date: 12.FEB.2023 20:20:59

Lowest Band Edge / Full RB

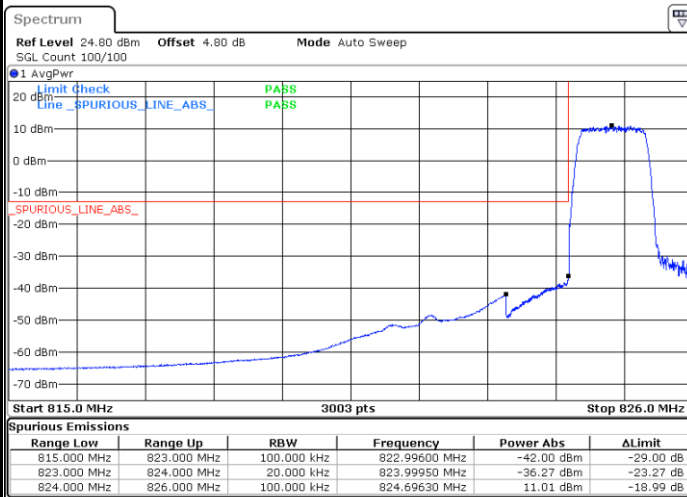

Date: 12.FEB.2023 20:11:03

Highest Band Edge / Full RB

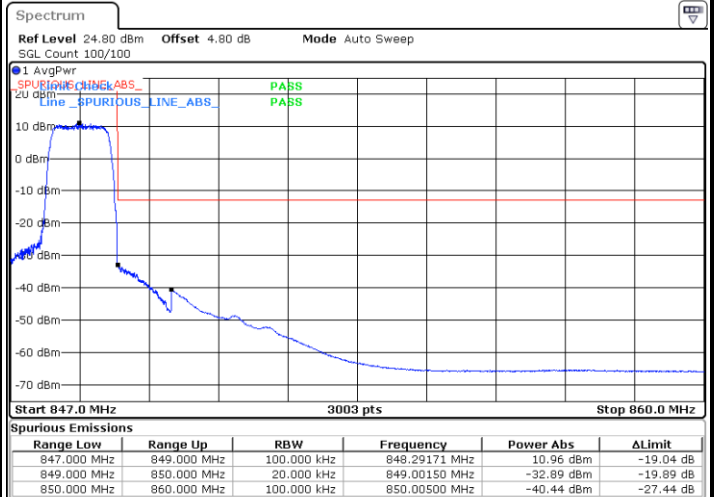


Date: 12.FEB.2023 20:22:58



LTE Band 26 / 3MHz / QPSK

Lowest Band Edge / 1RB

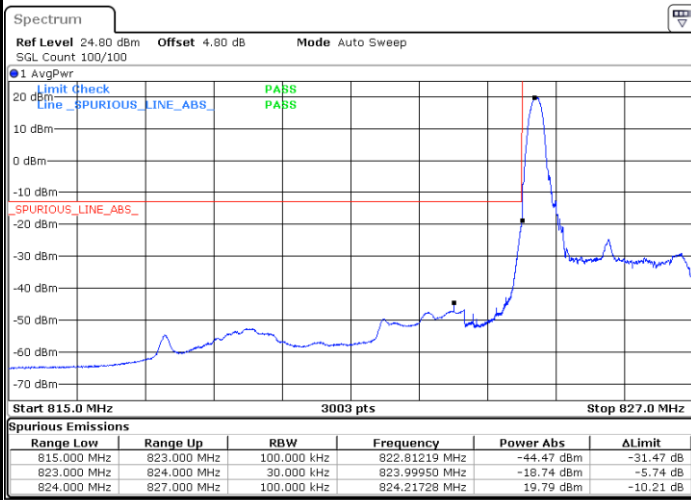


Date: 12.FEB.2023 23:17:13

Highest Band Edge / 1 RB




Date: 12.FEB.2023 21:27:08

Lowest Band Edge / Full RB

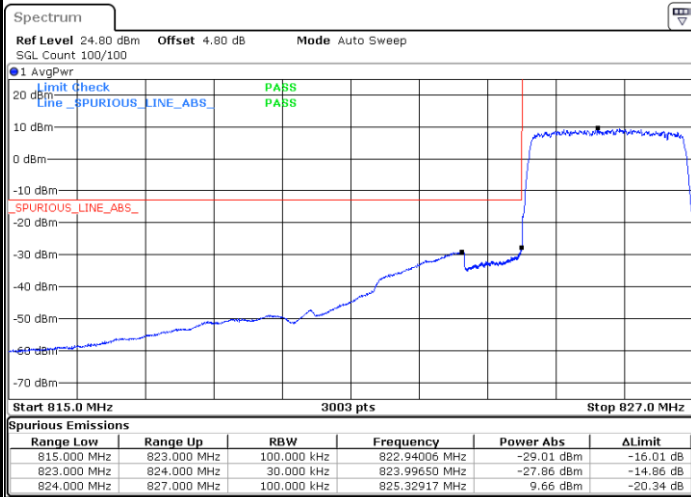

Date: 12.FEB.2023 21:25:09

Highest Band Edge / Full RB

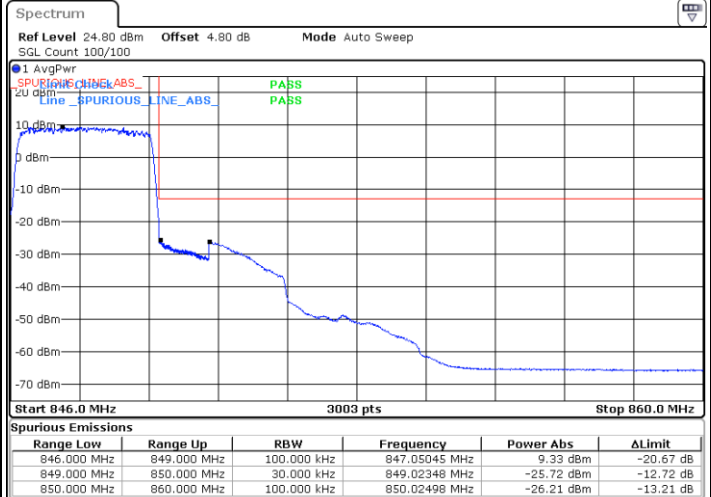


Date: 12.FEB.2023 21:37:04




LTE Band 26 / 3MHz / 16QAM


Lowest Band Edge / 1 RB

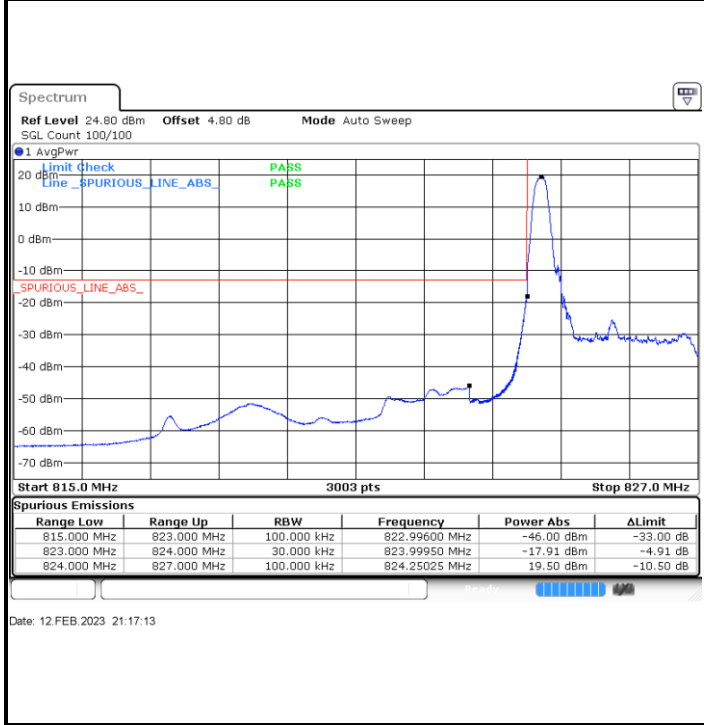


Highest Band Edge / 1 RB

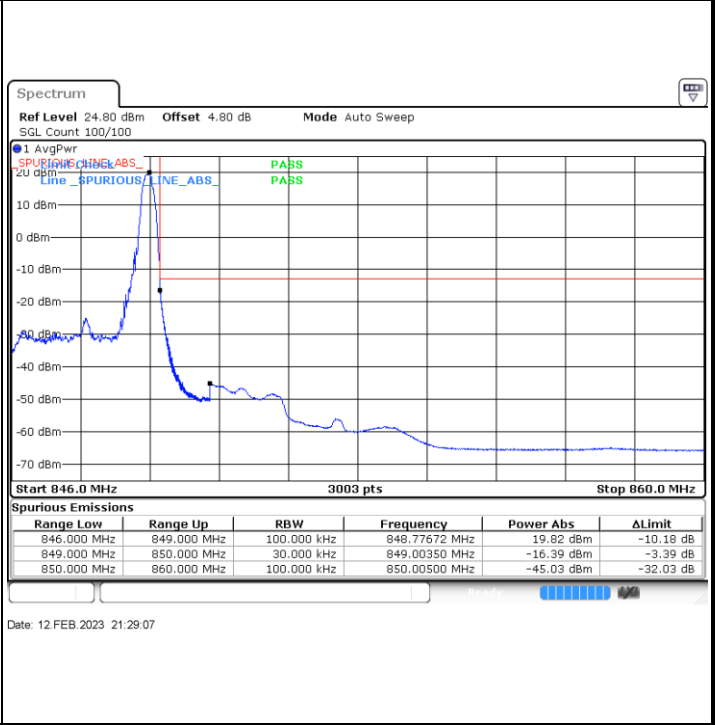

Lowest Band Edge / Full RB

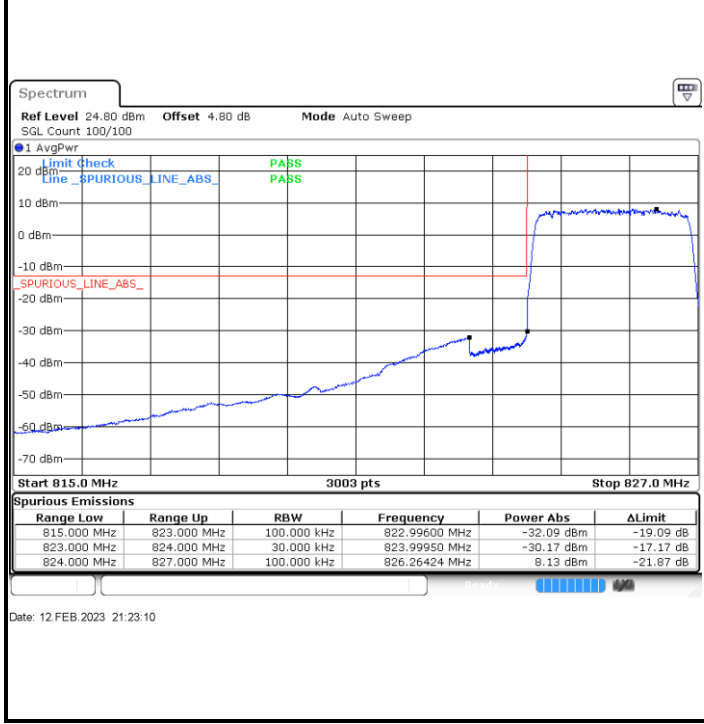


Highest Band Edge / Full RB

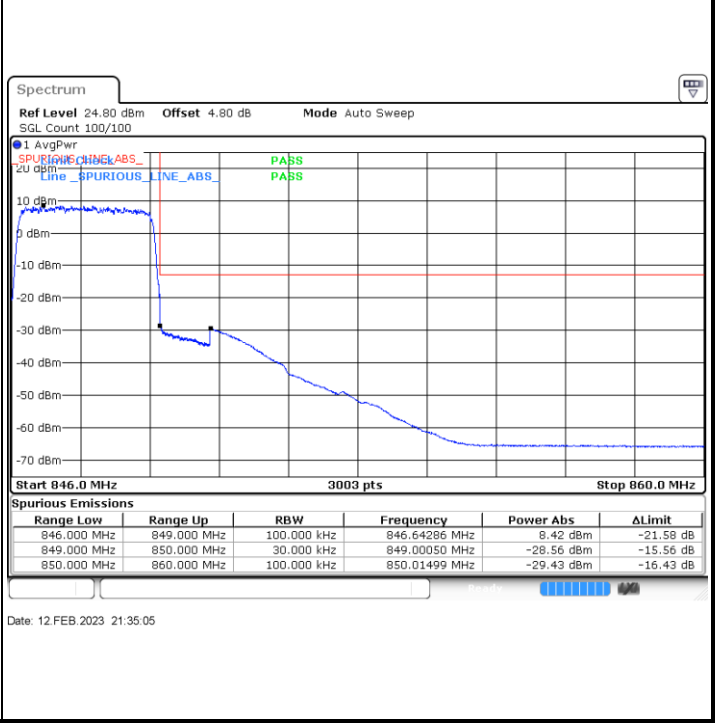




LTE Band 26 / 3MHz / 64QAM

Lowest Band Edge / 1 RB

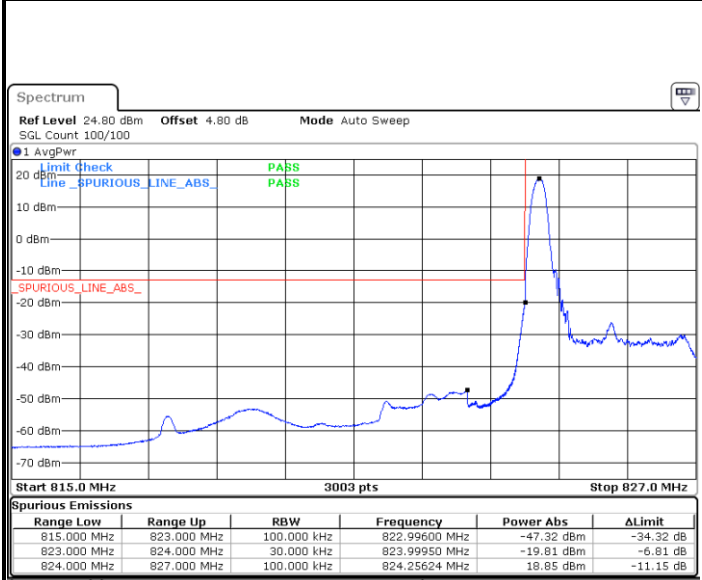


Date: 12.FEB.2023 21:19:12

Highest Band Edge / 1 RB

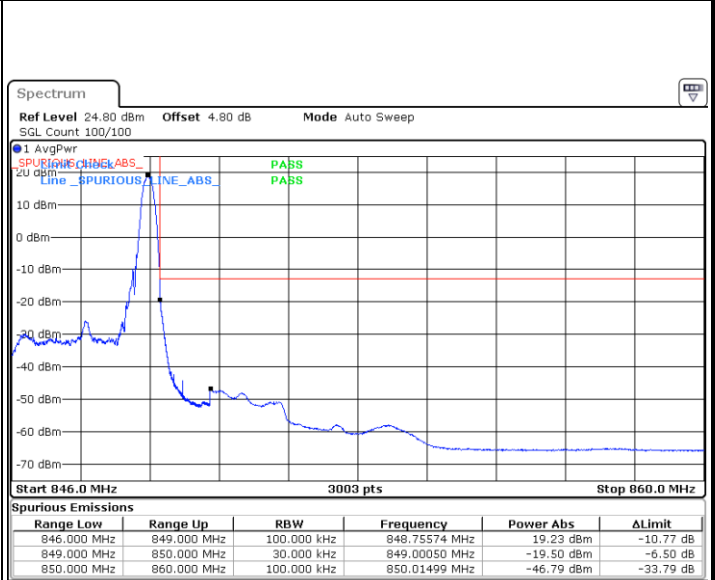


Date: 12.FEB.2023 21:31:07

Lowest Band Edge / Full RB

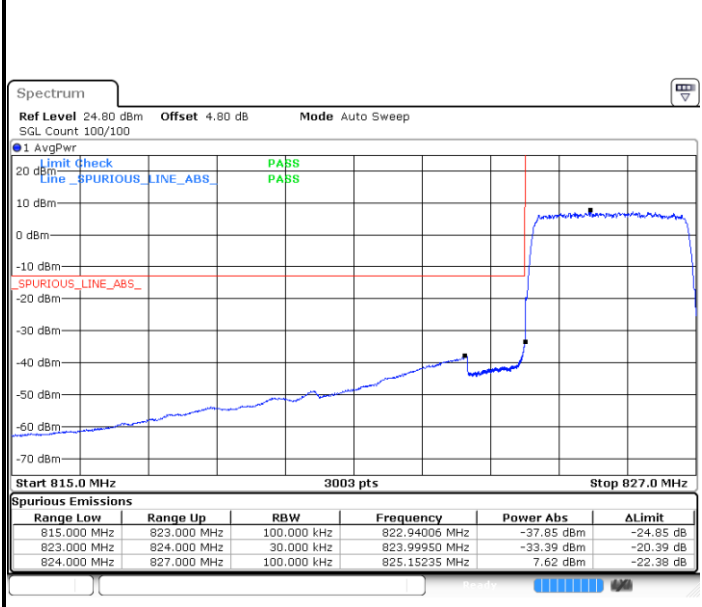

Date: 12.FEB.2023 21:21:11

Highest Band Edge / Full RB

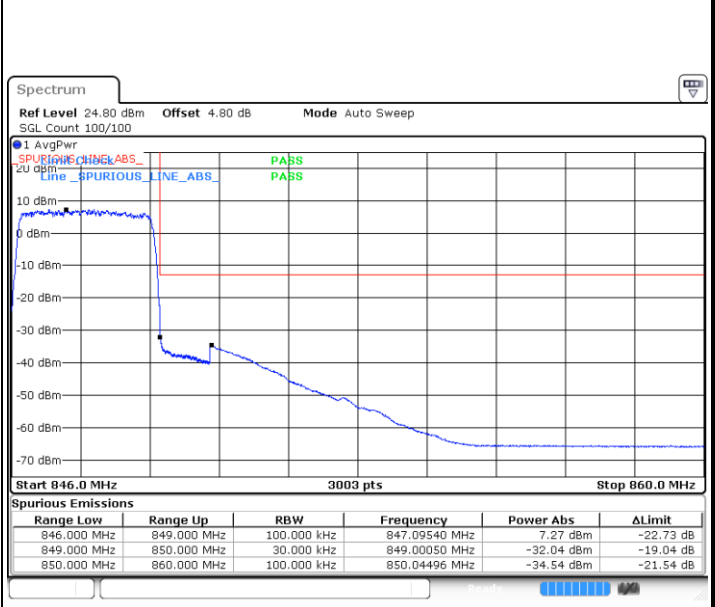


Date: 12.FEB.2023 21:33:06




LTE Band 26 / 5MHz / QPSK

Lowest Band Edge / 1 RB

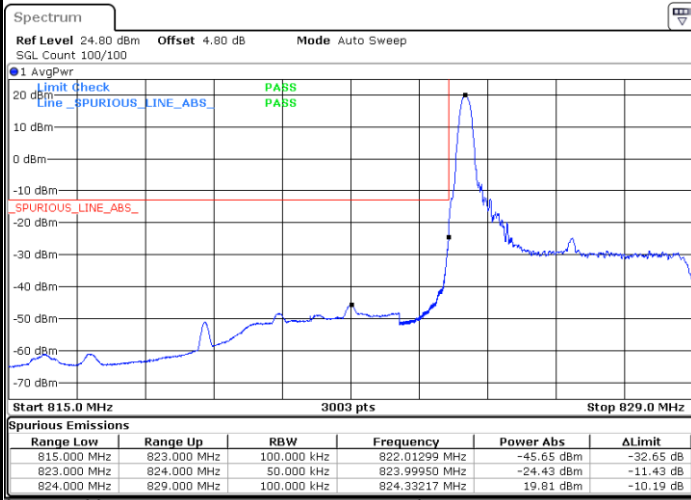


Date: 12.FEB.2023 21:45:02

Highest Band Edge / 1 RB

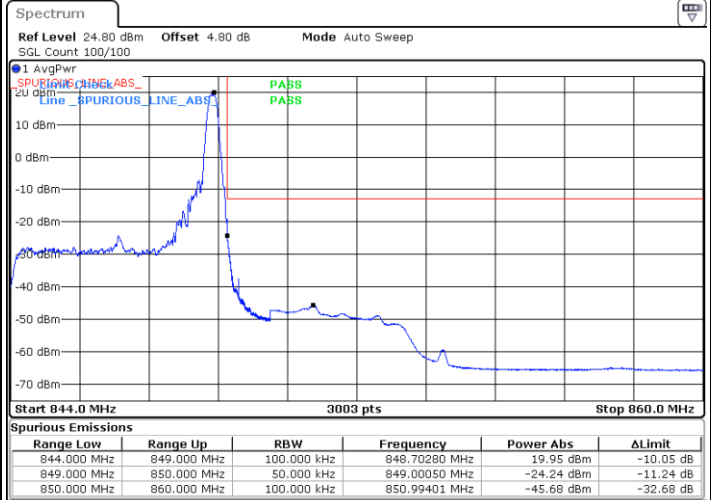


Date: 12.FEB.2023 21:56:57

Lowest Band Edge / Full RB

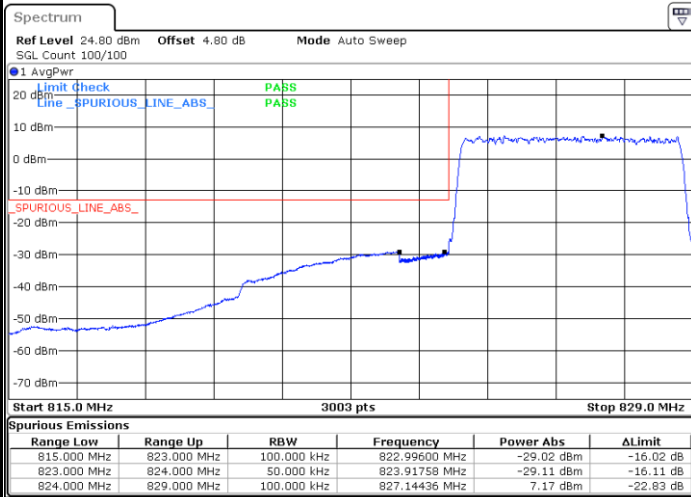

Date: 12.FEB.2023 21:54:58

Highest Band Edge / Full RB

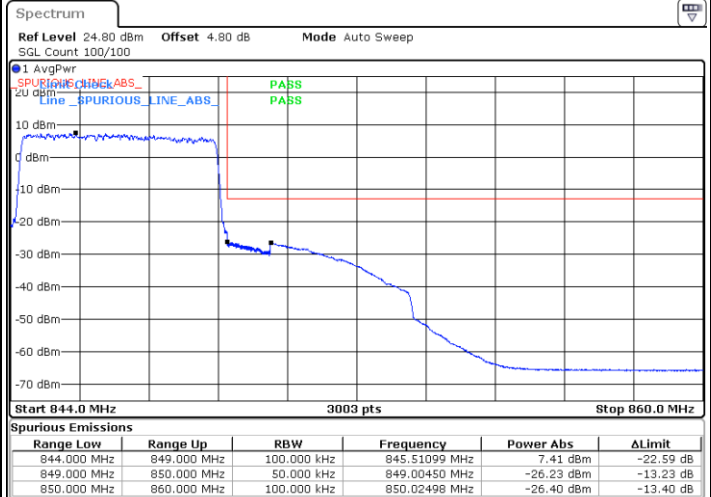


Date: 12.FEB.2023 22:06:53




LTE Band 26 / 5MHz / 16QAM

Lowest Band Edge / 1RB

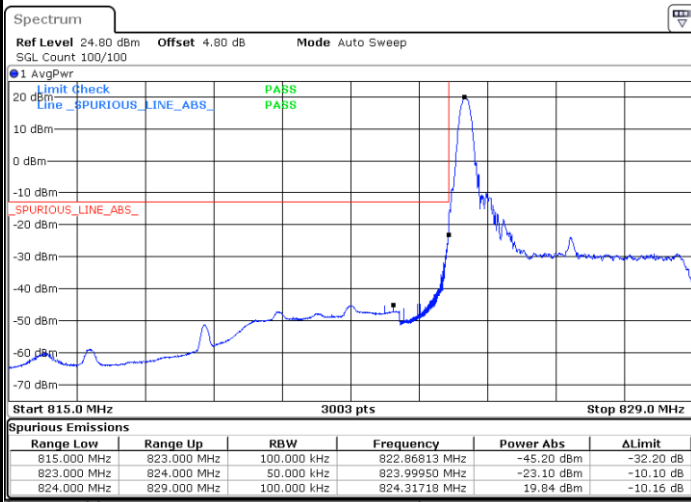


Date: 12.FEB.2023 21:47:01

Highest Band Edge / 1 RB

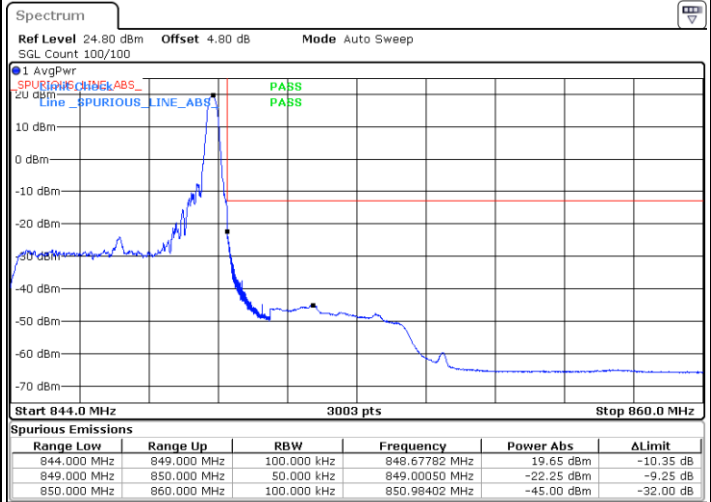


Date: 12.FEB.2023 21:58:56

Lowest Band Edge / Full RB

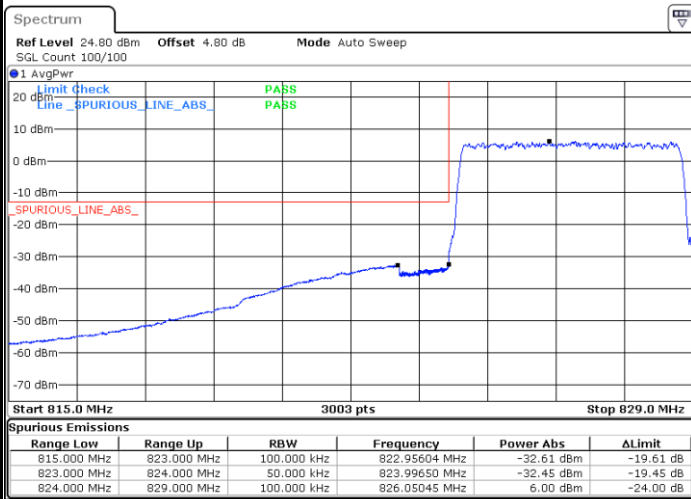

Date: 12.FEB.2023 21:52:59

Highest Band Edge / Full RB

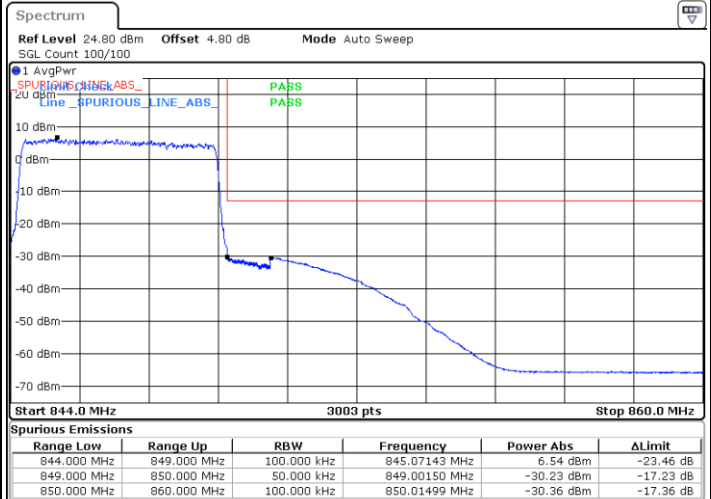


Date: 12.FEB.2023 22:04:54




LTE Band 26 / 5MHz / 64QAM

Lowest Band Edge / 1RB

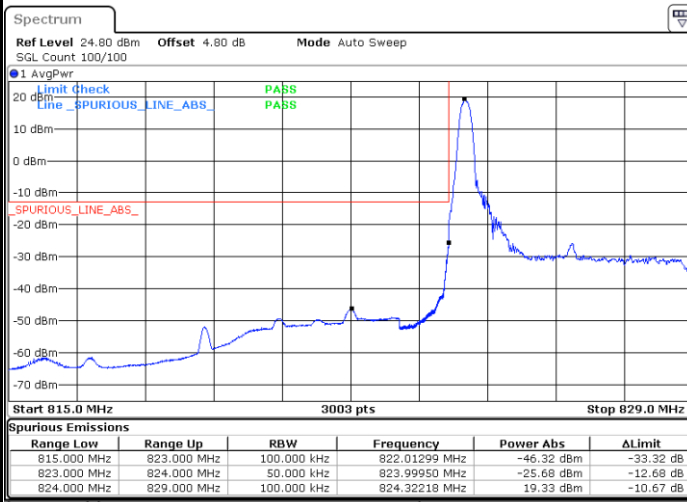


Date: 12.FEB.2023 21:49:00

Highest Band Edge / 1 RB

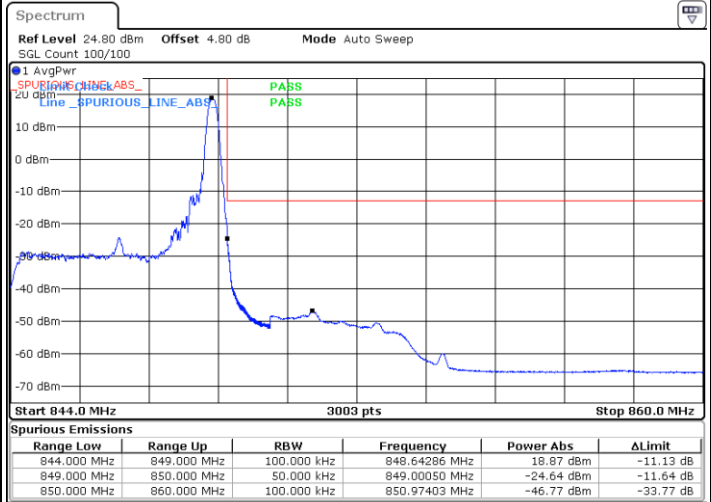


Date: 12.FEB.2023 22:00:56

Lowest Band Edge / Full RB

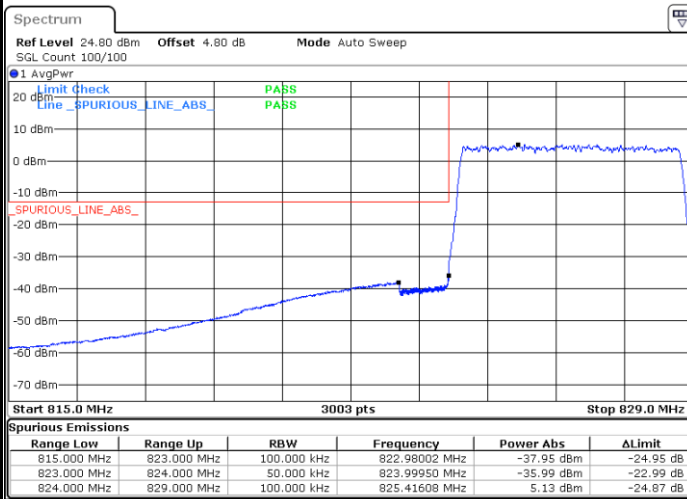

Date: 12.FEB.2023 21:51:00

Highest Band Edge / Full RB

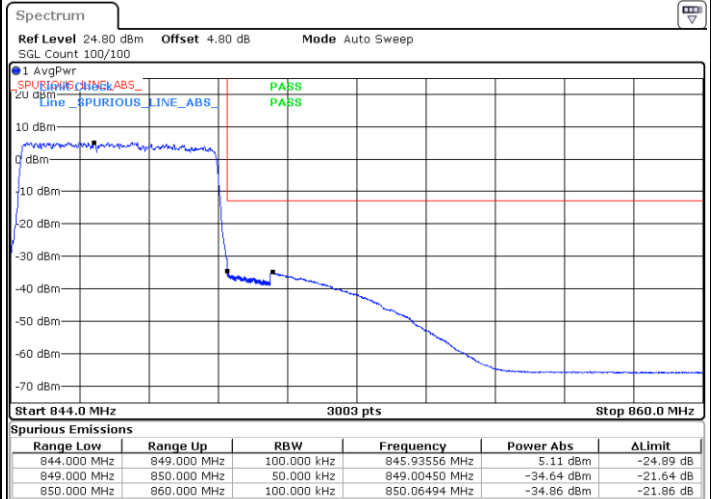


Date: 12.FEB.2023 22:02:55




LTE Band 26 / 10MHz / QPSK

Lowest Band Edge / 1 RB

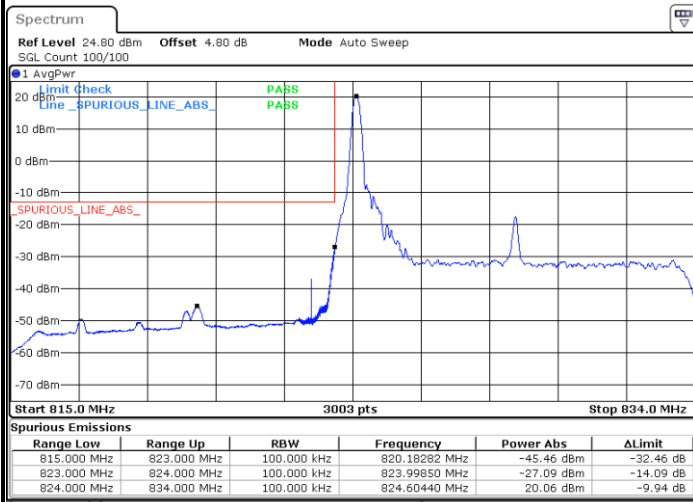


Date: 12.FEB.2023 22:16:50

Highest Band Edge / 1 RB

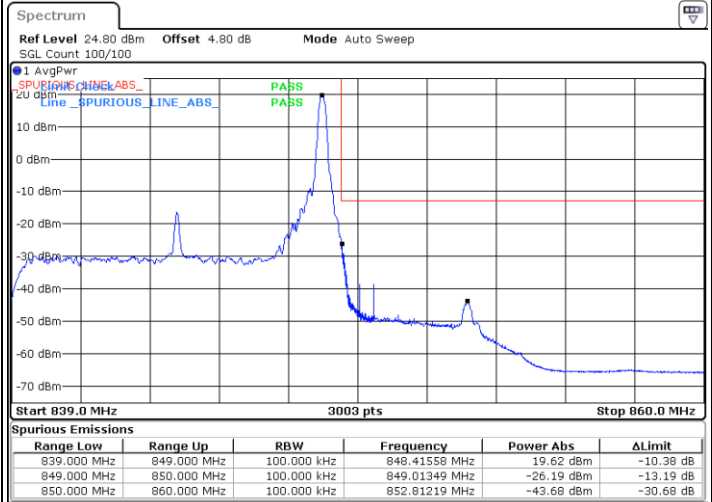


Date: 12.FEB.2023 22:28:45

Lowest Band Edge / Full RB

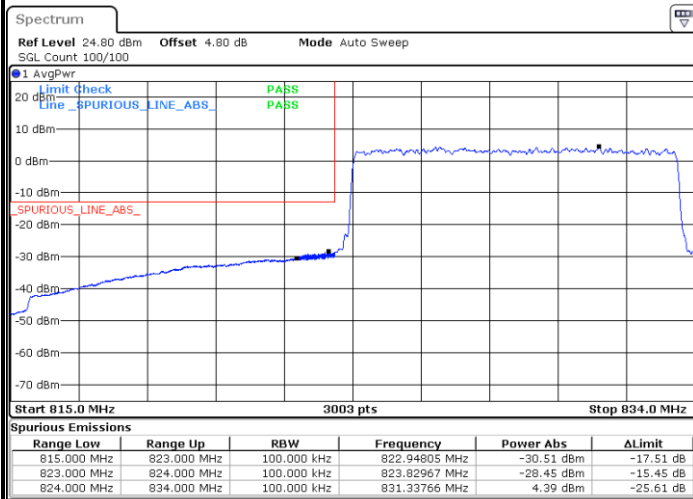

Date: 12.FEB.2023 22:26:46

Highest Band Edge / Full RB

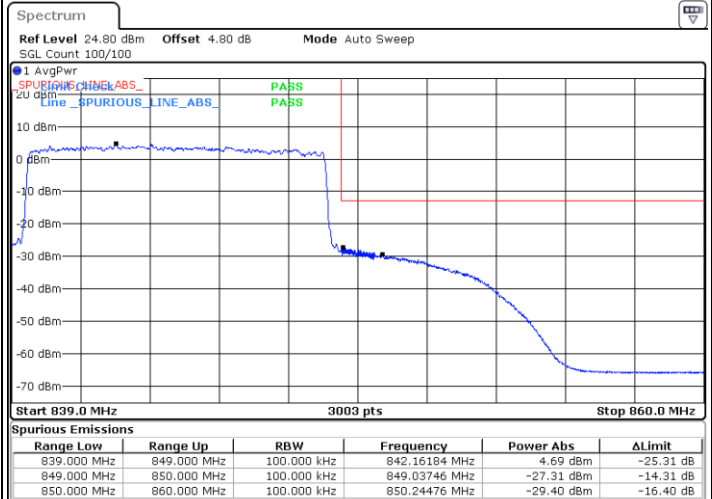


Date: 12.FEB.2023 22:38:41




LTE Band 26 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

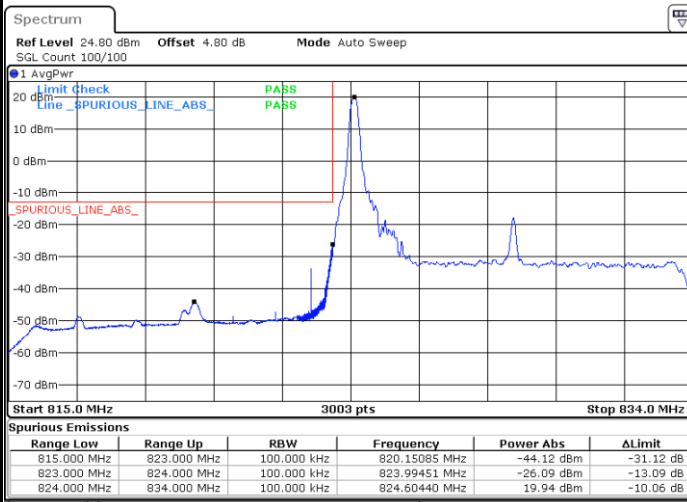


Date: 12.FEB.2023 22:18:49

Highest Band Edge / 1 RB

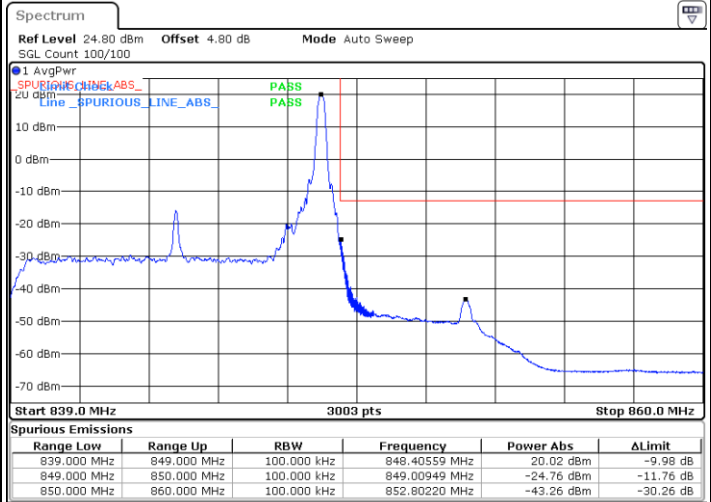


Date: 12.FEB.2023 22:30:44

Lowest Band Edge / Full RB

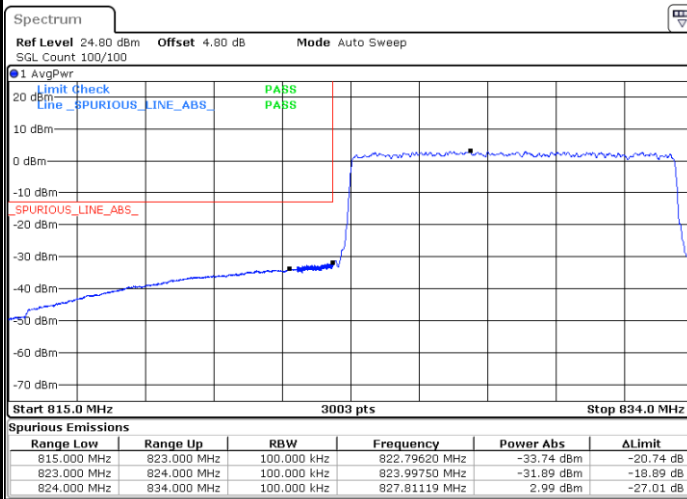

Date: 12.FEB.2023 22:24:47

Highest Band Edge / Full RB

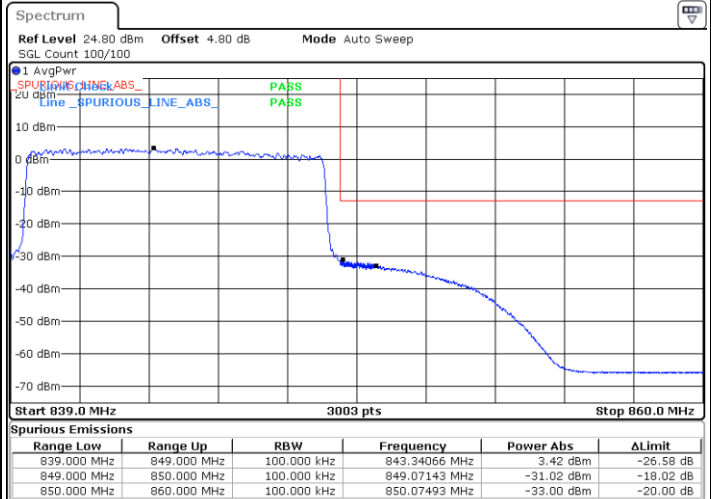


Date: 12.FEB.2023 22:36:42




LTE Band 26 / 10MHz / 64QAM

Lowest Band Edge / 1 RB

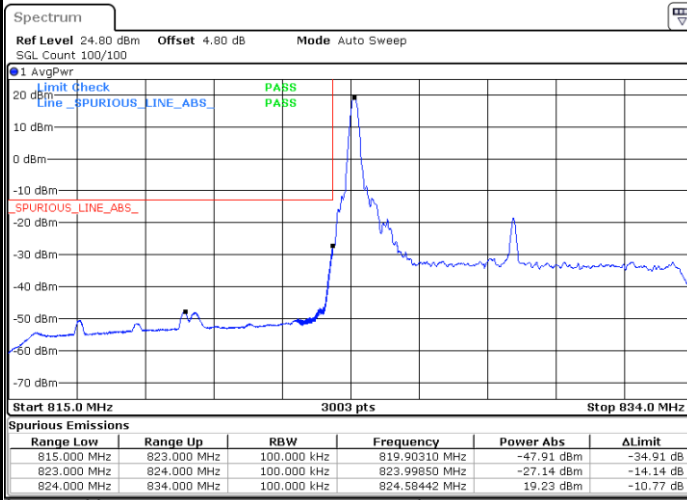


Date: 12.FEB.2023 22:20:48

Highest Band Edge / 1 RB

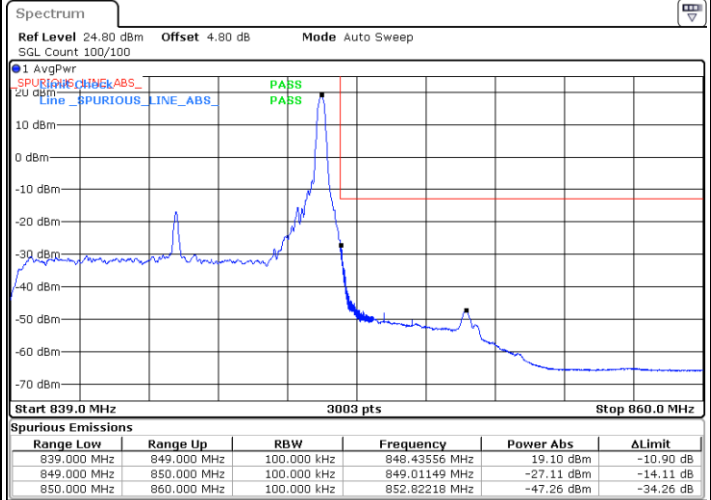


Date: 12.FEB.2023 22:32:43

Lowest Band Edge / Full RB

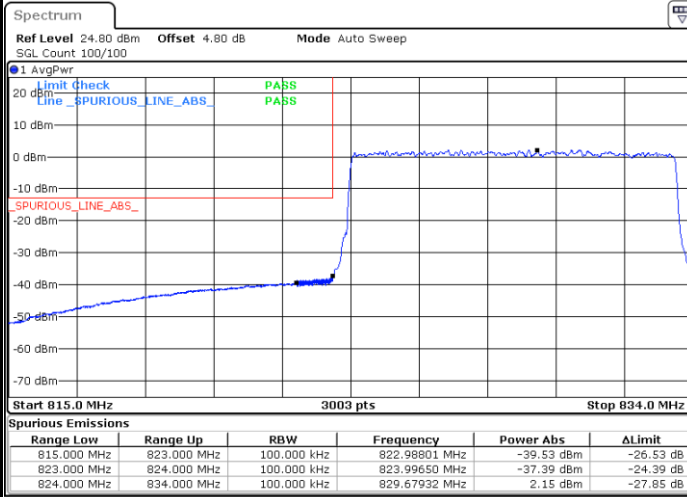

Date: 12.FEB.2023 22:22:47

Highest Band Edge / Full RB

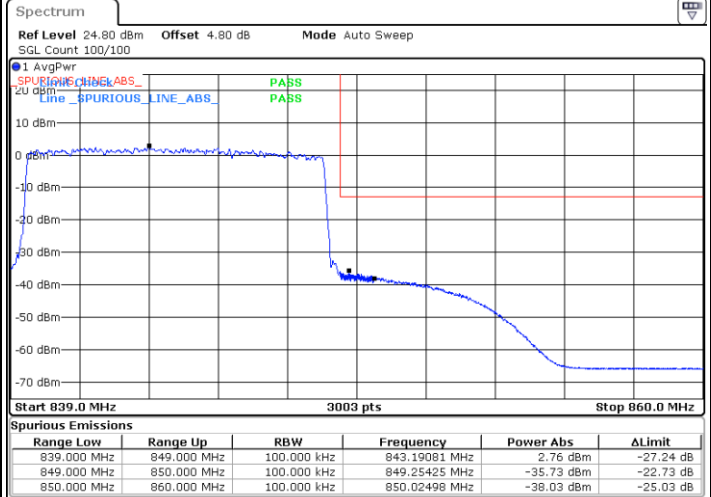


Date: 12.FEB.2023 22:34:42




LTE Band 26 / 15MHz / QPSK

Lowest Band Edge / 1 RB

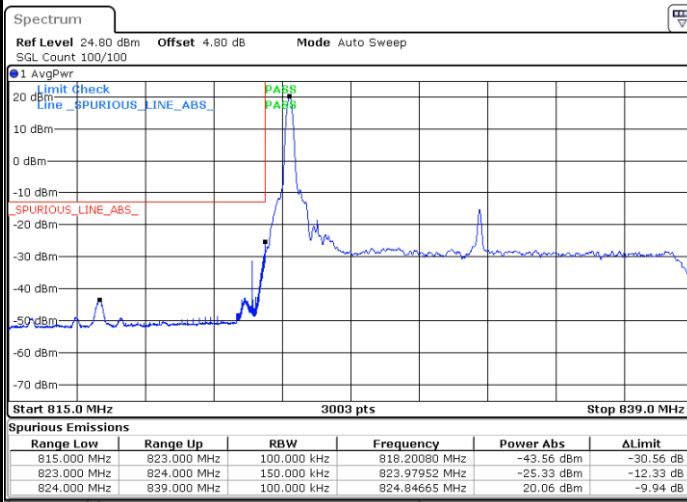


Date: 12.FEB.2023 22:46:39

Highest Band Edge / 1 RB

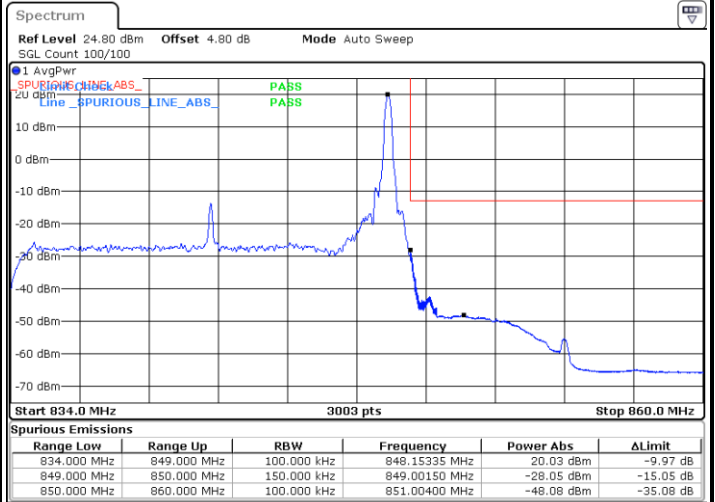


Date: 12.FEB.2023 22:58:35

Lowest Band Edge / Full RB

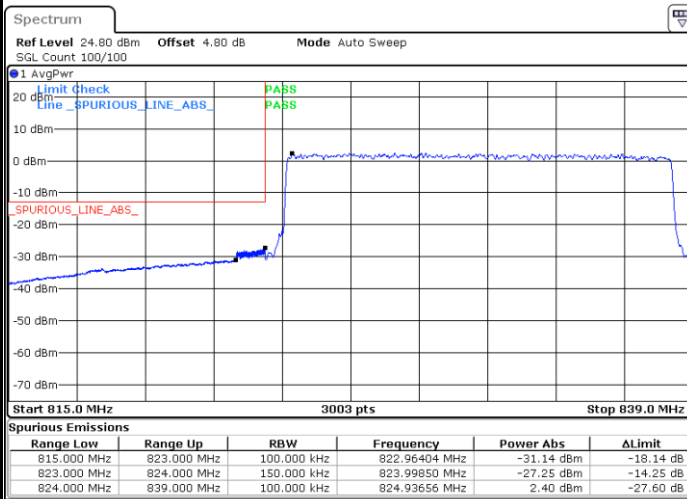

Date: 12.FEB.2023 22:56:36

Highest Band Edge / Full RB

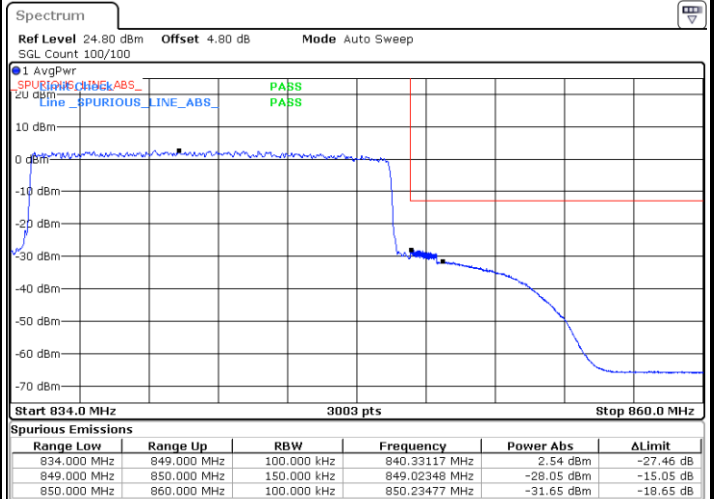


Date: 12.FEB.2023 23:08:35




LTE Band 26 / 15MHz / 16QAM

Lowest Band Edge / 1 RB

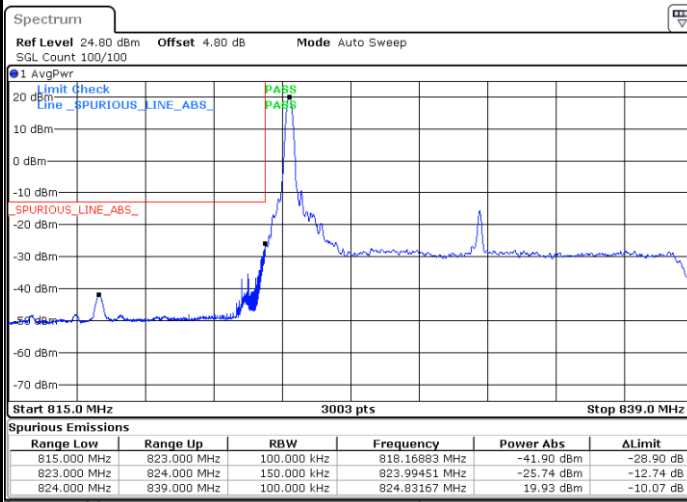


Date: 12.FEB.2023 22:48:38

Highest Band Edge / 1 RB

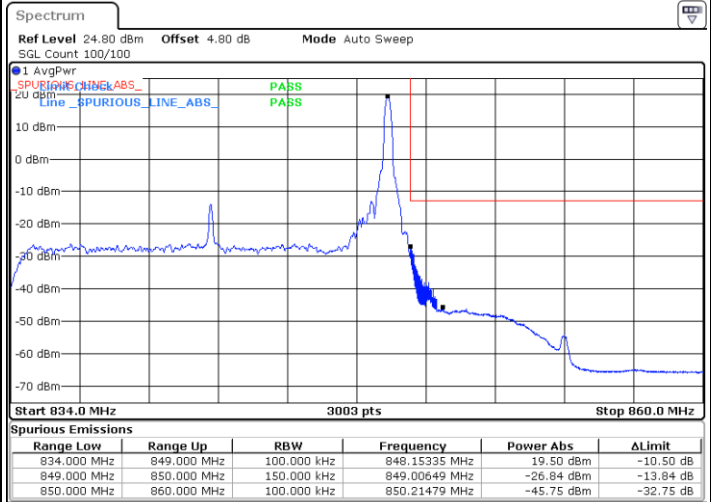


Date: 12.FEB.2023 23:00:35

Lowest Band Edge / Full RB

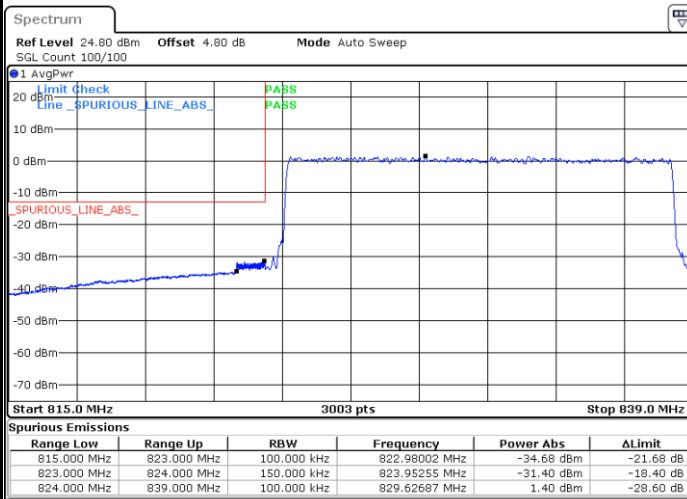

Date: 12.FEB.2023 22:54:36

Highest Band Edge / Full RB

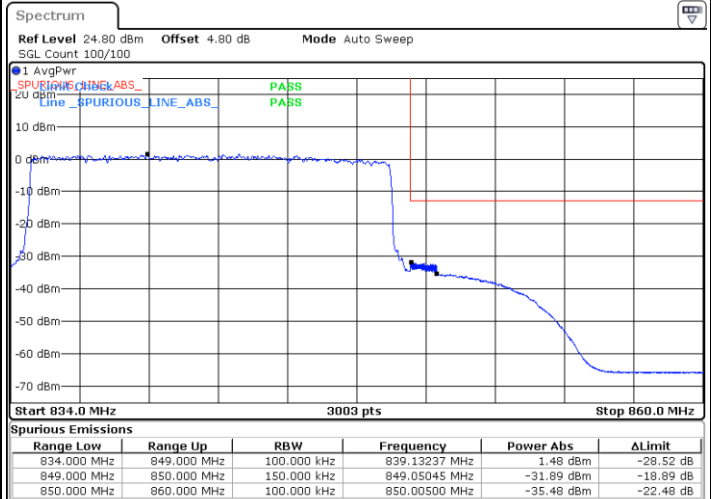


Date: 12.FEB.2023 23:06:35




LTE Band 26 / 15MHz / 64QAM

Lowest Band Edge / 1 RB

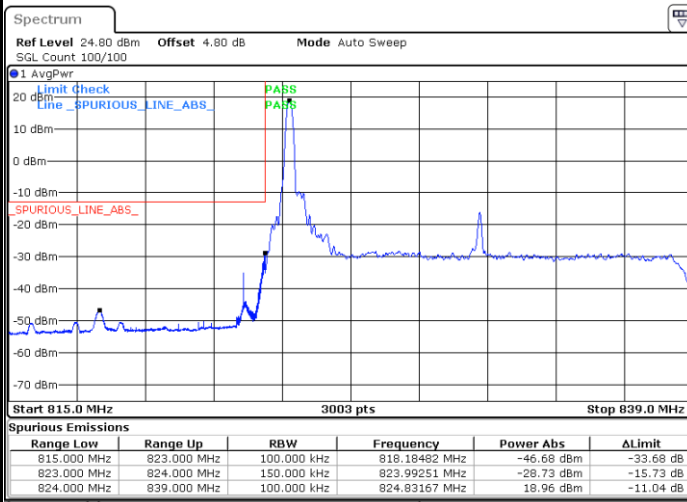


Date: 12.FEB.2023 22:50:38

Highest Band Edge / 1 RB

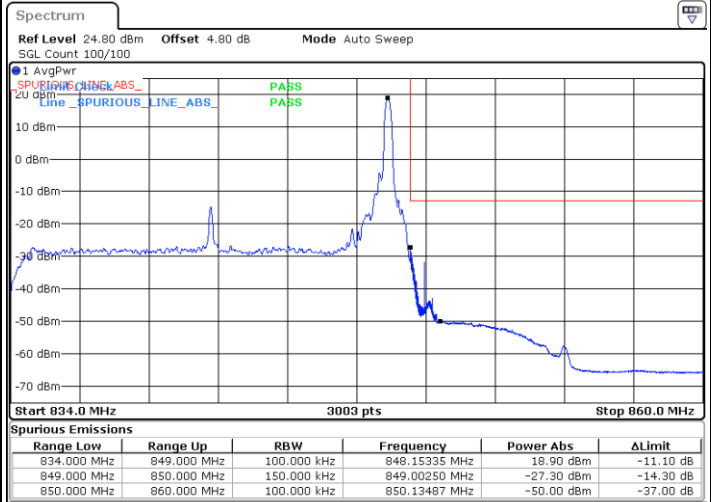


Date: 12.FEB.2023 23:02:35

Lowest Band Edge / Full RB

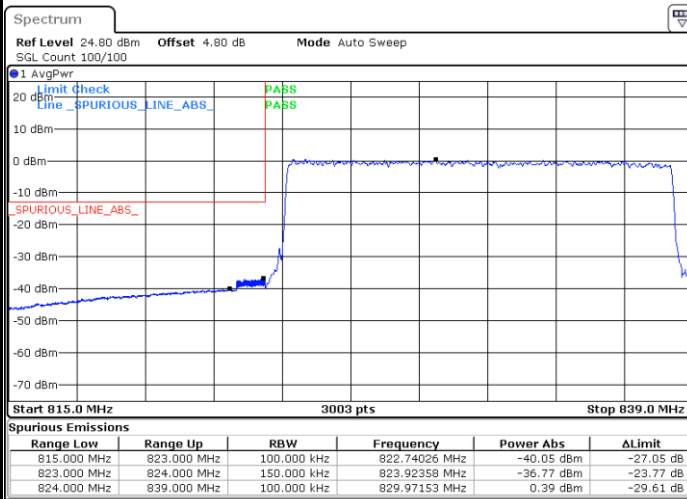

Date: 12.FEB.2023 22:52:37

Highest Band Edge / Full RB

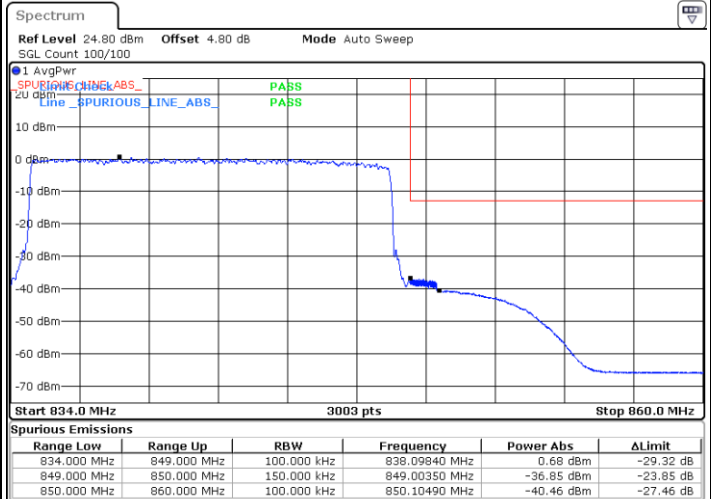

Date: 12.FEB.2023 23:04:35



Conducted Spurious Emission

