



TEST REPORT

Applicant: Xiaomi Communications Co., Ltd.
Address: #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road,
Haidian District, Beijing, China, 100085
Equipment Type: Mobile Phone
Model Name: 24115RA8EG
Brand Name: Redmi
FCC ID: 2AFZZRA8E
Test Standard: 47 CFR Part 15 Subpart C
(refer to section 3.1)
Sample Arrival Date: Aug. 09, 2024
Test Date: Aug. 16, 2024 - Sep. 06, 2024
Date of Issue: Sep. 26, 2024

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Yu Yingyuan**Checked by:** Ye Hongji**Approved by:** Sunny Zou
(Technical Director)

Revision History		
Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Sep. 26, 2024</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	6
3	SUMMARY OF TEST RESULTS	10
3.1	Test Standards	10
3.2	Test Verdict	10
4	GENERAL TEST CONFIGURATIONS	11
4.1	Test Environments	11
4.2	Test Equipment List	11
4.3	Test Software List	11
4.4	Measurement Uncertainty	12
4.5	Description of Test Setup	12
4.6	Measurement Results Explanation Example	15
5	TEST ITEMS	16
5.1	Antenna Requirements	16
5.2	Output Power	17
5.3	Occupied Bandwidth	19
5.4	Conducted Spurious Emission	20
5.5	Band Edge (Authorized-band band-edge)	22

5.6	Conducted Emission	24
5.7	Radiated Spurious Emission	25
5.8	Band Edge (Restricted-band band-edge).....	30
5.9	Power Spectral density (PSD).....	31
ANNEX A	TEST RESULT	32
A.1	Output Power	32
A.2	Occupied Bandwidth	57
A.3	Conducted Spurious Emissions	89
A.4	Band Edge (Authorized-band band-edge).....	149
A.5	Conducted Emissions.....	177
A.6	Radiated Emission	180
A.7	Band Edge (Restricted-band band-edge).....	222
A.8	Power Spectral Density (PSD)	265
ANNEX B	TEST SETUP PHOTOS	296
ANNEX C	EUT EXTERNAL PHOTOS	296
ANNEX D	EUT INTERNAL PHOTOS	296

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	<input checked="" type="checkbox"/> Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	<input type="checkbox"/> 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Xiaomi Communications Co., Ltd.
Address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

2.2 Manufacturer Information

Manufacturer	Xiaomi Communications Co., Ltd.
Address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

2.3 General Description for Equipment under Test (EUT)

EUT Name	Mobile Phone
Model Name Under Test	24115RA8EG
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A
EUT ID	S17, S23
IMEI Number	S17: IMEI 1:863541070054480 IMEI 2:863541070054498
	S23: IMEI 1:863541070065403 IMEI 2:863541070065411

2.4 Technical Information

Network and Wireless connectivity	<p>2G Network GSM/GPRS/EDGE 850/900/1800/1900</p> <p>3G Network WCDMA/HSDPA/HSUPA Band 1/2/4/5/8</p> <p>4G Network FDD LTE Band 1/2/3/4/5/7/8/12/13/17/20/26/28/32/66 TDD LTE Band 38/40/41/42/48</p> <p>LTE CA Uplink (UL): CA_3C, CA_7C, CA_38C, CA_40C, CA_1A-3A, CA_1A-7A, CA_1A-8A, CA_1A-20A, CA_3A-7A, CA_3A-20A, CA_7A-20A, CA_7A-28A, CA_2A-4A, CA_4A-5A, CA_4A-7A</p> <p>LTE CA Downlink (DL): CA_20A-32A</p> <p>5G Network</p> <p>SA: NR</p> <p>n1/n2/n3/n5/n7/n8/n12/n20/n26/n28/n38/n40/n41/n48/n66/n77/n78</p> <p>NSA(EN-DC): DC_20A_n1A, DC_28A_n1A, DC_3A_n1A, DC_7A_n1A, DC_8A_n1A, DC_40A_n1A, DC_5A_n1A, DC_42A_n1A, DC_1A_n3A, DC_20A_n3A, DC_7A_n3A, DC_8A_n3A, DC_5A_n3A, DC_28A_n3A, DC_1A_n7A, DC_3A_n7A, DC_5A_n7A, DC_20A_n7A, DC_28A_n7A, DC_1A_n8A, DC_7A_n8A, DC_1A_n20A, DC_3A_n20A, DC_7A_n20A, DC_1A_n28A, DC_3A_n28A, DC_7A_n28A, DC_20A_n28A, DC_41A_n28A, DC_1A_n38A, DC_3A_n38A, DC_8A_n38A, DC_20A_n38A, DC_28A_n38A, DC_1A_n40A, DC_3A_n40A, DC_5A_n40A, DC_8A_n40A, DC_28A_n40A, DC_1A_n41A, DC_3A_n41A, DC_8A_n41A, DC_20A_n41A, DC_28A_n41A, DC_1A_n77A, DC_3A_n77A, DC_8A_n77A, DC_28A_n77A, DC_40A_n77A, DC_1A_n78A, DC_3A_n78A, DC_5A_n78A, DC_7A_n78A, DC_8A_n78A, DC_20A_n78A, DC_28A_n78A, DC_38A_n78A, DC_40A_n78A, DC_41A_n78A, DC_26A_n78A, DC_2A_n78A, DC_4A_n78A, DC_66A_n78A, DC_2A_n66A, DC_5A_n66A, DC_7A_n66A, DC_7A_n5A, DC_2A_n77A, DC_4A_n41A, DC_66A_n41, DC_66A_n38A, DC_4A_n38A, DC_4A_n7A, DC_66A_n7A</p> <p>Bluetooth (BR+EDR+BLE)</p> <p>WIFI 802.11a, 802.11b, 802.11g, 802.11n(HT20/40), 802.11ac(VHT20/40/80/160) and 802.11ax(HE20/40/80/160)</p> <p>GPS, GLONASS, Galileo, BDS, QZSS, NFC</p>
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	<p>802.11b/g/n/ax(20 MHz): 2.412 GHz - 2.462 GHz</p> <p>$f_c = 2412 \text{ MHz} + (N-1) * 5 \text{ MHz}$, where</p> <ul style="list-style-type: none"> - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11. <p>802.11n/ax(40 MHz): 2.422 GHz - 2.452 GHz</p> <p>$f_c = 2412 \text{ MHz} + (N-1) * 5 \text{ MHz}$, where</p> <ul style="list-style-type: none"> - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 3 to 9.
Modulation Type	DSSS, OFDM, OFDMA

Product Type		<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Antenna System (eg., MIMO, Smart Antenna)		Cyclic Delay Diversity (CDD) for 802.11b/g/n/ax Beamforming for 802.11n/ax Multi Input Multi Output (MIMO) for 802.11n/ax
Categorization as Correlated or Completely Uncorrelated		Categorization as Correlated for 802.11b/g Categorization as Uncorrelated for 802.11n/ax
Antenna Type	Main Antenna	PIFA Antenna
	Aux. Antenna	
Antenna Gain	Main Antenna	-2.5 dBi
	Aux. Antenna	-1.1dBi
Total directional gain	For power spectral density (PSD) measurements	Correlated: 1.24 dBi Formulas: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / NANT]$ dBi Uncorrelated: -1.74 dBi Formulas: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/NANT]$ dBi
	For power measurements	Correlated: 1.24 dBi Formulas: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / NANT]$ dBi Uncorrelated: -1.74 dBi Formulas: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/NANT]$ dBi
	For Conducted Out-of-Band and Spurious Measurements	Correlated: 1.24 dBi Formulas: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / NANT]$ dBi Uncorrelated: -1.74 dBi Formulas: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/NANT]$ dBi
About the Product		Only the WIFI 802.11b, 802.11g, 802.11n (HT20/40), 802.11ax (HE20/40) was tested in this report.

Mode	Antenna		
	Main Antenna	Aux. Antenna	MIMO
802.11b	√	√	√
802.11g	√	√	√

802.11n20	√	√	√
802.11n40	√	√	√
802.11ax20	√	√	√
802.11ax40	√	√	√

Note: All the configurations were tested, but only the worst data was shown in this report.

802.11ax RU configuration table					
Mode	Full RU (SU)	RU_26	RU_52	RU_106	RU_242
802.11ax20	√	√	√	√	--
802.11ax40	√	√	√	√	√

Modulation technology	Modulation Type	Transfer Rate (Mbps)(Single RF path)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/11
OFDM (802.11g)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48/54
OFDM (802.11n-20 MHz)	BPSK	6.5/7.2
	QPSK	13/19.5/14.4/21.7
	16QAM	26/39/28.9/43.3
	64QAM	52/58.5/65/57.8/65/72.2
OFDM (802.11n-40 MHz)	BPSK	13.5/15
	QPSK	27/40.5/30/45
	16QAM	54/81/60/90
	64QAM	108/121.5/135/120/150
OFDMA (802.11ax-20 MHz)	BPSK	4
	QPSK	16/24/17/26
	16QAM	33/49/34/52
	64QAM	65/73/81/69/77/86
	256QAM	98/108/103/115
OFDMA (802.11ax-40 MHz)	1024QAM	122/135/129/143
	BPSK	8/9
	QPSK	33/49/34/52
	16QAM	65/98/69/103
	64QAM	130/146/163/138/155/172
	256QAM	195/217/207/229
1024QAM	244/271/258/287	

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	
Output Power	11b/11g/11n20/11n40/ 11ax20/11ax40	1/6/6.5/13.5/ 4/8 Mbps	1/6/11	3/6/9
Occupied Bandwidth	11b/11g/11n20/11n40/ 11ax20/11ax40	1/6/6.5/13.5/ 4/8 Mbps	1/6/11	3/6/9
Conducted Spurious Emission	11b/11g/11n20/11n40/ 11ax20/11ax40	1/6/6.5/13.5/ 4/8 Mbps	1/6/11	3/6/9
Conducted Emission	11b/11g/11n20/11n40/ 11ax20/11ax40	1/6/6.5/13.5/ 4/8 Mbps	1/6/11	3/6/9
Radiated Spurious Emission	11b/11g/11n20/11n40/ 11ax20/11ax40	1/6/6.5/13.5/ 4/8 Mbps	1/6/11	3/6/9
Band Edge	11b/11g/11n20/11n40/ 11ax20/11ax40	1/6/6.5/13.5/ 4/8 Mbps	1/6/11	3/6/9
Power spectral density (PSD)	11b/11g/11n20/11n40/ 11ax20/11ax40	1/6/6.5/13.5/ 4/8 Mbps	1/6/11	3/6/9

Note: The above EUT information in section 2.4 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	KDB Publication 662911 D01v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
3	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
4	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

3.2 Test Verdict

No.	Description	FCC PART No.	Test Result	Verdict
1	Antenna Requirement	15.203	N/A	Pass ^{Note 1}
2	Output Power	15.247 (b)	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247 (a)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247 (d)	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247 (d)	ANNEX A.4	Pass
6	Conducted Emission	15.207	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209; 15.247 (d)	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209; 15.247 (d)	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247 (e)	ANNEX A.8	Pass

Note 1: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	41% to 66%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+20.9°C to +25.1°C
Working Voltage of the EUT	NV (Normal Voltage)	3.91 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY46471071	2024.07.04	2025.07.03
Power Sensor	KEYSIGHT	U2063XA	MY58000251	2024.07.04	2025.07.03
Spectrum Analyzer	KEYSIGHT	N9020A	MY50531259	2024.08.01	2025.07.31
Signaling Unit	ROHDE&SCHWARZ	CMW500	171150	2024.05.22	2025.05.21
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	02460	2024.05.16	2027.05.15
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2024.06.15	2027.06.14
Anechoic Chamber	RAINFORD	9m*6m*6m	140	2024.07.28	2027.07.27
Amplifier	COM-MV	LSCX_LNA1-12G-01	7210214	2024.08.01	2025.07.31
Amplifier	COM-MV	XKu_LNA7-18G-01	7210209	2024.08.01	2025.07.31
Amplifier	COM-MV	KA LNA18 40G-01	18050001	2023.12.06	2024.12.05
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2024.08.01	2025.07.31
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-01162	2023.08.04	2026.08.03
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2025.01.22
Amplifier	COM-MV	ZT30-1000M	B2018054558	2023.12.05	2024.12.04
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	130	2024.07.13	2027.07.12
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2024.08.01	2025.07.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2024.05.09	2025.05.08
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	112	2022.02.19	2025.02.18

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

$$\text{Conducted value (dBm)} = \text{Measurement value (dBm)} + \text{cable loss (dB)}$$

For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

$$\text{Conducted value (dBm)} = 10 \text{ dBm} + 0.5 \text{ dB} = 10.5 \text{ dBm}$$

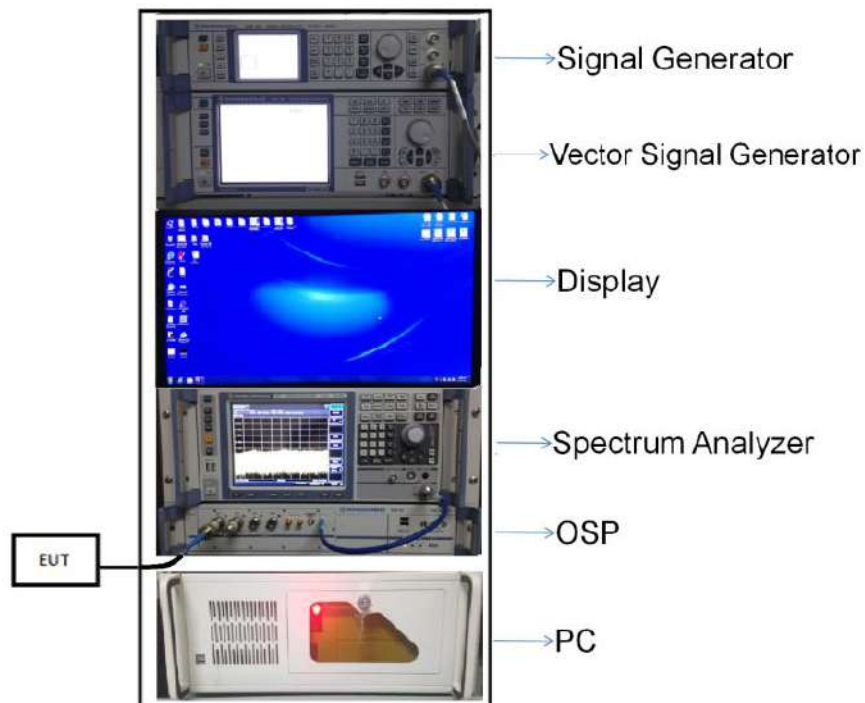


(Diagram 1)

4.5.2 For AC Power Supply Port Test




(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

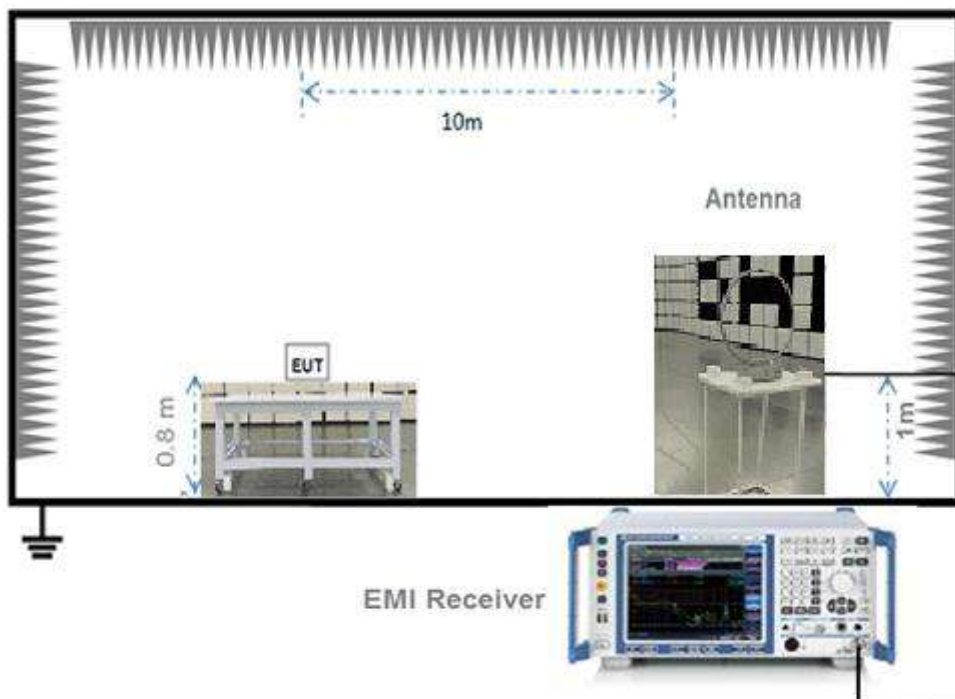


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

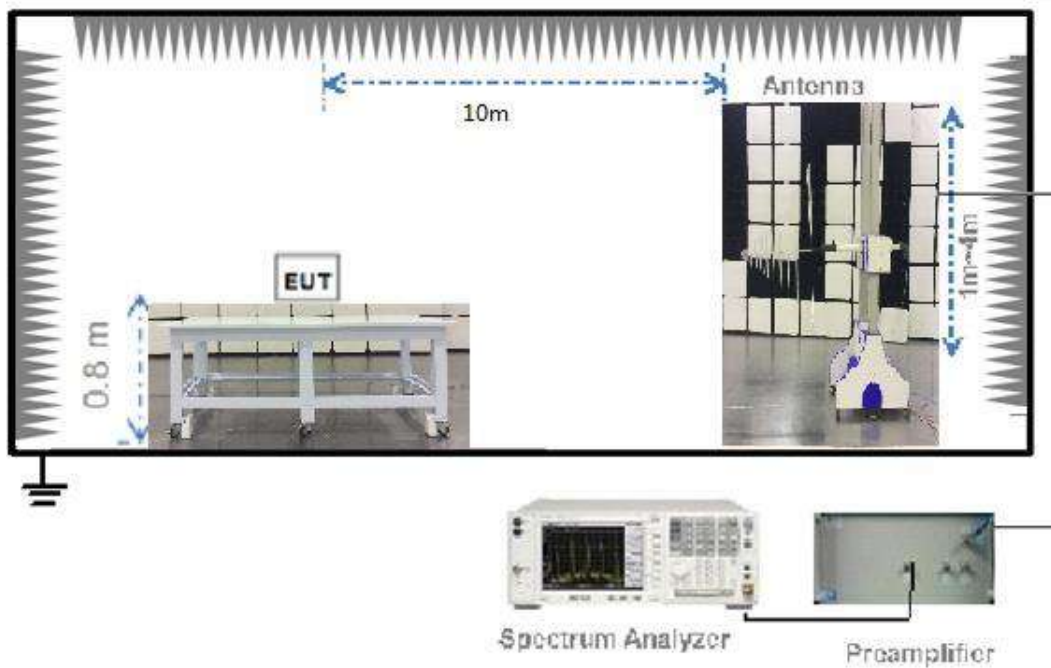

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

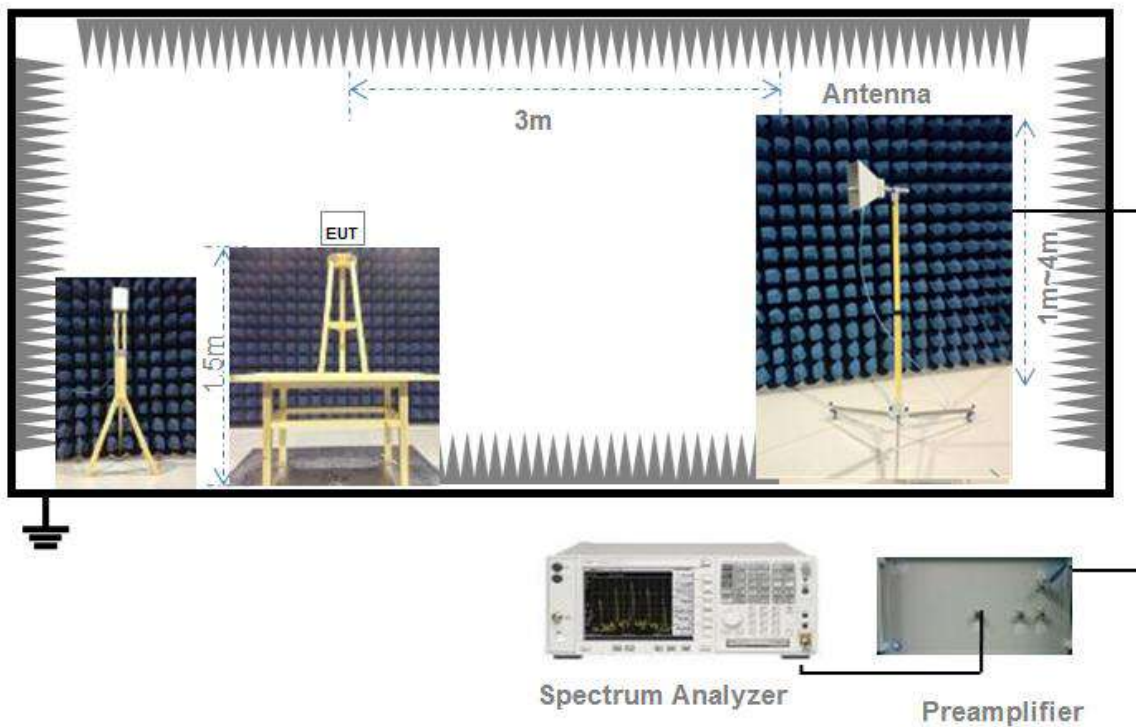

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.6.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP= Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

5.2.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Maximum peak conducted output power

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The EUT shall be transmitted at its maximum power control level.

Maximum conducted (average) output power (Reporting Only)

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal.

c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

d) Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle.

Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between

bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.

Set $VBW \geq RBW$. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Occupied Bandwidth

5.3.1 Limit

FCC §15.247(a)

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be

longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

5.9.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 Output Power

Note: All the configurations were pre tested, only the worst configuration has been reported in this report.

Duty Cycle

Test Mode	On Time (ms)	On+Off time (ms)	Duty Cycle
802.11b	74.300	75.200	98.80%
802.11g	67.400	68.200	98.83%
802.11n-20 MHz	70.700	71.500	98.88%
802.11n-40 MHz	70.600	71.500	98.74%
802.11ax-20 MHz	65.400	66.300	98.64%
802.11ax-40 MHz	65.300	66.200	98.64%

Peak Power Test Data

Main Antenna

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	20.26	106.17	30	1000	Pass
CH6	20.30	107.15			Pass
CH11	20.38	109.14			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	19.96	99.08	30	1000	Pass
CH2	20.99	125.60			Pass
CH3	21.73	148.94			Pass
CH4	23.23	210.38			Pass
CH6	22.64	183.65			Pass
CH9	22.62	182.81			Pass
CH10	22.56	180.30			Pass
CH11	20.03	100.69			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	19.12	81.66	30	1000	Pass
CH2	21.29	134.59			Pass
CH3	21.85	153.11			Pass
CH4	22.53	179.06			Pass
CH6	22.33	171.00			Pass
CH9	21.98	157.76			Pass
CH10	21.73	148.94			Pass
CH11	17.91	61.80			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	19.23	83.75	30	1000	Pass
CH4	19.70	93.33			Pass
CH5	20.22	105.20			Pass
CH6	19.53	89.74			Pass
CH7	19.32	85.51			Pass
CH8	18.79	75.68			Pass
CH9	15.67	36.90			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	20.85	121.62	30	1000	Pass
CH2	21.82	152.05			Pass
CH3	22.14	163.68			Pass
CH4	24.01	251.77			Pass
CH6	23.91	246.04			Pass
CH9	23.63	230.67			Pass
CH10	21.68	147.23			Pass
CH11	19.85	96.61			Pass

802.11ax-40 MHz(SU) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	20.00	100.00	30	1000	Pass
CH4	21.03	126.77			Pass
CH5	20.90	123.03			Pass
CH6	20.27	106.41			Pass
CH7	20.06	101.39			Pass
CH8	20.01	100.23			Pass
CH9	16.39	43.55			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.61	115.08	30	1000	Pass
Middle	24.53	283.79			Pass
High	19.97	99.31			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.82	120.78	30	1000	Pass
Middle	24.42	276.69			Pass
High	20.19	104.47			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.77	119.40	30	1000	Pass
Middle	24.67	293.09			Pass
High	19.72	93.76			Pass

802.11ax-40 MHz(RU26) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	18.29	67.45	30	1000	Pass
Middle	21.22	132.43			Pass
High	15.28	33.73			Pass

802.11ax-40 MHz(RU52) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	18.73	74.64	30	1000	Pass
Middle	21.63	145.55			Pass
High	15.77	37.76			Pass

802.11ax-40 MHz(RU106) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	19.58	90.78	30	1000	Pass
Middle	21.23	132.74			Pass
High	16.64	46.13			Pass

802.11ax-40 MHz(RU242) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.22	105.20	30	1000	Pass
Middle	20.63	115.61			Pass
High	16.24	42.07			Pass

Aux. Antenna

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	19.22	83.56	30	1000	Pass
CH6	19.05	80.35			Pass
CH11	19.44	87.90			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	19.10	81.28	30	1000	Pass
CH2	20.23	105.44			Pass
CH3	21.39	137.72			Pass
CH4	22.00	158.49			Pass
CH6	21.92	155.60			Pass
CH9	22.03	159.59			Pass
CH10	21.56	143.22			Pass
CH11	19.00	79.43			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	18.95	78.52	30	1000	Pass
CH2	21.01	126.18			Pass
CH3	21.55	142.89			Pass
CH4	21.71	148.25			Pass
CH6	21.69	147.57			Pass
CH9	21.78	150.66			Pass
CH10	21.29	134.59			Pass
CH11	17.89	61.52			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	18.71	74.30	30	1000	Pass
CH4	18.60	72.44			Pass
CH5	19.21	83.37			Pass
CH6	18.94	78.34			Pass
CH7	18.84	76.56			Pass
CH8	18.44	69.82			Pass
CH9	16.14	41.11			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	20.46	111.17	30	1000	Pass
CH2	21.63	145.55			Pass
CH3	22.42	174.58			Pass
CH4	23.39	218.27			Pass
CH6	23.27	212.32			Pass
CH9	23.38	217.77			Pass
CH10	21.34	136.14			Pass
CH11	19.49	88.92			Pass

802.11ax-40 MHz(SU) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	19.71	93.54	30	1000	Pass
CH4	19.92	98.17			Pass
CH5	20.14	103.28			Pass
CH6	19.74	94.19			Pass
CH7	19.73	93.97			Pass
CH8	19.75	94.41			Pass
CH9	16.94	49.43			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.35	171.79	30	1000	Pass
Middle	23.30	213.80			Pass
High	18.31	67.76			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.42	174.58	30	1000	Pass
Middle	23.35	216.27			Pass
High	18.59	72.28			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.00	158.49	30	1000	Pass
Middle	23.43	220.29			Pass
High	18.42	69.50			Pass

802.11ax-40 MHz(RU26) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	18.43	69.66	30	1000	Pass
Middle	20.56	113.76			Pass
High	16.87	48.64			Pass

802.11ax-40 MHz(RU52) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	18.84	76.56	30	1000	Pass
Middle	21.03	126.77			Pass
High	17.08	51.05			Pass

802.11ax-40 MHz(RU106) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.11	102.57	30	1000	Pass
Middle	20.97	125.03			Pass
High	17.99	62.95			Pass

802.11ax-40 MHz(RU242) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.34	108.14	30	1000	Pass
Middle	20.40	109.65			Pass
High	17.39	54.83			Pass

MIMO (CDD Model)**802.11b Mode:**

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	22.78	189.67	30	1000	Pass
CH6	22.73	187.50			Pass
CH11	22.95	197.24			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	22.56	180.30	30	1000	Pass
CH2	23.64	231.21			Pass
CH3	24.57	286.42			Pass
CH4	25.67	368.98			Pass
CH6	25.31	339.63			Pass
CH9	25.35	342.77			Pass
CH10	25.10	323.59			Pass
CH11	22.56	180.30			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	22.05	160.32	30	1000	Pass
CH2	24.16	260.62			Pass
CH3	24.71	295.80			Pass
CH4	25.15	327.34			Pass
CH6	25.03	318.42			Pass
CH9	24.89	308.32			Pass
CH10	24.53	283.79			Pass
CH11	20.91	123.31			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	21.99	158.12	30	1000	Pass
CH4	22.20	165.96			Pass
CH5	22.75	188.36			Pass
CH6	22.26	168.27			Pass
CH7	22.10	162.18			Pass
CH8	21.63	145.55			Pass
CH9	18.92	77.98			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	23.67	232.81	30	1000	Pass
CH2	24.74	297.85			Pass
CH3	25.29	338.06			Pass
CH4	26.72	469.89			Pass
CH6	26.61	458.14			Pass
CH9	26.52	448.75			Pass
CH10	24.52	283.14			Pass
CH11	22.68	185.35			Pass

802.11ax-40 MHz(SU) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	22.87	193.64	30	1000	Pass
CH4	23.52	224.91			Pass
CH5	23.55	226.46			Pass
CH6	23.02	200.45			Pass
CH7	22.91	195.43			Pass
CH8	22.89	194.54			Pass
CH9	19.68	92.90			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	24.58	287.08	30	1000	Pass
Middle	26.97	497.74			Pass
High	22.23	167.11			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	24.70	295.12	30	1000	Pass
Middle	26.93	493.17			Pass
High	22.47	176.60			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	24.44	277.97	30	1000	Pass
Middle	27.10	512.86			Pass
High	22.13	163.31			Pass

802.11ax-40 MHz(RU26) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.37	137.09	30	1000	Pass
Middle	23.91	246.04			Pass
High	19.16	82.41			Pass

802.11ax-40 MHz(RU52) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.80	151.36	30	1000	Pass
Middle	24.35	272.27			Pass
High	19.48	88.72			Pass

802.11ax-40 MHz(RU106) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.86	193.20	30	1000	Pass
Middle	24.11	257.63			Pass
High	20.38	109.14			Pass

802.11ax-40 MHz(RU242) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	23.29	213.30	30	1000	Pass
Middle	23.53	225.42			Pass
High	19.86	96.83			Pass

MIMO (Beamforming Model)

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	18.97	78.89	30	1000	Pass
CH2	20.95	124.45			Pass
CH3	21.68	147.23			Pass
CH4	22.14	163.68			Pass
CH6	21.96	157.04			Pass
CH9	21.67	146.89			Pass
CH10	21.40	138.04			Pass
CH11	17.89	61.52			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	18.89	77.45	30	1000	Pass
CH4	19.18	82.79			Pass
CH5	19.82	95.94			Pass
CH6	19.11	81.47			Pass
CH7	18.90	77.62			Pass
CH8	18.29	67.45			Pass
CH9	15.90	38.90			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	20.59	114.55	30	1000	Pass
CH2	21.57	143.55			Pass
CH3	22.19	165.58			Pass
CH4	23.75	237.14			Pass
CH6	23.62	230.14			Pass
CH9	23.42	219.79			Pass
CH10	21.50	141.25			Pass
CH11	19.46	88.31			Pass

802.11ax-40 MHz(SU) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	19.83	96.16	30	1000	Pass
CH4	20.42	110.15			Pass
CH5	20.53	112.98			Pass
CH6	20.05	101.16			Pass
CH7	19.66	92.47			Pass
CH8	19.66	92.47			Pass
CH9	16.49	44.57			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.38	137.40	30	1000	Pass
Middle	23.90	245.47			Pass
High	19.25	84.14			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.56	143.22	30	1000	Pass
Middle	23.84	242.10			Pass
High	19.28	84.72			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.18	131.22	30	1000	Pass
Middle	23.98	250.03			Pass
High	18.96	78.70			Pass

802.11ax-40 MHz(RU26) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	18.16	65.46	30	1000	Pass
Middle	20.95	124.45			Pass
High	16.07	40.46			Pass

802.11ax-40 MHz(RU52) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	18.66	73.45	30	1000	Pass
Middle	21.07	127.94			Pass
High	16.19	41.59			Pass

802.11ax-40 MHz(RU106) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.03	100.69	30	1000	Pass
Middle	20.96	124.74			Pass
High	17.14	51.76			Pass

802.11ax-40 MHz(RU242) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.28	106.66	30	1000	Pass
Middle	20.42	110.15			Pass
High	16.79	47.75			Pass

Average Power Test Data

Main Antenna

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	17.33	54.08	30	1000	Pass
CH6	17.36	54.45			Pass
CH11	17.41	55.08			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	13.94	24.77	30	1000	Pass
CH2	15.00	31.62			Pass
CH3	15.78	37.84			Pass
CH4	17.23	52.84			Pass
CH6	16.63	46.03			Pass
CH9	16.62	45.92			Pass
CH10	16.48	44.46			Pass
CH11	14.00	25.12			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	12.99	19.91	30	1000	Pass
CH2	15.20	33.11			Pass
CH3	15.73	37.41			Pass
CH4	16.43	43.95			Pass
CH6	16.20	41.69			Pass
CH9	15.91	38.99			Pass
CH10	15.58	36.14			Pass
CH11	11.82	15.21			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	13.04	20.14	30	1000	Pass
CH4	13.51	22.44			Pass
CH5	13.92	24.66			Pass
CH6	13.28	21.28			Pass
CH7	13.13	20.56			Pass
CH8	12.58	18.11			Pass
CH9	9.38	8.67			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	13.32	21.48	30	1000	Pass
CH2	14.40	27.54			Pass
CH3	14.70	29.51			Pass
CH4	16.49	44.57			Pass
CH6	16.40	43.65			Pass
CH9	16.03	40.09			Pass
CH10	14.19	26.24			Pass
CH11	12.42	17.46			Pass

802.11ax-40 MHz(SU) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	12.64	18.37	30	1000	Pass
CH4	13.57	22.75			Pass
CH5	13.53	22.54			Pass
CH6	12.81	19.10			Pass
CH7	12.66	18.45			Pass
CH8	12.59	18.16			Pass
CH9	8.96	7.87			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.15	16.41	30	1000	Pass
Middle	17.90	61.66			Pass
High	12.45	17.58			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.22	16.67	30	1000	Pass
Middle	17.20	52.48			Pass
High	12.27	16.87			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.77	18.92	30	1000	Pass
Middle	17.31	53.83			Pass
High	12.40	17.38			Pass

802.11ax-40 MHz(RU26) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.27	10.64	30	1000	Pass
Middle	13.61	22.96			Pass
High	7.41	5.51			Pass

802.11ax-40 MHz(RU52) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.45	11.09	30	1000	Pass
Middle	13.67	23.28			Pass
High	7.55	5.69			Pass

802.11ax-40 MHz(RU106) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	11.68	14.72	30	1000	Pass
Middle	13.52	22.49			Pass
High	8.66	7.35			Pass

802.11ax-40 MHz(RU242) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.72	18.71	30	1000	Pass
Middle	13.22	20.99			Pass
High	8.70	7.41			Pass

Aux. Antenna

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	16.26	42.27	30	1000	Pass
CH6	16.11	40.83			Pass
CH11	16.42	43.85			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	13.10	20.42	30	1000	Pass
CH2	14.24	26.55			Pass
CH3	15.45	35.08			Pass
CH4	16.02	39.99			Pass
CH6	15.94	39.26			Pass
CH9	16.01	39.90			Pass
CH10	15.54	35.81			Pass
CH11	13.08	20.32			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	12.80	19.05	30	1000	Pass
CH2	14.83	30.41			Pass
CH3	15.39	34.59			Pass
CH4	15.56	35.97			Pass
CH6	15.58	36.14			Pass
CH9	15.62	36.48			Pass
CH10	15.18	32.96			Pass
CH11	11.76	15.00			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	12.53	17.91	30	1000	Pass
CH4	12.38	17.30			Pass
CH5	12.97	19.82			Pass
CH6	12.76	18.88			Pass
CH7	12.64	18.37			Pass
CH8	12.18	16.52			Pass
CH9	9.83	9.62			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	12.90	19.50	30	1000	Pass
CH2	14.15	26.00			Pass
CH3	14.88	30.76			Pass
CH4	15.90	38.90			Pass
CH6	15.77	37.76			Pass
CH9	15.94	39.26			Pass
CH10	13.86	24.32			Pass
CH11	12.00	15.85			Pass

802.11ax-40 MHz(SU) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	12.26	16.83	30	1000	Pass
CH4	12.56	18.03			Pass
CH5	12.72	18.71			Pass
CH6	12.38	17.30			Pass
CH7	12.30	16.98			Pass
CH8	12.35	17.18			Pass
CH9	9.53	8.97			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	15.32	34.04	30	1000	Pass
Middle	15.05	31.99			Pass
High	10.08	10.19			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	15.08	32.21	30	1000	Pass
Middle	15.05	31.99			Pass
High	10.09	10.21			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.70	29.51	30	1000	Pass
Middle	15.44	34.99			Pass
High	10.26	10.62			Pass

802.11ax-40 MHz(RU26) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.68	11.69	30	1000	Pass
Middle	13.66	23.23			Pass
High	8.66	7.35			Pass

802.11ax-40 MHz(RU52) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.95	12.45	30	1000	Pass
Middle	13.70	23.44			Pass
High	8.89	7.74			Pass

802.11ax-40 MHz(RU106) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.22	16.67	30	1000	Pass
Middle	13.49	22.34			Pass
High	10.08	10.19			Pass

802.11ax-40 MHz(RU242) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.05	20.18	30	1000	Pass
Middle	13.04	20.14			Pass
High	10.03	10.07			Pass

MIMO (CDD Model)**802.11b Mode:**

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	19.84	96.38	30	1000	Pass
CH6	19.79	95.28			Pass
CH11	19.95	98.86			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	16.55	45.19	30	1000	Pass
CH2	17.65	58.21			Pass
CH3	18.63	72.95			Pass
CH4	19.68	92.90			Pass
CH6	19.31	85.31			Pass
CH9	19.34	85.90			Pass
CH10	19.05	80.35			Pass
CH11	16.57	45.39			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	15.91	38.99	30	1000	Pass
CH2	18.03	63.53			Pass
CH3	18.57	71.94			Pass
CH4	19.03	79.98			Pass
CH6	18.91	77.80			Pass
CH9	18.78	75.51			Pass
CH10	18.39	69.02			Pass
CH11	14.80	30.20			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	15.80	38.02	30	1000	Pass
CH4	15.99	39.72			Pass
CH5	16.48	44.46			Pass
CH6	16.04	40.18			Pass
CH7	15.90	38.90			Pass
CH8	15.39	34.59			Pass
CH9	12.62	18.28			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	16.13	41.02	30	1000	Pass
CH2	17.29	53.58			Pass
CH3	17.80	60.26			Pass
CH4	19.22	83.56			Pass
CH6	19.11	81.47			Pass
CH9	19.00	79.43			Pass
CH10	17.04	50.58			Pass
CH11	15.23	33.34			Pass

802.11ax-40 MHz(SU) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	15.46	35.16	30	1000	Pass
CH4	16.10	40.74			Pass
CH5	16.15	41.21			Pass
CH6	15.61	36.39			Pass
CH7	15.49	35.40			Pass
CH8	15.48	35.32			Pass
CH9	12.26	16.83			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.03	50.47	30	1000	Pass
Middle	19.72	93.76			Pass
High	14.44	27.80			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.89	48.87	30	1000	Pass
Middle	19.27	84.53			Pass
High	14.33	27.10			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.85	48.42	30	1000	Pass
Middle	19.49	88.92			Pass
High	14.47	27.99			Pass

802.11ax-40 MHz(RU26) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.49	22.34	30	1000	Pass
Middle	16.65	46.24			Pass
High	11.09	12.85			Pass

802.11ax-40 MHz(RU52) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.72	23.55	30	1000	Pass
Middle	16.70	46.77			Pass
High	11.28	13.43			Pass

802.11ax-40 MHz(RU106) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.97	31.41	30	1000	Pass
Middle	16.52	44.87			Pass
High	12.44	17.54			Pass

802.11ax-40 MHz(RU242) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	15.90	38.90	30	1000	Pass
Middle	16.14	41.11			Pass
High	12.43	17.50			Pass

MIMO (Beamforming Model)

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	12.89	19.45	30	1000	Pass
CH2	14.87	30.69			Pass
CH3	15.54	35.81			Pass
CH4	16.17	41.40			Pass
CH6	16.02	39.99			Pass
CH9	15.66	36.81			Pass
CH10	15.44	34.99			Pass
CH11	11.79	15.10			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	12.88	19.41	30	1000	Pass
CH4	13.05	20.18			Pass
CH5	13.62	23.01			Pass
CH6	13.09	20.37			Pass
CH7	12.72	18.71			Pass
CH8	12.24	16.75			Pass
CH9	9.68	9.29			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	13.08	20.32	30	1000	Pass
CH2	14.26	26.67			Pass
CH3	14.79	30.13			Pass
CH4	16.38	43.45			Pass
CH6	16.14	41.11			Pass
CH9	16.04	40.18			Pass
CH10	14.03	25.29			Pass
CH11	12.08	16.14			Pass

802.11ax-40 MHz(SU) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	12.54	17.95	30	1000	Pass
CH4	13.09	20.37			Pass
CH5	13.30	21.38			Pass
CH6	12.66	18.45			Pass
CH7	12.40	17.38			Pass
CH8	12.37	17.26			Pass
CH9	9.25	8.41			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.02	25.23	30	1000	Pass
Middle	16.68	46.56			Pass
High	11.54	14.26			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.84	24.21	30	1000	Pass
Middle	16.23	41.98			Pass
High	11.18	13.12			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.71	23.50	30	1000	Pass
Middle	16.41	43.75			Pass
High	11.48	14.06			Pass

802.11ax-40 MHz(RU26) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.44	11.07	30	1000	Pass
Middle	13.71	23.50			Pass
High	8.10	6.46			Pass

802.11ax-40 MHz(RU52) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.74	11.86	30	1000	Pass
Middle	13.54	22.59			Pass
High	8.10	6.46			Pass

802.11ax-40 MHz(RU106) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.17	16.48	30	1000	Pass
Middle	13.48	22.28			Pass
High	9.30	8.51			Pass

802.11ax-40 MHz(RU242) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.03	20.09	30	1000	Pass
Middle	13.13	20.56			Pass
High	9.42	8.75			Pass

A.2 Occupied Bandwidth

Note ¹: All the configurations were pre tested, only the worst configuration has been reported in this report.

Test Data

Main Antenna

802.11b Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH1	8.200000	12.883000	≥500
CH6	8.700000	14.540000	≥500
CH11	8.200000	12.725000	≥500

802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH1	16.200000	16.678000	≥500
CH2	16.500000	16.649000	≥500
CH3	16.100000	16.643000	≥500
CH4	16.100000	16.707000	≥500
CH6	16.500000	16.721000	≥500
CH9	16.200000	16.825000	≥500
CH10	16.100000	16.718000	≥500
CH11	16.300000	16.622000	≥500

802.11n-20MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH1	16.700000	17.746000	≥500
CH2	16.700000	17.756000	≥500
CH3	16.600000	17.780000	≥500
CH4	16.500000	17.810000	≥500
CH6	16.500000	17.844000	≥500
CH9	17.400000	17.839000	≥500
CH10	16.600000	17.796000	≥500
CH11	16.600000	17.767000	≥500

802.11n-40MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH3	35.400000	35.974000	≥500
CH4	36.000000	36.035000	≥500
CH5	35.800000	36.063000	≥500
CH6	36.000000	36.082000	≥500
CH7	35.800000	36.132000	≥500
CH8	36.000000	36.103000	≥500
CH9	36.000000	36.084000	≥500

802.11ax-20 MHz(SU) Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH1	17.800000	19.019000	≥500
CH2	18.400000	18.974000	≥500
CH3	18.000000	18.987000	≥500
CH4	18.100000	19.024000	≥500
CH6	18.700000	19.037000	≥500
CH9	18.500000	19.047000	≥500
CH10	18.100000	19.048000	≥500
CH11	18.000000	19.001000	≥500

802.11ax-40 MHz(SU) Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH3	36.500000	37.703000	≥500
CH4	37.200000	37.695000	≥500
CH5	37.600000	37.689000	≥500
CH6	37.500000	37.790000	≥500
CH7	38.200000	37.771000	≥500
CH8	37.700000	37.832000	≥500
CH9	38.000000	37.751000	≥500

Aux. Antenna

802.11b Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH1	8.200000	12.930000	≥500
CH6	7.700000	13.105000	≥500
CH11	7.700000	12.912000	≥500

802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH1	16.100000	16.636000	≥500
CH2	16.100000	16.690000	≥500
CH3	16.500000	16.698000	≥500
CH4	16.500000	16.710000	≥500
CH6	16.000000	16.707000	≥500
CH9	16.100000	16.674000	≥500
CH10	16.000000	16.652000	≥500
CH11	15.900000	16.670000	≥500

802.11n-20MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH1	16.200000	17.748000	≥500
CH2	16.300000	17.779000	≥500
CH3	16.700000	17.824000	≥500
CH4	17.700000	17.860000	≥500
CH6	16.600000	17.864000	≥500
CH9	16.200000	17.752000	≥500
CH10	16.500000	17.783000	≥500
CH11	16.500000	17.775000	≥500

802.11n-40MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH3	34.200000	35.987000	≥500
CH4	35.900000	36.099000	≥500
CH5	36.300000	36.214000	≥500
CH6	36.500000	36.236000	≥500
CH7	36.500000	36.210000	≥500
CH8	36.200000	36.135000	≥500
CH9	35.600000	36.074000	≥500

802.11ax-20 MHz(SU) Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH1	17.700000	18.979000	≥500
CH2	18.100000	19.051000	≥500
CH3	18.800000	19.045000	≥500
CH4	18.700000	19.070000	≥500
CH6	18.700000	19.092000	≥500
CH9	18.100000	19.001000	≥500
CH10	17.000000	18.981000	≥500
CH11	17.200000	18.975000	≥500

802.11ax-40 MHz(SU) Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH3	36.500000	37.643000	≥500
CH4	37.900000	37.736000	≥500
CH5	37.900000	37.879000	≥500
CH6	38.200000	37.860000	≥500
CH7	38.200000	37.823000	≥500
CH8	38.100000	37.788000	≥500
CH9	37.100000	37.667000	≥500

Test Plots

Main Antenna
6 dB Bandwidth

802.11b CHANNEL 1



802.11b CHANNEL 6



802.11b CHANNEL 11



802.11g CHANNEL 1



802.11g CHANNEL 2



802.11g CHANNEL 3



802.11g CHANNEL 4



802.11g CHANNEL 6



802.11g CHANNEL 9



802.11g CHANNEL 10



802.11g CHANNEL 11



802.11n-20 MHz CHANNEL 1



802.11n-20 MHz CHANNEL 2



802.11n-20 MHz CHANNEL 3



802.11n-20 MHz CHANNEL 4



802.11n-20 MHz CHANNEL 6



802.11n-20 MHz CHANNEL 9




802.11n-20 MHz CHANNEL 10



802.11n-20 MHz CHANNEL 11




802.11n-40 MHz CHANNEL 3

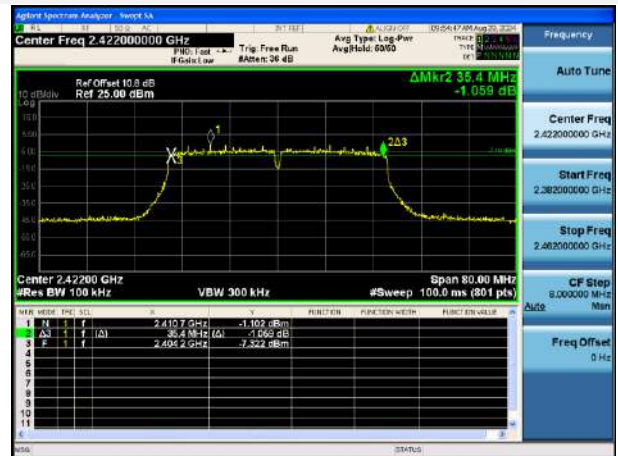


802.11n-40 MHz CHANNEL 4




802.11n-40 MHz CHANNEL 5

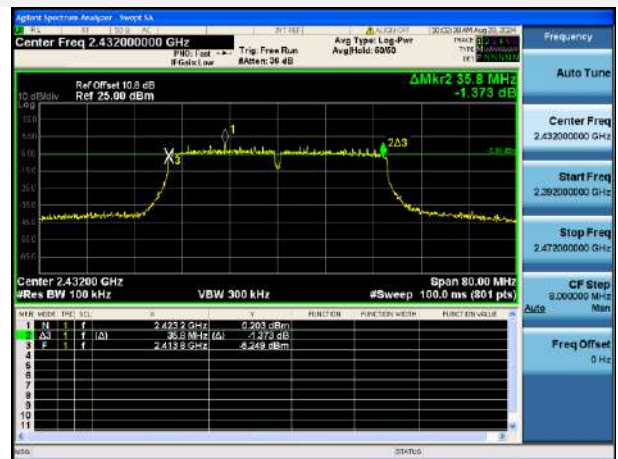

802.11n-40 MHz CHANNEL 6

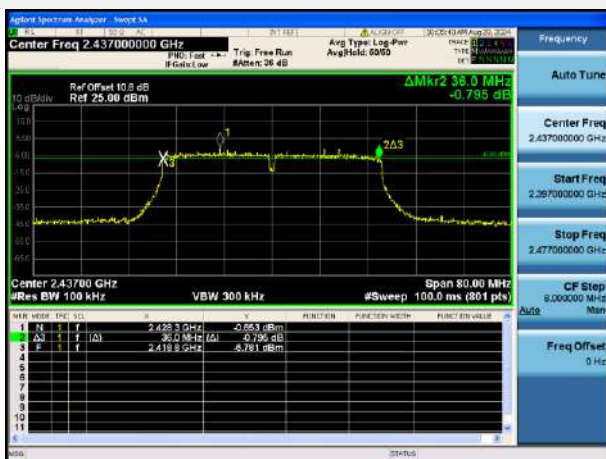

802.11n-40 MHz CHANNEL 7

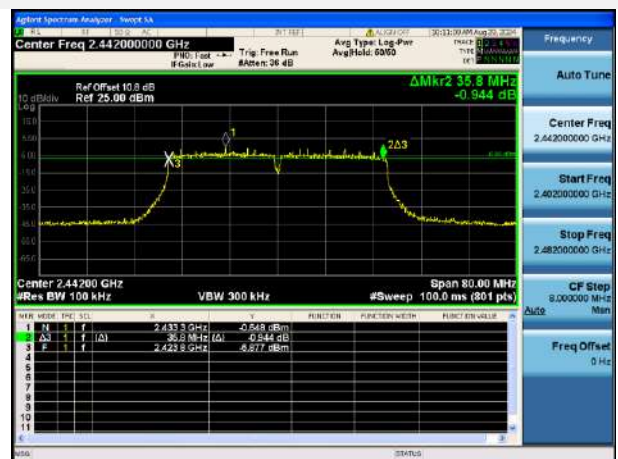

802.11n-40 MHz CHANNEL 8



802.11n-40 MHz CHANNEL 9



802.11ax-20 MHz CHANNEL 1



802.11ax-20 MHz CHANNEL 2



802.11ax-20 MHz CHANNEL 3



802.11ax-20 MHz CHANNEL 4




802.11ax-20 MHz CHANNEL 6



802.11ax-20 MHz CHANNEL 9




802.11ax-20 MHz CHANNEL 10

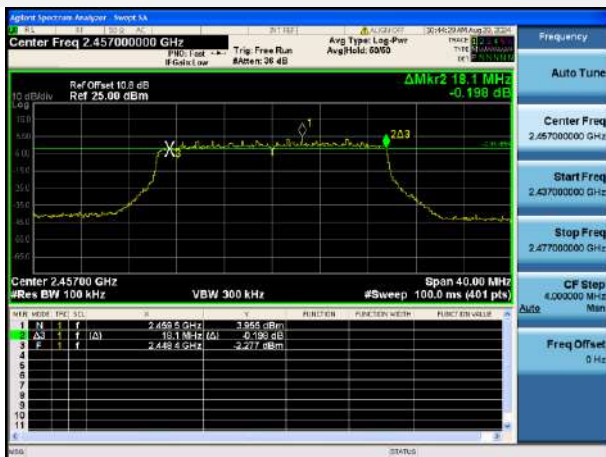

802.11ax-20 MHz CHANNEL 11




802.11ax-40 MHz CHANNEL 3

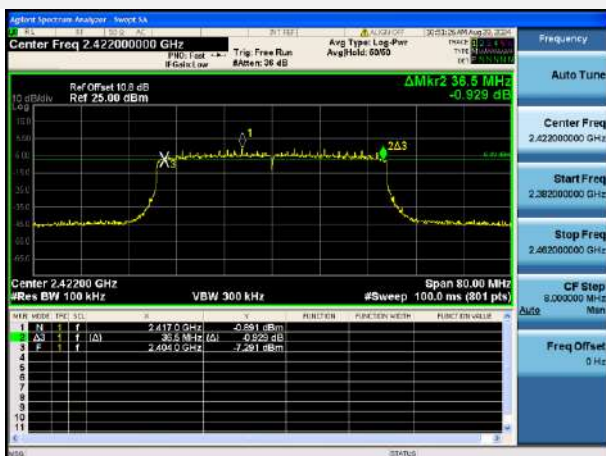

802.11ax-40 MHz CHANNEL 4



802.11ax-40 MHz CHANNEL 5

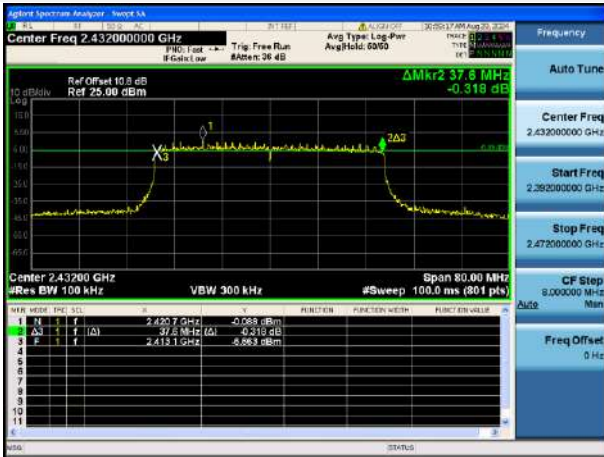

802.11ax-40 MHz CHANNEL 6



802.11ax-40 MHz CHANNEL 7



802.11ax-40 MHz CHANNEL 8



802.11ax-40 MHz CHANNEL 9



99% Bandwidth

802.11b CHANNEL 1



802.11b CHANNEL 6



802.11b CHANNEL 11



802.11g CHANNEL 1



802.11g CHANNEL 2



802.11g CHANNEL 3



802.11g CHANNEL 4



802.11g CHANNEL 6




802.11g CHANNEL 9




802.11g CHANNEL 10



802.11g CHANNEL 11

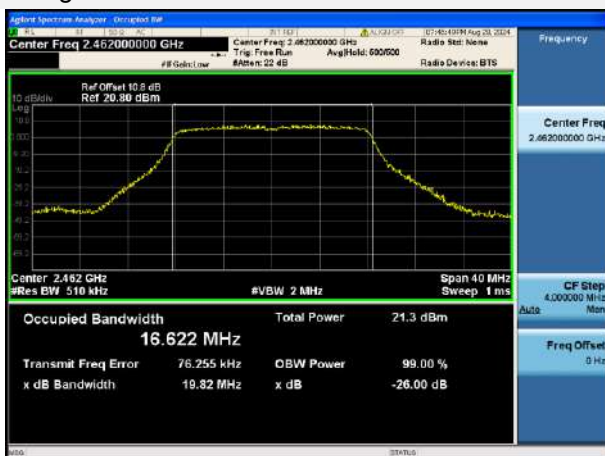

802.11n-20 MHz CHANNEL 1

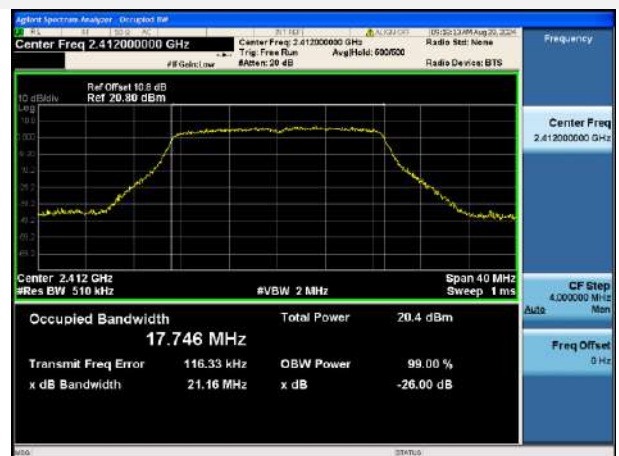

802.11n-20 MHz CHANNEL 2



802.11n-20 MHz CHANNEL 3



802.11n-20 MHz CHANNEL 4



802.11n-20 MHz CHANNEL 6



802.11n-20 MHz CHANNEL 9




802.11n-20 MHz CHANNEL 10




802.11n-20 MHz CHANNEL 11



802.11n-40 MHz CHANNEL 3

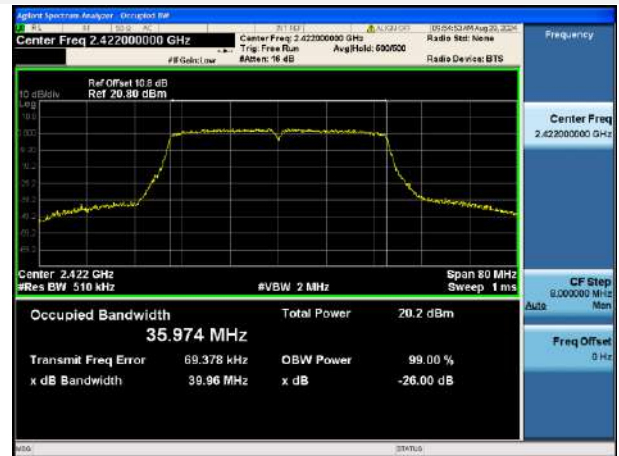

802.11n-40 MHz CHANNEL 4

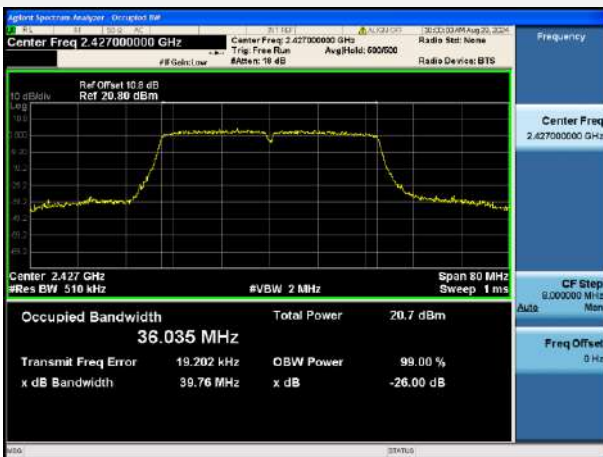

802.11n-40 MHz CHANNEL 5



802.11n-40 MHz CHANNEL 6



802.11n-40 MHz CHANNEL 7



802.11n-40 MHz CHANNEL 8



802.11n-40 MHz CHANNEL 9



802.11ax-20 MHz CHANNEL 1



802.11ax-20 MHz CHANNEL 2



802.11ax-20 MHz CHANNEL 3



802.11ax-20 MHz CHANNEL 4



802.11ax-20 MHz CHANNEL 6



802.11ax-20 MHz CHANNEL 9



802.11ax-20 MHz CHANNEL 10



802.11ax-20 MHz CHANNEL 11



802.11ax-40 MHz CHANNEL 3



802.11ax-40 MHz CHANNEL 4



802.11ax-40 MHz CHANNEL 5



802.11ax-40 MHz CHANNEL 6




802.11ax-40 MHz CHANNEL 7



802.11ax-40 MHz CHANNEL 8



802.11ax-40 MHz CHANNEL 9

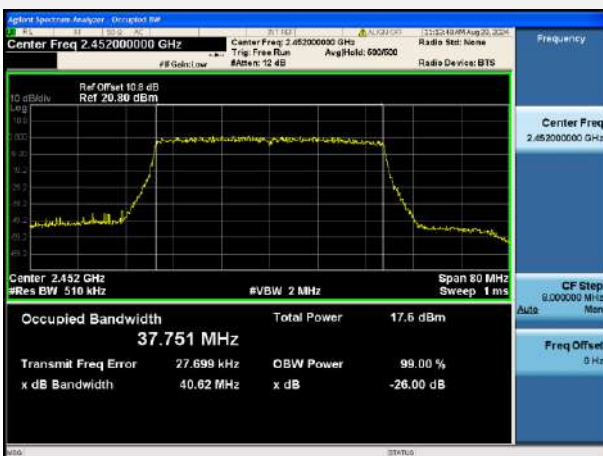

Aux. Antenna
6 dB Bandwidth

802.11b CHANNEL 1



802.11b CHANNEL 6



802.11b CHANNEL 11



802.11g CHANNEL 1



802.11g CHANNEL 2



802.11g CHANNEL 3



802.11g CHANNEL 4



802.11g CHANNEL 6



802.11g CHANNEL 9



802.11g CHANNEL 10



802.11g CHANNEL 11



802.11n-20 MHz CHANNEL 1



802.11n-20 MHz CHANNEL 2



802.11n-20 MHz CHANNEL 3




802.11n-20 MHz CHANNEL 4



802.11n-20 MHz CHANNEL 6



802.11n-20 MHz CHANNEL 9

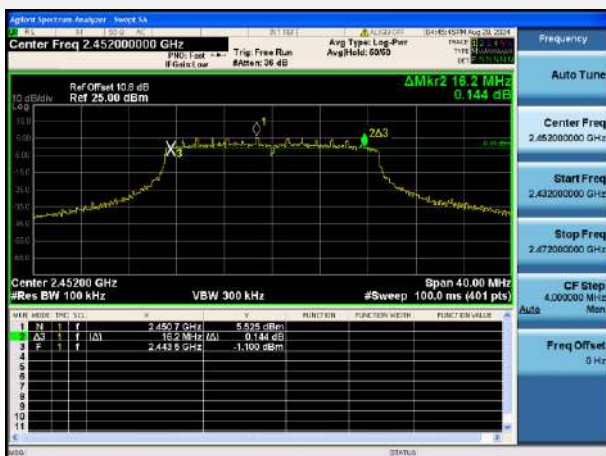

802.11n-20 MHz CHANNEL 10



802.11n-20 MHz CHANNEL 11




802.11n-40 MHz CHANNEL 3




802.11n-40 MHz CHANNEL 4




802.11n-40 MHz CHANNEL 5

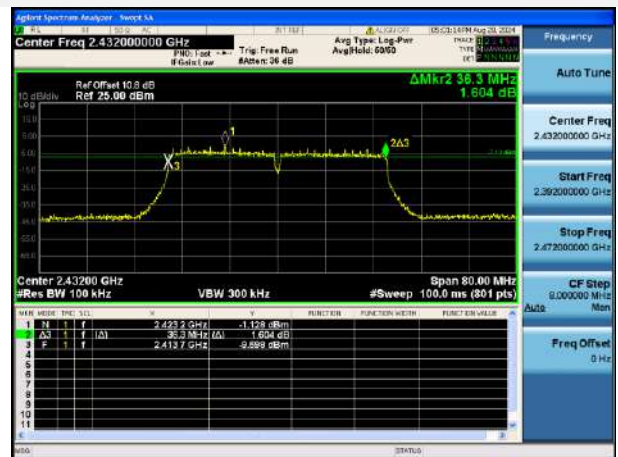


802.11n-40 MHz CHANNEL 6

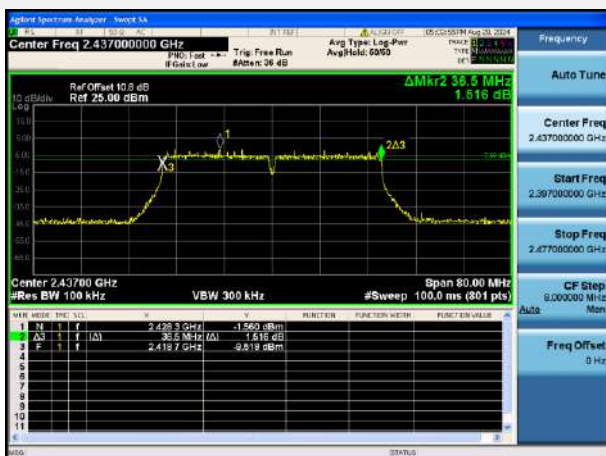

802.11n-40 MHz CHANNEL 7

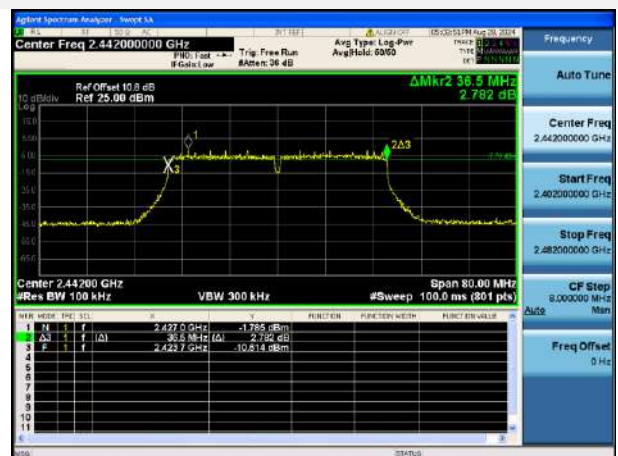

802.11n-40 MHz CHANNEL 8

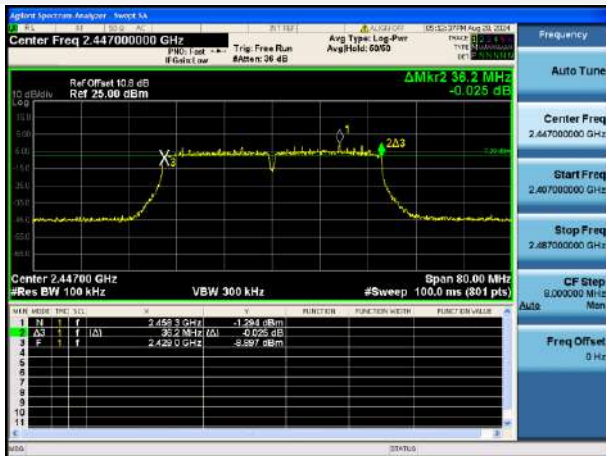

802.11n-40 MHz CHANNEL 9



802.11ax-20 MHz CHANNEL 1



802.11ax-20 MHz CHANNEL 2



802.11ax-20 MHz CHANNEL 3



802.11ax-20 MHz CHANNEL 4



802.11ax-20 MHz CHANNEL 6



802.11ax-20 MHz CHANNEL 9




802.11ax-20 MHz CHANNEL 10



802.11ax-20 MHz CHANNEL 11



802.11ax-40 MHz CHANNEL 3

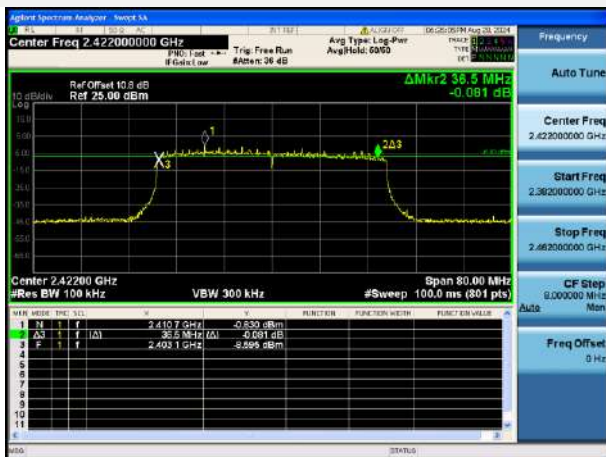


802.11ax-40 MHz CHANNEL 4



802.11ax-40 MHz CHANNEL 5



802.11ax-40 MHz CHANNEL 6

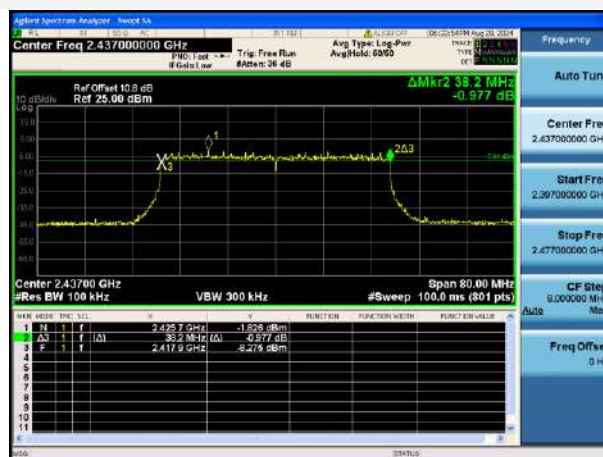

802.11ax-40 MHz CHANNEL 7



802.11ax-40 MHz CHANNEL 8



802.11ax-40 MHz CHANNEL 9



99% Bandwidth

802.11b CHANNEL 1



802.11b CHANNEL 6



802.11b CHANNEL 11



802.11g CHANNEL 1



802.11g CHANNEL 2



802.11g CHANNEL 3



802.11g CHANNEL 4




802.11g CHANNEL 6



802.11g CHANNEL 9



802.11g CHANNEL 10

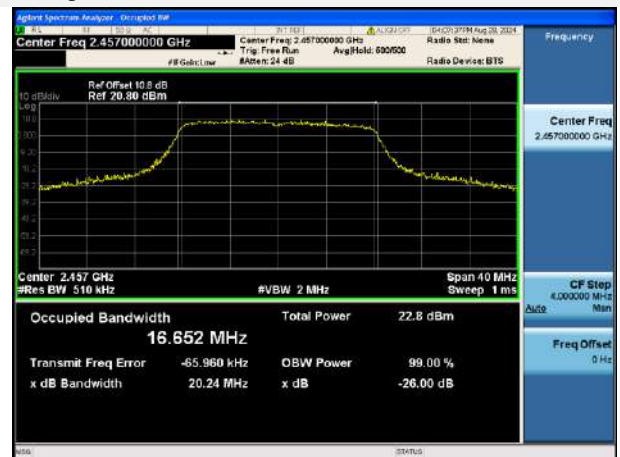

802.11g CHANNEL 11



802.11n-20 MHz CHANNEL 1



802.11n-20 MHz CHANNEL 2



802.11n-20 MHz CHANNEL 3




802.11n-20 MHz CHANNEL 4




802.11n-20 MHz CHANNEL 6



802.11n-20 MHz CHANNEL 9

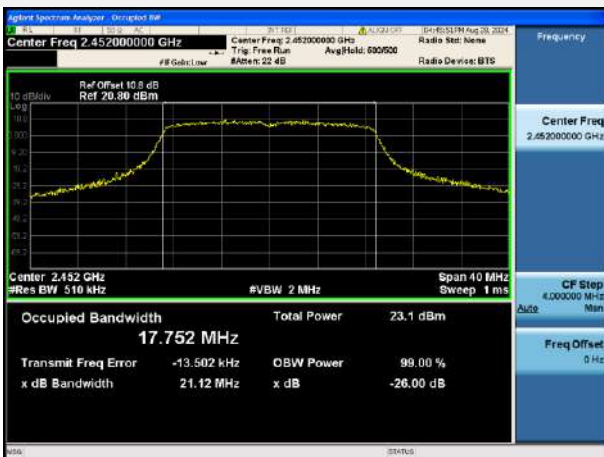

802.11n-20 MHz CHANNEL 10

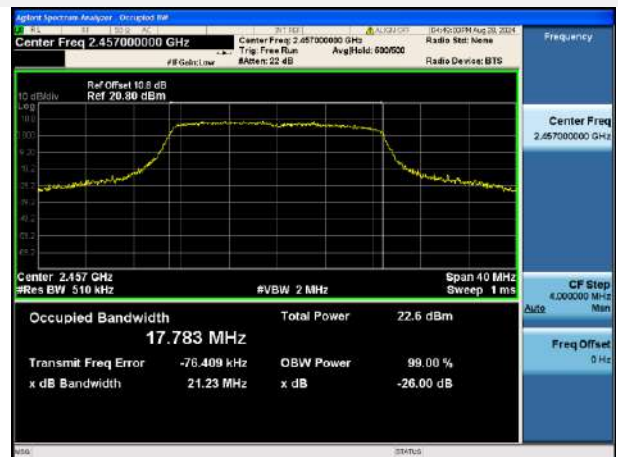

802.11n-20 MHz CHANNEL 11




802.11n-40 MHz CHANNEL 3




802.11n-40 MHz CHANNEL 4




802.11n-40 MHz CHANNEL 5

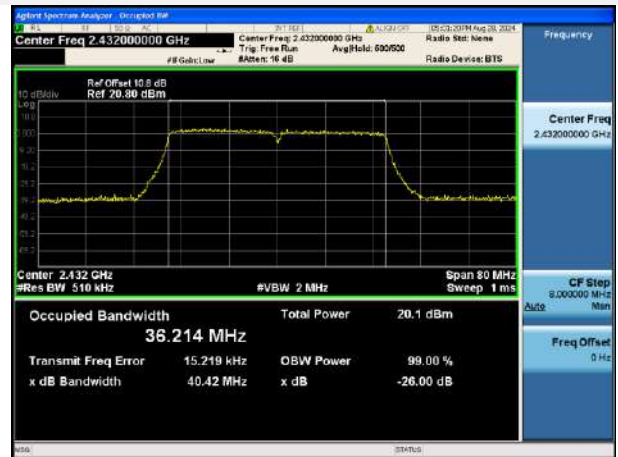

802.11n-40 MHz CHANNEL 6

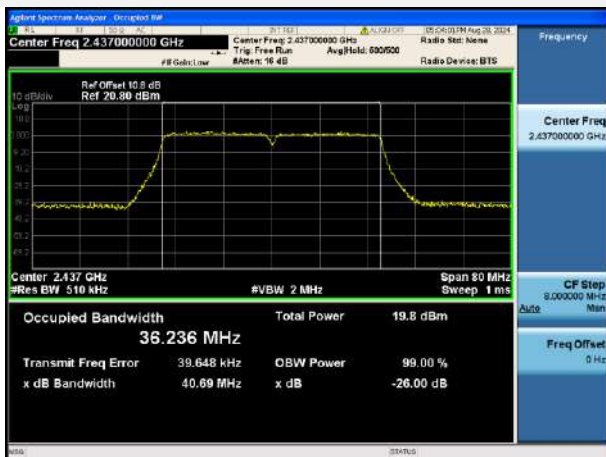

802.11n-40 MHz CHANNEL 7

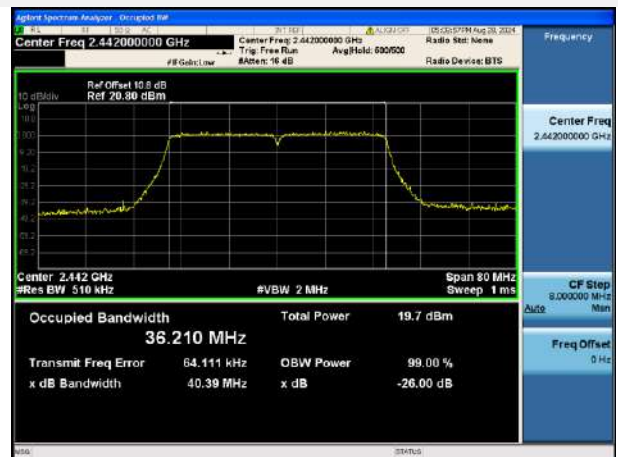

802.11n-40 MHz CHANNEL 8



802.11n-40 MHz CHANNEL 9



802.11ax-20 MHz CHANNEL 1




802.11ax-20 MHz CHANNEL 2



802.11ax-20 MHz CHANNEL 3



802.11ax-20 MHz CHANNEL 4

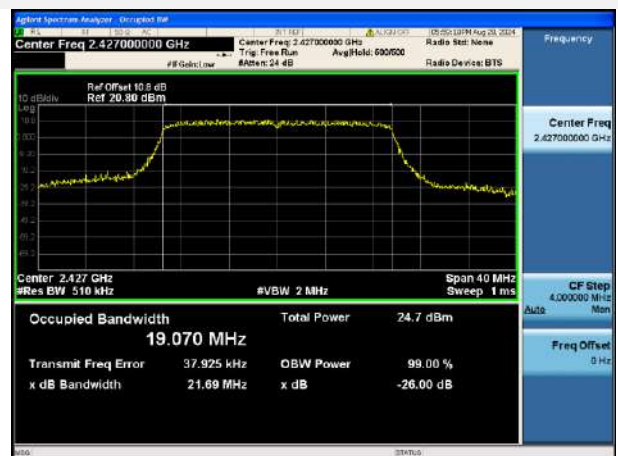

802.11ax-20 MHz CHANNEL 6



802.11ax-20 MHz CHANNEL 9




802.11ax-20 MHz CHANNEL 10



802.11ax-20 MHz CHANNEL 11



802.11ax-40 MHz CHANNEL 3

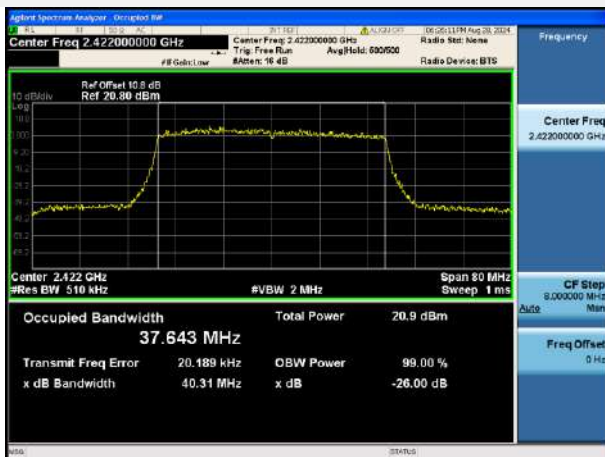

802.11ax-40 MHz CHANNEL 4



802.11ax-40 MHz CHANNEL 5



802.11ax-40 MHz CHANNEL 6



802.11ax-40 MHz CHANNEL 7



802.11ax-40 MHz CHANNEL 8



802.11ax-40 MHz CHANNEL 9



A.3 Conducted Spurious Emissions

Note ¹: All the configurations were pre tested, only the worst configuration has been reported in this report.

Test Data

Main Antenna

802.11b Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH1	-36.96	9.39	-10.61	Pass
CH6	-36.80	8.86	-11.14	Pass
CH11	-36.81	9.56	-10.44	Pass

802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH1	-38.54	3.64	-16.36	Pass
CH2	-40.01	4.86	-15.14	Pass
CH3	-40.66	5.52	-14.48	Pass
CH4	-37.82	6.87	-13.13	Pass
CH6	-37.36	6.15	-13.85	Pass
CH9	-37.83	6.43	-13.57	Pass
CH10	-36.27	6.14	-13.86	Pass
CH11	-41.13	4.04	-15.96	Pass

802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH1	-41.03	3.35	-16.65	Pass
CH2	-37.14	5.59	-14.41	Pass
CH3	-37.39	5.86	-14.14	Pass
CH4	-37.19	6.59	-13.41	Pass
CH6	-37.30	5.93	-14.07	Pass
CH9	-37.07	6.09	-13.91	Pass
CH10	-36.30	5.90	-14.10	Pass
CH11	-40.51	2.03	-17.97	Pass

802.11n-40MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH3	-40.21	-1.00	-21.00	Pass
CH4	-40.93	-0.17	-20.17	Pass
CH5	-41.52	0.47	-19.53	Pass
CH6	-40.29	-0.31	-20.31	Pass
CH7	-42.52	-0.37	-20.37	Pass
CH8	-41.17	-0.61	-20.61	Pass
CH9	-40.27	-4.27	-24.27	Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH1	-40.58	3.21	-16.79	Pass
CH2	-41.69	4.18	-15.82	Pass
CH3	-41.53	4.48	-15.52	Pass
CH4	-36.20	6.57	-13.43	Pass
CH6	-37.40	6.05	-13.95	Pass
CH9	-36.77	5.76	-14.24	Pass
CH10	-38.82	4.24	-15.76	Pass
CH11	-39.95	1.88	-18.12	Pass

802.11ax-40 MHz(SU) Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH3	-42.15	-0.34	-20.34	Pass
CH4	-39.74	0.00	-20.00	Pass
CH5	-40.83	0.01	-19.99	Pass
CH6	-40.59	-0.42	-20.42	Pass
CH7	-40.77	-0.47	-20.47	Pass
CH8	-40.80	-0.34	-20.34	Pass
CH9	-41.18	-4.80	-24.80	Pass

Aux. Antenna

802.11b Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH1	-36.31	8.27	-11.73	Pass
CH6	-37.13	8.17	-11.83	Pass
CH11	-36.01	8.58	-11.42	Pass

802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH1	-39.99	2.68	-17.32	Pass
CH2	-40.12	3.86	-16.14	Pass
CH3	-40.02	5.01	-14.99	Pass
CH4	-36.98	5.65	-14.35	Pass
CH6	-37.62	5.75	-14.25	Pass
CH9	-37.39	5.87	-14.13	Pass
CH10	-36.96	5.57	-14.43	Pass
CH11	-41.97	3.16	-16.84	

802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH1	-41.40	2.56	-17.44	Pass
CH2	-37.53	4.74	-15.26	Pass
CH3	-37.74	4.88	-15.12	Pass
CH4	-37.09	5.52	-14.48	Pass
CH6	-36.66	5.72	-14.28	Pass
CH9	-36.14	5.80	-14.20	Pass
CH10	-37.25	5.54	-14.46	Pass
CH11	-40.55	2.20	-17.80	Pass

802.11n-40MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH3	-41.30	-0.11	-20.11	Pass
CH4	-41.05	-0.69	-20.69	Pass
CH5	-40.27	-0.20	-20.20	Pass
CH6	-40.67	-0.96	-20.96	Pass
CH7	-39.16	-1.54	-21.54	Pass
CH8	-40.61	-1.61	-21.61	Pass
CH9	-40.50	-4.26	-24.26	Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH1	-40.42	2.83	-17.17	Pass
CH2	-41.36	4.15	-15.85	Pass
CH3	-39.11	4.25	-15.76	Pass
CH4	-37.85	5.37	-14.63	Pass
CH6	-36.87	5.39	-14.61	Pass
CH9	-37.40	5.36	-14.64	Pass
CH10	-40.46	4.16	-15.84	Pass
CH11	-39.30	2.14	-17.86	Pass

802.11ax-40 MHz(SU) Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH3	-41.10	-0.79	-20.79	Pass
CH4	-41.22	-0.95	-20.95	Pass
CH5	-41.26	-0.71	-20.71	Pass
CH6	-40.19	-1.09	-21.09	Pass
CH7	-40.67	-1.14	-21.14	Pass
CH8	-39.89	-1.30	-21.30	Pass
CH9	-40.89	-3.41	-23.41	Pass


Test Plots

Main Antenna

802.11b CHANNEL 1 CARRIER LEVEL



802.11b CHANNEL 1, SPURIOUS 30 MHz ~ 3 GHz

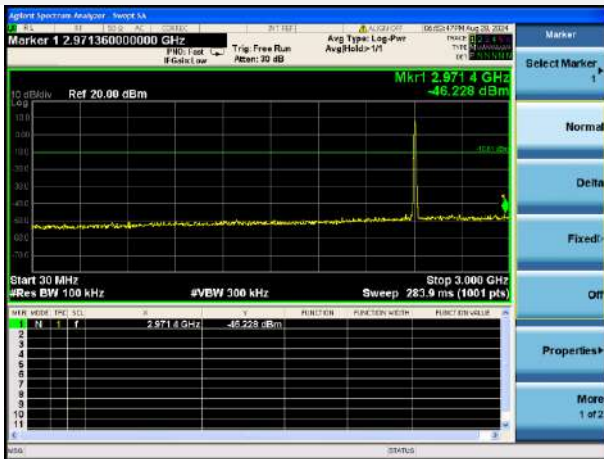

802.11b CHANNEL 1, SPURIOUS 2 GHz ~ 25 GHz



802.11b CHANNEL 6 CARRIER LEVEL

