


FCC TEST REPORT

FCC ID: 2AG6FV10

Product : POS System

Model Name : V10,V6,V7,V8,V9

Brand : 

Report No. : PT800231151222E-FC03

Prepared for

CITAQ CO., LTD.
9th Floor, Chuangye Building, 6 Keji Middle Road,
New Hi-Tech Zone, Shantou, Guangdong China

Prepared by

DongGuan Precise Testing Service Co.,Ltd.
Building D, Baoding Technology Park, Guangming Road 2, Guangming Community
Dongcheng District, Dongguan, Guangdong, China

TEST RESULT CERTIFICATION


Applicant's name : CITAQ CO., LTD.
Address : 9th Floor, Chuangye Building, 6 Keji Middle Road, New Hi-Tech Zone, Shantou, Guangdong China
Manufacture's name : CITAQ CO., LTD.
Address : 9th Floor, Chuangye Building, 6 Keji Middle Road, New Hi-Tech Zone, Shantou, Guangdong China
Product name : POS System
Model name : V10,V6,V7,V8,V9
Standards : FCC CFR47 Part 15 Section 15.247
Test procedure : ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R03
Test Date : Dec. 25, 2015 ~ Jan.4, 2016
Date of Issue : Jan.4, 2016
Test Result : Pass

This device described above has been tested by PTS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTS, this document may be altered or revised by PTS, personal only, and shall be noted in the revision of the document.


Testing Engineer

August Qiu

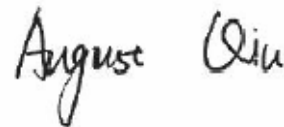


Technical Manager

Hack Ye



Authorized Signatory

Chris Du



Contents

	Page
2 TEST SUMMARY.....	5
3 GENERAL INFORMATION.....	6
3.1 GENERAL DESCRIPTION OF E.U.T.....	6
3.2 CHANNEL LIST	7
3.3 TEST MODE.....	7
4 EQUIPMENT DURING TEST.....	8
4.1 EQUIPMENTS LIST.....	8
4.2 MEASUREMENT UNCERTAINTY.....	9
5 CONDUCTED EMISSION.....	10
5.1 E.U.T. OPERATION.....	10
5.2 EUT SETUP	10
5.3 MEASUREMENT DESCRIPTION.....	11
5.4 CONDUCTED EMISSION TEST RESULT	11
6 RADIATED SPURIOUS EMISSIONS.....	13
6.1 EUT OPERATION	13
6.2 TEST SETUP.....	14
6.3 SPECTRUM ANALYZER SETUP.....	15
6.4 TEST PROCEDURE.....	16
6.5 SUMMARY OF TEST RESULTS.....	17
7 CONDUCTED SPURIOUS EMISSIONS	32
8 BAND EDGE MEASUREMENT	41
8.1 TEST PROCEDURE.....	41
8.2 TEST RESULT.....	42
9 6DB BANDWIDTH MEASUREMENT	47
9.1 TEST PROCEDURE.....	47
9.2 TEST RESULT.....	47
10 MAXIMUM PEAK OUTPUT POWER	56
10.1 TEST PROCEDURE.....	56
10.2 TEST RESULT	57
11 POWER SPECTRAL DENSITY.....	66
11.1 TEST PROCEDURE.....	66
11.2 TEST RESULT	66



12 ANTENNA REQUIREMENT.....75

13 TEST SETUP.....76

2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conduct Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203	PASS

Remark:

N/A: Not Applicable

3 General Information

3.1 General Description of E.U.T.

Product Name	:	POS System
Model Name	:	V10,V6,V7,V8,V9
Model Description	:	Only the model names are different
GSM Band(s)	:	GSM 850/1900
GPRS/EGPRS Class	:	12
WCDMA Band(s)	:	FDD Band II/V
Bluetooth Version	:	V4.0(with BLE)
Operating frequency	:	GSM/GPRS/EDGE 850: 824~849MHz PCS/GPRS/EDGE 1900: 1850~1910MHz WCDMA/UPA/DPA Band V: 824~849MHz WCDMA/UPA/DPA Band II: 1850~1910MHz Bluetooth: 2402-2480MHz WIFI 802.11b/g/n HT20:2412-2462MHz 802.11n HT40:2422-2452MHz
Max. RF output power	:	GSM 850: 32.35dBm PCS 1900: 29.18dBm WCDMA Band V: 22.66dBm WCDMA Band II: 22.47dBm Bluetooth: 2.04dBm WIFI: 9.42dBm
Type of Modulation	:	GSM,GPRS: GMSK EDGE: 8PSK WCDMA: QPSK Bluetooth: GFSK, Pi/4 DQPSK,8DPSK WIFI: CCK, OFDM
Antenna installation:	:	GSM/WCDMA: internal permanent antenna WIFI/Bluetooth: internal permanent antenna
Antenna Gain:	:	GSM 850/ WCDMA Band V: -0.5dBi PCS 1900/ WCDMA Band II: 1.2dBi WIFI: 0dBi Bluetooth: 0dBi
Power supply	:	DC 24V 2.71A Power by AC adapter
Adapter	:	Input:100-240V ~50/60Hz 1.7A max Output: DC 24V 2.71A



3.2 Channel List

WIFI							
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/
BLE							
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3.3 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Modulation	Test mode	Low channel	Middle channel	High channel
802.11b/g/n-HT20	Transmitting	2412MHz	2437MHz	2462MHz
802.11n-HT40	Transmitting	2412MHz	2437MHz	2452MHz
GFSK(BLE)	Transmitting	2402MHz	2440MHz	2480MHz
Tests Carried Out Under FCC part 15.207				
Test Item			Test Mode	
Conduction Emission, 0.15MHz to 30MHz			WIFI & BT Communication	

4 Equipment During Test

4.1 Equipments List

RF Conducted Test							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Analyzer (9k~26.5GHz)	Agilent	E4407B	MY45109572	Aug.04, 2015	Aug.03, 2016	1 year
2	EXA Signal Analyzer	Keysight	N9010A	MY50520207 526B25MPB W7X	Aug.04, 2015	Aug.03, 2016	1 year
3	EMI Test Receiver	R&S	ESCI	101155	July 15, 2015	July 14, 2016	1 year
Radiated Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	Rohde&Schwarz	ESCI	101417	July 15, 2015	July 14, 2016	1 year
2	EMC Analyzer (9k~26.5GHz)	Agilent	E4407B	MY45109572	Aug.04, 2015	Aug.03, 2016	1 year
3	Trilog Broadband Antenna	SCHWARZECK	VULB9160	9160-3355	July 15, 2015	July 14, 2016	1 year
4	Amplifier	EM	EM-30180	060538	July 15, 2015	July 14, 2016	1 year
5	Horn Antenna	SCHWARZECK	BBHA9120D	9120D-1246	July 15, 2015	July 14, 2016	1 year
6	Coaxial Cable(below 1GHz)	LARGE	CALB1	-	July 15, 2015	July 14, 2016	1 year
7	Coaxial Cable(above 1GHz)	LARGE	CALB2	-	July 15, 2015	July 14, 2016	1 year
Conducted Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	R&S	ESCI	101155	July 15, 2015	July 14, 2016	1 year
2	LISN	SCHWARZECK	NSLK 8128	8128-289	July 15, 2015	July 14, 2016	1 year
3	Cable	LARGE	RF300	-	July 15, 2015	July 14, 2016	1 year

4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB

5 Conducted Emission

Test Requirement:	: FCC CFR 47 Part 15 Section 15.207
Test Method:	: ANSI C63.4:2014
Test Result:	: PASS
Frequency Range:	: 150kHz to 30MHz
Class/Severity:	: Class B
Limit:	: 66-56 dB μ V between 0.15MHz & 0.5MHz
	: 56 dB μ V between 0.5MHz & 5MHz
	: 60 dB μ V between 5MHz & 30MHz
Detector:	: Peak for pre-scan (9kHz Resolution Bandwidth)


5.1 E.U.T. Operation

Operating Environment :

Temperature:	: 25.5 °C
Humidity:	: 51 % RH
Atmospheric Pressure:	: 101.2kPa
EUT Operation :	: Refer to section 3.3

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003.

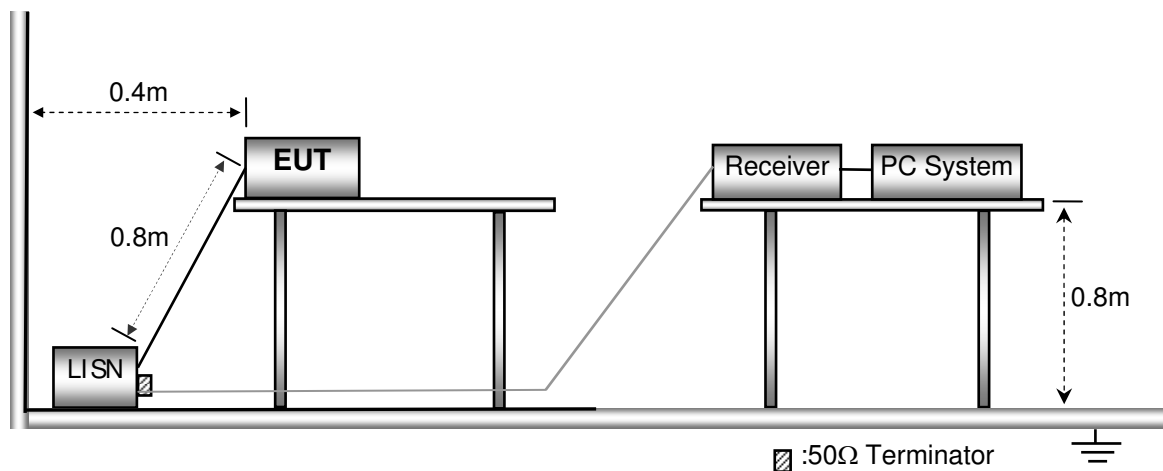




5.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.4 Conducted Emission Test Result


Live line:

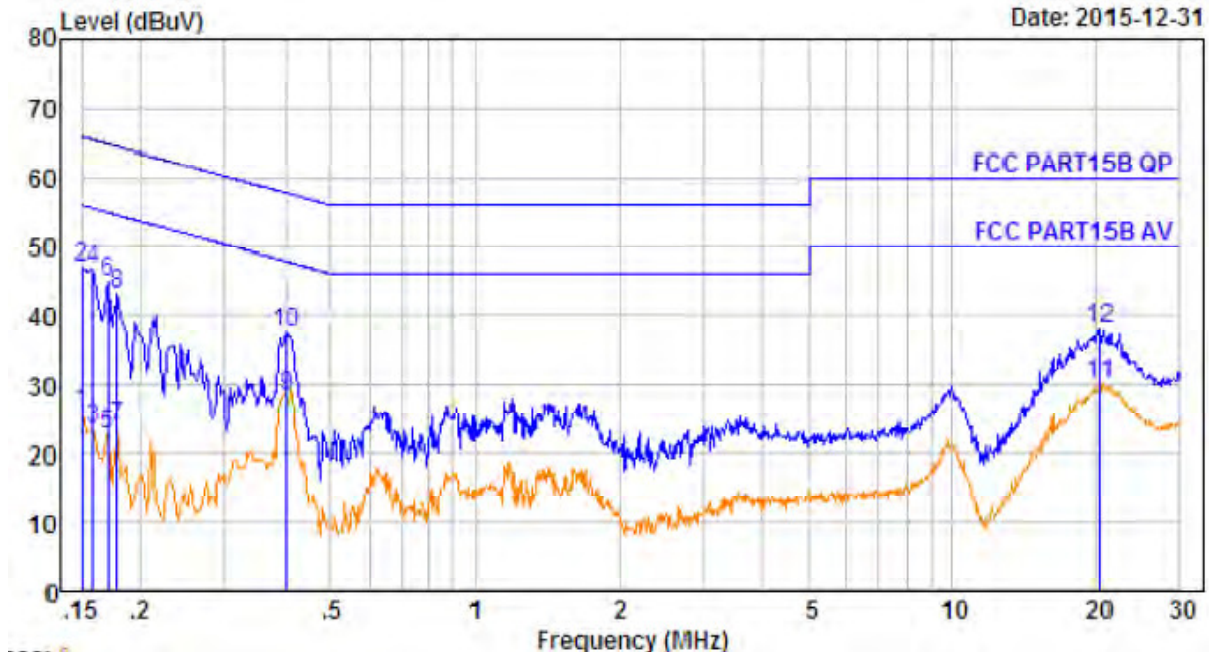

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.150	10.60	0.60	14.76	25.96	56.00	-30.04	Average
2.	0.150	10.60	0.60	35.76	46.96	66.00	-19.04	QP
3.	0.158	10.60	0.60	12.46	23.66	55.56	-31.90	Average
4.	0.158	10.60	0.60	35.46	46.66	65.56	-18.90	QP
5.	0.170	10.60	0.60	11.55	22.75	54.94	-32.19	Average
6.	0.170	10.60	0.60	33.55	44.75	64.94	-20.19	QP
7.	0.178	10.61	0.60	12.83	24.04	54.59	-30.55	Average
8.	0.178	10.61	0.60	31.83	43.04	64.59	-21.55	QP
9.	0.402	10.64	0.60	17.22	28.46	47.81	-19.35	Average
10.	0.402	10.64	0.60	26.22	37.46	57.81	-20.35	QP
11.	20.377	10.78	0.60	18.67	30.05	50.00	-19.95	Average
12.	20.377	10.78	0.60	26.67	38.05	60.00	-21.95	QP



Neutral line:

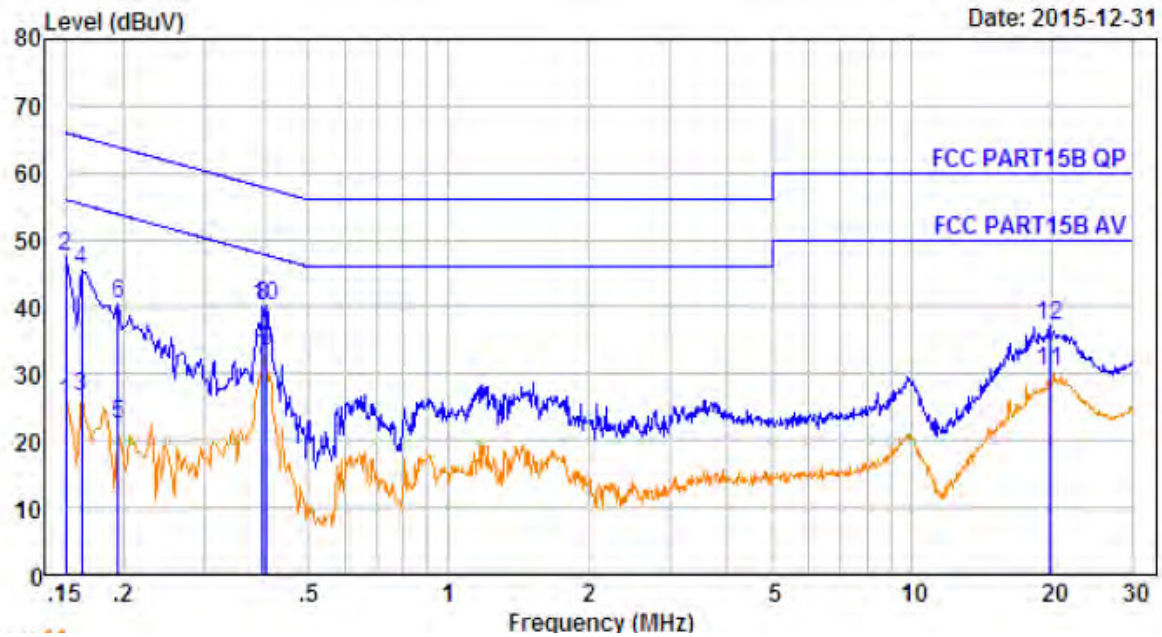

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBUV	Emission Level dBUV	Limit dBUV	Over Limit dB	Remark
1.	0.150	10.60	0.60	14.35	25.55	56.00	-30.45	Average
2.	0.150	10.60	0.60	36.35	47.55	66.00	-18.45	QP
3.	0.162	10.60	0.60	15.38	26.58	55.34	-28.76	Average
4.	0.162	10.60	0.60	34.38	45.58	65.34	-19.76	QP
5.	0.194	10.61	0.60	11.36	22.57	53.84	-31.27	Average
6.	0.194	10.61	0.60	29.36	40.57	63.84	-23.27	QP
7.	0.398	10.64	0.60	20.89	32.13	47.90	-15.77	Average
8.	0.398	10.64	0.60	28.89	40.13	57.90	-17.77	QP
9.	0.406	10.64	0.60	22.02	33.26	47.73	-14.47	Average
10.	0.406	10.64	0.60	29.02	40.26	57.73	-17.47	QP
11.	19.740	10.78	0.60	18.89	30.27	50.00	-19.73	Average
12.	19.740	10.78	0.60	25.89	37.27	60.00	-22.73	QP

6 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method: : ANSI C63.10:2013,KDB 558074 D01 DTS MEAS GUIDANCE V03R03
 Test Result: : PASS
 Measurement Distance: : 3m
 Limit: : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾


6.1 EUT Operation

Operating Environment :
 Temperature: : 23.5 °C
 Humidity: : 51.1 % RH
 Atmospheric Pressure: : 101.2kPa
 EUT Operation : : Refer to section 3.3


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

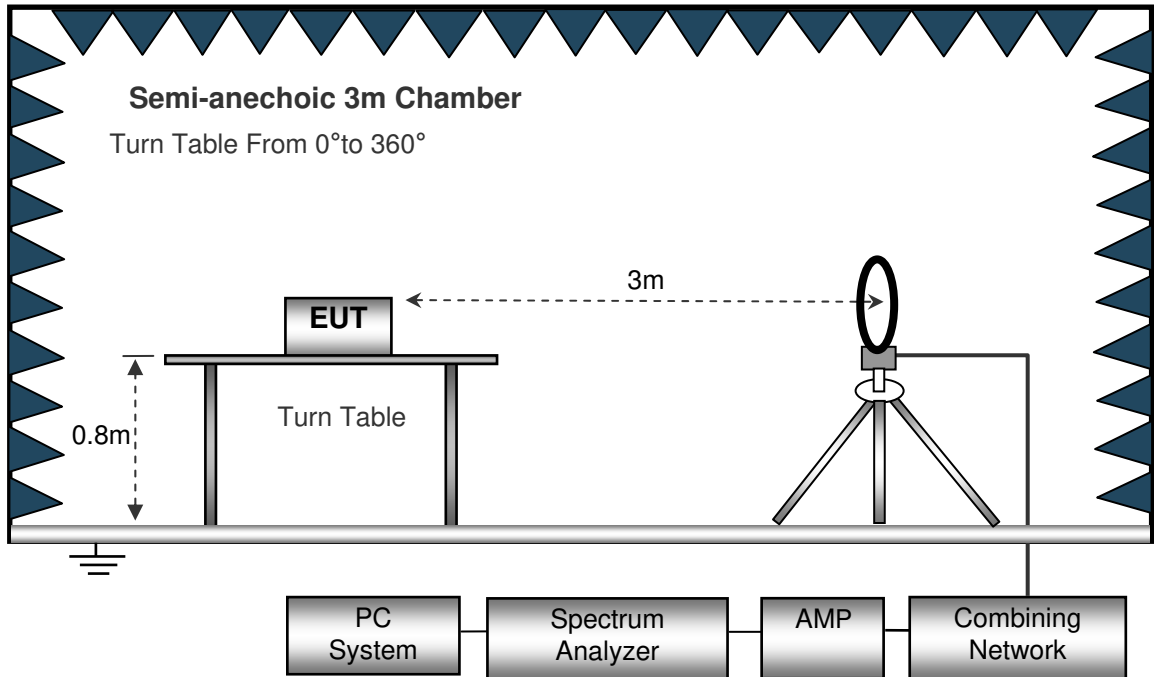

The test setup for emission measurement from 30 MHz to 1 GHz.

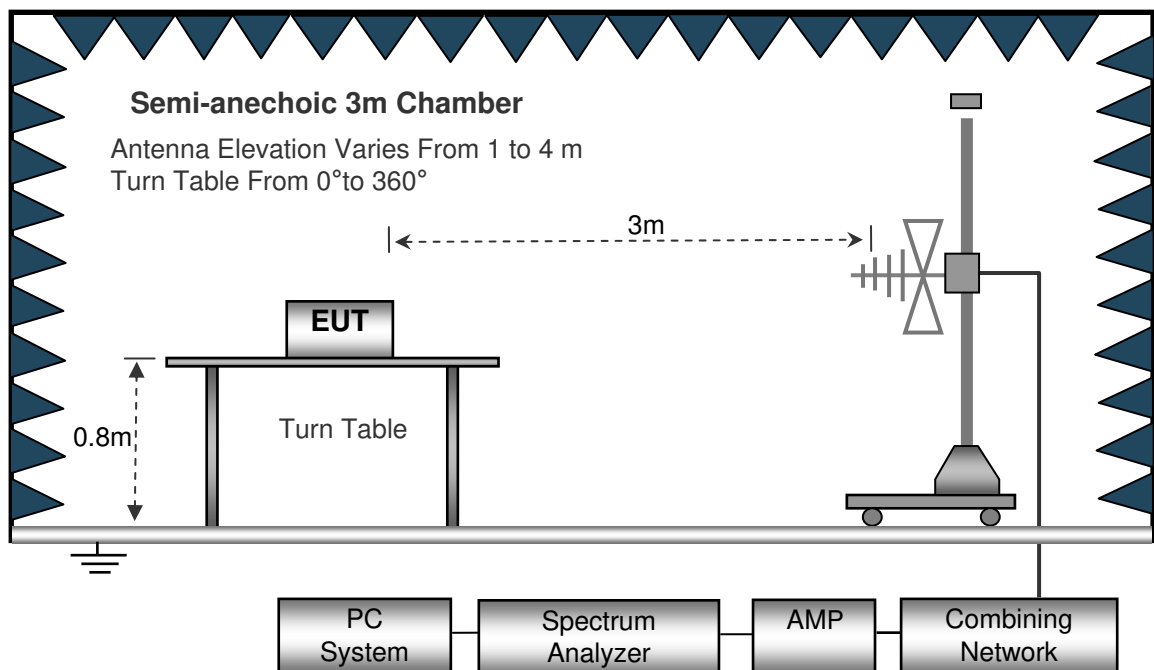

The test setup for emission measurement above 1 GHz.

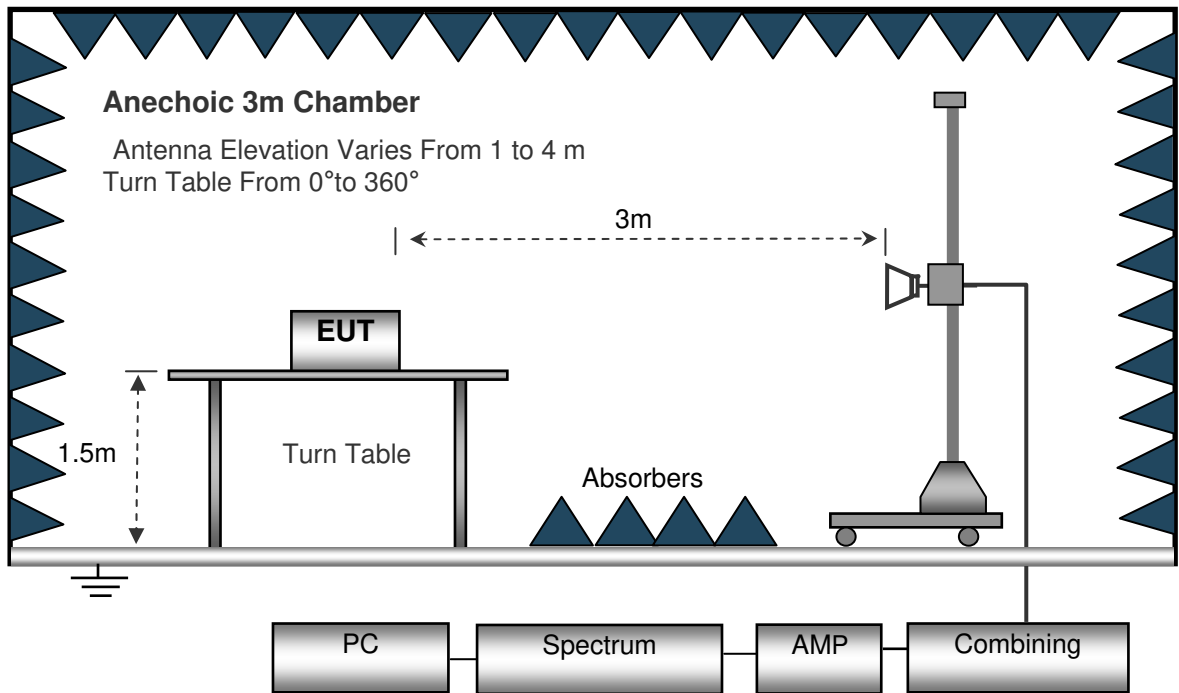

6.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed..... Auto
IF Bandwidth.....10kHz
Video Bandwidth10kHz
Resolution Bandwidth10kHz

30MHz ~ 1GHz

Sweep Speed..... Auto
Detector.....PK
Resolution Bandwidth100kHz
Video Bandwidth300kHz

Above 1GHz

Sweep Speed..... Auto
Detector.....PK
Resolution Bandwidth1MHz
Video Bandwidth3MHz
Detector.....Ave.
Resolution Bandwidth1MHz
Video Bandwidth10Hz

6.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

6.5 Summary of Test Results

Test Frequency: Below 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Remark: only the worst data(GFSK modulation mode) were reported.

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK(BLE) Low Channel						
199.37	45.26	PK	-17.72	27.54	43.50	-15.96
199.37	39.77	PK	-17.72	22.05	43.50	-21.45
4804.00	48.22	PK	-1.06	47.16	74.00	-26.84
4804.00	43.43	Ave	-1.06	42.37	54.00	-11.63
7206.00	52.06	PK	1.33	53.39	74.00	-20.61
7206.00	43.45	Ave	1.33	44.78	54.00	-9.22
2322.20	45.02	PK	-13.19	31.83	74.00	-42.17
2322.20	39.30	Ave	-13.19	26.11	54.00	-27.89
2387.67	42.91	PK	-13.14	29.77	74.00	-44.23
2387.67	38.12	Ave	-13.14	24.98	54.00	-29.02
2488.14	42.47	PK	-13.08	29.39	74.00	-44.61
2488.14	40.29	Ave	-13.08	27.21	54.00	-26.79



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK(BLE) Middle Channel						
199.37	45.21	PK	-17.72	27.49	43.50	-16.01
199.37	40.55	PK	-17.72	22.83	43.50	-20.67
4880.00	47.51	PK	-0.93	46.58	74.00	-27.42
4880.00	43.74	Ave	-0.93	42.81	54.00	-11.19
7320.00	52.31	PK	1.67	53.98	74.00	-20.02
7320.00	43.15	Ave	1.67	44.82	54.00	-9.18
2346.78	44.76	PK	-13.19	31.57	74.00	-42.43
2346.78	38.35	Ave	-13.19	25.16	54.00	-28.84
2358.65	42.66	PK	-13.14	29.52	74.00	-44.48
2358.65	38.99	Ave	-13.14	25.85	54.00	-28.15
2491.85	42.16	PK	-13.08	29.08	74.00	-44.92
2491.85	40.13	Ave	-13.08	27.05	54.00	-26.95



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK(BLE) High Channel						
199.37	45.44	PK	-17.72	27.72	43.50	-15.88
199.37	40.51	PK	-17.72	22.79	43.50	-20.71
4960.00	50.23	PK	-0.87	49.36	74.00	-24.64
4960.00	43.80	Ave	-0.87	42.93	54.00	-11.07
7440.00	50.98	PK	1.84	52.82	74.00	-21.18
7440.00	44.03	Ave	1.84	45.87	54.00	-8.13
2319.68	44.41	PK	-13.19	31.22	74.00	-42.78
2319.68	39.12	Ave	-13.19	25.93	54.00	-28.07
2376.97	42.33	PK	-13.14	29.19	74.00	-44.81
2376.97	37.97	Ave	-13.14	24.83	54.00	-29.17
2498.93	44.23	PK	-13.08	31.15	74.00	-42.85
2498.93	40.46	Ave	-13.08	27.38	54.00	-26.62



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11b Low Channel						
199.37	46.83	QP	-17.72	29.11	43.50	-14.39
199.37	44.52	QP	-17.72	26.80	43.50	-16.70
4824.00	47.71	PK	-1.06	46.65	74.00	-27.35
4824.00	46.05	Ave	-1.06	44.99	54.00	-9.01
7236.00	48.96	PK	1.33	50.29	74.00	-23.71
7236.00	43.03	Ave	1.33	44.36	54.00	-9.64
2334.91	45.02	PK	-13.19	31.83	74.00	-42.17
2334.91	39.30	Ave	-13.19	26.11	54.00	-27.89
2355.96	42.91	PK	-13.14	29.77	74.00	-44.23
2355.96	38.12	Ave	-13.14	24.98	54.00	-29.02
2491.92	42.47	PK	-13.08	29.39	74.00	-44.61
2491.92	40.29	Ave	-13.08	27.21	54.00	-26.79



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11b Middle Channel						
199.37	45.08	QP	-17.72	27.36	43.50	-16.14
199.37	45.03	QP	-17.72	27.31	43.50	-16.19
4874.00	47.46	PK	-0.93	46.53	74.00	-27.47
4874.00	45.30	Ave	-0.93	44.37	54.00	-9.63
7311.00	49.48	PK	1.67	51.15	74.00	-22.85
7311.00	44.24	Ave	1.67	45.91	54.00	-8.09
2330.55	44.40	PK	-13.19	31.21	74.00	-42.79
2330.55	39.11	Ave	-13.19	25.92	54.00	-28.08
2384.98	43.25	PK	-13.14	30.11	74.00	-43.89
2384.98	38.39	Ave	-13.14	25.25	54.00	-28.75
2498.20	42.29	PK	-13.08	29.21	74.00	-44.79
2498.20	40.19	Ave	-13.08	27.11	54.00	-26.89



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11b High Channel						
199.37	47.69	QP	-17.72	29.97	43.50	-13.53
199.37	45.23	QP	-17.72	27.51	43.50	-15.99
4924.00	49.47	PK	-0.87	48.60	74.00	-25.40
4924.00	45.57	Ave	-0.87	44.70	54.00	-9.30
7386.00	48.24	PK	1.84	50.08	74.00	-23.92
7386.00	42.63	Ave	1.84	44.47	54.00	-9.53
2319.43	45.53	PK	-13.19	32.34	74.00	-41.66
2319.43	38.32	Ave	-13.19	25.13	54.00	-28.87
2383.06	42.68	PK	-13.14	29.54	74.00	-44.46
2383.06	36.99	Ave	-13.14	23.85	54.00	-30.15
2492.55	42.22	PK	-13.08	29.14	74.00	-44.86
2492.55	39.72	Ave	-13.08	26.64	54.00	-27.36



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11g Low Channel						
199.37	46.47	QP	-17.72	28.75	43.50	-14.75
199.37	44.73	QP	-17.72	27.01	43.50	-16.49
4824.00	46.91	PK	-1.06	45.85	74.00	-28.15
4824.00	45.25	Ave	-1.06	44.19	54.00	-9.81
7236.00	48.06	PK	1.33	49.39	74.00	-24.61
7236.00	42.41	Ave	1.33	43.74	54.00	-10.26
2333.42	45.02	PK	-13.19	31.83	74.00	-42.17
2333.42	39.30	Ave	-13.19	26.11	54.00	-27.89
2357.11	42.91	PK	-13.14	29.77	74.00	-44.23
2357.11	38.12	Ave	-13.14	24.98	54.00	-29.02
2493.48	42.47	PK	-13.08	29.39	74.00	-44.61
2493.48	40.29	Ave	-13.08	27.21	54.00	-26.79



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11g Middle Channel						
199.37	45.69	QP	-17.72	27.97	43.50	-15.53
199.37	45.42	QP	-17.72	27.70	43.50	-15.80
4874.00	46.97	PK	-0.93	46.04	74.00	-27.96
4874.00	44.93	Ave	-0.93	44.00	54.00	-10.00
7311.00	47.30	PK	1.67	48.97	74.00	-25.03
7311.00	41.74	Ave	1.67	43.41	54.00	-10.59
2345.77	45.15	PK	-13.19	31.96	74.00	-42.04
2345.77	38.33	Ave	-13.19	25.14	54.00	-28.86
2350.80	42.65	PK	-13.14	29.51	74.00	-44.49
2350.80	37.69	Ave	-13.14	24.55	54.00	-29.45
2499.48	41.60	PK	-13.08	28.52	74.00	-45.48
2499.48	39.78	Ave	-13.08	26.70	54.00	-27.30



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11g High Channel						
199.37	45.09	QP	-17.72	27.37	43.50	-16.13
199.37	46.18	QP	-17.72	28.46	43.50	-15.04
4924.00	46.67	PK	-0.87	45.80	74.00	-28.20
4924.00	44.13	Ave	-0.87	43.26	54.00	-10.74
7386.00	46.86	PK	1.84	48.70	74.00	-25.30
7386.00	41.07	Ave	1.84	42.91	54.00	-11.09
2328.22	45.70	PK	-13.19	32.51	74.00	-41.49
2328.22	38.91	Ave	-13.19	25.72	54.00	-28.28
2367.49	42.47	PK	-13.14	29.33	74.00	-44.67
2367.49	38.41	Ave	-13.14	25.27	54.00	-28.73
2498.81	41.00	PK	-13.08	27.92	74.00	-46.08
2498.81	40.07	Ave	-13.08	26.99	54.00	-27.01



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n-HT20 Low Channel						
199.37	46.66	QP	-17.72	28.94	43.50	-14.56
199.37	44.71	QP	-17.72	26.99	43.50	-16.51
4824.00	46.46	PK	-1.06	45.40	74.00	-28.60
4824.00	44.40	Ave	-1.06	43.34	54.00	-10.66
7236.00	47.13	PK	1.33	48.46	74.00	-25.54
7236.00	42.34	Ave	1.33	43.67	54.00	-10.33
2331.44	45.02	PK	-13.19	31.83	74.00	-42.17
2331.44	39.30	Ave	-13.19	26.11	54.00	-27.89
2364.93	42.91	PK	-13.14	29.77	74.00	-44.23
2364.93	38.12	Ave	-13.14	24.98	54.00	-29.02
2496.83	42.47	PK	-13.08	29.39	74.00	-44.61
2496.83	40.29	Ave	-13.08	27.21	54.00	-26.79



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n-HT20 Middle Channel						
199.37	46.95	QP	-17.72	29.23	43.50	-14.27
199.37	44.13	QP	-17.72	26.41	43.50	-17.09
4874.00	46.14	PK	-0.93	45.21	74.00	-28.79
4874.00	45.31	Ave	-0.93	44.38	54.00	-9.62
7311.00	46.38	PK	1.67	48.05	74.00	-25.95
7311.00	41.66	Ave	1.67	43.33	54.00	-10.67
2337.43	44.85	PK	-13.19	31.66	74.00	-42.34
2337.43	39.29	Ave	-13.19	26.10	54.00	-27.90
2359.11	42.79	PK	-13.14	29.65	74.00	-44.35
2359.11	37.22	Ave	-13.14	24.08	54.00	-29.92
2495.41	42.21	PK	-13.08	29.13	74.00	-44.87
2495.41	40.71	Ave	-13.08	27.63	54.00	-26.37



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n-HT20 High Channel						
199.37	46.13	QP	-17.72	28.41	43.50	-15.09
199.37	44.10	QP	-17.72	26.38	43.50	-17.12
4924.00	45.46	PK	-0.87	44.59	74.00	-29.41
4924.00	45.42	Ave	-0.87	44.55	54.00	-9.45
7386.00	45.69	PK	1.84	47.53	74.00	-26.47
7386.00	41.97	Ave	1.84	43.81	54.00	-10.19
2311.11	44.75	PK	-13.19	31.56	74.00	-42.44
2311.11	40.23	Ave	-13.19	27.04	54.00	-26.96
2385.81	42.53	PK	-13.14	29.39	74.00	-44.61
2385.81	36.69	Ave	-13.14	23.55	54.00	-30.45
2488.89	41.52	PK	-13.08	28.44	74.00	-45.56
2488.89	40.05	Ave	-13.08	26.97	54.00	-27.03



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n-HT40 Low Channel						
199.37	45.96	QP	-17.72	28.24	43.50	-15.26
199.37	45.06	QP	-17.72	27.34	43.50	-16.16
4844.00	46.04	PK	-1.06	44.98	74.00	-29.02
4844.00	43.26	Ave	-1.06	42.20	54.00	-11.80
7266.00	47.33	PK	1.33	48.66	74.00	-25.34
7266.00	41.69	Ave	1.33	43.02	54.00	-10.98
2317.58	45.02	PK	-13.19	31.83	74.00	-42.17
2317.58	39.30	Ave	-13.19	26.11	54.00	-27.89
2364.71	42.91	PK	-13.14	29.77	74.00	-44.23
2364.71	38.12	Ave	-13.14	24.98	54.00	-29.02
2496.03	42.47	PK	-13.08	29.39	74.00	-44.61
2496.03	40.29	Ave	-13.08	27.21	54.00	-26.79



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n-HT40 Middle Channel						
199.37	46.73	QP	-17.72	29.01	43.50	-14.49
199.37	44.22	QP	-17.72	26.50	43.50	-17.00
4874.00	46.01	PK	-0.93	45.08	74.00	-28.92
4874.00	42.44	Ave	-0.93	41.51	54.00	-12.49
7311.00	48.02	PK	1.67	49.69	74.00	-24.31
7311.00	41.59	Ave	1.67	43.26	54.00	-10.74
2328.98	45.05	PK	-13.19	31.86	74.00	-42.14
2328.98	39.79	Ave	-13.19	26.60	54.00	-27.40
2366.45	43.10	PK	-13.14	29.96	74.00	-44.04
2366.45	38.97	Ave	-13.14	25.83	54.00	-28.17
2486.35	42.44	PK	-13.08	29.36	74.00	-44.64
2486.35	40.09	Ave	-13.08	27.01	54.00	-26.99



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n-HT40 High Channel						
199.37	47.45	QP	-17.72	29.73	43.50	-13.77
199.37	44.93	QP	-17.72	27.21	43.50	-16.29
4904.00	46.28	PK	-0.87	45.41	74.00	-28.59
4904.00	41.75	Ave	-0.87	40.88	54.00	-13.12
7356.00	48.08	PK	1.84	49.92	74.00	-24.08
7356.00	40.70	Ave	1.84	42.54	54.00	-11.46
2348.17	44.46	PK	-13.19	31.27	74.00	-42.73
2348.17	39.99	Ave	-13.19	26.80	54.00	-27.20
2359.17	43.78	PK	-13.14	30.64	74.00	-43.36
2359.17	39.35	Ave	-13.14	26.21	54.00	-27.79
2485.99	43.04	PK	-13.08	29.96	74.00	-44.04
2485.99	39.26	Ave	-13.08	26.18	54.00	-27.82

Test Frequency: Above 18GHz

The measurements were more than 20 dB below the limit and not reported

7 Conducted Spurious Emissions

Test Requirement	:	FCC CFR47 Part 15 Section 15.247
Test Method	:	ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R03
Test Limit	:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode	:	Refer to section 3.3
Test Procedure	:	<ol style="list-style-type: none">1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the Spectrum.2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto Detector function = peak, Trace = max hold

GFSK(BLE) Low Channel

Fundamental



GFSK(BLE) Middle Channel





GFSK(BLE) High Channel



802.11b Low Channel



802.11b Middle Channel



802.11b High Channel





802.11g Low Channel



802.11g Middle Channel





802.11g High Channel



802.11n-HT20 Low Channel



802.11n-HT20 Middle Channel



802.11n-HT20 High Channel





802.11n-HT40 Low Channel



802.11n-HT40 Middle Channel



802.11n-HT40 High Channel



8 Band Edge Measurement

Test Requirement	: Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method	: ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R03
Test Limit	: Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode	: Refer to section 3.3


8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
 2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
- Detector function = peak, Trace = max hold




8.2 Test Result


GFSK(BLE) Band edge-left side

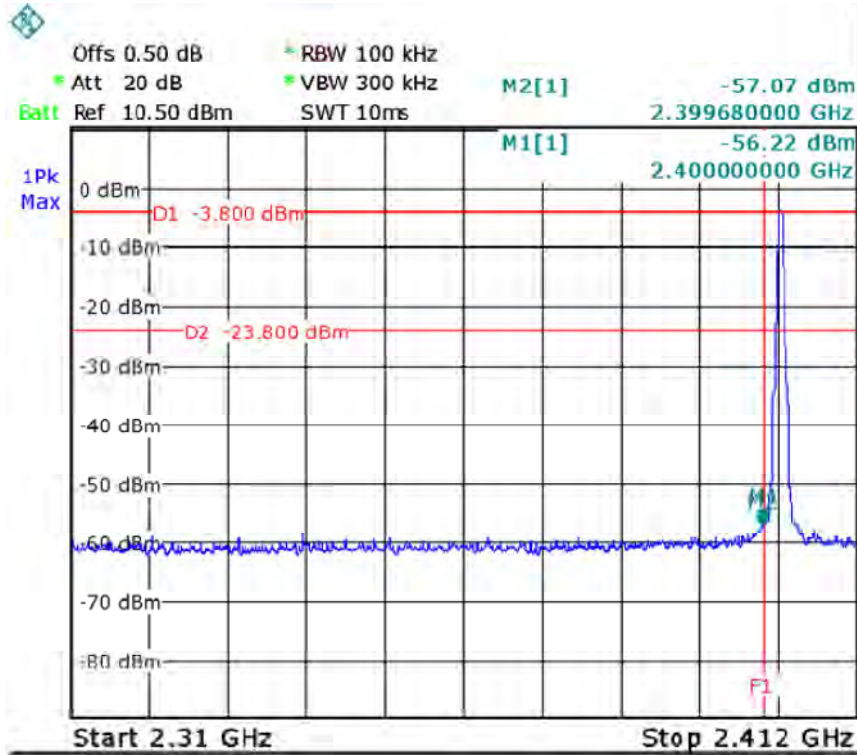


GFSK(BLE) Band edge-right side

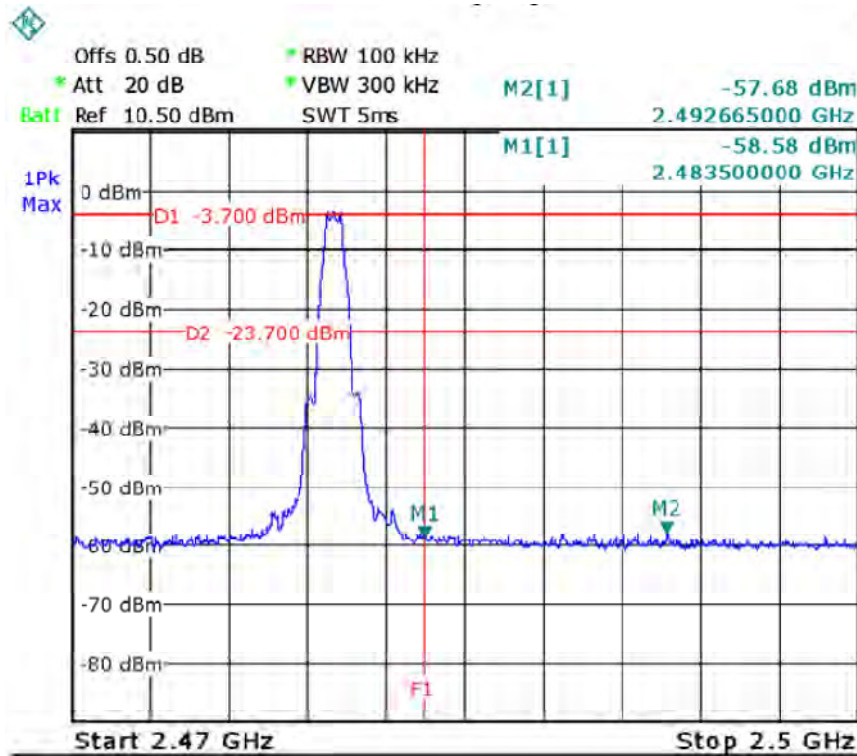


802.11b Band edge-left side

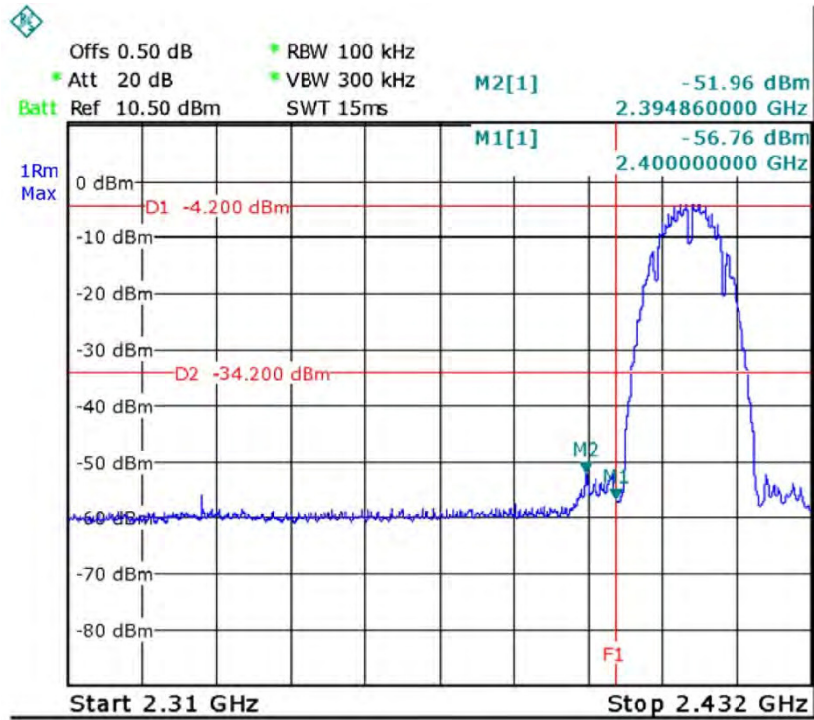


802.11b Band edge-right side

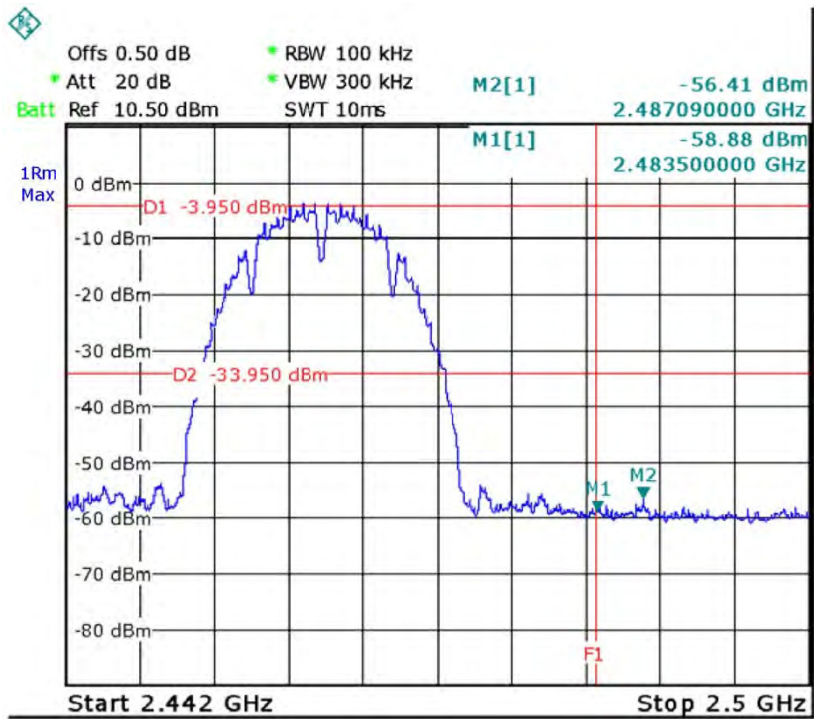


802.11g Band edge-left side

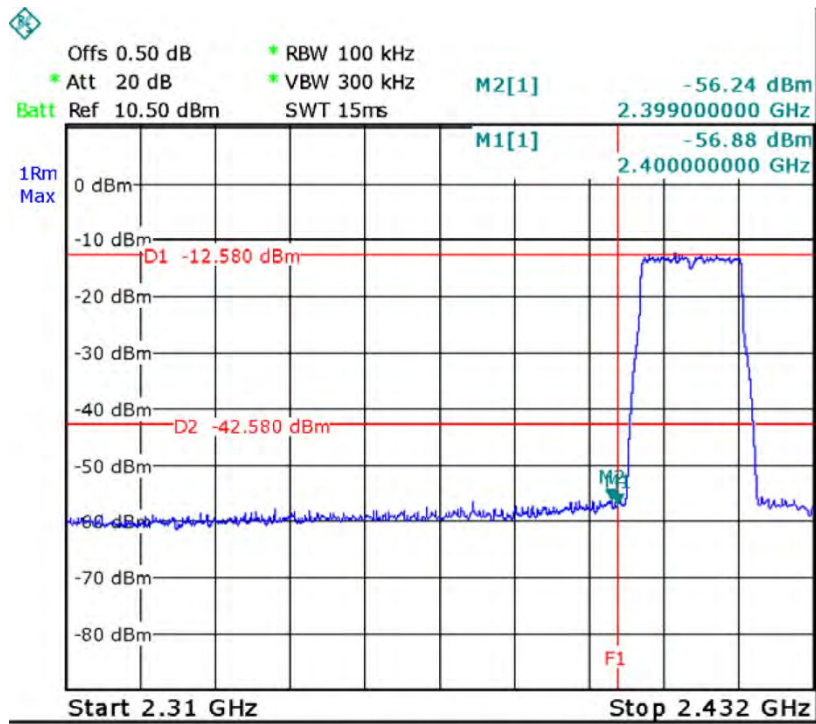


802.11g Band edge-right side

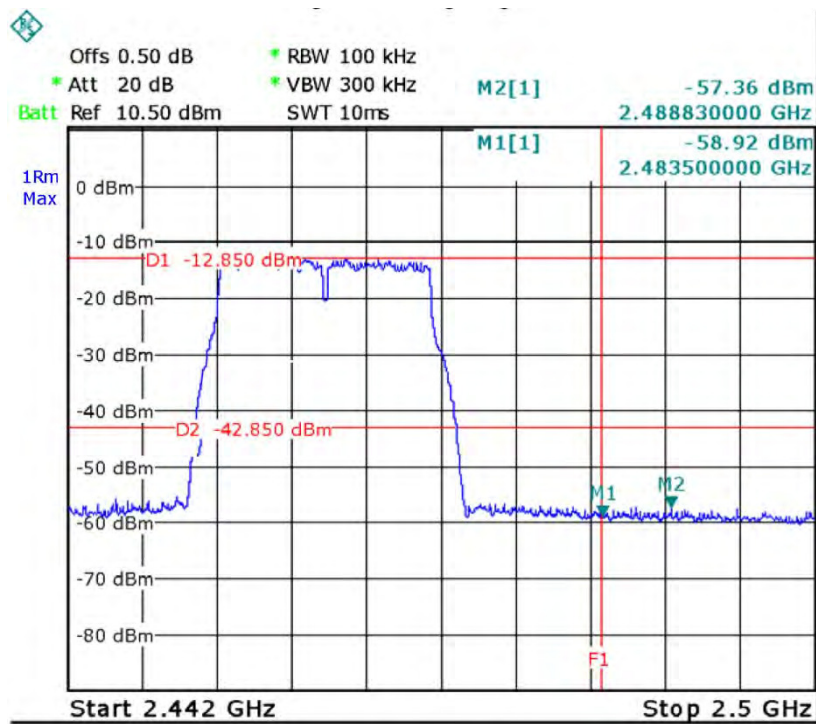


802.11n-HT20 Band edge-left side

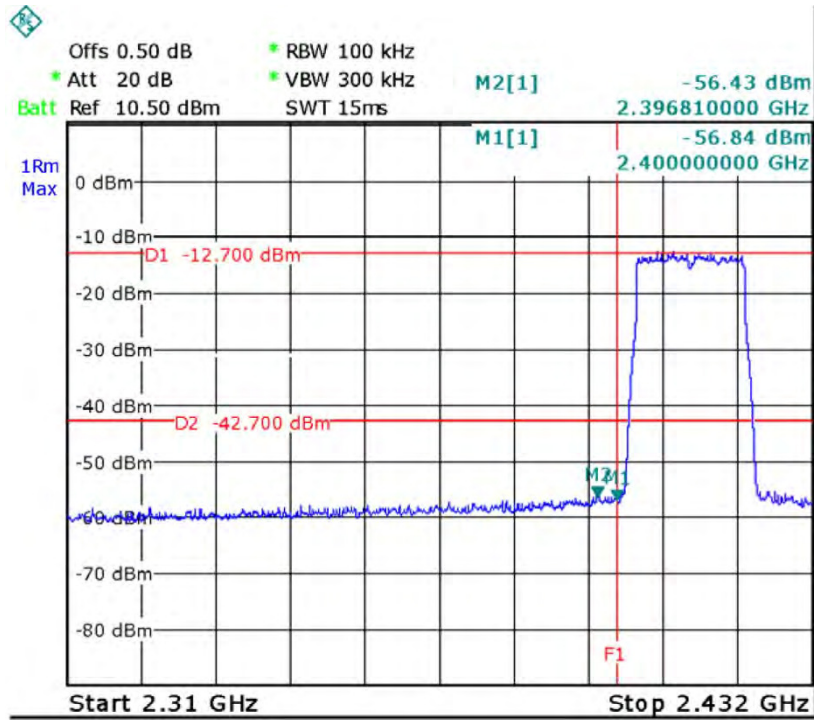


802.11n-HT20 Band edge-right side

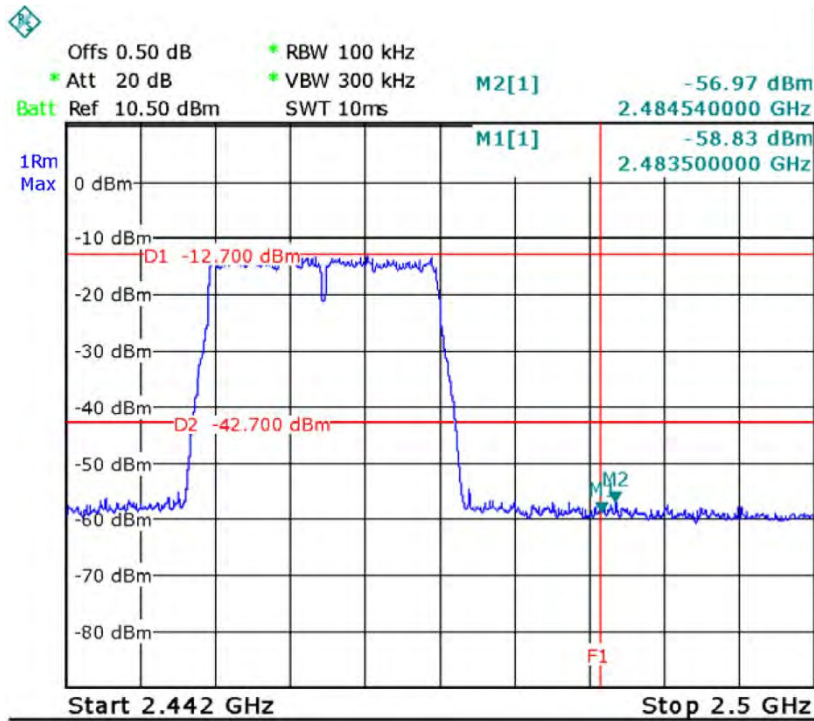

802.11n-HT40 Band edge-left side

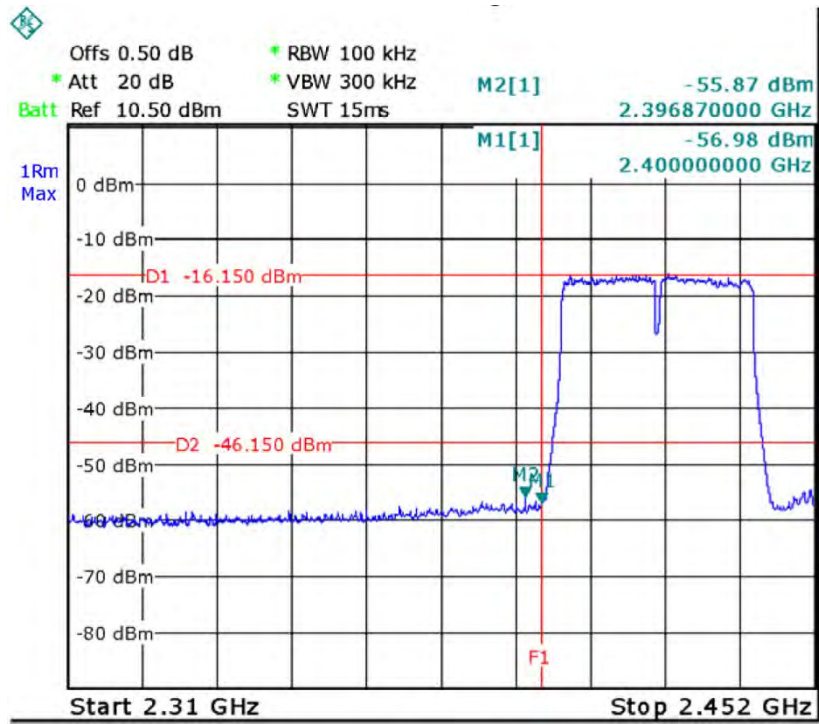

802.11n-HT40 Band edge-right side

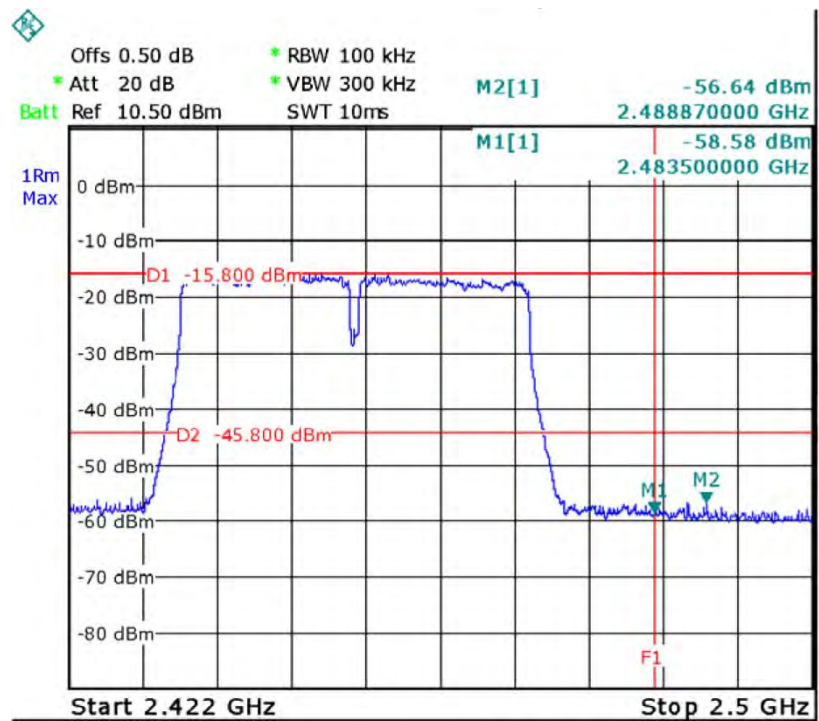

9 6dB Bandwidth Measurement

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R03
Test Limit	Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Mode	: Refer to section 3.3


9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: For BLE, RBW = 30kHz, VBW = 100kHz, For WIFI, RBW = 100kHz, VBW = 300kHz,


9.2 Test Result

Modulation	Bandwidth(MHz)			Limit
	Low Channel	Middle Channel	High Channel	
GFSK(BLE)	0.713	0.713	0.713	≥500kHz
802.11b	10.06	10.06	10.06	≥500kHz
802.11g	16.62	16.62	16.62	≥500kHz
802.11n-HT20	17.84	17.84	17.84	≥500kHz
802.11n-HT40	36.56	36.56	36.56	≥500kHz


GFSK(BLE) Low Channel

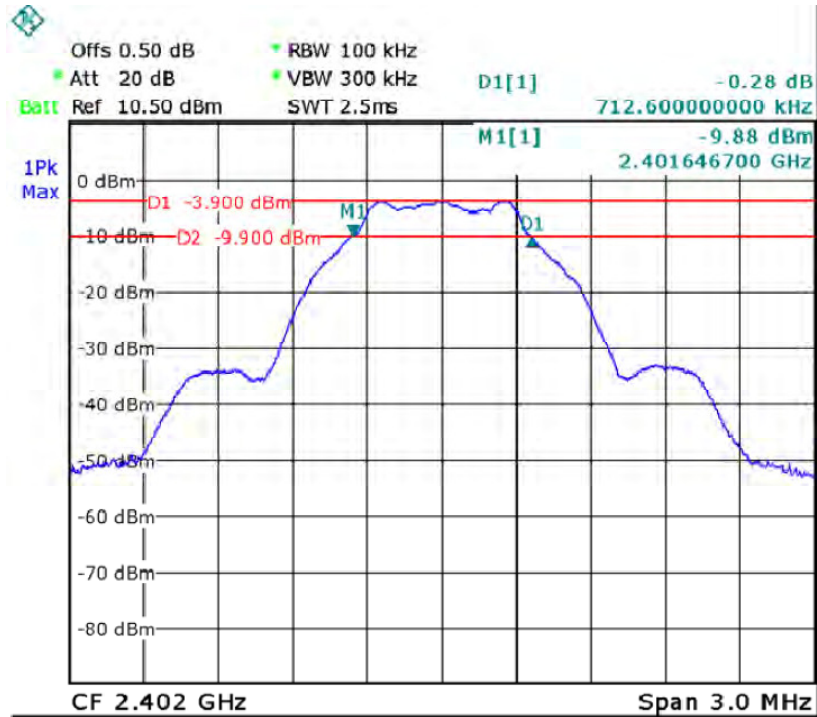


GFSK(BLE) Middle Channel

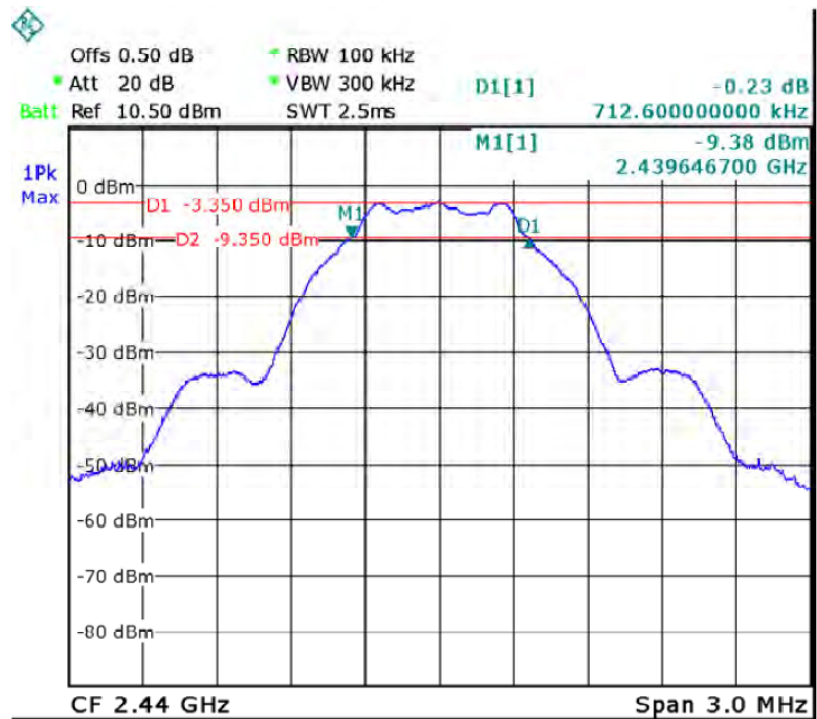


GFSK(BLE) High Channel

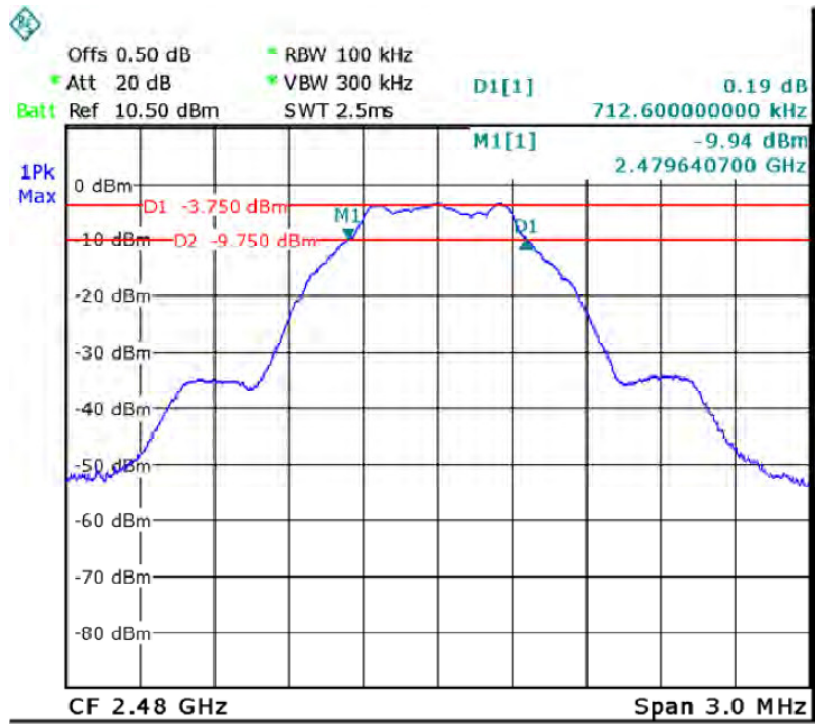


802.11b Low Channel

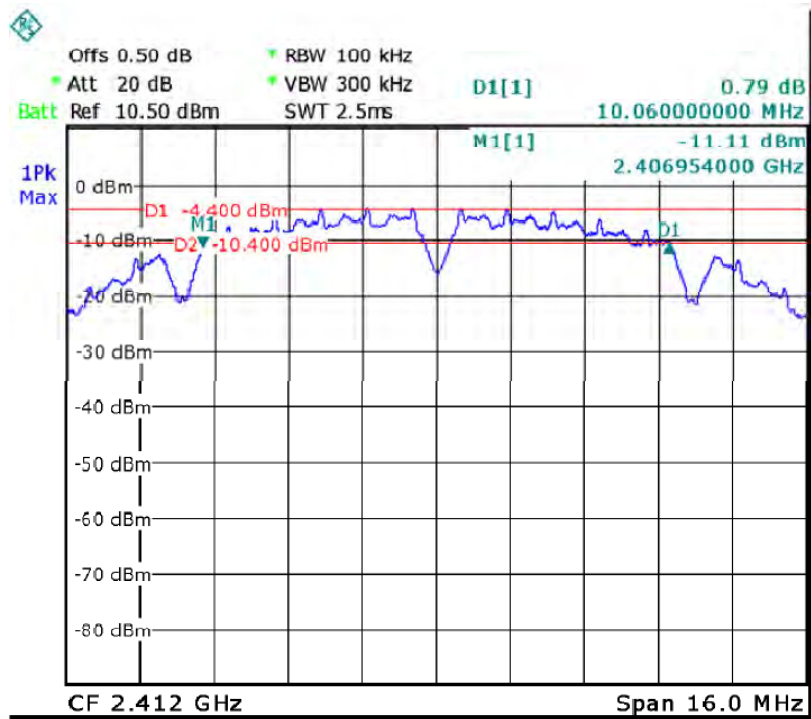


802.11b Middle Channel

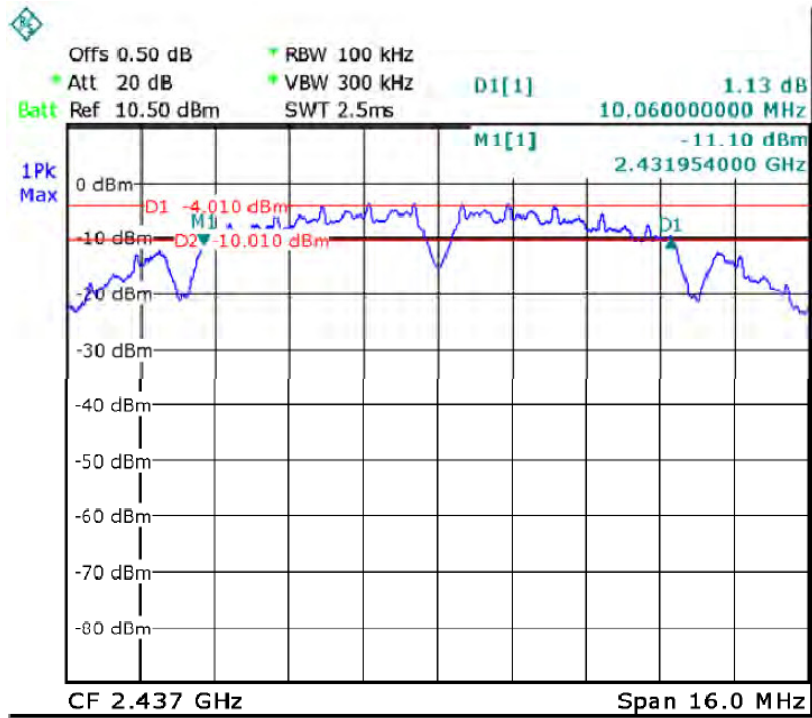


802.11b High Channel

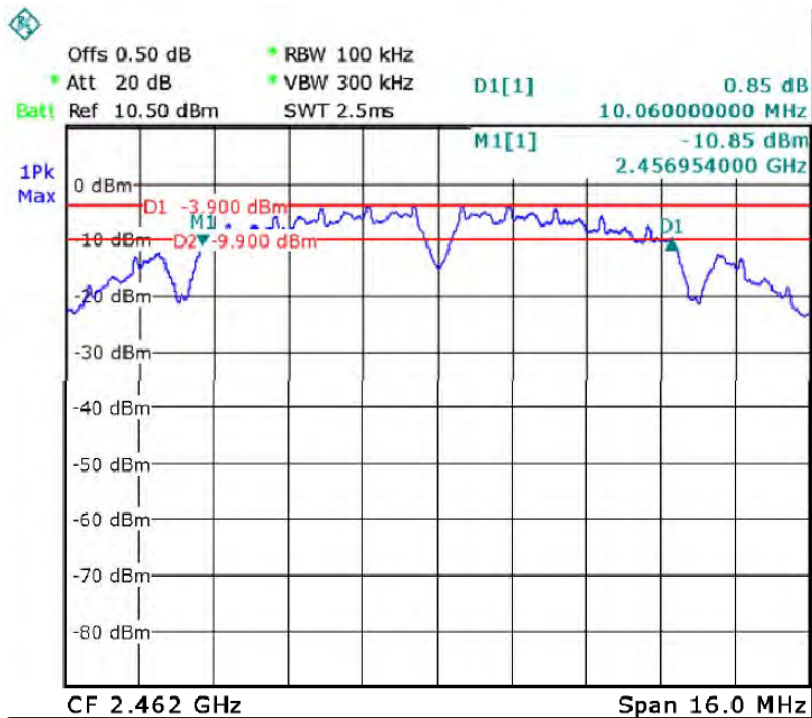


802.11g Low Channel

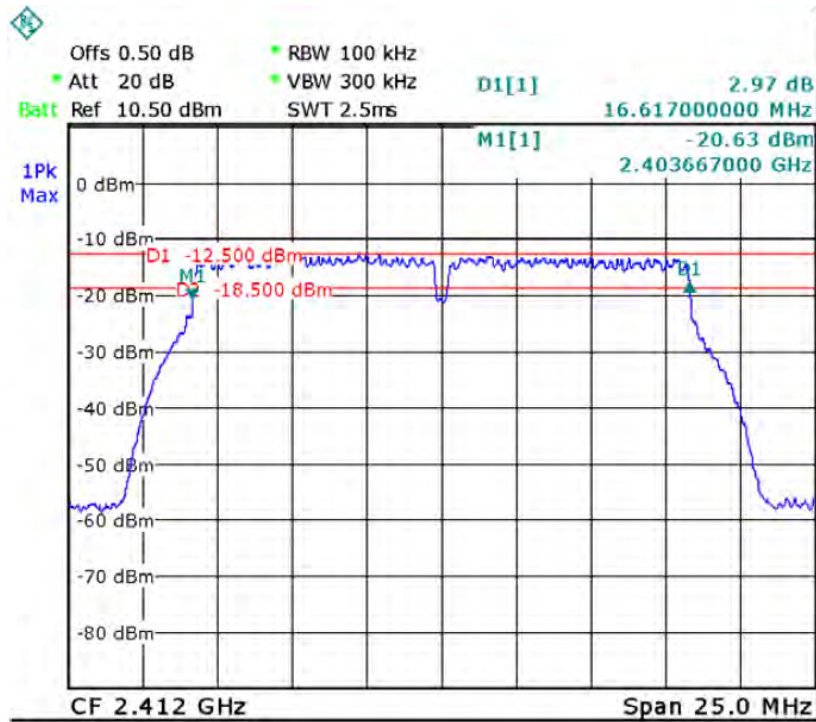


802.11g Middle Channel

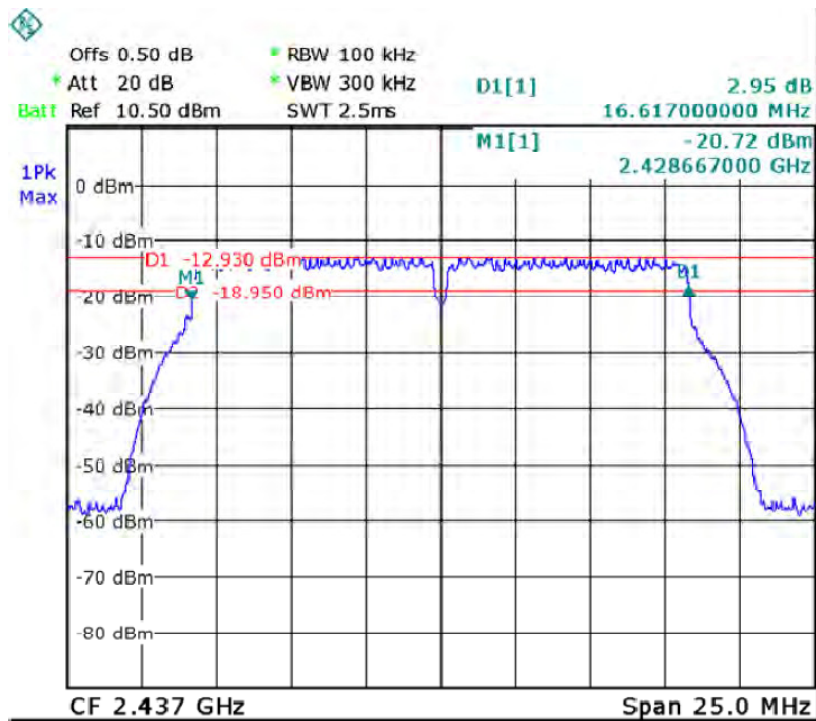


802.11g High Channel

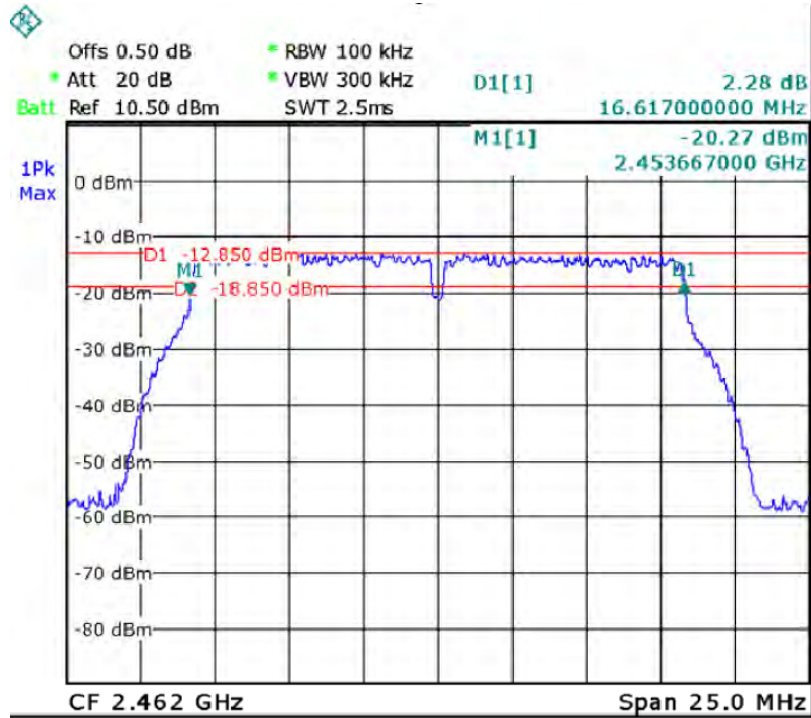


802.11n-HT20 Low Channel

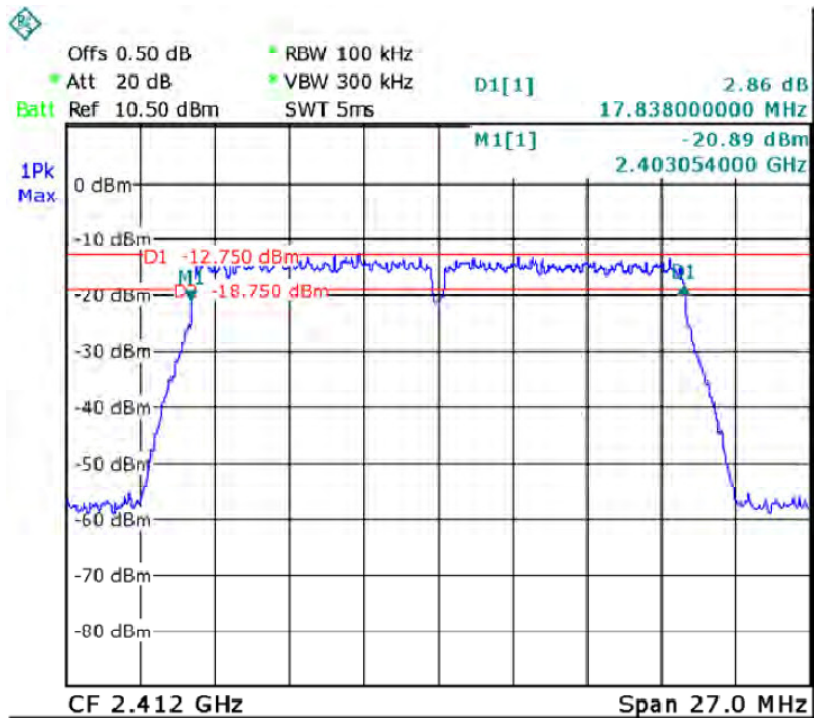


802.11n-HT20 Middle Channel

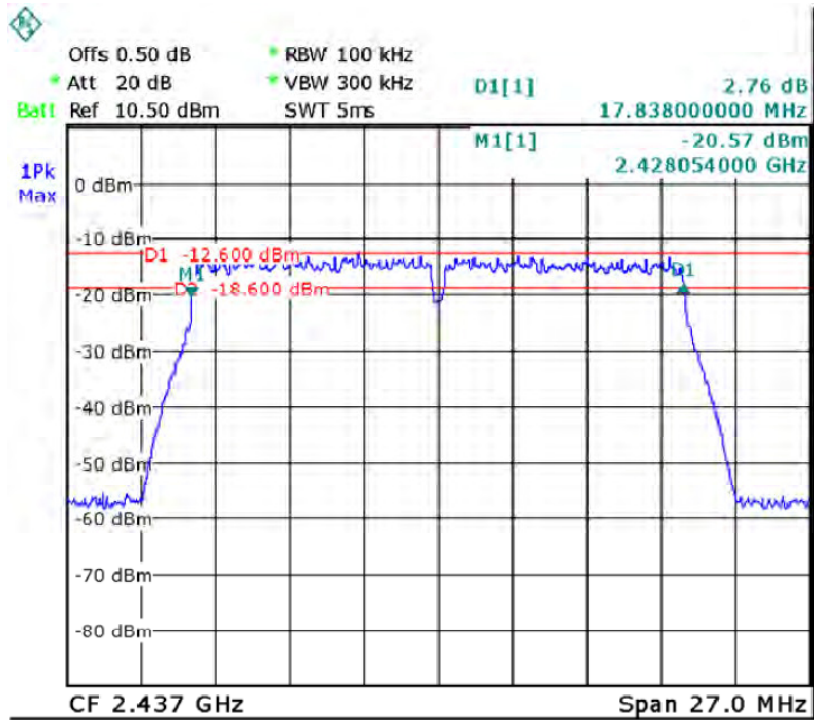


802.11n-HT20 High Channel

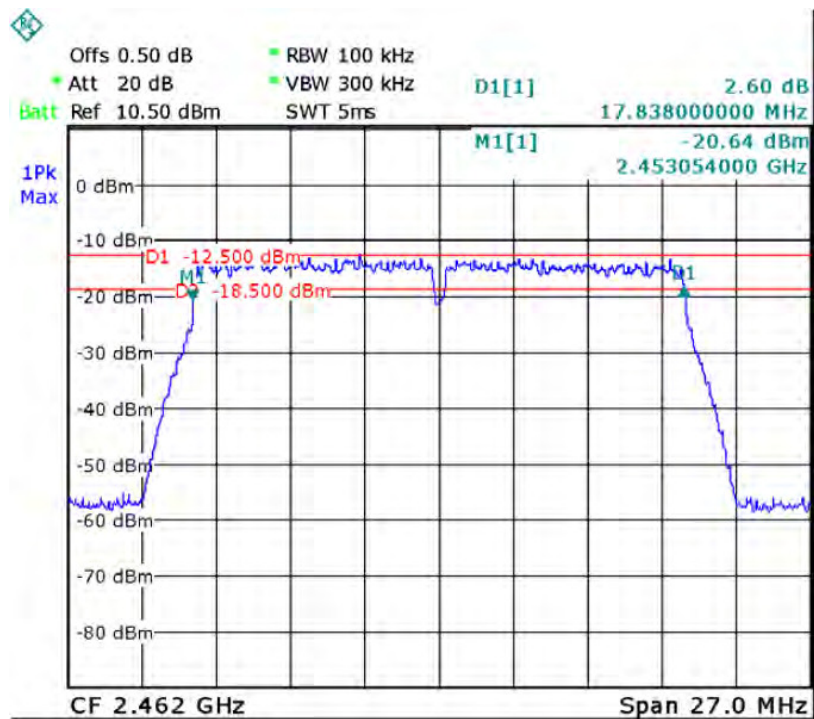


802.11n-HT40 Low Channel

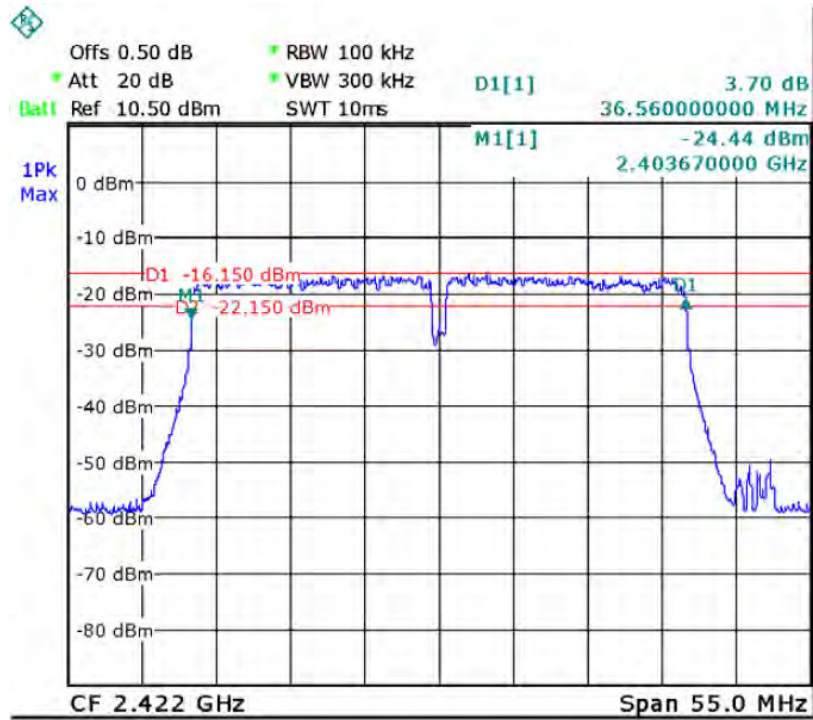

802.11n-HT40 Middle Channel

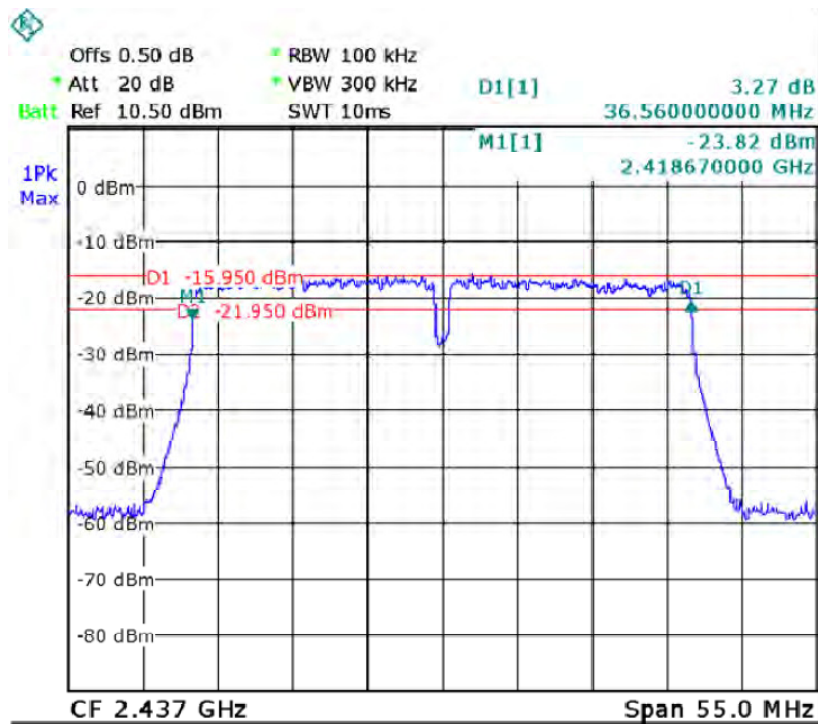

802.11n-HT40 High Channel

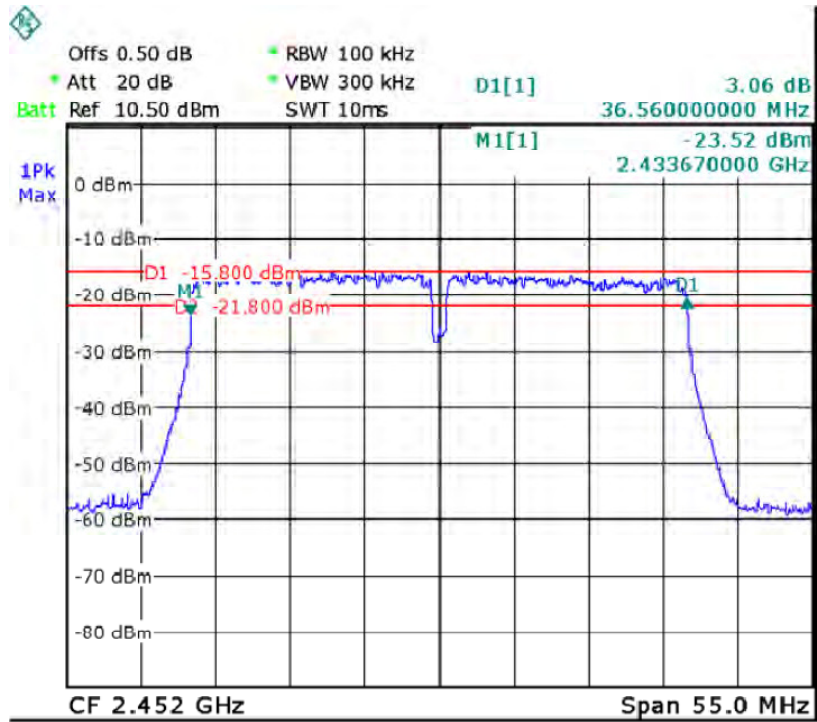

10 Maximum Peak Output Power

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R03
Test Limit	: Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.
Test Mode	: Refer to section 3.3

10.1 Test Procedure

KDB 558074 D01 DTS Meas Guidance v03r03

section 9.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW \geq 3 RBW.
- c) Set span \geq 3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 9.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.


- a) Set the RBW = 1 MHz.
- b) Set the VBW \geq 3 RBW
- c) Set the span \geq 1.5 x DTS bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak

detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.


10.2 Test Result

Modulation	Maximum Peak Output Power (dBm)			Limit
	Low Channel	Middle Channel	High Channel	
GFSK(BLE)	-2.91	-2.41	-2.79	1W(30dBm)
802.11b	9.20	9.35	9.40	1W(30dBm)
802.11g	9.16	9.27	9.22	1W(30dBm)
802.11n-HT20	9.15	9.22	9.27	1W(30dBm)
802.11n-HT40	9.21	9.40	9.42	1W(30dBm)


GFSK(BLE) Low Channel

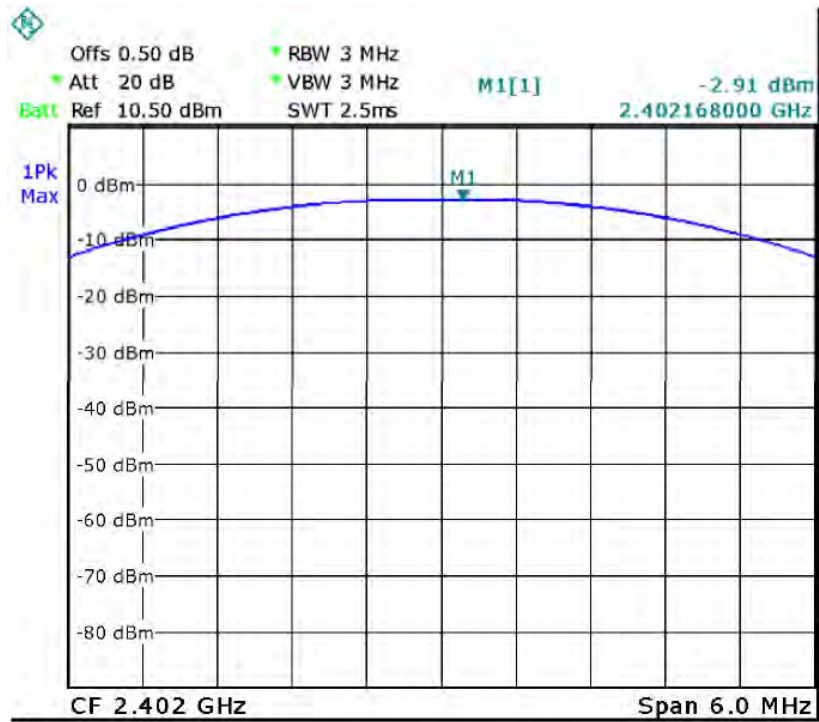


GFSK(BLE) Middle Channel

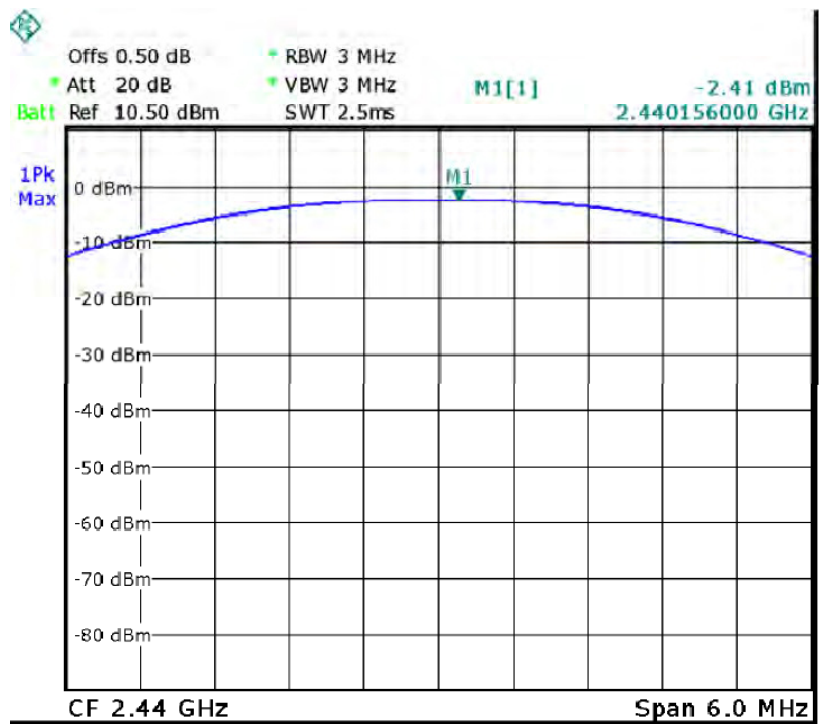


GFSK(BLE) High Channel

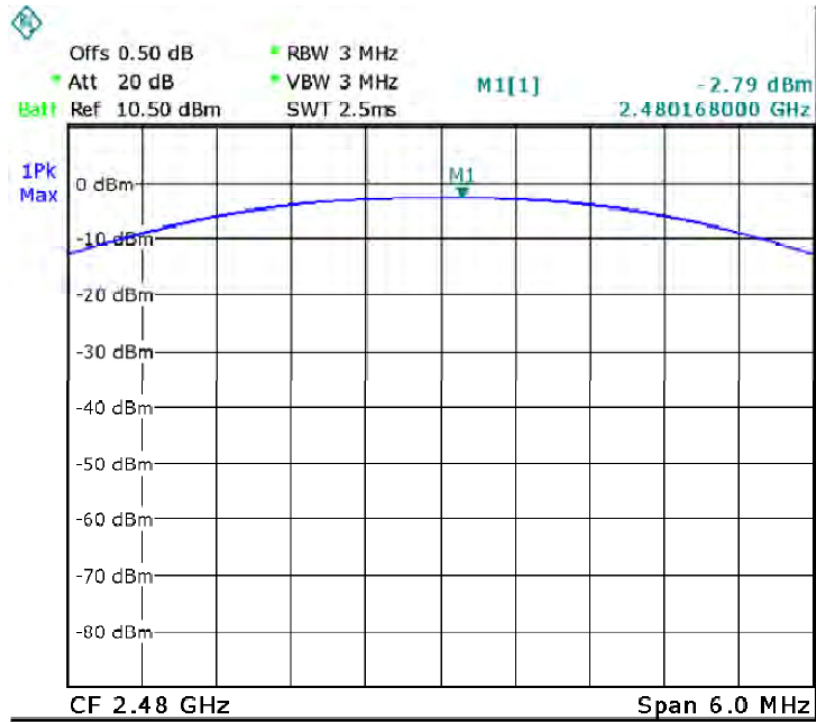


802.11b Low Channel

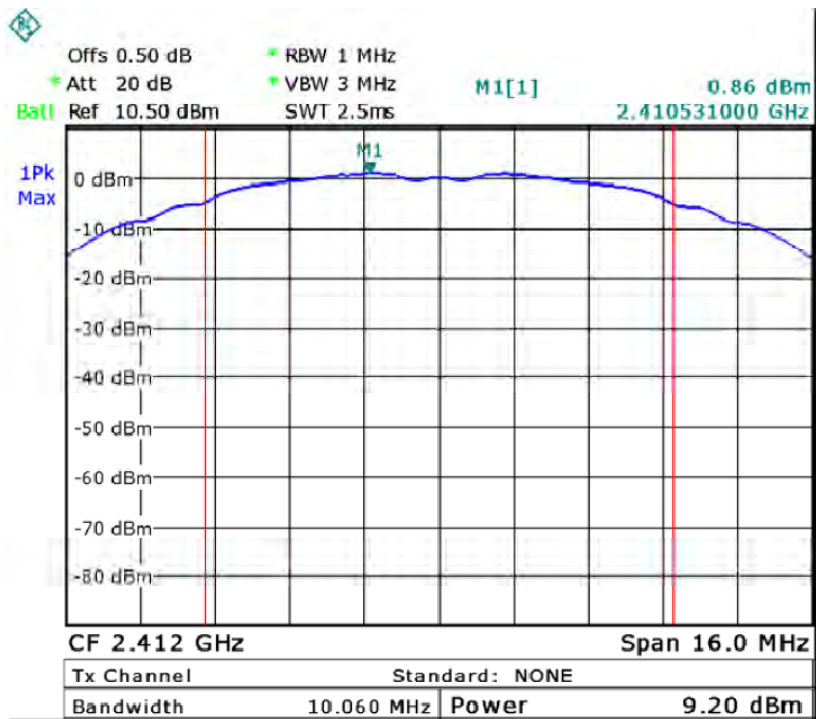


802.11b Middle Channel

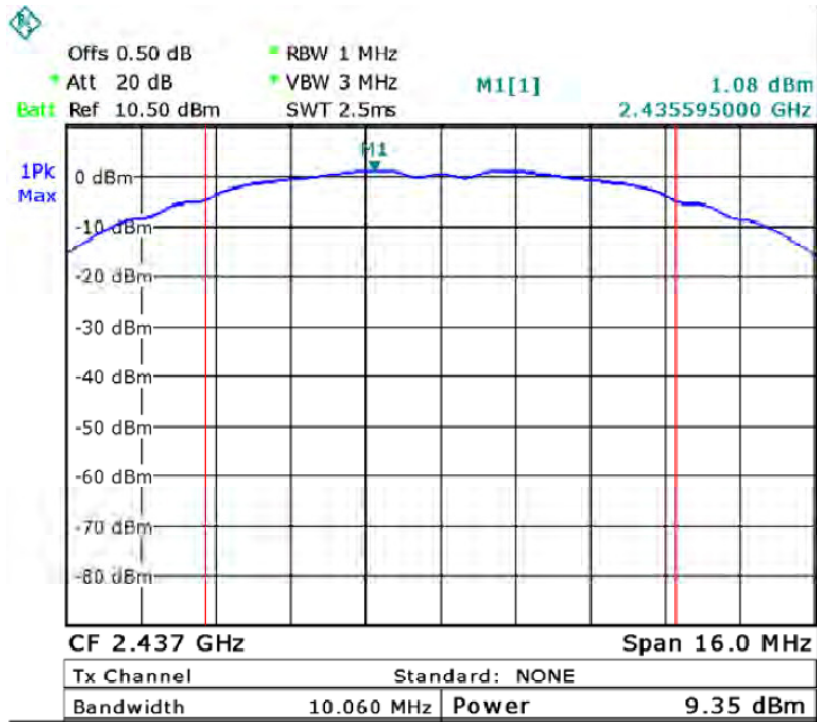


802.11b High Channel

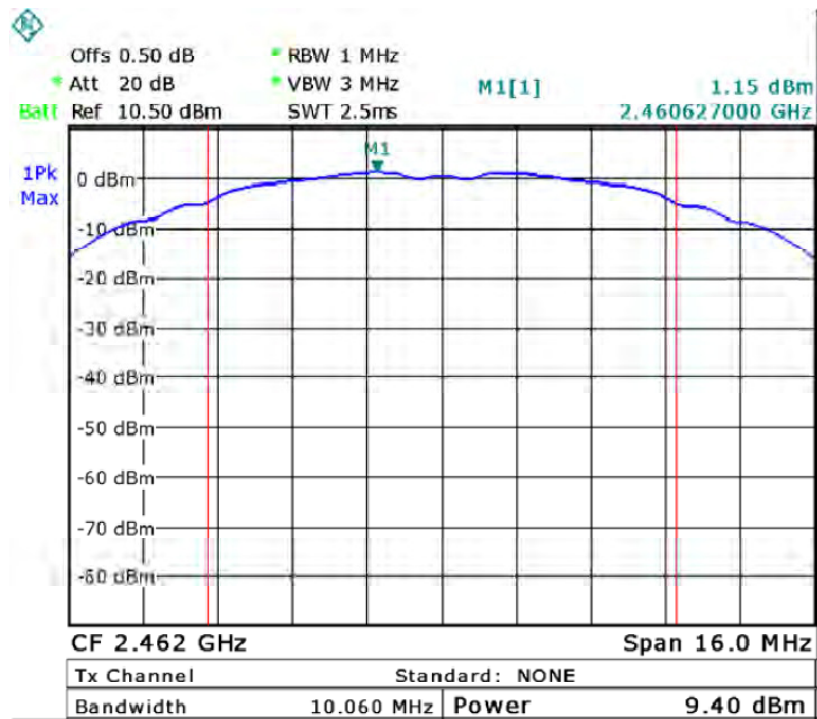


802.11g Low Channel

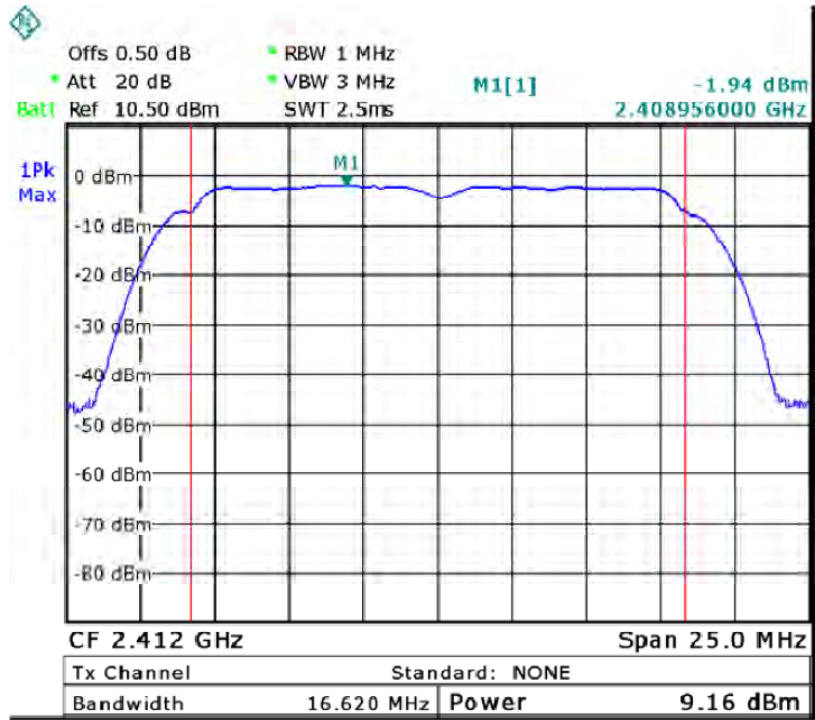


802.11g Middle Channel

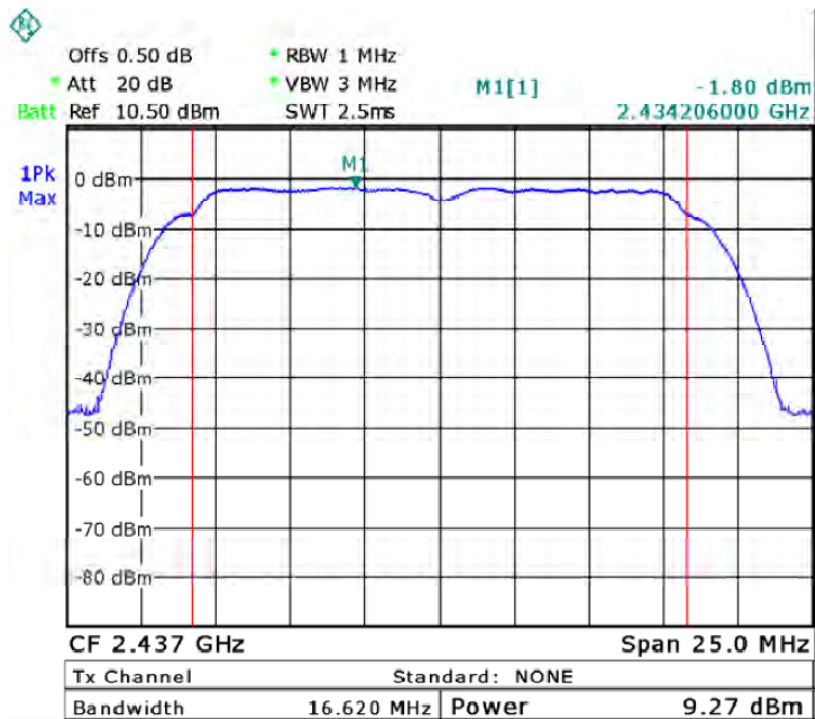


802.11g High Channel

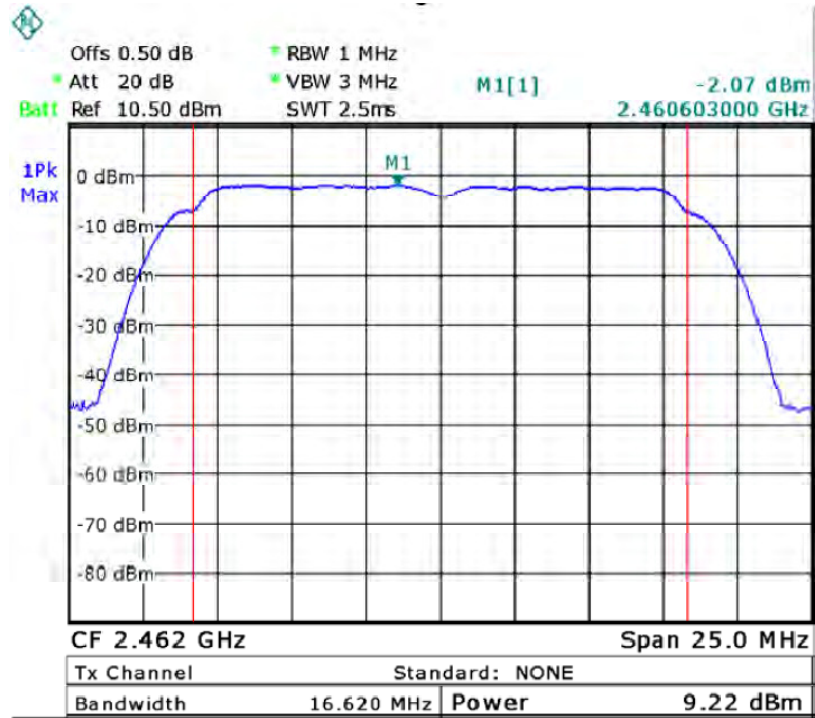


802.11n-HT20 Low Channel

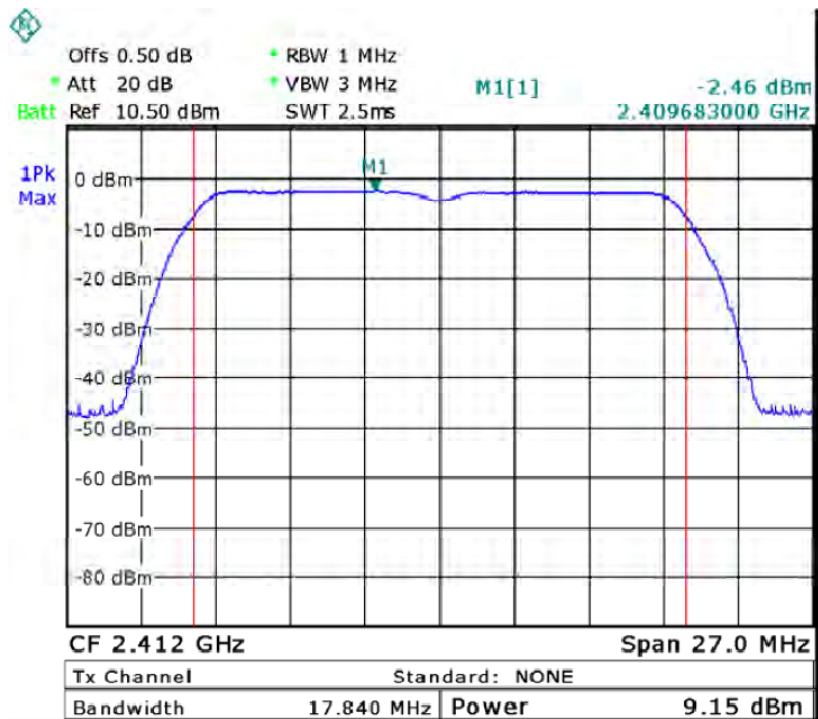


802.11n-HT20 Middle Channel

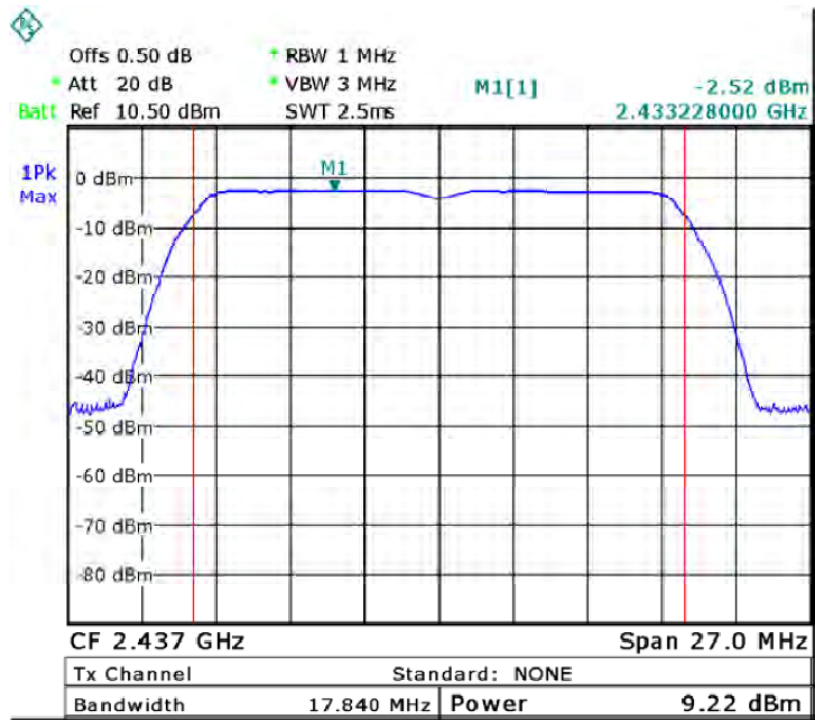


802.11n-HT20 High Channel

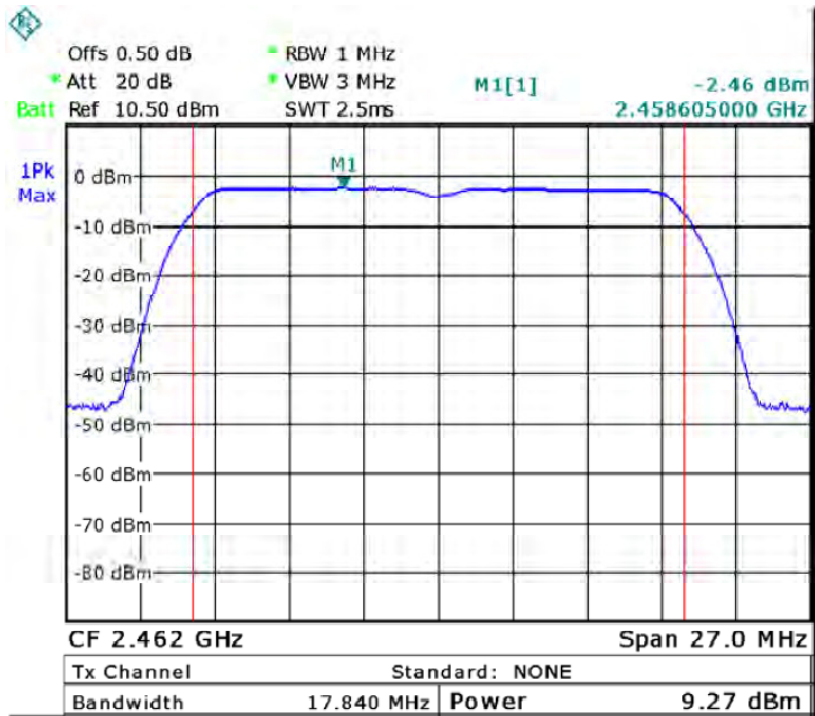


802.11n-HT40 Low Channel

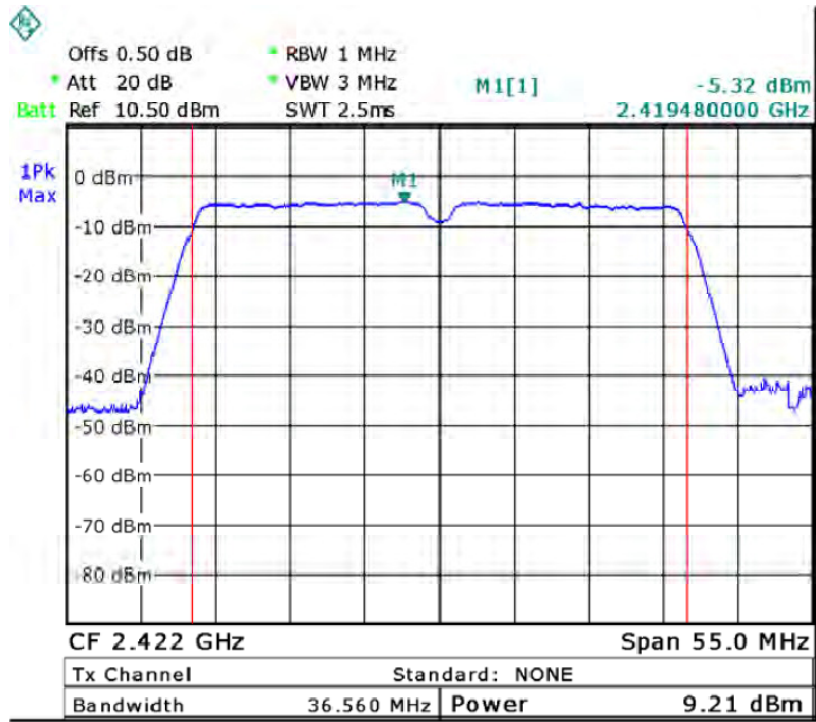

802.11n-HT40 Middle Channel

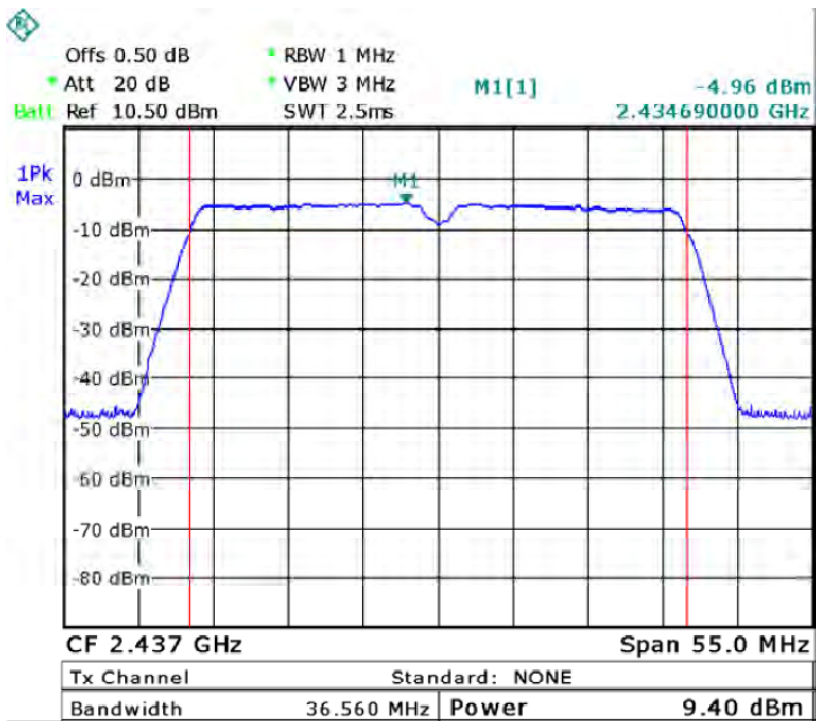

802.11n-HT40 High Channel

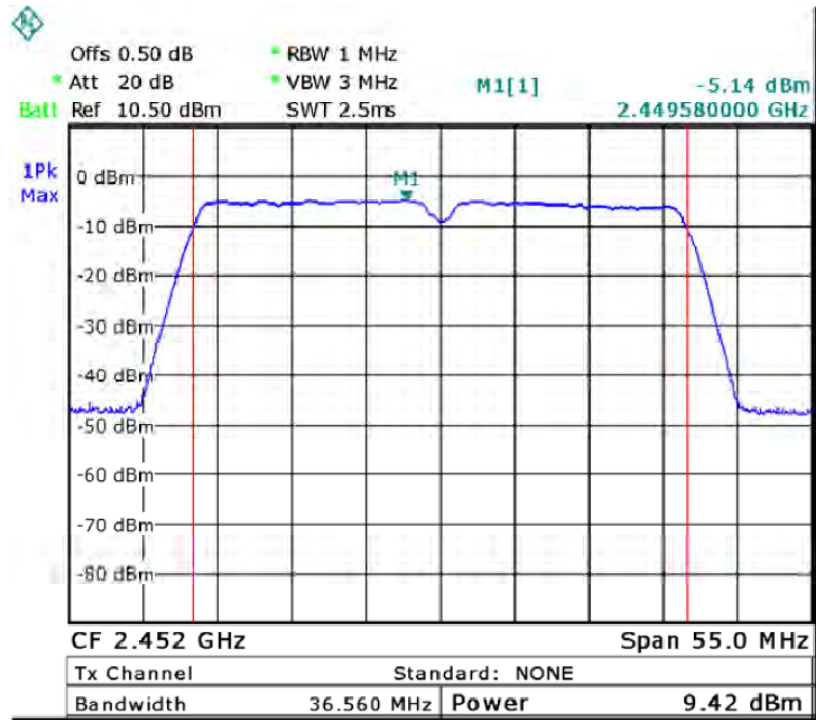

11 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R03
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
Test Mode	: Refer to section 3.3

11.1 Test Procedure


KDB 558074 D01 DTS Meas Guidance v03r03

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


11.2 Test Result

Modulation	Power Spectral density (dBm/3kHz)			Limit
	Low Channel	Middle Channel	High Channel	
GFSK(BLE)	-18.79	-17.98	-18.48	8dBm/3kHz
802.11b	-22.28	-22.46	-22.18	8dBm/3kHz
802.11g	-26.76	-27.18	-26.90	8dBm/3kHz
802.11n-HT20	-26.42	-27.13	-26.75	8dBm/3kHz
802.11n-HT40	-29.35	-28.61	-28.89	8dBm/3kHz


GFSK(BLE) Low Channel

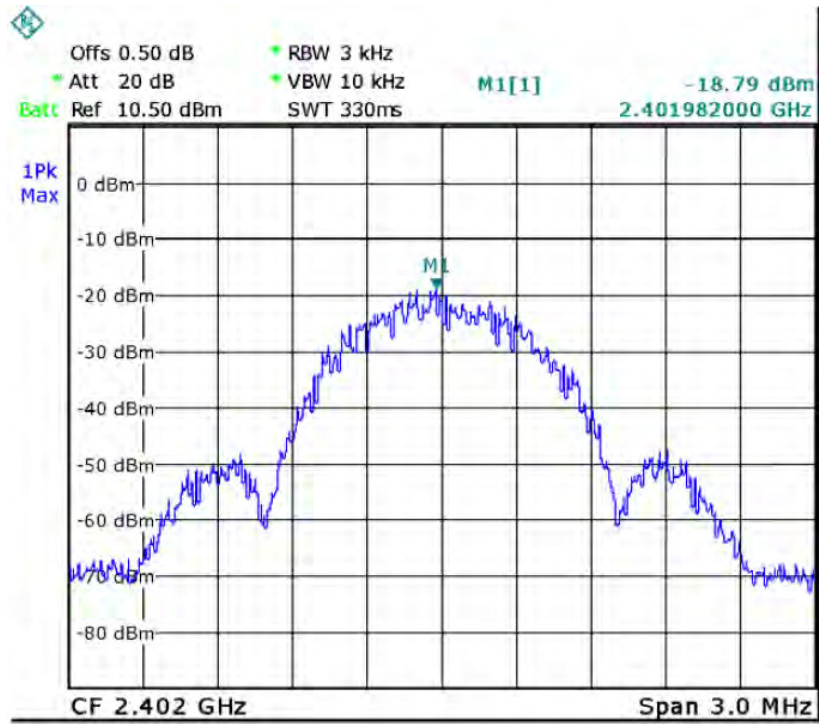


GFSK(BLE) Middle Channel

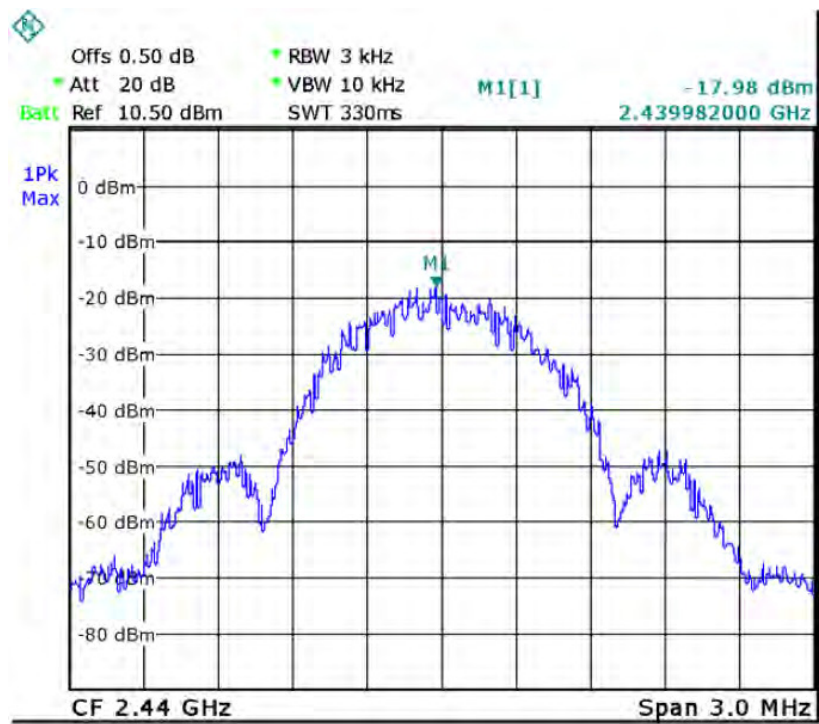


GFSK(BLE) High Channel

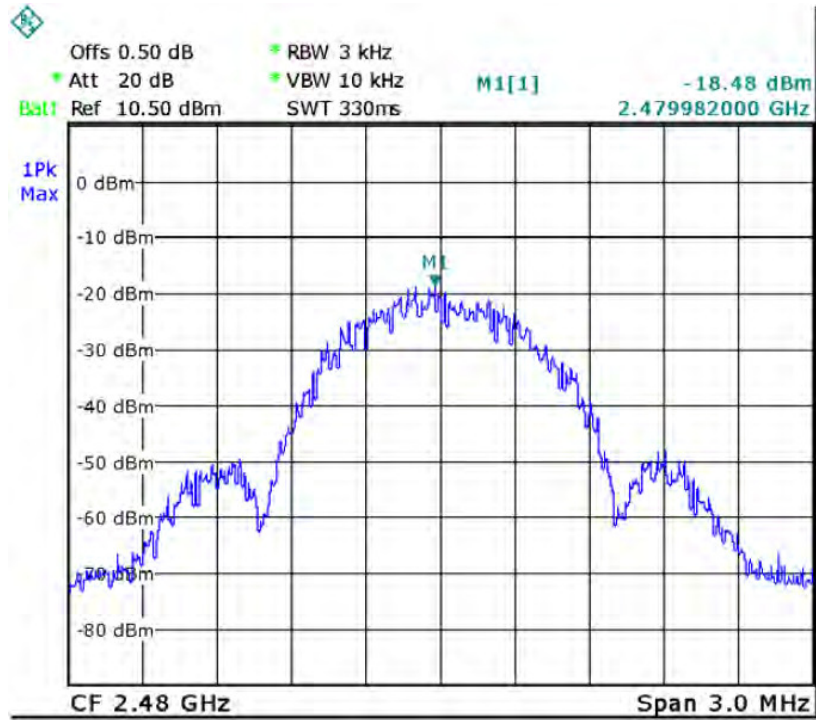


802.11b Low Channel

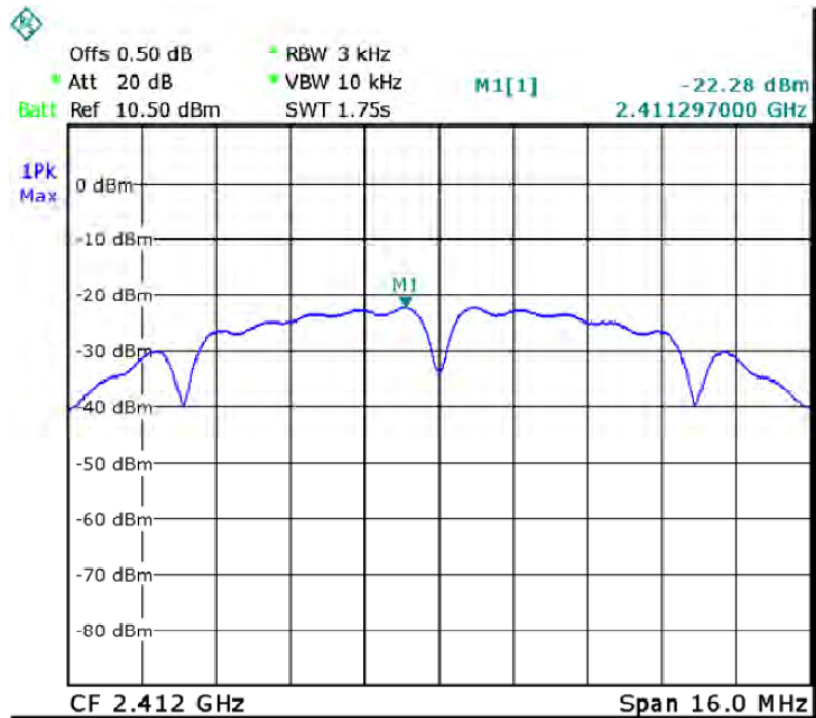


802.11b Middle Channel

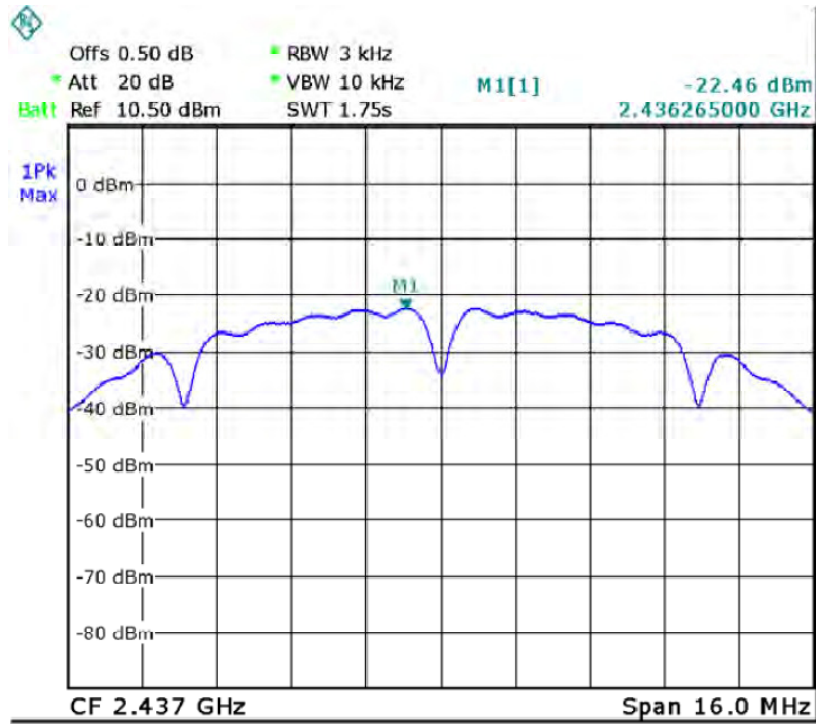


802.11b High Channel

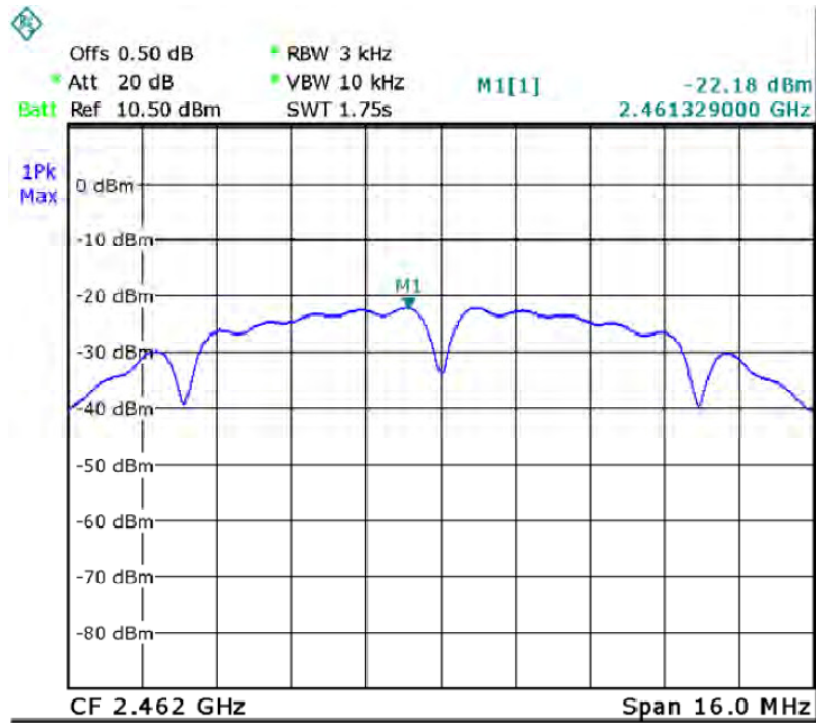


802.11g Low Channel

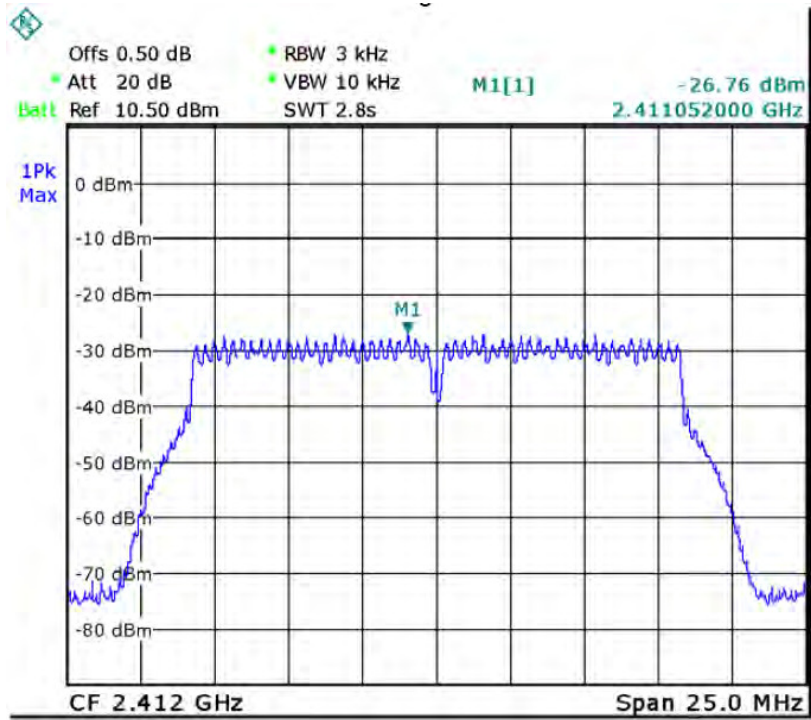


802.11g Middle Channel

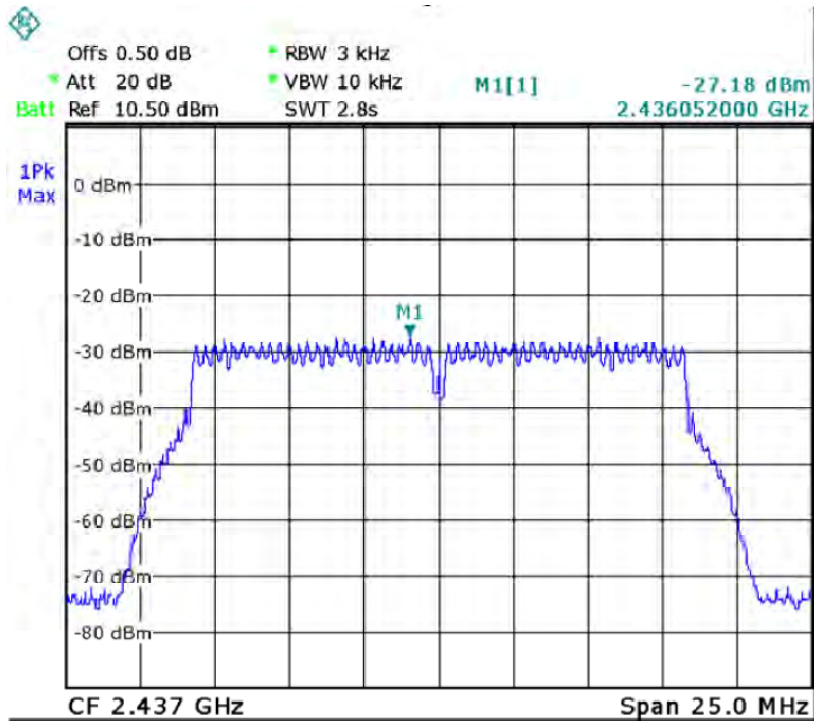


802.11g High Channel

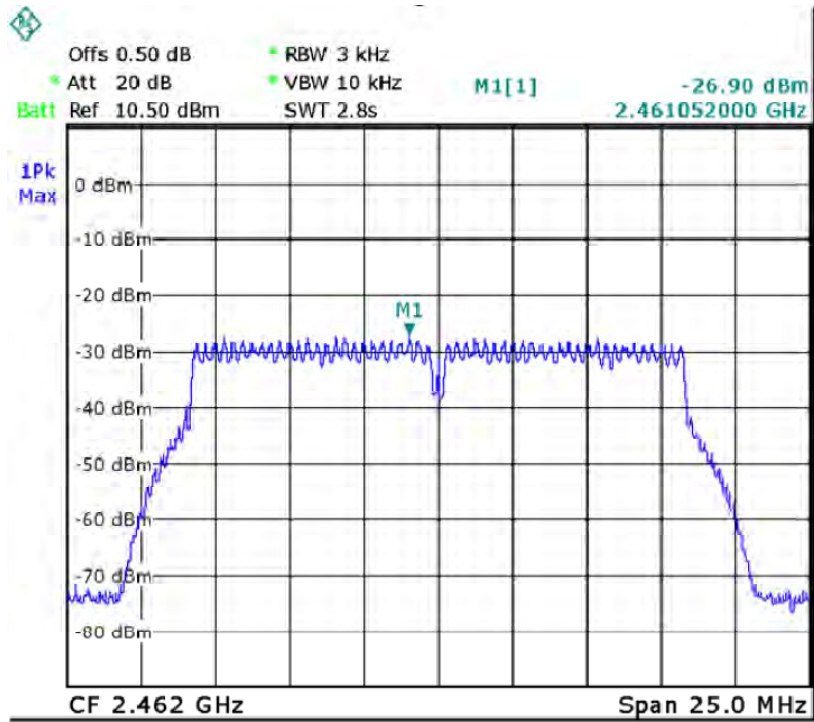


802.11n-HT20 Low Channel

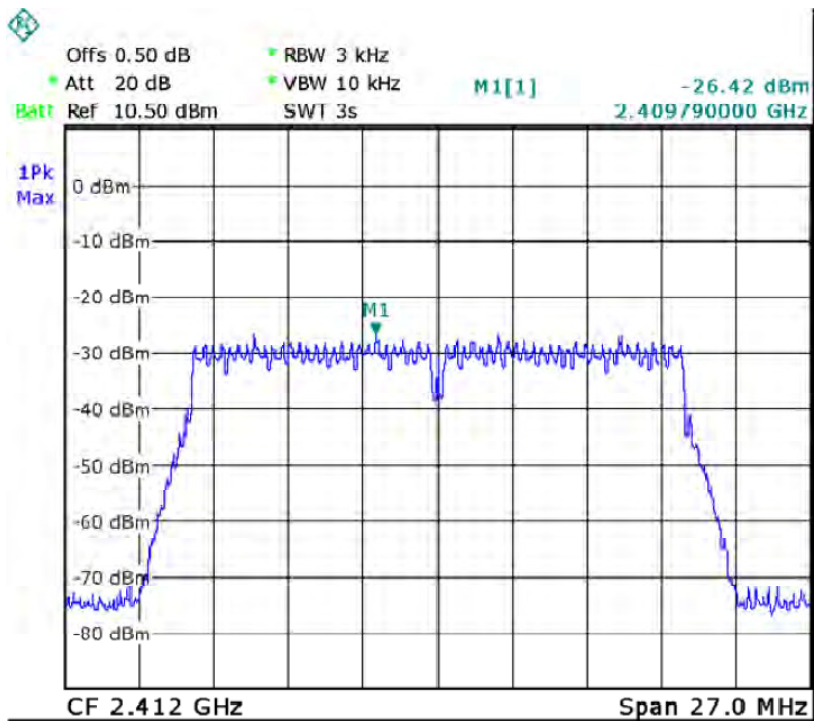


802.11n-HT20 Middle Channel

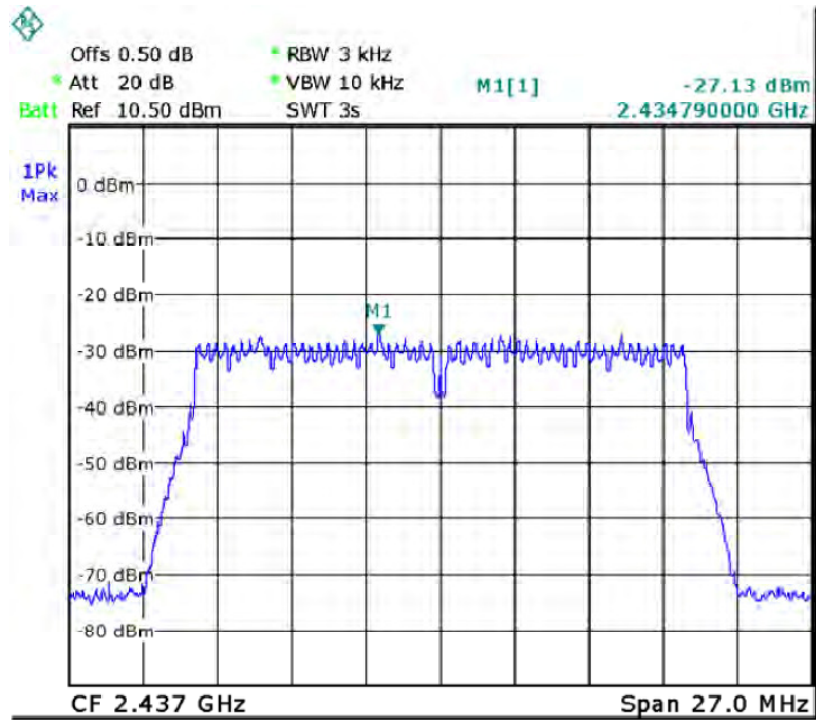


802.11n-HT20 High Channel

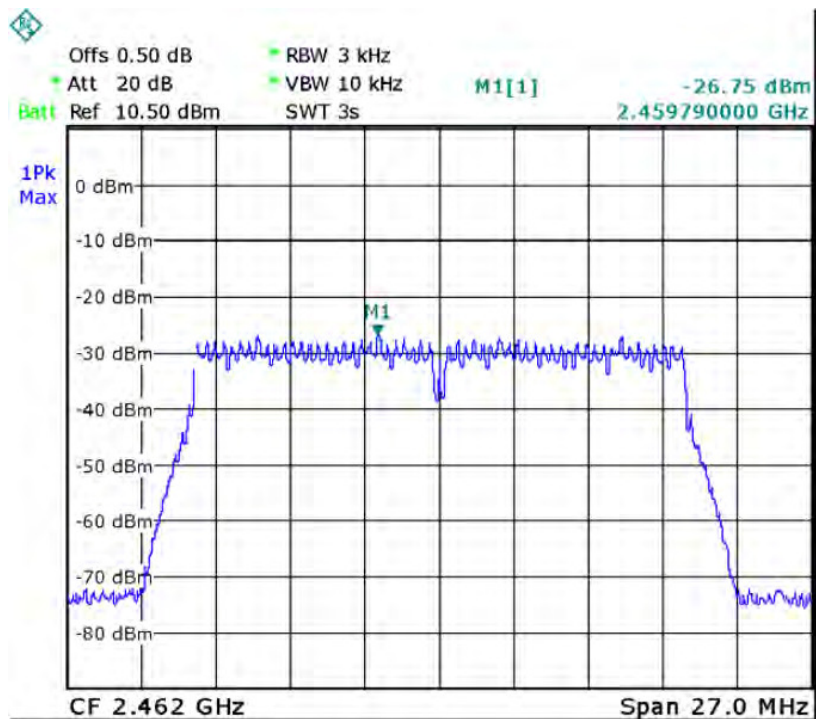


802.11n-HT40 Low Channel

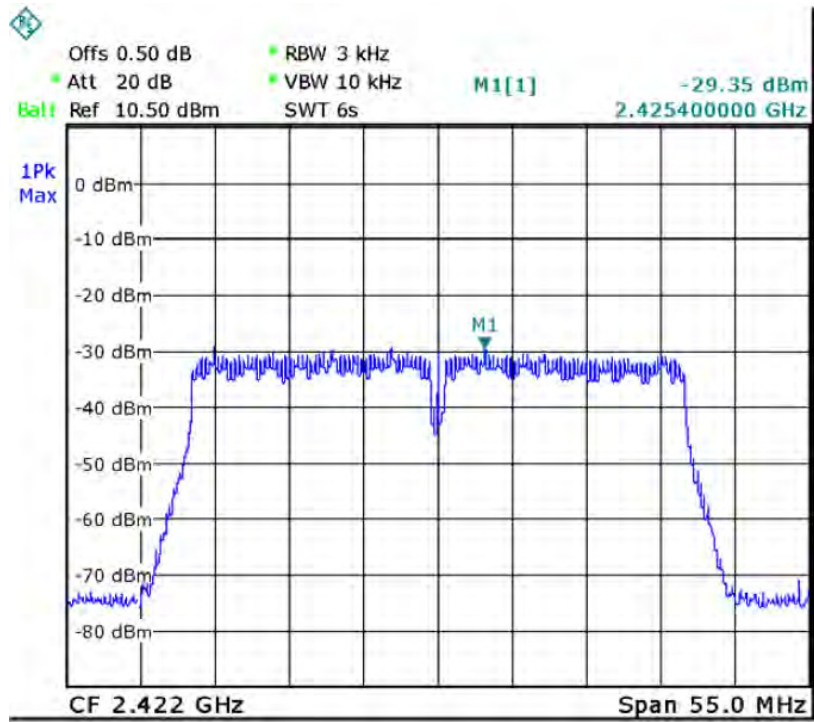

802.11n-HT40 Middle Channel

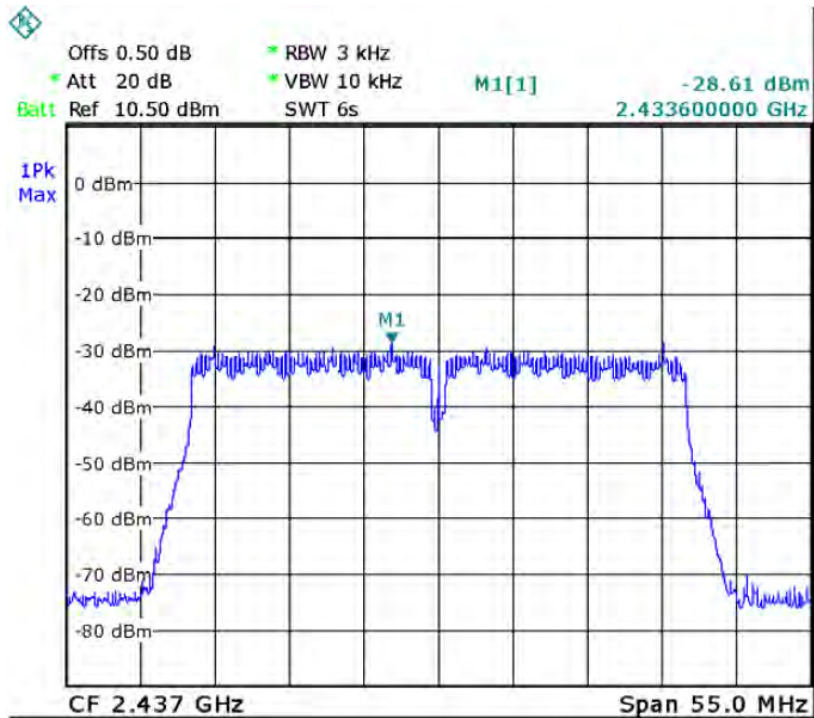

802.11n-HT40 High Channel

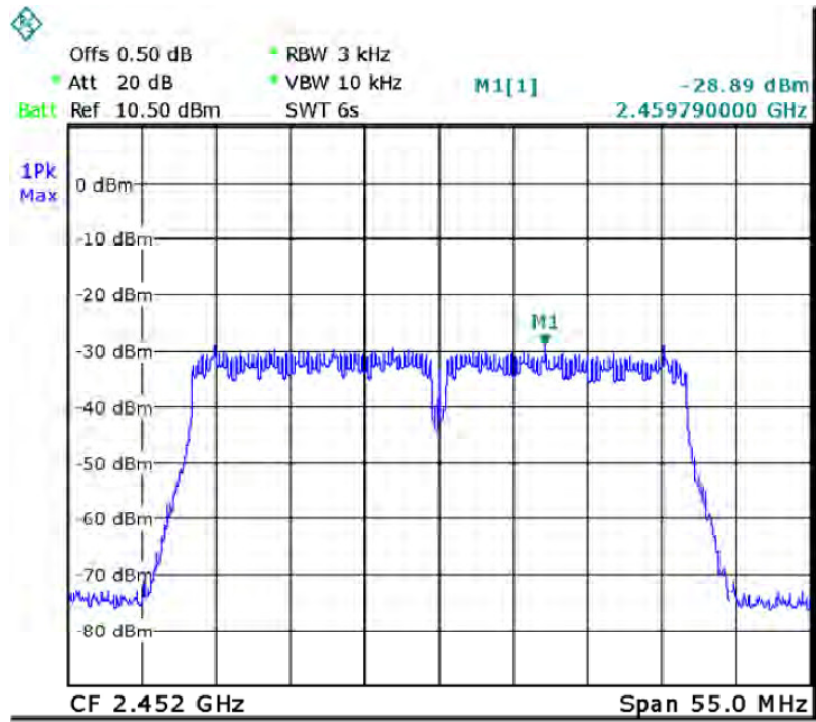


12 Antenna Requirement

According to the FCC part15.203, a transmitter can only be sold or operated with antennas with which it was approved. This product has an internal permanent antenna, it meet the requirement of this section.

13 Test Setup

Spurious Emissions
From 30MHz-1000MHz

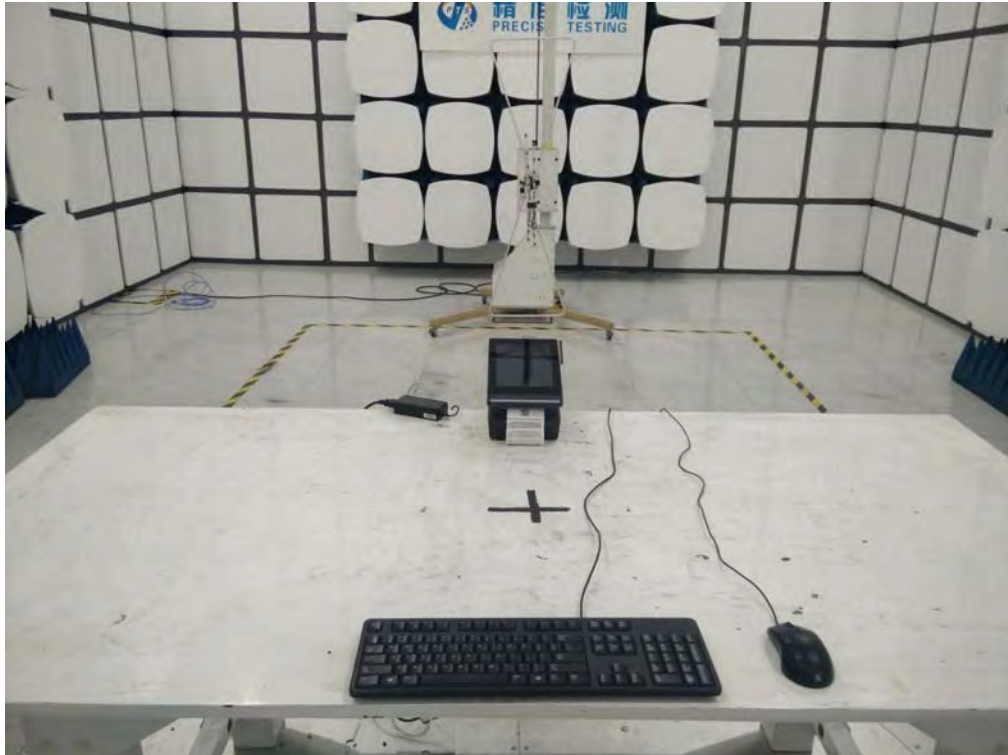

Above 1GHz



Conducted Emissions



***** THE END REPORT*****