



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247 TEST REPORT

For

Hangzhou Meari Technology Co., Ltd.

Room 604-605, Building 1, No.768 Jianghong Road, Changhe street, Binjiang District, Hangzhou,
Zhejiang, China

FCC ID: 2AG7C-BABY2S

Report Type: Original Report	Product Type: Baby Monitor
Project Engineer:	Tyrone Wang 
Report Number:	RSHA210402002-00C
Report Date:	2021-05-27
Reviewed By:	Oscar Ye  EMC Manager
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS.....	9
TEST EQUIPMENT LIST	11
FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
FCC §15.203 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS.....	15
APPLICABLE STANDARD	15
EUT SETUP.....	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	15
FACTOR & OVER LIMIT CALCULATION.....	16
TEST RESULTS SUMMARY.....	16
TEST DATA	16
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	21
APPLICABLE STANDARD	21
EUT SETUP.....	21
EMI TEST RECEIVER SETUP.....	22
TEST PROCEDURE	22
TEST RESULTS SUMMARY.....	22
TEST DATA	23
FCC §15.247(A) (2) - 6 DB EMISSION BANDWIDTH.....	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST DATA	35
FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	38
FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39

TEST DATA	39
FCC §15.247(E) - POWER SPECTRAL DENSITY.....	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST DATA	41

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Hangzhou Meari Technology Co., Ltd.
Tested Model	Baby 2S
Series Model:	Baby 2T,Speed 15S,Speed 15T
Model Difference:	See Declaration letter
Product Type	Baby Monitor
Power Supply	DC 5 V from adapter
Maximum Conducted Output Power:	29.36 dBm
RF Function:	900MHz SRD
Operating Band/Frequency:	905-925 MHz
Channel Number:	11
Channel Separation:	2 MHz
Modulation Type:	OFDM
Antenna Type:	FPC Antenna
*Maximum Antenna Gain:	-2.46 dBi

Adapter-1 Information:

Model: GTA92-0501000US

Input: AC100-240V~50/60Hz 0.3A

Output: USB-A 5.0V,1.0A,5.0W

Adapter-2 Information:

Model: TPA-46B050100UU

Input: AC100-240V~50/60Hz,0.2A

Output: 5.0V, 1000mA

Note*: The antenna gain was provided by the applicant.

All measurement and test data in this report was gathered from production sample serial number: RSHA210402002-1. (Assigned by the BACL. The EUT supplied by the applicant was received on 2021-04-02)

Objective

This report is prepared on behalf of *Hangzhou Meari Technology Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions' rules.

The tests were performed in order to determine Compliant with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS submissions with FCC ID: 2AG7C-BABY2S.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and FCC 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliant Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Test channel list as below:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	905	7	917
2	907	8	919
3	909	9	921
4	911	10	923
5	913	11	925
6	915	---	---

EUT was tested with Channel 1, 6 and 11.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software


RF test tool: XCOM

Mode	Channel	*Power Level Setting
SRD	Low	Default
	Middle	Default
	High	Default

Note: The power level setting was declared by the applicant.

Duty Cycle:

Middle Channel

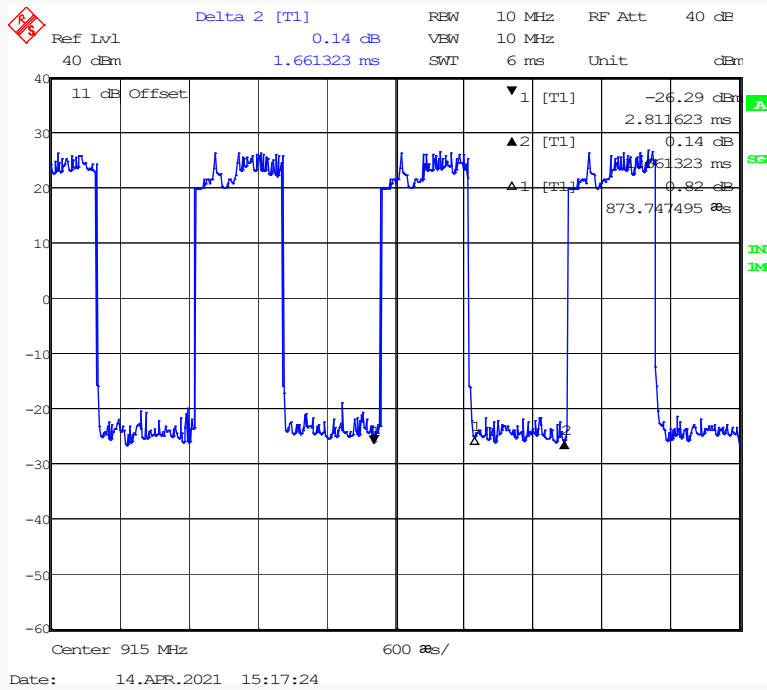

Mode	Duty Cycle (%)	T(ms)	50/T(kHz)	10log(1/x)
SRD	52.62	0.874	57.21	2.79

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
SanDisk	SD Card	32GB	72812VCP912S

External I/O Cable


Cable Description	Length(m)	From Port	To Port
Power Cable1	2.0	EUT	Adapter
Power Cable2	1.0	Socket	LISN/AC Source

Block Diagram of Test Setup


For Conducted Emissions:

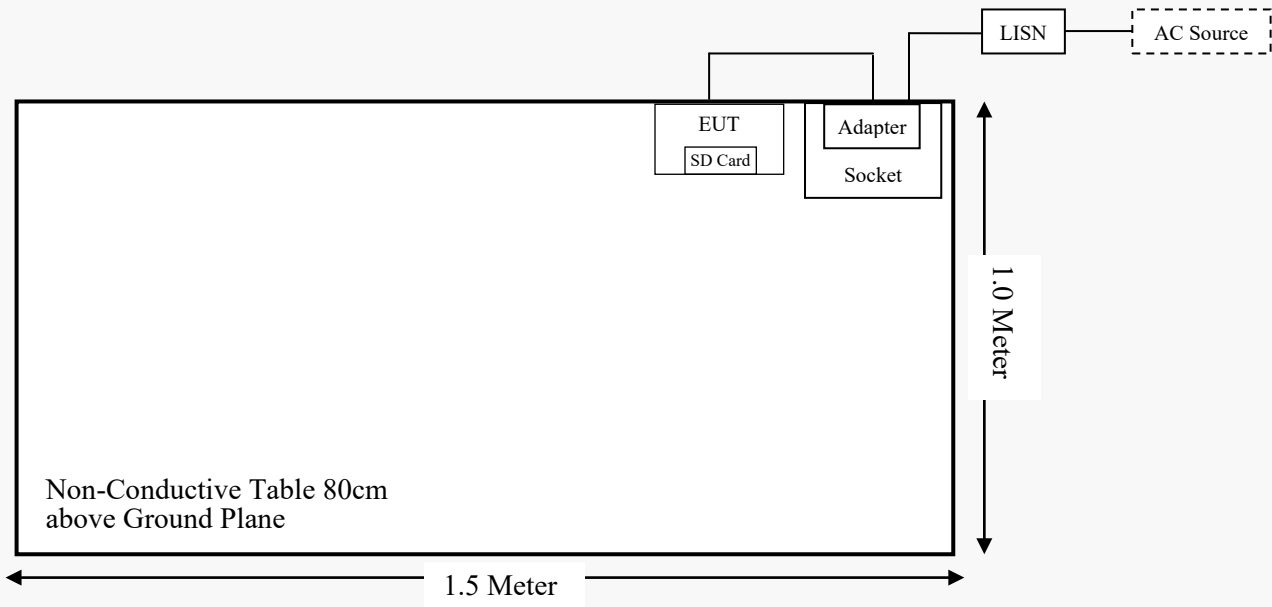

For Radiated Emissions(Below 1GHz):

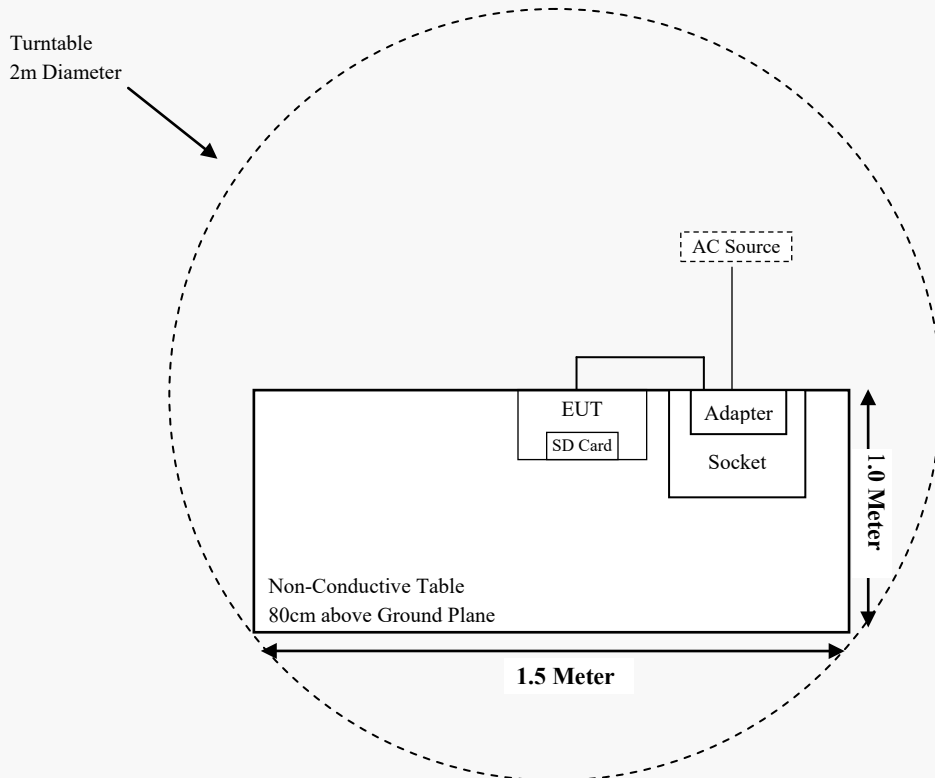

For Radiated Emissions(Above 1GHz):

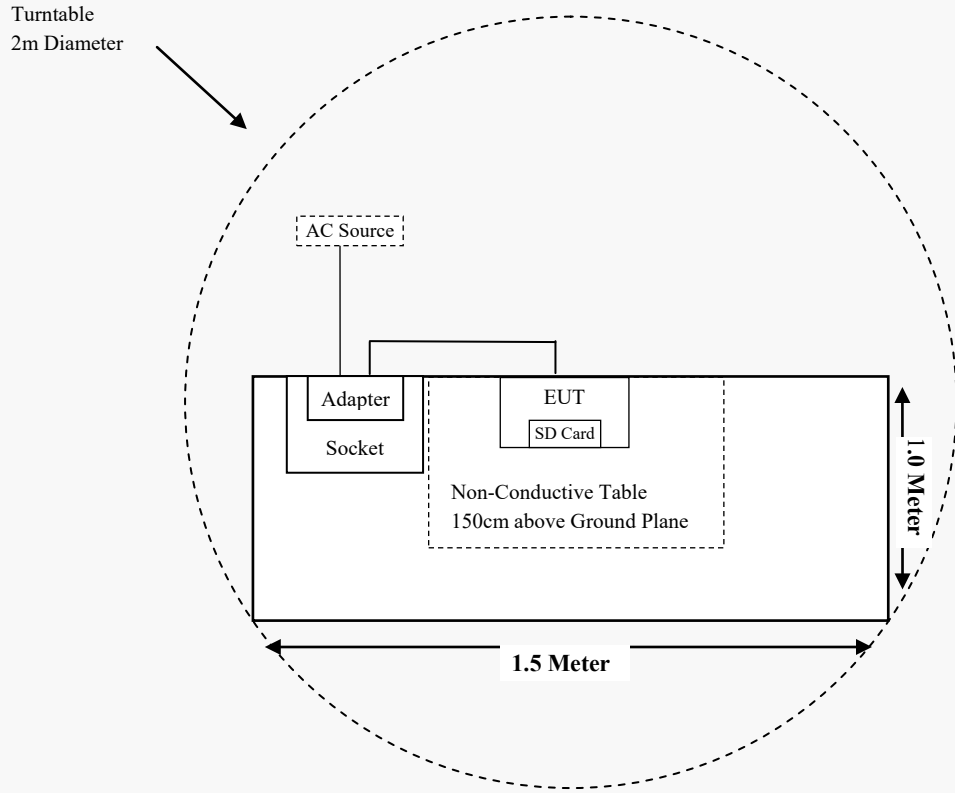

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (I), §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2020-11-27	2021-11-26
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2020-01-07	2023-01-06
Sonoma Instrument	Pre-amplifier	310N	171205	2020-08-14	2021-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2020-08-15	2021-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2020-08-15	2021-08-14
ETS-LINDGREN	Horn Antenna	3115	9311-4159	2020-07-15	2023-07-14
ETS-LINDGREN	Horn Antenna	3116	2516	2020-01-07	2023-01-06
A.H.Systems,inc	Amplifier	PAM-0118P	512	2020-08-14	2021-08-13
EM Electronics Corporation	Amplifier	EM18G40G	060726	2020-08-05	2021-08-04
MICRO-TRONICS	Band Reject Filter	BRC50722	G013	2020-08-05	2021-08-04
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-11	011	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2020-08-15	2021-08-14
RF Conducted Test					
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2020-11-27	2021-11-26
Agilent	Power Meter	N1912A	MY5000492	2020-11-18	2021-11-17
Agilent	Power Sensor	N1921A	MY54210024	2020-11-18	2021-11-17
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
Hangzhou Meari	RF Cable	Hangzhou Meari C01	C01	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03 -101746-zn	2020-08-05	2021-08-04
Rohde & Schwarz	LISN	ENV216	101115	2020-11-27	2021-11-26
Audix	Test Software	e3	V9	/	/
Rohde & Schwarz	Pulse limiter	ESH3-Z2	357.8810.52	2020-08-10	2021-08-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2020-08-15	2021-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary

Predication of MPE limit at a given distance

S = PG/4πR² = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Output Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)	MPE Ratio
		(dBi)	(numeric)	(dBm)	(mW)				
802.11b	2412~2462	1.79	1.51	17.5	56.23	20	0.0169	1.0	0.0169
802.11g		1.79	1.51	18.5	70.79	20	0.0213	1.0	0.0213
802.11n-HT20		1.79	1.51	19.0	79.43	20	0.0239	1.0	0.0239
802.11n-HT40	2422~2452	1.79	1.51	18.5	70.79	20	0.0213	1.0	0.0213
SRD	905-925	-2.46	0.57	29.5	891.25	20	0.1006	0.6	0.1677

Note: (1) The tune-up output power was declared by the manufacturer.
 (2) 2.4G Wi-Fi and SRD can transmit simultaneously, the worst condition as below:

$$\sum_i \frac{S_i}{S_{Limit,i}} = 0.0239 + 0.1677 = 0.1916 < 1.0$$

Conclusion: The device meets MPE at distance 20cm.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliant with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a FPC antenna for SRD and the antenna gain is -2.46 dBi, the antenna was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

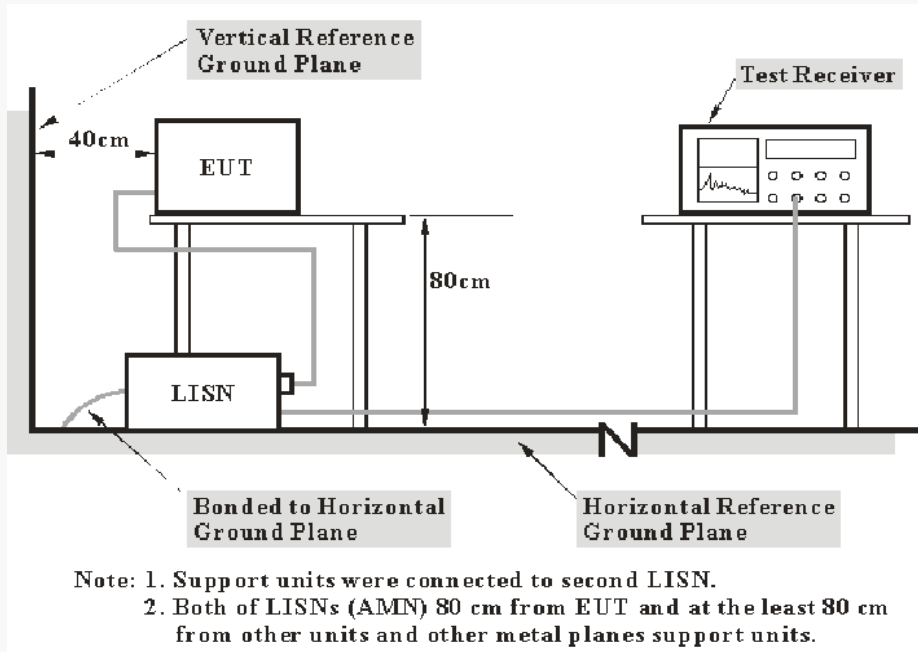

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

Factor & Over Limit Calculation

The Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions


Temperature:	23.2 ~24.2 °C
Relative Humidity:	48~50 %
ATM Pressure:	101.5~102.3 kPa

The testing was performed by Tyrone Wang from 2021-04-09 to 2021-04-14.

EUT operation mode: Transmitting in high channel (worst case)


For adapter-1:

AC 120V/60 Hz, Line

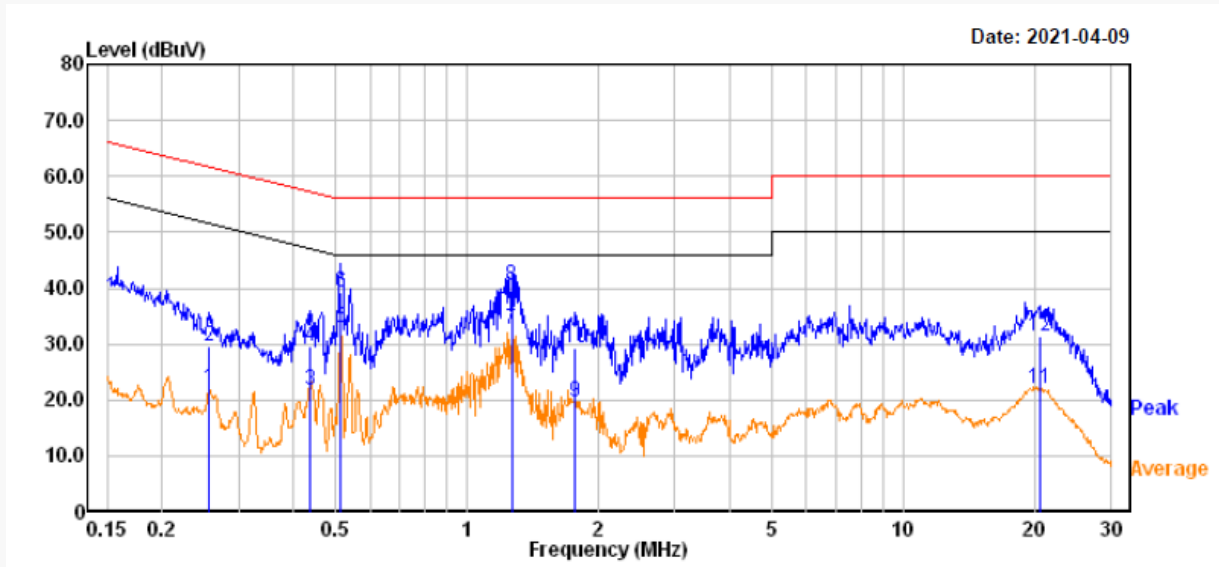

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.256	2.12	19.82	21.94	51.57	-29.63	Average
2	0.256	9.70	19.82	29.52	61.57	-32.05	QP
3	0.436	2.08	19.75	21.83	47.14	-25.31	Average
4	0.436	9.70	19.75	29.45	57.14	-27.69	QP
5	0.514	13.00	19.76	32.76	46.00	-13.24	Average
6	0.514	19.40	19.76	39.16	56.00	-16.84	QP
7	1.266	12.70	19.82	32.52	46.00	-13.48	Average
8	1.266	20.50	19.82	40.32	56.00	-15.68	QP
9	1.768	-0.20	19.84	19.64	46.00	-26.36	Average
10	1.768	9.40	19.84	29.24	56.00	-26.76	QP
11	20.540	2.09	19.92	22.01	50.00	-27.99	Average
12	20.540	11.60	19.92	31.52	60.00	-28.48	QP


AC 120V/60 Hz, Neutral

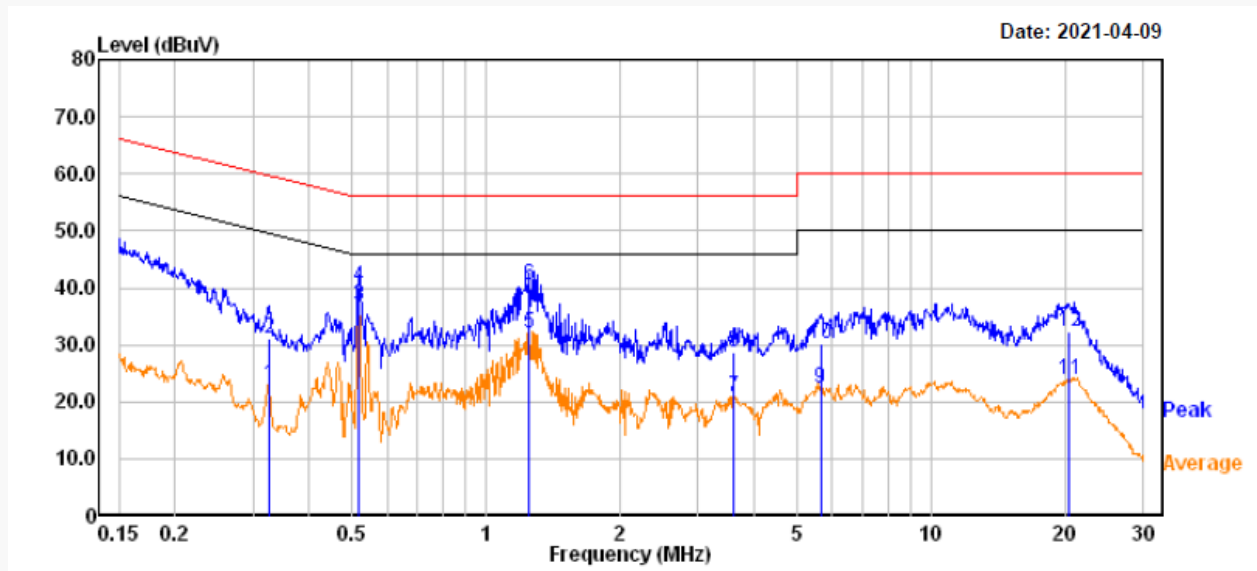

	Read Freq	Read Level	Read Factor	Limit Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.325	3.05	19.82	22.87	49.58	-26.71	Average
2	0.325	11.20	19.82	31.02	59.58	-28.56	QP
3	0.519	17.10	19.76	36.86	46.00	-9.14	Average
4	0.519	20.30	19.76	40.06	56.00	-15.94	QP
5	1.254	12.30	19.82	32.12	46.00	-13.88	Average
6	1.254	20.50	19.82	40.32	56.00	-15.68	QP
7	3.589	1.39	19.47	20.86	46.00	-25.14	Average
8	3.589	9.10	19.47	28.57	56.00	-27.43	QP
9	5.649	2.84	19.50	22.34	50.00	-27.66	Average
10	5.649	10.60	19.50	30.10	60.00	-29.90	QP
11	20.438	3.95	19.93	23.88	50.00	-26.12	Average
12	20.438	12.30	19.93	32.23	60.00	-27.77	QP


For adapter-2:

AC 120V/60 Hz, Line

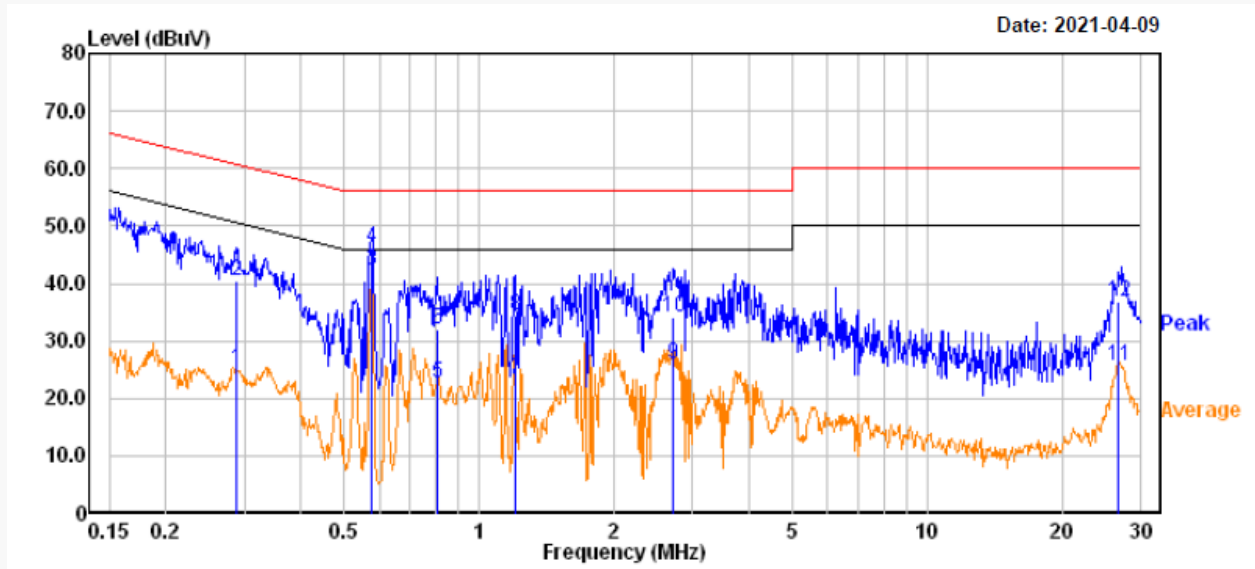

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.287	5.10	19.82	24.92	50.62	-25.70	Average
2	0.287	20.70	19.82	40.52	60.62	-20.10	QP
3	0.576	22.60	19.75	42.35	46.00	-3.65	Average
4	0.576	26.50	19.75	46.25	56.00	-9.75	QP
5	0.805	3.00	19.70	22.70	46.00	-23.30	Average
6	0.805	12.30	19.70	32.00	56.00	-24.00	QP
7	1.205	3.40	19.81	23.21	46.00	-22.79	Average
8	1.205	14.70	19.81	34.51	56.00	-21.49	QP
9	2.715	6.40	19.47	25.87	46.00	-20.13	Average
10	2.715	14.70	19.47	34.17	56.00	-21.83	QP
11	26.751	6.00	19.72	25.72	50.00	-24.28	Average
12	26.751	17.00	19.72	36.72	60.00	-23.28	QP

AC 120V/60 Hz, Neutral

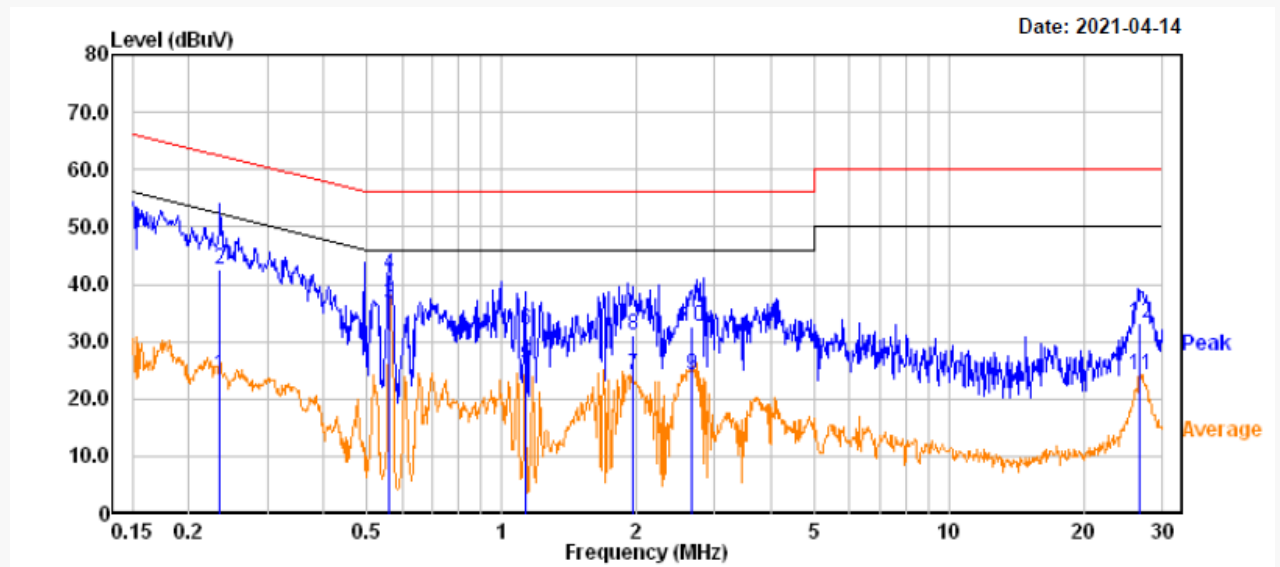

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.235	4.40	19.82	24.22	52.27	-28.05	Average
2	0.235	22.80	19.82	42.62	62.27	-19.65	QP
3	0.562	16.80	19.75	36.55	46.00	-9.45	Average
4	0.562	21.80	19.75	41.55	56.00	-14.45	QP
5	1.129	6.20	19.81	26.01	46.00	-19.99	Average
6	1.129	12.30	19.81	32.11	56.00	-23.89	QP
7	1.964	4.20	19.83	24.03	46.00	-21.97	Average
8	1.964	11.20	19.83	31.03	56.00	-24.97	QP
9	2.661	4.70	19.47	24.17	46.00	-21.83	Average
10	2.661	13.00	19.47	32.47	56.00	-23.53	QP
11	26.751	4.50	19.72	24.22	50.00	-25.78	Average
12	26.751	13.50	19.72	33.22	60.00	-26.78	QP


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

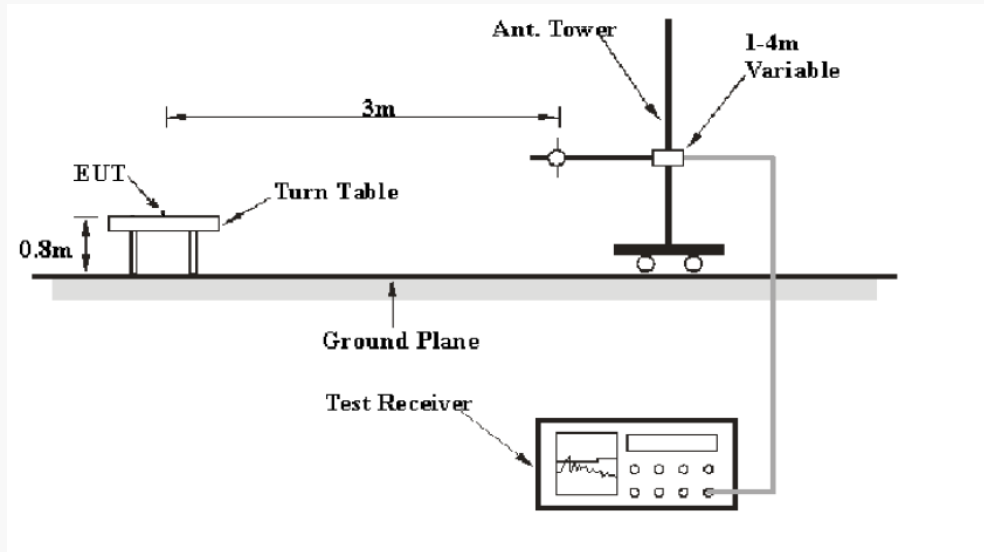

Above 1GHz:

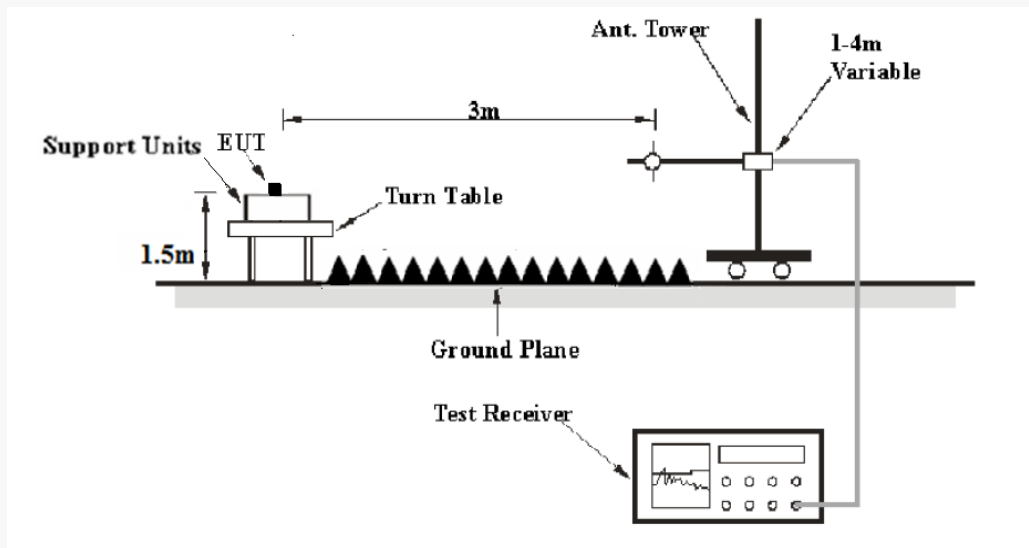

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 10 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	1MHz	AVG.

Test Procedure

According to ANSI C63.10-2013 clause 6.5, 6.6 and 6.7.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30MHz - 1GHz, peak and Average detection mode for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V/m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data

Environmental Conditions

Temperature:	25.2~26.5 °C
Relative Humidity:	49-50 %
ATM Pressure:	100.7-101.5 kPa

The testing was performed by Tyrone Wang from 2021-04-09 to 2021-04-19.


EUT operation mode: Transmitting

For adapter-1:

Spurious Emission Test:

30MHz-1GHz:

(Pre-scan with low channel, middle channel and high channel of operation in the X,Y and Z axes of orientation, the worst case **high channel of operation in Y-axis of orientation** was recorded)

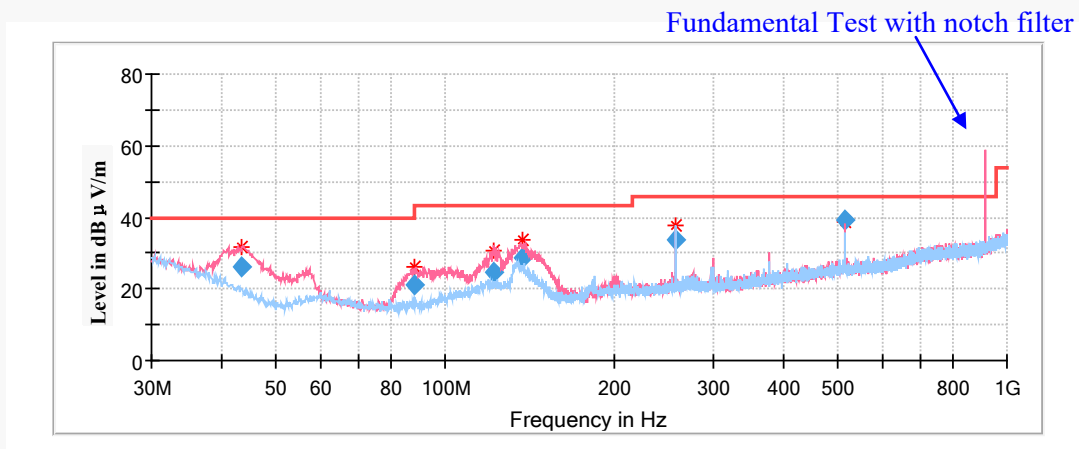

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi Peak (dBμV/m)	Height (cm)	Polar (H/V)				
43.389850	26.32	100.0	V	186.0	-12.7	40.00	13.68
87.888550	21.32	100.0	V	283.0	-17.1	40.00	18.68
121.562050	24.85	100.0	V	302.0	-10.9	43.50	18.65
137.245750	28.83	100.0	V	246.0	-11.5	43.50	14.67
257.153150	33.75	200.0	H	78.0	-11.8	46.00	12.25
514.304000	39.18	100.0	V	339.0	-5.5	46.00	6.82


For adapter-2:

Spurious Emission Test:

30MHz-1GHz:

(Pre-scan with low channel, middle channel and high channel of operation in the X,Y and Z axes of orientation, the worst case **high channel of operation in Y-axis of orientation** was recorded)

Fundamental Test with notch filter

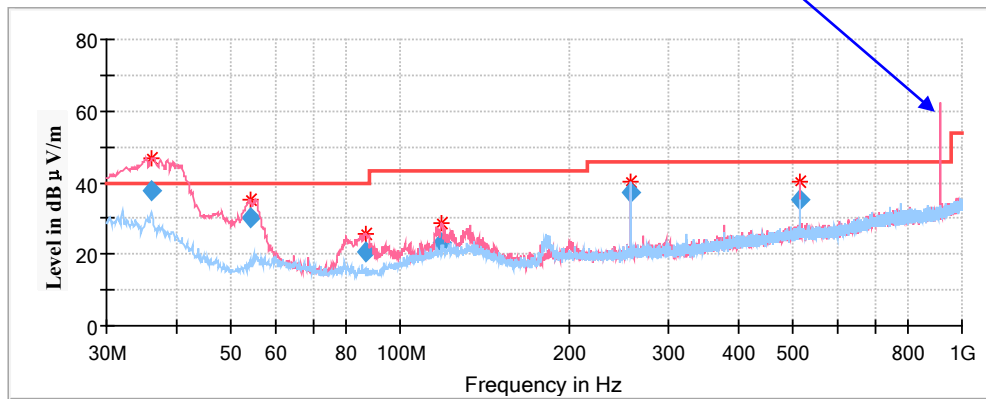

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi Peak (dBμV/m)	Height (cm)	Polar (H/V)				
36.129450	37.70	100.0	V	192.0	-8.5	40.00	2.30
54.010700	30.29	100.0	V	180.0	-16.1	40.00	9.71
86.868600	20.67	100.0	V	37.0	-17.1	40.00	19.33
118.811750	22.93	100.0	V	308.0	-11.1	43.50	20.57
257.153750	37.10	100.0	H	44.0	-11.8	46.00	8.90
514.336750	35.29	200.0	V	162.0	-5.5	46.00	10.71

For adapter-2(Worst Case):


1GHz-10GHz:

(Pre-scan in the X,Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded)

Note:


1. This test was performed with the 902-928MHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)

Low Channel: 905 MHz

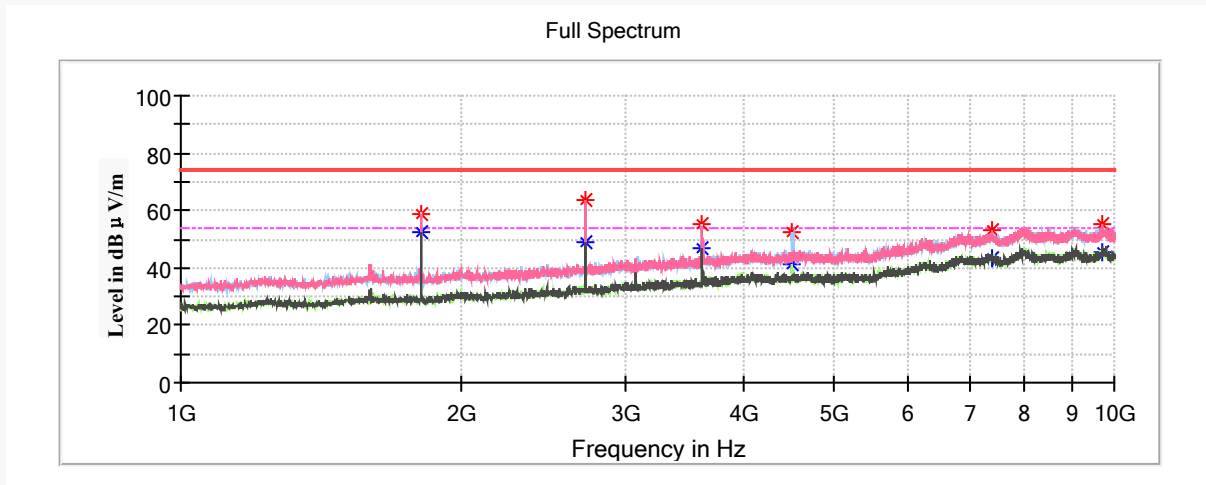


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1810.000000	---	47.46	150.0	V	167.0	-8.3	54.00	6.54
1810.000000	55.19	---	150.0	V	167.0	-8.3	74.00	18.81
2715.400000	62.87	---	200.0	H	287.0	-4.7	74.00	11.13
2715.400000	---	52.20	200.0	H	287.0	-4.7	54.00	1.80
3619.000000	60.22	---	150.0	V	108.0	-1.3	74.00	13.78
3619.000000	---	50.40	150.0	V	258.0	-1.3	54.00	3.60
4525.300000	54.61	---	150.0	H	357.0	0.9	74.00	19.39
4525.300000	---	46.52	150.0	H	357.0	0.9	54.00	7.48
5429.800000	---	43.21	200.0	H	202.0	1.9	54.00	10.79
5429.800000	54.63	---	200.0	H	202.0	1.9	74.00	19.37
6335.200000	---	42.68	200.0	H	202.0	6.2	54.00	11.32
6335.200000	52.54	---	200.0	H	202.0	6.2	74.00	21.46
9899.200000	---	46.30	200.0	V	319.0	11.9	54.00	7.70
9899.200000	55.13	---	200.0	V	319.0	11.9	74.00	18.87

Middle Channel: 915 MHz

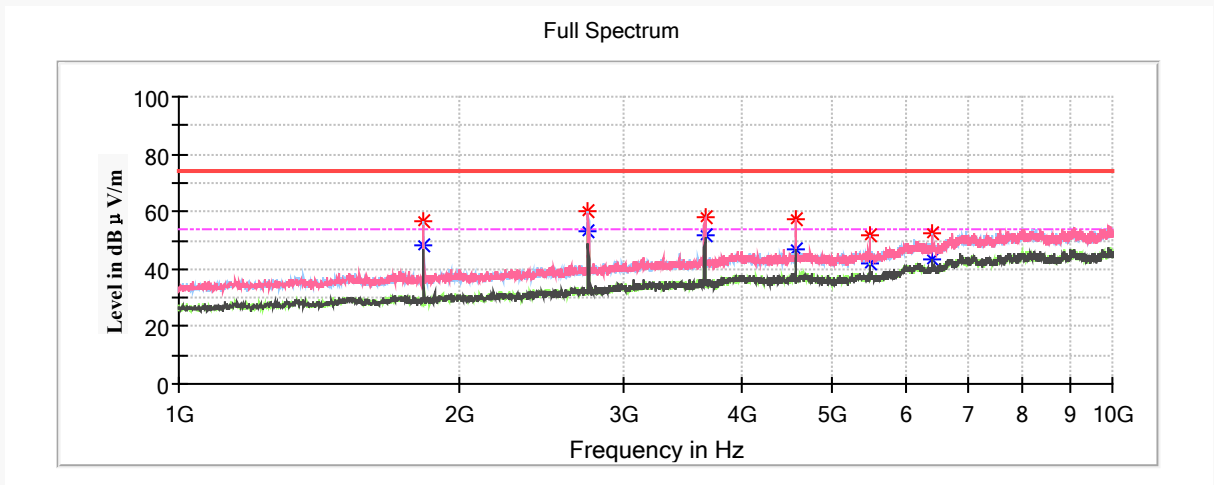

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1829.800000	---	48.19	200.0	H	3.0	-8.3	54.00	5.81
1829.800000	56.71	---	200.0	H	3.0	-8.3	74.00	17.29
2745.100000	60.41	---	200.0	H	301.0	-4.5	74.00	13.59
2745.100000	---	53.44	200.0	H	301.0	-4.5	54.00	0.56
3660.400000	58.07	---	150.0	V	270.0	-1.1	74.00	15.93
3660.400000	---	51.52	150.0	V	270.0	-1.1	54.00	2.48
4575.600000	---	46.93	150.0	V	0.0	0.9	54.00	7.07
4575.600000	57.27	---	150.0	V	0.0	0.9	74.00	16.73
5491.100000	---	42.24	200.0	H	198.0	2.0	54.00	11.76
5491.100000	51.47	---	200.0	H	198.0	2.0	74.00	22.53
6408.100000	---	43.19	150.0	V	334.0	6.4	54.00	10.81
6408.100000	52.43	---	150.0	V	334.0	6.4	74.00	21.57

High Channel: 925 MHz

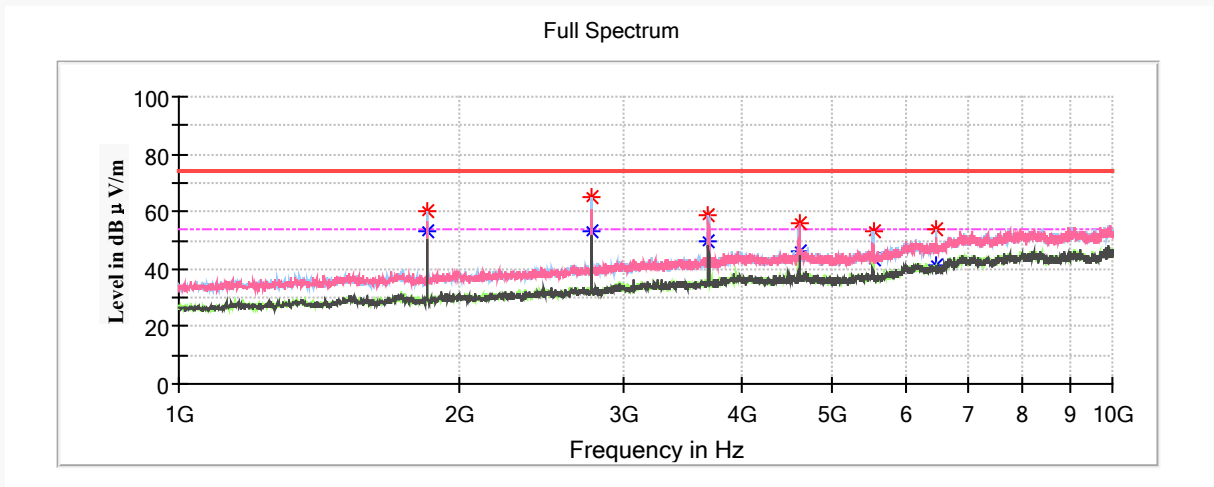


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1848.000000	60.03	---	200.0	H	314.0	-8.2	74.00	13.97
1848.000000	---	52.80	200.0	H	314.0	-8.2	54.00	1.20
2773.300000	64.88	---	150.0	H	284.0	-4.4	74.00	9.12
2773.300000	---	53.40	150.0	H	257.0	-4.4	54.00	0.60
3698.700000	58.66	---	200.0	H	270.0	-0.9	74.00	15.34
3698.700000	---	49.74	200.0	H	270.0	-0.9	54.00	4.26
4624.200000	55.65	---	150.0	V	5.0	1.0	74.00	18.35
4624.200000	---	46.42	150.0	V	5.0	1.0	54.00	7.58
5549.300000	---	43.43	150.0	H	184.0	2.3	54.00	10.57
5549.300000	52.97	---	150.0	H	184.0	2.3	74.00	21.03
6474.100000	---	41.17	200.0	H	86.0	6.6	54.00	12.83
6474.100000	53.54	---	200.0	H	86.0	6.6	74.00	20.46

Transmitting simultaneously test:

For adapter1:

30MHz-1GHz

(The worst case 802.11n20 Mode high channel and SRD high channel mode transmitting simultaneously was recorded)

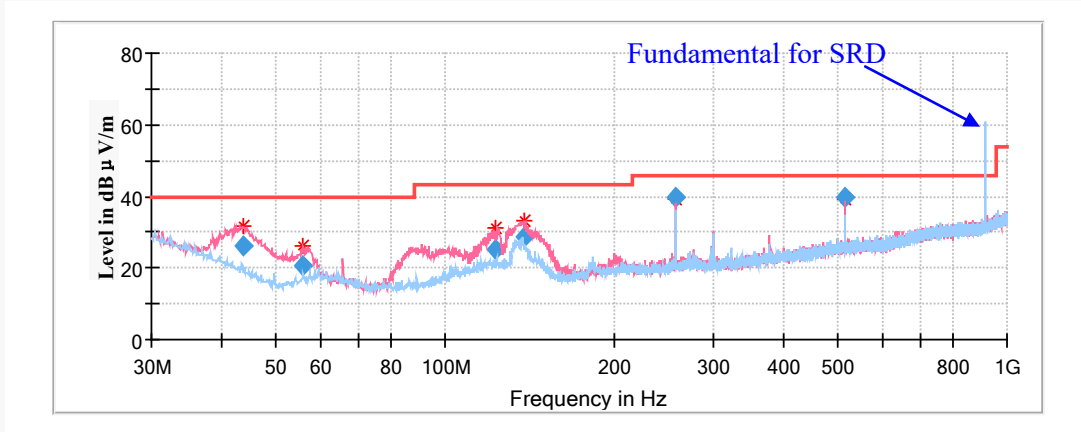


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
43.699850	26.22	100.0	V	171.0	-13.3	40.00	13.78
55.971500	20.57	100.0	V	211.0	-15.3	40.00	19.43
123.217550	24.99	100.0	V	235.0	-11.0	43.50	18.51
138.649150	28.88	100.0	V	241.0	-11.6	43.50	14.62
257.155250	39.64	100.0	V	259.0	-11.8	46.00	6.36
514.316050	39.64	100.0	V	1.0	-5.5	46.00	6.36

For adapter2:

30MHz-1GHz

(The worst case 802.11n20 Mode high channel and SRD high channel mode transmitting simultaneously was recorded)

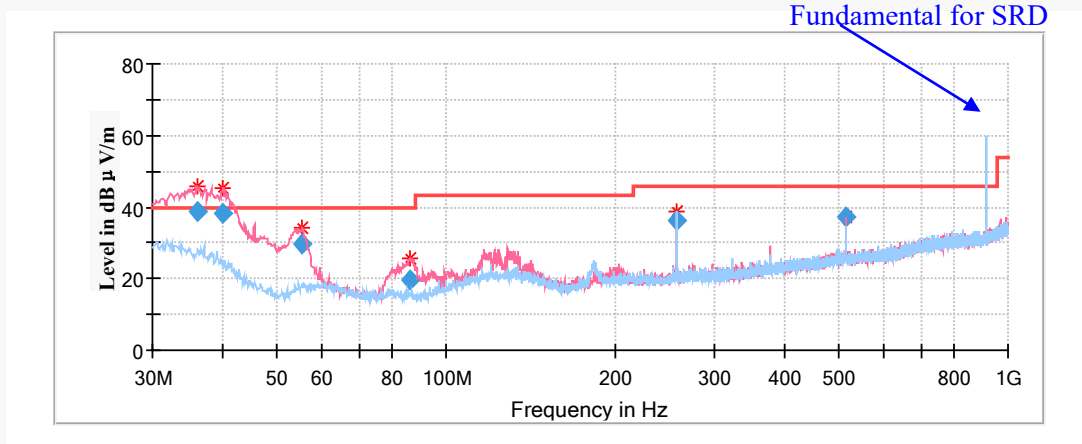


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
36.069050	38.92	100.0	V	196.0	-7.0	40.00	1.08
40.041450	38.47	100.0	V	202.0	-10.5	40.00	1.53
55.319400	29.57	100.0	V	154.0	-15.8	40.00	10.43
86.010650	19.77	100.0	V	172.0	-17.1	40.00	20.23
257.154050	36.23	100.0	H	240.0	-11.8	46.00	9.77
514.299550	37.48	100.0	V	15.0	-5.5	46.00	8.52

For adapter2 (worse case):

1GHz-18GHz:

(The worst case 802.11n20 Mode high channel and SRD high channel mode transmitting simultaneously was recorded)

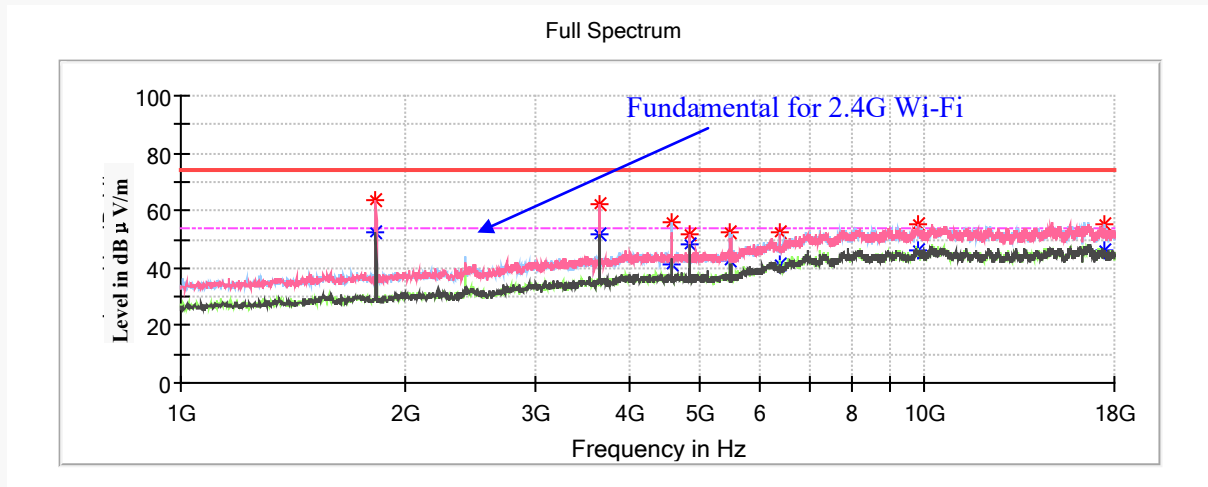


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1829.600000	---	52.36	150.0	V	224.0	-8.3	54.00	1.64
1829.600000	63.67	---	150.0	V	224.0	-8.3	74.00	10.33
3660.500000	62.55	---	150.0	V	203.0	-1.1	74.00	11.45
3660.500000	---	51.85	150.0	V	203.0	-1.1	54.00	2.15
4571.700000	---	41.58	200.0	H	193.0	0.9	54.00	12.42
4571.700000	55.71	---	200.0	H	193.0	0.9	74.00	18.29
4823.300000	---	48.29	200.0	V	68.0	1.0	54.00	5.71
4823.300000	51.89	---	200.0	V	68.0	1.0	74.00	22.11
5486.300000	---	42.43	200.0	H	142.0	2.0	54.00	11.57
5486.300000	52.32	---	200.0	H	142.0	2.0	74.00	21.68
6402.600000	---	41.44	200.0	V	233.0	6.4	54.00	12.56
6402.600000	52.44	---	200.0	V	233.0	6.4	74.00	21.56
9806.000000	---	46.02	150.0	V	302.0	11.9	54.00	7.98
9806.000000	55.26	---	150.0	V	302.0	11.9	74.00	18.74
17473.000000	55.25	---	200.0	H	111.0	10.9	74.00	18.75
17473.000000	---	46.30	200.0	H	111.0	10.9	54.00	7.70


18GHz-25GHz:

(The worst case 802.11n20 Mode high channel and SRD high channel mode transmitting simultaneously was recorded)

Vertical

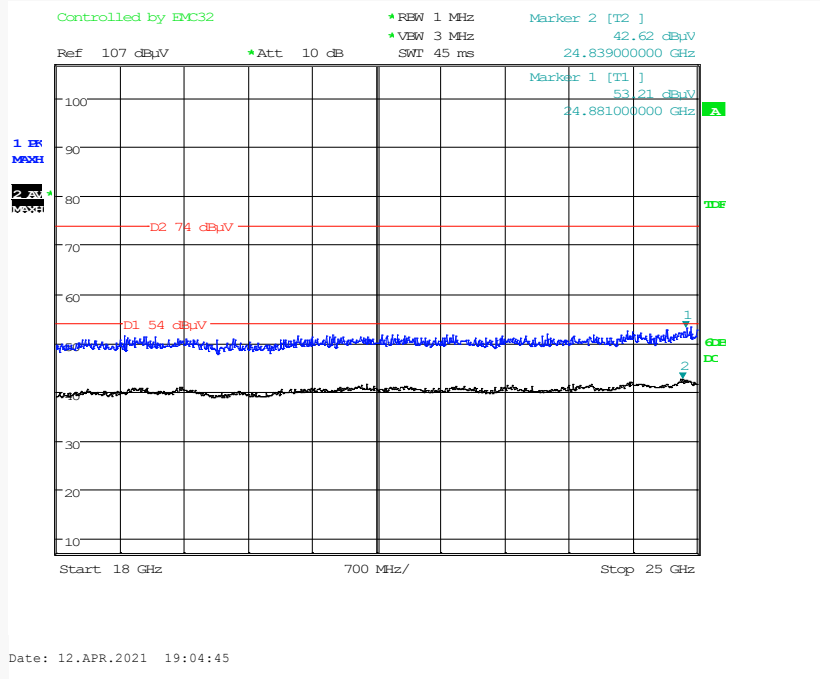

Horizontal

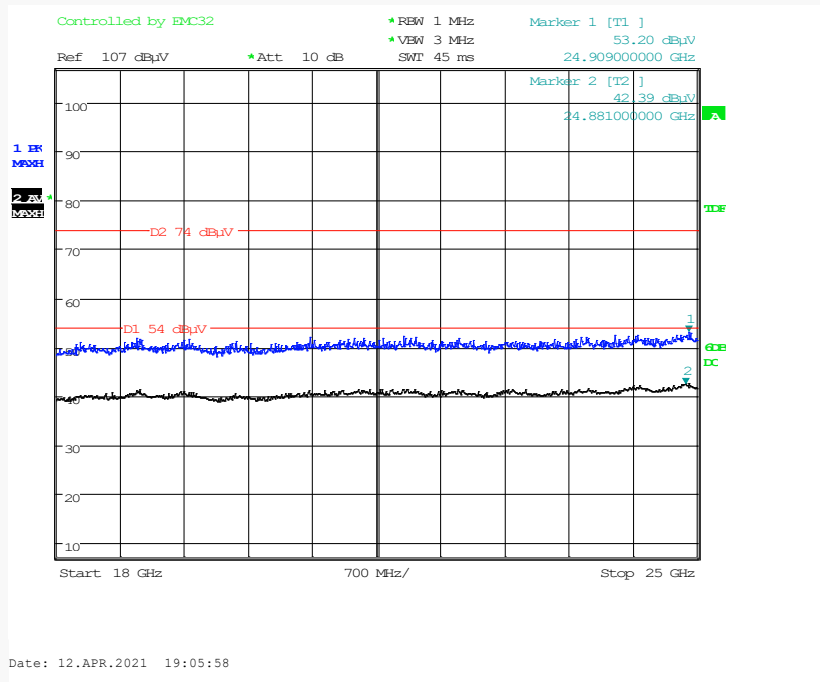

Restricted Bands Emissions Test:

(Pre-scan in the X,Y and Z axes of orientation, the worst case Y-axis of orientation was recorded.)


Note:

- 1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
- Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
- Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)


Frequency (MHz)	Corrected Amplitude	Detector (PK/QP /Ave.)	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	(dBµV/m)		Height (cm)	Polar (H/V)				
Low Channel: 905 MHz								
902.000000	34.66	QP	100	H	233	0.2	46	11.34
902.000000	35.26	QP	100	V	233	0.2	46	10.74
High Channel: 925 MHz								
928.000000	35.62	QP	150	H	186	0.8	46	10.38
928.000000	34.67	QP	100	V	186	0.8	46	11.33

Conducted Spurious Emissions at Antenna Port


Low Channel

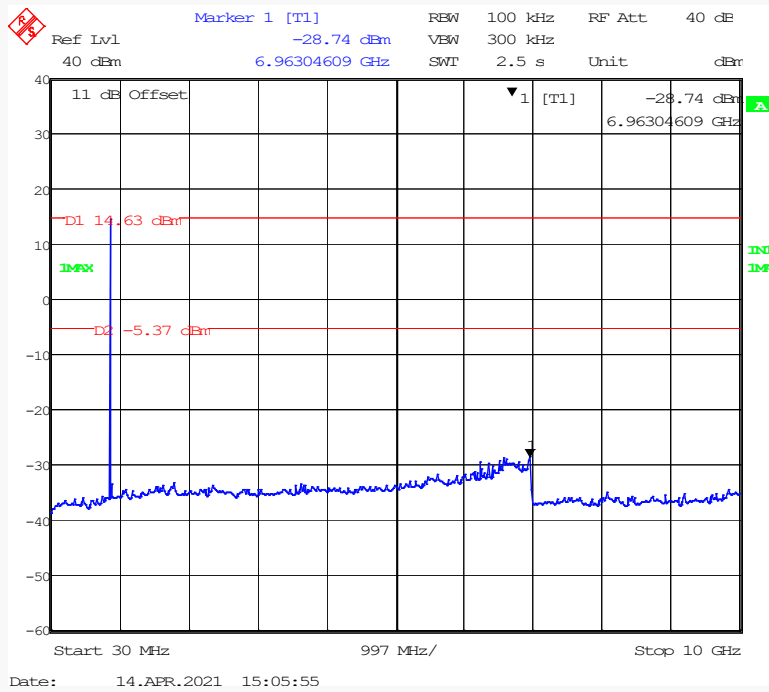

Middle Channel

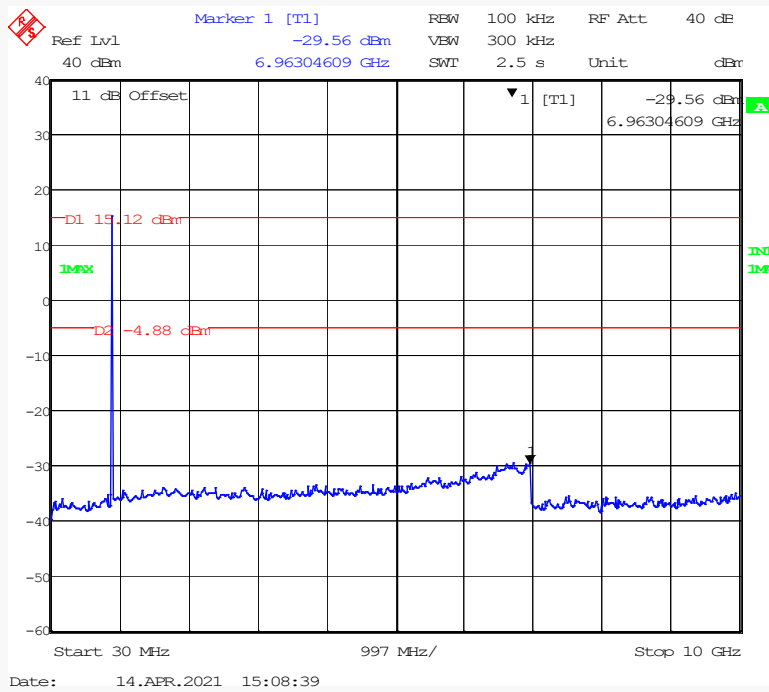

High Channel

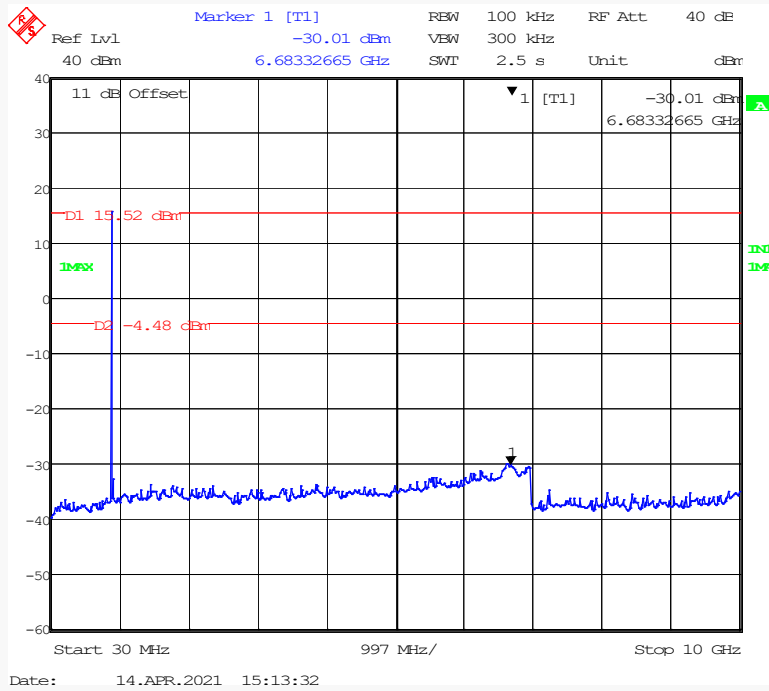

FCC §15.247(A) (2) - 6 DB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	24.3°C
Relative Humidity:	55 %
ATM Pressure:	101.3 kPa


The testing was performed by Tyrone Wang on 2021-04-14.

EUT operation mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
Low	905	1.81	≥ 0.5
Middle	915	1.82	≥ 0.5
High	925	1.84	≥ 0.5


Low Channel

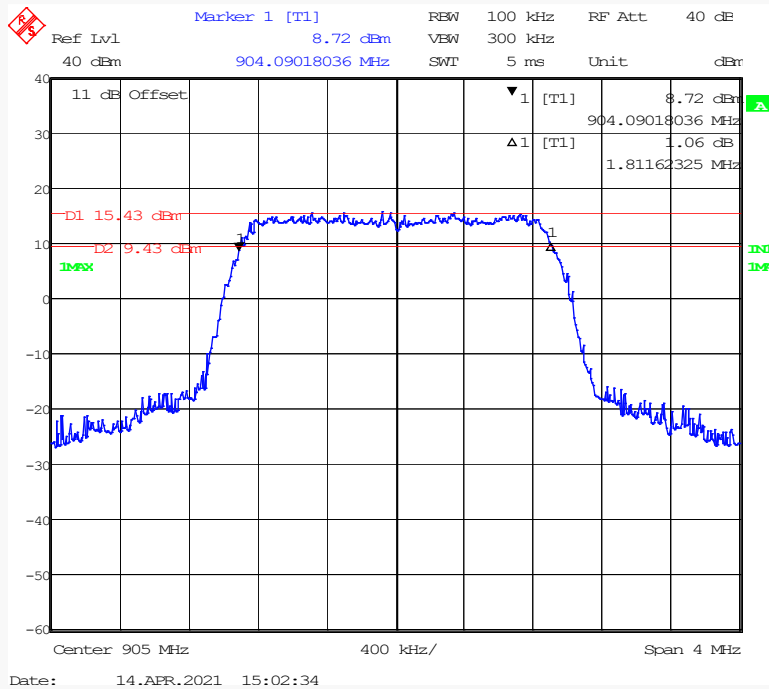

Middle Channel

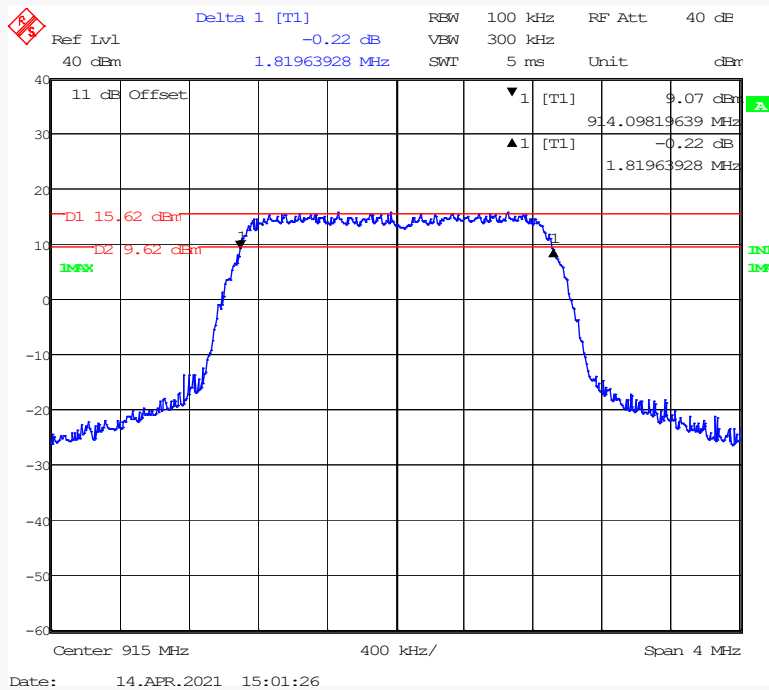

High Channel

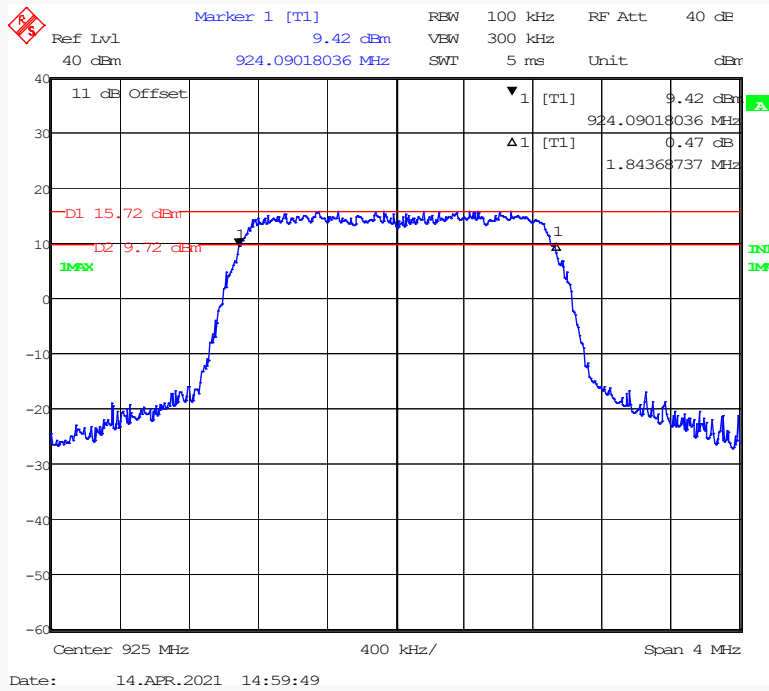

FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliant with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	24.1°C
Relative Humidity:	55 %
ATM Pressure:	101.3 kPa

The testing was performed by Tyrone Wang on 2021-04-15.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Low	905	28.86	30	Pass
Middle	915	29.11	30	Pass
High	925	29.36	30	Pass

FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliant with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	24.1°C
Relative Humidity:	55 %
ATM Pressure:	101.3 kPa

The testing was performed by Tyrone Wang on 2021-04-14.


EUT operation mode: Transmitting

Test Result: Compliant

Left Side

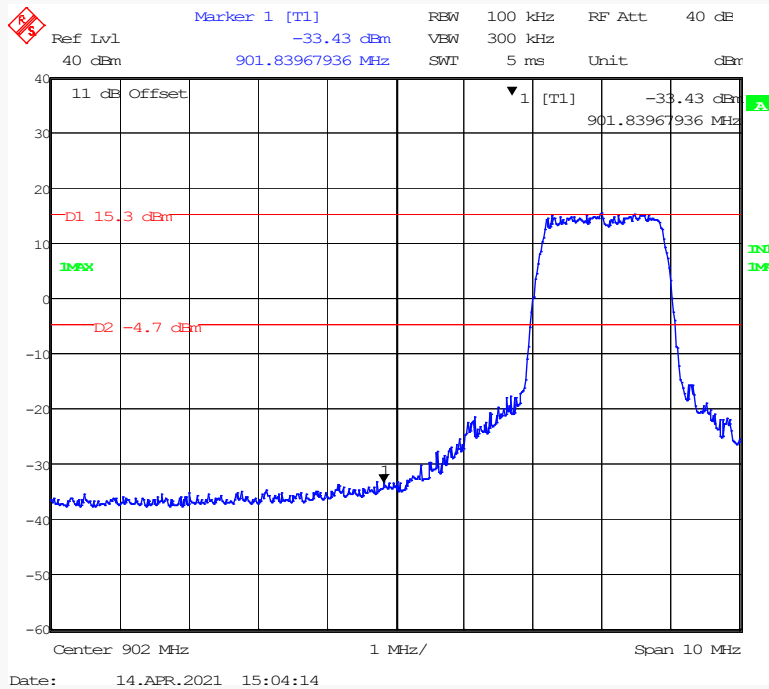

Right Side

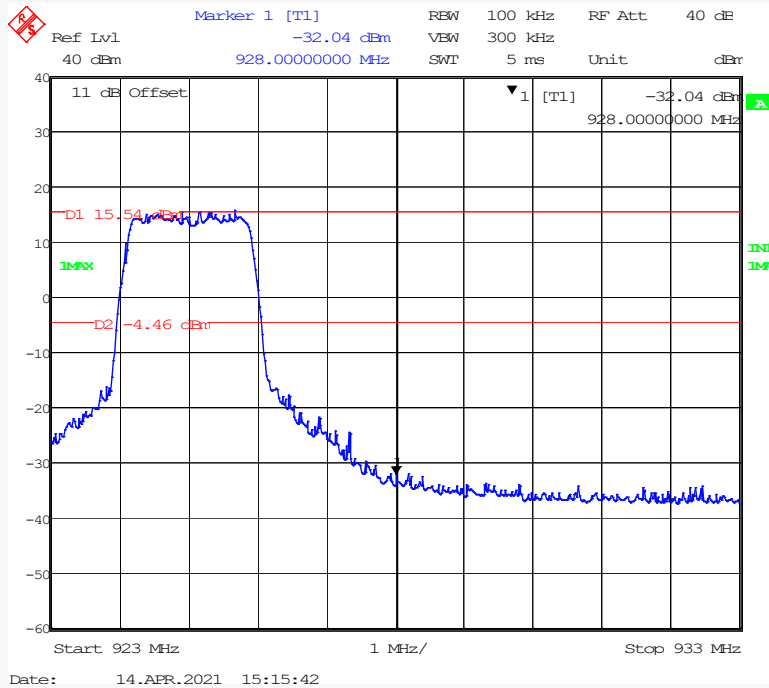

FCC §15.247(E) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine Compliant, and it is optional if the maximum conducted (average) output power was used to determine Compliant:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 * \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	24.1°C
Relative Humidity:	55 %
ATM Pressure:	101.3 kPa


The testing was performed by Tyrone Wang on 2021-04-15.

EUT operation mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low	905	4.54	≤ 8
Middle	915	4.61	≤ 8
High	925	4.76	≤ 8


Low Channel

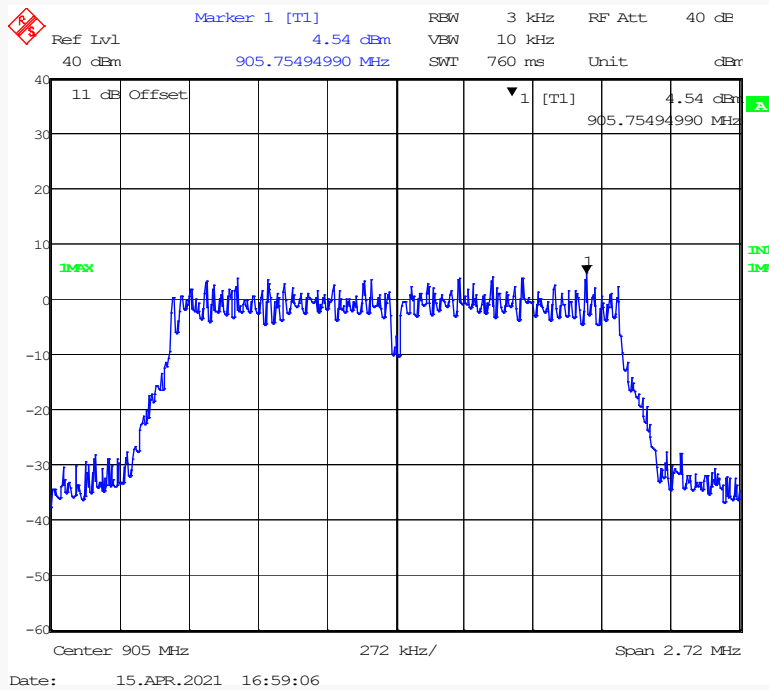

Middle Channel

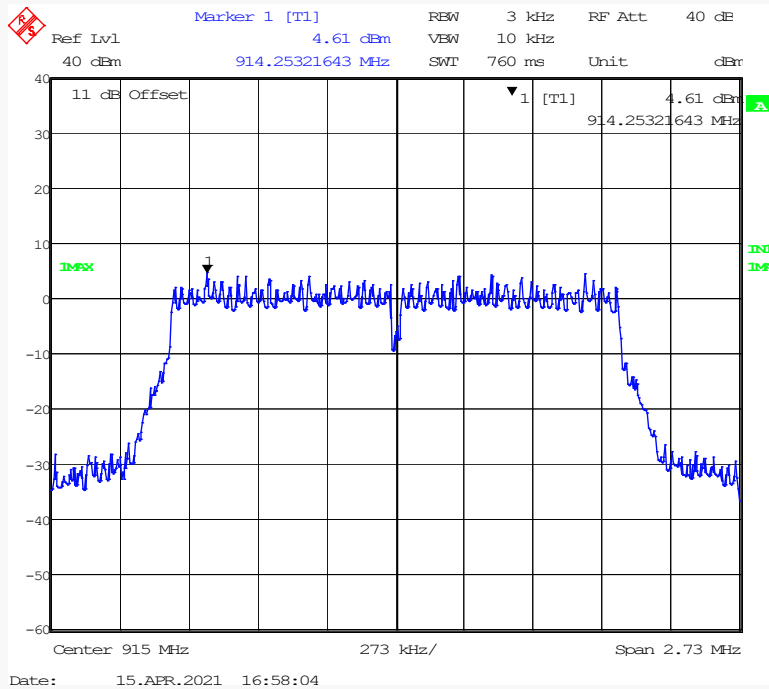

High Channel

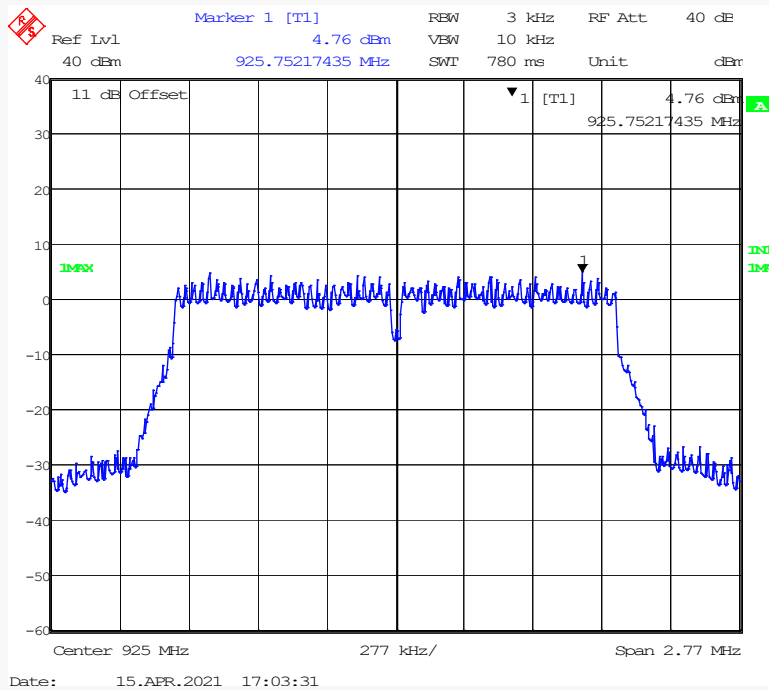

Declarations

1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

5: This report cannot be reproduced except in full, without prior written approval of the Company.

6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

******* END OF REPORT *******