



FCC RADIO TEST REPORT

FCC ID : 2AG7G-B3A
Equipment : SuperPod
Brand Name : Plume Design, Inc.
Model Name : B3A
Applicant : Plume Design, Inc.
325 Lytton Ave, Palo Alto , CA 94301, USA
Manufacturer : Plume Design, Inc.
325 Lytton Ave, Palo Alto , CA 94301, USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Mar. 23, 2022 and testing was performed from Apr. 12, 2022 to Apr. 19, 2022. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	14
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	18
3.5 Radiated Band Edges and Spurious Emission Measurement	22
3.6 AC Conducted Emission Measurement.....	26
3.7 Antenna Requirements	28
4 List of Measuring Equipment	29
5 Uncertainty of Evaluation.....	31
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR232212A	01	Initial issue of report	May 05, 2022



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	4.84 dB under the limit at 4880.000 MHz
3.6	15.207	AC Conducted Emission	Pass	9.64 dB under the limit at 0.677 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Clio Lo



1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth-LE, Wi-Fi 2.4GHz 802.11b/g/n/ac, Wi-Fi 5GHz 802.11a/n/ac.

Product Feature	
Antenna Type	WLAN <For LB Ant.> <Ant. 1>: IFA Antenna <Ant. 2>: IFA Antenna <For HB Ant.> <Ant. 1>: PIFA Antenna <Ant. 2>: PIFA Antenna <Ant. 3>: IFA Antenna <Ant. 4>: IFA Antenna Bluetooth: Slot Antenna

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	0.5

Remark: The EUT's information above is declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY (TAF Code: 1190)
Remark	The Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, 03CH11-HY

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find X plane as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1: WLAN (2.4GHz) Link + Bluetooth TX + LAN 1 Link + LAN 2 Link

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	Power supply	GW Instek	GEU810970	NA	NA	NA



2.5 EUT Operation Test Setup

The RF test items, utility “CMD Version 10.0.19042.1586” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

<1Mbps>

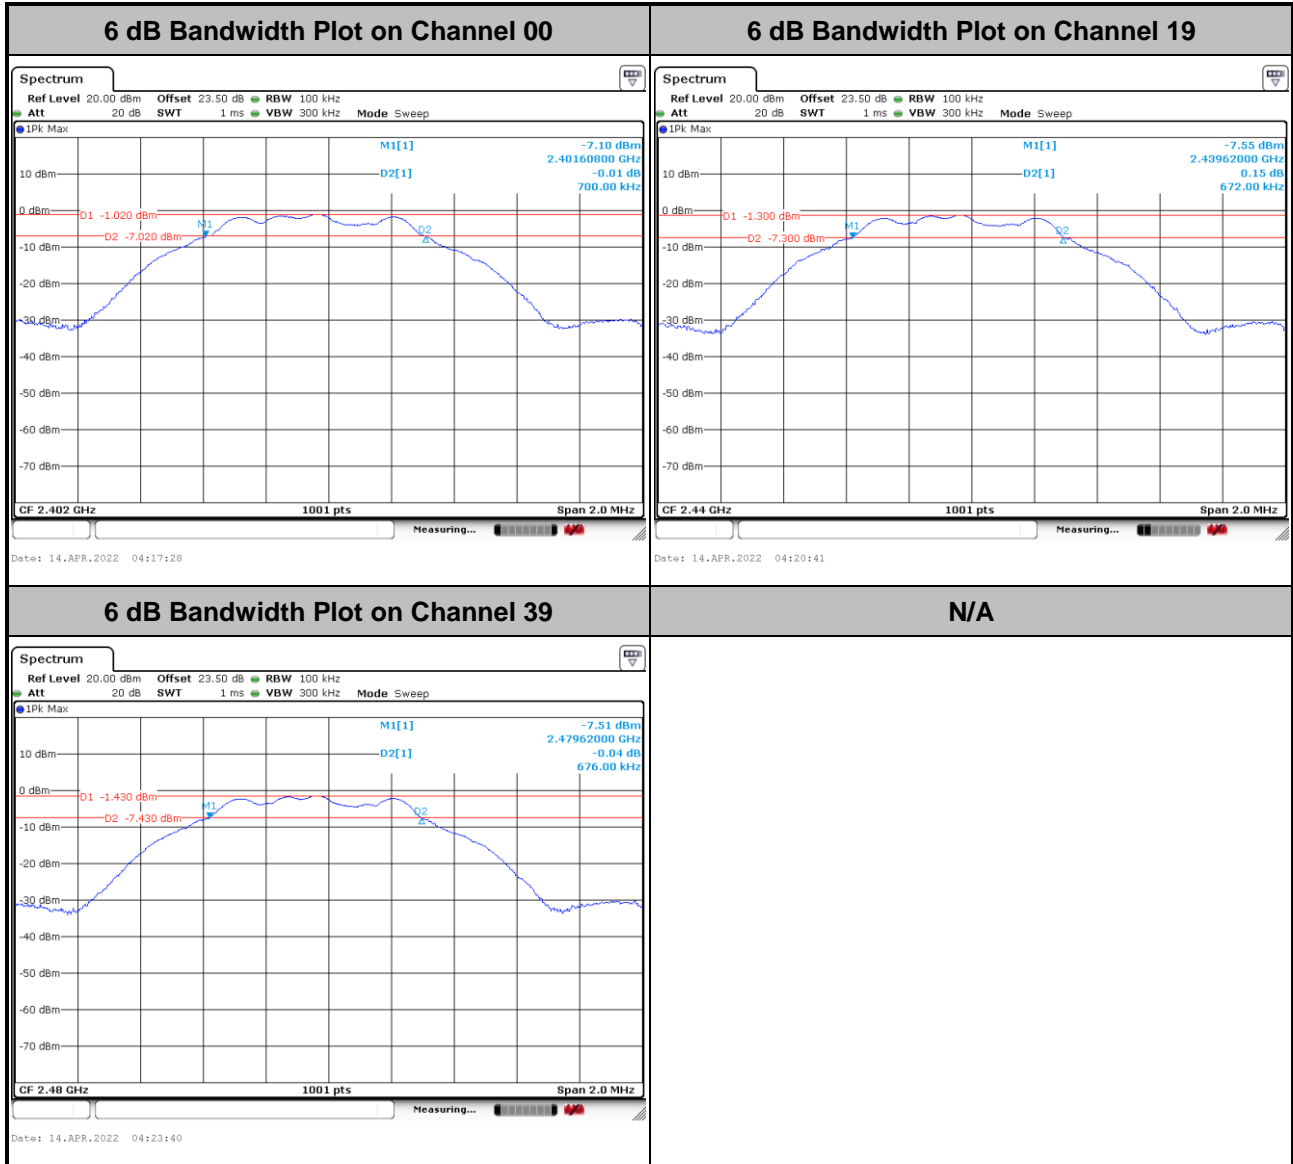




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

<1Mbps>

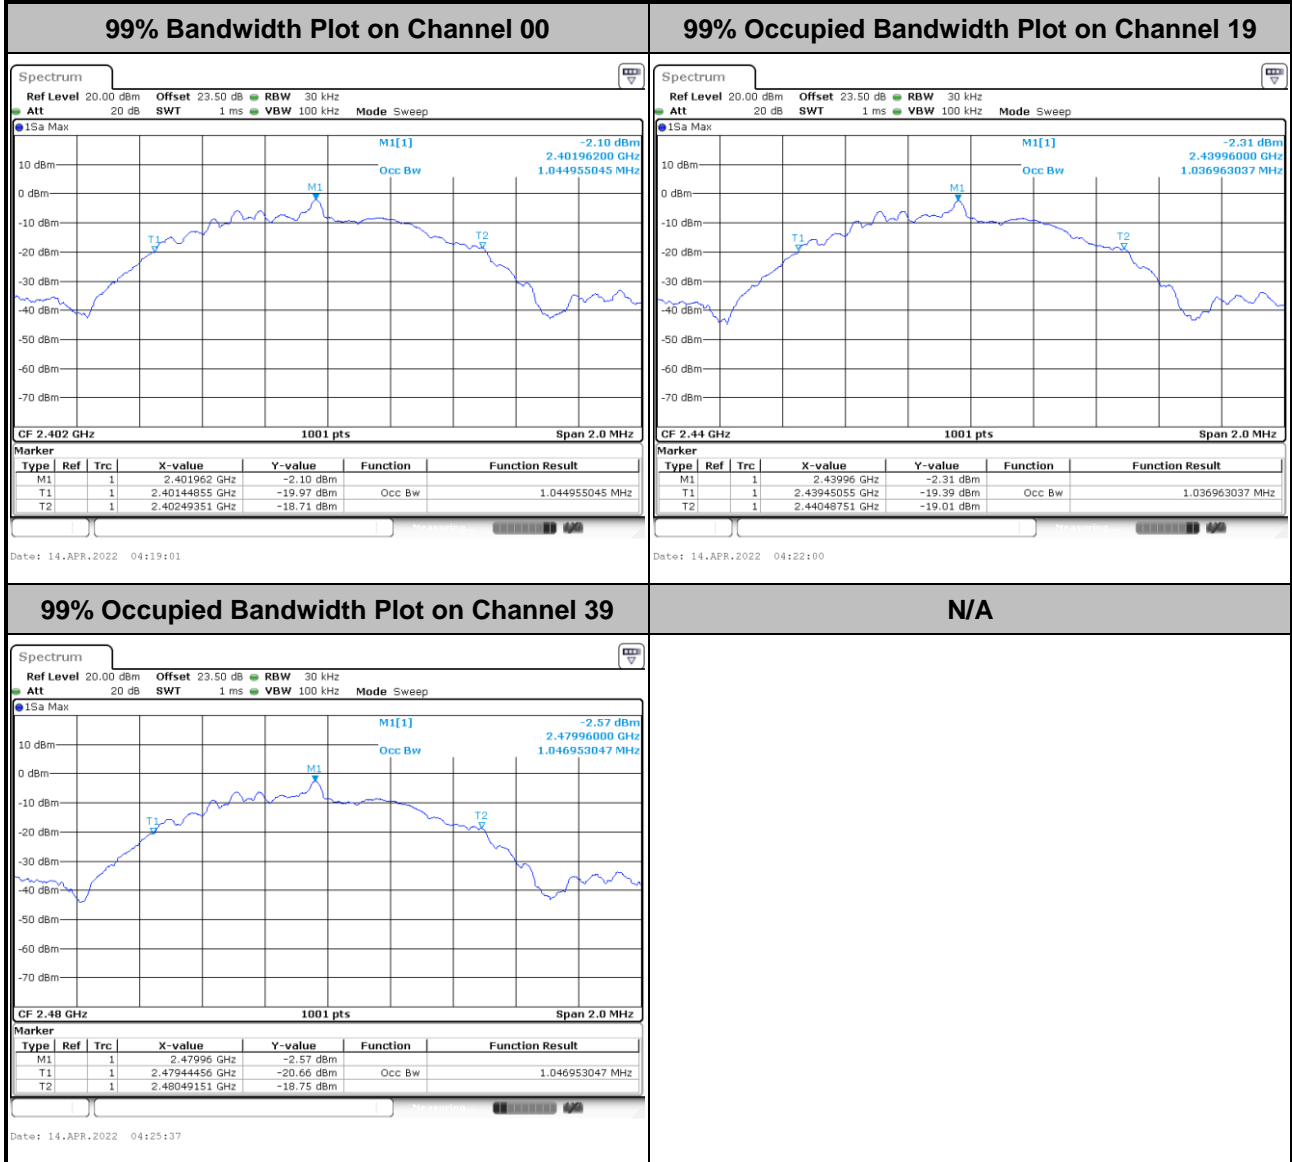

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.3 PKPM1.
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
3. The RF output of EUT is connected to the power meter by RF cable and attenuator.
4. The path loss is compensated to the results for each measurement.
5. Set the maximum power setting and enable the EUT to transmit continuously.
6. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

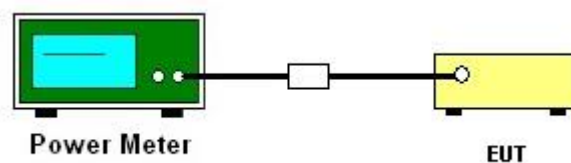

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup




3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.3.6 Test Result of Power Spectral Density Plots (100kHz)


<1Mbps>

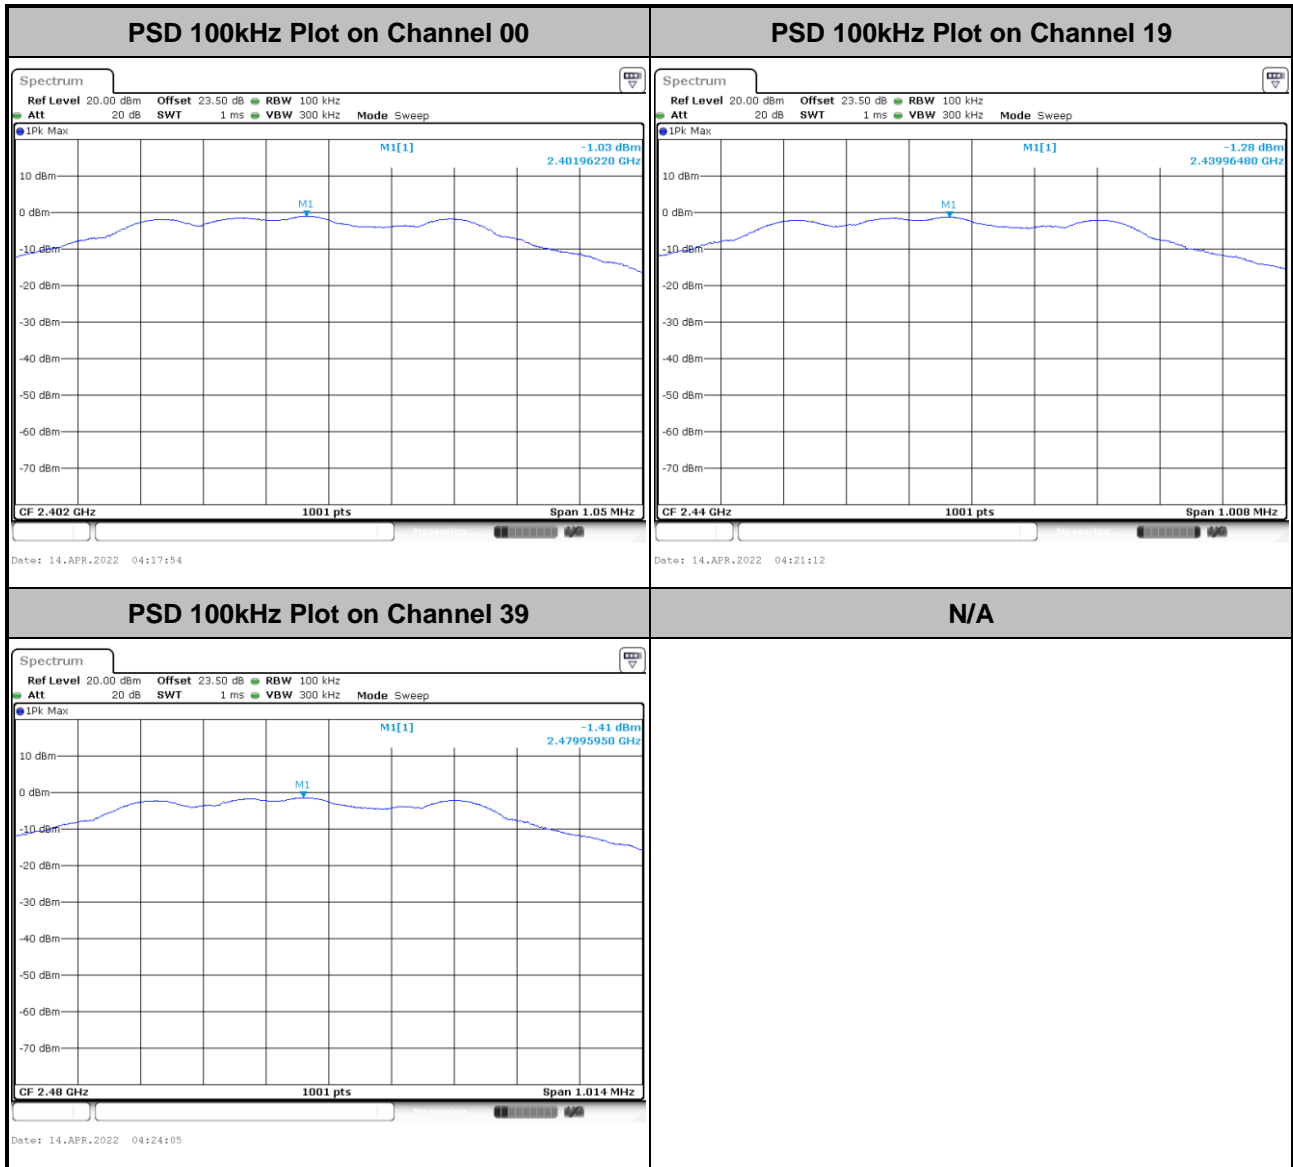



3.3.7 Test Result of Power Spectral Density Plots (3kHz)

<1Mbps>

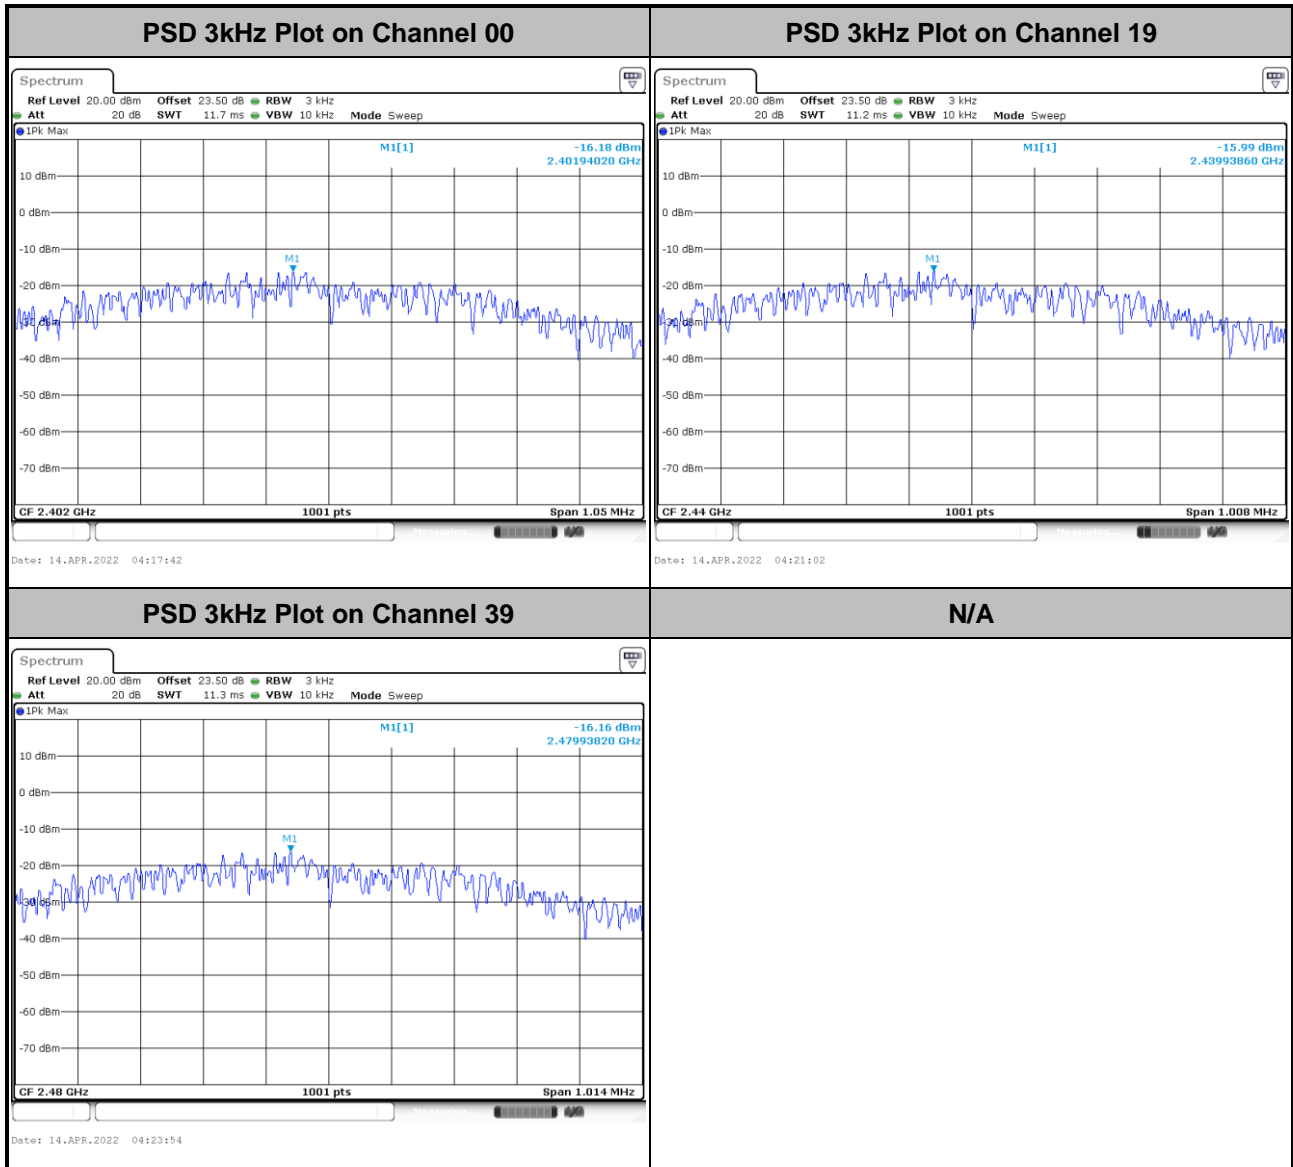

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup





3.4.5 Test Result of Conducted Band Edges Plots


<1Mbps>

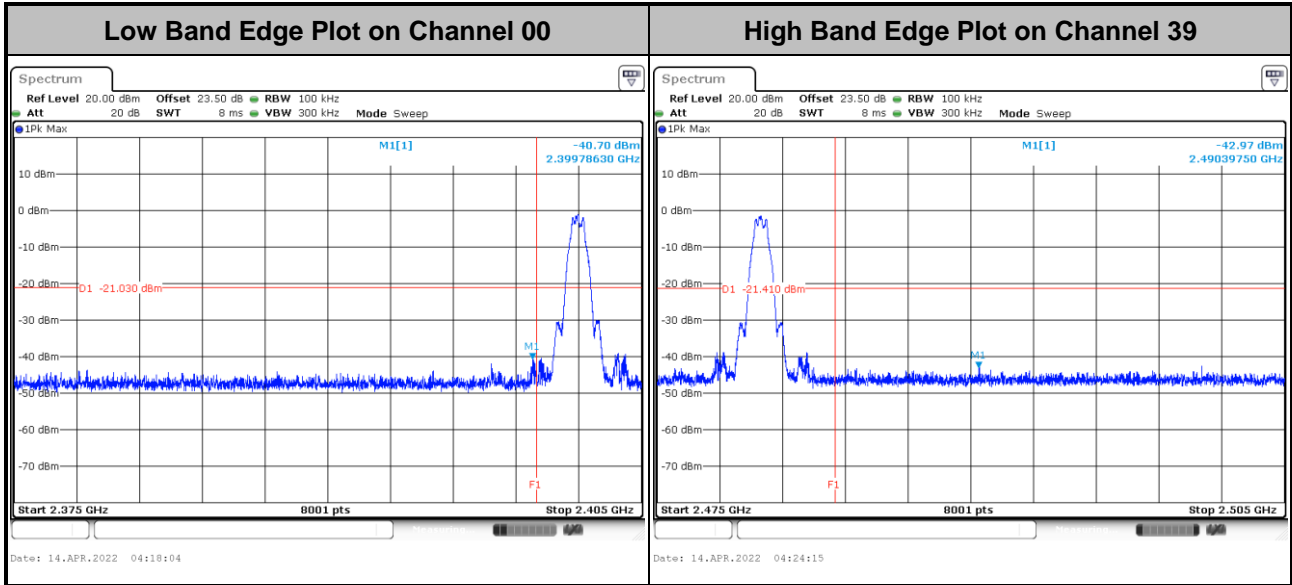




3.4.6 Test Result of Conducted Spurious Emission Plots

<1Mbps>

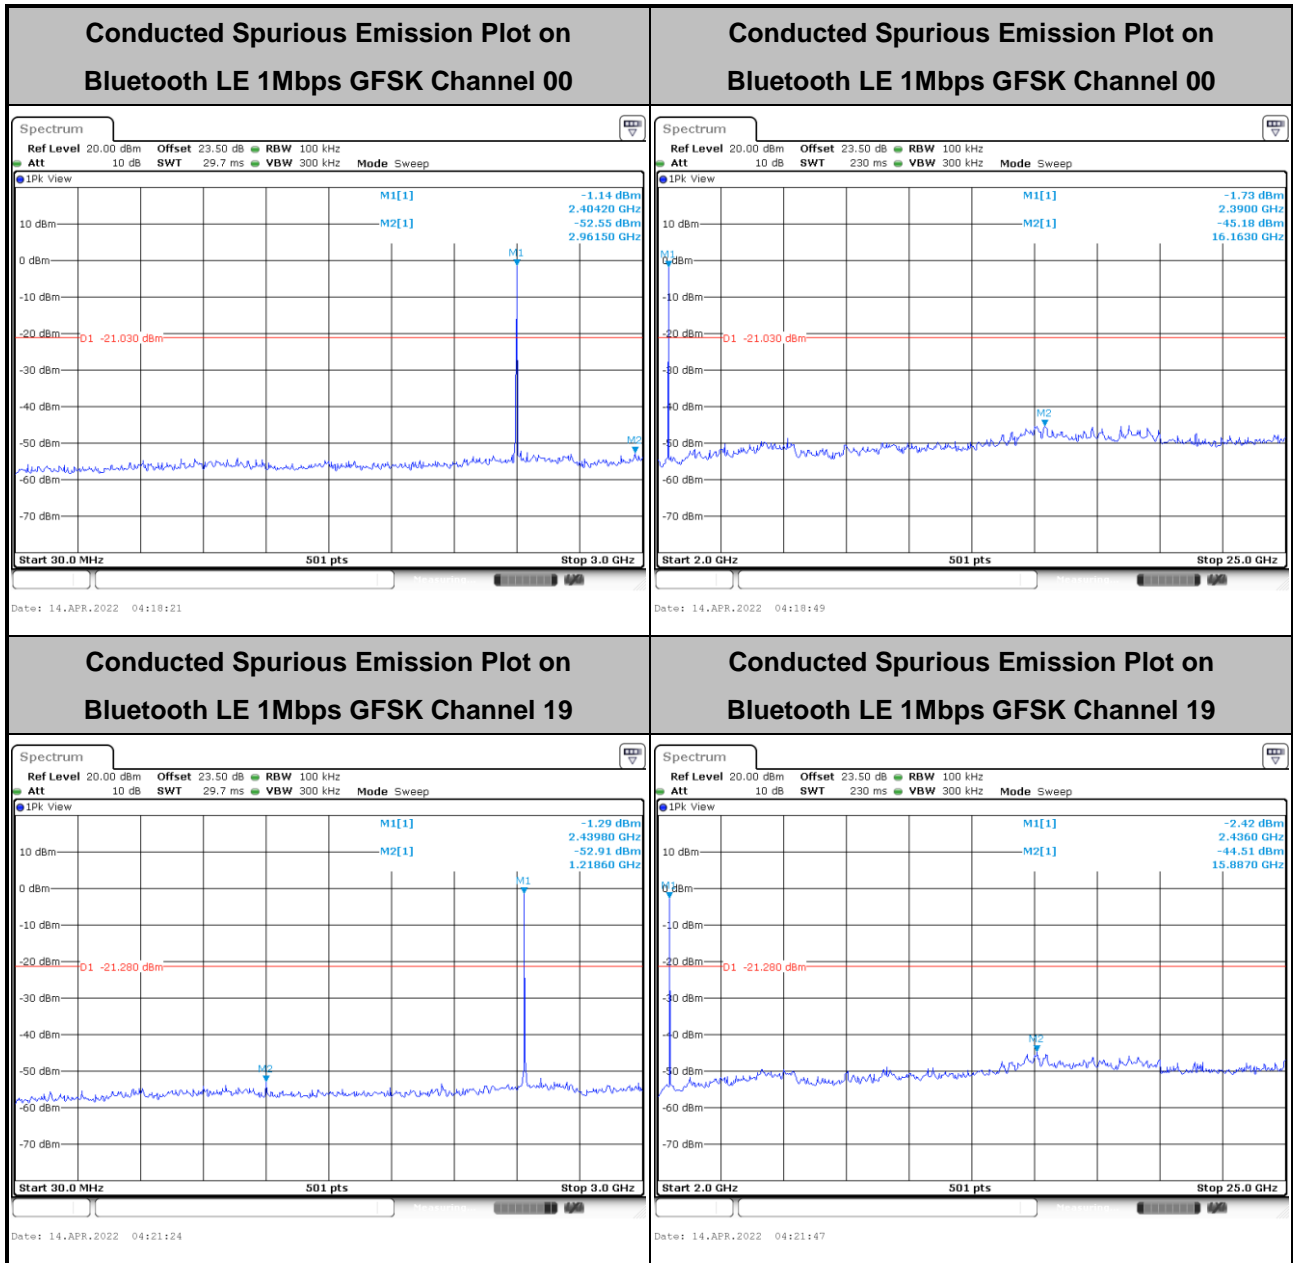

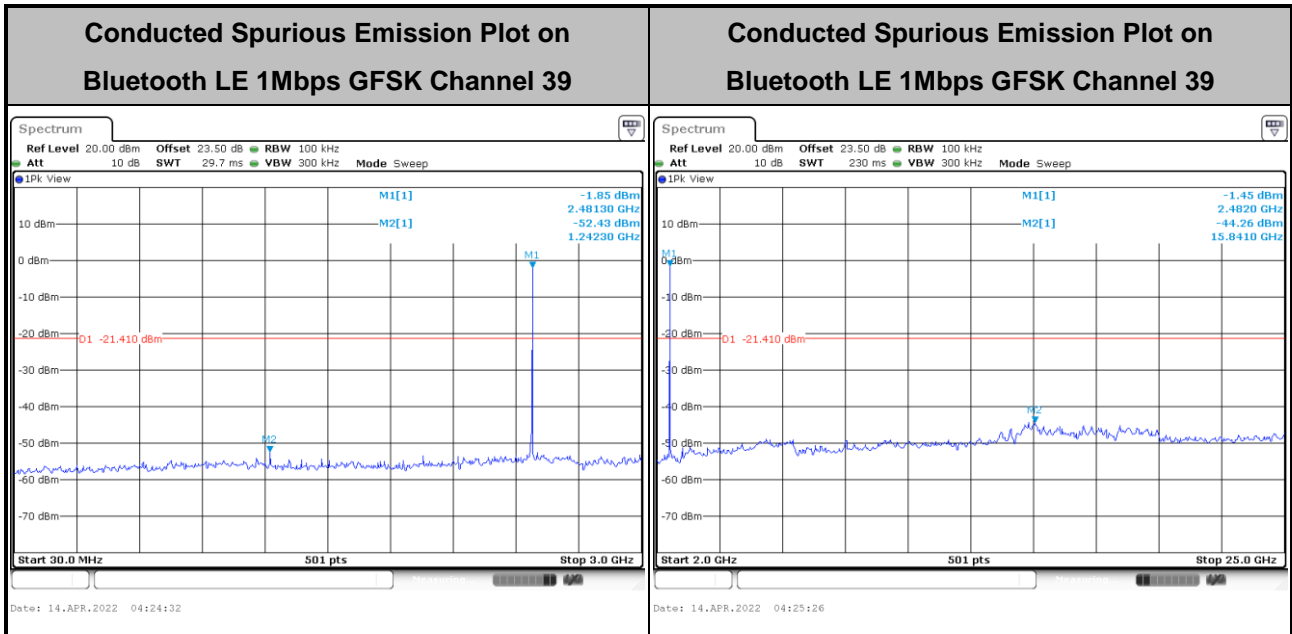



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, $VBW = 3$ MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

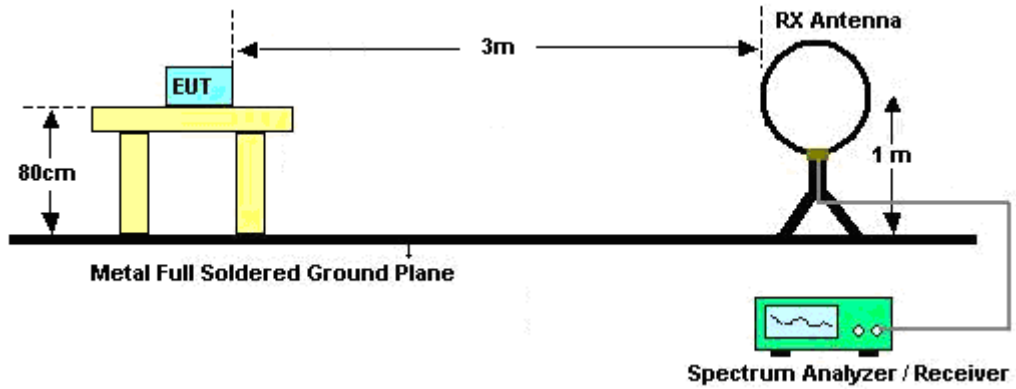


For radiated test from 30MHz to 1GHz

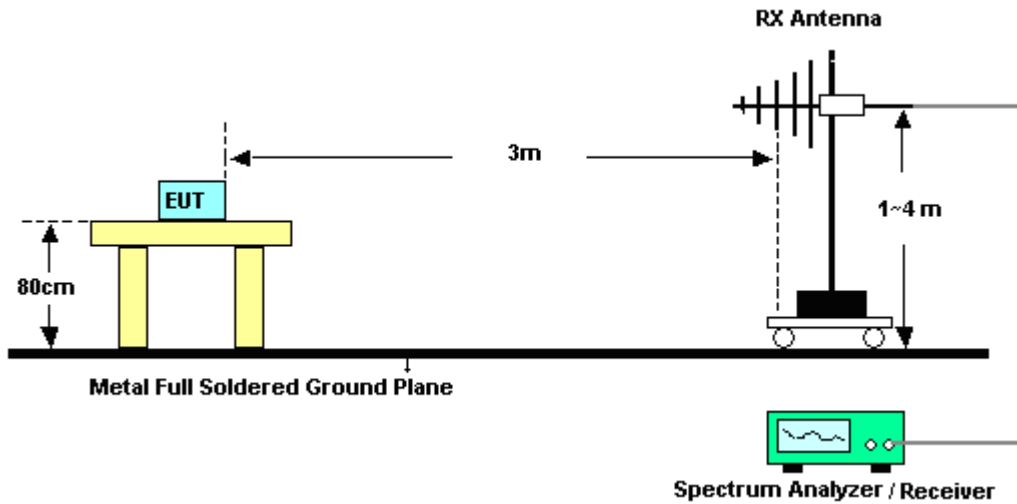

For radiated test from 1GHz to 18GHz

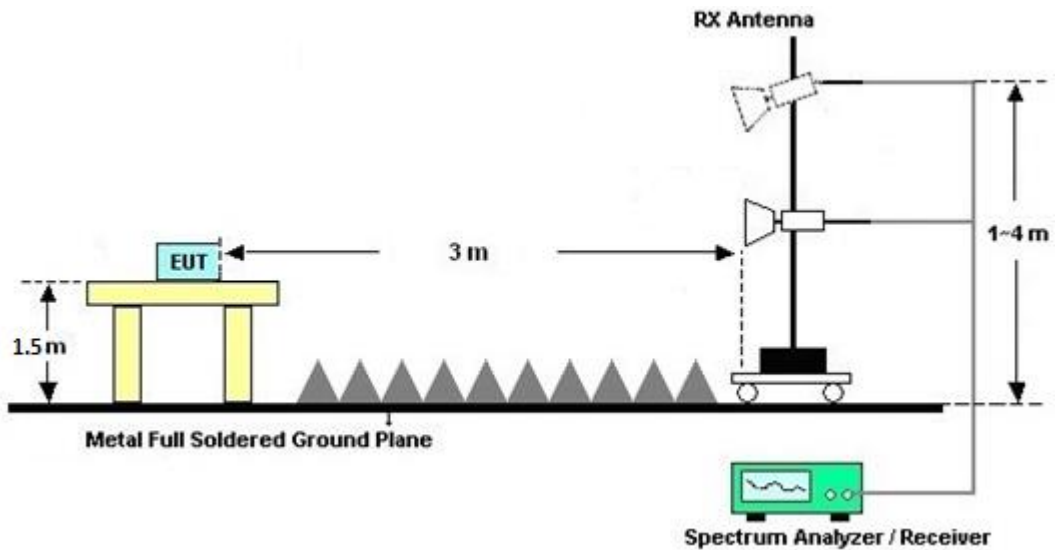

For radiated test above 18GHz

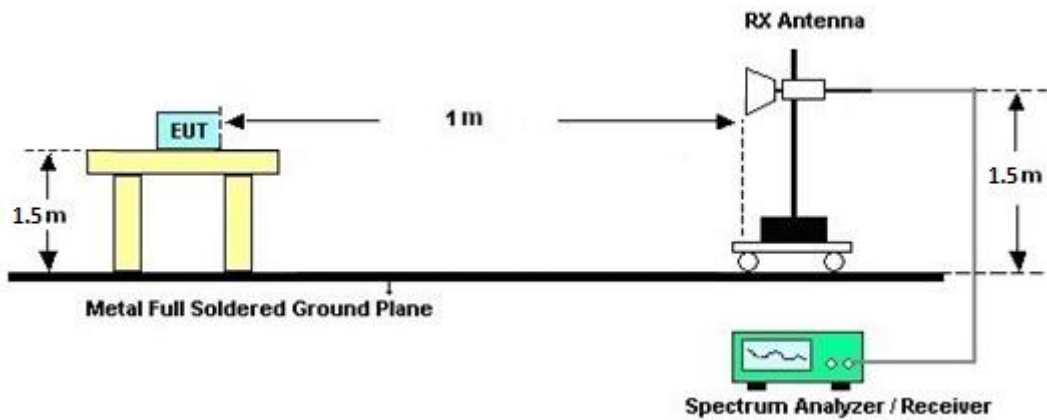

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup



3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~50 MHz	Jan. 07, 2022	Apr. 13, 2022~ Apr. 15, 2022	Jan. 06, 2023	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT- N0602	30MHz~1GHz	Oct. 09, 2021	Apr. 13, 2022~ Apr. 15, 2022	Oct. 08, 2022	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 25, 2021	Apr. 13, 2022~ Apr. 15, 2022	Oct. 24, 2022	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA9170	00993	18GHz~40GHz	Nov. 30, 2021	Apr. 13, 2022~ Apr. 15, 2022	Nov. 29, 2022	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 10, 2021	Apr. 13, 2022~ Apr. 15, 2022	Dec. 09, 2022	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 10, 2021	Apr. 13, 2022~ Apr. 15, 2022	Nov. 09, 2022	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-30 3	17100018000 55007	1GHz~18GHz	Jun. 16, 2021	Apr. 13, 2022~ Apr. 15, 2022	Jun. 15, 2022	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 22, 2021	Apr. 13, 2022~ Apr. 15, 2022	Jun. 21, 2022	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 15, 2021	Apr. 13, 2022~ Apr. 15, 2022	Oct. 14, 2022	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	20MHz~8.4GHz	Jul. 15, 2021	Apr. 13, 2022~ Apr. 15, 2022	Jul. 14, 2022	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 13, 2022~ Apr. 15, 2022	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Apr. 13, 2022~ Apr. 15, 2022	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Apr. 13, 2022~ Apr. 15, 2022	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Apr. 13, 2022~ Apr. 15, 2022	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 10, 2022	Apr. 13, 2022~ Apr. 15, 2022	Mar. 09, 2023	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz-30MHz	Mar. 10, 2022	Apr. 13, 2022~ Apr. 15, 2022	Mar. 09, 2023	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	30MHz-18GHz	Mar. 10, 2022	Apr. 13, 2022~ Apr. 15, 2022	Mar. 09, 2023	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	811852/4	30MHz-18GHz	Mar. 10, 2022	Apr. 13, 2022~ Apr. 15, 2022	Mar. 09, 2023	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN11	1.53G Low Pass	Sep. 13, 2021	Apr. 13, 2022~ Apr. 15, 2022	Sep. 12, 2022	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN3	3GHz High Pass Filter	Sep. 13, 2021	Apr. 13, 2022~ Apr. 15, 2022	Sep. 12, 2022	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP140325	N/A	Nov. 26, 2021	Apr. 13, 2022~ Apr. 15, 2022	Nov. 25, 2022	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP200880	N/A	Sep. 30, 2021	Apr. 13, 2022~ Apr. 15, 2022	Sep. 29, 2022	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Apr. 19, 2022	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 01, 2021	Apr. 19, 2022	Nov. 30, 2022	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 17, 2021	Apr. 19, 2022	Nov. 16, 2022	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 03, 2021	Apr. 19, 2022	Dec. 02, 2022	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Apr. 19, 2022	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	00691	N/A	Jul. 28, 2021	Apr. 19, 2022	Jul. 27, 2022	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 30, 2021	Apr. 19, 2022	Dec. 29, 2022	Conduction (CO05-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 16, 2021	Apr. 12, 2022 ~ Apr. 14, 2022	Nov. 15, 2022	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Aug. 01, 2021	Apr. 12, 2022 ~ Apr. 14, 2022	Jul. 31, 2022	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Aug. 01, 2021	Apr. 12, 2022 ~ Apr. 14, 2022	Jul. 31, 2022	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 30, 2021	Apr. 12, 2022 ~ Apr. 14, 2022	Aug. 29, 2022	Conducted (TH05-HY)
Switch Control Mainframe	E-IUSTRUMENT	ETF-1405-0	EC1900067 (BOX7)	N/A	Aug. 12, 2021	Apr. 12, 2022 ~ Apr. 14, 2022	Aug. 11, 2022	Conducted (TH05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.4 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.9 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Junyu Jhou	Temperature:	23.1~25	°C
Test Date:	2022/4/12~2022/4/14	Relative Humidity:	45.1~56.6	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.045	0.700	0.50	Pass
BLE	1Mbps	1	19	2440	1.037	0.672	0.50	Pass
BLE	1Mbps	1	39	2480	1.047	0.676	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	0.05	30.00	0.50	0.55	36.00	Pass
BLE	1Mbps	1	19	2440	-0.34	30.00	0.50	0.16	36.00	Pass
BLE	1Mbps	1	39	2480	-0.46	30.00	0.50	0.04	36.00	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	-0.69	30.00	0.50	-0.19	36.00	Pass
BLE	1Mbps	1	19	2440	-1.11	30.00	0.50	-0.61	36.00	Pass
BLE	1Mbps	1	39	2480	-1.25	30.00	0.50	-0.75	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	-1.03	-16.18	0.50	8.00	Pass
BLE	1Mbps	1	19	2440	-1.28	-15.99	0.50	8.00	Pass
BLE	1Mbps	1	39	2480	-1.41	-16.16	0.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 232212
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

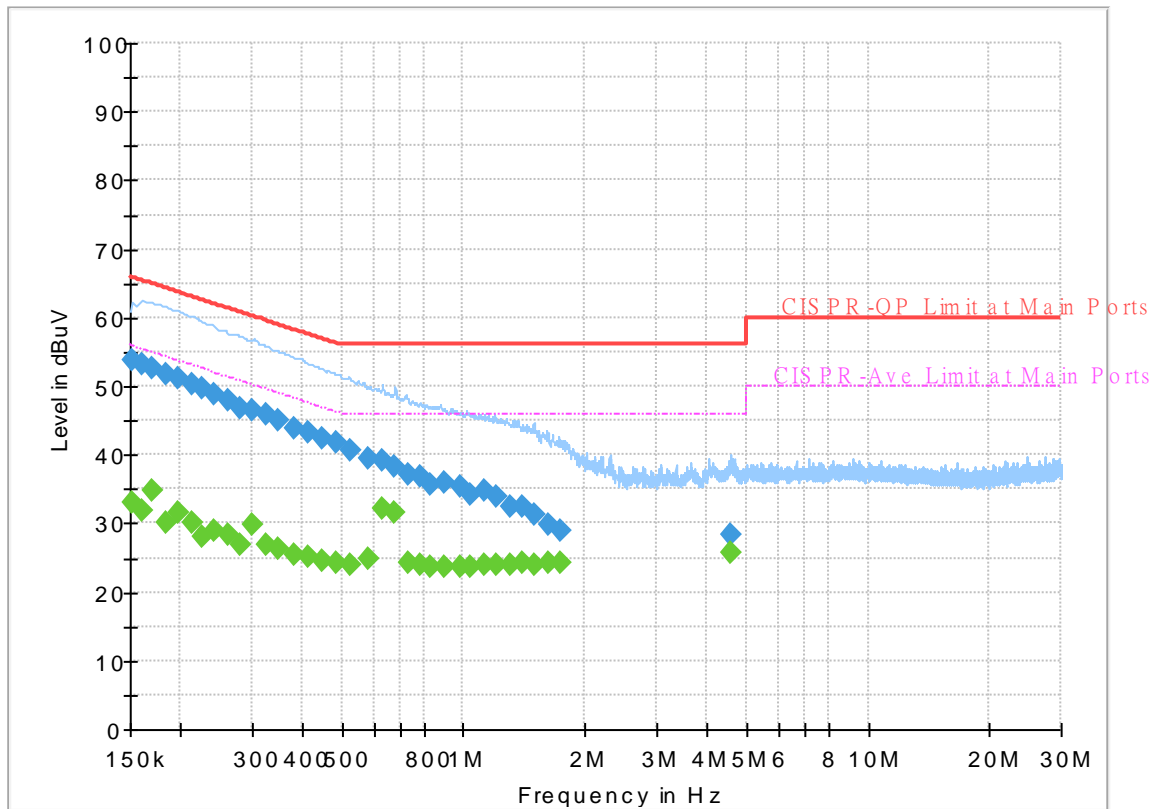

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	33.00	55.88	22.88	L1	OFF	19.6
0.152250	53.82	---	65.88	12.06	L1	OFF	19.6
0.161250	---	32.02	55.40	23.38	L1	OFF	19.6
0.161250	53.11	---	65.40	12.29	L1	OFF	19.6
0.170250	---	34.71	54.95	20.24	L1	OFF	19.6
0.170250	52.68	---	64.95	12.27	L1	OFF	19.6
0.183750	---	30.16	54.31	24.15	L1	OFF	19.6
0.183750	51.74	---	64.31	12.57	L1	OFF	19.6
0.197250	---	31.45	53.73	22.28	L1	OFF	19.6
0.197250	51.03	---	63.73	12.70	L1	OFF	19.6
0.213000	---	30.00	53.09	23.09	L1	OFF	19.6
0.213000	50.42	---	63.09	12.67	L1	OFF	19.6
0.226500	---	27.93	52.58	24.65	L1	OFF	19.6
0.226500	49.61	---	62.58	12.97	L1	OFF	19.6
0.242250	---	28.91	52.02	23.11	L1	OFF	19.6
0.242250	48.77	---	62.02	13.25	L1	OFF	19.6
0.262500	---	28.36	51.35	22.99	L1	OFF	19.6
0.262500	47.81	---	61.35	13.54	L1	OFF	19.6
0.280500	---	26.87	50.80	23.93	L1	OFF	19.6
0.280500	46.79	---	60.80	14.01	L1	OFF	19.6
0.300750	---	29.92	50.22	20.30	L1	OFF	19.6

0.300750	46.48	---	60.22	13.74	L1	OFF	19.6
0.325500	---	26.91	49.57	22.66	L1	OFF	19.6
0.325500	45.92	---	59.57	13.65	L1	OFF	19.6
0.350250	---	26.28	48.96	22.68	L1	OFF	19.6
0.350250	45.17	---	58.96	13.79	L1	OFF	19.6
0.381750	---	25.46	48.24	22.78	L1	OFF	19.6
0.381750	43.89	---	58.24	14.35	L1	OFF	19.6
0.413250	---	25.18	47.58	22.40	L1	OFF	19.6
0.413250	43.34	---	57.58	14.24	L1	OFF	19.6
0.447000	---	24.49	46.93	22.44	L1	OFF	19.6
0.447000	42.50	---	56.93	14.43	L1	OFF	19.6
0.487500	---	24.31	46.21	21.90	L1	OFF	19.6
0.487500	41.71	---	56.21	14.50	L1	OFF	19.6
0.528000	---	24.12	46.00	21.88	L1	OFF	19.6
0.528000	40.78	---	56.00	15.22	L1	OFF	19.6
0.582000	---	24.89	46.00	21.11	L1	OFF	19.6
0.582000	39.58	---	56.00	16.42	L1	OFF	19.6
0.631500	---	32.30	46.00	13.70	L1	OFF	19.6
0.631500	39.12	---	56.00	16.88	L1	OFF	19.6
0.676500	---	31.53	46.00	14.47	L1	OFF	19.6
0.676500	38.42	---	56.00	17.58	L1	OFF	19.6
0.728250	---	24.25	46.00	21.75	L1	OFF	19.6
0.728250	37.15	---	56.00	18.85	L1	OFF	19.6
0.782250	---	24.00	46.00	22.00	L1	OFF	19.6
0.782250	36.73	---	56.00	19.27	L1	OFF	19.6
0.831750	---	23.77	46.00	22.23	L1	OFF	19.6
0.831750	35.81	---	56.00	20.19	L1	OFF	19.6
0.894750	---	23.72	46.00	22.28	L1	OFF	19.6
0.894750	35.93	---	56.00	20.07	L1	OFF	19.6
0.980250	---	23.62	46.00	22.38	L1	OFF	19.6
0.980250	35.35	---	56.00	20.65	L1	OFF	19.6
1.036500	---	23.64	46.00	22.36	L1	OFF	19.7
1.036500	34.17	---	56.00	21.83	L1	OFF	19.7
1.133250	---	23.86	46.00	22.14	L1	OFF	19.7
1.133250	34.77	---	56.00	21.23	L1	OFF	19.7
1.207500	---	23.91	46.00	22.09	L1	OFF	19.7
1.207500	34.01	---	56.00	21.99	L1	OFF	19.7
1.299750	---	23.93	46.00	22.07	L1	OFF	19.7
1.299750	32.51	---	56.00	23.49	L1	OFF	19.7
1.401000	---	24.22	46.00	21.78	L1	OFF	19.7
1.401000	32.35	---	56.00	23.65	L1	OFF	19.7
1.491000	---	23.95	46.00	22.05	L1	OFF	19.7
1.491000	31.30	---	56.00	24.70	L1	OFF	19.7
1.614750	---	24.31	46.00	21.69	L1	OFF	19.7
1.614750	29.83	---	56.00	26.17	L1	OFF	19.7
1.747500	---	24.29	46.00	21.71	L1	OFF	19.7
1.747500	29.01	---	56.00	26.99	L1	OFF	19.7
4.584750	---	25.87	46.00	20.13	L1	OFF	19.8
4.584750	28.37	---	56.00	27.63	L1	OFF	19.8

EUT Information

Report NO : 232212
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

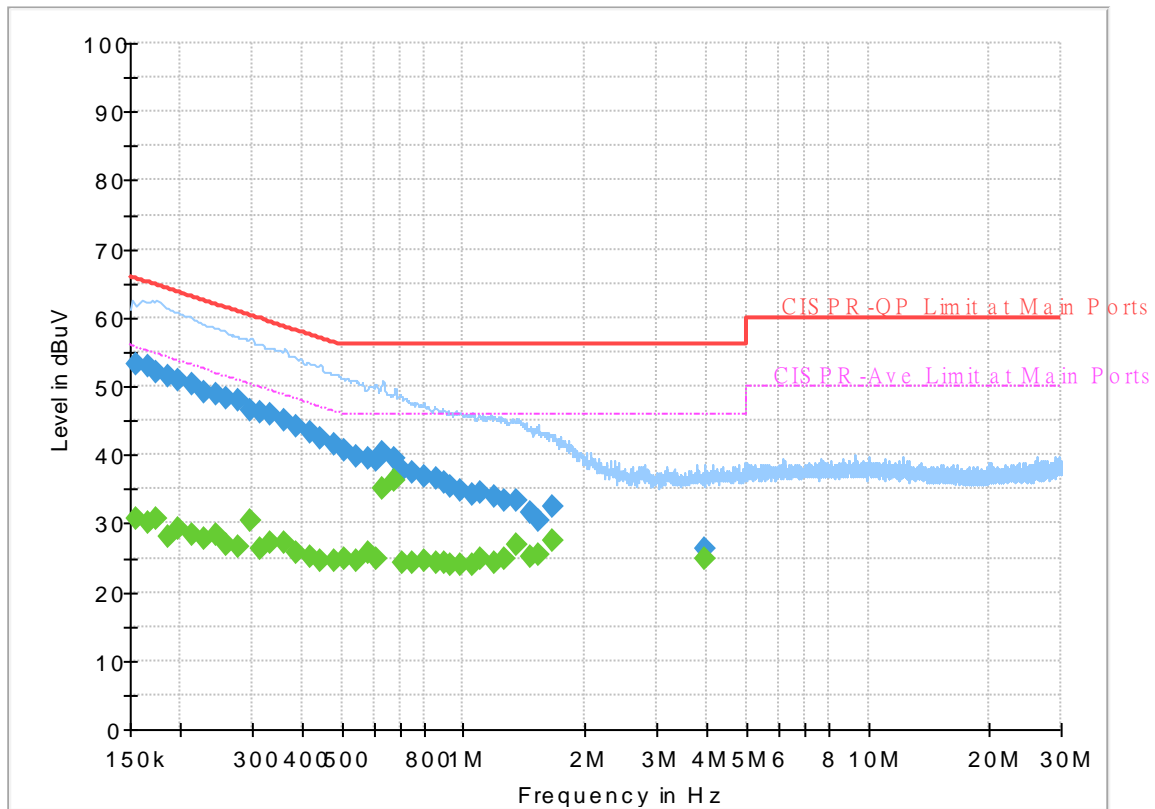

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	30.66	55.75	25.09	N	OFF	19.6
0.154500	53.31	---	65.75	12.44	N	OFF	19.6
0.165750	---	30.22	55.17	24.95	N	OFF	19.6
0.165750	53.04	---	65.17	12.13	N	OFF	19.6
0.174750	---	30.74	54.73	23.99	N	OFF	19.6
0.174750	52.06	---	64.73	12.67	N	OFF	19.6
0.186000	---	28.18	54.21	26.03	N	OFF	19.6
0.186000	51.49	---	64.21	12.72	N	OFF	19.6
0.197250	---	29.37	53.73	24.36	N	OFF	19.6
0.197250	51.00	---	63.73	12.73	N	OFF	19.6
0.213000	---	28.47	53.09	24.62	N	OFF	19.6
0.213000	50.38	---	63.09	12.71	N	OFF	19.6
0.228750	---	27.85	52.50	24.65	N	OFF	19.6
0.228750	49.17	---	62.50	13.33	N	OFF	19.6
0.244500	---	28.25	51.94	23.69	N	OFF	19.6
0.244500	48.70	---	61.94	13.24	N	OFF	19.6
0.258000	---	26.95	51.50	24.55	N	OFF	19.6
0.258000	48.21	---	61.50	13.29	N	OFF	19.6
0.276000	---	26.47	50.94	24.47	N	OFF	19.6
0.276000	47.91	---	60.94	13.03	N	OFF	19.6
0.298500	---	30.38	50.28	19.90	N	OFF	19.6

0.298500	46.63	---	60.28	13.65	N	OFF	19.6
0.314250	---	26.45	49.86	23.41	N	OFF	19.6
0.314250	46.22	---	59.86	13.64	N	OFF	19.6
0.332250	---	27.17	49.40	22.23	N	OFF	19.6
0.332250	45.97	---	59.40	13.43	N	OFF	19.6
0.361500	---	27.05	48.69	21.64	N	OFF	19.6
0.361500	44.93	---	58.69	13.76	N	OFF	19.6
0.386250	---	25.64	48.14	22.50	N	OFF	19.6
0.386250	44.01	---	58.14	14.13	N	OFF	19.6
0.417750	---	25.20	47.49	22.29	N	OFF	19.6
0.417750	43.40	---	57.49	14.09	N	OFF	19.6
0.442500	---	24.59	47.02	22.43	N	OFF	19.6
0.442500	42.54	---	57.02	14.48	N	OFF	19.6
0.480750	---	24.59	46.33	21.74	N	OFF	19.6
0.480750	41.40	---	56.33	14.93	N	OFF	19.6
0.507750	---	24.78	46.00	21.22	N	OFF	19.6
0.507750	40.70	---	56.00	15.30	N	OFF	19.6
0.546000	---	24.44	46.00	21.56	N	OFF	19.6
0.546000	39.89	---	56.00	16.11	N	OFF	19.6
0.582000	---	25.69	46.00	20.31	N	OFF	19.6
0.582000	39.52	---	56.00	16.48	N	OFF	19.6
0.606750	---	24.92	46.00	21.08	N	OFF	19.6
0.606750	39.05	---	56.00	16.95	N	OFF	19.6
0.633750	---	35.14	46.00	10.86	N	OFF	19.6
0.633750	40.27	---	56.00	15.73	N	OFF	19.6
0.676500	---	36.36	46.00	9.64	N	OFF	19.6
0.676500	39.55	---	56.00	16.45	N	OFF	19.6
0.703500	---	24.13	46.00	21.87	N	OFF	19.6
0.703500	37.81	---	56.00	18.19	N	OFF	19.6
0.746250	---	24.12	46.00	21.88	N	OFF	19.6
0.746250	37.37	---	56.00	18.63	N	OFF	19.6
0.800250	---	24.42	46.00	21.58	N	OFF	19.6
0.800250	36.84	---	56.00	19.16	N	OFF	19.6
0.856500	---	24.13	46.00	21.87	N	OFF	19.6
0.856500	36.53	---	56.00	19.47	N	OFF	19.6
0.894750	---	24.23	46.00	21.77	N	OFF	19.6
0.894750	36.05	---	56.00	19.95	N	OFF	19.6
0.933000	---	23.86	46.00	22.14	N	OFF	19.6
0.933000	35.48	---	56.00	20.52	N	OFF	19.6
0.984750	---	23.93	46.00	22.07	N	OFF	19.6
0.984750	34.92	---	56.00	21.08	N	OFF	19.6
1.047750	---	24.05	46.00	21.95	N	OFF	19.6
1.047750	34.11	---	56.00	21.89	N	OFF	19.6
1.097250	---	24.82	46.00	21.18	N	OFF	19.6
1.097250	34.54	---	56.00	21.46	N	OFF	19.6
1.191750	---	24.38	46.00	21.62	N	OFF	19.6
1.191750	33.97	---	56.00	22.03	N	OFF	19.6
1.266000	---	24.80	46.00	21.20	N	OFF	19.6
1.266000	33.38	---	56.00	22.62	N	OFF	19.6
1.356000	---	26.88	46.00	19.12	N	OFF	19.7
1.356000	33.33	---	56.00	22.67	N	OFF	19.7
1.466250	---	25.16	46.00	20.84	N	OFF	19.7
1.466250	31.44	---	56.00	24.56	N	OFF	19.7
1.536000	---	25.40	46.00	20.60	N	OFF	19.7
1.536000	30.47	---	56.00	25.53	N	OFF	19.7
1.655250	---	27.41	46.00	18.59	N	OFF	19.7
1.655250	32.48	---	56.00	23.52	N	OFF	19.7
3.963750	---	24.95	46.00	21.05	N	OFF	19.8
3.963750	26.24	---	56.00	29.76	N	OFF	19.8



Appendix C. Radiated Spurious Emission

Test Engineer :	Theodore, Fu Chen and Troye Hsieh	Temperature :	20.1~21.5°C
		Relative Humidity :	57.8~66.4%

<1Mbps>

2.4GHz 2400~2483.5MHz
BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BLE CH 00 2402MHz		2380.455	52.82	-21.18	74	41.86	27.64	17.27	33.95	369	135	P	H	
		2322.81	43.39	-10.61	54	32.35	27.81	17.2	33.97	369	135	A	H	
	*	2402	87.64	-	-	76.69	27.6	17.3	33.95	369	135	P	H	
	*	2402	87.06	-	-	76.11	27.6	17.3	33.95	369	135	A	H	
													H	
													H	
			2382.87	52.82	-21.18	74	41.86	27.63	17.28	33.95	113	285	P	V
			2389.275	43.46	-10.54	54	32.5	27.62	17.29	33.95	113	285	A	V
	*		2402	93.26	-	-	82.31	27.6	17.3	33.95	113	285	P	V
	*		2402	92.62	-	-	81.67	27.6	17.3	33.95	113	285	A	V
													V	
												V		
BLE CH 19 2440MHz		2323.92	53.35	-20.65	74	42.32	27.8	17.2	33.97	358	137	P	H	
		2344.88	43.53	-10.47	54	32.54	27.72	17.23	33.96	358	137	A	H	
	*	2440	87.13	-	-	76.19	27.52	17.36	33.94	358	137	P	H	
	*	2440	86.58	-	-	75.64	27.52	17.36	33.94	358	137	A	H	
			2496.24	53.28	-20.72	74	42.35	27.41	17.44	33.92	358	137	P	H
			2483.68	43.71	-10.29	54	32.77	27.43	17.43	33.92	358	137	A	H
			2351.76	53.21	-20.79	74	42.23	27.7	17.24	33.96	111	293	P	V
			2354.16	43.78	-10.22	54	32.81	27.69	17.24	33.96	111	293	A	V
	*		2440	93.89	-	-	82.95	27.52	17.36	33.94	111	293	P	V
	*		2440	93.39	-	-	82.45	27.52	17.36	33.94	111	293	A	V
			2487.28	53.1	-20.9	74	42.16	27.43	17.43	33.92	111	293	P	V
		2486.56	43.41	-10.59	54	32.47	27.43	17.43	33.92	111	293	A	V	



BLE CH 39 2480MHz	*	2480	88.94	-	-	78.01	27.44	17.42	33.93	115	288	P	H
	*	2480	88.36	-	-	77.43	27.44	17.42	33.93	115	288	A	H
		2483.76	54.14	-19.86	74	43.2	27.43	17.43	33.92	115	288	P	H
		2484.28	43.56	-10.44	54	32.62	27.43	17.43	33.92	115	288	A	H
													H
													H
	*	2480	93.64	-	-	82.71	27.44	17.42	33.93	106	287	P	V
	*	2480	93.1	-	-	82.17	27.44	17.42	33.93	106	287	A	V
		2483.68	55	-19	74	44.06	27.43	17.43	33.92	106	287	P	V
		2483.84	45.04	-8.96	54	34.1	27.43	17.43	33.92	106	287	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 00 2402MHz		4320	48.67	-25.33	74	65.42	30.24	11.45	58.44	251	210	P	H	
		4320	46.4	-7.6	54	63.15	30.24	11.45	58.44	251	210	A	H	
		4804	51.34	-22.66	74	67.11	31.29	11.4	58.46	223	200	P	H	
		4804	47.87	-6.13	54	63.64	31.29	11.4	58.46	223	200	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4320	42.73	-31.27	74	59.48	30.24	11.45	58.44	-	-	P	V
			4804	50.71	-23.29	74	66.48	31.29	11.4	58.46	297	213	P	V
			4804	45.54	-8.46	54	61.31	31.29	11.4	58.46	297	213	A	V
														V
														V
														V
														V
														V
													V	
													V	



BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 19 2440MHz		4320	50.62	-23.38	74	67.37	30.24	11.45	58.44	276	223	P	H	
		4320	48.33	-5.67	54	65.08	30.24	11.45	58.44	276	223	A	H	
		4880	52.39	-21.61	74	67.96	31.26	11.65	58.48	203	206	P	H	
		4880	49.16	-4.84	54	64.73	31.26	11.65	58.48	203	206	A	H	
		7320	42.62	-31.38	74	51.75	36.6	13.44	59.17	-	-	P	H	
														H
														H
														H
														H
														H
														H
														H
			4320	47.11	-26.89	74	63.86	30.24	11.45	58.44	384	229	P	V
			4320	44.27	-9.73	54	61.02	30.24	11.45	58.44	384	229	A	V
			4880	51.05	-22.95	74	66.62	31.26	11.65	58.48	259	221	P	V
			4880	46.65	-7.35	54	62.22	31.26	11.65	58.48	259	221	A	V
			7320	42.5	-31.5	74	51.63	36.6	13.44	59.17	-	-	P	V
														V
														V
														V
													V	
													V	
													V	



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 39 2480MHz		4320	48.84	-25.16	74	65.59	30.24	11.45	58.44	161	223	P	H	
		4320	46.3	-7.7	54	63.05	30.24	11.45	58.44	161	223	A	H	
		4960	50.58	-23.42	74	65.68	31.5	11.89	58.49	207	206	P	H	
		4960	47.42	-6.58	54	62.52	31.5	11.89	58.49	207	206	A	H	
		7440	42.23	-31.77	74	50.92	36.68	13.75	59.12	-	-	P	H	
														H
														H
														H
														H
														H
														H
														H
			4320	47.01	-26.99	74	63.76	30.24	11.45	58.44	357	222	P	V
			4320	43.59	-10.41	54	60.34	30.24	11.45	58.44	383	222	A	V
			4960	49.3	-24.7	74	64.4	31.5	11.89	58.49	100	349	P	V
			4960	45.23	-8.77	54	60.33	31.5	11.89	58.49	100	349	A	V
			7440	42.62	-31.38	74	51.31	36.68	13.75	59.12	-	-	P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BLE LF		53.28	18.82	-21.18	40	37.5	12.7	1.1	32.48	-	-	P	H	
		84.32	16.84	-23.16	40	34.25	13.6	1.4	32.41	-	-	P	H	
		135.73	19.13	-24.37	43.5	32.42	17.32	1.82	32.43	-	-	P	H	
		195.87	19.01	-24.49	43.5	34.68	14.69	2.16	32.52	-	-	P	H	
		880.69	29.85	-16.15	46	27.65	28.94	4.59	31.33	-	-	P	H	
		956.35	31.01	-14.99	46	26.35	30.71	4.8	30.85	-	-	P	H	
														H
														H
														H
														H
														H
														H
			36.79	23.41	-16.59	40	33.9	21.05	0.86	32.4	-	-	P	V
			53.28	25.32	-14.68	40	44	12.7	1.1	32.48	-	-	P	V
			68.8	24.06	-15.94	40	43.17	12.08	1.26	32.45	-	-	P	V
			135.73	19.51	-23.99	43.5	32.8	17.32	1.82	32.43	-	-	P	V
			851.59	29.51	-16.49	46	27.43	29.06	4.5	31.48	-	-	P	V
			957.32	30.71	-15.29	46	25.99	30.77	4.8	30.85	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	

Remark

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Theodore, Fu Chen and Troye Hsieh	Temperature :	20.1~21.5°C
		Relative Humidity :	57.8~66.4%

Note symbol





-L	Low channel location
-R	High channel location







<1Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

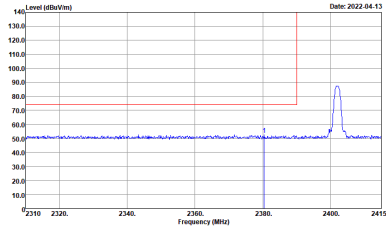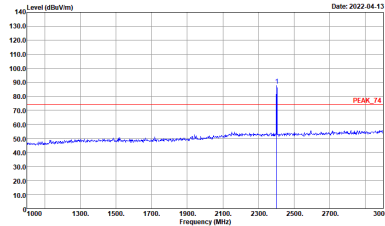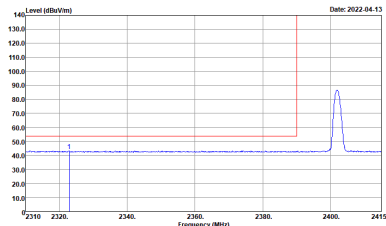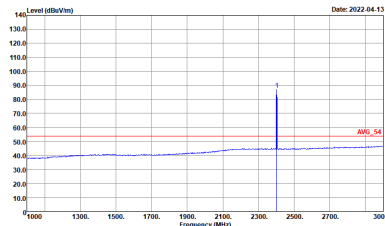BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
Horizontal		Fundamental
Peak	 <p>Site Condition : 03CH11-HY : PEAK_BE_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site Condition : 03CH11-HY : PEAK_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site Condition : 03CH11-HY : AVG_BE_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>	 <p>Site Condition : 03CH11-HY : AVG_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>

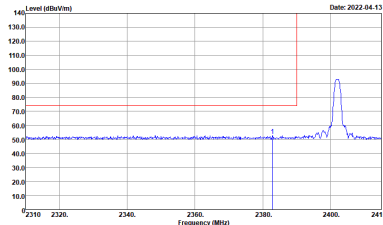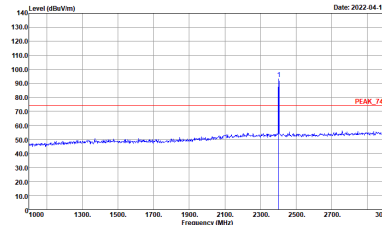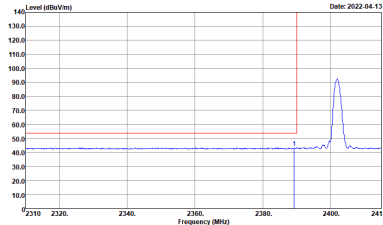
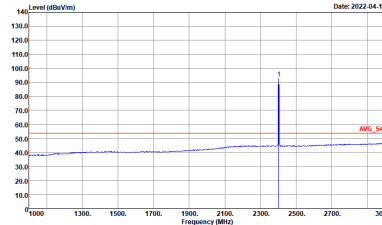


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg	 <p>Site : 03CH11-HY Condition : AVG_BE_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>

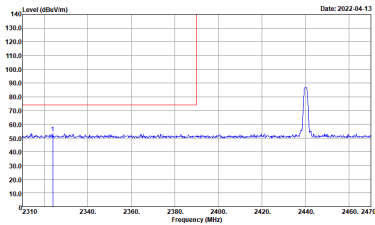
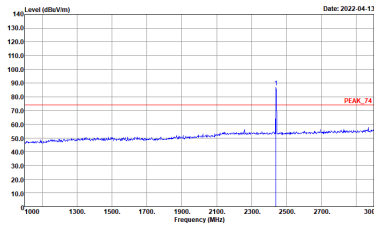
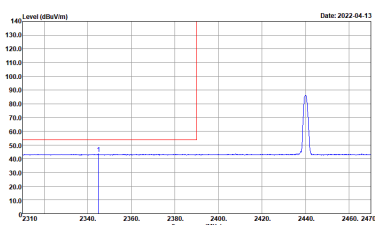
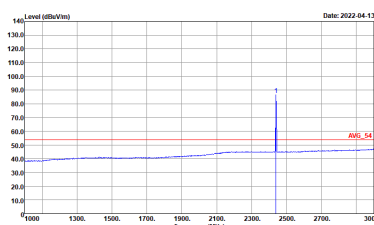


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	 <p>Date: 2022-04-13</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Date: 2022-04-13</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Date: 2022-04-13</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>	 <p>Date: 2022-04-13</p> <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>

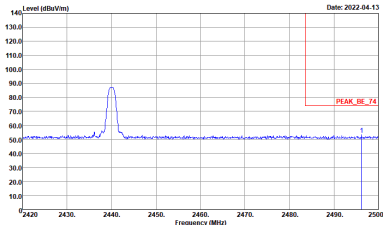
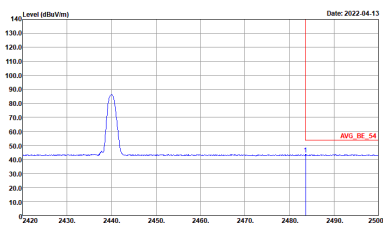


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank

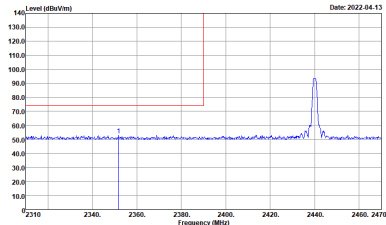
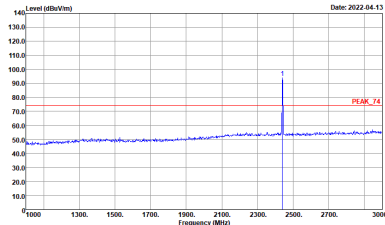
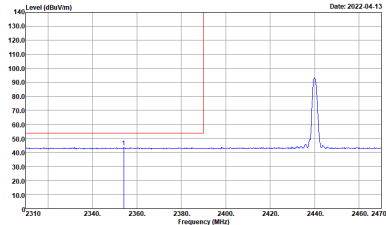
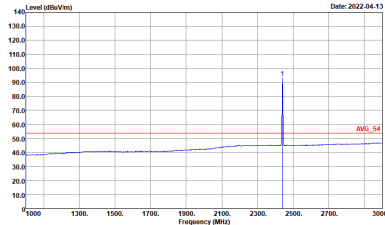


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>



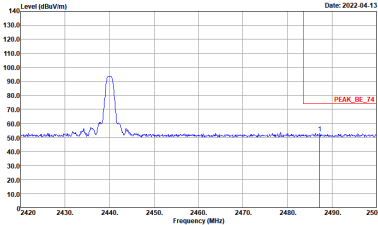
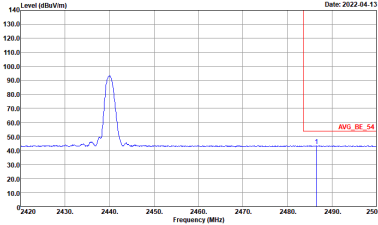


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank

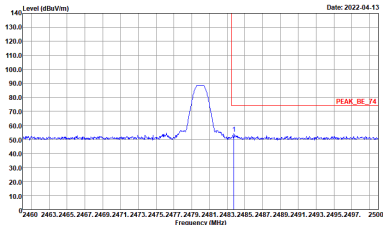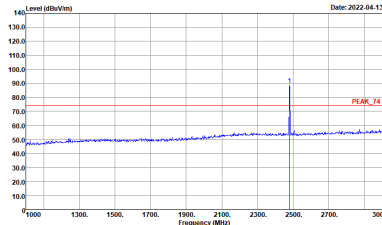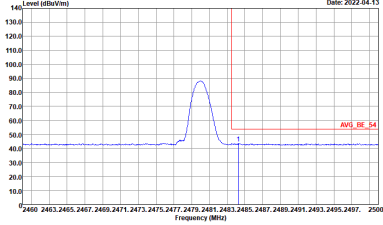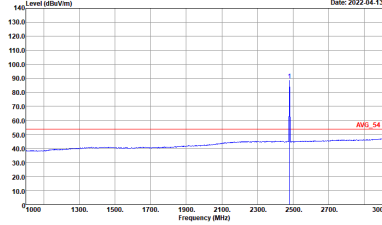

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>

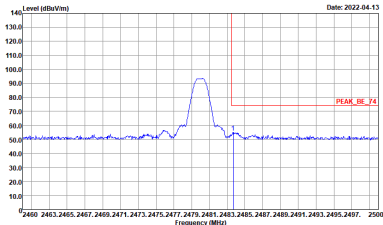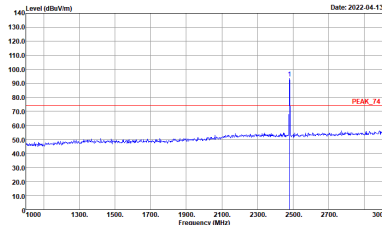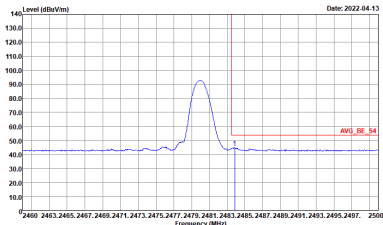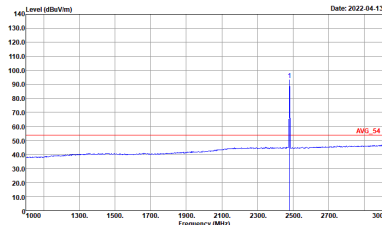

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1326_20211025 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>



2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-4Y Condition : PEAK_74 3m 91200_1326_20211025 HORIZONTAL</p>	<p>Site : 03CH11-4Y Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-14Y Condition : PEAK_74 3m 91200_1326_20211025 HORIZONTAL</p>	<p>Site : 03CH11-14Y Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL</p>

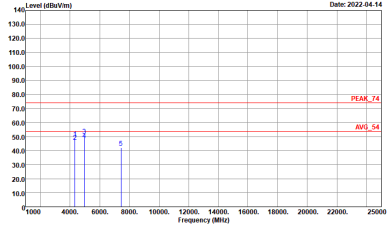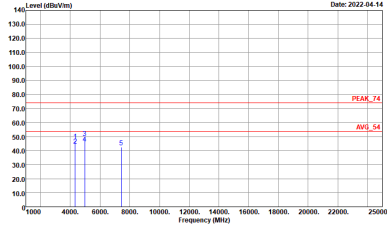

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
	Horizontal	Vertical
<p>Peak Avg.</p>	 <p>Site : 03CH11-1F Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL</p>	 <p>Site : 03CH11-1F Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL</p>



Emission below 1GHz
2.4GHz BLE (LF)

BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CH11-HY Condition : QP 3m BL-LOG 35414-211009 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition : QP 3m BL-LOG 35414-211009 VERTICAL</p>



Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth -LE	66.67	416	2.40	3kHz

