

FCC Test Report

Equipment : Philips HUE Bridge 2.1
Brand Name : PHILIPS
Model No. : 3241312018A
FCC ID : 2AGBW3241312018AX
Standard : 47 CFR FCC Part 15.247
Frequency : 2400 MHz – 2483.5 MHz
FCC Classification : DTS
Function : Point-to-multipoint; Point-to-point
Applicant / Manufacturer : Philips Lighting(China) Investment Co., Ltd.
Building 9, Lane 888, Tianlin Road, Minhang District,
Shanghai 200233 China

The product sample received on Jun. 06, 2016 and completely tested on Jun. 22, 2016. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:


Kevin Liang / Assistant Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Testing Applied Standards	7
1.3	Testing Location Information	7
1.4	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT.....	9
2.1	The Worst Case Modulation Configuration	9
2.2	Test Channel Mode	9
2.3	The Worst Case Measurement Configuration.....	10
2.4	Accessories And Support Equipment.....	11
2.5	Test Setup Diagram	12
3	TRANSMITTER TEST RESULT	13
3.1	AC Power-line Conducted Emissions	13
3.2	DTS Bandwidth.....	15
3.3	Fundamental Emission Output Power.....	16
3.4	Power Spectral Density	19
3.5	Transmitter Radiated Bandedge Emissions.....	21
3.6	Transmitter Radiated Unwanted Emissions	24
4	TEST EQUIPMENT AND CALIBRATION DATA	28

Appendix I. Test Result of AC Power-line Conducted Emissions

Appendix A. Test Result of Emission Bandwidth

Appendix B. Test Result of Maximum Conducted Output Power

Appendix C. Test Result of Power Spectral Density

Appendix D. Test Result of Transmitter Radiated Bandedge Emissions

Appendix E. Transmitter Radiated Unwanted Emissions

Appendix F. Test Photos

Appendix G. Photographs of EUT



Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.4532600MHz 31.02 (Margin 25.80dB) - QP 25.31 (Margin 21.51dB) - AV	FCC 15.207	Complied
3.2	15.247(a)	DTS Bandwidth	Refer as Appendix A	≥500kHz	Complied
3.3	15.247(b)	Fundamental Emission Output Power	Refer as Appendix B	Power [dBm]:30	Complied
3.4	15.247(e)	Power Spectral Density	Refer as Appendix C	PSD [dBm/3kHz]:8	Complied
3.5	15.247(d)	Test Result of Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 2398.180 MHz: 25.47 dB Restricted Bands [dBuV/m at 3m]: 2484.320MHz 66.770 (Margin 7.02 dB) – PK 2483.600MHz 52.900 (Margin 1.10 dB) - AV	Non-Restricted Bands:> 20 dBc Bands: FCC 15.209	Complied
3.6	15.247(d)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]:4924.000 MHz 52.89 (Margin 1.11dB) - AV 55.73 (Margin 18.27dB) - PK	Non-Restricted Bands:> 20 dBc Restricted Bands: FCC 15.209	Complied

1 General Description

1.1 Information

1.1.1 RF General Information

Band	Mode	BWch (MHz)	Nss-Min	Nant	Worst Data Rate / MCS
2.4G	11b	20	1	1	1 Mbps
2.4G	11g	20	1	1	6 Mbps
2.4G	HT20	20	1,(M0-7)	1	MCS 0
2.4G	HT40	40	1,(M0-7)	1	MCS 0

Note:

- 2.4G is the 2.4GHz Band (2.4-2.4835GHz).
- 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- BWch is the nominal channel bandwidth.
- Nss-Min is the minimum number of spatial streams.
- Nant is the number of outputs. e.g., 2(2,3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.

1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)
<input type="checkbox"/>	Single power level with corresponding antenna(s).
<input type="checkbox"/>	Multiple power level and corresponding antenna(s).
<input type="checkbox"/>	RF connector provided
<input type="checkbox"/>	Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)
<input type="checkbox"/>	Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	printed PIFA	2.4



1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 Mode Test Duty Cycle

Operated Mode for Worst Duty Cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 100.00% - IEEE 802.11b	0.00
<input checked="" type="checkbox"/> 97.50%- IEEE 802.11g	0.11
<input checked="" type="checkbox"/> 97.30%- IEEE 802.11n (HT20)	0.12
<input checked="" type="checkbox"/> 96.10%- IEEE 802.11n (HT40)	0.17

1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input type="checkbox"/> DC	
Type of DC Source	<input checked="" type="checkbox"/> External AC adapter	<input type="checkbox"/> From Host System	<input type="checkbox"/> Battery



1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ FCC KDB 558074 D01 v03r05
- ◆ FCC 15.247

1.3 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD	: No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	
		TEL	: 886-3-327-3456	FAX : 886-3-327-6973
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Daniel	21.5°C / 55%	22/06/2016
RF Conducted	TH01-HY	Howard	23.5°C / 65%	14/06/2016
Radiated	03CH03-HY	Jeff	26.6°C / 63%	22/06/2016

Test site registered number [553509] with FCC.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		±2.3 dB
Emission bandwidth, 6dB bandwidth		±0.6 %
RF output power, conducted		±0.1 dB
Power density, conducted		±0.6 dB
Unwanted emissions, conducted	9 – 150 kHz	±0.4 dB
	0.15 – 30 MHz	±0.4 dB
	30 – 1000 MHz	±0.6 dB
	1 – 18 GHz	±0.5 dB
	18 – 40 GHz	±0.5 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	±2.5 dB
	0.15 – 30 MHz	±2.3 dB
	30 – 1000 MHz	±2.6 dB
	1 – 18 GHz	±3.6 dB
	18 – 40 GHz	±3.8 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±5 %
DC and low frequency voltages		±0.9%
Time		±1.4 %
Duty Cycle		±0.6 %

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing			
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS
11b	1	1-11 Mbps	1 Mbps
11g	1	6-54 Mbps	6 Mbps
HT20	1	MCS 0-7	MCS 0
HT40	1	MCS 0-7	MCS 0

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). The EUT support HT20 and HT40. Worst modulation mode of Guard Interval (GI) is 800ns.
 Note 2: Modulation modes consist below configuration:
 11b: IEEE 802.11b, 11g: IEEE 802.11g, HT20/HT40: IEEE 802.11n
 Note 3: RF output power specifies that Maximum Peak Conducted Output Power.

2.2 Test Channel Mode

Test Software Version	ART2-GUI/2.3
-----------------------	--------------

Band	Mode	BWch (MHz)	Nss-Min	Nant	Ch. (MHz)	Range	Power Setting
2.4G	11b	20	1	1	2412	L	8.5
2.4G	11b	20	1	1	2437	M	7.5
2.4G	11b	20	1	1	2462	H	8
2.4G	11g	20	1	1	2412	L	13
2.4G	11g	20	1	1	2437	M	14.5
2.4G	11g	20	1	1	2462	H	12.5
2.4G	HT20	20	1,(M0-7)	1	2412	L	12.5
2.4G	HT20	20	1,(M0-7)	1	2437	M	15.5
2.4G	HT20	20	1,(M0-7)	1	2462	H	12.5
2.4G	HT40	40	1,(M0-7)	1	2422	L	10
2.4G	HT40	40	1,(M0-7)	1	2437	M	13
2.4G	HT40	40	1,(M0-7)	1	2452	H	10.5

Abbreviation Explanation




Band	Mode	BWch (MHz)	Nss-Min	Nant	Ch. (MHz)	Range	Test Cond.	Abbreviation
2.4G	HT20	20	1,(M0-15)	2	2412	L	TN,VN	2.4G;HT20;20;1,(M0-15);2;2412;L;TN,VN
2.4G	HT40	40	1,(M0-15)	2	2437	M	TN,VN	2.4G;HT40;40;1,(M0-15);2;2437;M;TN,VN

Note:
 ♦ Test range channel consist of L (Low Ch.), M (Middle Ch.), H (High Ch.), S (Single Ch).

The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	Transmit Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth, Fundamental Emission Output Power, Power Spectral Density, Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Emissions in Restricted Frequency Bands		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
User Position	<input type="checkbox"/> EUT will be placed in fixed position.		
	<input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes.		
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions.		
Operating Mode < 1GHz	<input checked="" type="checkbox"/> 1. Transmit Mode		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT	V		

2.3 Accessories And Support Equipment



Accessories				
AC Adapter	Brand Name	Ten Pao	Model Name	S005BMM0500100
	Power Rating	I/P:100-240Vac, 300 mA, O/P: 5 Vdc, 1000 mA		
	Power Cord	1.5 meter, non-shielded cable, w/o ferrite core		
RJ45 Cable	Category	CAT5	In/Out door	-
	Power Cord	1 meter, non-shielded cable		

Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment - RF Conducted			
No.	Equipment	Brand Name	Model Name
1	Notebook	DELL	E5530
2	AC Adapter for Notebook	DELL	HA65NM130

Support Equipment - AC Conduction and Radiated Emission			
No.	Equipment	Brand Name	Model Name
1	-	-	-
2	-	-	-

2.4 Test Setup Diagram

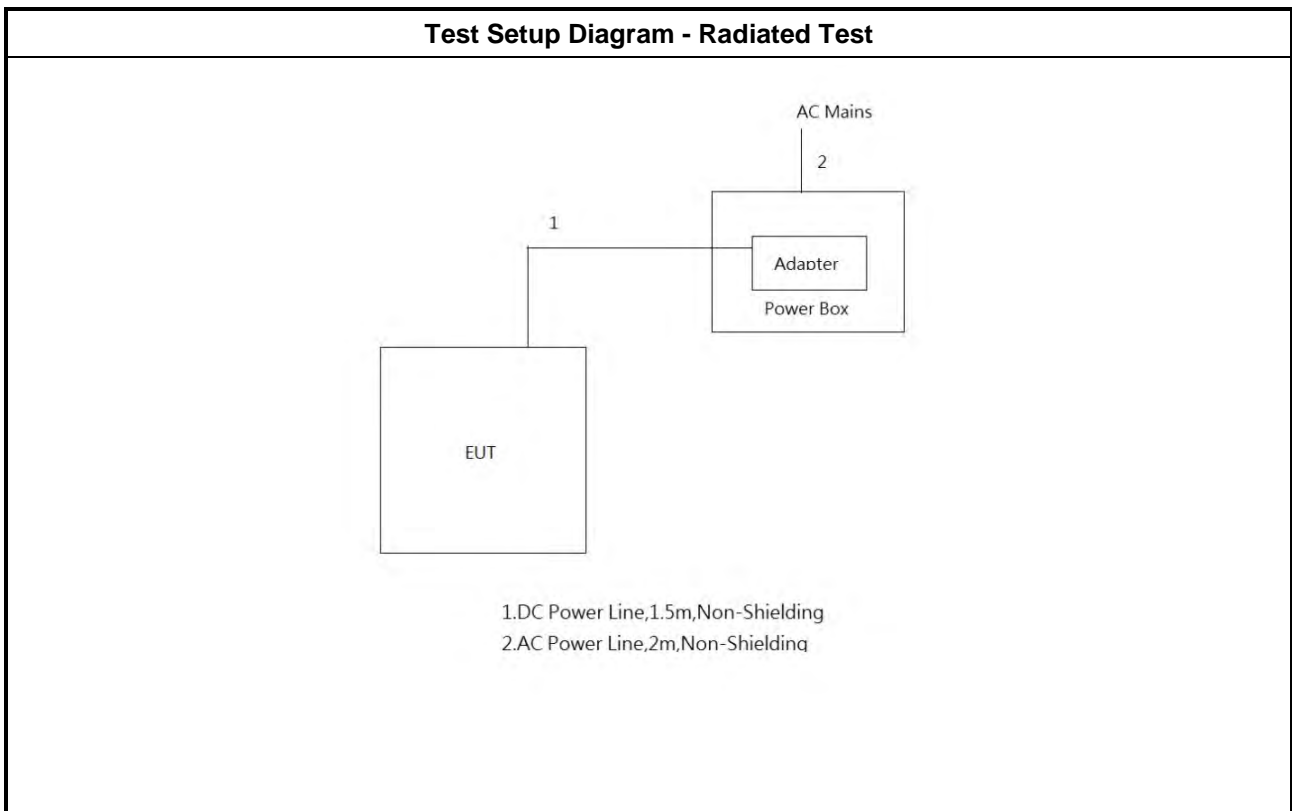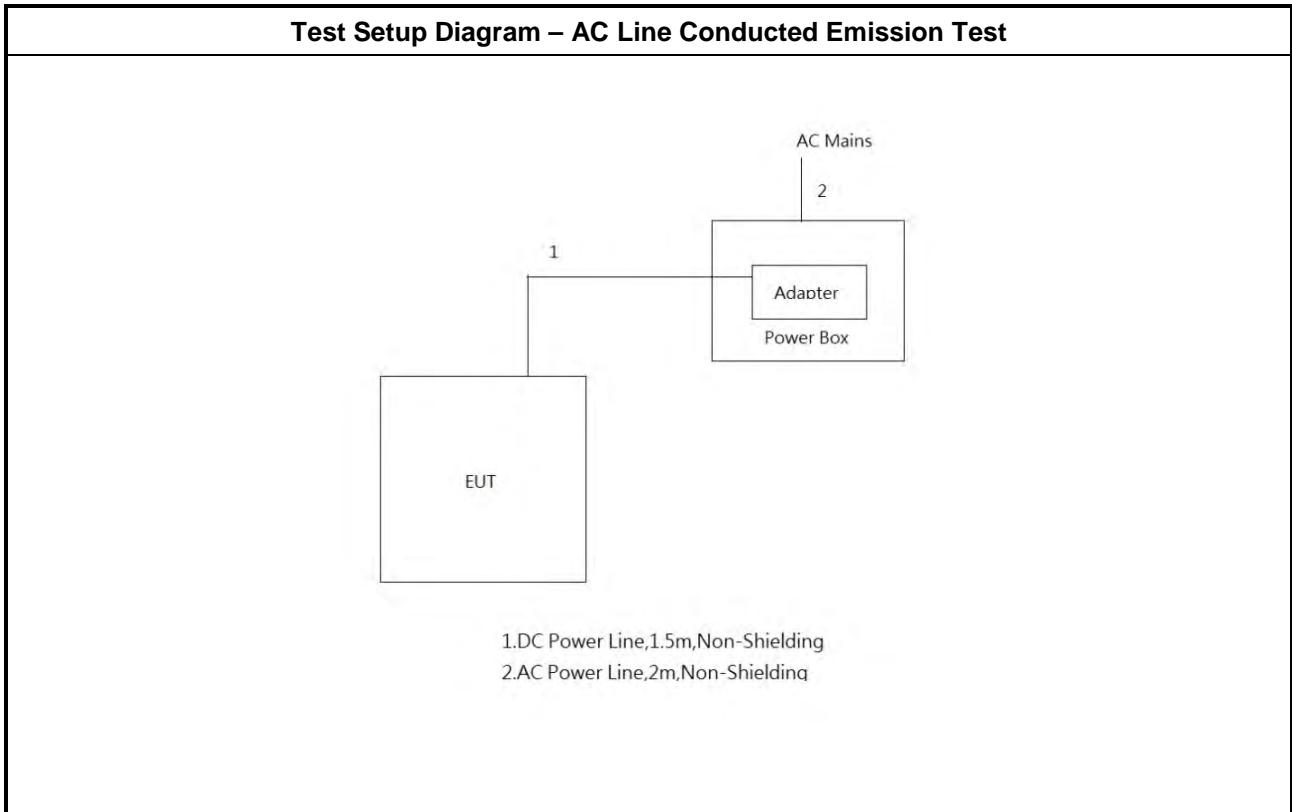

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
<ul style="list-style-type: none"> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

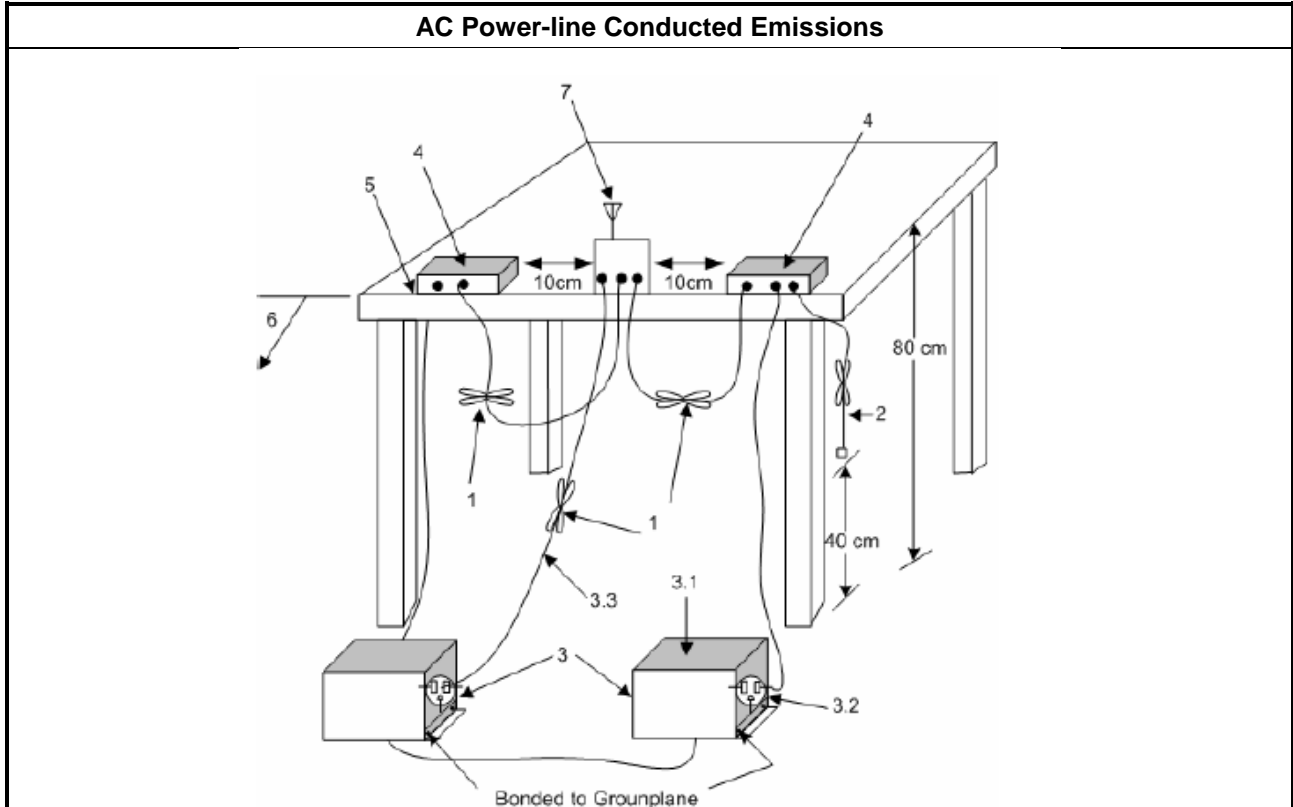



3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix I

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<ul style="list-style-type: none"> ▪ 6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<ul style="list-style-type: none"> ▪ For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

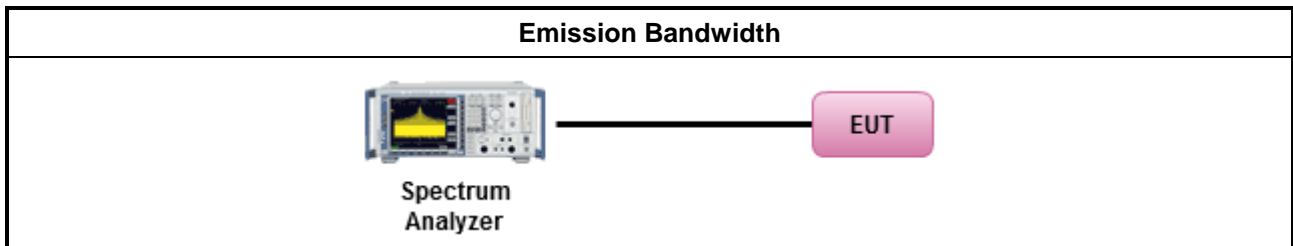

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix A

3.3 Fundamental Emission Output Power

3.3.1 Fundamental Emission Output Power Limit

Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
<ul style="list-style-type: none"> ▪ 2400-2483.5 MHz Band: 	
	<ul style="list-style-type: none"> ▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	<ul style="list-style-type: none"> ▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> ▪ Smart antenna system (SAS):
	<ul style="list-style-type: none"> - Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> - Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> - Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dBm
e.i.r.p. Power Limit:	
<ul style="list-style-type: none"> ▪ 2400-2483.5 MHz Band 	
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
	<ul style="list-style-type: none"> ▪ Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
	<ul style="list-style-type: none"> ▪ Smart antenna system (SAS)
	<ul style="list-style-type: none"> - Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<ul style="list-style-type: none"> - Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<ul style="list-style-type: none"> - Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
<p>P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.</p>	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ Maximum Peak Conducted Output Power 	
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.1.1 Option 1 (RBW ≥ EBW method).
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 9.1.2 Option 2 (peak power meter for VBW ≥ DTS BW)
<ul style="list-style-type: none"> ▪ Maximum Conducted Output Power 	
[duty cycle ≥ 98% or external video / power trigger]	
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
RF power meter and average over on/off periods with duty factor or gated trigger	
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.3 Method AVGPM (using an RF average power meter).
<ul style="list-style-type: none"> ▪ For conducted measurement. 	
	<ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	<ul style="list-style-type: none"> ▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

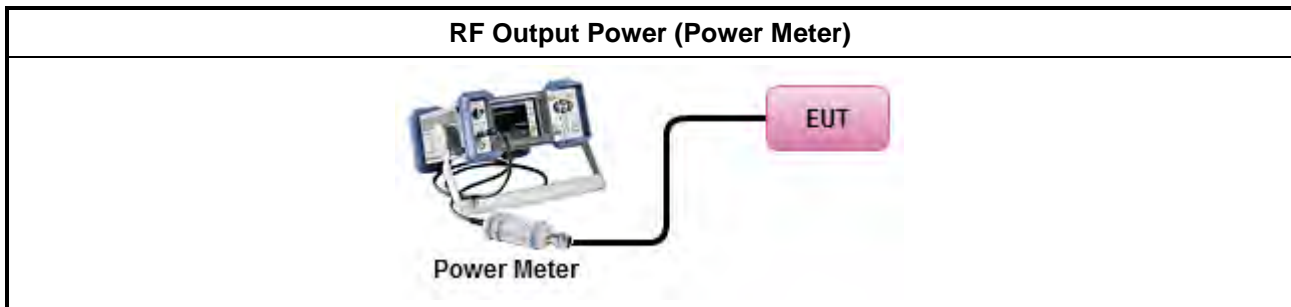

3.3.5 Test Result of Maximum Peak Conducted Output Power

Refer as Appendix B

3.3.6 Test Result of Maximum Average Conducted Output Power

Refer as Appendix B

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> ▪ Power Spectral Density (PSD) \leq 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method						
<ul style="list-style-type: none"> ▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option). 						
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz; Detector=peak). [duty cycle \geq 98% or external video / power trigger]						
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.3 Method AVGPSD-1 (spectral trace averaging).						
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.4 Method AVGPSD-2 (slow sweep speed) duty cycle $<$ 98% and average over on/off periods with duty factor						
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.5 Method AVGPSD-1 Alt (spectral trace averaging).						
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)						
<ul style="list-style-type: none"> ▪ For conducted measurement. <ul style="list-style-type: none"> ▪ If The EUT supports multiple transmit chains using options given below: <table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="width: 20px; text-align: center;"><input checked="" type="checkbox"/></td> <td>Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N_{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.</td> </tr> <tr> <td style="text-align: center;"><input type="checkbox"/></td> <td>Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,</td> </tr> <tr> <td style="text-align: center;"><input type="checkbox"/></td> <td>Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.</td> </tr> </tbody> </table> 	<input checked="" type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N _{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.	<input type="checkbox"/>	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,	<input type="checkbox"/>	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
<input checked="" type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N _{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.					
<input type="checkbox"/>	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,					
<input type="checkbox"/>	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.					

3.4.4 Test Setup

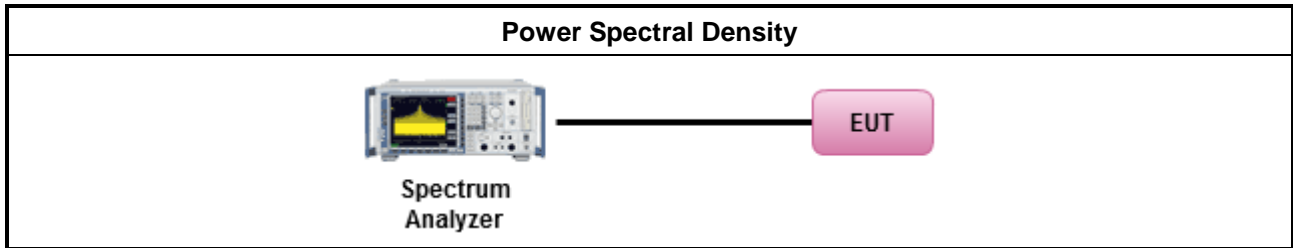


3.4.5 Test Result of Power Spectral Density

Refer as Appendix C

3.5 Transmitter Radiated Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

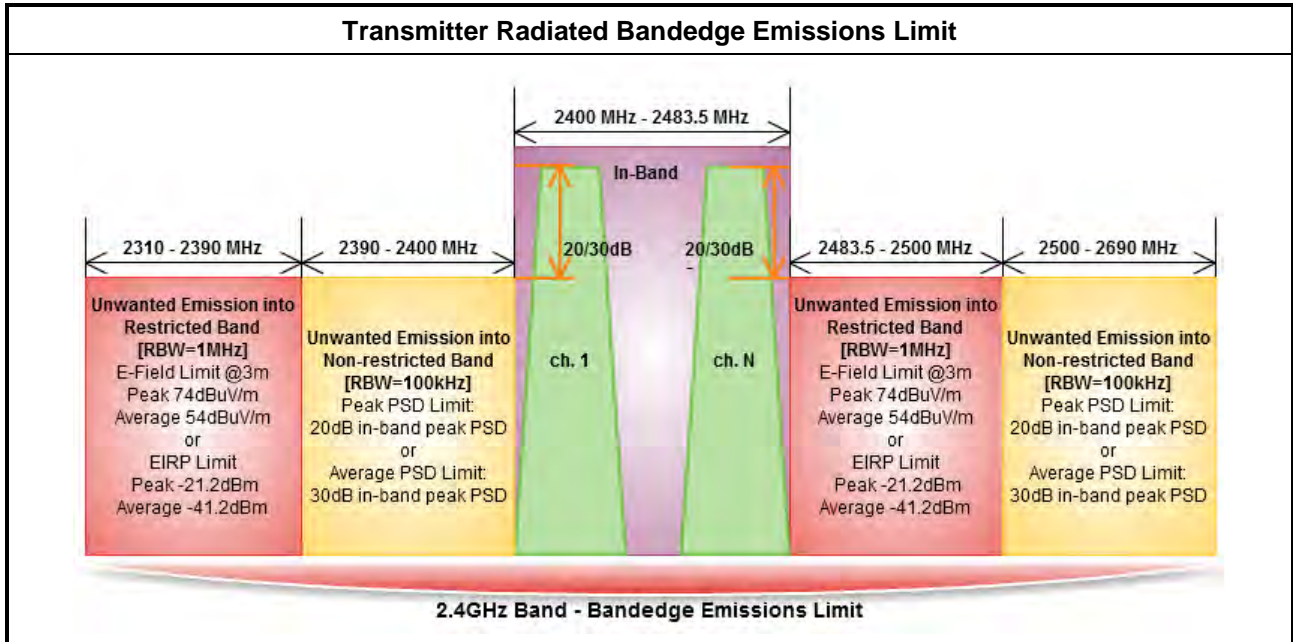


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.10 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle \geq 98%)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW \geq 1/T).
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.10 for band-edge testing.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.10.6.2 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7 and ANSI C63.10, clause 6.6. Test distance is 3m.

3.5.4 Test Setup

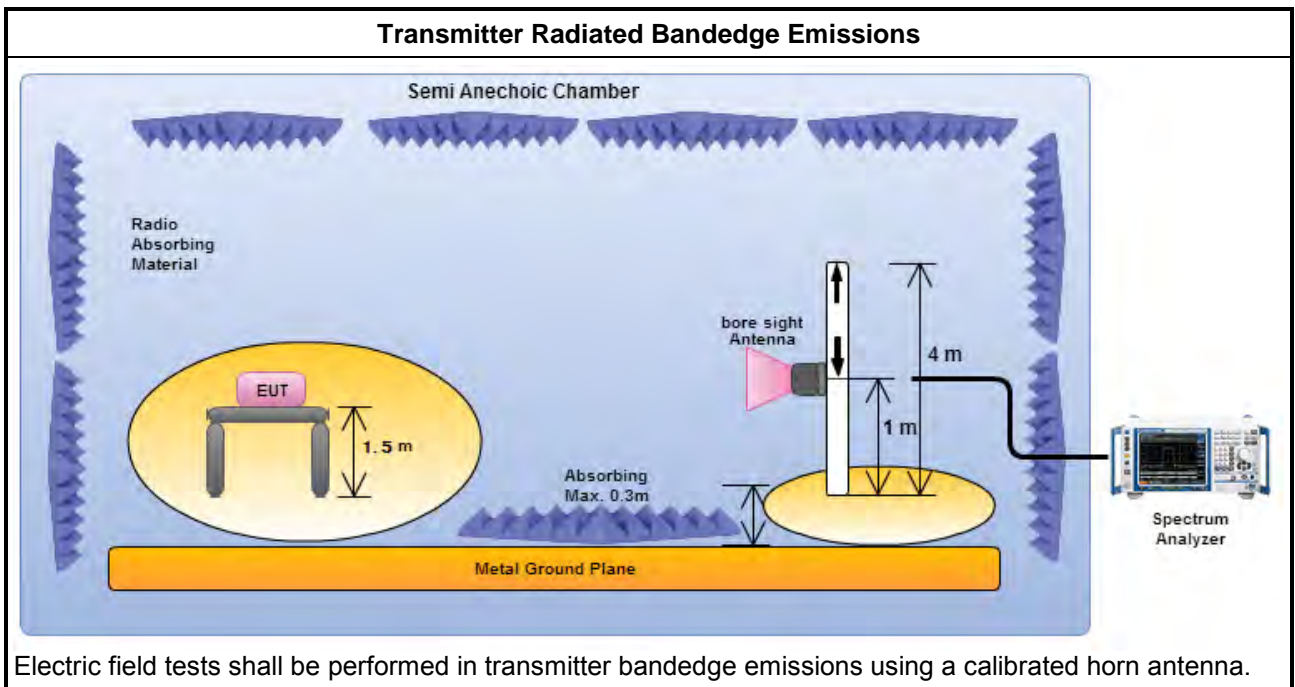



3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix D

3.6 Transmitter Radiated Unwanted Emissions

3.6.1 Transmitter in Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle \geq 98%)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW \geq 1/T).
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.3 measurement procedure Quasi-Peak limit.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 30 dB below the permissible value has no need to be reported.


3.6.4 Test Setup

Transmitter Spurious and Out of Band Emissions (9 kHz - 30 MHz)

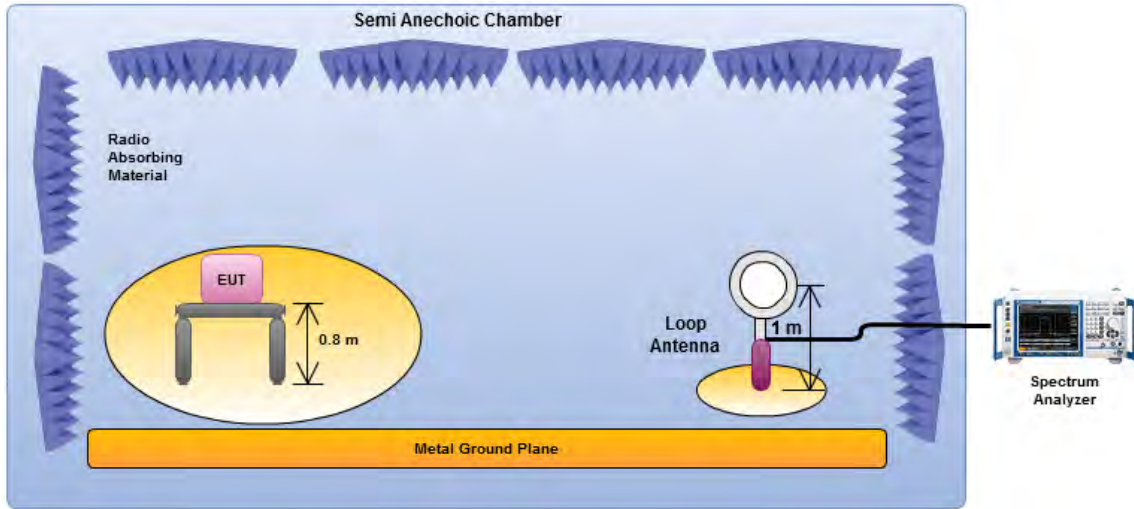


Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna.

Transmitter Radiated Unwanted Emissions (below 1GHz)

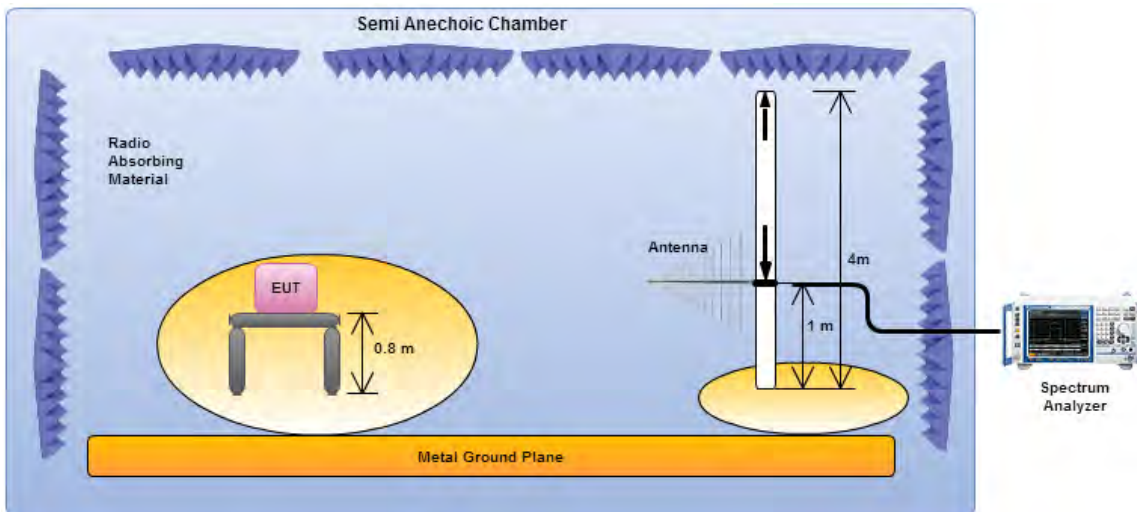

Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna.

Transmitter Radiated Unwanted Emissions (above 1GHz)

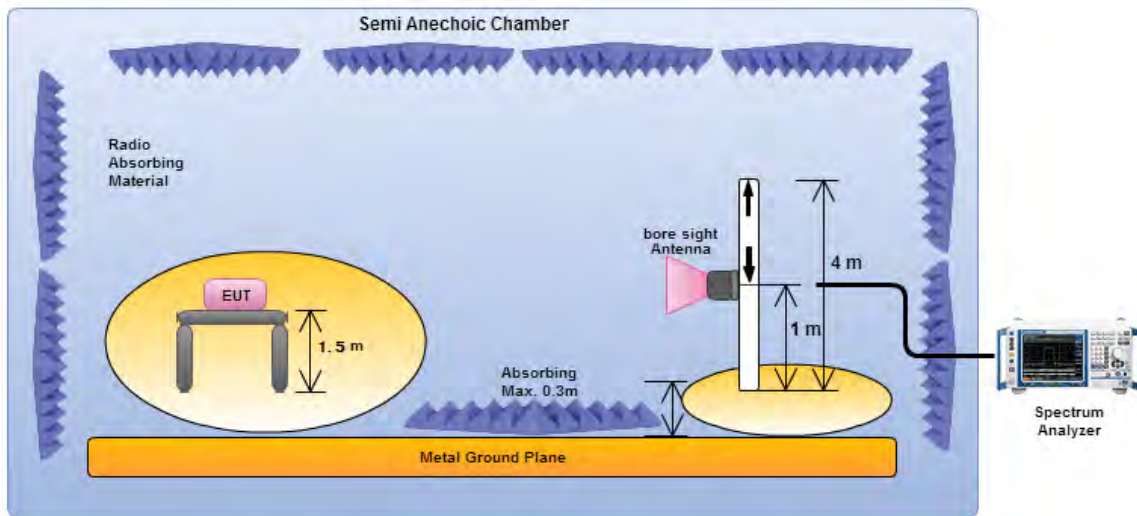

Electric field tests shall be performed in the frequency range of 1 GHz to 10th harmonic of highest fundamental frequency or 40 GHz using a calibrated horn antenna.

3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.6.6 Transmitter Radiated Unwanted Emissions

Refer as Appendix E



4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
EMC Receiver	KEYSIGHT	N9038A	MY54130031	20Hz ~ 8.4GHz	Apr. 14, 2016	Apr. 13, 2017
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 26, 2016	Jan. 25, 2017
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	Oct. 30, 2015	Oct. 29, 2016
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	NCR	NCR

Instrument for Conducted Test


Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101500	9KHz~40GHz	May 12, 2016	May 11, 2017
Power Sensor	Anritsu	MA2411B	917017	300MHz ~ 40GHz	Feb. 04, 2016	Fed. 03, 2017
Power Meter	Anritsu	ML2495A	949003	300MHz ~ 40GHz	Feb. 04, 2016	Fed. 03, 2017
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jul. 28, 2015	Jul. 27, 2016

Instrument for Radiated Test

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 28, 2015	Nov. 27, 2016
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	1GHz ~ 18GHz 3m	Dec. 16, 2015	Dec. 15, 2016
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May 10, 2016	May 09, 2017
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Sep. 02, 2015	Sep. 01, 2016
Spectrum	R&S	FSV40	101513	9kHz ~ 40GHz	Feb. 16, 2016	Feb. 15, 2017
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 18, 2015	Sep. 17, 2016
Horn Antenna	SCHWARZBECK	BBHA9120D	1531	1GHz ~ 18GHz	Apr. 22, 2016	Apr. 21, 2017
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	18GHz ~ 40GHz	Jan. 29, 2016	Jan. 28, 2017
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz~30 MHz	Feb.02.2015	Feb.01.2017



AC Power-line Conducted Emissions Result																																																																																																																																	
Operating Mode	1	Power Phase	Neutral																																																																																																																														
Operating Function	AC Power & Radio link (WLAN)																																																																																																																																
<div style="text-align: right;">Date: 2016-06-22</div> <p>The graph displays the AC power-line conducted emissions. The y-axis represents Level in dBuV, ranging from 0 to 80. The x-axis represents Frequency in MHz, ranging from 0.15 to 30. Two red lines indicate the NCC/IC/FCC-B and NCC/IC/FCC-B AV limits. A blue line shows the measured emission levels, with several peaks marked by vertical lines and numbered 1 through 12.</p>																																																																																																																																	
<table border="1"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>Read Level</th> <th>LISN Factor</th> <th>Cable Loss</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>0.1500000</td><td>34.38</td><td>-31.62</td><td>66.00</td><td>34.06</td><td>0.10</td><td>0.22</td><td>QP</td></tr> <tr><td>2</td><td>0.1500000</td><td>22.74</td><td>-33.26</td><td>56.00</td><td>22.42</td><td>0.10</td><td>0.22</td><td>Average</td></tr> <tr><td>3</td><td>0.1977810</td><td>33.15</td><td>-30.55</td><td>63.70</td><td>32.74</td><td>0.11</td><td>0.30</td><td>QP</td></tr> <tr><td>4</td><td>0.1977810</td><td>12.37</td><td>-41.33</td><td>53.70</td><td>11.96</td><td>0.11</td><td>0.30</td><td>Average</td></tr> <tr><td>5</td><td>0.4932340</td><td>27.83</td><td>-28.28</td><td>56.11</td><td>27.61</td><td>0.12</td><td>0.10</td><td>QP</td></tr> <tr><td>6</td><td>0.4932340</td><td>19.58</td><td>-26.53</td><td>46.11</td><td>19.36</td><td>0.12</td><td>0.10</td><td>Average</td></tr> <tr><td>7</td><td>0.7709230</td><td>25.92</td><td>-30.08</td><td>56.00</td><td>25.69</td><td>0.13</td><td>0.10</td><td>QP</td></tr> <tr><td>8</td><td>0.7709230</td><td>19.64</td><td>-26.36</td><td>46.00</td><td>19.41</td><td>0.13</td><td>0.10</td><td>Average</td></tr> <tr><td>9</td><td>1.367</td><td>23.91</td><td>-32.09</td><td>56.00</td><td>23.58</td><td>0.14</td><td>0.19</td><td>QP</td></tr> <tr><td>10</td><td>1.367</td><td>15.61</td><td>-30.39</td><td>46.00</td><td>15.28</td><td>0.14</td><td>0.19</td><td>Average</td></tr> <tr><td>11</td><td>10.559</td><td>24.75</td><td>-35.25</td><td>60.00</td><td>24.26</td><td>0.29</td><td>0.20</td><td>QP</td></tr> <tr><td>12</td><td>10.559</td><td>20.29</td><td>-29.71</td><td>50.00</td><td>19.80</td><td>0.29</td><td>0.20</td><td>Average</td></tr> </tbody> </table>					Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark		MHz	dBuV	dB	dBuV	dBuV	dB	dB		1	0.1500000	34.38	-31.62	66.00	34.06	0.10	0.22	QP	2	0.1500000	22.74	-33.26	56.00	22.42	0.10	0.22	Average	3	0.1977810	33.15	-30.55	63.70	32.74	0.11	0.30	QP	4	0.1977810	12.37	-41.33	53.70	11.96	0.11	0.30	Average	5	0.4932340	27.83	-28.28	56.11	27.61	0.12	0.10	QP	6	0.4932340	19.58	-26.53	46.11	19.36	0.12	0.10	Average	7	0.7709230	25.92	-30.08	56.00	25.69	0.13	0.10	QP	8	0.7709230	19.64	-26.36	46.00	19.41	0.13	0.10	Average	9	1.367	23.91	-32.09	56.00	23.58	0.14	0.19	QP	10	1.367	15.61	-30.39	46.00	15.28	0.14	0.19	Average	11	10.559	24.75	-35.25	60.00	24.26	0.29	0.20	QP	12	10.559	20.29	-29.71	50.00	19.80	0.29	0.20	Average
	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark																																																																																																																									
	MHz	dBuV	dB	dBuV	dBuV	dB	dB																																																																																																																										
1	0.1500000	34.38	-31.62	66.00	34.06	0.10	0.22	QP																																																																																																																									
2	0.1500000	22.74	-33.26	56.00	22.42	0.10	0.22	Average																																																																																																																									
3	0.1977810	33.15	-30.55	63.70	32.74	0.11	0.30	QP																																																																																																																									
4	0.1977810	12.37	-41.33	53.70	11.96	0.11	0.30	Average																																																																																																																									
5	0.4932340	27.83	-28.28	56.11	27.61	0.12	0.10	QP																																																																																																																									
6	0.4932340	19.58	-26.53	46.11	19.36	0.12	0.10	Average																																																																																																																									
7	0.7709230	25.92	-30.08	56.00	25.69	0.13	0.10	QP																																																																																																																									
8	0.7709230	19.64	-26.36	46.00	19.41	0.13	0.10	Average																																																																																																																									
9	1.367	23.91	-32.09	56.00	23.58	0.14	0.19	QP																																																																																																																									
10	1.367	15.61	-30.39	46.00	15.28	0.14	0.19	Average																																																																																																																									
11	10.559	24.75	-35.25	60.00	24.26	0.29	0.20	QP																																																																																																																									
12	10.559	20.29	-29.71	50.00	19.80	0.29	0.20	Average																																																																																																																									
<p>Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)</p>																																																																																																																																	

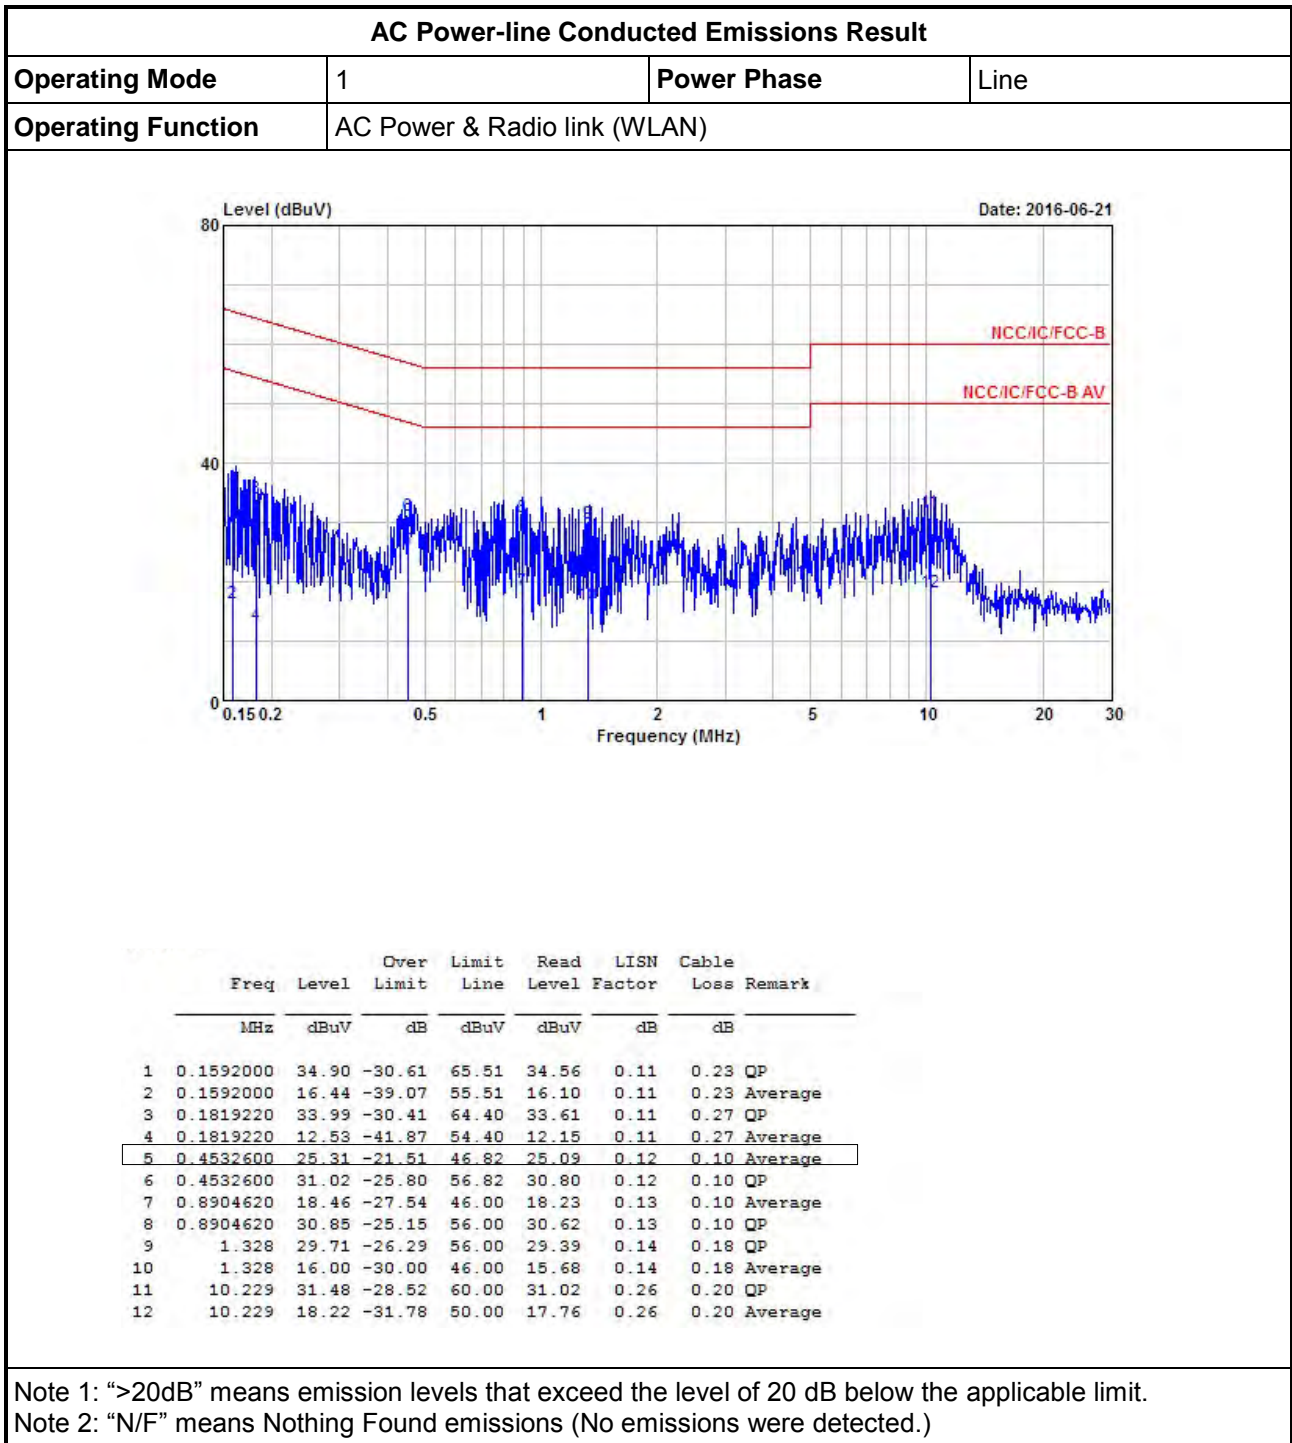















Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4G;11b;20;1;1	10.025M	13.443M	13M4G1D	9.525M	13.318M
2.4G;11g;20;1;1	14.975M	16.242M	16M2D1D	13.85M	16.217M
2.4G;HT20;20;1;(M0-7);1	15M	17.366M	17M4D1D	14.9M	17.266M
2.4G;HT40;40;1;(M0-7);1	33.7M	35.882M	35M9D1D	31.25M	35.782M

Result

Mode	Result	Limit	P1-N dB (Hz)	P1-OBW (Hz)
2.4G:11b:20:1:1:2412:L;TN,VN	Pass	500k	10.025M	13.443M
2.4G:11b:20:1:1:2437:M;TN,VN	Pass	500k	9.55M	13.343M
2.4G:11b:20:1:1:2462:H;TN,VN	Pass	500k	9.525M	13.318M
2.4G:11g:20:1:1:2412:L;TN,VN	Pass	500k	14.975M	16.217M
2.4G:11g:20:1:1:2437:M;TN,VN	Pass	500k	14.45M	16.242M
2.4G:11g:20:1:1:2462:H;TN,VN	Pass	500k	13.85M	16.217M
2.4G:HT20:20:1,(M0-7):1:2412:L;TN,VN	Pass	500k	14.975M	17.266M
2.4G:HT20:20:1,(M0-7):1:2437:M;TN,VN	Pass	500k	15M	17.366M
2.4G:HT20:20:1,(M0-7):1:2462:H;TN,VN	Pass	500k	14.9M	17.341M
2.4G:HT40:40:1,(M0-7):1:2422:L;TN,VN	Pass	500k	31.25M	35.832M
2.4G:HT40:40:1,(M0-7):1:2437:M;TN,VN	Pass	500k	32.6M	35.782M
2.4G:HT40:40:1,(M0-7):1:2452:H;TN,VN	Pass	500k	33.7M	35.882M

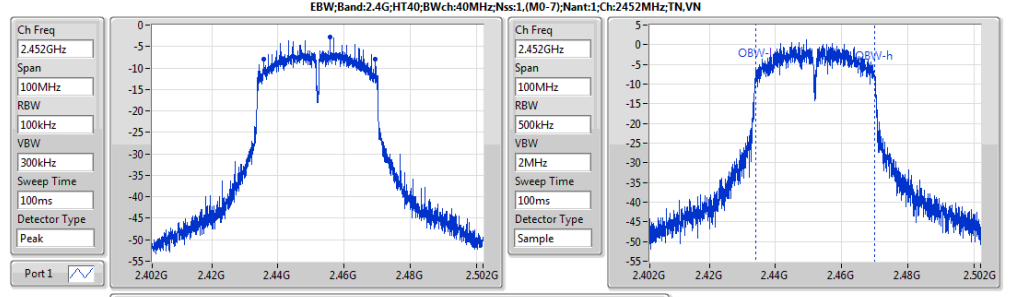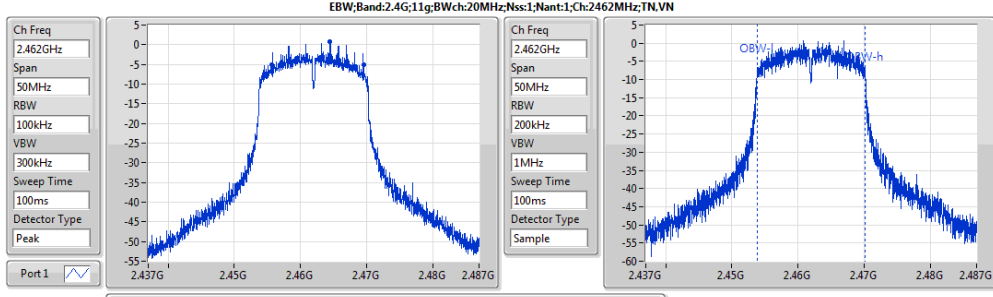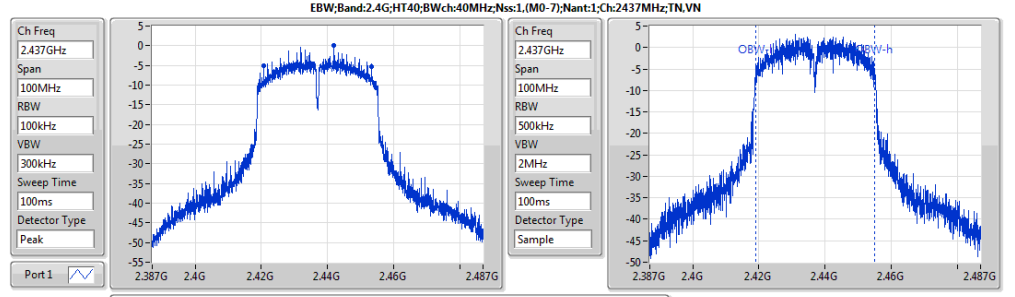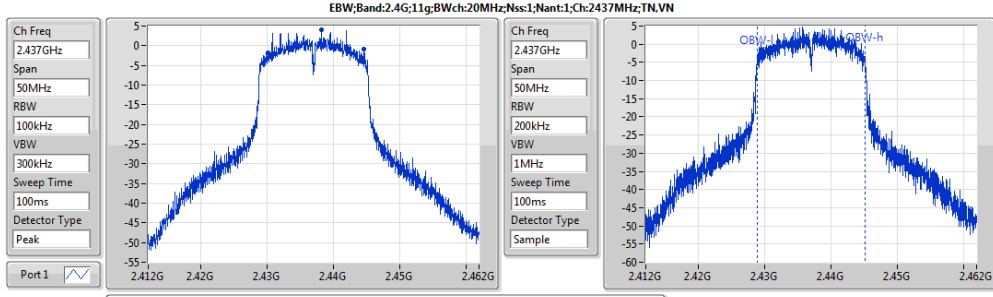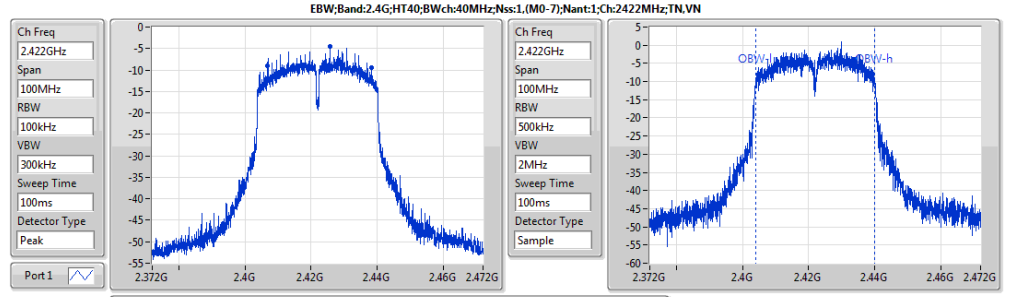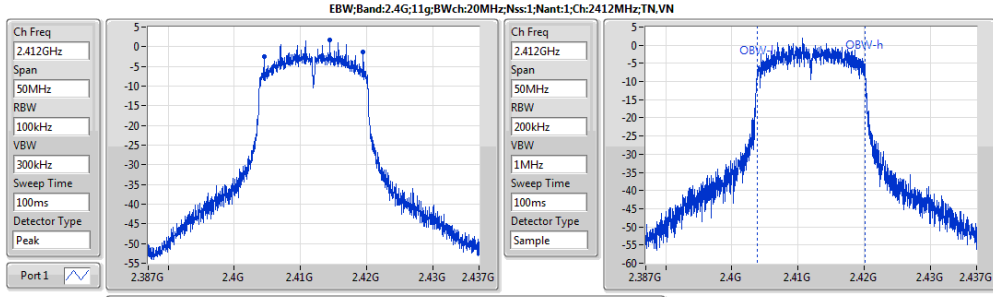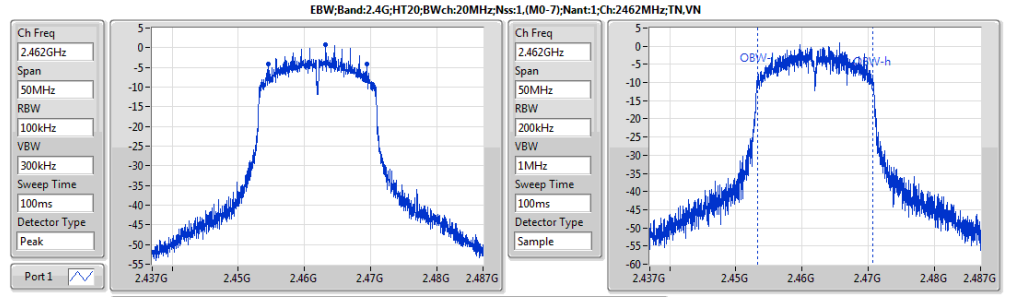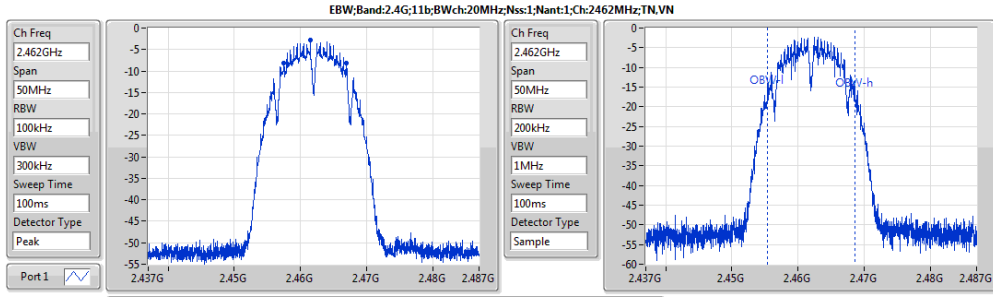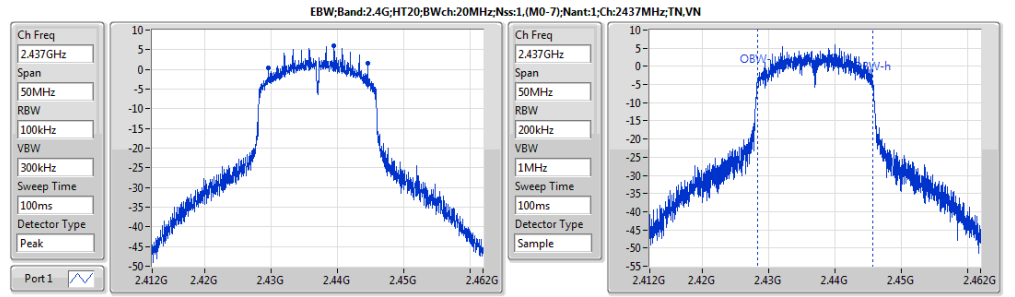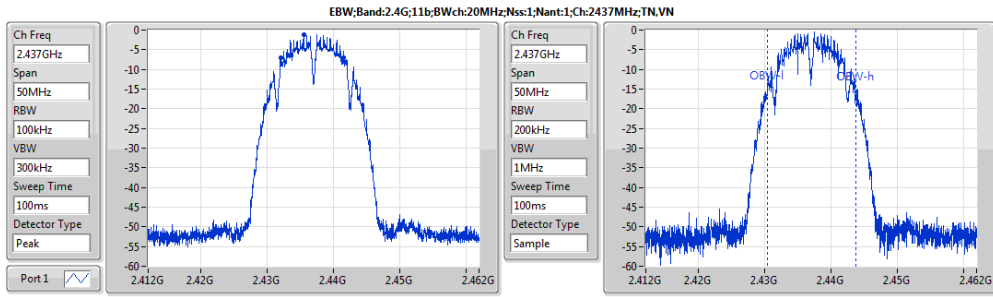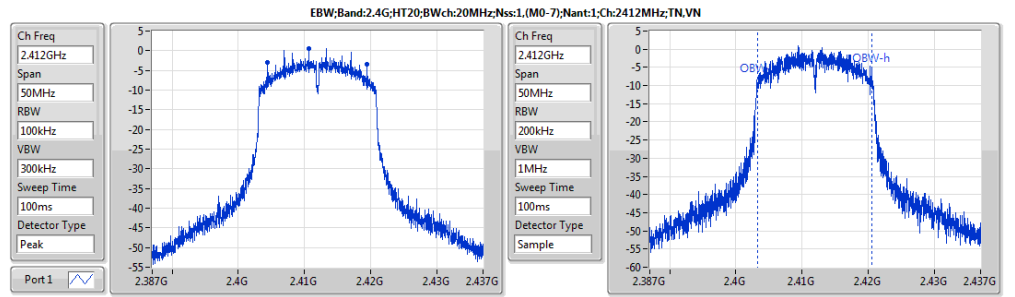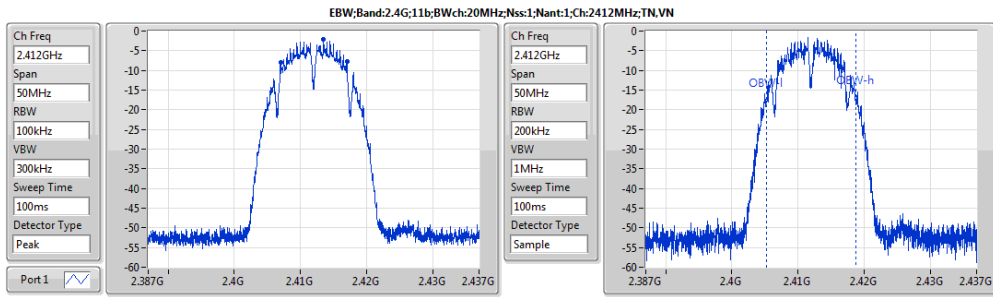



Summary

Mode	Sum (dBm)	Sum (W)	EIRP (dBm)	EIRP (W)
2.4G:11b:20:1;1	12.41	0.01742	14.81	0.03027
2.4G:11g:20:1;1	21.38	0.1374	23.78	0.23878
2.4G:HT20:20:1,(M0-7);1	22.03	0.15959	24.43	0.27733
2.4G:HT40:40:1,(M0-7);1	19.08	0.08091	21.48	0.1406

Result

Mode	Result	DG (dBi)	EIRP (dBm)	EIRP Lim. (dBm)	Sum (dBm)	Sum Lim. (dBm)	P1 (dBm)
2.4G:11b:20:1;1;2412:L;TN,VN	Pass	2.40	14.02	36.00	11.62	30.00	11.62
2.4G:11b:20:1;1;2437:M;TN,VN	Pass	2.40	14.32	36.00	11.92	30.00	11.92
2.4G:11b:20:1;1;2462:H;TN,VN	Pass	2.40	14.81	36.00	12.41	30.00	12.41
2.4G:11g:20:1;1;2412:L;TN,VN	Pass	2.40	22.16	36.00	19.76	30.00	19.76
2.4G:11g:20:1;1;2437:M;TN,VN	Pass	2.40	23.78	36.00	21.38	30.00	21.38
2.4G:11g:20:1;1;2462:H;TN,VN	Pass	2.40	22.30	36.00	19.90	30.00	19.90
2.4G:HT20:20:1,(M0-7);1;2412:L;TN,VN	Pass	2.40	21.92	36.00	19.52	30.00	19.52
2.4G:HT20:20:1,(M0-7);1;2437:M;TN,VN	Pass	2.40	24.43	36.00	22.03	30.00	22.03
2.4G:HT20:20:1,(M0-7);1;2462:H;TN,VN	Pass	2.40	22.30	36.00	19.90	30.00	19.90
2.4G:HT40:40:1,(M0-7);1;2422:L;TN,VN	Pass	2.40	18.42	36.00	16.02	30.00	16.02
2.4G:HT40:40:1,(M0-7);1;2437:M;TN,VN	Pass	2.40	21.48	36.00	19.08	30.00	19.08
2.4G:HT40:40:1,(M0-7);1;2452:H;TN,VN	Pass	2.40	19.16	36.00	16.76	30.00	16.76



Summary

Mode	Sum (dBm)	Sum (W)	EIRP (dBm)	EIRP (W)
2.4G:11b:20:1;1	10.11	0.01026	12.51	0.01782
2.4G:11g:20:1;1	15.02	0.03177	17.42	0.05521
2.4G:HT20:20:1,(M0-7);1	15.90	0.0389	18.30	0.06761
2.4G:HT40:40:1,(M0-7);1	12.89	0.01945	15.29	0.03381

Result

Mode	Result	DG (dBi)	EIRP (dBm)	EIRP Lim. (dBm)	Sum (dBm)	Sum Lim. (dBm)	P1 (dBm)
2.4G:11b:20:1;1;2412:L;TN,VN	Pass	2.40	11.71	36.00	9.31	30.00	9.31
2.4G:11b:20:1;1;2437:M;TN,VN	Pass	2.40	11.94	36.00	9.54	30.00	9.54
2.4G:11b:20:1;1;2462:H;TN,VN	Pass	2.40	12.51	36.00	10.11	30.00	10.11
2.4G:11g:20:1;1;2412:L;TN,VN	Pass	2.40	14.35	36.00	11.95	30.00	11.95
2.4G:11g:20:1;1;2437:M;TN,VN	Pass	2.40	17.42	36.00	15.02	30.00	15.02
2.4G:11g:20:1;1;2462:H;TN,VN	Pass	2.40	13.49	36.00	11.09	30.00	11.09
2.4G:HT20:20:1,(M0-7);1;2412:L;TN,VN	Pass	2.40	13.57	36.00	11.17	30.00	11.17
2.4G:HT20:20:1,(M0-7);1;2437:M;TN,VN	Pass	2.40	18.30	36.00	15.90	30.00	15.90
2.4G:HT20:20:1,(M0-7);1;2462:H;TN,VN	Pass	2.40	13.12	36.00	10.72	30.00	10.72
2.4G:HT40:40:1,(M0-7);1;2422:L;TN,VN	Pass	2.40	10.98	36.00	8.58	30.00	8.58
2.4G:HT40:40:1,(M0-7);1;2437:M;TN,VN	Pass	2.40	15.29	36.00	12.89	30.00	12.89
2.4G:HT40:40:1,(M0-7);1;2452:H;TN,VN	Pass	2.40	12.97	36.00	10.57	30.00	10.57















Summary

Mode	PD (dBm/RBW)	EIRP.PD (dBm/RBW)
2.4G;11b;20;1;1	-13.44	-11.04
2.4G;11g;20;1;1	-10.46	-8.06
2.4G;HT20;20;1,(M0-7);1	-9.53	-7.13
2.4G;HT40;40;1,(M0-7);1	-14.00	-11.60

Result

Mode	Result	Meas.RBW (Hz)	Lim.RBW (Hz)	BWCF (dB)	DG (dBi)	Sum.Max (dBm/RBW)	PD (dBm/RBW)	PD.Limit (dBm/RBW)	EIRP.PD (dBm/RBW)	EIRP.PD.Li m (dBm/RBW)	P1 (dBm/RBW)
2.4G:11b:20:1:1:2412:L;TN,VN	Pass	3k	3k	0.00	2.40	-15.47	-15.47	8.00	-13.07	Inf	-15.47
2.4G:11b:20:1:1:2437:M;TN,VN	Pass	3k	3k	0.00	2.40	-14.61	-14.61	8.00	-12.21	Inf	-14.61
2.4G:11b:20:1:1:2462:H;TN,VN	Pass	3k	3k	0.00	2.40	-13.44	-13.44	8.00	-11.04	Inf	-13.44
2.4G:11g:20:1:1:2412:L;TN,VN	Pass	3k	3k	0.00	2.40	-13.44	-13.44	8.00	-11.04	Inf	-13.44
2.4G:11g:20:1:1:2437:M;TN,VN	Pass	3k	3k	0.00	2.40	-10.46	-10.46	8.00	-8.06	Inf	-10.46
2.4G:11g:20:1:1:2462:H;TN,VN	Pass	3k	3k	0.00	2.40	-14.71	-14.71	8.00	-12.31	Inf	-14.71
2.4G:HT20:20:1,(M0-7);1:2412:L;TN,VN	Pass	3k	3k	0.00	2.40	-13.44	-13.44	8.00	-11.04	Inf	-13.44
2.4G:HT20:20:1,(M0-7);1:2437:M;TN,VN	Pass	3k	3k	0.00	2.40	-9.53	-9.53	8.00	-7.13	Inf	-9.53
2.4G:HT20:20:1,(M0-7);1:2462:H;TN,VN	Pass	3k	3k	0.00	2.40	-13.36	-13.36	8.00	-10.96	Inf	-13.36
2.4G:HT40:40:1,(M0-7);1:2422:L;TN,VN	Pass	3k	3k	0.00	2.40	-18.44	-18.44	8.00	-16.04	Inf	-18.44
2.4G:HT40:40:1,(M0-7);1:2437:M;TN,VN	Pass	3k	3k	0.00	2.40	-14.00	-14.00	8.00	-11.60	Inf	-14.00
2.4G:HT40:40:1,(M0-7);1:2452:H;TN,VN	Pass	3k	3k	0.00	2.40	-17.66	-17.66	8.00	-15.26	Inf	-17.66

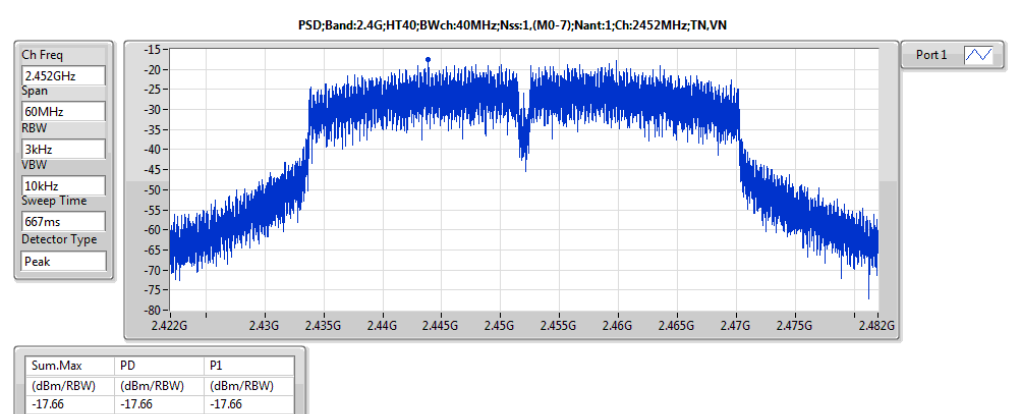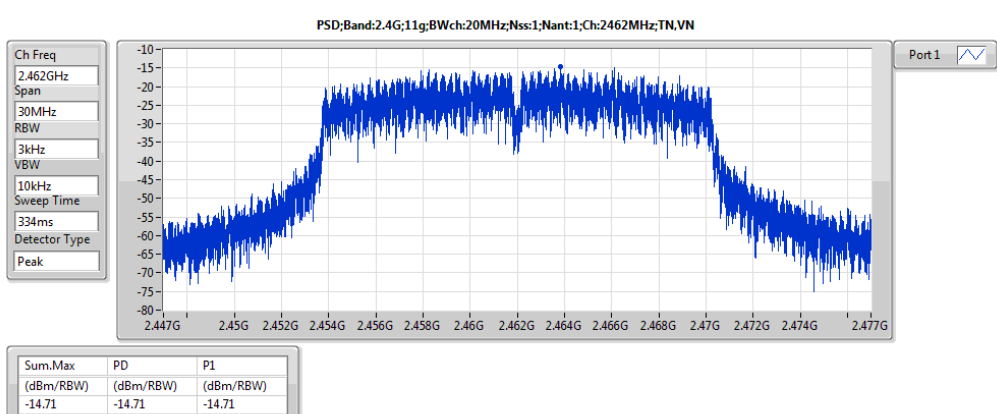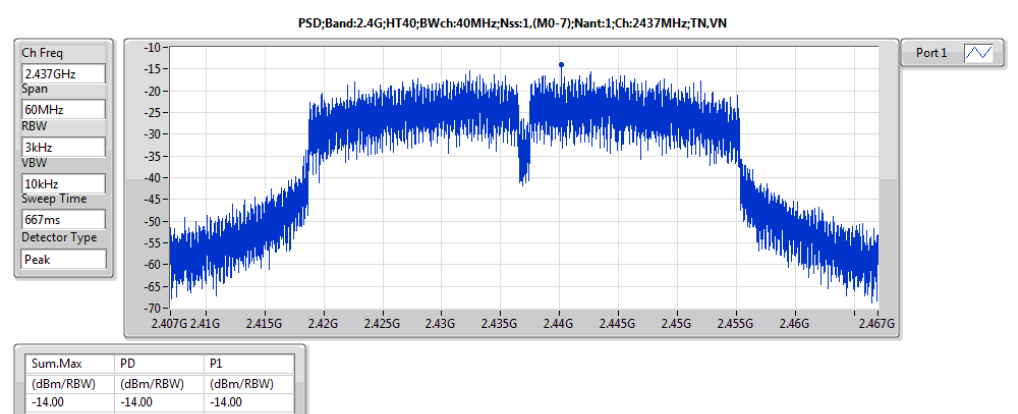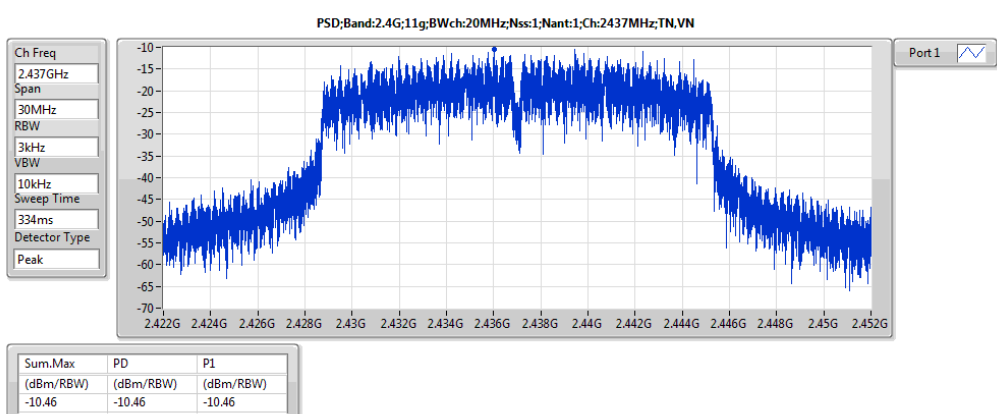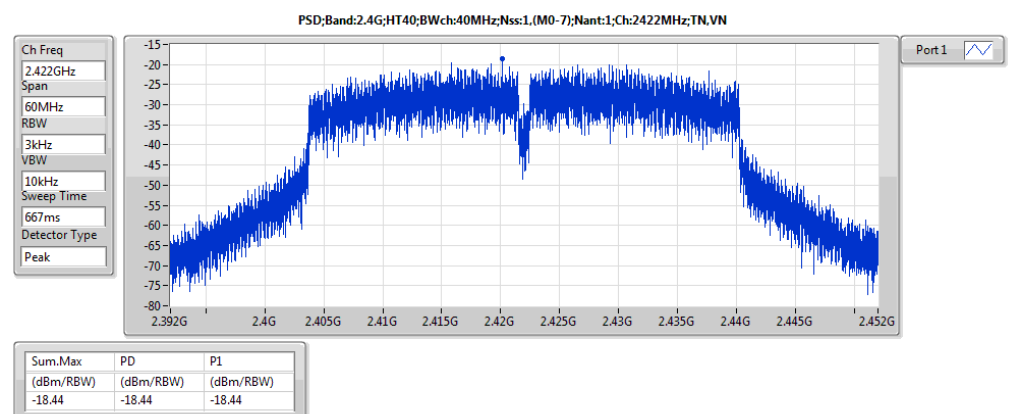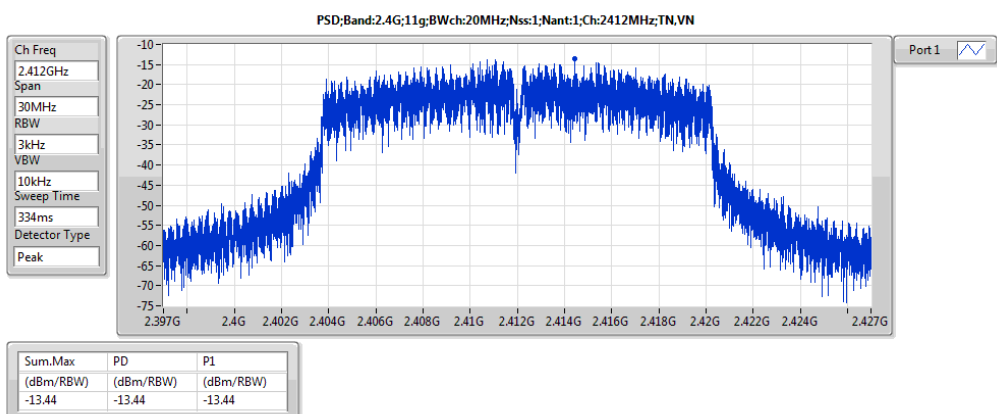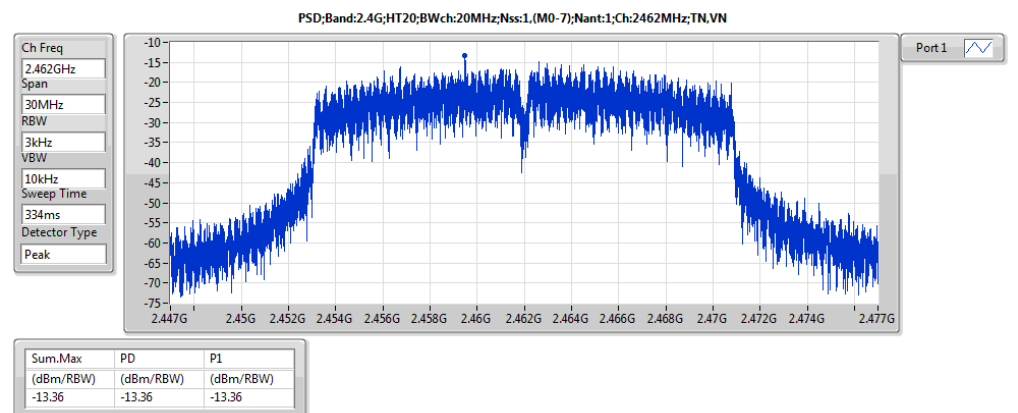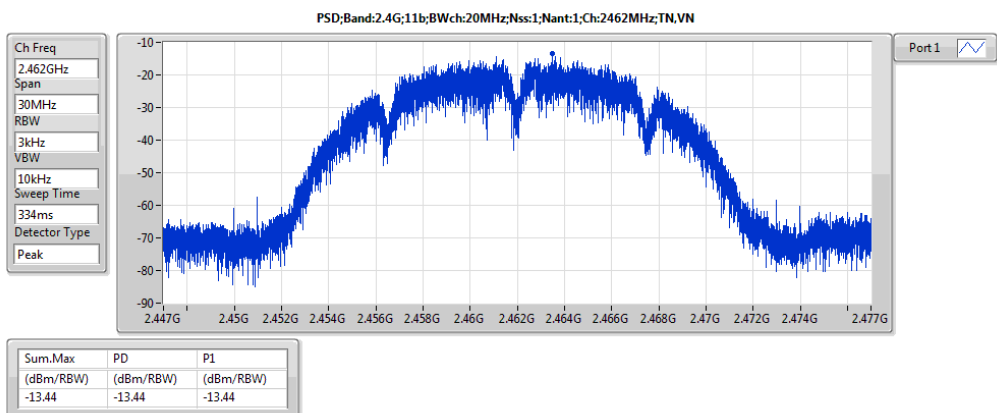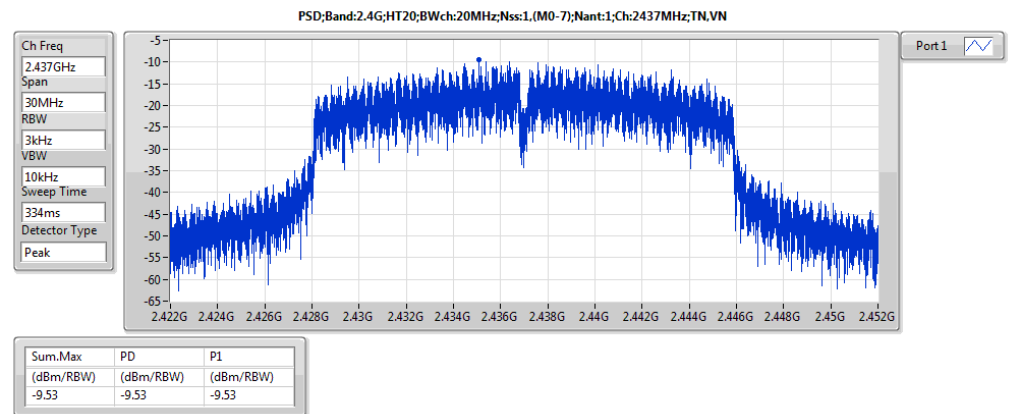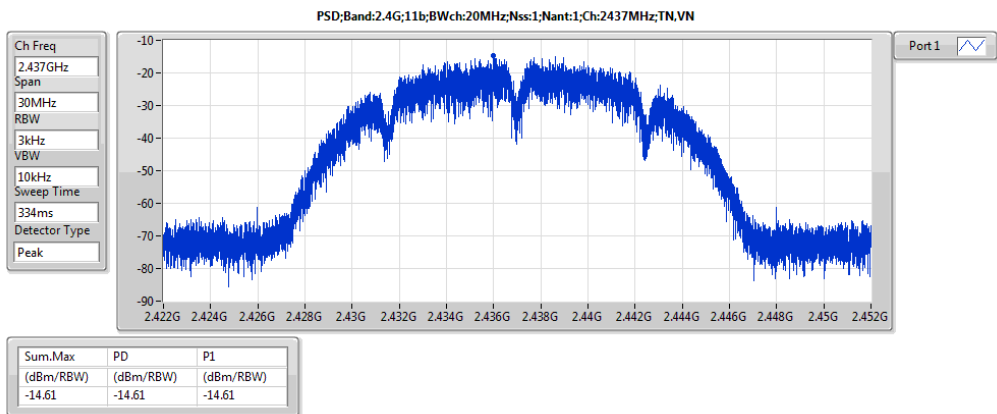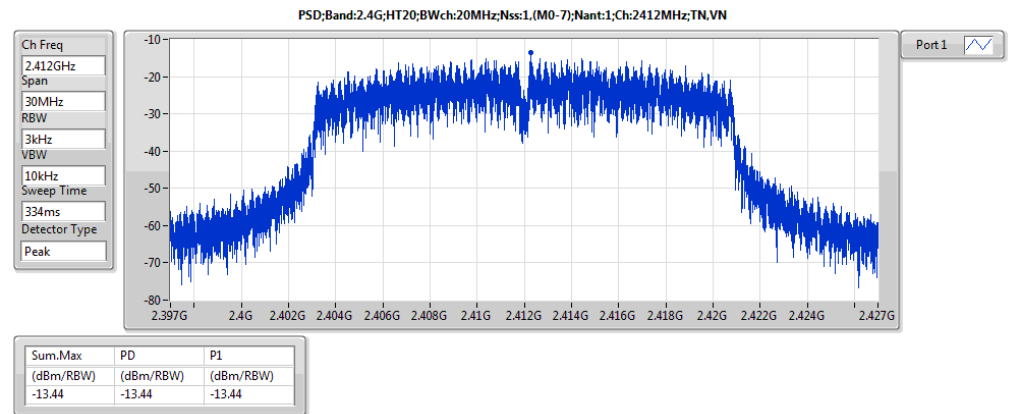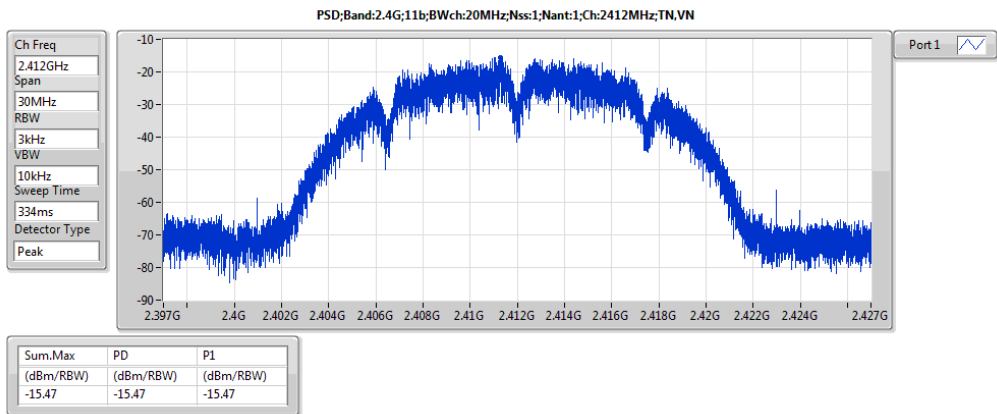



2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Non-restricted Band)								
Modulation	N _{TX}	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
11b	1	2412	97.72	2398.704	58.93	38.79	20	H
11b	1	2462	97.83	2530.800	59.74	38.09	20	H
11g	1	2412	100.40	2399.260	72.74	27.66	20	H
11g	1	2462	99.69	2507.800	60.33	39.36	20	H
HT20	1	2412	100.23	2399.820	71.39	28.84	20	H
HT20	1	2462	99.61	2504.000	60.20	39.41	20	H
HT40	1	2422	93.11	2398.180	67.64	25.47	20	H
HT40	1	2452	95.78	2514.080	60.08	35.70	20	H


Note 1: Measurement worst emissions of receive antenna polarization


2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Restricted Band)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11b	1	2412	3	2389.520	55.45	74	2359.504	43.25	54	H
11b	1	2462	3	2497.200	55.20	74	2484.400	43.32	54	H
11g	1	2412	3	2389.970	66.88	74	2389.970	50.93	54	H
11g	1	2462	3	2483.500	66.00	74	2483.500	51.38	54	H
HT20	1	2412	3	2389.740	66.40	74	2389.970	51.81	54	H
HT20	1	2462	3	2483.600	66.36	74	2483.500	52.11	54	H
HT40	1	2422	3	2389.730	66.77	74	2389.990	52.77	54	H
HT40	1	2452	3	2484.320	66.98	74	2483.600	52.90	54	H

Note 1: Measurement worst emissions of receive antenna polarization.




Transmitter Radiated Bandedge Emissions (Non-restricted Band)

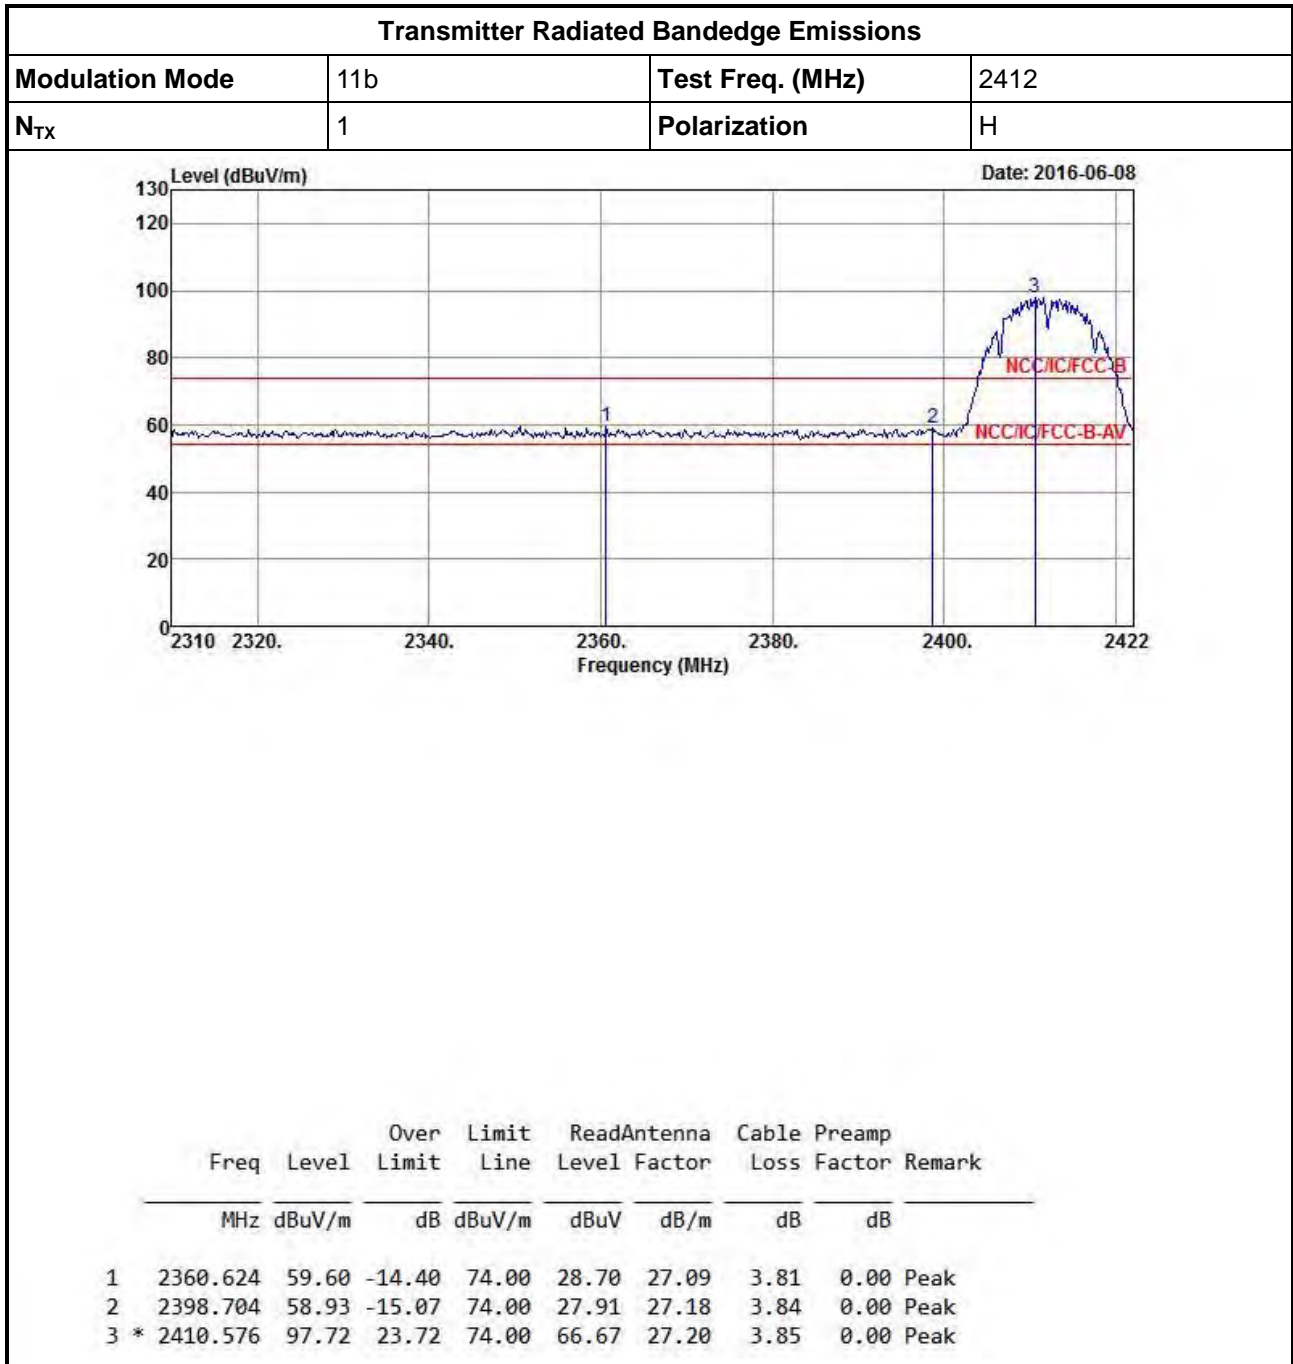

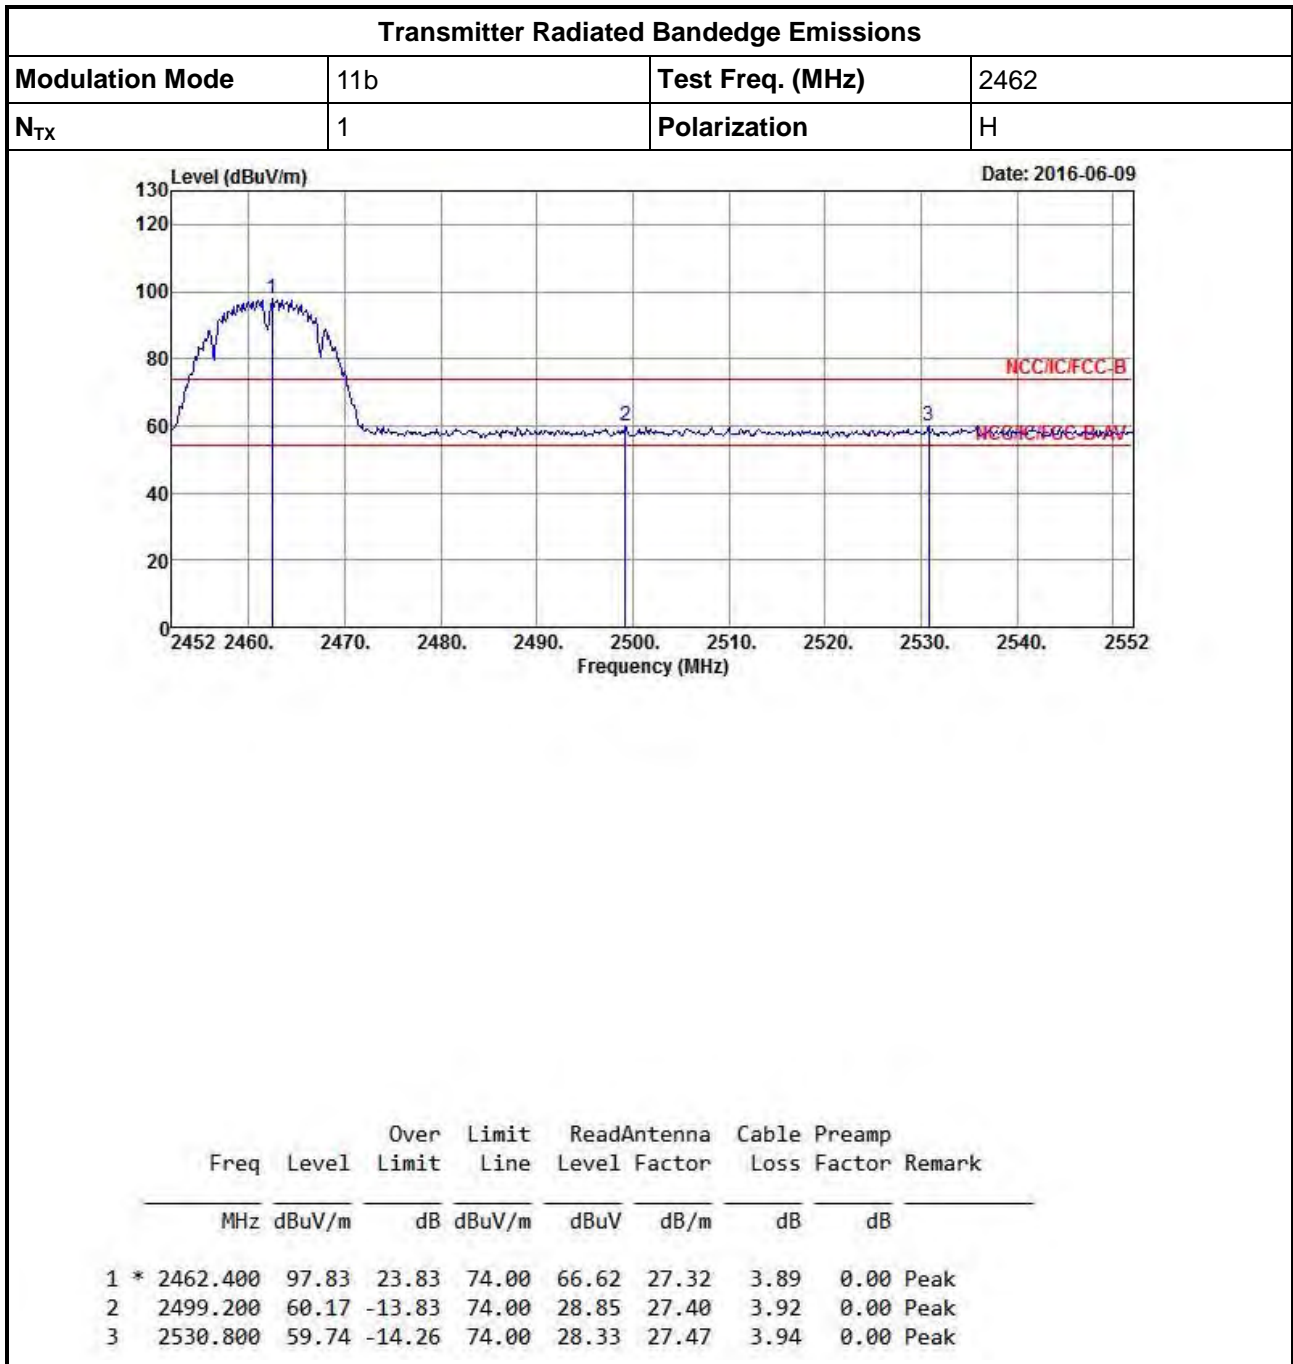




Modulation Mode	11g	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	H

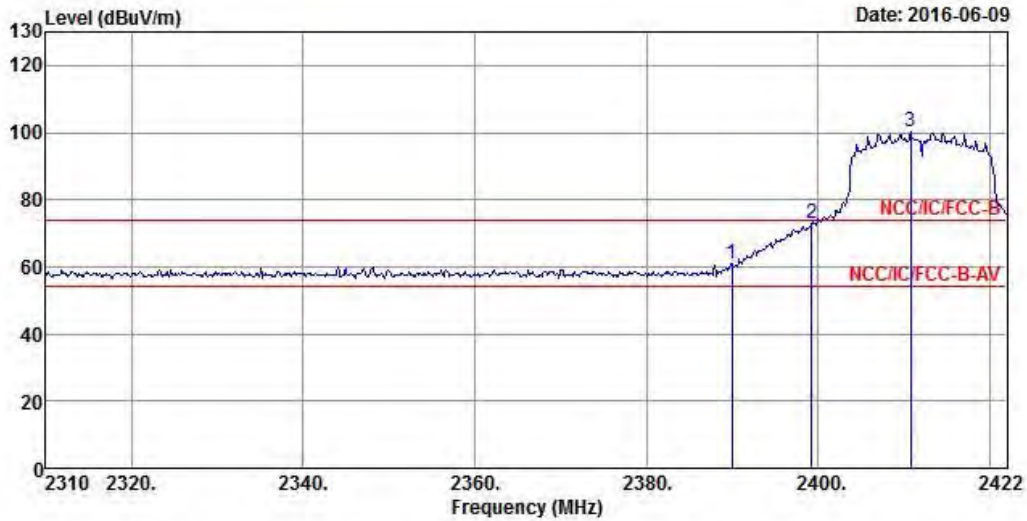


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	2389.968	60.92	-13.08	74.00	29.93	27.16	3.83	0.00	Peak
2	2399.264	72.74	-1.26	74.00	41.72	27.18	3.84	0.00	Peak
3 *	2410.800	100.40	26.40	74.00	69.35	27.20	3.85	0.00	Peak

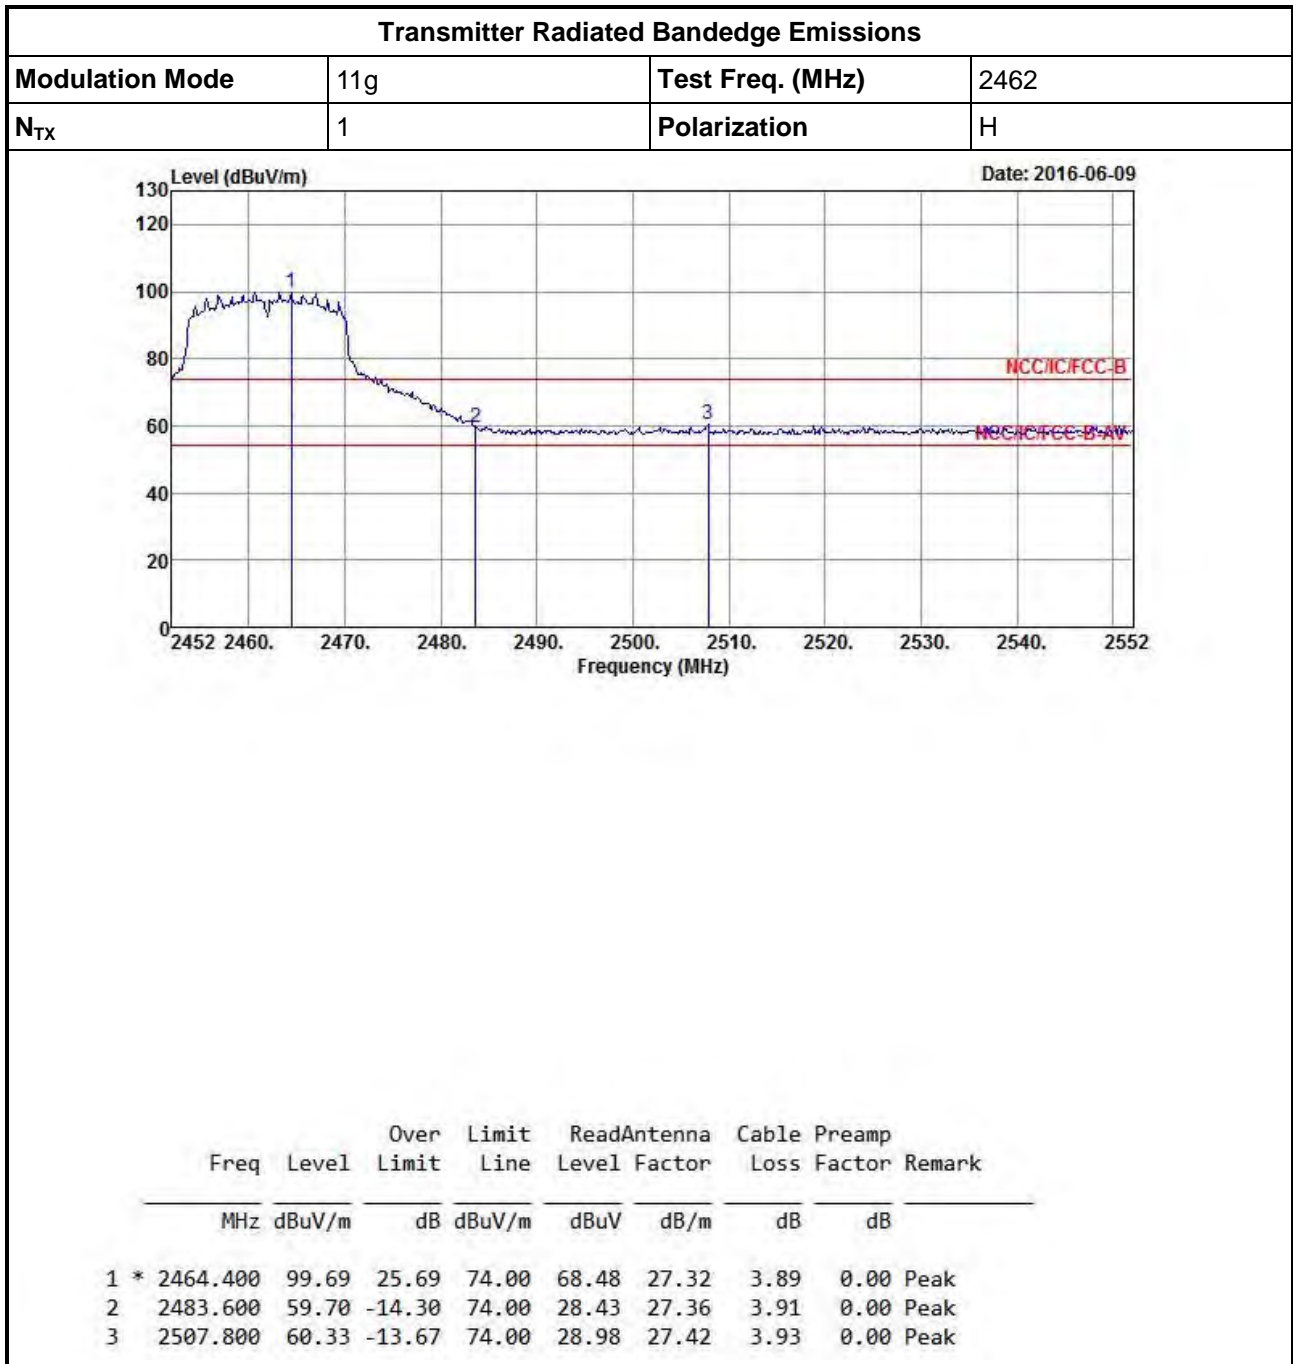




Modulation Mode	HT20	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	H

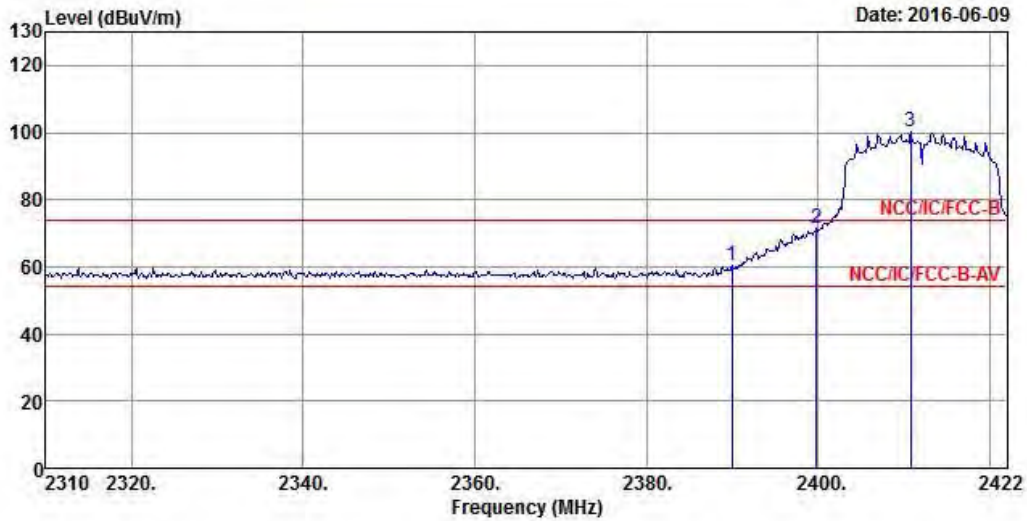


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	2389.968	60.32	-13.68	74.00	29.33	27.16	3.83	0.00	Peak
2	2399.824	71.39	-2.61	74.00	40.37	27.18	3.84	0.00	Peak
3 *	2410.800	100.23	26.23	74.00	69.18	27.20	3.85	0.00	Peak

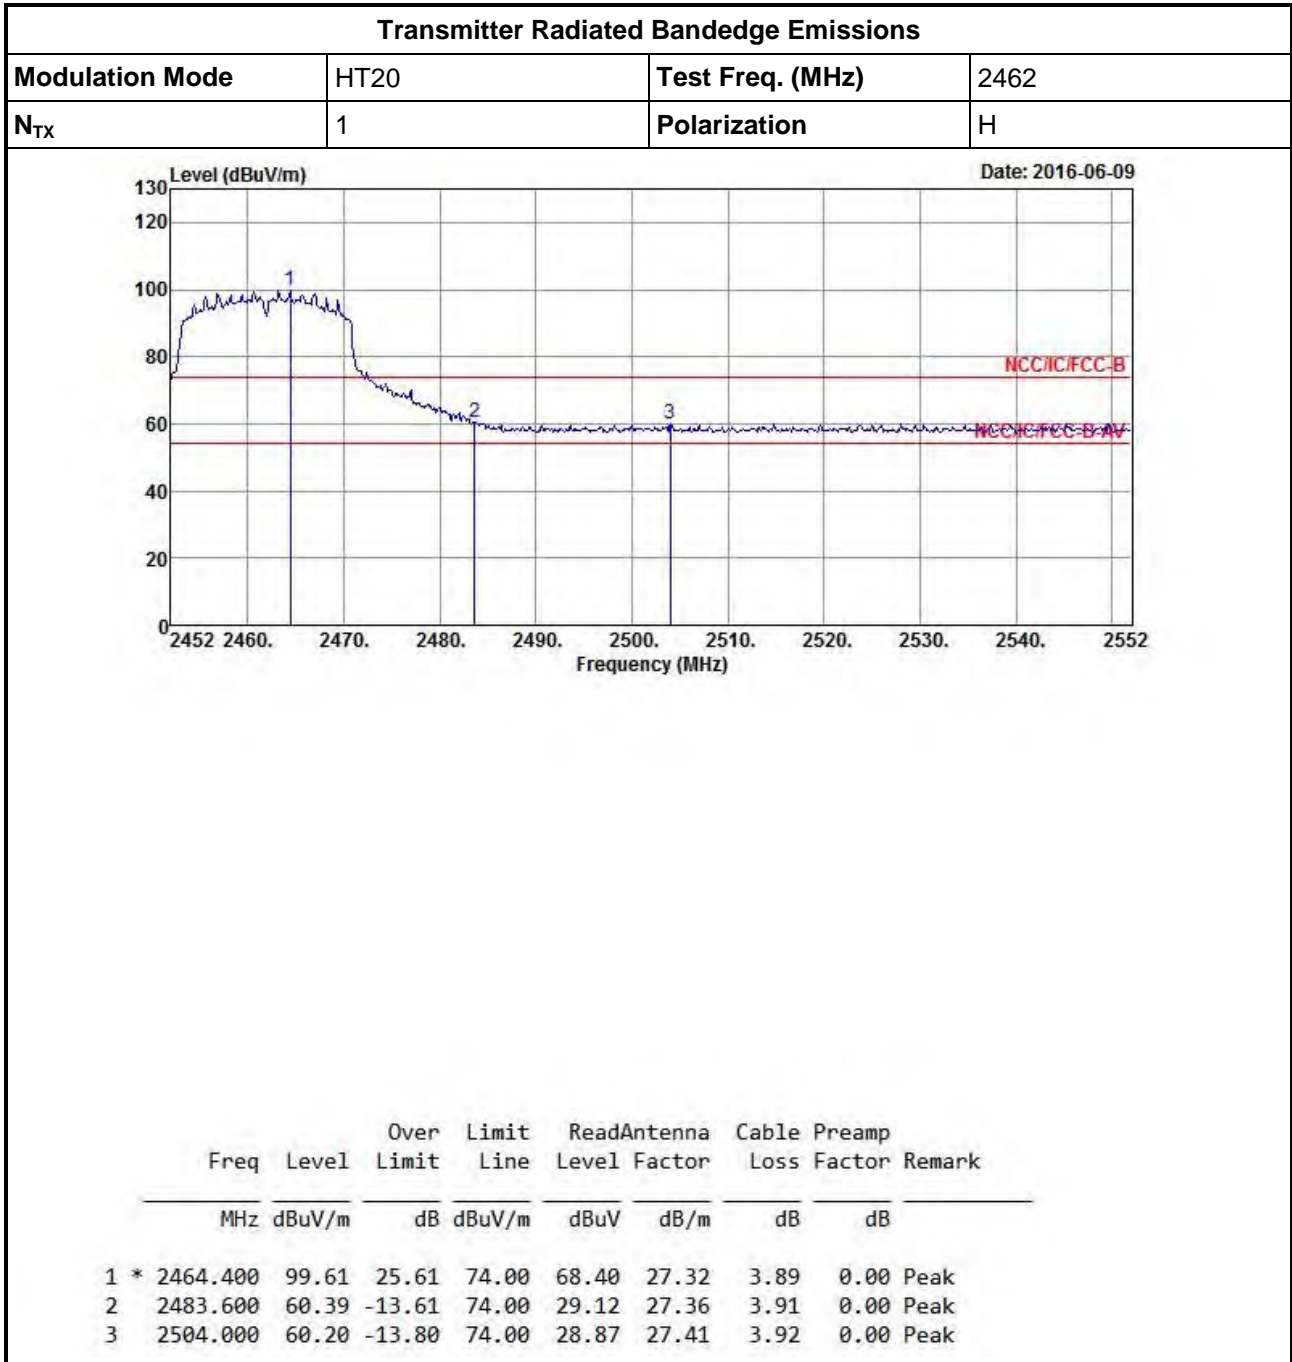




Modulation Mode	HT40	Test Freq. (MHz)	2422
N _{TX}	1	Polarization	H

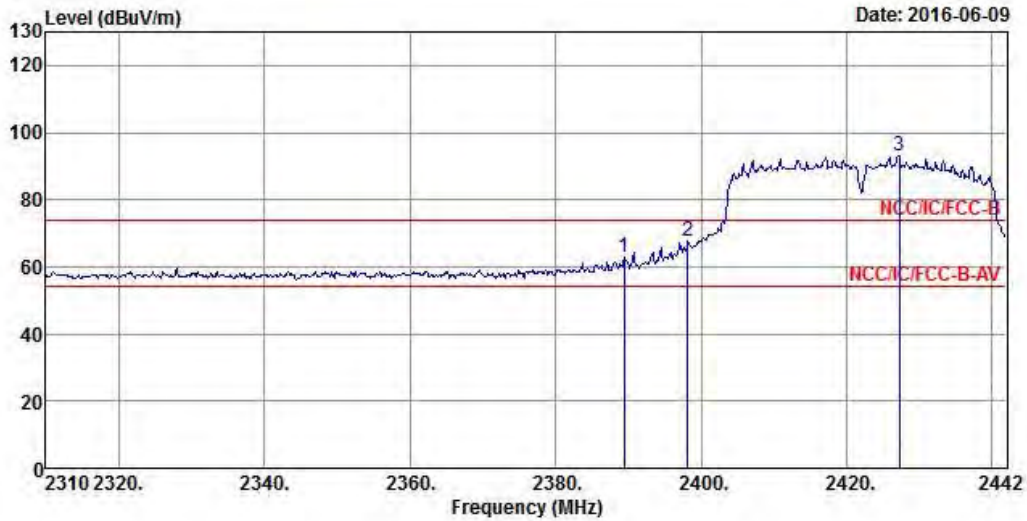



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	2389.464	62.81	-11.19	74.00	31.82	27.16	3.83	0.00	Peak
2	2398.176	67.64	-6.36	74.00	36.62	27.18	3.84	0.00	Peak
3 *	2427.216	93.11	19.11	74.00	62.01	27.24	3.86	0.00	Peak

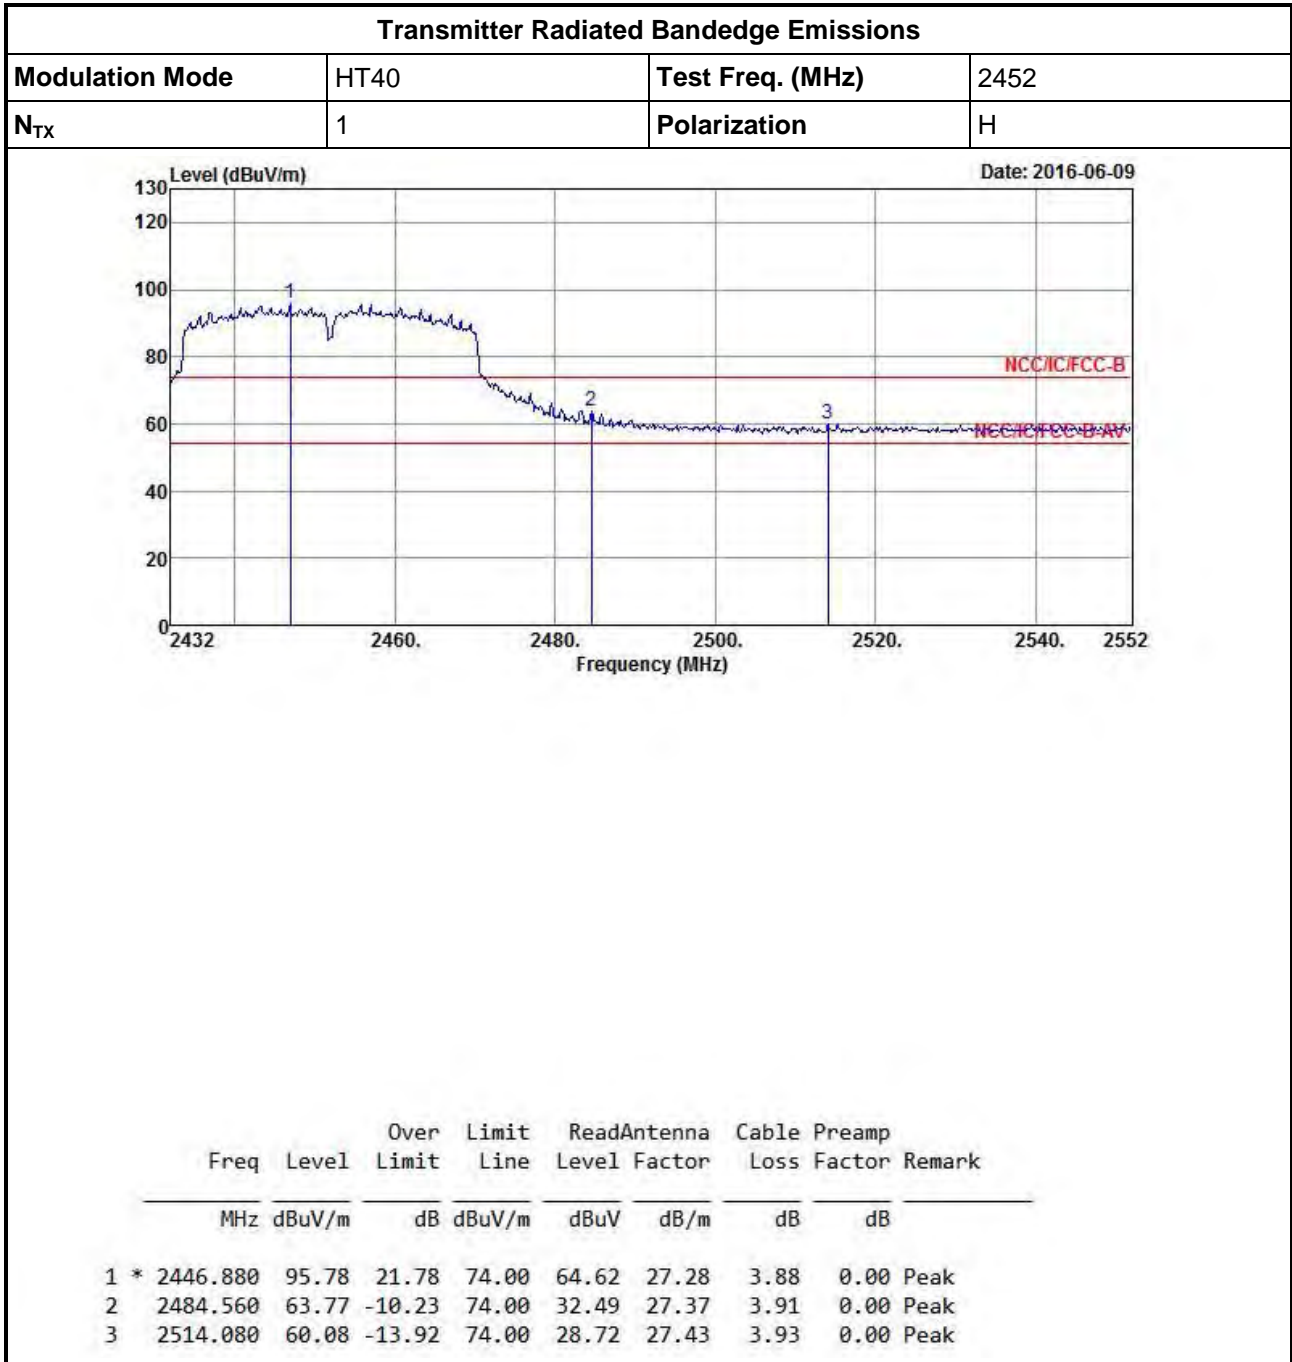






Transmitter Radiated Bandedge Emissions (Restricted Band)

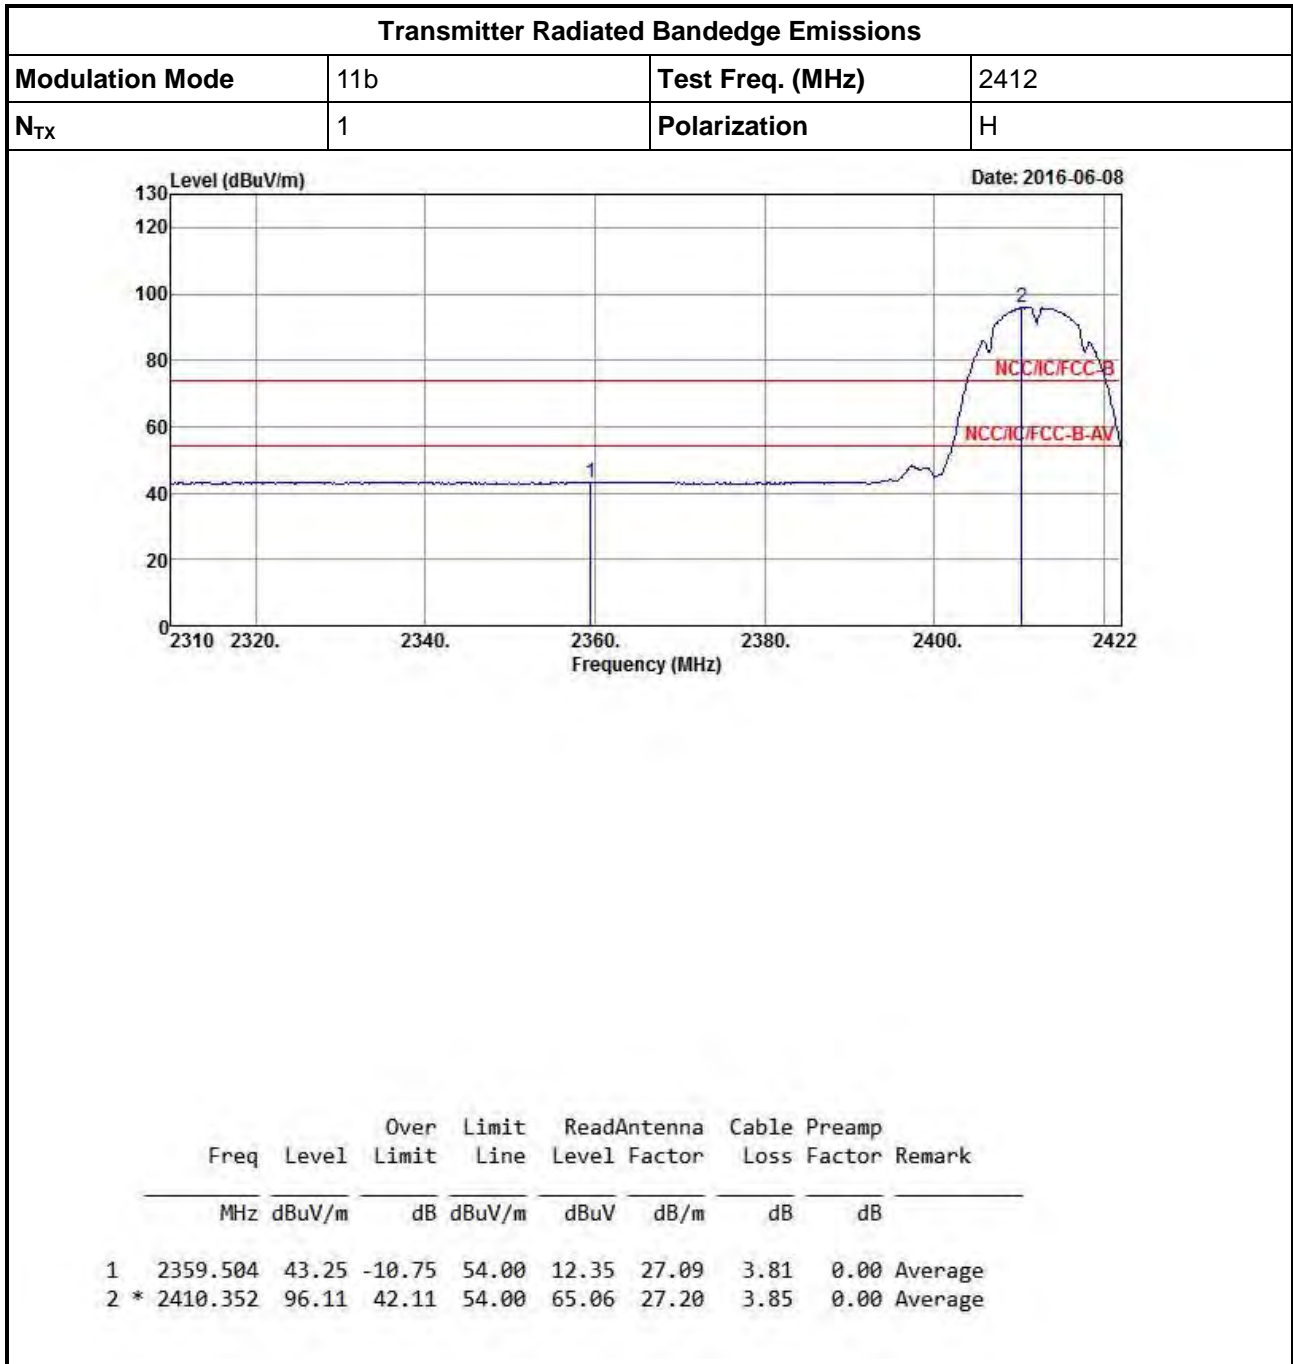


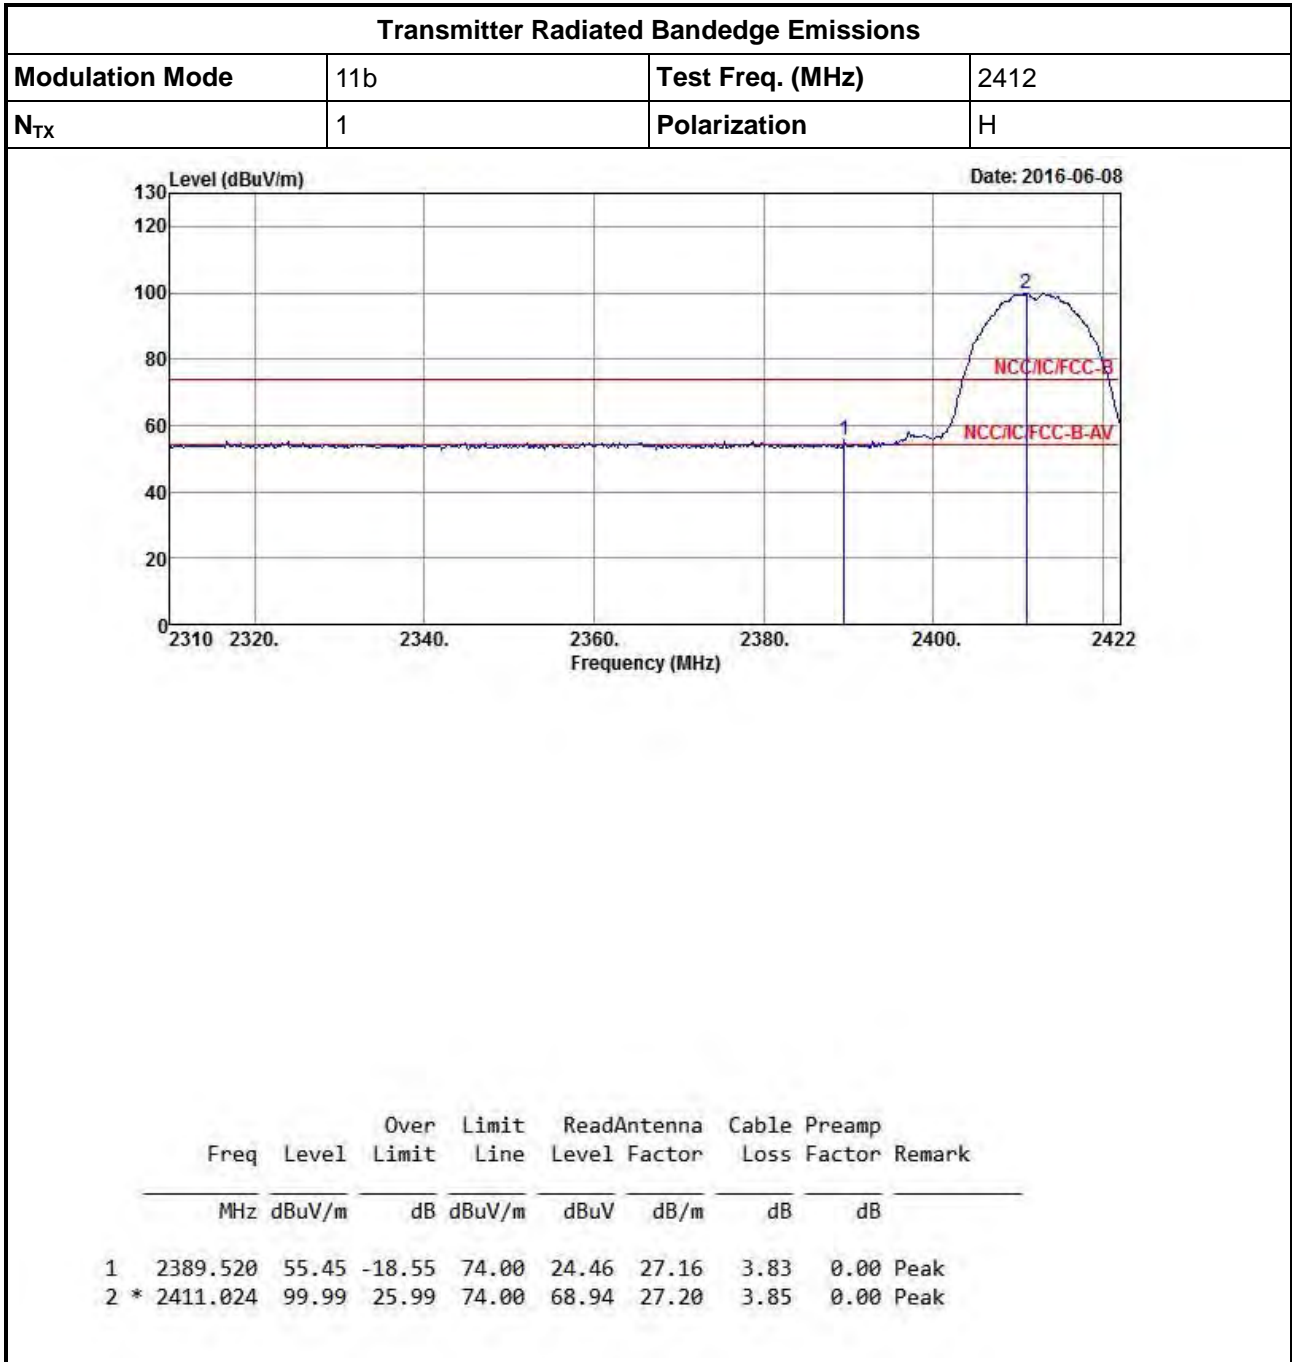


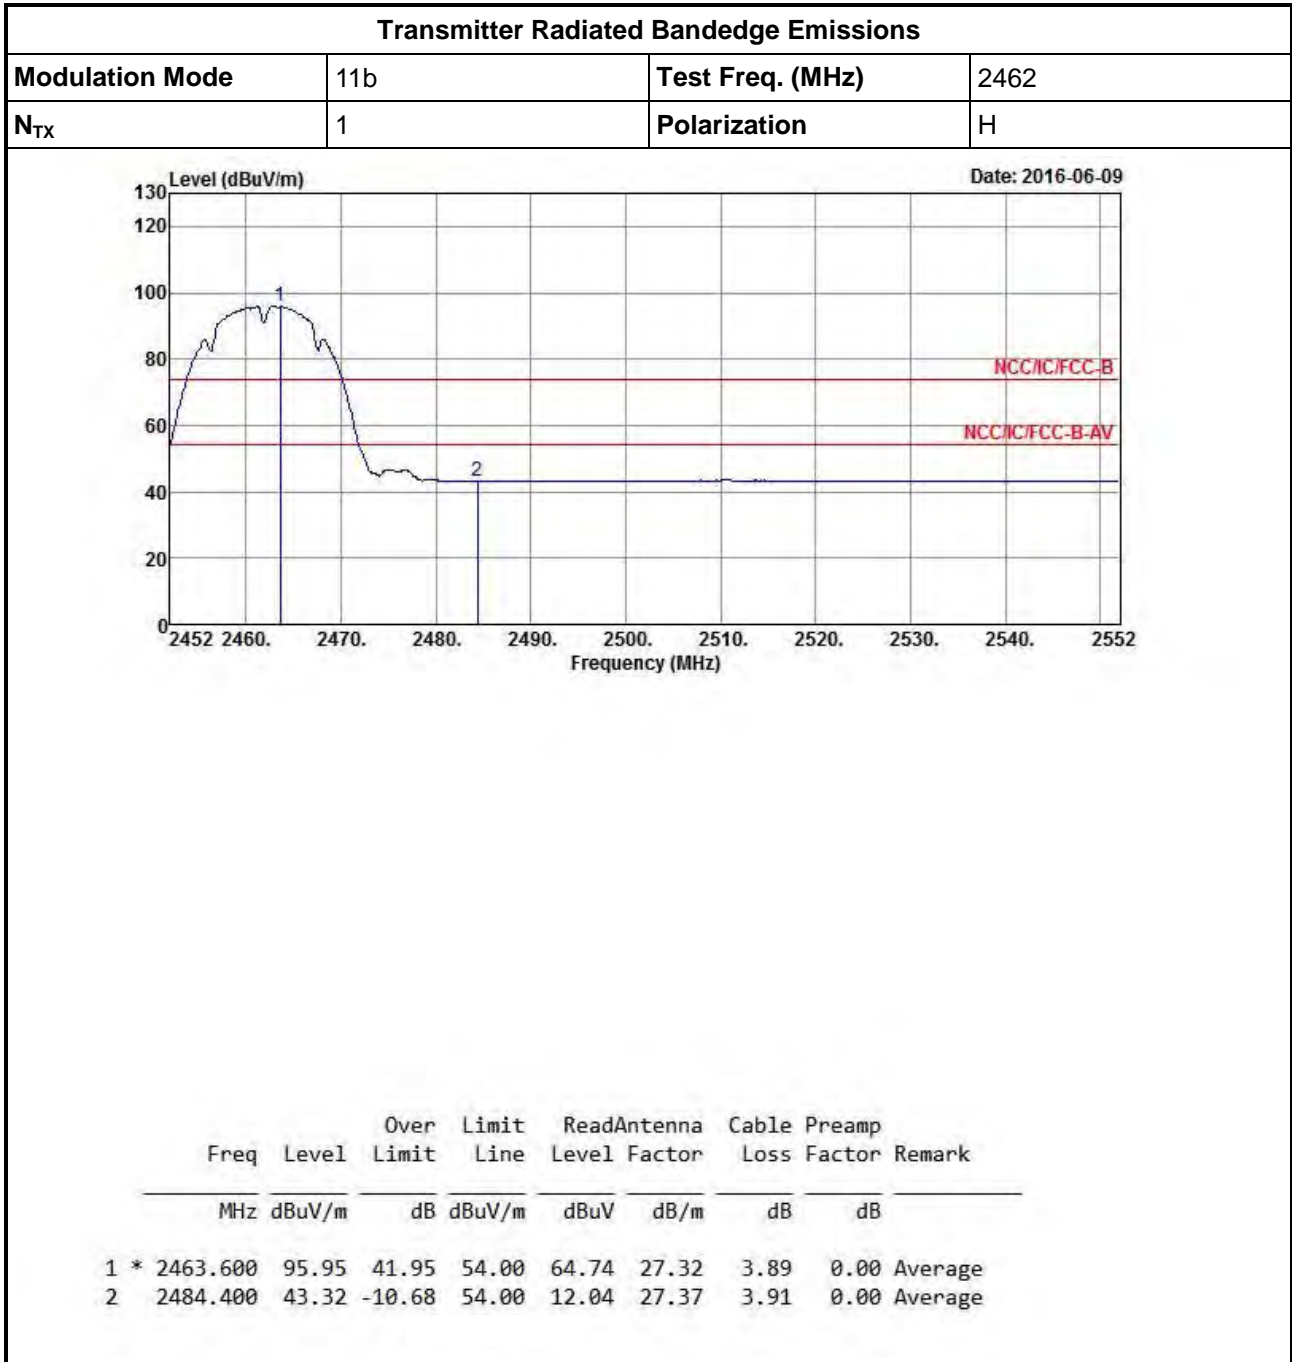


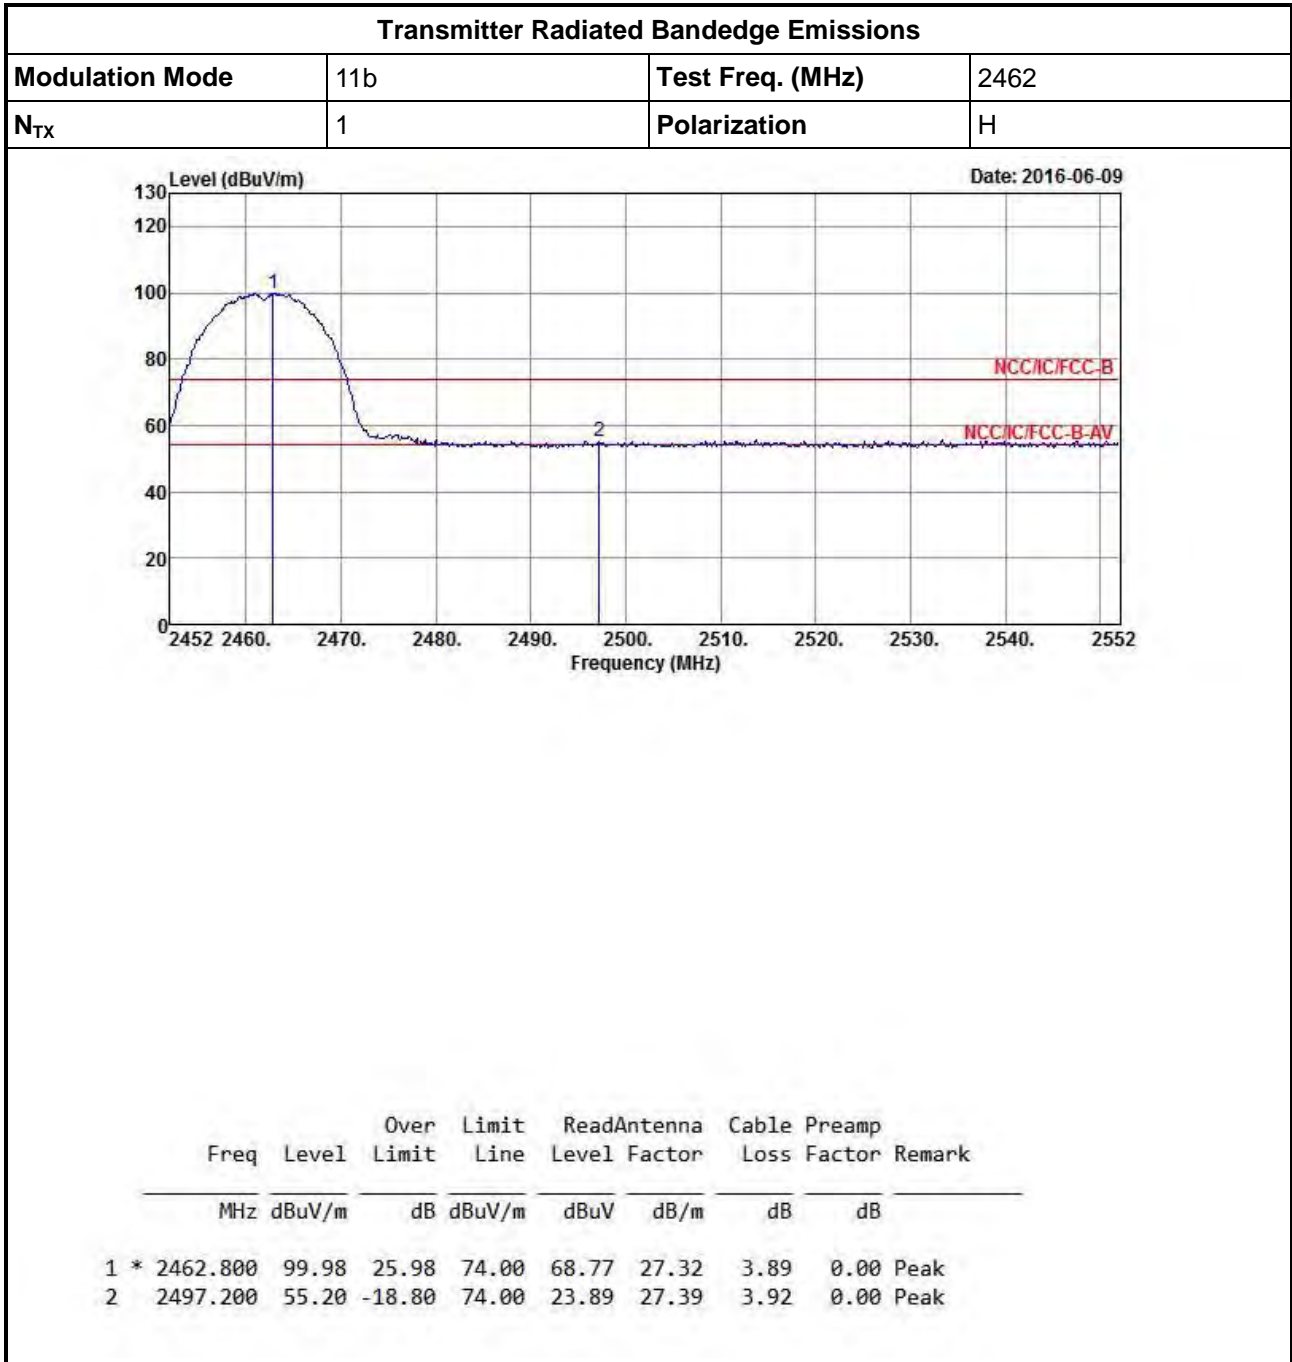


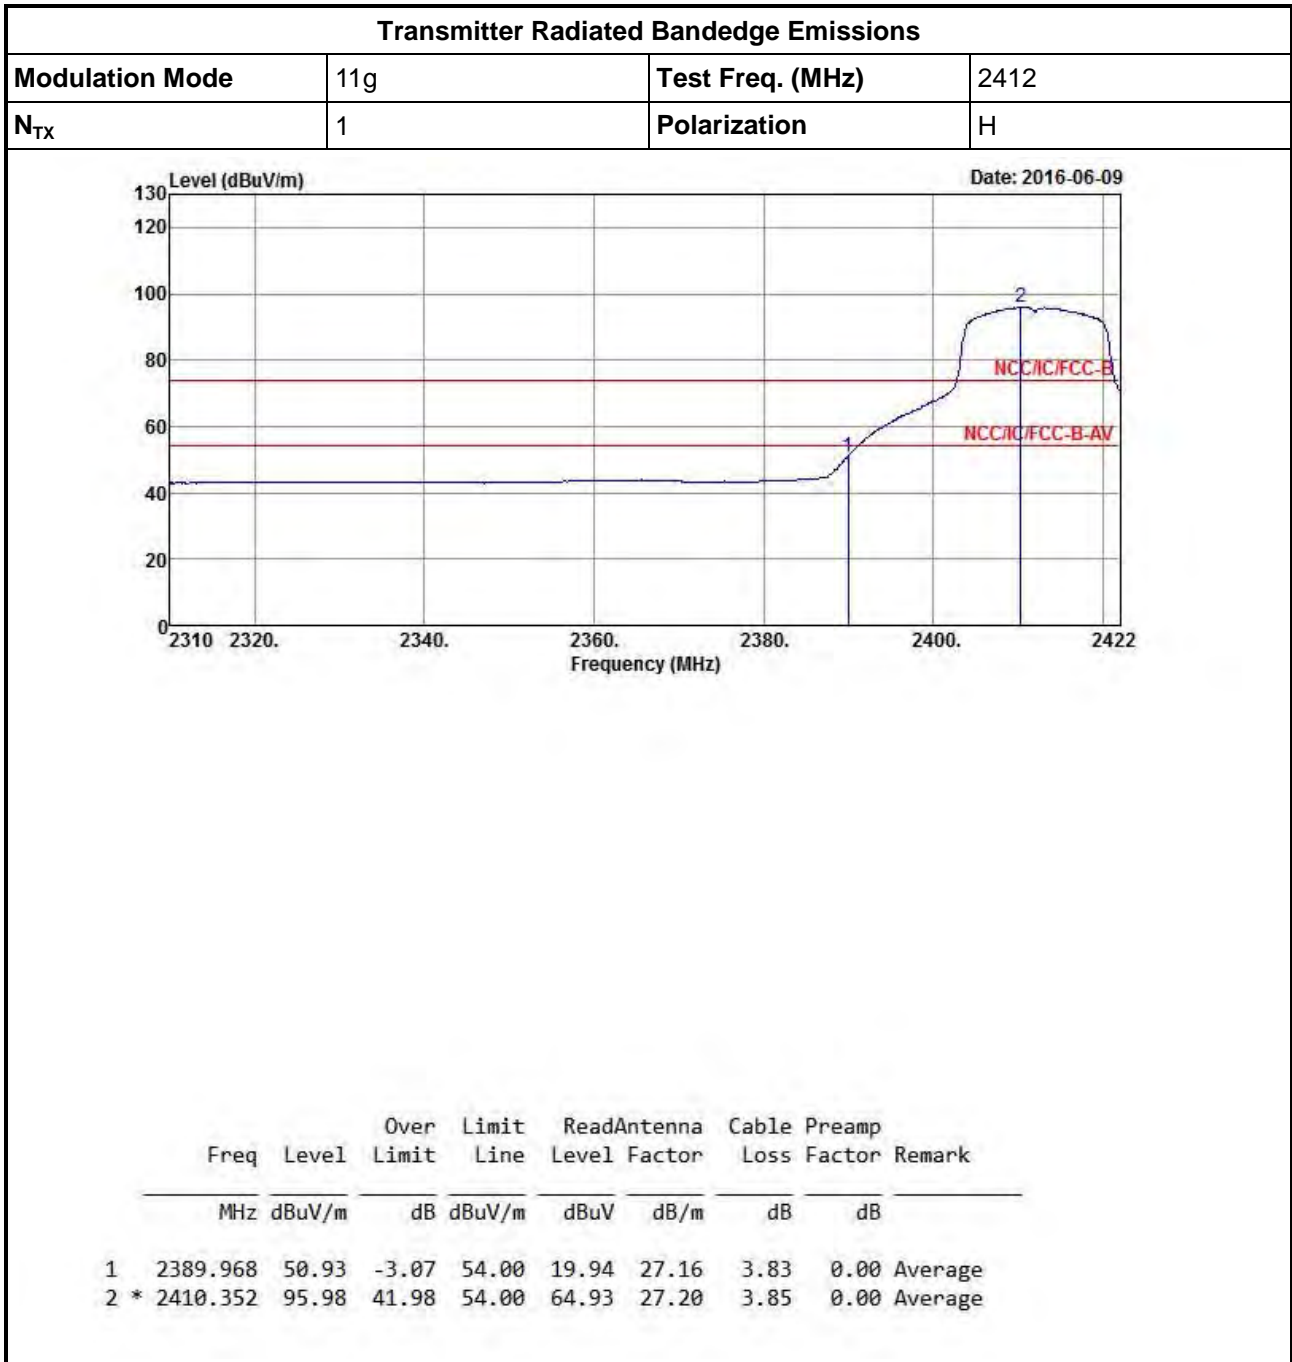


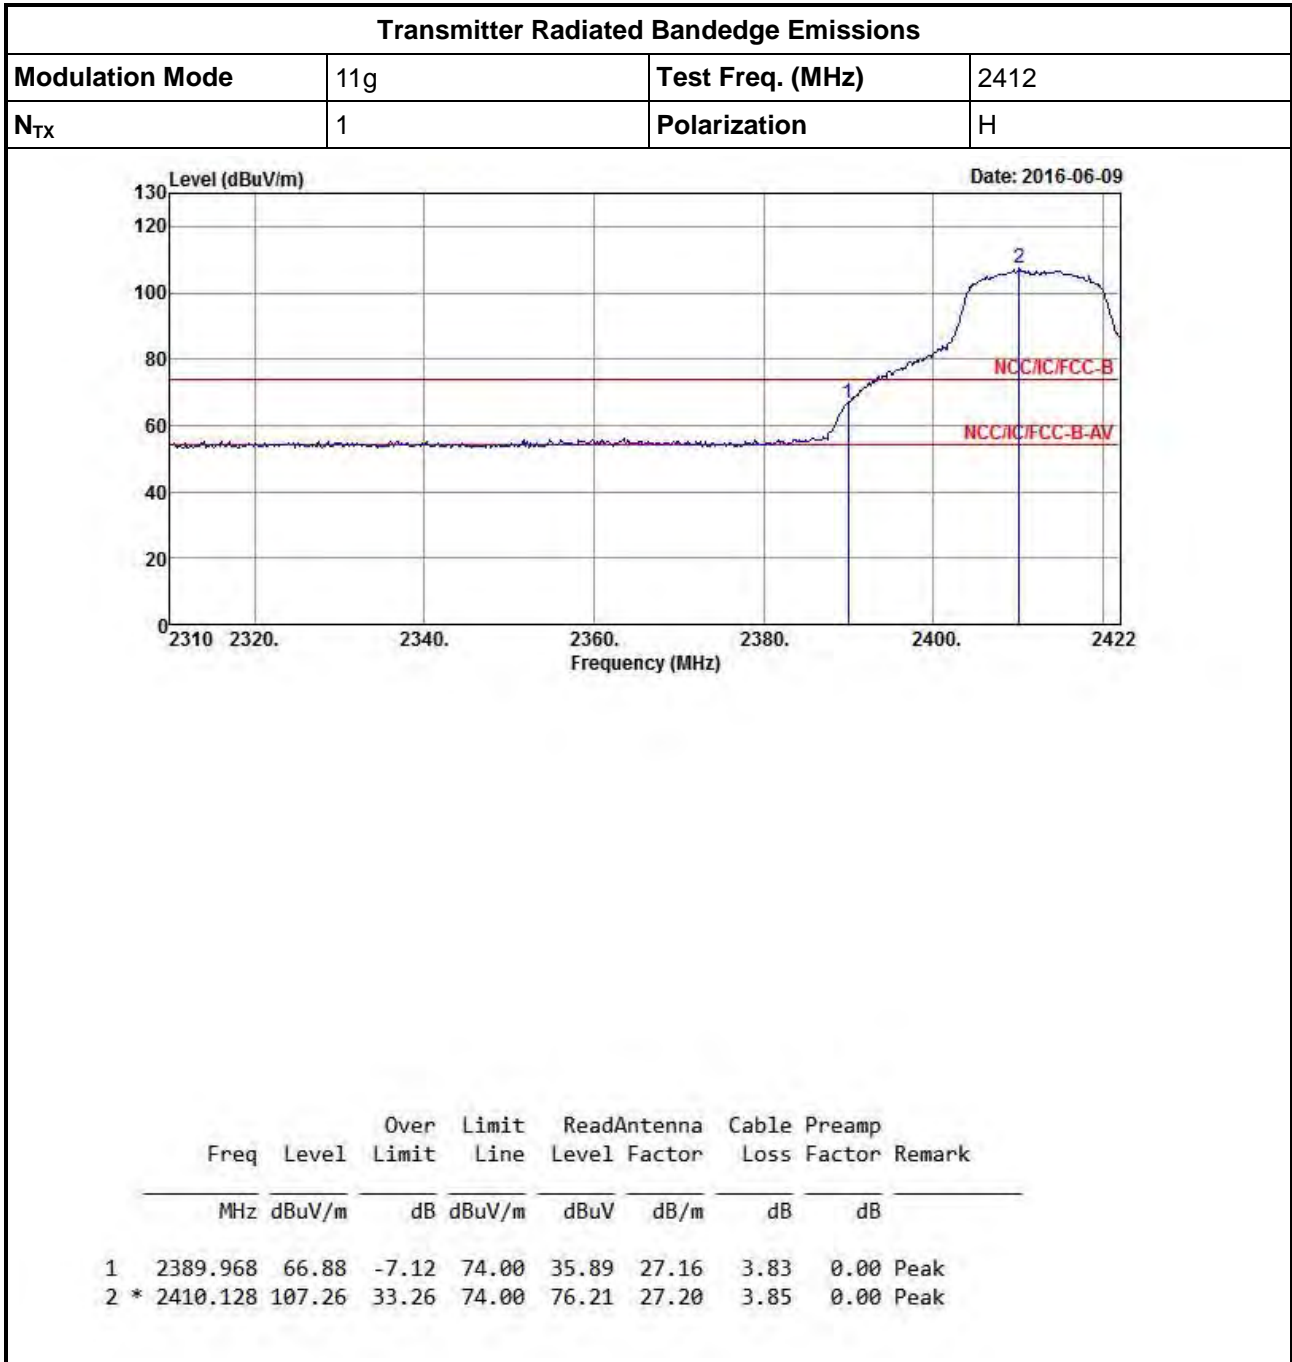

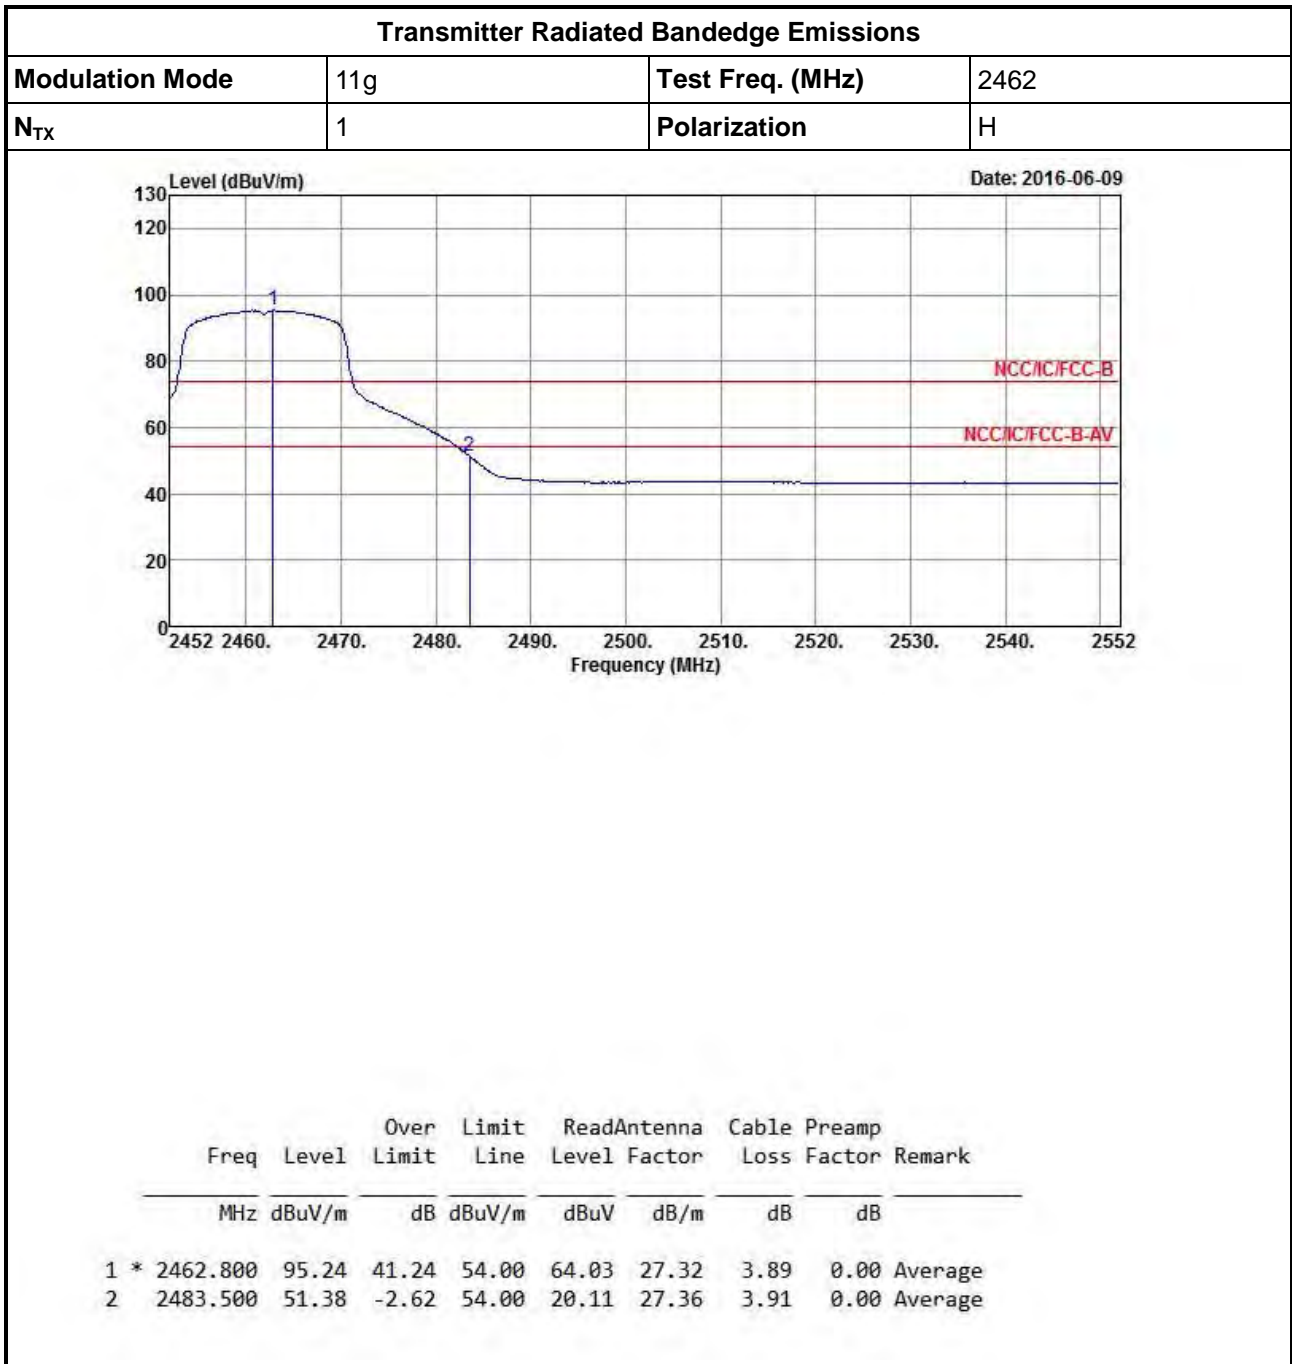


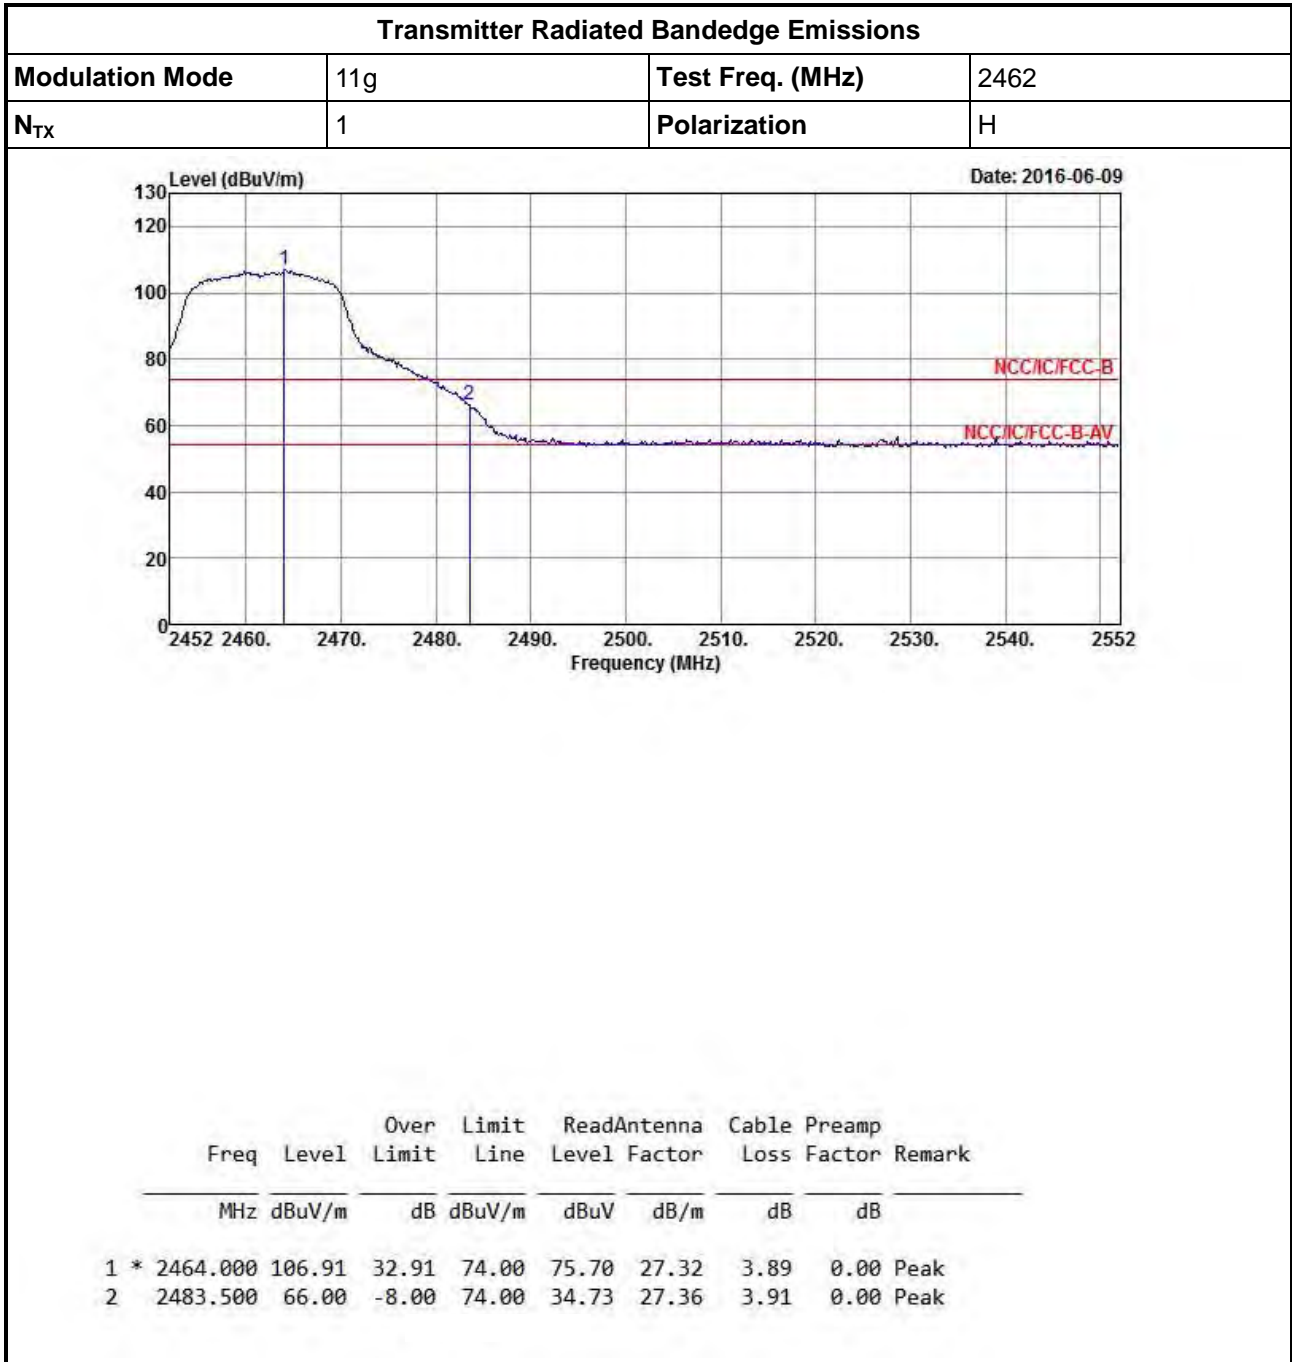


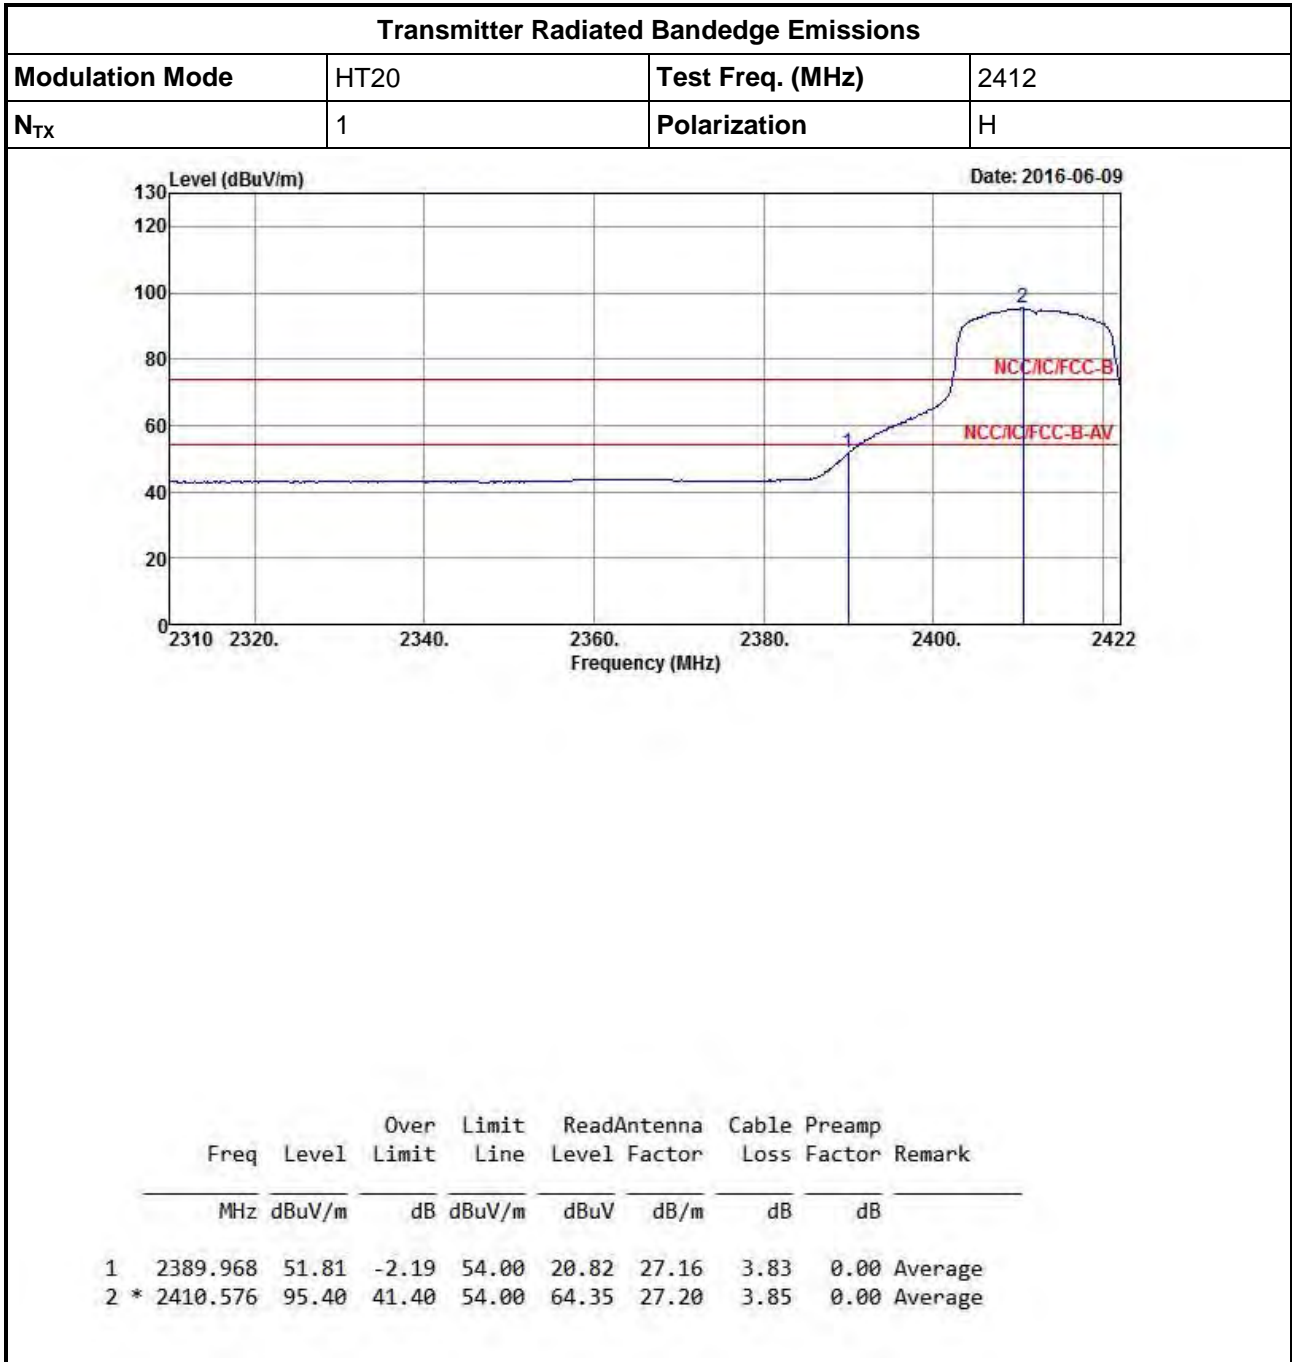


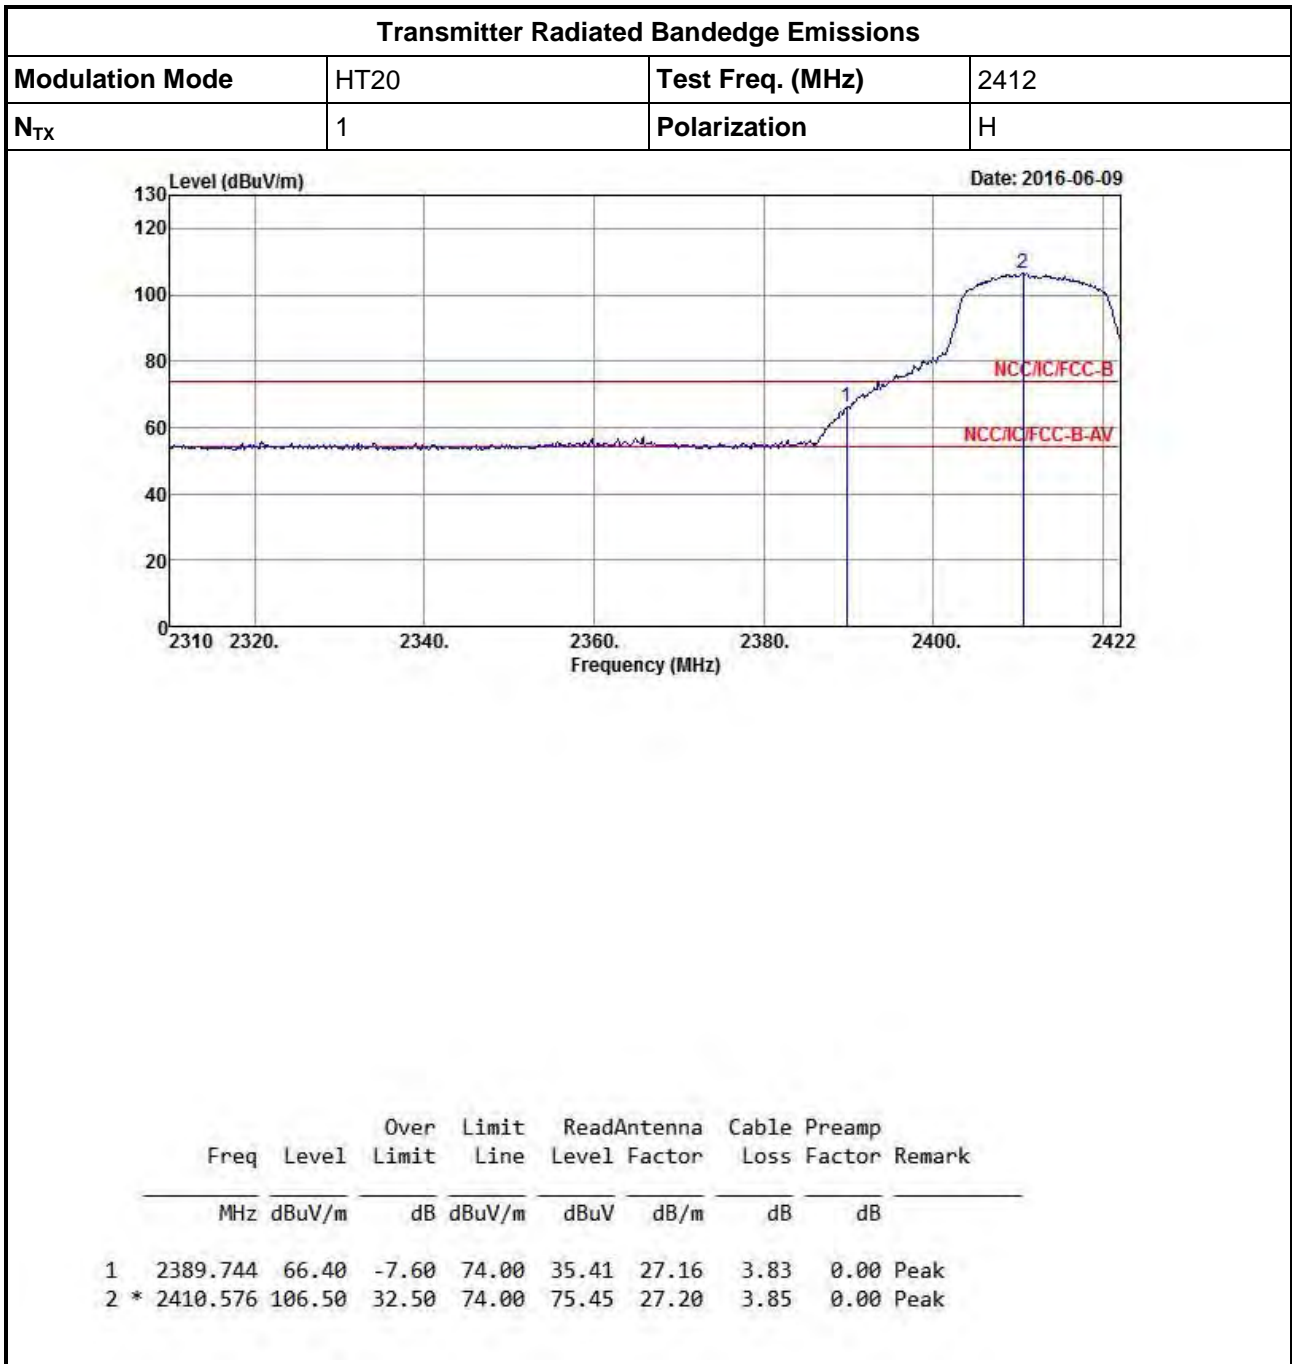





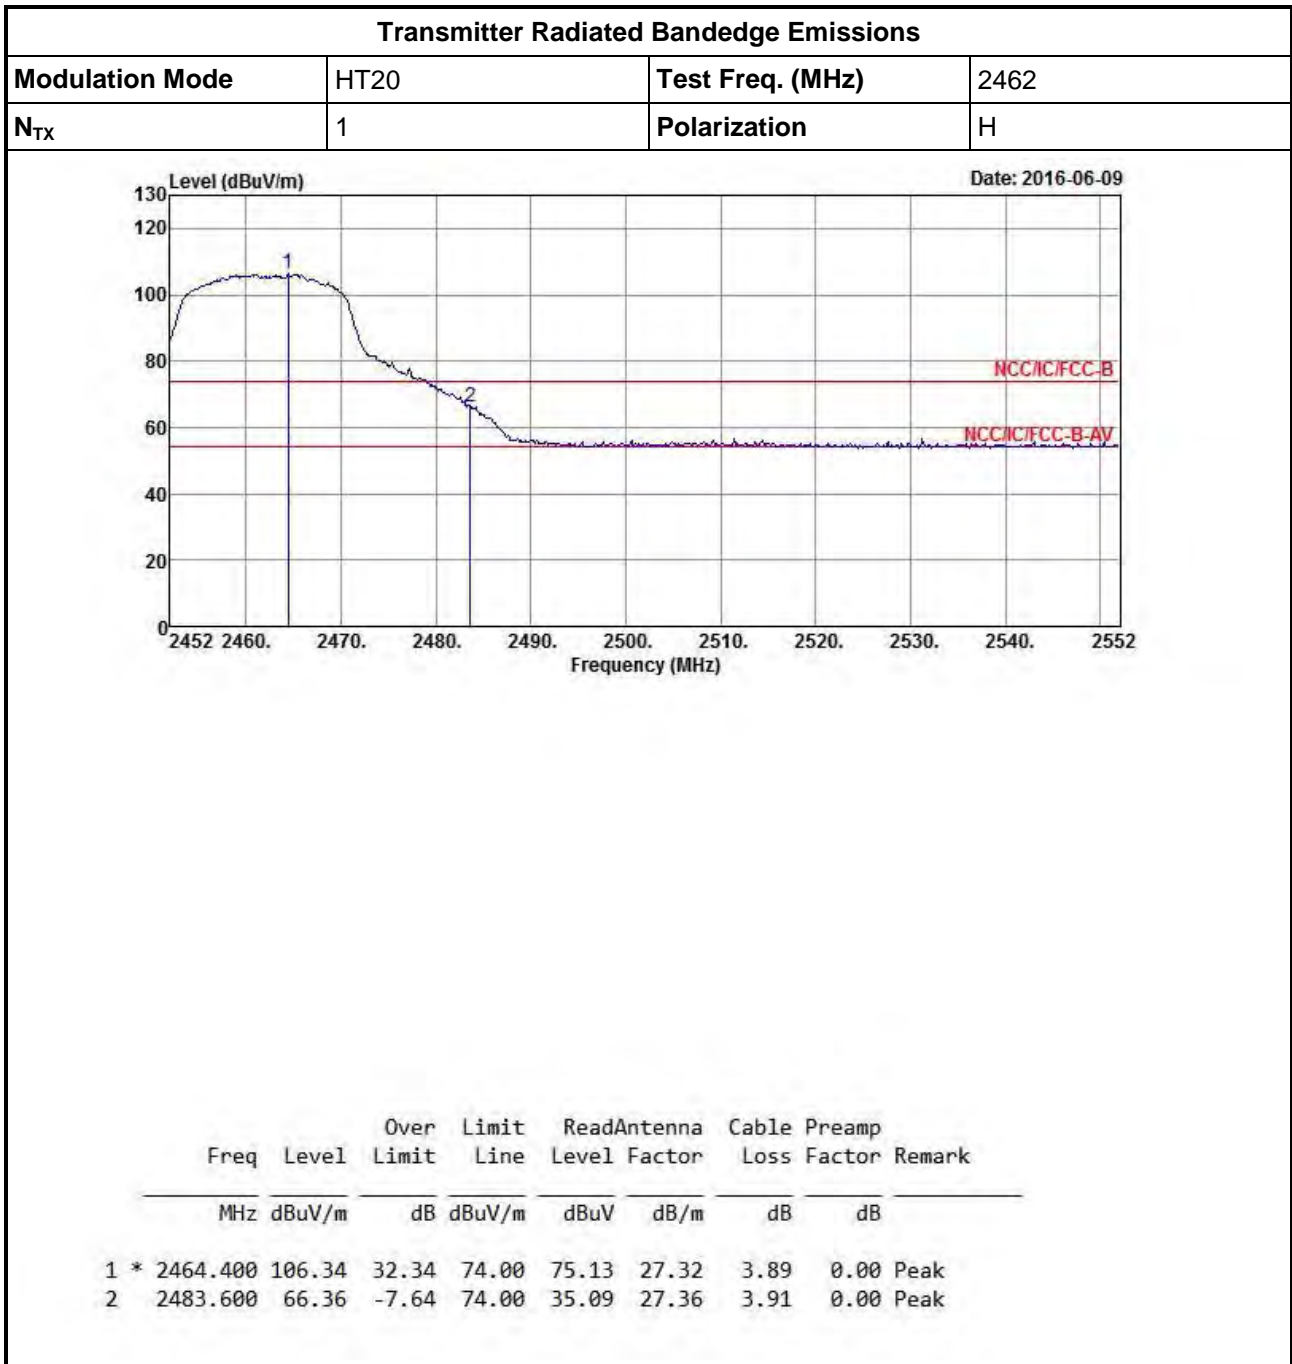

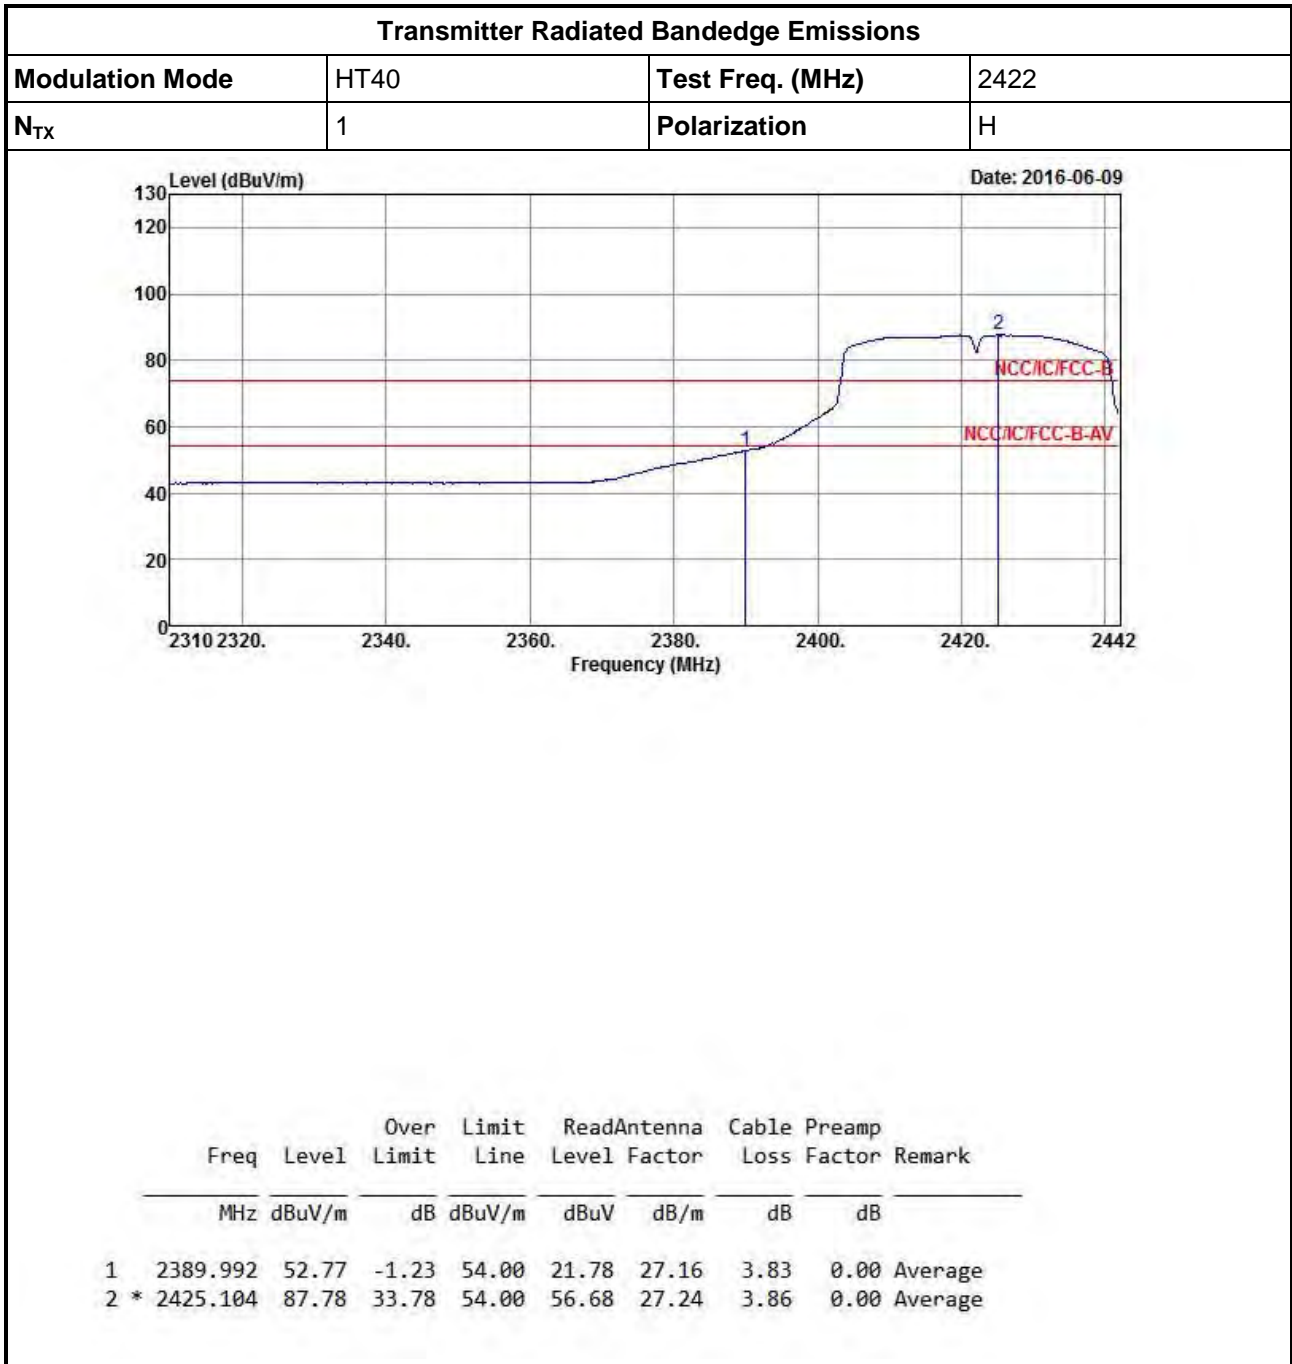

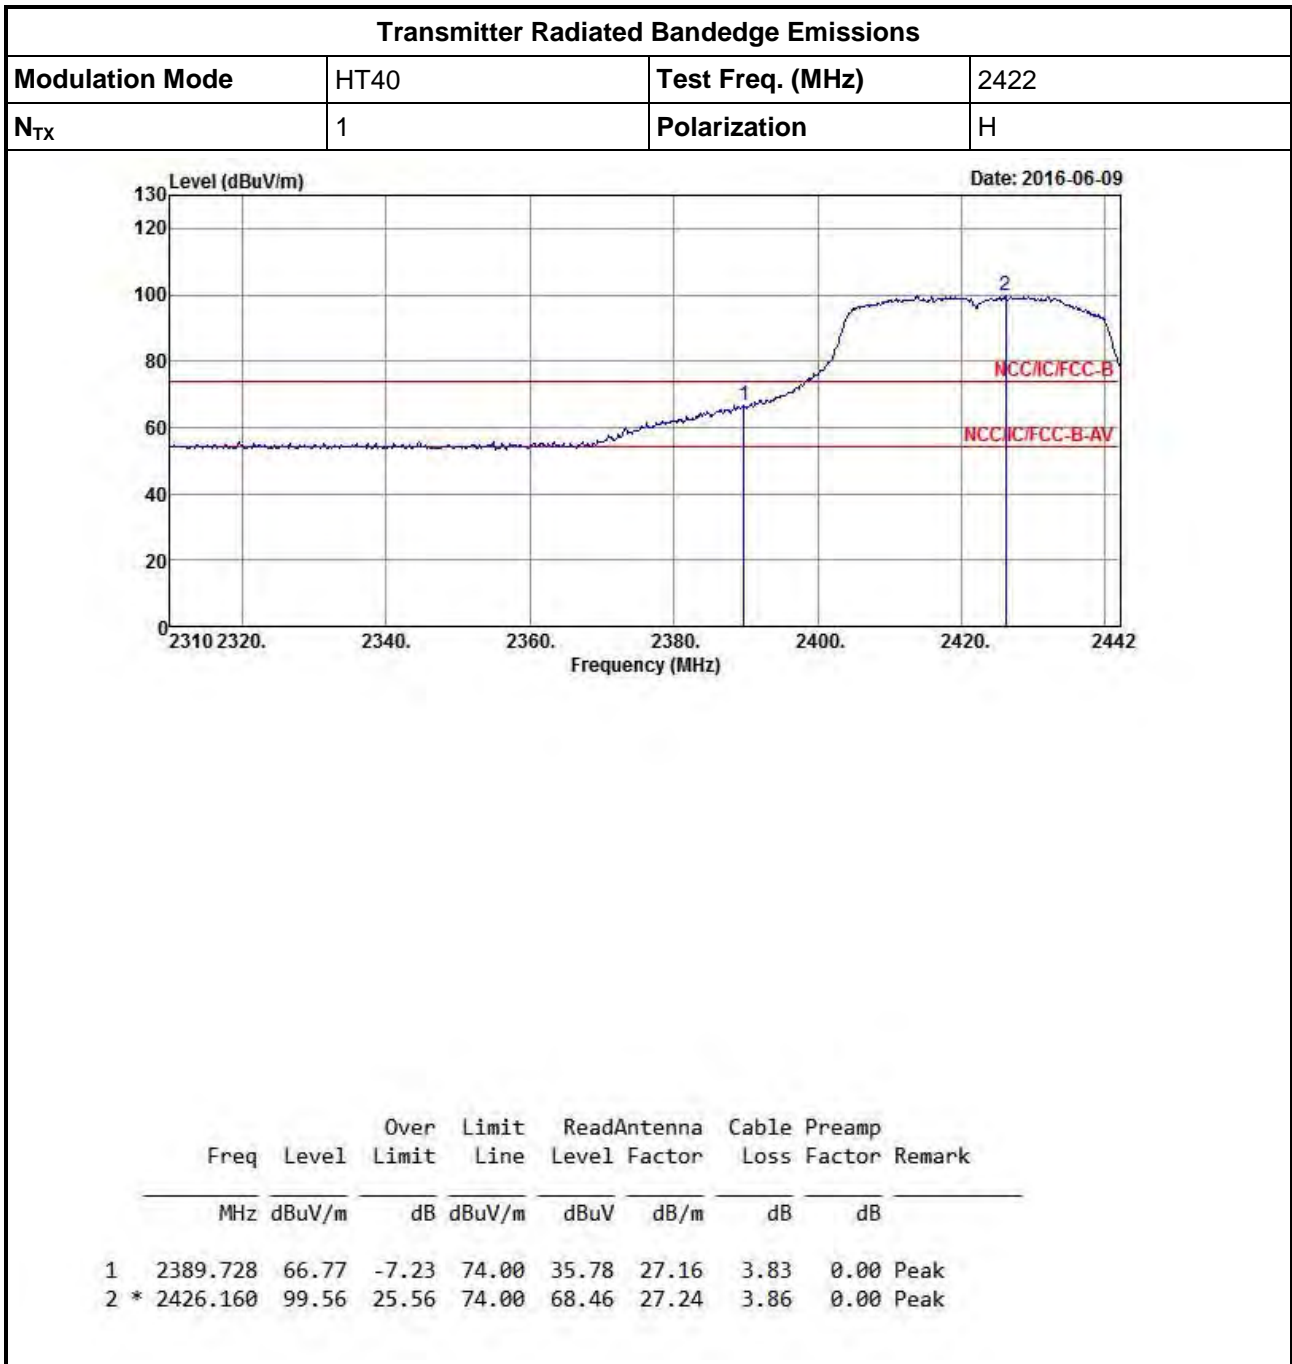

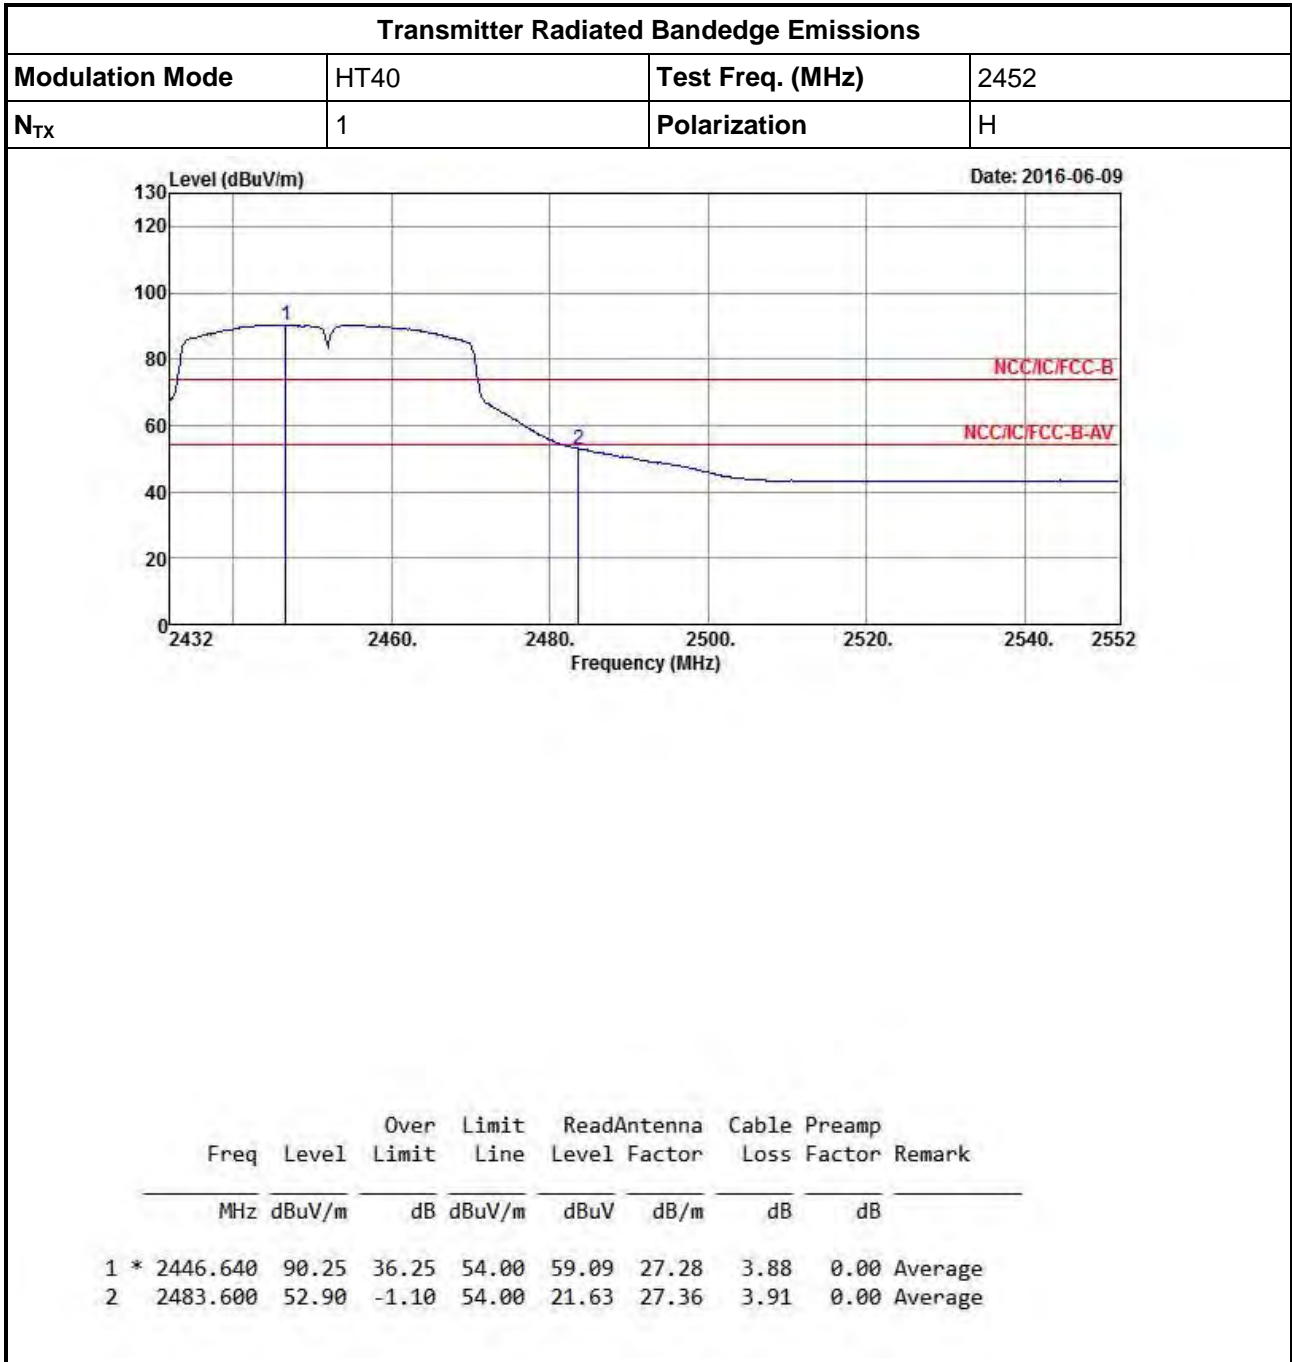


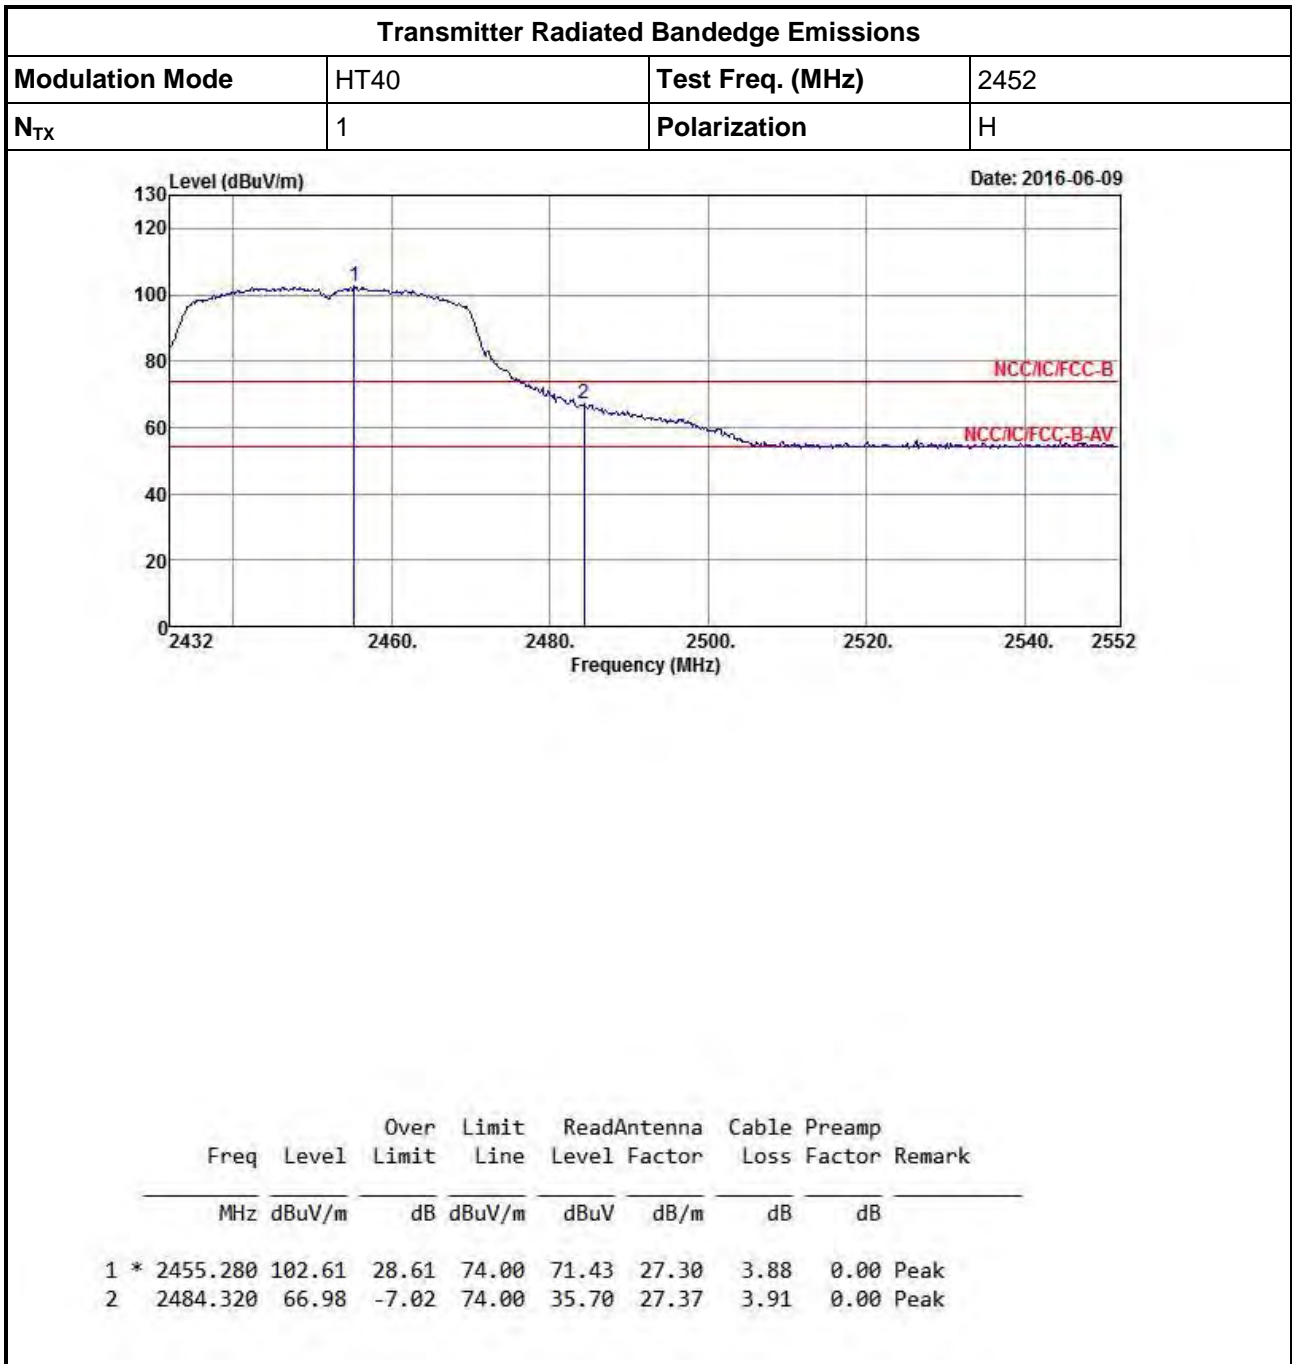




Transmitter Radiated Unwanted Emissions (Below 1GHz)


Radiated Unwanted Emissions (Below 1GHz)			
Operating Mode	1	Polarization	H
Operating Function	Transmit Mode		

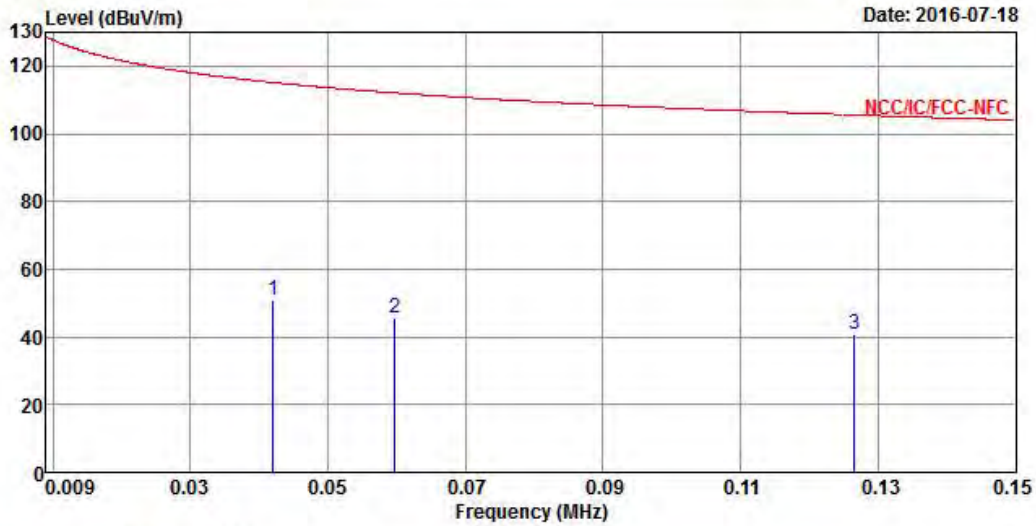


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	0.042	50.74	-64.40	115.14	29.69	20.90	0.15	0.00	Peak
2	0.060	45.54	-66.54	112.08	24.39	21.00	0.15	0.00	Peak
3	0.127	40.92	-64.64	105.56	19.70	21.06	0.16	0.00	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

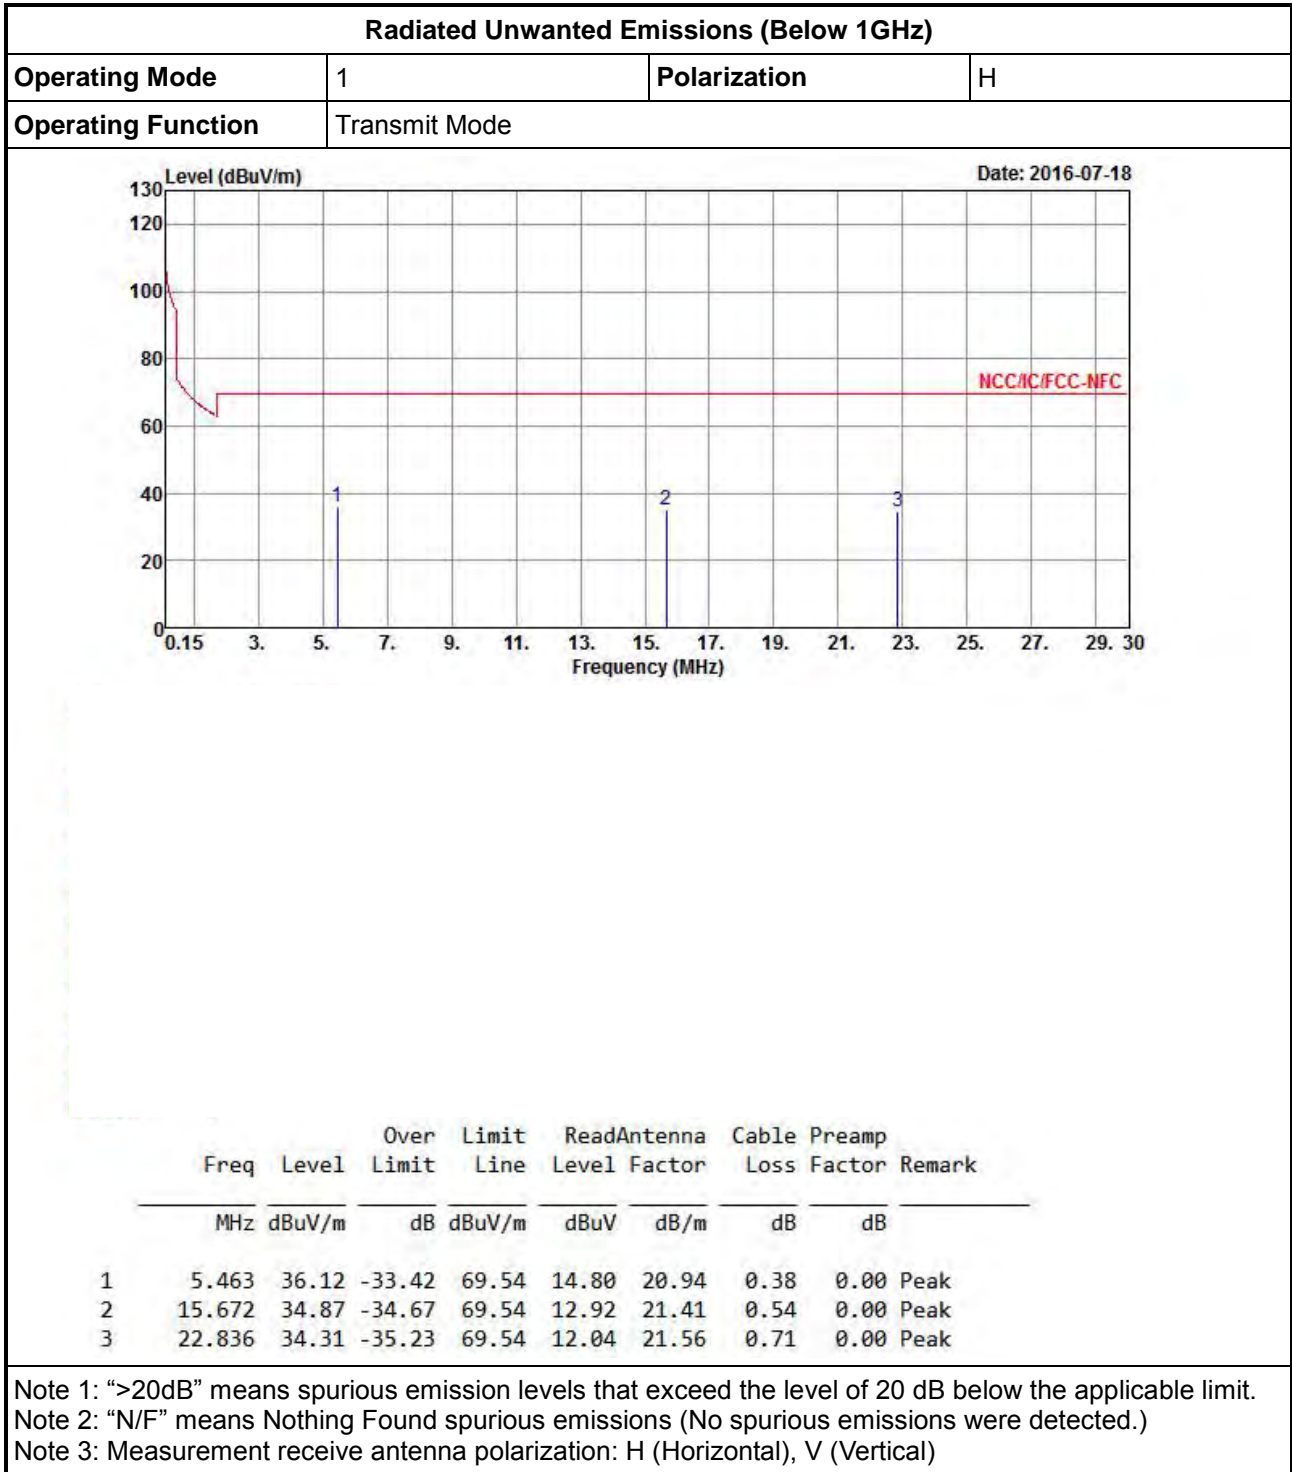

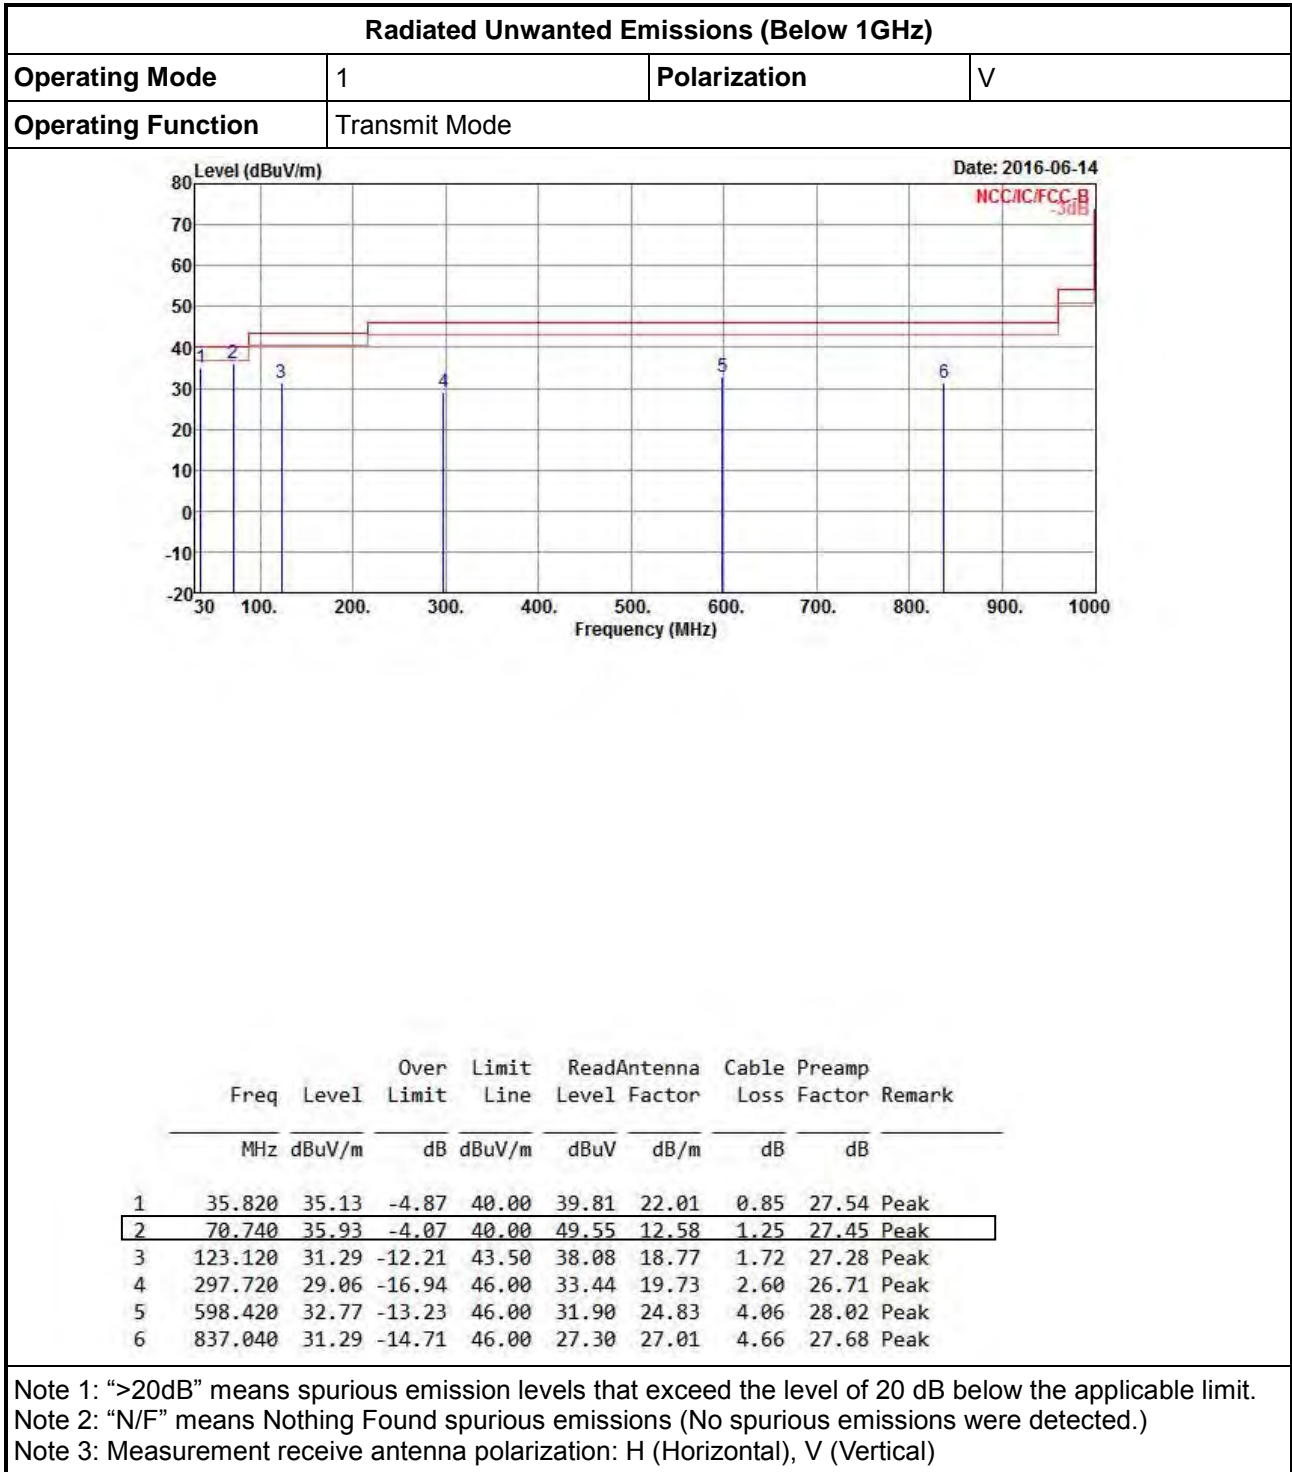


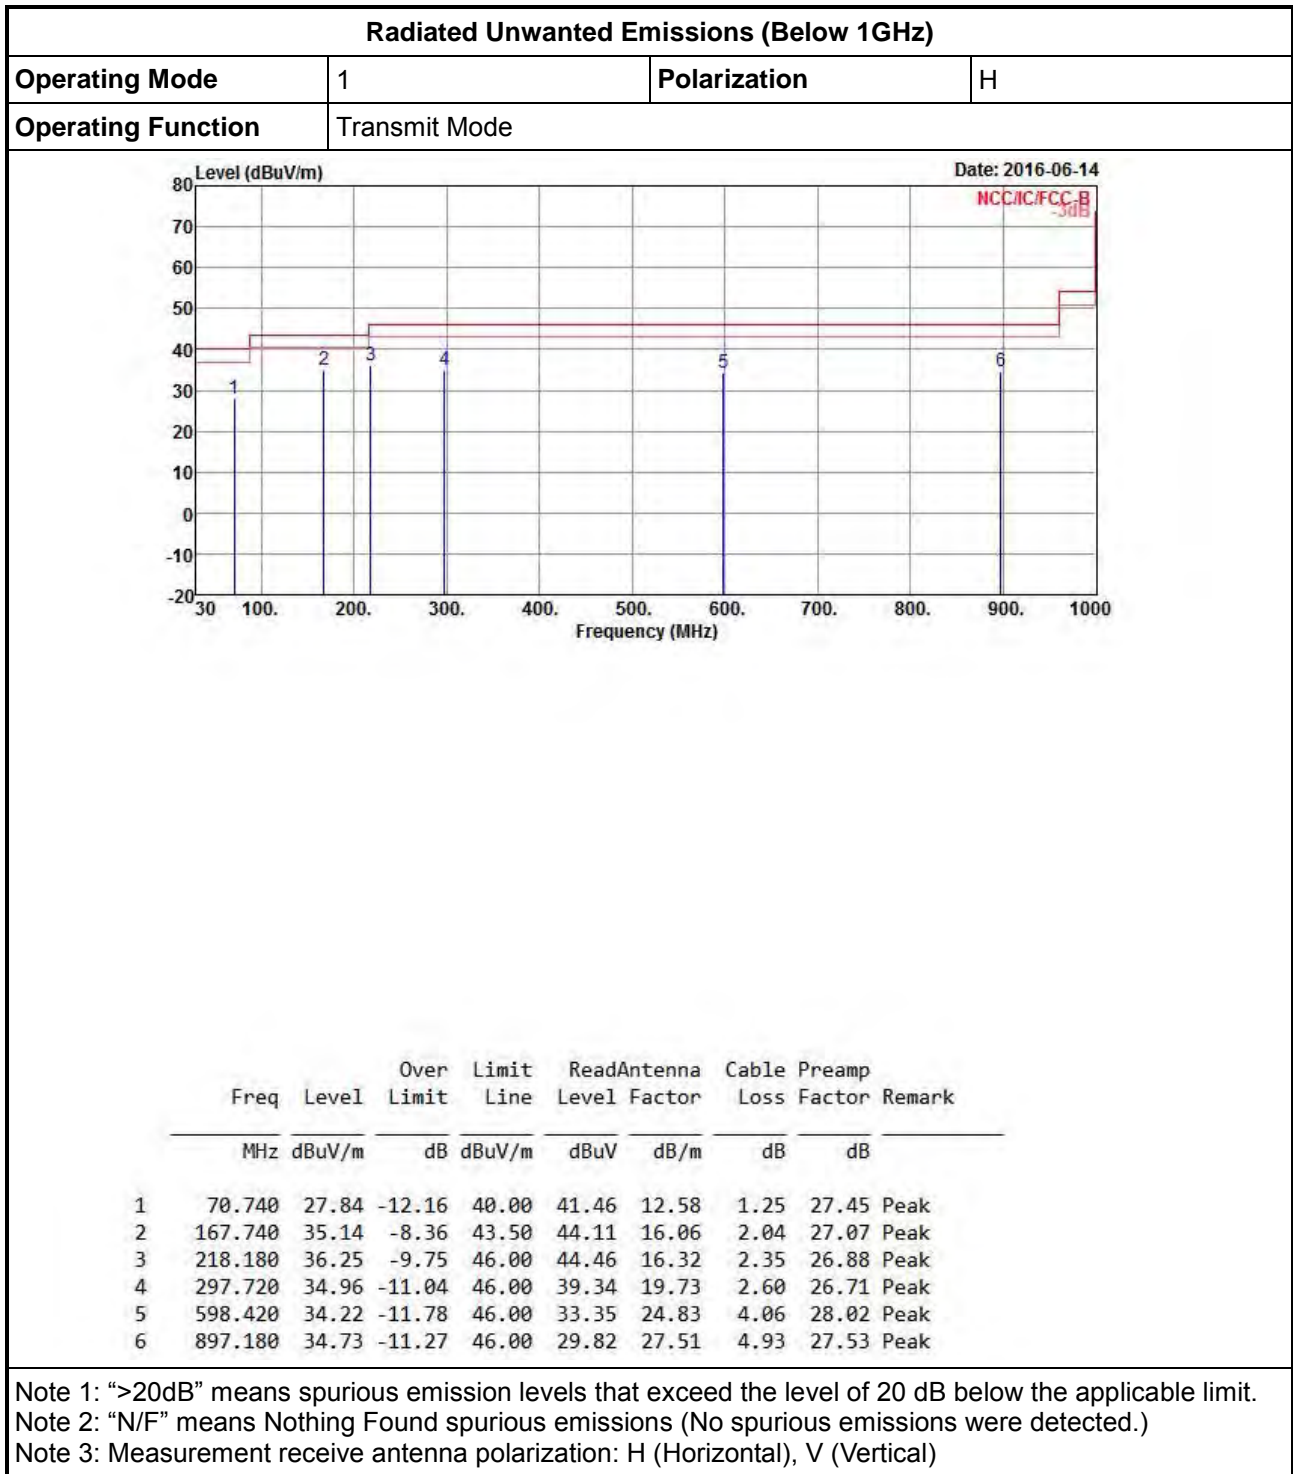




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11b	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	V

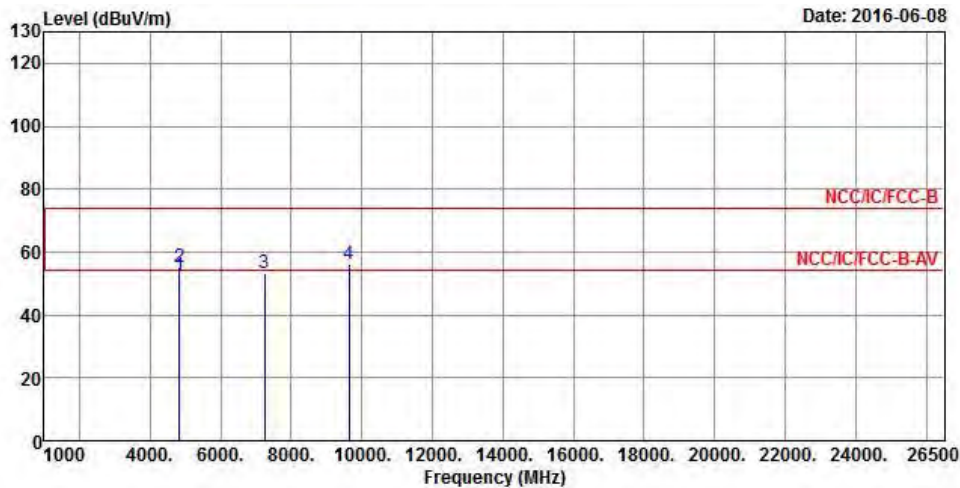



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1	4824.000	52.35	-1.65	54.00	48.34	31.15	5.40	32.54 Average
2	4824.000	55.01	-18.99	74.00	51.00	31.15	5.40	32.54 Peak
3	7236.000	53.02			43.10	35.67	7.03	32.78 Peak
4	9648.000	55.90			42.12	38.73	8.27	33.22 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (99.99 dBuV/m).
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

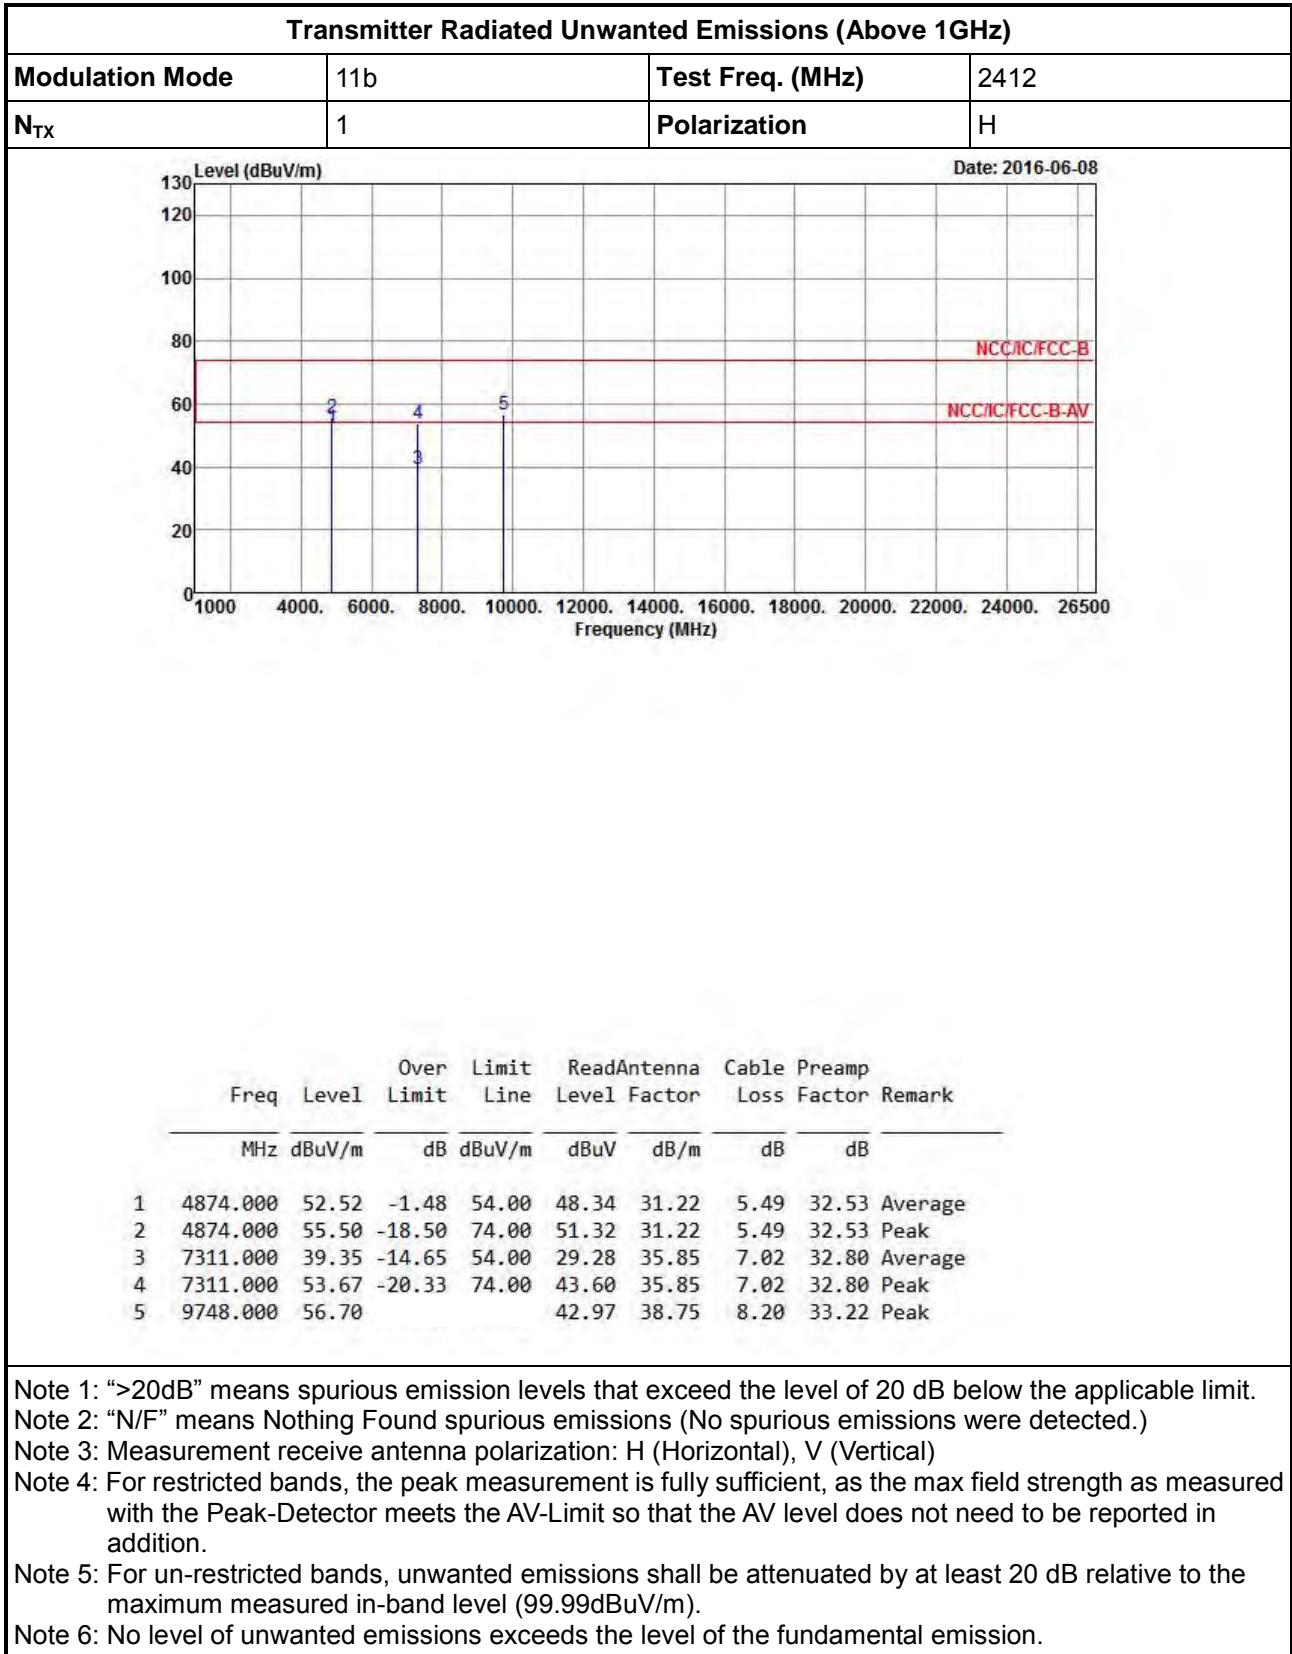

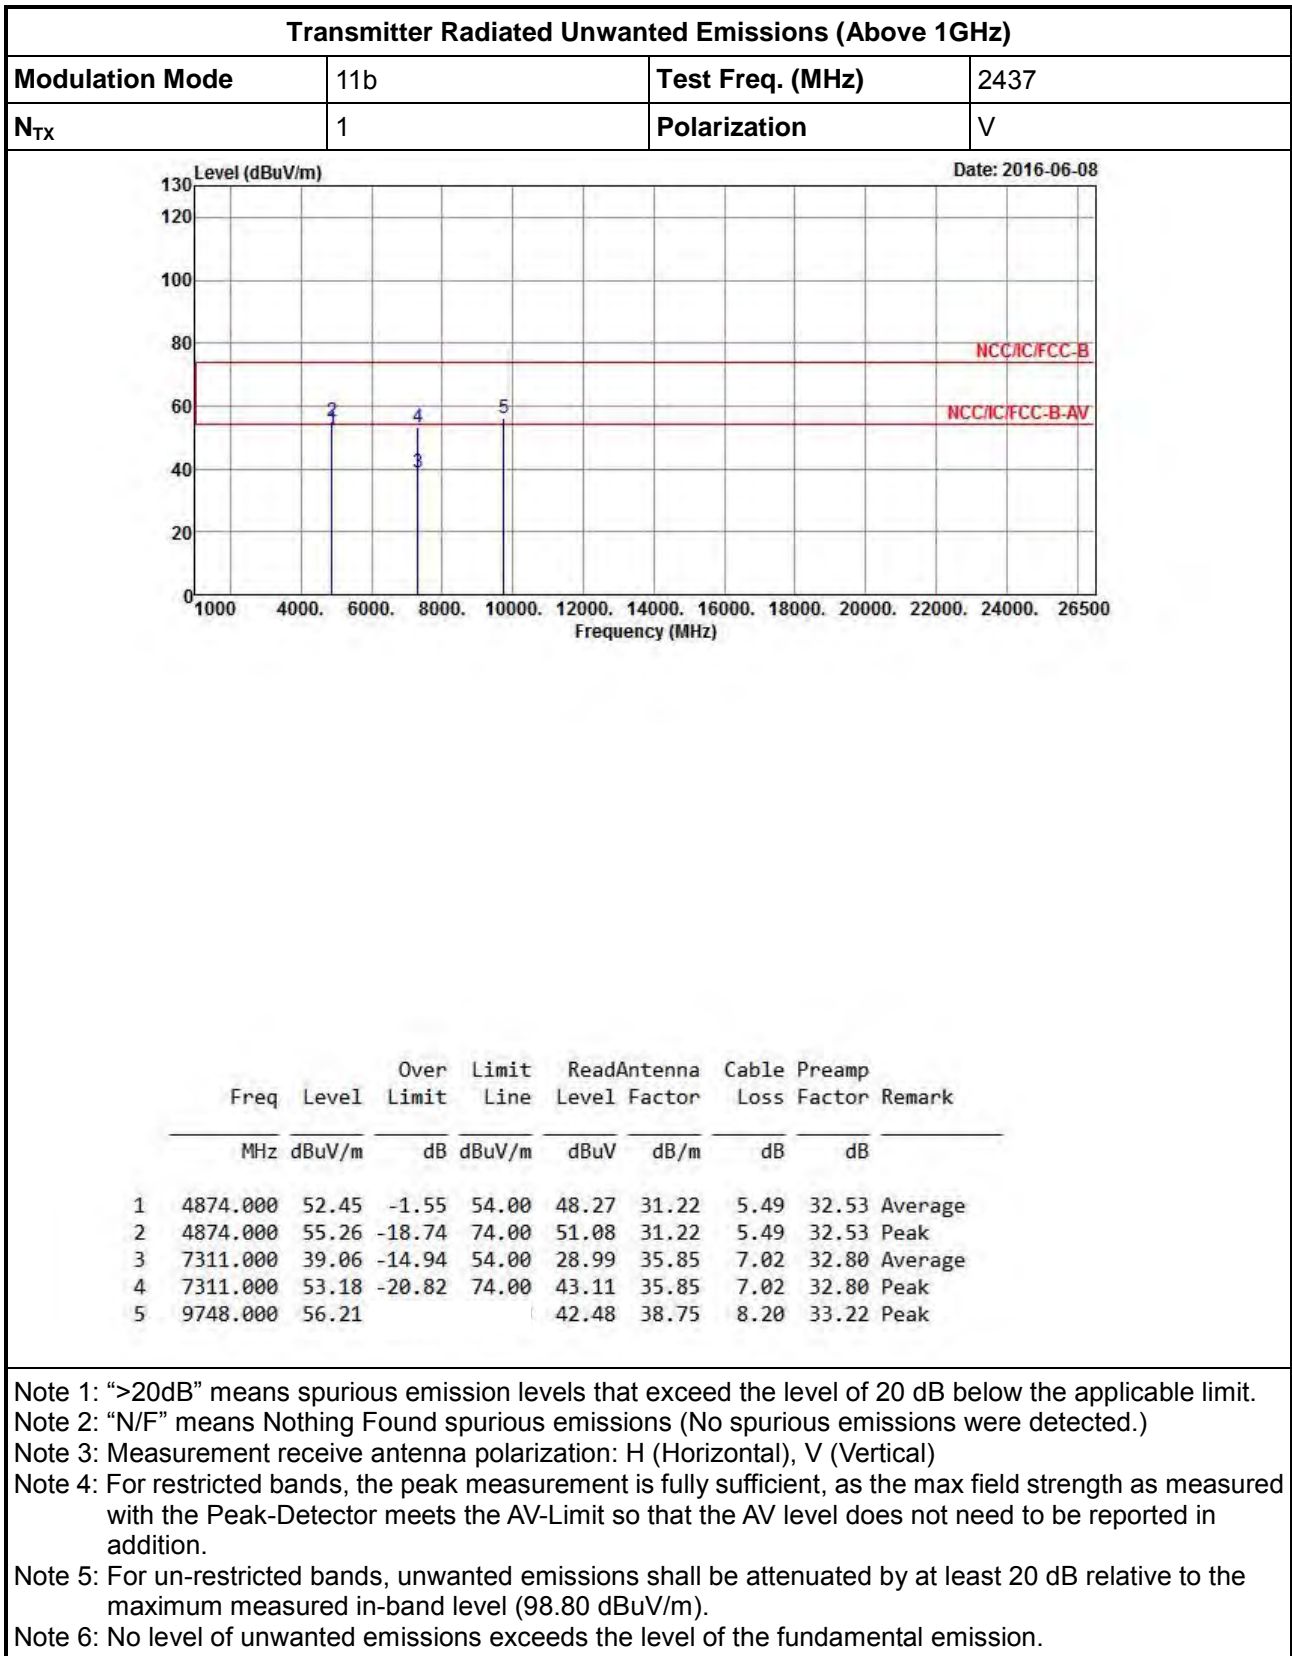

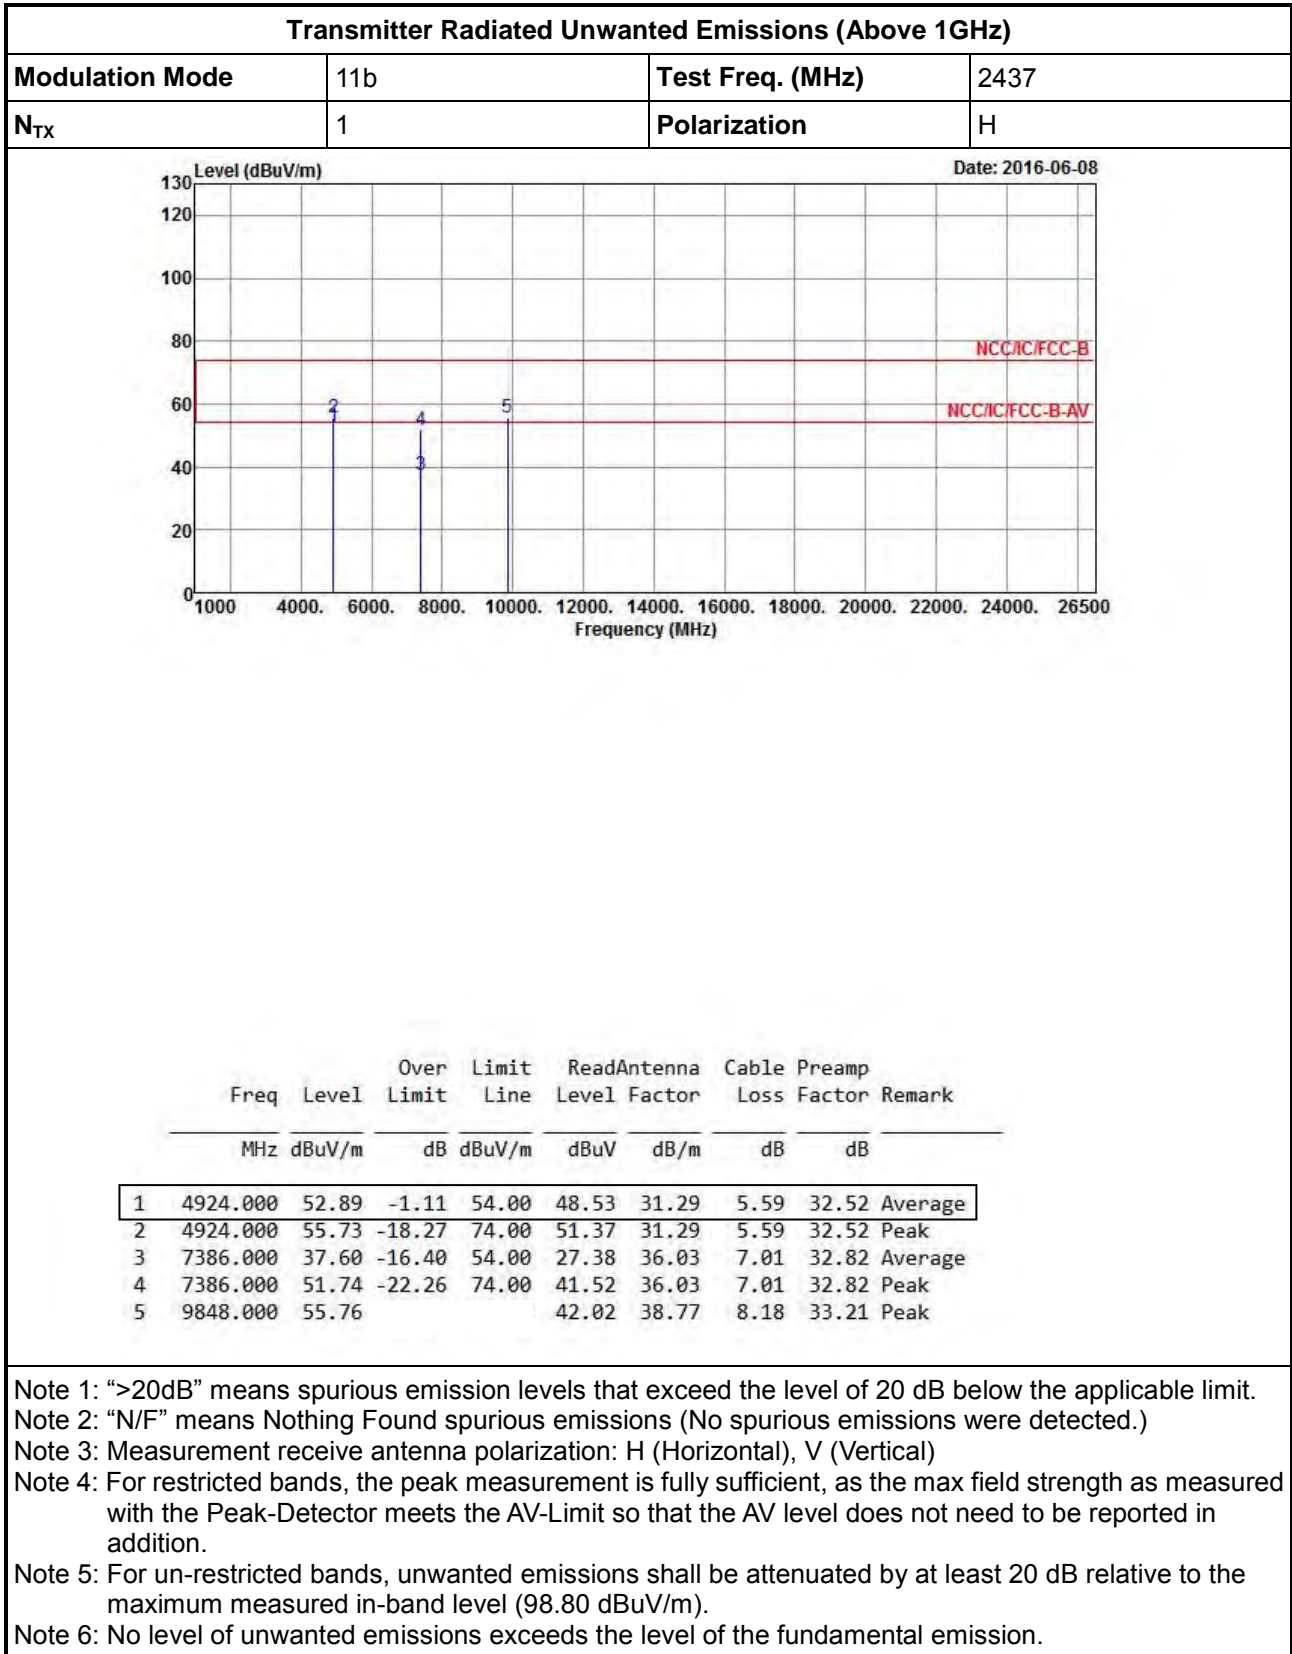


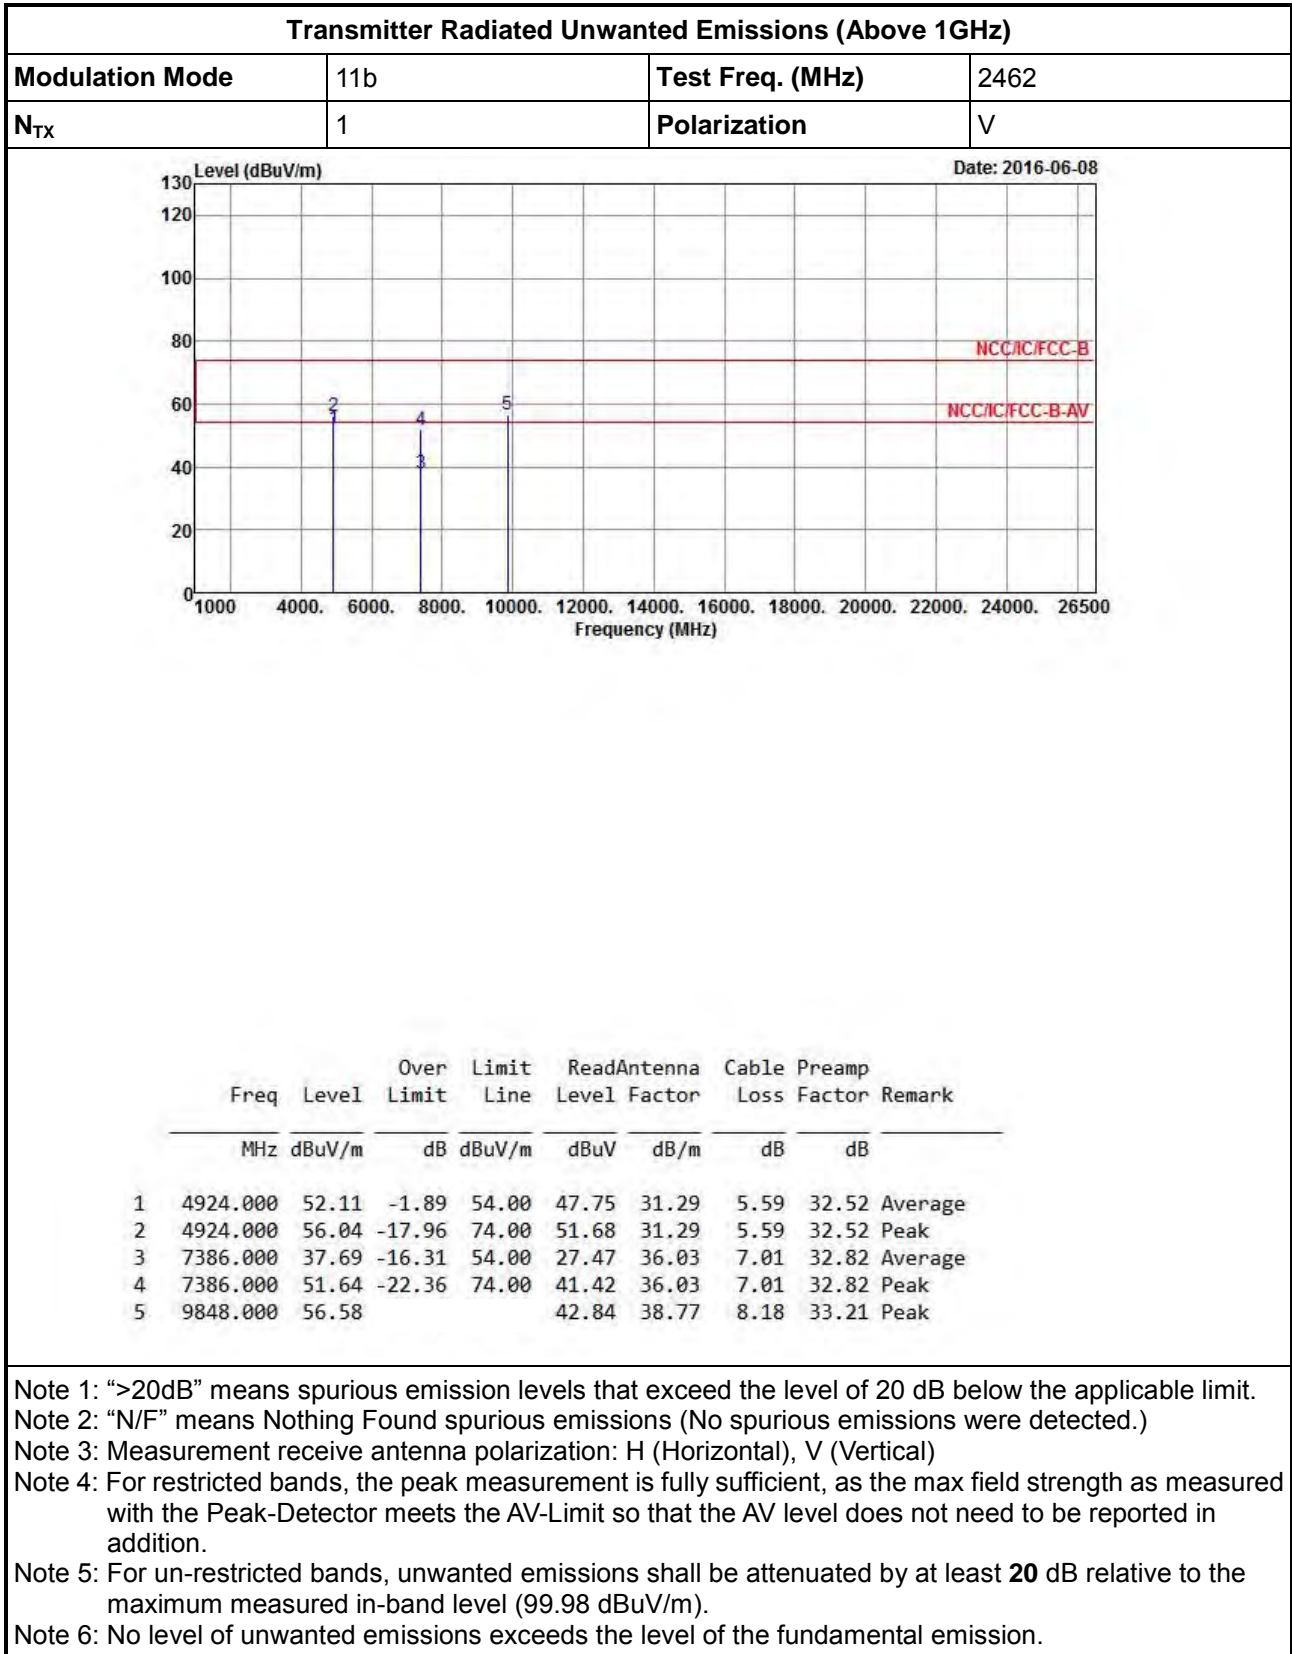

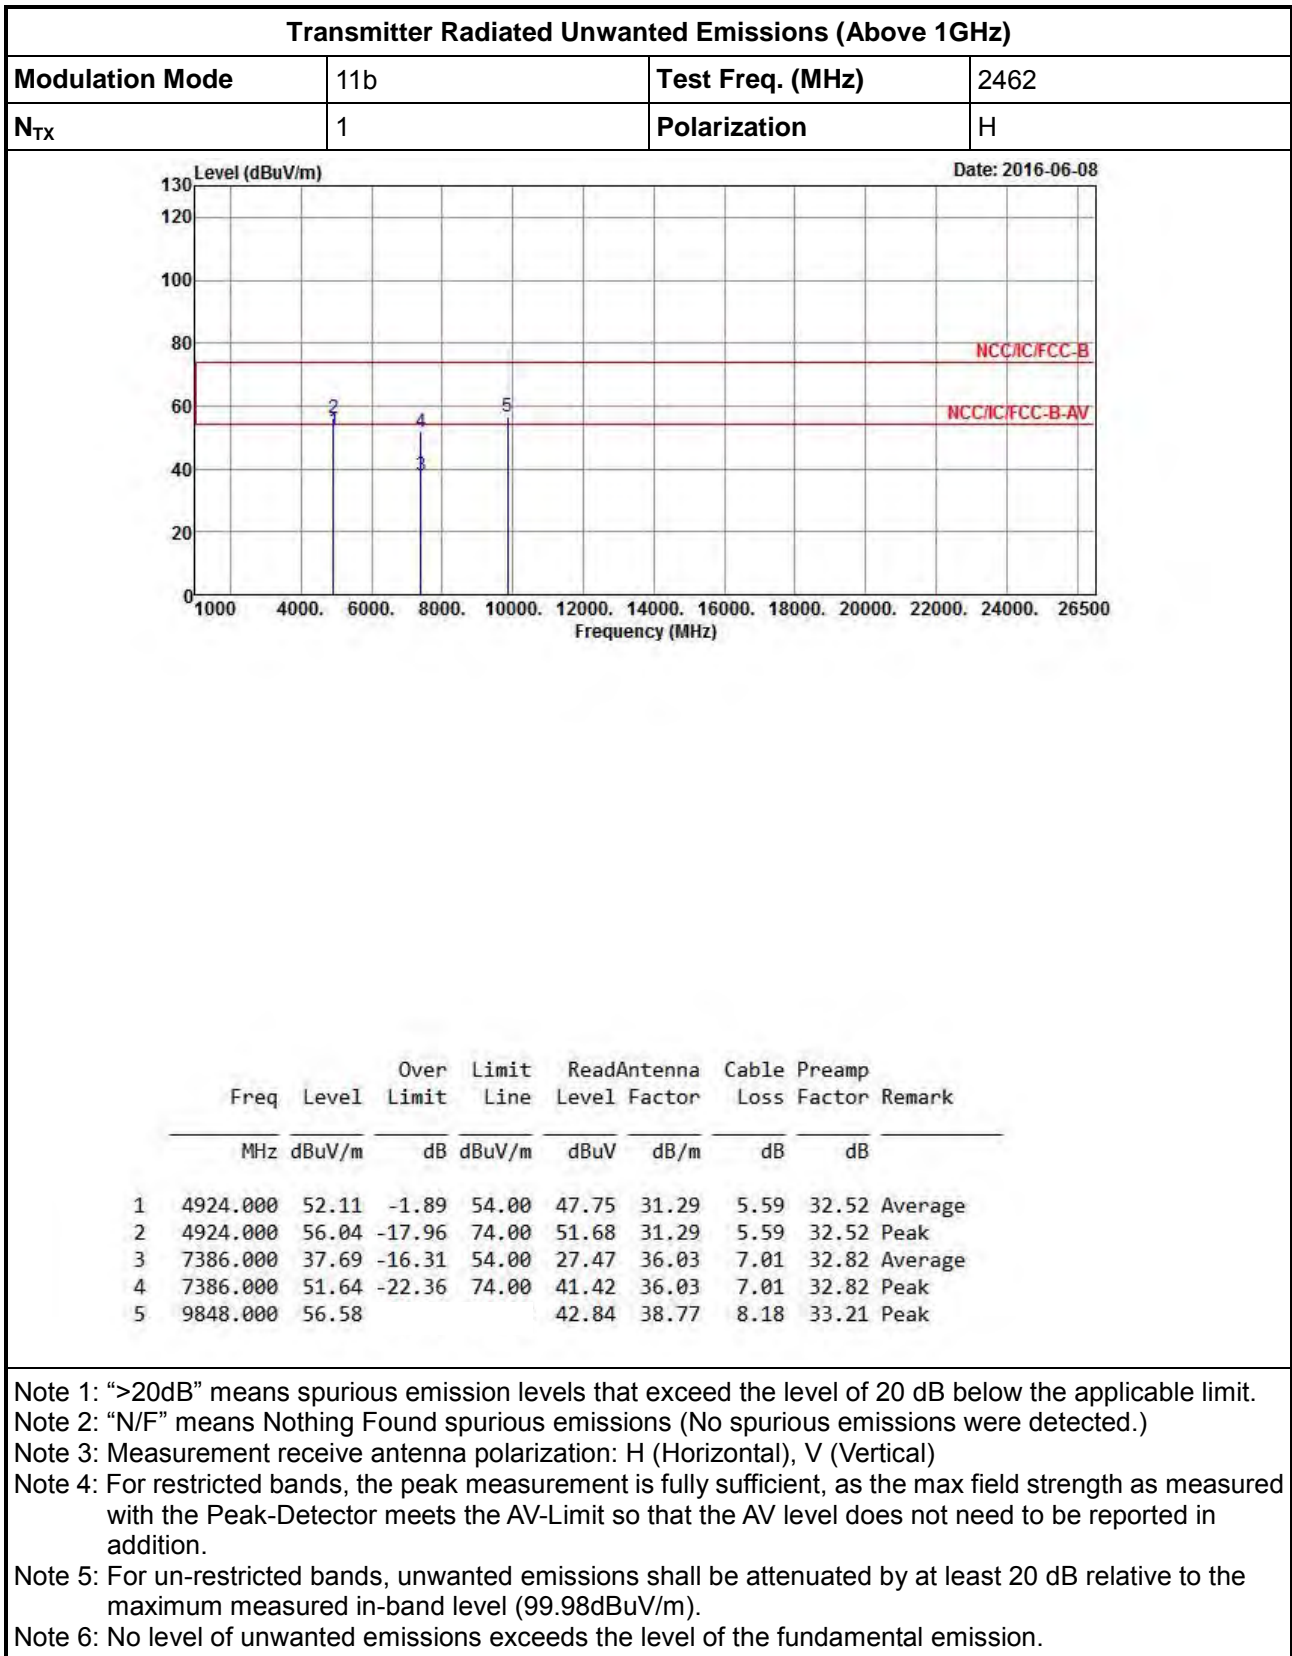



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11g	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	V

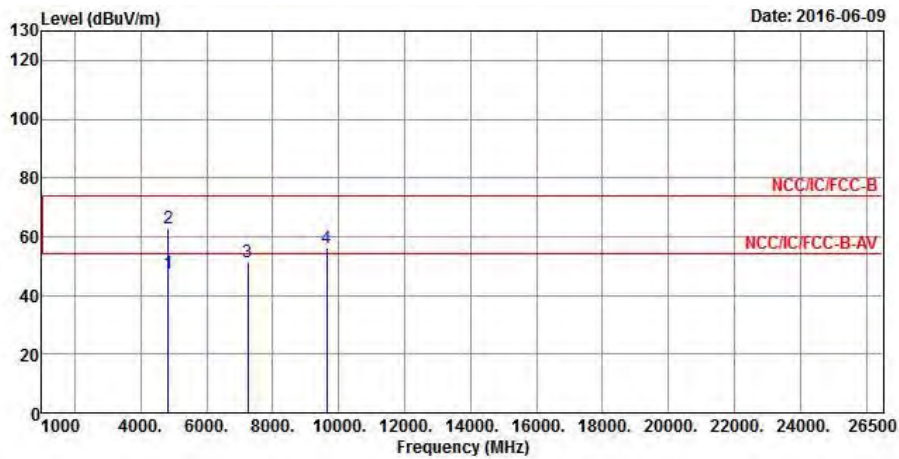

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	
			dB	dBuV/m	dBuV	dB	dB	
1	4824.000	47.48	-6.52	54.00	43.47	31.15	5.40	32.54 Average
2	4824.000	62.72	-11.28	74.00	58.71	31.15	5.40	32.54 Peak
3	7236.000	51.31	-22.69	74.00	41.39	35.67	7.03	32.78 Peak
4	9648.000	56.16			42.38	38.73	8.27	33.22 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (107.26dBuV/m).
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																									
Modulation Mode	11g	Test Freq. (MHz)	2412																																																						
N _{TX}	1	Polarization	H																																																						
<div style="display: flex; justify-content: space-between;"> Level (dBuV/m) Date: 2016-06-09 </div> <p style="text-align: center;">Frequency (MHz)</p>																																																									
<table border="1" style="width: 100%; border-collapse: collapse; margin-top: 20px;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.000</td> <td>48.38</td> <td>-5.62</td> <td>54.00</td> <td>44.37</td> <td>31.15</td> <td>5.40 32.54</td> <td>Average</td> </tr> <tr> <td>2</td> <td>4824.000</td> <td>65.20</td> <td>-8.80</td> <td>74.00</td> <td>61.19</td> <td>31.15</td> <td>5.40 32.54</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>7236.000</td> <td>51.51</td> <td></td> <td></td> <td>41.59</td> <td>35.67</td> <td>7.03 32.78</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>9648.000</td> <td>55.99</td> <td></td> <td></td> <td>42.21</td> <td>38.73</td> <td>8.27 33.22</td> <td>Peak</td> </tr> </tbody> </table>					Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		1	4824.000	48.38	-5.62	54.00	44.37	31.15	5.40 32.54	Average	2	4824.000	65.20	-8.80	74.00	61.19	31.15	5.40 32.54	Peak	3	7236.000	51.51			41.59	35.67	7.03 32.78	Peak	4	9648.000	55.99			42.21	38.73	8.27 33.22	Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark																																																	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB																																																		
1	4824.000	48.38	-5.62	54.00	44.37	31.15	5.40 32.54	Average																																																	
2	4824.000	65.20	-8.80	74.00	61.19	31.15	5.40 32.54	Peak																																																	
3	7236.000	51.51			41.59	35.67	7.03 32.78	Peak																																																	
4	9648.000	55.99			42.21	38.73	8.27 33.22	Peak																																																	
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)</p> <p>Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</p> <p>Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (107.26 dBuV/m).</p> <p>Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>																																																									



Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																		
Modulation Mode	11g	Test Freq. (MHz)	2437																																																															
N _{TX}	1	Polarization	V																																																															
<div style="display: flex; justify-content: space-between;"> <div> </div> <div style="text-align: right;">Date: 2016-06-09</div> </div>																																																																		
<table border="1" style="width: 100%; border-collapse: collapse; margin-top: 20px;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.000</td> <td>52.09</td> <td>-1.91</td> <td>54.00</td> <td>47.91</td> <td>31.22</td> <td>5.49</td> <td>32.53 Average</td> </tr> <tr> <td>2</td> <td>4874.000</td> <td>66.16</td> <td>-7.84</td> <td>74.00</td> <td>61.98</td> <td>31.22</td> <td>5.49</td> <td>32.53 Peak</td> </tr> <tr> <td>3</td> <td>7311.000</td> <td>37.93</td> <td>-16.07</td> <td>54.00</td> <td>27.86</td> <td>35.85</td> <td>7.02</td> <td>32.80 Average</td> </tr> <tr> <td>4</td> <td>7311.000</td> <td>52.09</td> <td>-21.91</td> <td>74.00</td> <td>42.02</td> <td>35.85</td> <td>7.02</td> <td>32.80 Peak</td> </tr> <tr> <td>5</td> <td>9748.000</td> <td>57.38</td> <td></td> <td></td> <td>43.65</td> <td>38.75</td> <td>8.20</td> <td>33.22 Peak</td> </tr> </tbody> </table>					Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	4874.000	52.09	-1.91	54.00	47.91	31.22	5.49	32.53 Average	2	4874.000	66.16	-7.84	74.00	61.98	31.22	5.49	32.53 Peak	3	7311.000	37.93	-16.07	54.00	27.86	35.85	7.02	32.80 Average	4	7311.000	52.09	-21.91	74.00	42.02	35.85	7.02	32.80 Peak	5	9748.000	57.38			43.65	38.75	8.20	33.22 Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																										
1	4874.000	52.09	-1.91	54.00	47.91	31.22	5.49	32.53 Average																																																										
2	4874.000	66.16	-7.84	74.00	61.98	31.22	5.49	32.53 Peak																																																										
3	7311.000	37.93	-16.07	54.00	27.86	35.85	7.02	32.80 Average																																																										
4	7311.000	52.09	-21.91	74.00	42.02	35.85	7.02	32.80 Peak																																																										
5	9748.000	57.38			43.65	38.75	8.20	33.22 Peak																																																										
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (109.61 dBuV/m). Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>																																																																		



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11g	Test Freq. (MHz)	2437
N _{TX}	1	Polarization	H

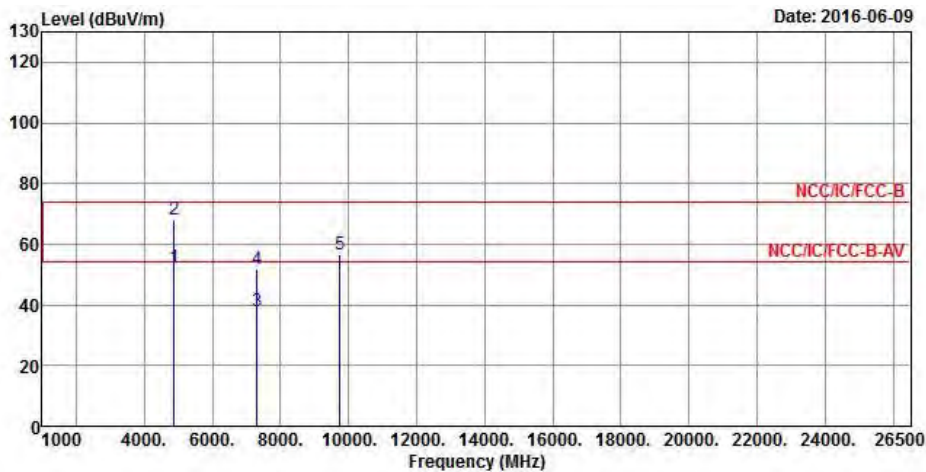


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4874.000	52.29	-1.71	54.00	48.11	31.22	5.49	32.53	Average
2	4874.000	67.92	-6.08	74.00	63.74	31.22	5.49	32.53	Peak
3	7311.000	37.94	-16.06	54.00	27.87	35.85	7.02	32.80	Average
4	7311.000	51.57	-22.43	74.00	41.50	35.85	7.02	32.80	Peak
5	9748.000	56.64			42.91	38.75	8.20	33.22	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (109.61 dBuV/m).
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11g	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	V

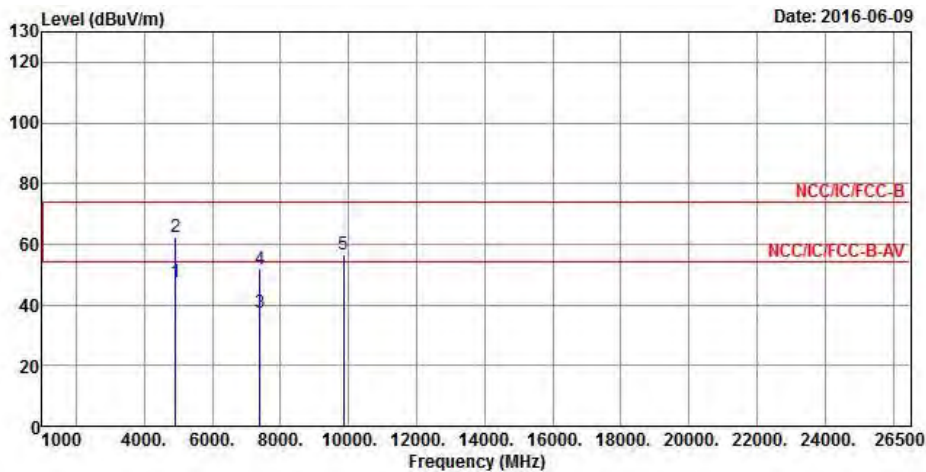

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	
			dB	dBuV/m	dBuV	dB	dB	
1	4924.000	47.26	-6.74	54.00	42.90	31.29	5.59	32.52 Average
2	4924.000	62.25	-11.75	74.00	57.89	31.29	5.59	32.52 Peak
3	7386.000	37.65	-16.35	54.00	27.43	36.03	7.01	32.82 Average
4	7386.000	51.60	-22.40	74.00	41.38	36.03	7.01	32.82 Peak
5	9848.000	56.62			42.88	38.77	8.18	33.21 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (106.91 dBuV/m).
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																		
Modulation Mode	11g	Test Freq. (MHz)	2462																																																															
N _{TX}	1	Polarization	H																																																															
<div style="display: flex; justify-content: space-between;"> <div> </div> <div style="text-align: right;">Date: 2016-06-09</div> </div>																																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.000</td> <td>46.43</td> <td>-7.57</td> <td>54.00</td> <td>42.07</td> <td>31.29</td> <td>5.59</td> <td>32.52 Average</td> </tr> <tr> <td>2</td> <td>4924.000</td> <td>61.42</td> <td>-12.58</td> <td>74.00</td> <td>57.06</td> <td>31.29</td> <td>5.59</td> <td>32.52 Peak</td> </tr> <tr> <td>3</td> <td>7386.000</td> <td>37.57</td> <td>-16.43</td> <td>54.00</td> <td>27.35</td> <td>36.03</td> <td>7.01</td> <td>32.82 Average</td> </tr> <tr> <td>4</td> <td>7386.000</td> <td>52.42</td> <td>-21.58</td> <td>74.00</td> <td>42.20</td> <td>36.03</td> <td>7.01</td> <td>32.82 Peak</td> </tr> <tr> <td>5</td> <td>9848.000</td> <td>56.51</td> <td></td> <td></td> <td>42.77</td> <td>38.77</td> <td>8.18</td> <td>33.21 Peak</td> </tr> </tbody> </table>					Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	4924.000	46.43	-7.57	54.00	42.07	31.29	5.59	32.52 Average	2	4924.000	61.42	-12.58	74.00	57.06	31.29	5.59	32.52 Peak	3	7386.000	37.57	-16.43	54.00	27.35	36.03	7.01	32.82 Average	4	7386.000	52.42	-21.58	74.00	42.20	36.03	7.01	32.82 Peak	5	9848.000	56.51			42.77	38.77	8.18	33.21 Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																										
1	4924.000	46.43	-7.57	54.00	42.07	31.29	5.59	32.52 Average																																																										
2	4924.000	61.42	-12.58	74.00	57.06	31.29	5.59	32.52 Peak																																																										
3	7386.000	37.57	-16.43	54.00	27.35	36.03	7.01	32.82 Average																																																										
4	7386.000	52.42	-21.58	74.00	42.20	36.03	7.01	32.82 Peak																																																										
5	9848.000	56.51			42.77	38.77	8.18	33.21 Peak																																																										
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level ((106.91 dBuV/m). Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>																																																																		




Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																									
Modulation Mode	HT20	Test Freq. (MHz)	2412																																																						
N _{TX}	1	Polarization	V																																																						
<div style="display: flex; justify-content: space-between;"> Level (dBuV/m) Date: 2016-06-09 </div> <div style="display: flex; justify-content: space-between;"> 1000 4000. 6000. 8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000. 24000. 26500 Frequency (MHz) </div>																																																									
<table border="1" style="width: 100%; border-collapse: collapse; margin-top: 20px;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.000</td> <td>45.63</td> <td>-8.37</td> <td>54.00</td> <td>41.62</td> <td>31.15</td> <td>5.40</td> <td>32.54 Average</td> </tr> <tr> <td>2</td> <td>4824.000</td> <td>60.84</td> <td>-13.16</td> <td>74.00</td> <td>56.83</td> <td>31.15</td> <td>5.40</td> <td>32.54 Peak</td> </tr> <tr> <td>3</td> <td>7236.000</td> <td>51.22</td> <td></td> <td></td> <td>41.30</td> <td>35.67</td> <td>7.03</td> <td>32.78 Peak</td> </tr> <tr> <td>4</td> <td>9648.000</td> <td>55.91</td> <td></td> <td></td> <td>42.13</td> <td>38.73</td> <td>8.27</td> <td>33.22 Peak</td> </tr> </tbody> </table>					Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	4824.000	45.63	-8.37	54.00	41.62	31.15	5.40	32.54 Average	2	4824.000	60.84	-13.16	74.00	56.83	31.15	5.40	32.54 Peak	3	7236.000	51.22			41.30	35.67	7.03	32.78 Peak	4	9648.000	55.91			42.13	38.73	8.27	33.22 Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark																																																	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																	
1	4824.000	45.63	-8.37	54.00	41.62	31.15	5.40	32.54 Average																																																	
2	4824.000	60.84	-13.16	74.00	56.83	31.15	5.40	32.54 Peak																																																	
3	7236.000	51.22			41.30	35.67	7.03	32.78 Peak																																																	
4	9648.000	55.91			42.13	38.73	8.27	33.22 Peak																																																	
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (106.50 dBuV/m). Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>																																																									




Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																									
Modulation Mode	HT20	Test Freq. (MHz)	2412																																																						
N _{TX}	1	Polarization	H																																																						
<div style="display: flex; justify-content: space-between;"> Level (dBuV/m) Date: 2016-06-09 </div> <p style="text-align: center;">Frequency (MHz)</p>																																																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.000</td> <td>46.36</td> <td>-7.64</td> <td>54.00</td> <td>42.35</td> <td>31.15</td> <td>5.40</td> <td>32.54 Average</td> </tr> <tr> <td>2</td> <td>4824.000</td> <td>62.43</td> <td>-11.57</td> <td>74.00</td> <td>58.42</td> <td>31.15</td> <td>5.40</td> <td>32.54 Peak</td> </tr> <tr> <td>3</td> <td>7236.000</td> <td>50.53</td> <td></td> <td></td> <td>40.61</td> <td>35.67</td> <td>7.03</td> <td>32.78 Peak</td> </tr> <tr> <td>4</td> <td>9648.000</td> <td>55.89</td> <td></td> <td></td> <td>42.11</td> <td>38.73</td> <td>8.27</td> <td>33.22 Peak</td> </tr> </tbody> </table>					Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	4824.000	46.36	-7.64	54.00	42.35	31.15	5.40	32.54 Average	2	4824.000	62.43	-11.57	74.00	58.42	31.15	5.40	32.54 Peak	3	7236.000	50.53			40.61	35.67	7.03	32.78 Peak	4	9648.000	55.89			42.11	38.73	8.27	33.22 Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark																																																	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																	
1	4824.000	46.36	-7.64	54.00	42.35	31.15	5.40	32.54 Average																																																	
2	4824.000	62.43	-11.57	74.00	58.42	31.15	5.40	32.54 Peak																																																	
3	7236.000	50.53			40.61	35.67	7.03	32.78 Peak																																																	
4	9648.000	55.89			42.11	38.73	8.27	33.22 Peak																																																	
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)</p> <p>Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</p> <p>Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (106.50 dBuV/m).</p> <p>Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>																																																									

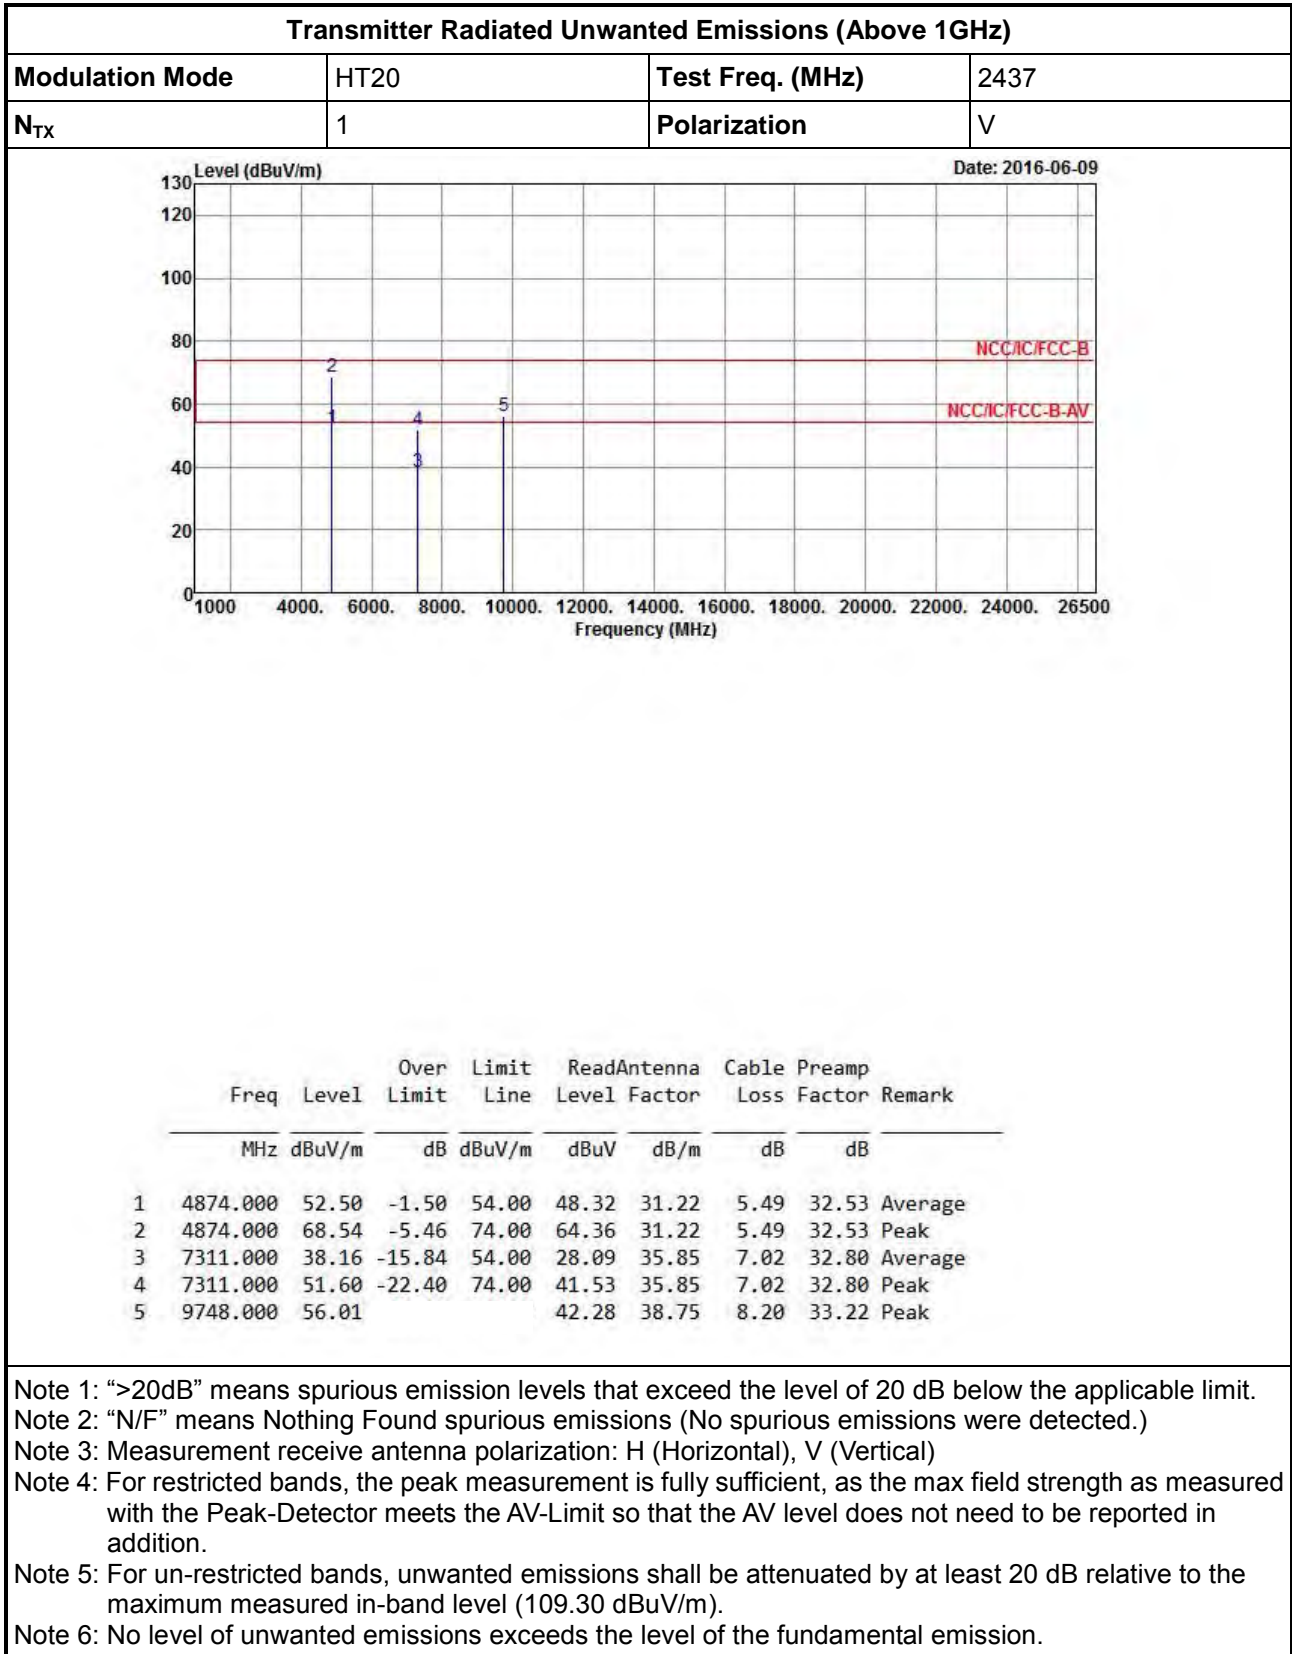

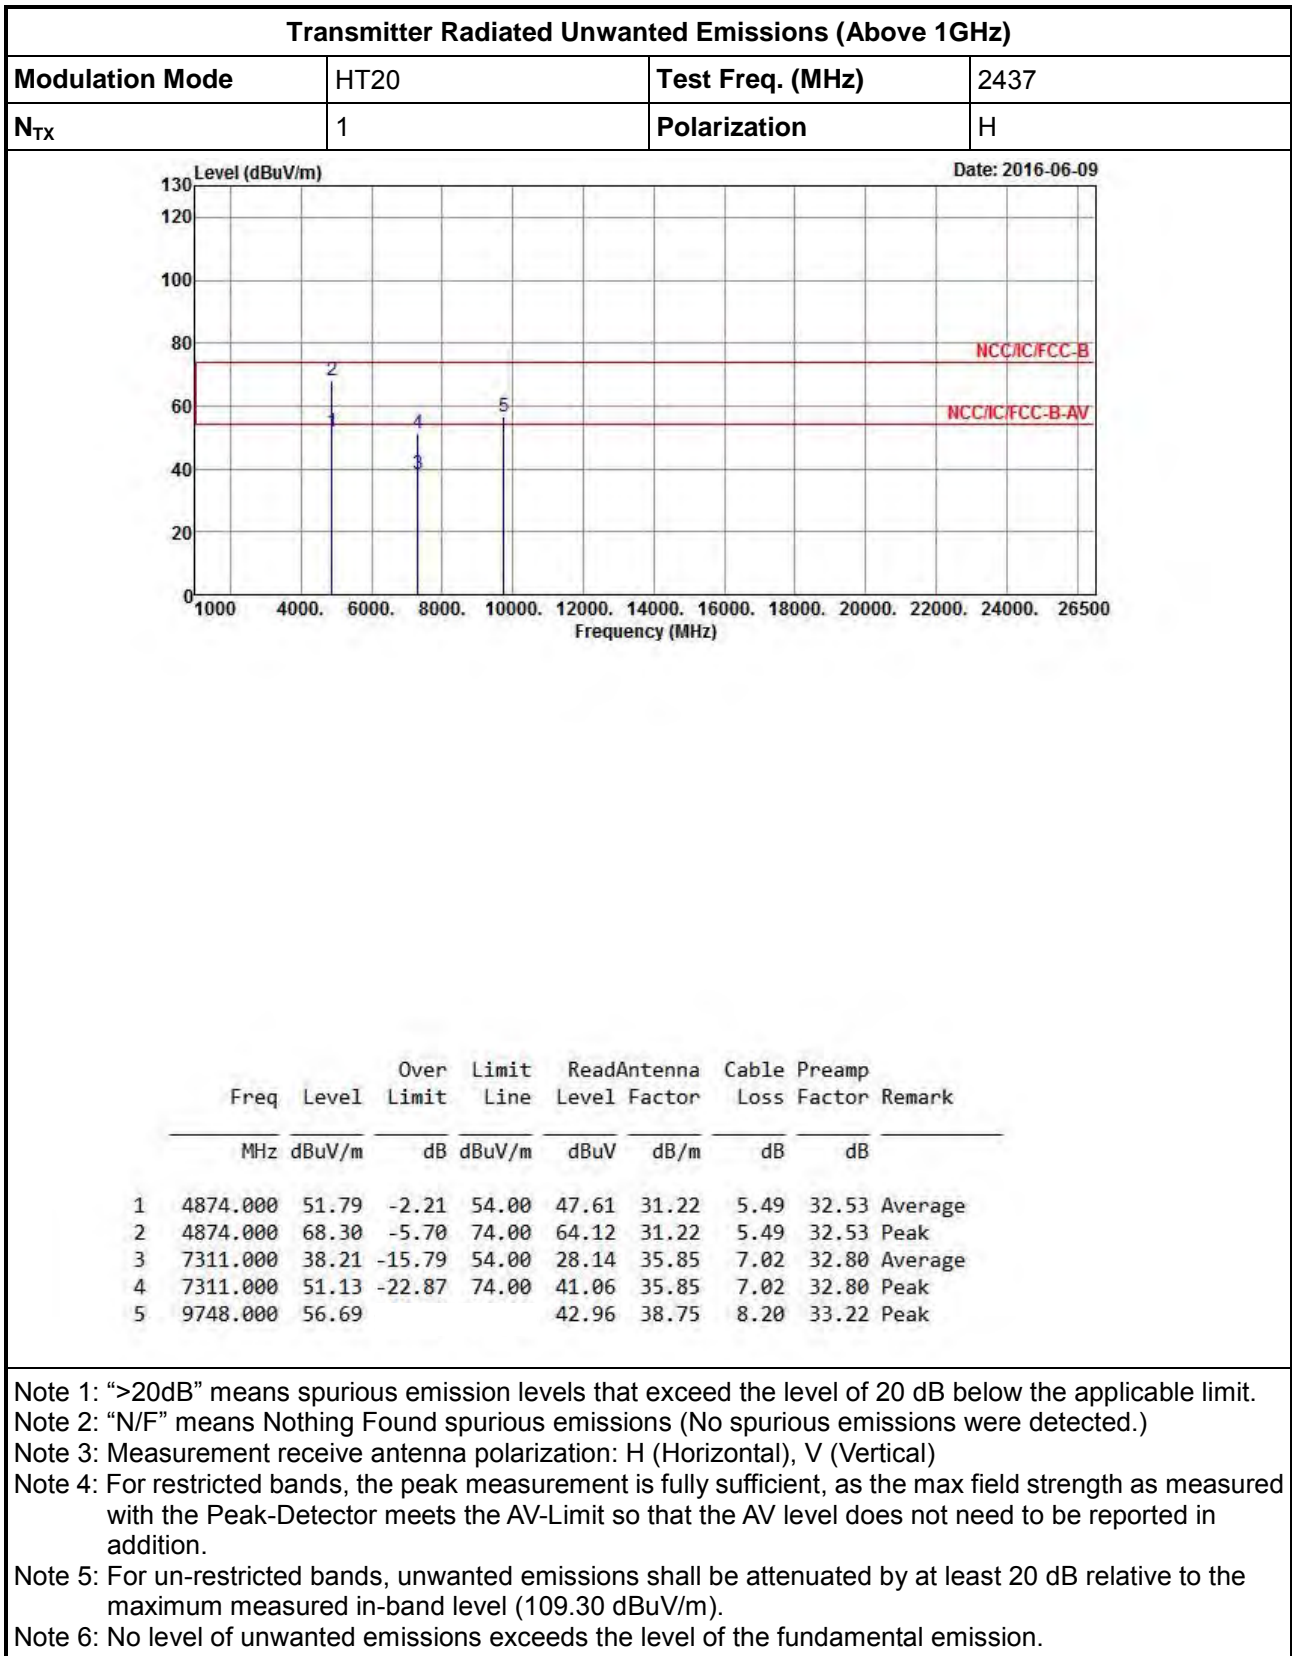



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT20	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	V

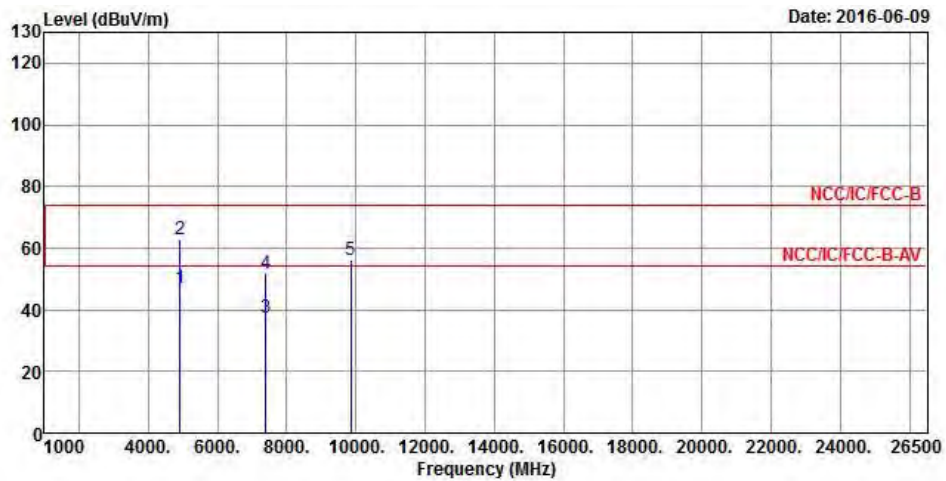


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4924.000	47.15	-6.85	54.00	42.79	31.29	5.59	32.52 Average
2	4924.000	62.88	-11.12	74.00	58.52	31.29	5.59	32.52 Peak
3	7386.000	37.57	-16.43	54.00	27.35	36.03	7.01	32.82 Average
4	7386.000	51.66	-22.34	74.00	41.44	36.03	7.01	32.82 Peak
5	9848.000	55.97			42.23	38.77	8.18	33.21 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (106.34 dBuV/m).
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT20	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	H

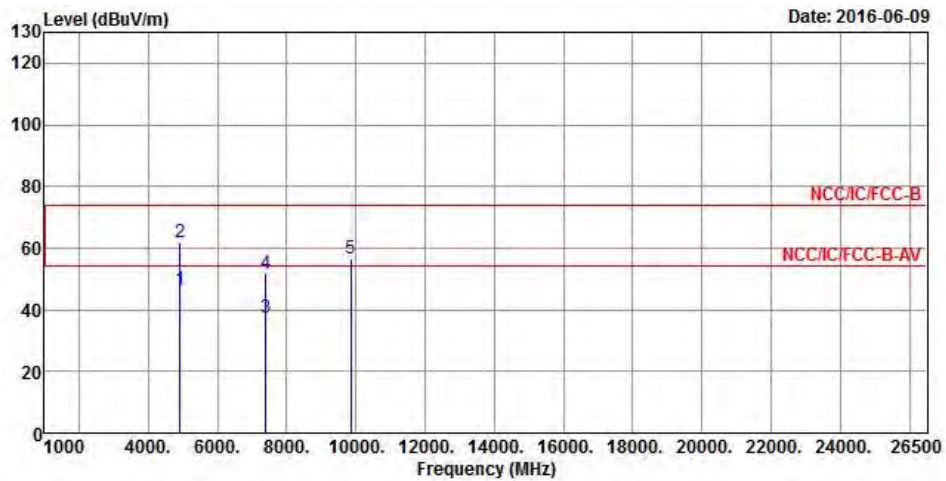

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4924.000	46.48	-7.52	54.00	42.12	31.29	5.59	32.52 Average
2	4924.000	62.00	-12.00	74.00	57.64	31.29	5.59	32.52 Peak
3	7386.000	37.51	-16.49	54.00	27.29	36.03	7.01	32.82 Average
4	7386.000	51.90	-22.10	74.00	41.68	36.03	7.01	32.82 Peak
5	9848.000	56.83			43.09	38.77	8.18	33.21 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (106.34 dBuV/m).
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																		
Modulation Mode	HT40	Test Freq. (MHz)	2422																																																															
N _{TX}	1	Polarization	V																																																															
<div style="display: flex; justify-content: space-between;"> <div> <p>Level (dBuV/m)</p> <p style="text-align: right;">Date: 2016-06-09</p> </div> </div>																																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4844.000</td> <td>38.64</td> <td>-15.36</td> <td>54.00</td> <td>34.56</td> <td>31.18</td> <td>5.44</td> <td>32.54 Average</td> </tr> <tr> <td>2</td> <td>4844.000</td> <td>52.77</td> <td>-21.23</td> <td>74.00</td> <td>48.69</td> <td>31.18</td> <td>5.44</td> <td>32.54 Peak</td> </tr> <tr> <td>3</td> <td>7266.000</td> <td>37.21</td> <td>-16.79</td> <td>54.00</td> <td>27.23</td> <td>35.74</td> <td>7.03</td> <td>32.79 Average</td> </tr> <tr> <td>4</td> <td>7266.000</td> <td>50.69</td> <td>-23.31</td> <td>74.00</td> <td>40.71</td> <td>35.74</td> <td>7.03</td> <td>32.79 Peak</td> </tr> <tr> <td>5</td> <td>9688.000</td> <td>56.52</td> <td></td> <td></td> <td>42.76</td> <td>38.74</td> <td>8.24</td> <td>33.22 Peak</td> </tr> </tbody> </table>					Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	4844.000	38.64	-15.36	54.00	34.56	31.18	5.44	32.54 Average	2	4844.000	52.77	-21.23	74.00	48.69	31.18	5.44	32.54 Peak	3	7266.000	37.21	-16.79	54.00	27.23	35.74	7.03	32.79 Average	4	7266.000	50.69	-23.31	74.00	40.71	35.74	7.03	32.79 Peak	5	9688.000	56.52			42.76	38.74	8.24	33.22 Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																										
1	4844.000	38.64	-15.36	54.00	34.56	31.18	5.44	32.54 Average																																																										
2	4844.000	52.77	-21.23	74.00	48.69	31.18	5.44	32.54 Peak																																																										
3	7266.000	37.21	-16.79	54.00	27.23	35.74	7.03	32.79 Average																																																										
4	7266.000	50.69	-23.31	74.00	40.71	35.74	7.03	32.79 Peak																																																										
5	9688.000	56.52			42.76	38.74	8.24	33.22 Peak																																																										
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (99.56dBuV/m). Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>																																																																		




Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																		
Modulation Mode	HT40	Test Freq. (MHz)	2422																																																															
N _{TX}	1	Polarization	H																																																															
<div style="display: flex; justify-content: space-between;"> <div> </div> <div style="text-align: right;">Date: 2016-06-09</div> </div>																																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4844.000</td> <td>39.14</td> <td>-14.86</td> <td>54.00</td> <td>35.06</td> <td>31.18</td> <td>5.44</td> <td>32.54 Average</td> </tr> <tr> <td>2</td> <td>4844.000</td> <td>53.93</td> <td>-20.07</td> <td>74.00</td> <td>49.85</td> <td>31.18</td> <td>5.44</td> <td>32.54 Peak</td> </tr> <tr> <td>3</td> <td>7266.000</td> <td>37.16</td> <td>-16.84</td> <td>54.00</td> <td>27.18</td> <td>35.74</td> <td>7.03</td> <td>32.79 Average</td> </tr> <tr> <td>4</td> <td>7266.000</td> <td>51.95</td> <td>-22.05</td> <td>74.00</td> <td>41.97</td> <td>35.74</td> <td>7.03</td> <td>32.79 Peak</td> </tr> <tr> <td>5</td> <td>9688.000</td> <td>56.69</td> <td></td> <td></td> <td>42.93</td> <td>38.74</td> <td>8.24</td> <td>33.22 Peak</td> </tr> </tbody> </table>					Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	4844.000	39.14	-14.86	54.00	35.06	31.18	5.44	32.54 Average	2	4844.000	53.93	-20.07	74.00	49.85	31.18	5.44	32.54 Peak	3	7266.000	37.16	-16.84	54.00	27.18	35.74	7.03	32.79 Average	4	7266.000	51.95	-22.05	74.00	41.97	35.74	7.03	32.79 Peak	5	9688.000	56.69			42.93	38.74	8.24	33.22 Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																										
1	4844.000	39.14	-14.86	54.00	35.06	31.18	5.44	32.54 Average																																																										
2	4844.000	53.93	-20.07	74.00	49.85	31.18	5.44	32.54 Peak																																																										
3	7266.000	37.16	-16.84	54.00	27.18	35.74	7.03	32.79 Average																																																										
4	7266.000	51.95	-22.05	74.00	41.97	35.74	7.03	32.79 Peak																																																										
5	9688.000	56.69			42.93	38.74	8.24	33.22 Peak																																																										
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (99.56 dBuV/m). Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>																																																																		

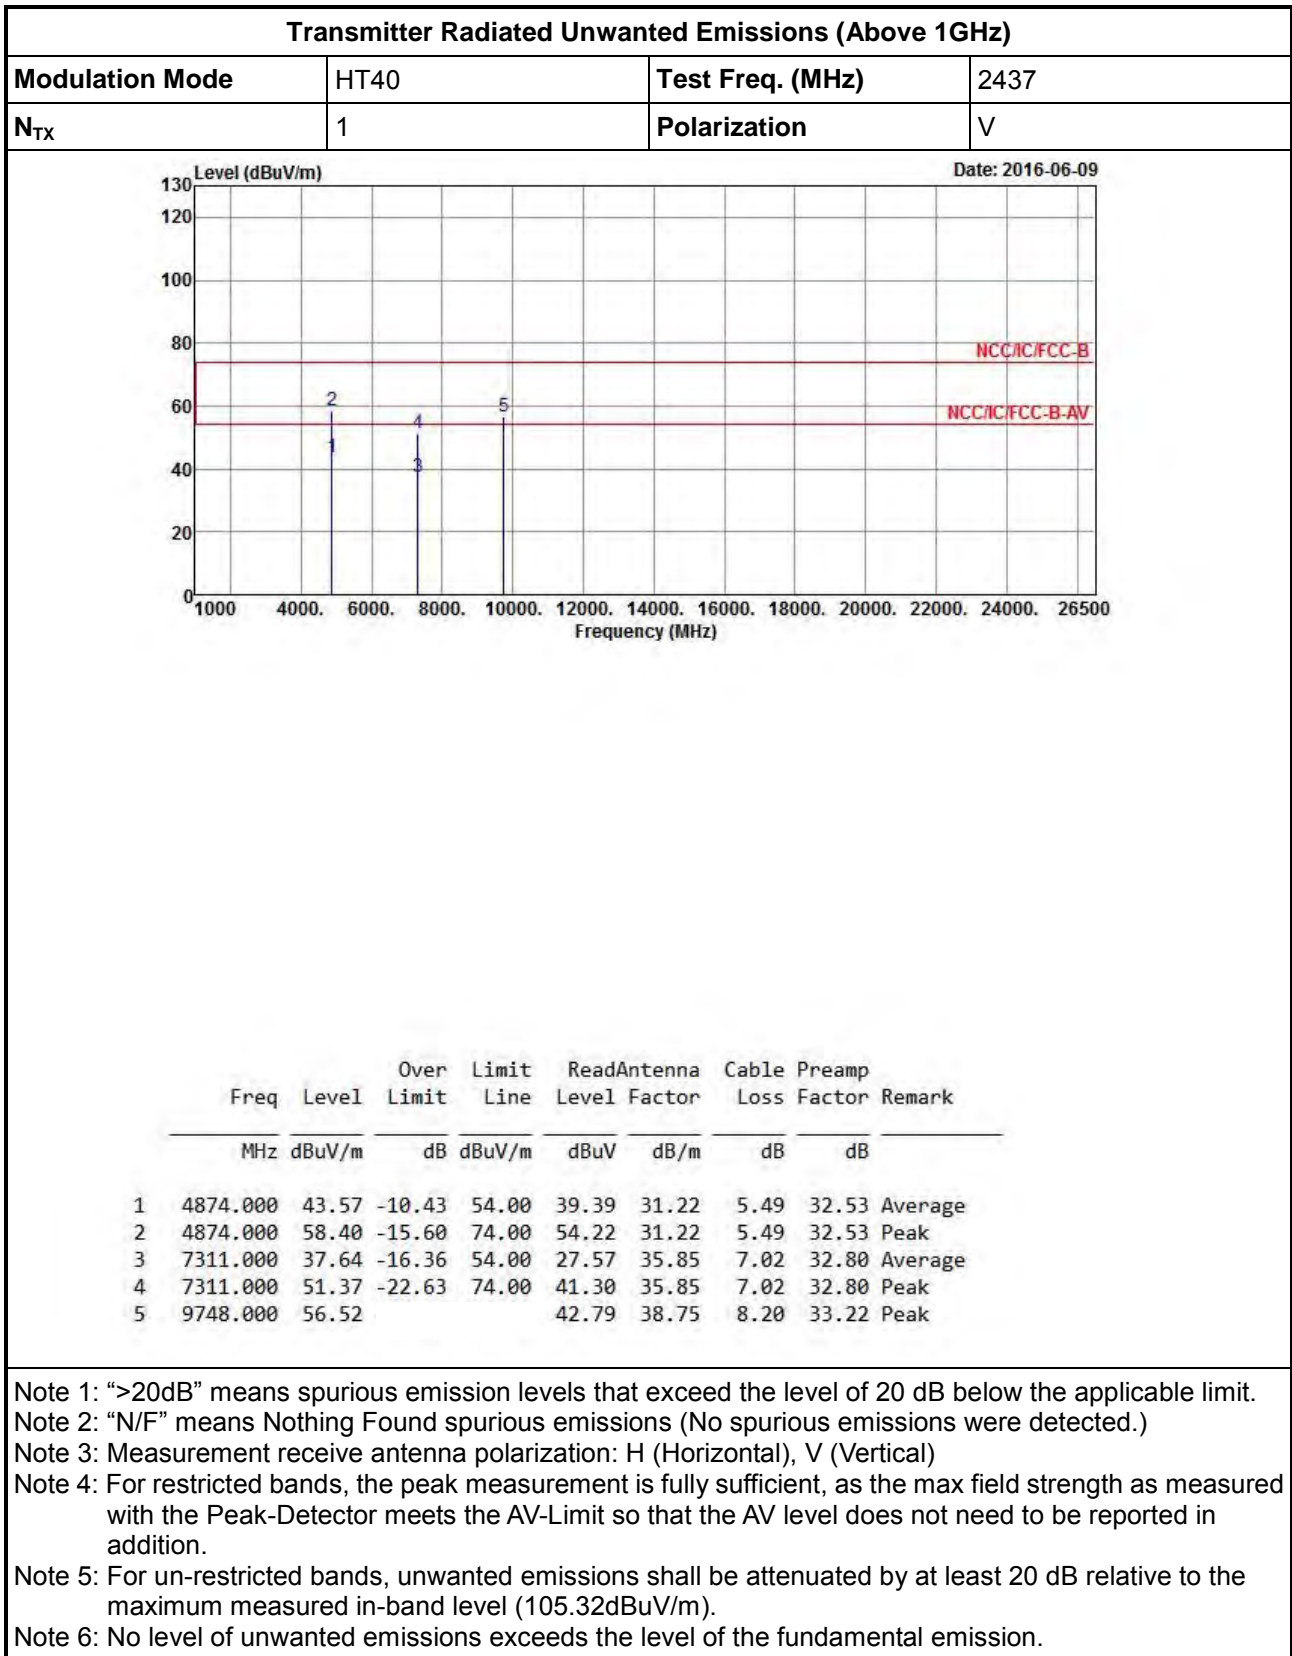

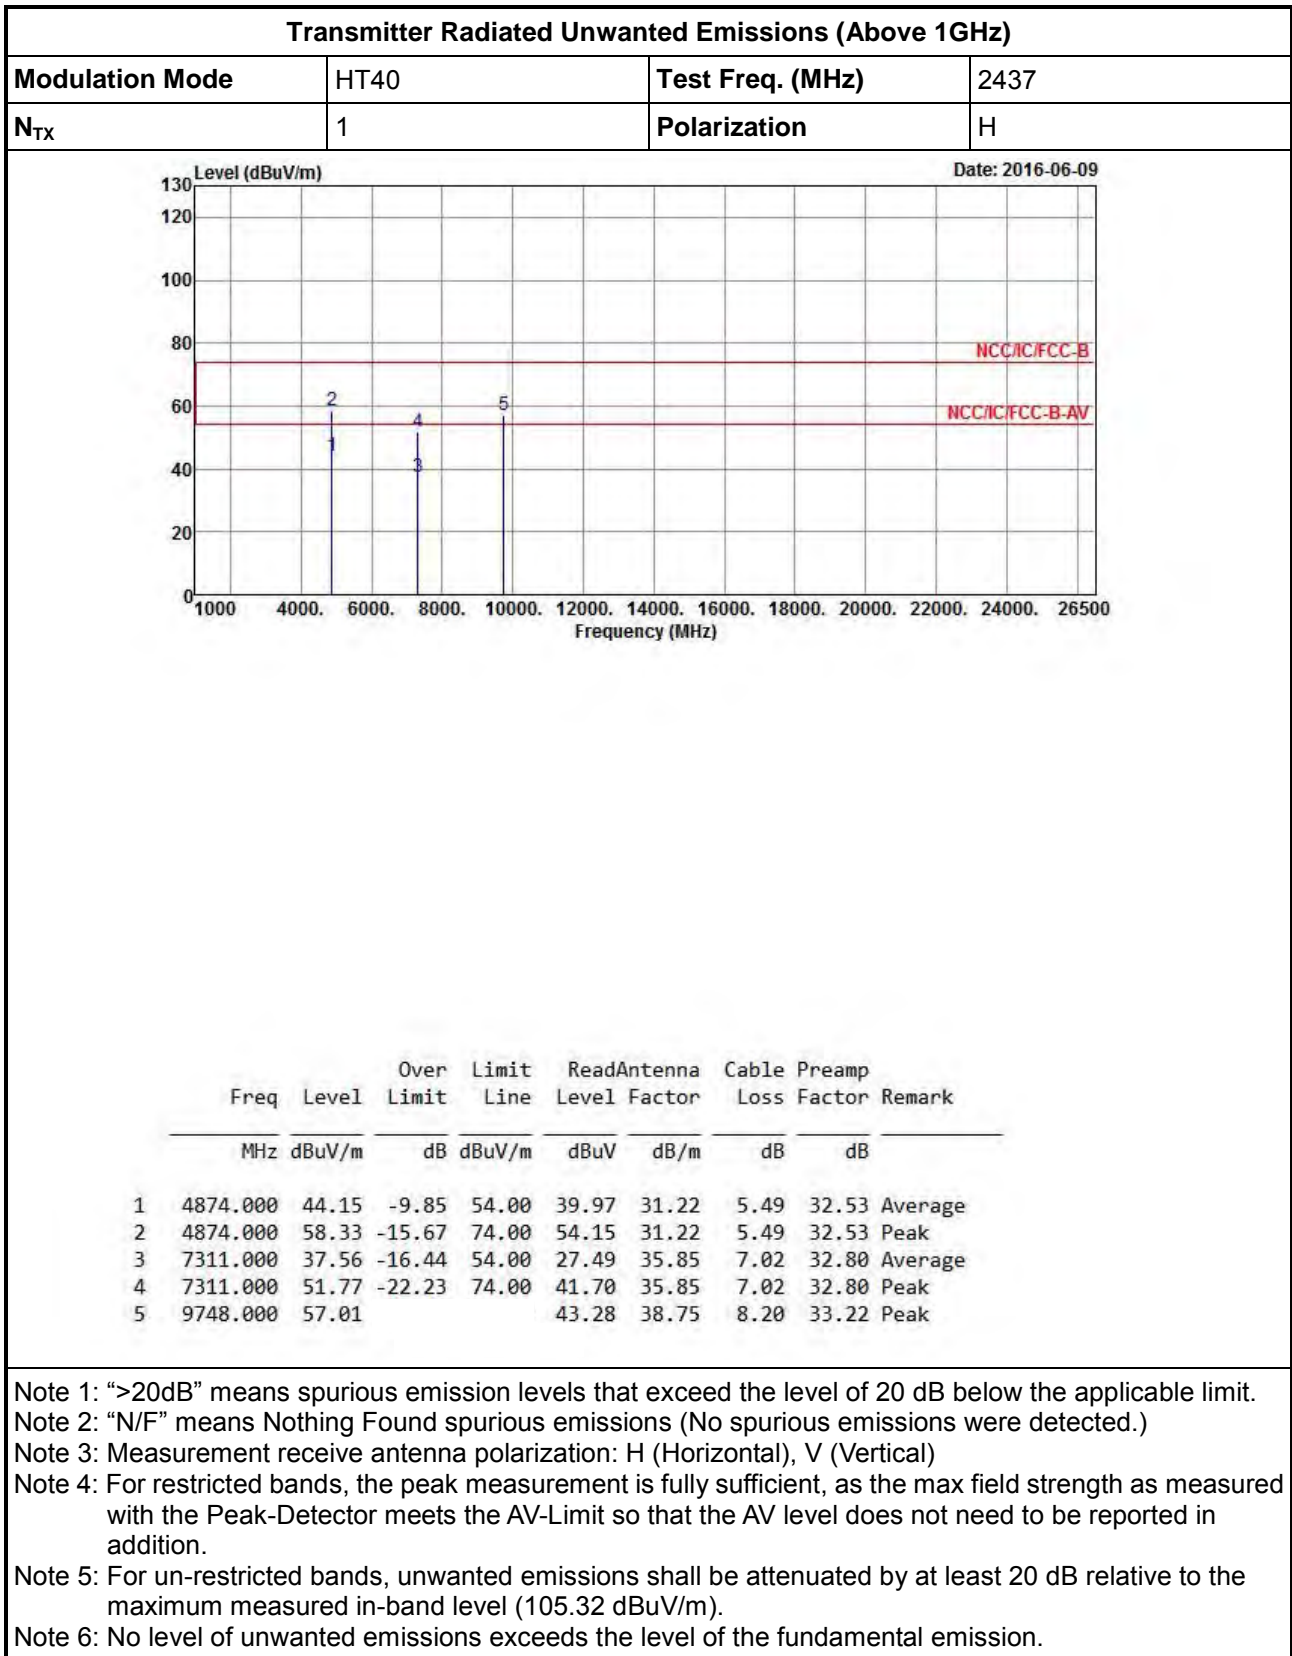



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT40	Test Freq. (MHz)	2452
N _{TX}	1	Polarization	V

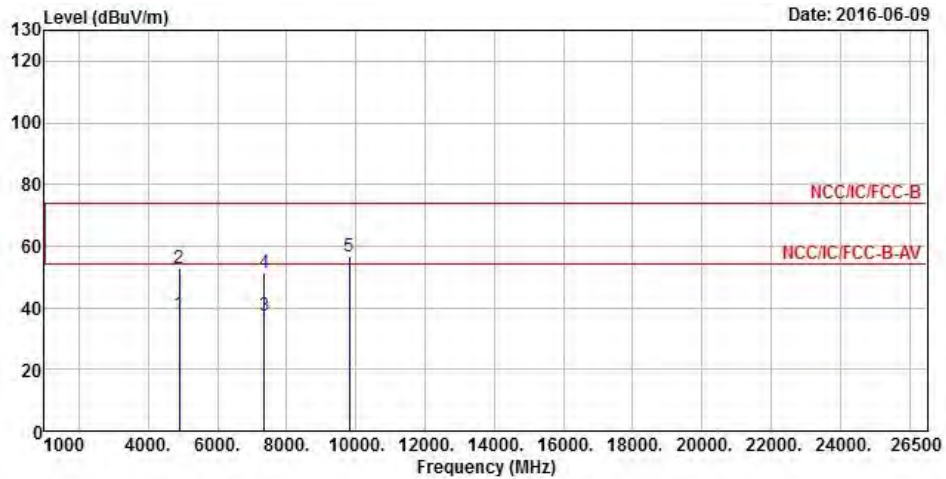


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4904.000	38.03	-15.97	54.00	33.74	31.27	5.55	32.53 Average
2	4904.000	52.90	-21.10	74.00	48.61	31.27	5.55	32.53 Peak
3	7356.000	37.46	-16.54	54.00	27.30	35.95	7.02	32.81 Average
4	7356.000	51.44	-22.56	74.00	41.28	35.95	7.02	32.81 Peak
5	9808.000	56.55			42.83	38.76	8.17	33.21 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (102.61 dBuV/m).
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT40	Test Freq. (MHz)	2452
N _{TX}	1	Polarization	H

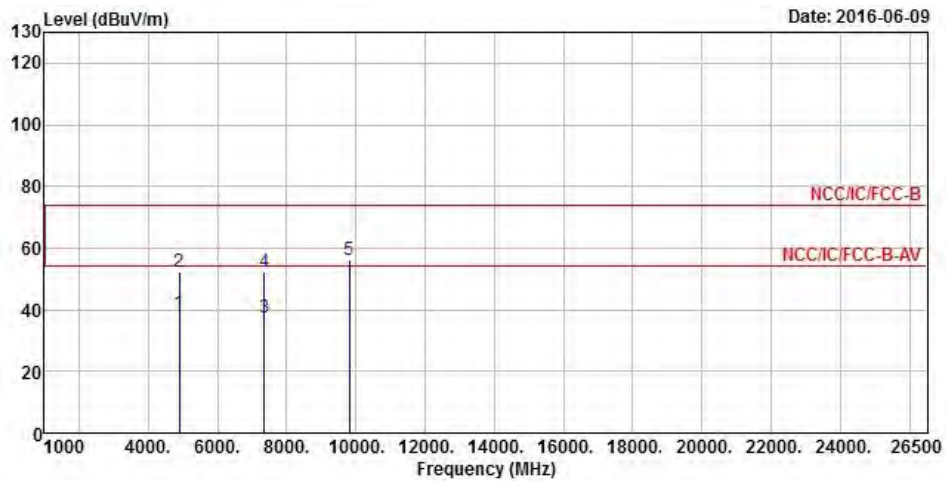

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4904.000	38.66	-15.34	54.00	34.37	31.27	5.55	32.53 Average
2	4904.000	52.24	-21.76	74.00	47.95	31.27	5.55	32.53 Peak
3	7356.000	37.51	-16.49	54.00	27.35	35.95	7.02	32.81 Average
4	7356.000	52.25	-21.75	74.00	42.09	35.95	7.02	32.81 Peak
5	9808.000	56.33			42.61	38.76	8.17	33.21 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (102.61 dBuV/m).
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.