



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

Signify (China) Investment Co., Ltd.

Building no.9, Lane 888, Tianlin Road, Minhang District Shanghai, 200233 China

FCC ID: 2AGBW9290030096X

Report Type: Original Report	Product Type: LED lamp
Project Engineer: <u>Miller Xie</u> <i>Miller Xie</i>	
Report Number: <u>RDG210420053-00C</u>	
Report Date: <u>2021-07-22</u>	
Reviewed By: <u>Oscar Ye</u> <i>Oscar Ye</i> <u>EMC Manager</u>	
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §1.1310 & §2.1091 – MAXIMUM PERMISSIBLE EXPOSURE (MPE)	12
CALCULATED FORMULARY:.....	12
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	15
CORRECTED FACTOR & OVER LIMIT CALCULATION.....	15
TEST RESULTS SUMMARY	15
TEST DATA	15
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	34
APPLICABLE STANDARD	34
EUT SETUP	34
EMI TEST RECEIVER SETUP.....	35
TEST PROCEDURE	35
CORRECTED AMPLITUDE & MARGIN CALCULATION	35
TEST RESULTS SUMMARY	35
TEST DATA	35
ENVIRONMENTAL CONDITIONS.....	35
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	84
APPLICABLE STANDARD	84
TEST PROCEDURE	84
TEST DATA	85
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	87
APPLICABLE STANDARD	87
TEST PROCEDURE	87
TEST DATA	88
ENVIRONMENTAL CONDITIONS.....	88
FCC §15.247(d) – BAND EDGE.....	90
APPLICABLE STANDARD	90

TEST PROCEDURE	90
TEST DATA	90
FCC §15.247(e) - POWER SPECTRAL DENSITY	92
APPLICABLE STANDARD	92
TEST PROCEDURE	92
TEST DATA	92

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Signify (China) Investment Co., Ltd.
Tested Model:	9290030096
Series Model	9290030090, 9290030091, 9290030092, 9290030093, 9290030094, 9290030095, 9290030097, 9290030098, 9290031182, 9290031183
Model Difference	See Declaration letter
Product Type:	LED lamp
Power Supply:	AC 120V
RF Function:	BLE (1Mbps)
Operating Band/Frequency:	2402-2480MHz
Channel Number:	40
Channel Separation:	2 MHz
Modulation Type	GFSK
Antenna Type:	Monopole antenna
*Maximum Antenna Gain:	-4.0 dBi
Maximum Output Power:	4.65 dBm

Note: The maximum antenna gain is provided by the applicant.

**All measurement and test data in this report was gathered from production sample serial number:
RDG210420053-1(model: 9290030096), RDG210420053-2(model: 9290030090),
RDG210420053-3(model: 9290030091), RDG210420053-4(model: 9290030092),
RDG210420053-5(model: 9290030093), RDG210420053-6(model: 9290030094),
RDG210420053-7(model: 9290030095), RDG210420053-8(model: 9290030097)
RDG210420053-9(model: 9290030098) (Assigned by BACL, Kunshan. The EUT was received on 2021-04-20.)*

Objective

This report is prepared on behalf of *Signify (China) Investment Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communications Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item	Uncertainty	
AC Power Lines Conducted Emissions	3.19dB	
RF conducted test with spectrum	0.9dB	
RF Output Power with Power meter	0.5dB	
Radiated emissions	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth	0.5kHz	
Temperature	1.0°C	
Humidity	6%	

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel List for BLE mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404
...
...
18	2438	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

Equipment Modifications

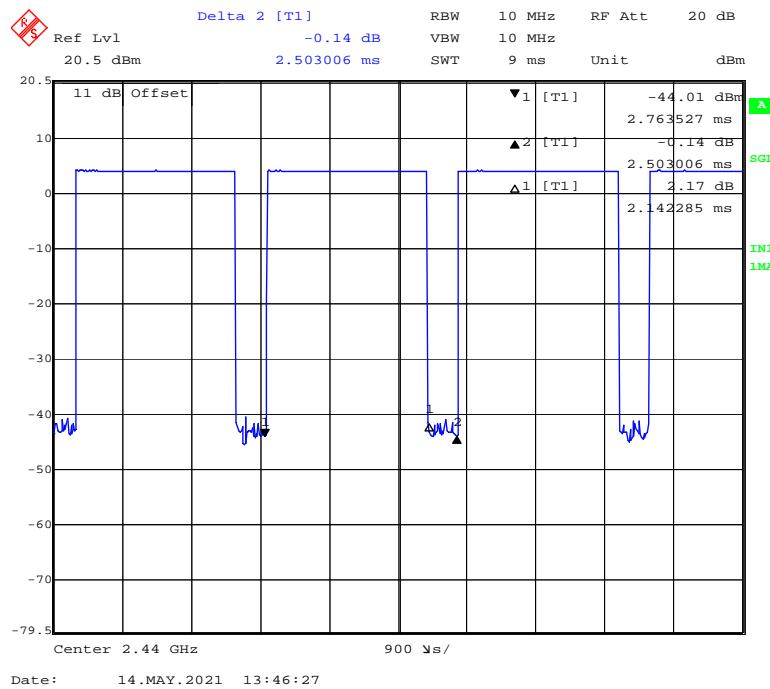
No modification was made to the EUT tested.

EUT Exercise Software

RF test software: EspRFTestTool

*Power Level Setting: 5

Note: The power level setting was declared by the applicant.

Duty Cycle:**BLE (1Mbps): Middle Channel**

Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
BLE (1Mbps)	85.58	2.142	0.47	0.68

Note: "x" means the Duty Cycle.

Support Equipment List and Details

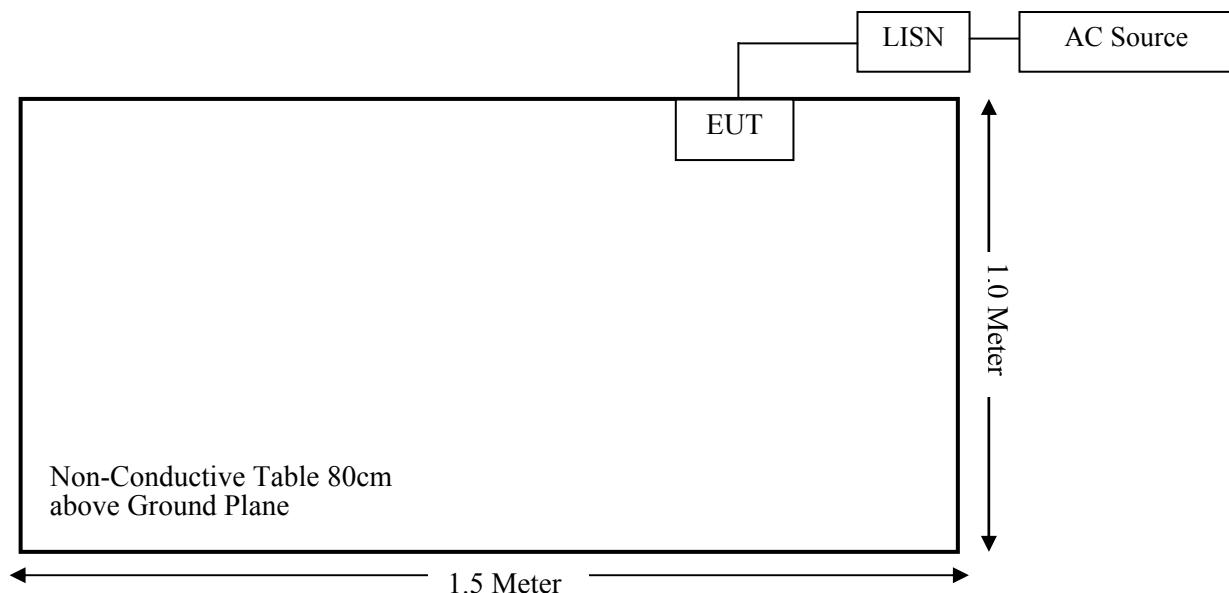
Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

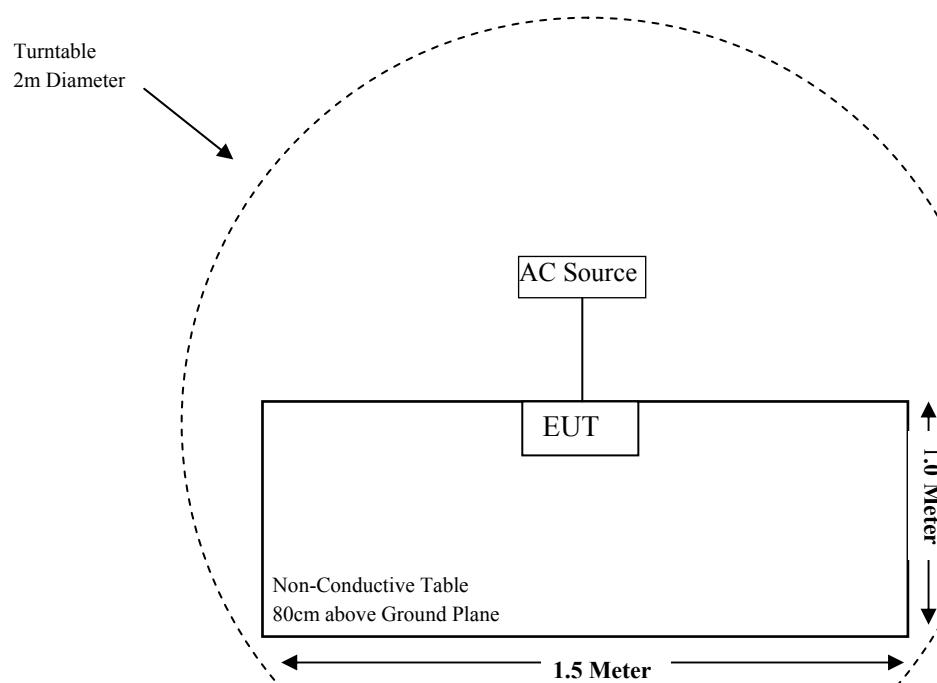
Cable Description	Length (m)	From	To
Power Cable	1.0	EUT	LISN/AC Source

Block Diagram of Test Setup

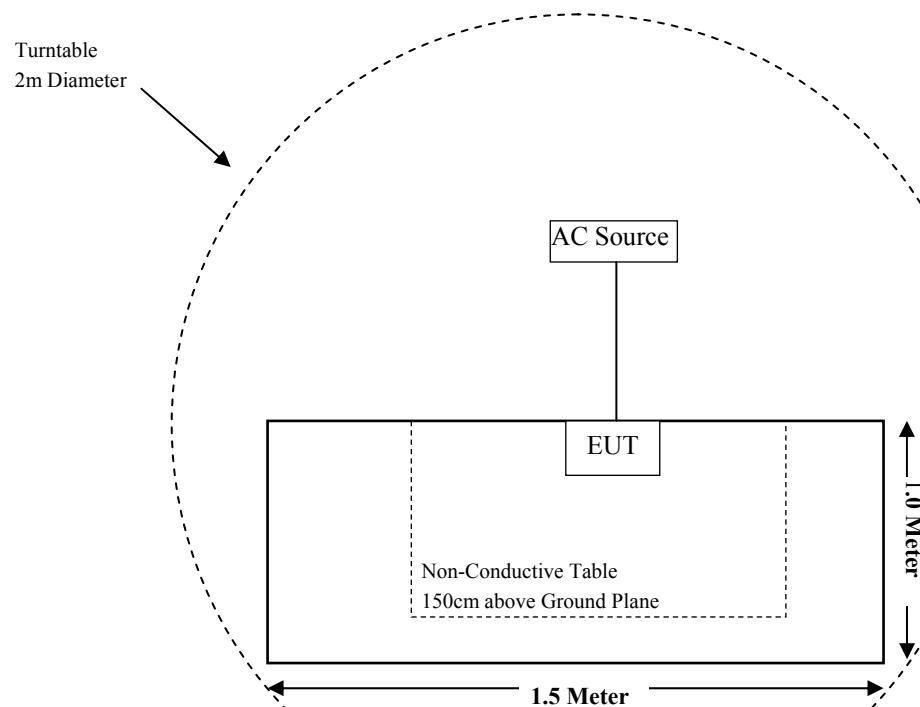
For Conducted Emissions:



For Radiated Emissions (Below 1GHz):



For Radiated Emissions (Above 1GHz):



SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2020-11-27	2021-11-26
Sunol Sciences	Hybrid Antenna	JB3	A090314-1	2020-08-05	2023-08-04
Sonoma Instrument	Pre-amplifier	310N	171205	2020-08-14	2021-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2020-08-15	2021-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Receiver	ESU40	100207	2021-03-16	2022-03-15
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2020-07-15	2023-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2020-01-17	2023-01-16
A.H.Systems, inc	Amplifier	PAM-0118P	512	2020-08-14	2021-08-13
SELECTOR	Amplifier	EM18G40G	060726	2020-08-22	2021-08-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2020-08-05	2021-08-04
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2020-08-15	2021-08-14
RF Conducted Test					
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2020-12-14	2021-12-13
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
Signify	RF Cable	Signify C01	N/A	Each Time	N/A
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2020-08-05	2021-08-04
Rohde & Schwarz	LISN	ENV216	101115	2020-11-27	2021-11-26
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3-Z2	0357.8810.54	2020-08-10	2021-08-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2020-08-15	2021-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 – MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

S = PG/4πR² = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Output Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11b	2412~2462	-4.0	0.4	24.0	251.19	20	0.0199	1.0
802.11g		-4.0	0.4	22.5	177.83	20	0.0141	1.0
802.11n-HT20		-4.0	0.4	22.0	158.49	20	0.0126	1.0
802.11n-HT40	2422~2452	-4.0	0.4	22.5	177.83	20	0.0141	1.0
BLE(1Mbps)	2402~2480	-4.0	0.4	5.0	3.16	20	0.0003	1.0

Note: 1. The Tune-up output power was declared by the Manufacturer.

2. Wi-Fi and BLE can't transmit simultaneously.

Result: The device meets MPE at distance 20cm.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a Monopole antenna for BLE and the antenna gain is -4.0 dBi, the antenna permanently attached to the EUT, fulfill the requirement of this section. Please refer to the EUT photos.

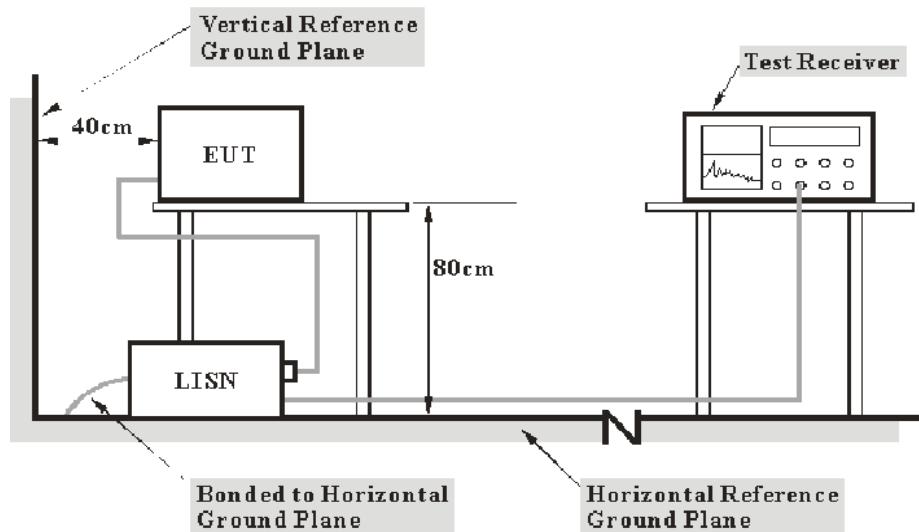
Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup



- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the EUT was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Over Limit Calculation

The Corrected Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of 7 dB means the emission is 7 dB above the limit. The equation for over limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

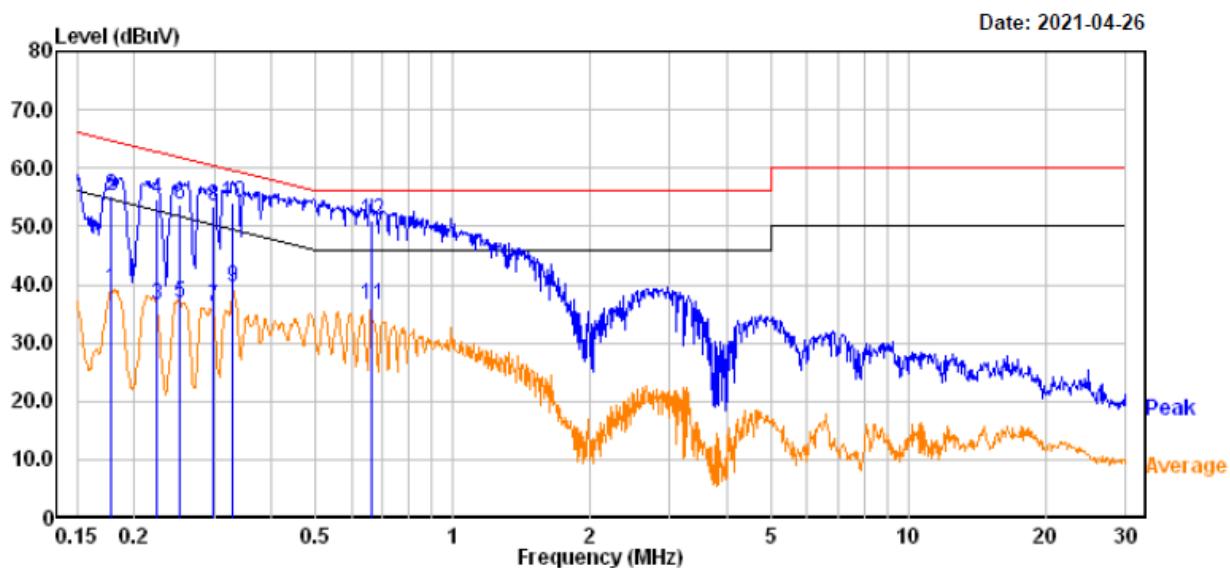
Test Data

Environmental Conditions

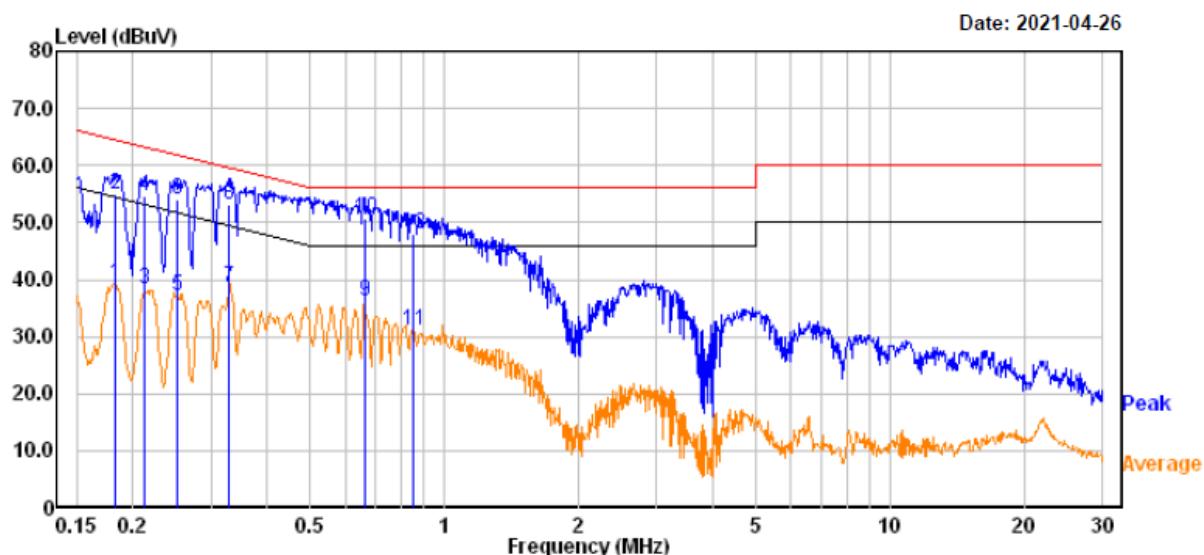
Temperature:	23.2~24.2 °C
Relative Humidity:	50~51 %
ATM Pressure:	101.3~101.5 kPa

The testing was performed by Miller Xie from 2021-04-26 to 2021-07-19.

EUT operation mode: Transmitting in middle channel (worst case)

BLE (1Mbps)*Tested Model:9290030096***AC 120V/60 Hz, Line**

Freq	Read			Limit	Over	Remark
	MHz	Level	Factor			
1	0.178	19.30	19.83	39.13	54.59	-15.46 Average
2	0.178	35.50	19.83	55.33	64.59	-9.26 QP
3	0.225	16.70	19.82	36.52	52.65	-16.13 Average
4	0.225	34.80	19.82	54.62	62.65	-8.03 QP
5	0.252	17.00	19.82	36.82	51.69	-14.87 Average
6	0.252	33.80	19.82	53.62	61.69	-8.07 QP
7	0.297	16.50	19.83	36.33	50.33	-14.00 Average
8	0.297	33.70	19.83	53.53	60.33	-6.80 QP
9	0.330	19.59	19.82	39.41	49.46	-10.05 Average
10	0.330	34.29	19.82	54.11	59.46	-5.35 QP
11	0.662	16.70	19.75	36.45	46.00	-9.55 Average
12	0.662	31.40	19.75	51.15	56.00	-4.85 QP

AC 120V/60 Hz, Neutral

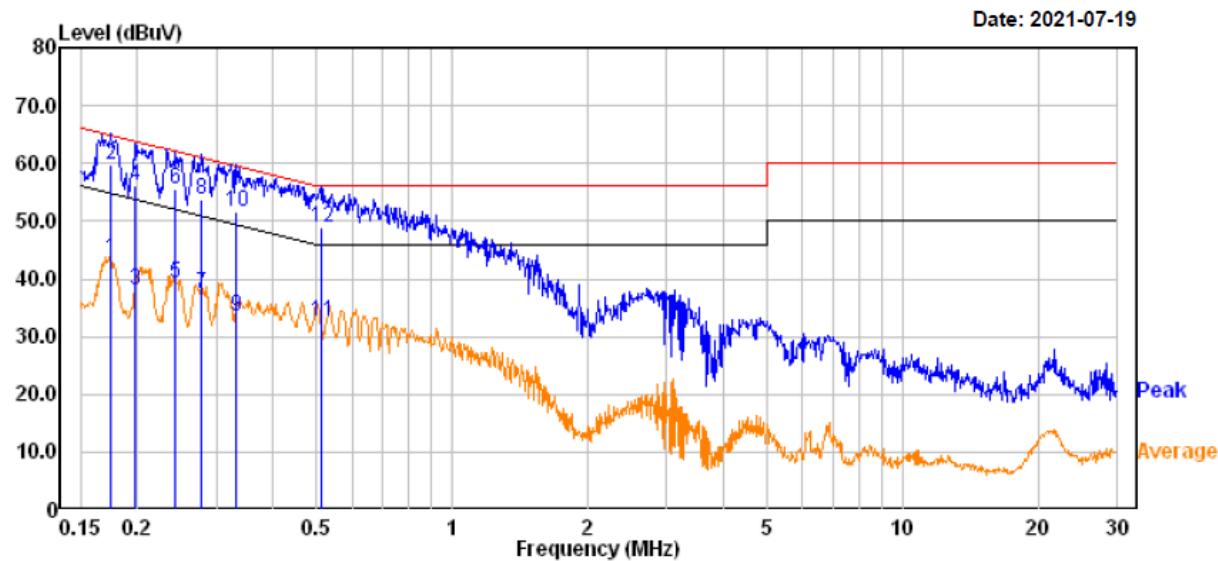
	Freq	Read		Limit	Over	Remark	
		MHz	dBuV	Factor	Level	Line	Limit
1	0.182	19.50	19.83	39.33	54.39	-15.06	Average
2	0.182	35.10	19.83	54.93	64.39	-9.46	QP
3	0.213	18.40	19.82	38.22	53.10	-14.88	Average
4	0.213	34.90	19.82	54.72	63.10	-8.38	QP
5	0.251	17.40	19.82	37.22	51.74	-14.52	Average
6	0.251	34.20	19.82	54.02	61.74	-7.72	QP
7	0.328	18.69	19.82	38.51	49.50	-10.99	Average
8	0.328	33.29	19.82	53.11	59.50	-6.39	QP
9	0.662	16.60	19.75	36.35	46.00	-9.65	Average
10	0.662	31.10	19.75	50.85	56.00	-5.15	QP
11	0.854	11.41	19.71	31.12	46.00	-14.88	Average
12	0.854	28.21	19.71	47.92	56.00	-8.08	QP

Note:

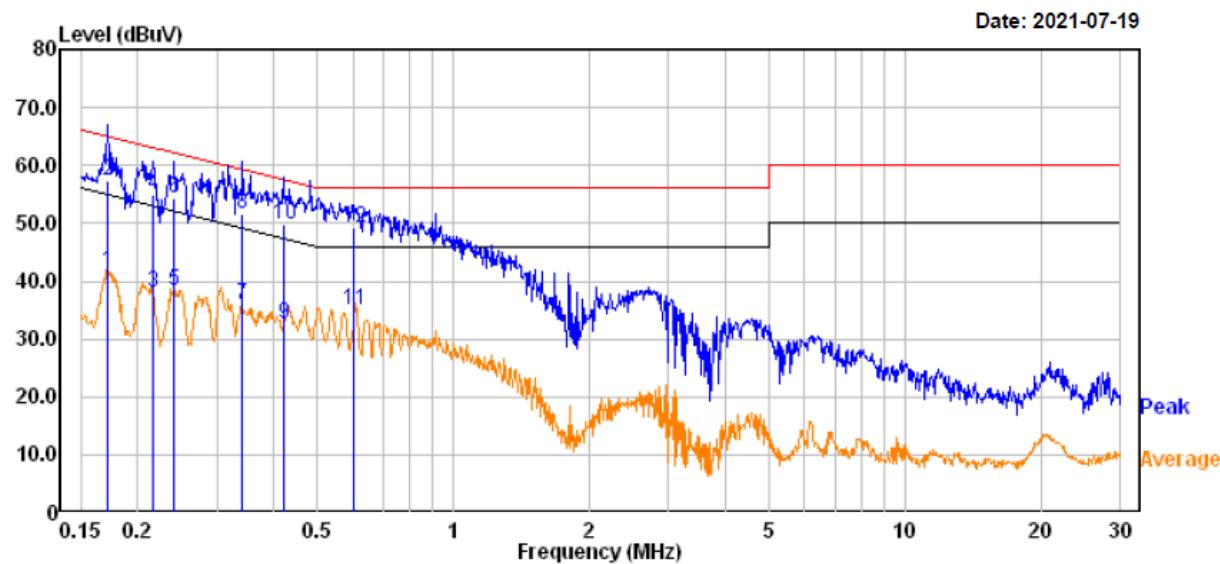
- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dB μ V) + Factor (dB) - Limit (dB μ V)

Series Model: 9290030090

AC 120V/60 Hz, Line



Freq	Read		Limit	Over	Over	Remark	
	Freq	Level	Factor	Level	Line	Limit	
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.175	23.50	19.83	43.33	54.72	-11.39	Average
2	0.175	39.90	19.83	59.73	64.72	-4.99	QP
3	0.198	18.10	19.82	37.92	53.68	-15.76	Average
4	0.198	36.20	19.82	56.02	63.68	-7.66	QP
5	0.243	19.30	19.82	39.12	51.98	-12.86	Average
6	0.243	35.70	19.82	55.52	61.98	-6.46	QP
7	0.278	17.60	19.82	37.42	50.87	-13.45	Average
8	0.278	34.00	19.82	53.82	60.87	-7.05	QP
9	0.333	13.69	19.82	33.51	49.38	-15.87	Average
10	0.333	31.79	19.82	51.61	59.38	-7.77	QP
11	0.511	12.90	19.76	32.66	46.00	-13.34	Average
12	0.511	29.10	19.76	48.86	56.00	-7.14	QP

AC 120V/60 Hz, Neutral

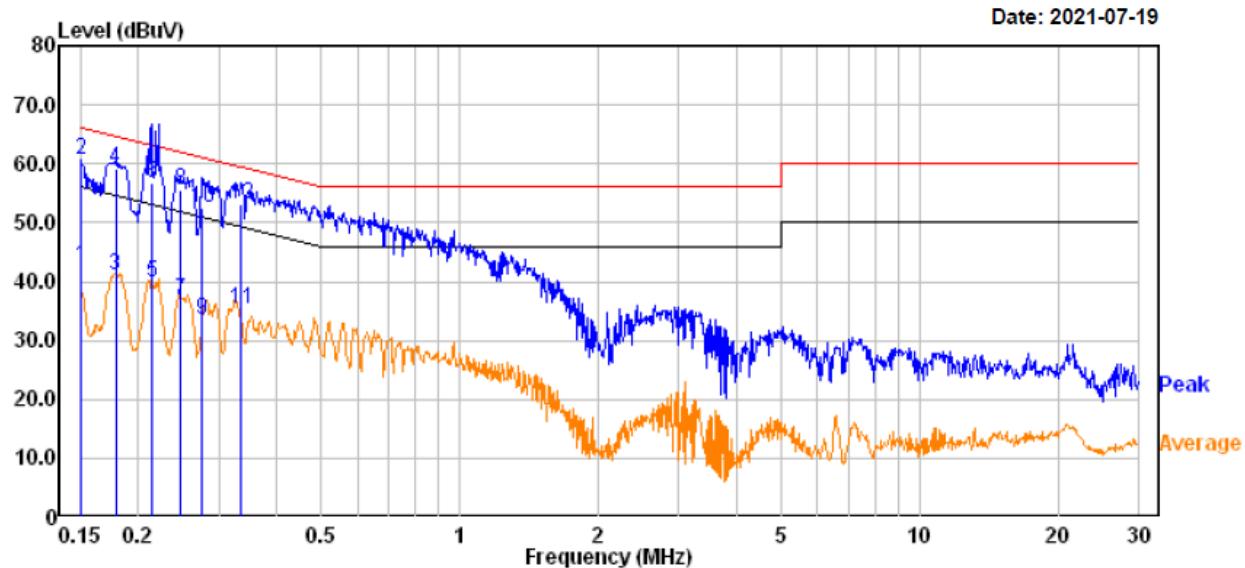
Freq	Read		Limit Line	Over Limit	Remark
	MHz	Level			
1	0.172	21.70	19.83	41.53	54.88 -13.35 Average
2	0.172	37.50	19.83	57.33	64.88 -7.55 QP
3	0.216	18.30	19.82	38.12	52.98 -14.86 Average
4	0.216	35.20	19.82	55.02	62.98 -7.96 QP
5	0.241	18.60	19.82	38.42	52.07 -13.65 Average
6	0.241	34.60	19.82	54.42	62.07 -7.65 QP
7	0.341	16.10	19.81	35.91	49.17 -13.26 Average
8	0.341	31.90	19.81	51.71	59.17 -7.46 QP
9	0.421	12.90	19.74	32.64	47.43 -14.79 Average
10	0.421	30.10	19.74	49.84	57.43 -7.59 QP
11	0.603	15.20	19.75	34.95	46.00 -11.05 Average
12	0.603	29.60	19.75	49.35	56.00 -6.65 QP

Note:

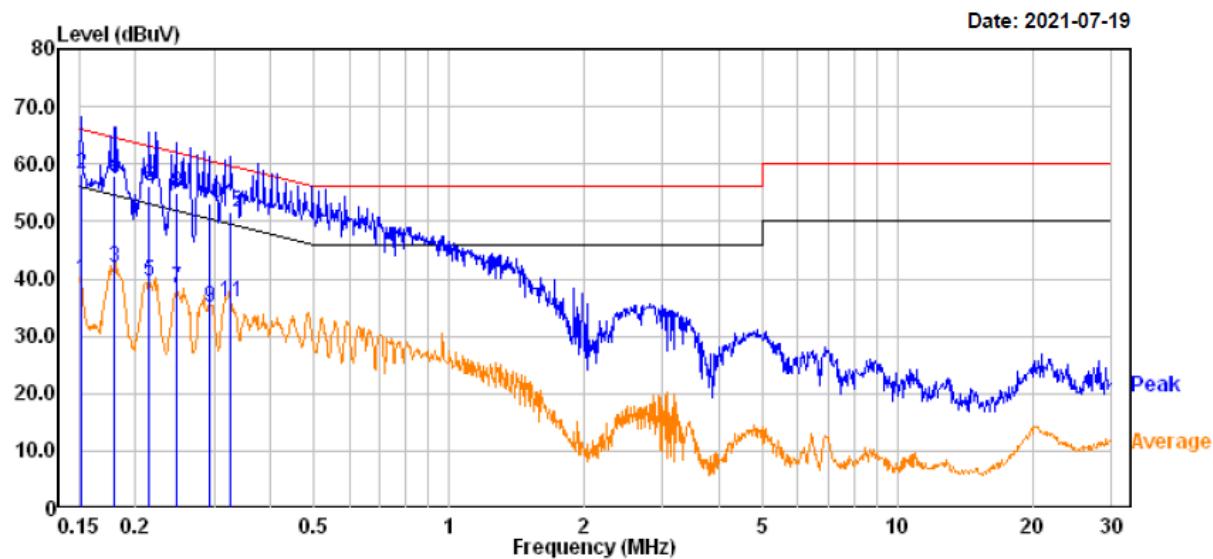
- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dB μ V) + Factor (dB) - Limit (dB μ V)

Series Model: 9290030091

AC 120V/60 Hz, Line



Freq	Read		Limit	Over	Remark	
	MHz	Level				
1	0.150	22.60	19.82	42.42	56.00	-13.58 Average
2	0.150	40.80	19.82	60.62	66.00	-5.38 QP
3	0.179	21.10	19.83	40.93	54.55	-13.62 Average
4	0.179	39.40	19.83	59.23	64.55	-5.32 QP
5	0.214	19.90	19.82	39.72	53.06	-13.34 Average
6	0.214	37.00	19.82	56.82	63.06	-6.24 QP
7	0.248	17.00	19.82	36.82	51.82	-15.00 Average
8	0.248	35.80	19.82	55.62	61.82	-6.20 QP
9	0.276	13.60	19.82	33.42	50.95	-17.53 Average
10	0.276	32.80	19.82	52.62	60.95	-8.33 QP
11	0.335	15.39	19.82	35.21	49.33	-14.12 Average
12	0.335	33.19	19.82	53.01	59.33	-6.32 QP

AC 120V/60 Hz, Neutral

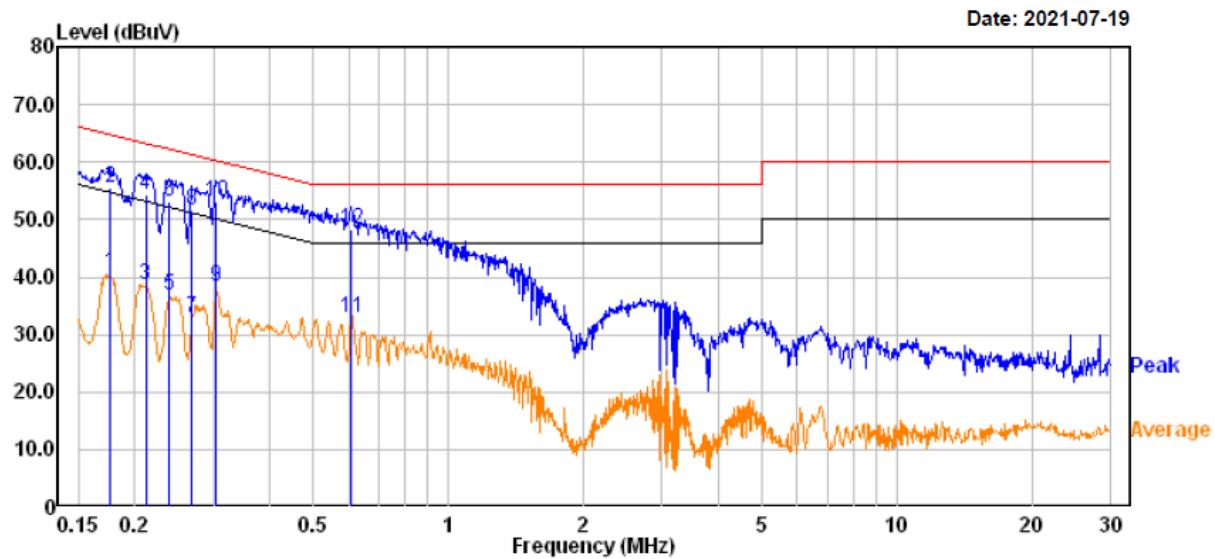
Freq	Read			Limit Line	Over Limit	Remark
	MHz	Level	Factor			
1	0.152	19.90	19.82	39.72	55.92	-16.20 Average
2	0.152	38.30	19.82	58.12	65.92	-7.80 QP
3	0.179	22.10	19.83	41.93	54.51	-12.58 Average
4	0.179	38.00	19.83	57.83	64.51	-6.68 QP
5	0.215	19.80	19.82	39.62	53.02	-13.40 Average
6	0.215	36.20	19.82	56.02	63.02	-7.00 QP
7	0.247	18.50	19.82	38.32	51.86	-13.54 Average
8	0.247	35.00	19.82	54.82	61.86	-7.04 QP
9	0.293	15.30	19.83	35.13	50.45	-15.32 Average
10	0.293	33.30	19.83	53.13	60.45	-7.32 QP
11	0.326	16.20	19.82	36.02	49.54	-13.52 Average
12	0.326	31.90	19.82	51.72	59.54	-7.82 QP

Note:

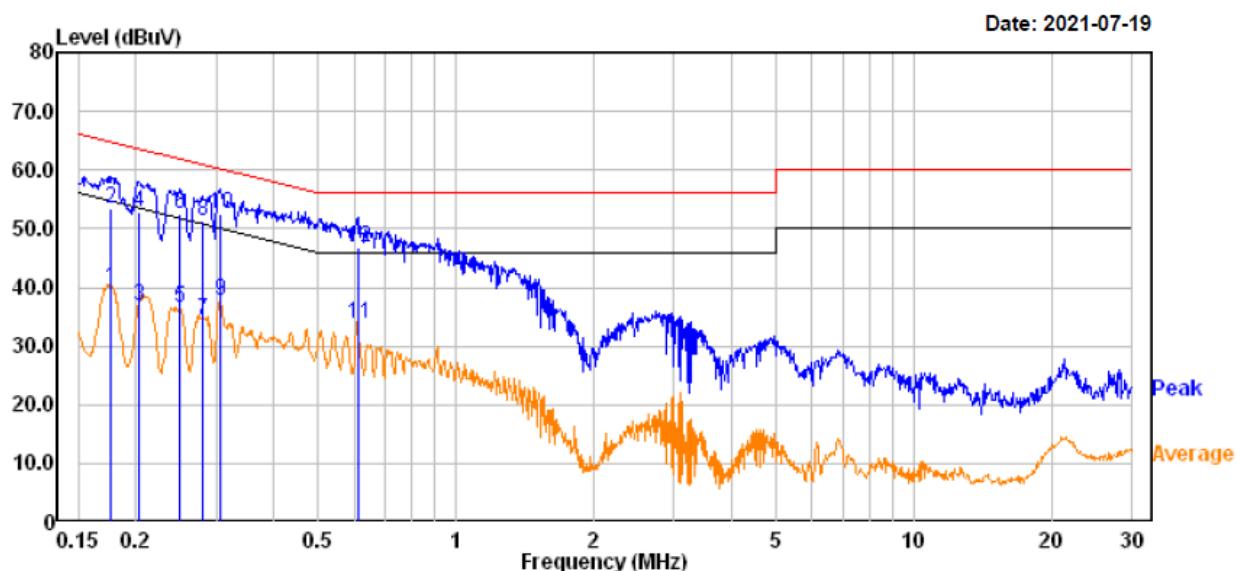
- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dB μ V) + Factor (dB) - Limit (dB μ V)

Series Model: 9290030092

AC 120V/60 Hz, Line



Freq	Read		Level	Limit	Over	Remark
	MHz	dBuV				
1	0.176	20.80	19.83	40.63	54.68	-14.05 Average
2	0.176	35.70	19.83	55.53	64.68	-9.15 QP
3	0.212	18.70	19.82	38.52	53.14	-14.62 Average
4	0.212	34.50	19.82	54.32	63.14	-8.82 QP
5	0.238	16.90	19.82	36.72	52.15	-15.43 Average
6	0.238	33.40	19.82	53.22	62.15	-8.93 QP
7	0.269	13.20	19.82	33.02	51.16	-18.14 Average
8	0.269	31.80	19.82	51.62	61.16	-9.54 QP
9	0.304	18.59	19.83	38.42	50.12	-11.70 Average
10	0.304	33.19	19.83	53.02	60.12	-7.10 QP
11	0.606	13.20	19.75	32.95	46.00	-13.05 Average
12	0.606	28.50	19.75	48.25	56.00	-7.75 QP

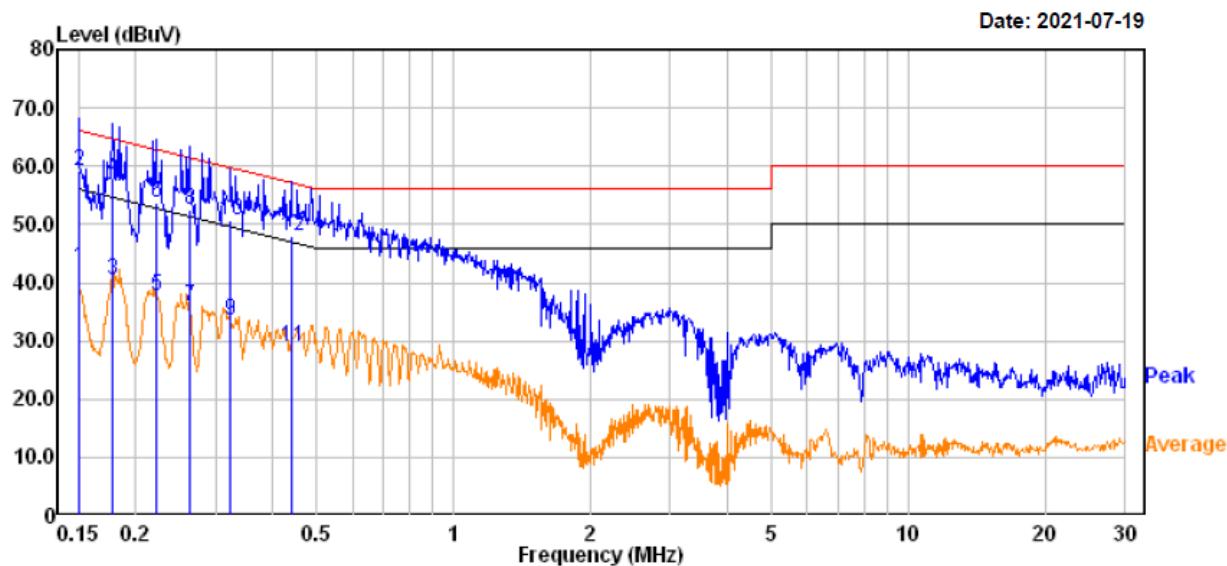
AC 120V/60 Hz, Neutral

Freq	Read			Limit Line	Over Limit	Remark
	MHz	Level dB μ V	Factor dB			
1	0.177	19.98	19.83	39.81	54.63	-14.82 Average
2	0.177	33.70	19.83	53.53	64.63	-11.10 QP
3	0.203	17.09	19.82	36.91	53.47	-16.56 Average
4	0.203	33.00	19.82	52.82	63.47	-10.65 QP
5	0.249	16.84	19.82	36.66	51.78	-15.12 Average
6	0.249	32.70	19.82	52.52	61.78	-9.26 QP
7	0.281	14.66	19.82	34.48	50.78	-16.30 Average
8	0.281	31.50	19.82	51.32	60.78	-9.46 QP
9	0.306	17.83	19.83	37.66	50.08	-12.42 Average
10	0.306	32.59	19.83	52.42	60.08	-7.66 QP
11	0.612	14.04	19.75	33.79	46.00	-12.21 Average
12	0.612	27.00	19.75	46.75	56.00	-9.25 QP

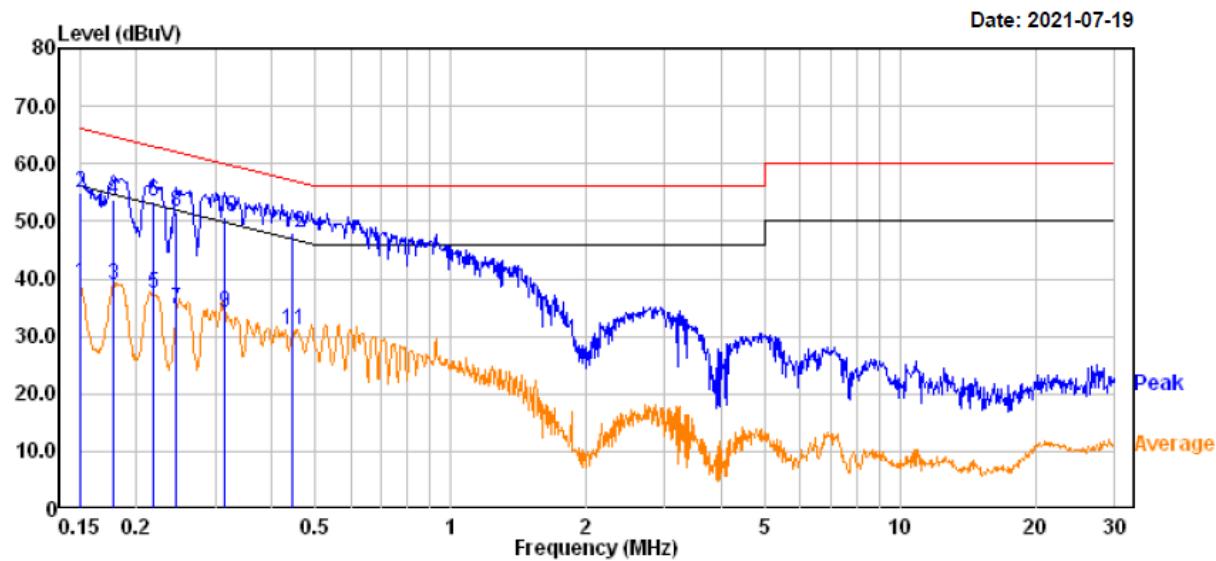
Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Over Limit (dB) = Read level (dB μ V) + Factor (dB) - Limit (dB μ V)

Series Model: 9290030093**AC 120V/60 Hz, Line**

Freq	Read			Limit		Over	
	MHz	Level	Factor	Level	Line	Limit	Remark
1	0.150	22.80	19.82	42.62	56.00	-13.38	Average
2	0.150	39.50	19.82	59.32	66.00	-6.68	QP
3	0.178	20.70	19.83	40.53	54.59	-14.06	Average
4	0.178	38.20	19.83	58.03	64.59	-6.56	QP
5	0.221	17.80	19.82	37.62	52.77	-15.15	Average
6	0.221	34.00	19.82	53.82	62.77	-8.95	QP
7	0.262	16.00	19.82	35.82	51.36	-15.54	Average
8	0.262	32.80	19.82	52.62	61.36	-8.74	QP
9	0.323	13.80	19.82	33.62	49.62	-16.00	Average
10	0.323	30.90	19.82	50.72	59.62	-8.90	QP
11	0.440	9.30	19.75	29.05	47.06	-18.01	Average
12	0.440	28.30	19.75	48.05	57.06	-9.01	QP

AC 120V/60 Hz, Neutral

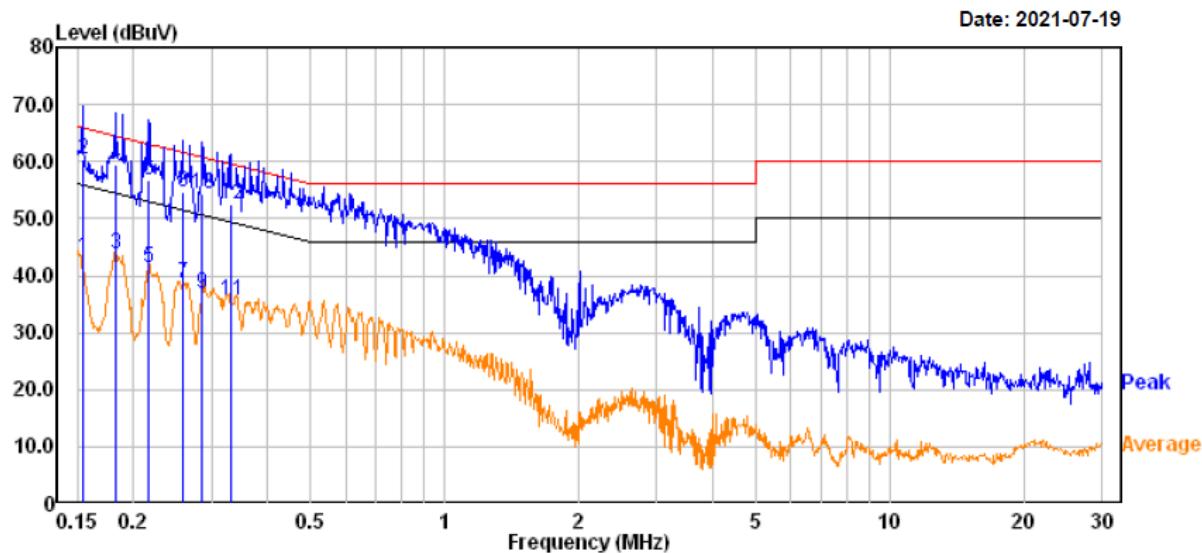
Freq	Read			Limit Line	Over Limit	Remark
	MHz	Level	Factor			
				dBuV	dBuV	dB
1	0.150	19.47	19.82	39.29	56.00	-16.71 Average
2	0.150	35.20	19.82	55.02	66.00	-10.98 QP
3	0.178	19.00	19.83	38.83	54.59	-15.76 Average
4	0.178	34.00	19.83	53.83	64.59	-10.76 QP
5	0.218	17.65	19.82	37.47	52.90	-15.43 Average
6	0.218	33.50	19.82	53.32	62.90	-9.58 QP
7	0.246	14.90	19.82	34.72	51.90	-17.18 Average
8	0.246	31.70	19.82	51.52	61.90	-10.38 QP
9	0.314	14.16	19.82	33.98	49.87	-15.89 Average
10	0.314	31.00	19.82	50.82	59.87	-9.05 QP
11	0.445	11.27	19.75	31.02	46.98	-15.96 Average
12	0.445	28.10	19.75	47.85	56.98	-9.13 QP

Note:

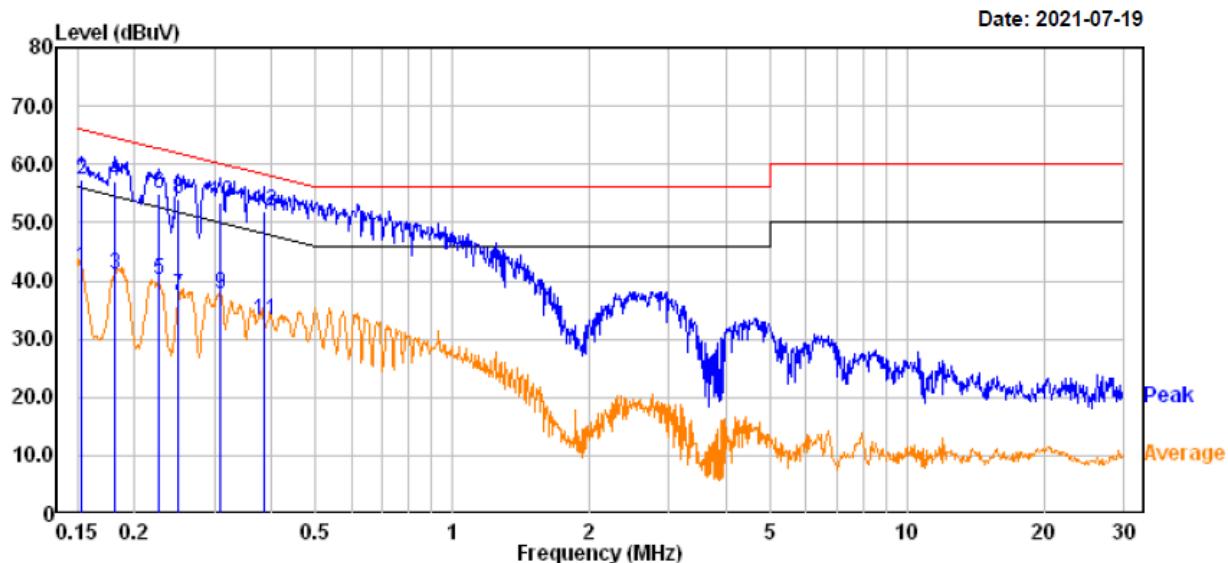
- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dB μ V) + Factor (dB) - Limit (dB μ V)

Series Model: 9290030094

AC 120V/60 Hz, Line



Freq	Read			Limit		Over	
	MHz	Level	Factor	Level	Line	Limit	Remark
1	0.154	23.30	19.82	43.12	55.79	-12.67	Average
2	0.154	40.50	19.82	60.32	65.79	-5.47	QP
3	0.182	23.80	19.83	43.63	54.39	-10.76	Average
4	0.182	39.50	19.83	59.33	64.39	-5.06	QP
5	0.216	21.40	19.82	41.22	52.98	-11.76	Average
6	0.216	36.80	19.82	56.62	62.98	-6.36	QP
7	0.258	18.70	19.82	38.52	51.49	-12.97	Average
8	0.258	34.70	19.82	54.52	61.49	-6.97	QP
9	0.285	17.10	19.82	36.92	50.66	-13.74	Average
10	0.285	34.50	19.82	54.32	60.66	-6.34	QP
11	0.331	15.79	19.82	35.61	49.42	-13.81	Average
12	0.331	32.69	19.82	52.51	59.42	-6.91	QP

AC 120V/60 Hz, Neutral

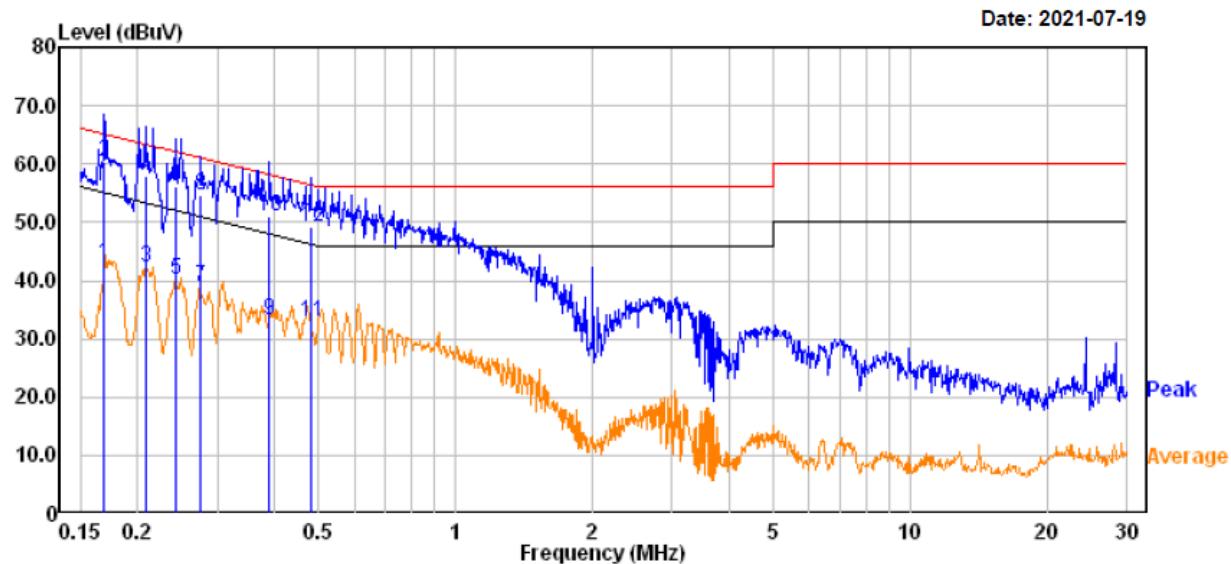
Freq	Read		Limit	Over	Remark	
	MHz	dBuV				
1	0.153	22.55	19.82	42.37	55.83 -13.46	Average
2	0.153	37.40	19.82	57.22	65.83 -8.61	QP
3	0.180	21.32	19.83	41.15	54.47 -13.32	Average
4	0.180	37.20	19.83	57.03	64.47 -7.44	QP
5	0.226	20.33	19.82	40.15	52.61 -12.46	Average
6	0.226	35.20	19.82	55.02	62.61 -7.59	QP
7	0.249	17.56	19.82	37.38	51.78 -14.40	Average
8	0.249	34.30	19.82	54.12	61.78 -7.66	QP
9	0.309	17.86	19.83	37.69	50.00 -12.31	Average
10	0.309	33.69	19.83	53.52	60.00 -6.48	QP
11	0.385	13.32	19.76	33.08	48.18 -15.10	Average
12	0.385	32.10	19.76	51.86	58.18 -6.32	QP

Note:

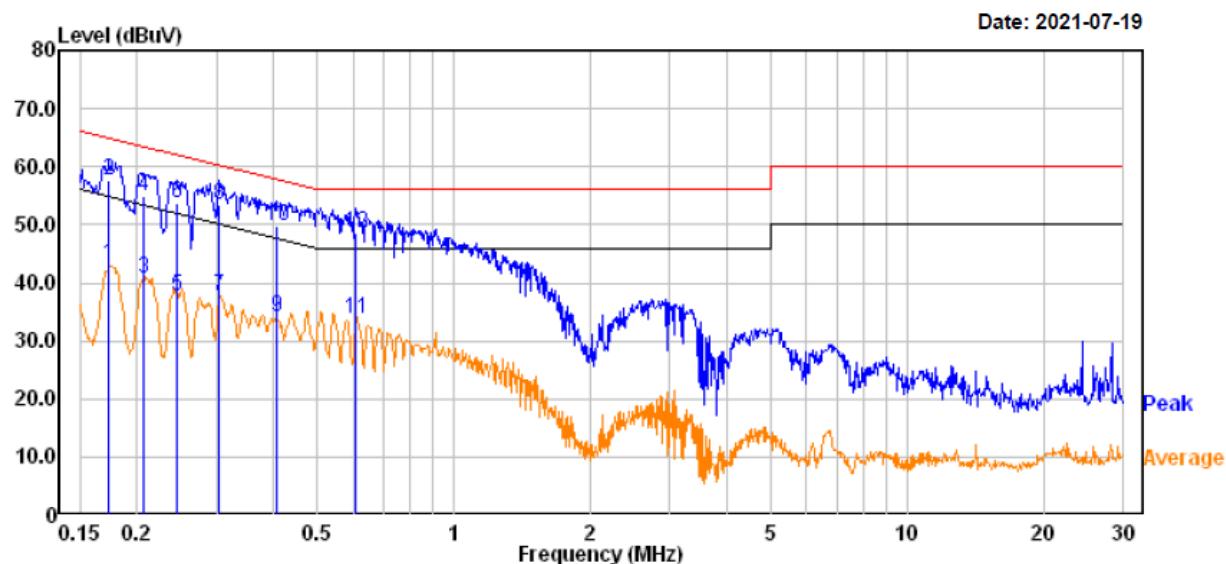
- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dB μ V) + Factor (dB) - Limit (dB μ V)

Series Model: 9290030095

AC 120V/60 Hz, Line



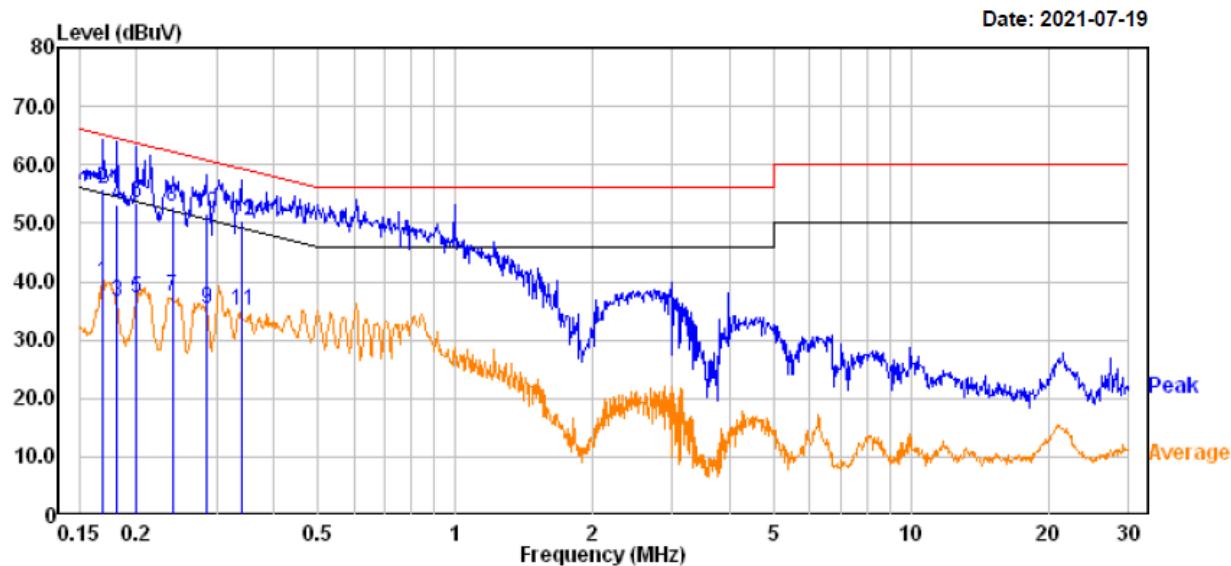
Freq	Read			Limit	Over	Over	Remark
	MHz	Level	Factor		Line	Limit	
1	0.169	22.90	19.83	42.73	55.01	-12.28	Average
2	0.169	40.50	19.83	60.33	65.01	-4.68	QP
3	0.208	22.50	19.82	42.32	53.27	-10.95	Average
4	0.208	38.20	19.82	58.02	63.27	-5.25	QP
5	0.242	20.30	19.82	40.12	52.03	-11.91	Average
6	0.242	36.30	19.82	56.12	62.03	-5.91	QP
7	0.276	19.00	19.82	38.82	50.95	-12.13	Average
8	0.276	34.80	19.82	54.62	60.95	-6.33	QP
9	0.391	13.50	19.75	33.25	48.05	-14.80	Average
10	0.391	31.30	19.75	51.05	58.05	-7.00	QP
11	0.482	13.20	19.76	32.96	46.31	-13.35	Average
12	0.482	29.50	19.76	49.26	56.31	-7.05	QP

AC 120V/60 Hz, Neutral

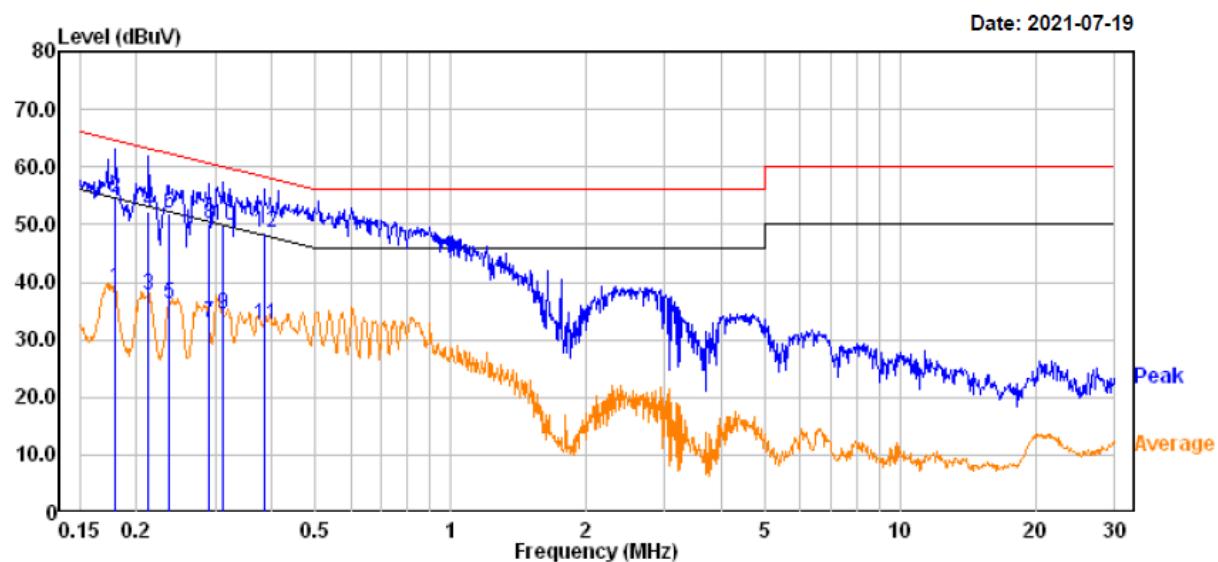
Freq	Read			Limit Line	Over Limit	Remark
	MHz	Level dBuV	Factor dB			
1	0.173	23.30	19.83	43.13	54.80	-11.67 Average
2	0.173	37.90	19.83	57.73	64.80	-7.07 QP
3	0.207	21.06	19.82	40.88	53.31	-12.43 Average
4	0.207	35.00	19.82	54.82	63.31	-8.49 QP
5	0.244	17.94	19.82	37.76	51.94	-14.18 Average
6	0.244	33.80	19.82	53.62	61.94	-8.32 QP
7	0.304	17.81	19.83	37.64	50.12	-12.48 Average
8	0.304	33.69	19.83	53.52	60.12	-6.60 QP
9	0.406	14.23	19.74	33.97	47.72	-13.75 Average
10	0.406	30.10	19.74	49.84	57.72	-7.88 QP
11	0.609	14.14	19.75	33.89	46.00	-12.11 Average
12	0.609	29.00	19.75	48.75	56.00	-7.25 QP

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dB μ V) + Factor (dB) - Limit (dB μ V)

Series Model: 9290030097**AC 120V/60 Hz, Line**

Freq	Read			Limit	Over	Remark
	Level	Factor	Level			
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.169	20.10	19.83	39.93	55.01	-15.08 Average
2	0.169	36.00	19.83	55.83	65.01	-9.18 QP
3	0.181	16.60	19.83	36.43	54.43	-18.00 Average
4	0.181	33.20	19.83	53.03	64.43	-11.40 QP
5	0.200	17.20	19.82	37.02	53.60	-16.58 Average
6	0.200	33.70	19.82	53.52	63.60	-10.08 QP
7	0.240	17.60	19.82	37.42	52.11	-14.69 Average
8	0.240	32.90	19.82	52.72	62.11	-9.39 QP
9	0.284	15.50	19.82	35.32	50.70	-15.38 Average
10	0.284	31.80	19.82	51.62	60.70	-9.08 QP
11	0.340	15.30	19.81	35.11	49.21	-14.10 Average
12	0.340	30.70	19.81	50.51	59.21	-8.70 QP

AC 120V/60 Hz, Neutral

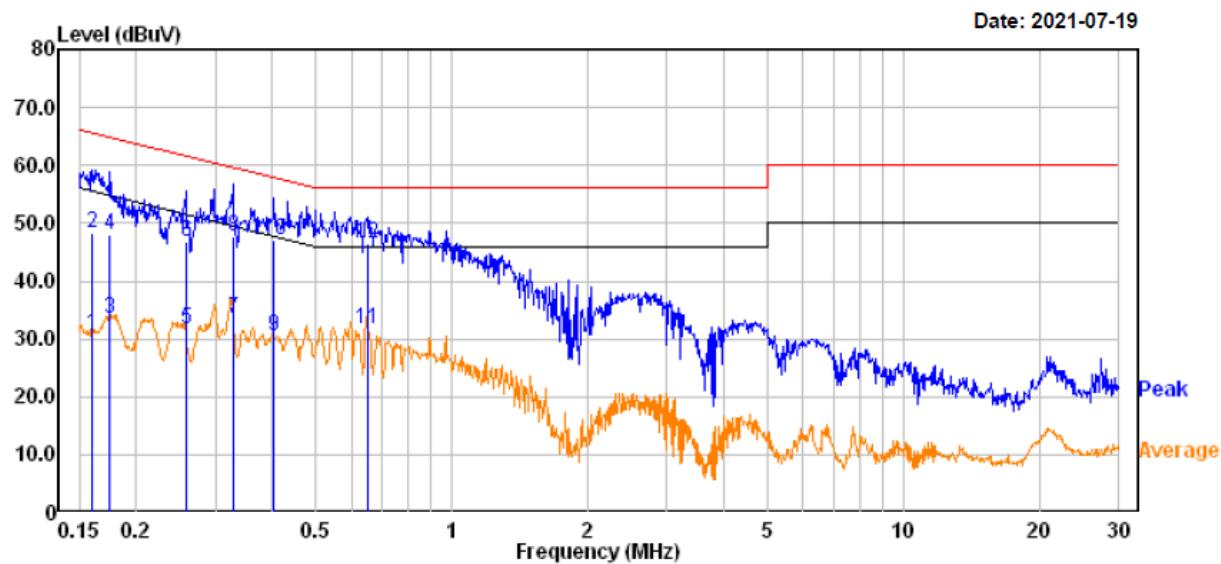
Freq	Read		Limit	Over	Remark	
	MHz	Level	Factor	Level	Line	Limit
1	0.179	19.10	19.83	38.93	54.51	-15.58 Average
2	0.179	34.70	19.83	54.53	64.51	-9.98 QP
3	0.213	17.80	19.82	37.62	53.10	-15.48 Average
4	0.213	32.50	19.82	52.32	63.10	-10.78 QP
5	0.236	16.30	19.82	36.12	52.23	-16.11 Average
6	0.236	32.00	19.82	51.82	62.23	-10.41 QP
7	0.291	13.10	19.82	32.92	50.49	-17.57 Average
8	0.291	30.20	19.82	50.02	60.49	-10.47 QP
9	0.312	14.70	19.82	34.52	49.91	-15.39 Average
10	0.312	30.00	19.82	49.82	59.91	-10.09 QP
11	0.385	12.80	19.76	32.56	48.18	-15.62 Average
12	0.385	28.80	19.76	48.56	58.18	-9.62 QP

Note:

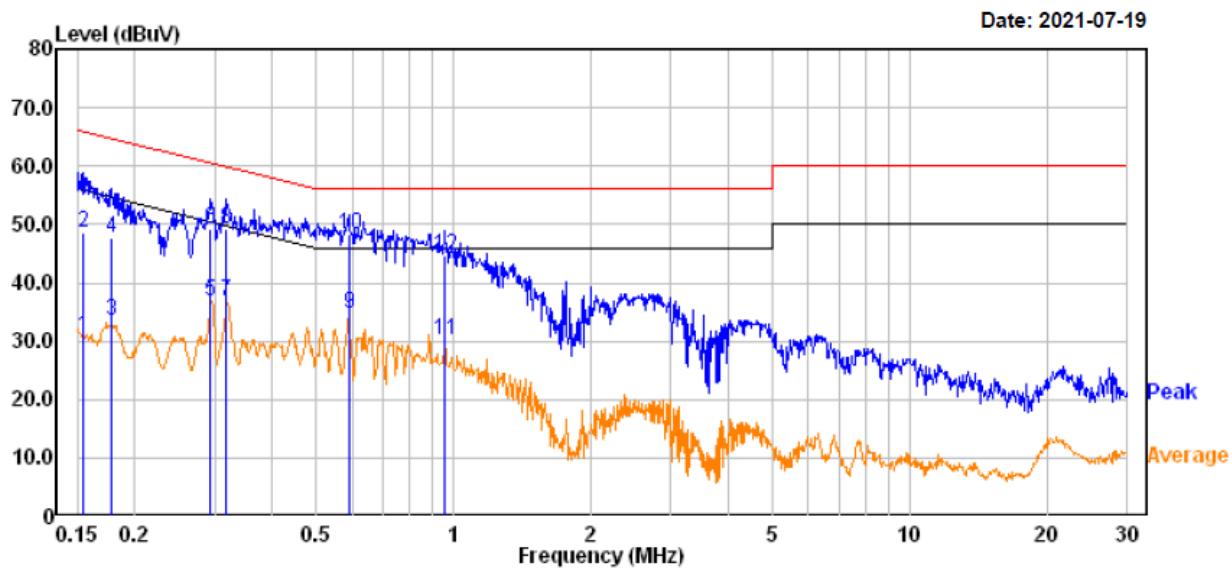
- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dB μ V) + Factor (dB) - Limit (dB μ V)

Series Model: 9290030098

AC 120V/60 Hz, Line



Freq	Read			Limit		Over	
	MHz	Level	Factor	Level	Line	Line	Remark
1	0.159	11.11	19.82	30.93	55.50	-24.57	Average
2	0.159	28.41	19.82	48.23	65.50	-17.27	QP
3	0.175	13.80	19.83	33.63	54.72	-21.09	Average
4	0.175	28.30	19.83	48.13	64.72	-16.59	QP
5	0.258	11.80	19.82	31.62	51.49	-19.87	Average
6	0.258	26.90	19.82	46.72	61.49	-14.77	QP
7	0.328	13.69	19.82	33.51	49.50	-15.99	Average
8	0.328	27.79	19.82	47.61	59.50	-11.89	QP
9	0.404	10.70	19.74	30.44	47.76	-17.32	Average
10	0.404	27.50	19.74	47.24	57.76	-10.52	QP
11	0.649	11.80	19.75	31.55	46.00	-14.45	Average
12	0.649	26.70	19.75	46.45	56.00	-9.55	QP

AC 120V/60 Hz, Neutral

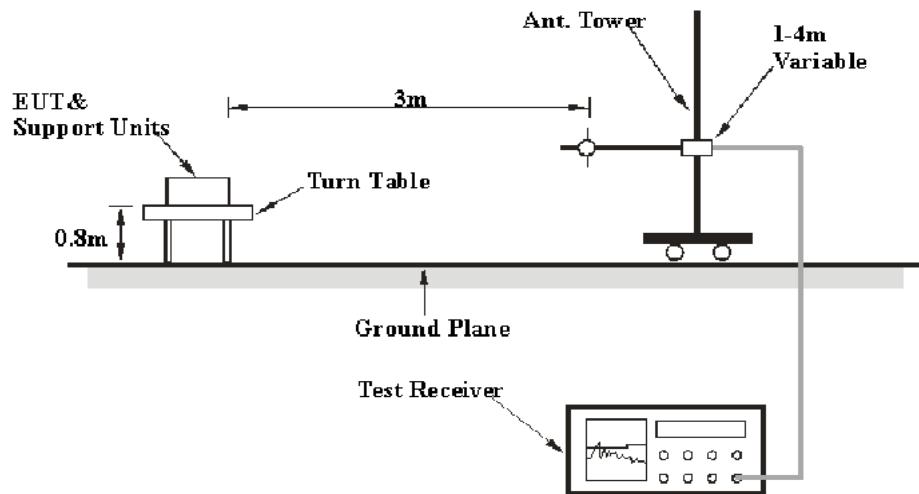
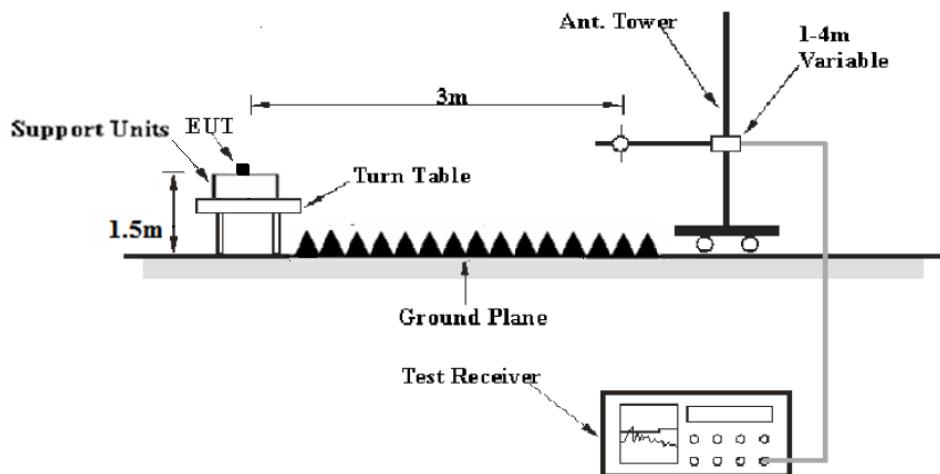
Freq	Read		Limit	Over Limit	Remark	
	Freq	Level	Factor	Level	Line	
1	0.154	10.90	19.82	30.72	55.79 -25.07	Average
2	0.154	28.70	19.82	48.52	65.79 -17.27	QP
3	0.178	13.70	19.83	33.53	54.59 -21.06	Average
4	0.178	27.80	19.83	47.63	64.59 -16.96	QP
5	0.294	17.00	19.83	36.83	50.41 -13.58	Average
6	0.294	29.50	19.83	49.33	60.41 -11.08	QP
7	0.318	17.00	19.82	36.82	49.75 -12.93	Average
8	0.318	29.50	19.82	49.32	59.75 -10.43	QP
9	0.591	15.00	19.75	34.75	46.00 -11.25	Average
10	0.591	28.70	19.75	48.45	56.00 -7.55	QP
11	0.958	10.50	19.78	30.28	46.00 -15.72	Average
12	0.958	24.90	19.78	44.68	56.00 -11.32	QP

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dB μ V) + Factor (dB) - Limit (dB μ V)

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	Peak
	1MHz	3 MHz	1MHz	AVG

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz, Peak and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dB μ V/m) = Meter Reading (dB μ V) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data

Environmental Conditions

Temperature:	24.1-24.5 °C
Relative Humidity:	50-52 %
ATM Pressure:	101.6-102.3 kPa

The testing was performed by Miller Xie from 2021-04-23 to 2021-07-20.

Test Result: Compliant.

EUT operation mode: Transmitting

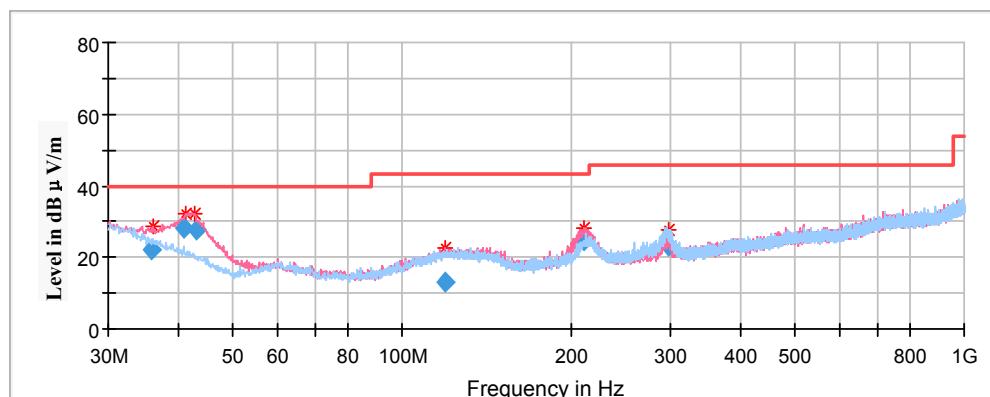
BLE(1Mbps):

Spurious Emission Test:

Tested Model:9290030096

30MHz-1GHz:

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in the Y axis of orientation** was recorded)

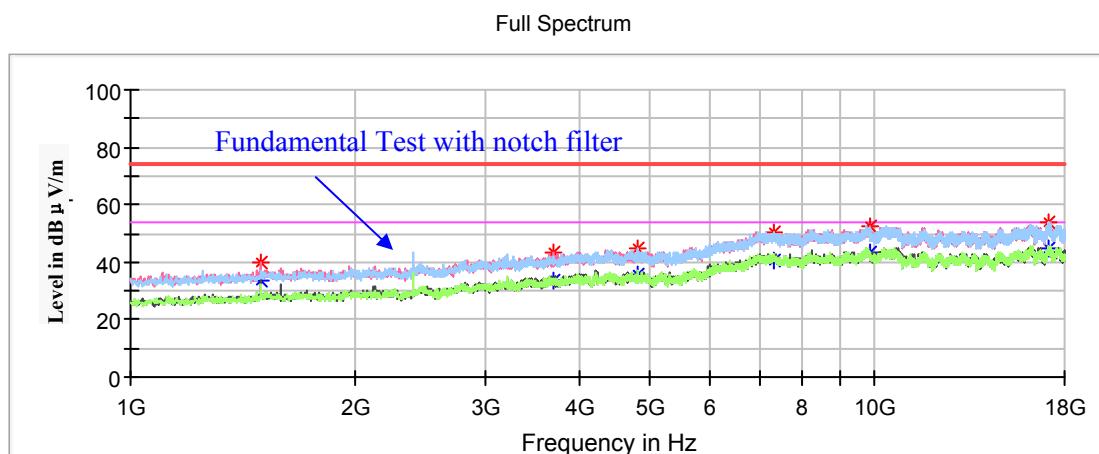


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	Quasi-peak (dB μ V/m)	Height (cm)	Polar (H/V)				
35.930500	22.06	100.0	V	326.0	-7.7	40.00	17.94
41.040700	28.04	100.0	V	69.0	-11.8	40.00	11.96
43.111100	27.62	100.0	V	14.0	-12.6	40.00	12.38
119.146900	13.18	100.0	V	0.0	-11.1	43.50	30.32
211.154050	24.62	100.0	V	282.0	-12.0	43.50	18.88
297.577000	23.24	200.0	H	204.0	-10.9	46.00	22.76

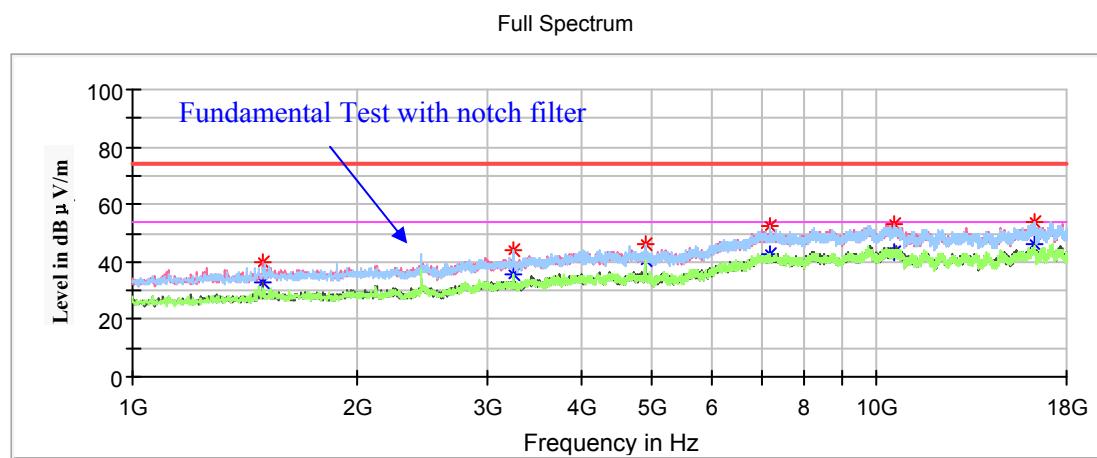
1GHz-18GHz:(Pre-scan in the X,Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded)

Note:

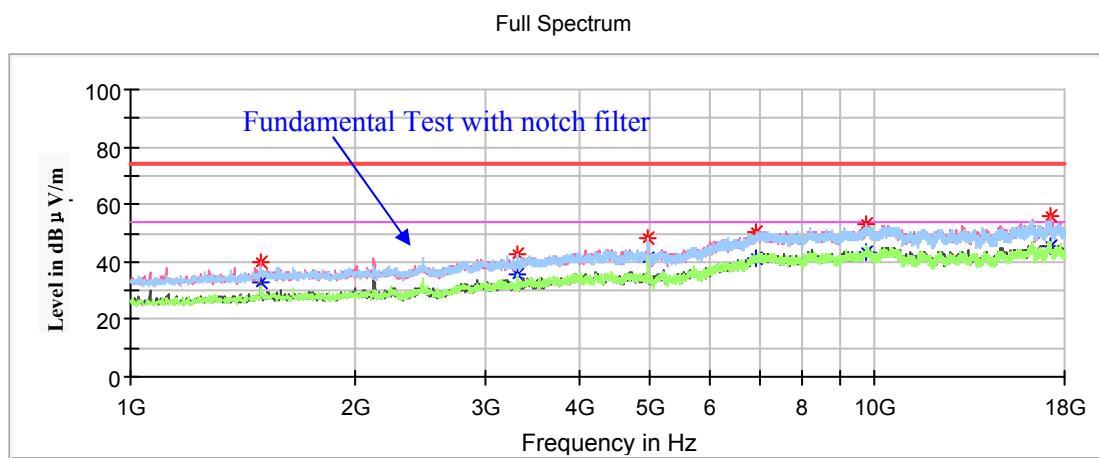
1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2402MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1494.700000	---	33.37	150.0	V	146.0	-9.4	54.00	20.63
1494.700000	39.74	---	150.0	V	146.0	-9.4	74.00	34.26
3692.800000	---	33.82	150.0	H	87.0	-0.9	54.00	20.18
3692.800000	43.12	---	150.0	H	87.0	-0.9	74.00	30.88
4804.000000	---	35.79	150.0	H	0.0	0.6	54.00	18.21
4804.000000	45.01	---	150.0	H	0.0	0.6	74.00	28.99
7325.700000	---	40.90	150.0	V	184.0	5.6	54.00	13.10
7325.700000	50.46	---	150.0	V	184.0	5.6	74.00	23.54
9836.600000	---	43.38	150.0	V	197.0	11.9	54.00	10.62
9836.600000	52.31	---	150.0	V	197.0	11.9	74.00	21.69
17178.900000	---	44.88	200.0	H	243.0	11.6	54.00	9.12
17178.900000	53.85	---	200.0	H	243.0	11.6	74.00	20.15

Middle Channel: 2440MHz

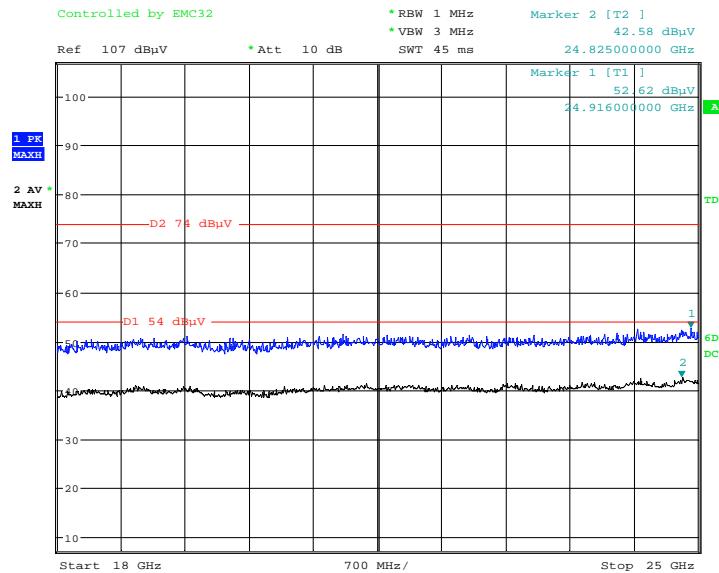
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1494.700000	---	32.78	150.0	V	269.0	-9.4	54.00	21.22
1494.700000	39.66	---	150.0	V	269.0	-9.4	74.00	34.34
3252.500000	---	36.00	200.0	H	197.0	-2.5	54.00	18.00
3252.500000	44.27	---	200.0	H	197.0	-2.5	74.00	29.73
4880.000000	---	40.87	200.0	H	25.0	0.5	54.00	13.13
4880.000000	45.96	---	200.0	H	25.0	0.5	74.00	28.04
7169.300000	---	42.31	200.0	H	8.0	5.3	54.00	11.69
7169.300000	52.13	---	200.0	H	8.0	5.3	74.00	21.87
10559.100000	---	43.57	200.0	V	324.0	12.8	54.00	10.43
10559.100000	52.92	---	200.0	V	324.0	12.8	74.00	21.08
16254.100000	---	45.86	150.0	V	345.0	12.2	54.00	8.14
16254.100000	53.76	---	150.0	V	345.0	12.2	74.00	20.24

High Channel: 2480MHz

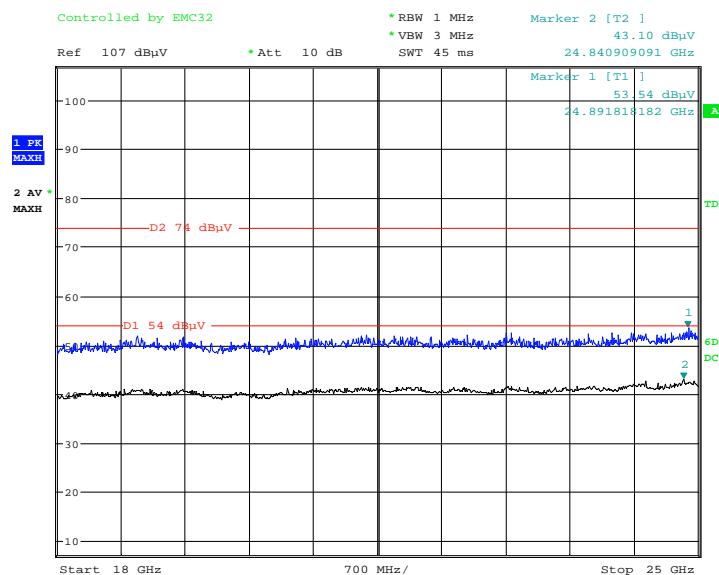
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1494.700000	39.54	---	150.0	V	167.0	-9.4	74.00	34.46
1494.700000	---	32.88	150.0	V	167.0	-9.4	54.00	21.12
3306.900000	---	35.61	200.0	H	165.0	-2.3	54.00	18.39
3306.900000	42.66	---	200.0	H	165.0	-2.3	74.00	31.34
4960.000000	---	41.14	150.0	H	30.0	0.3	54.00	12.86
4960.000000	47.99	---	150.0	H	30.0	0.3	74.00	26.01
6922.800000	---	41.17	150.0	V	179.0	5.1	54.00	12.83
6922.800000	50.48	---	150.0	V	179.0	5.1	74.00	23.52
9736.300000	---	43.38	200.0	H	152.0	11.9	54.00	10.62
9736.300000	53.30	---	200.0	H	152.0	11.9	74.00	20.70
17219.700000	---	45.73	150.0	H	182.0	11.5	54.00	8.27
17219.700000	55.70	---	150.0	H	182.0	11.5	74.00	18.30

18GHz-25GHz:

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in Y-axis of orientation** was recorded)

Horizontal

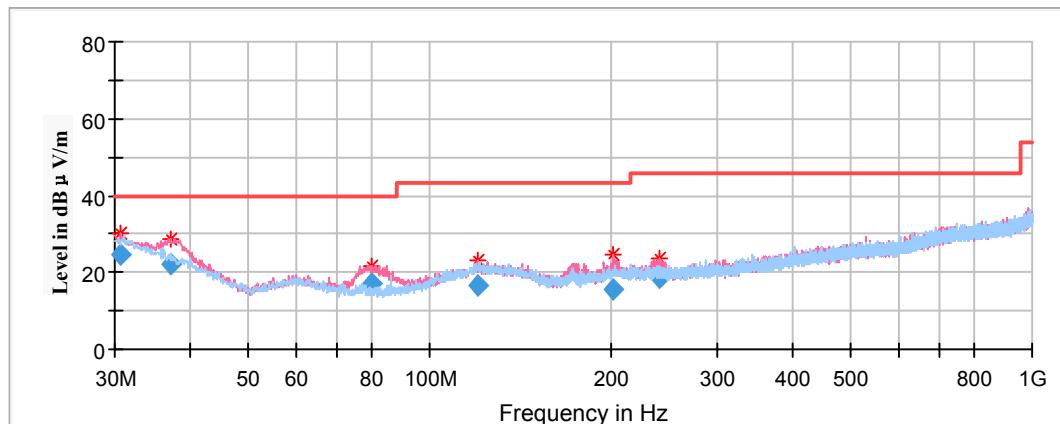
Date: 23.APR.2021 13:09:14

Vertical

Date: 23.APR.2021 13:18:12

Series Model: 9290030090**30MHz-1GHz:**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in the Y axis of orientation** was recorded)

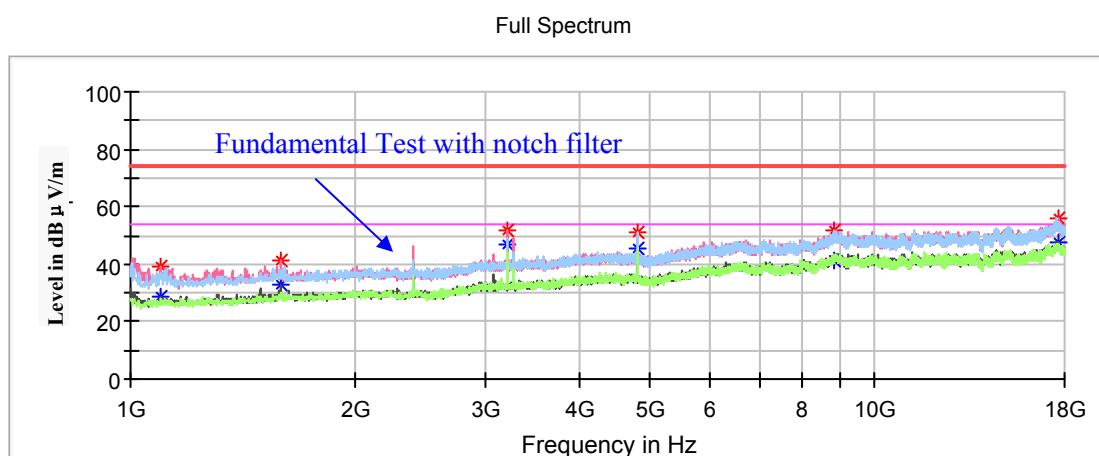


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
30.728257	24.90	100.0	V	170.0	-4.0	40.00	15.10
37.157500	22.24	100.0	V	127.0	-8.4	40.00	17.76
80.073500	17.05	100.0	V	324.0	-17.2	40.00	22.95
119.840250	16.39	200.0	V	293.0	-11.1	43.50	27.11
202.178100	15.69	199.0	V	260.0	-12.0	43.50	27.81
240.001500	18.43	100.0	V	78.0	-12.0	46.00	27.57

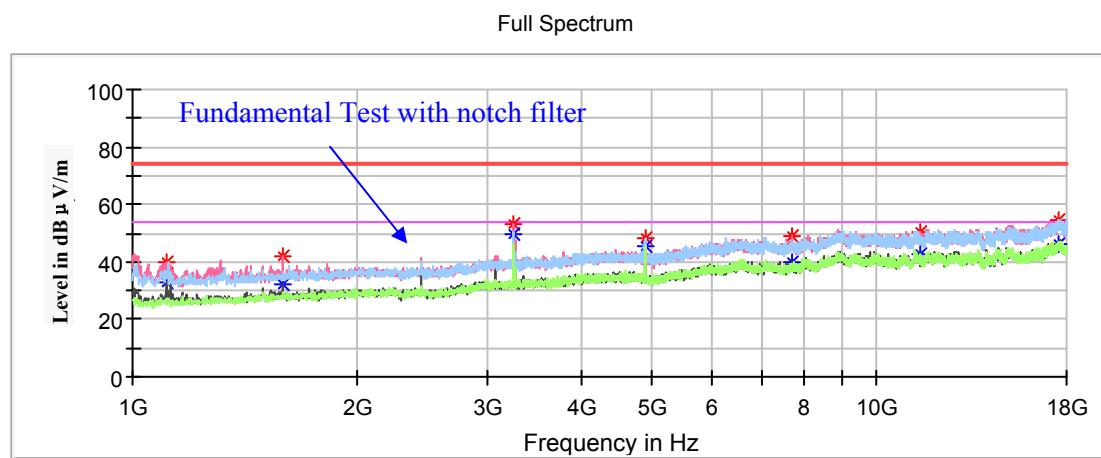
1GHz-18GHz:(Pre-scan in the X,Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded)

Note:

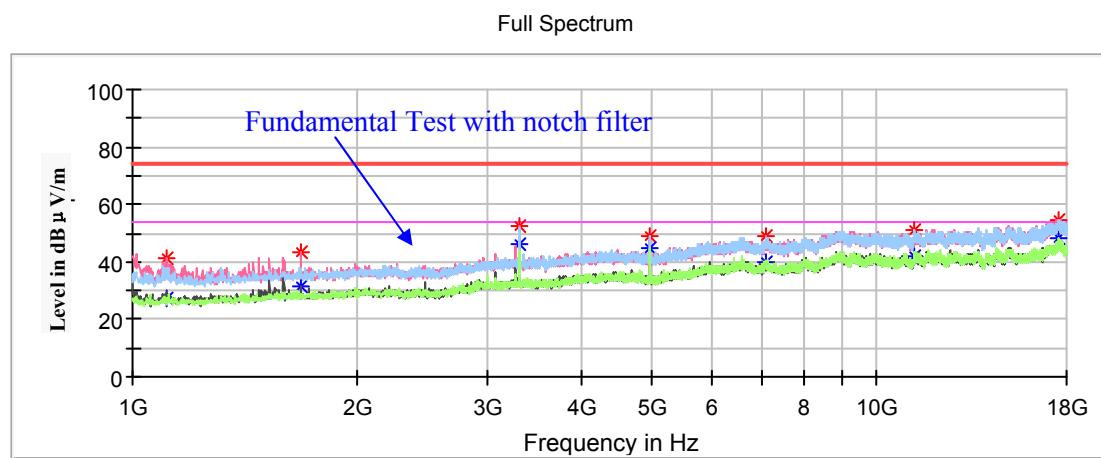
1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2402MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1096.900000	---	28.61	200.0	V	0.0	-8.6	54.00	25.39
1096.900000	38.86	---	200.0	V	0.0	-8.6	74.00	35.14
1591.600000	41.17	---	200.0	V	268.0	-6.2	74.00	32.83
1591.600000	---	33.17	200.0	V	268.0	-6.2	54.00	20.83
3201.500000	---	46.71	150.0	V	230.0	-1.9	54.00	7.29
3201.500000	51.68	---	150.0	V	230.0	-1.9	74.00	22.32
4804.000000	50.74	---	150.0	H	215.0	0.6	74.00	23.26
4804.000000	---	45.74	150.0	H	215.0	0.6	54.00	8.26
8794.500000	---	41.14	200.0	V	197.0	8.7	54.00	12.86
8794.500000	51.50	---	200.0	V	197.0	8.7	74.00	22.50
17671.900000	---	47.22	150.0	V	120.0	14.0	54.00	6.78
17671.900000	55.98	---	150.0	V	120.0	14.0	74.00	18.02

Middle Channel: 2440MHz

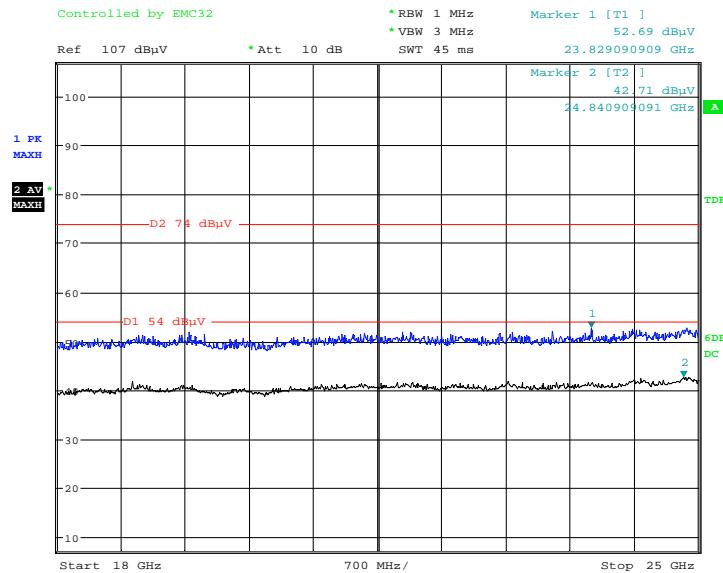
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1112.200000	---	33.01	200.0	V	239.0	-8.5	54.00	20.99
1112.200000	39.72	---	200.0	V	239.0	-8.5	74.00	34.28
1595.000000	---	32.19	150.0	V	78.0	-6.2	54.00	21.81
1595.000000	41.77	---	150.0	V	78.0	-6.2	74.00	32.23
3252.500000	53.48	---	200.0	V	239.0	-1.9	74.00	20.52
3252.500000	---	49.77	200.0	V	239.0	-1.9	54.00	4.23
4880.000000	48.36	---	150.0	H	198.0	0.5	74.00	25.64
4880.000000	---	45.11	150.0	H	198.0	0.5	54.00	8.89
7709.900000	---	39.94	200.0	V	136.0	5.3	54.00	14.06
7709.900000	49.29	---	200.0	V	136.0	5.3	74.00	24.71
11444.800000	---	42.32	200.0	H	264.0	10.5	54.00	11.68
11444.800000	50.65	---	200.0	H	264.0	10.5	74.00	23.35
17607.300000	---	45.88	150.0	H	44.0	14.2	54.00	8.12
17607.300000	54.67	---	150.0	H	44.0	14.2	74.00	19.33

High Channel: 2480MHz

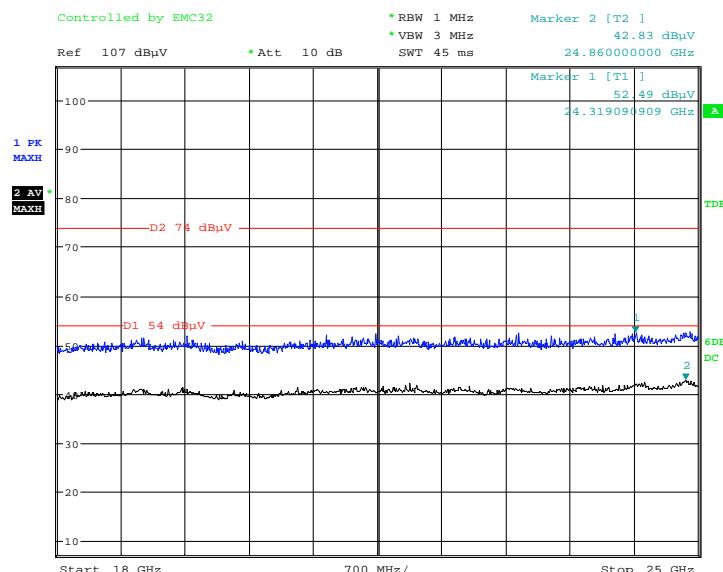
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1110.500000	---	27.37	200.0	V	15.0	-8.5	54.00	26.63
1110.500000	41.30	---	200.0	V	15.0	-8.5	74.00	32.70
1681.700000	---	31.47	150.0	V	293.0	-5.9	54.00	22.53
1681.700000	43.54	---	150.0	V	293.0	-5.9	74.00	30.46
3305.200000	52.79	---	200.0	V	229.0	-1.8	74.00	21.21
3305.200000	---	46.24	200.0	V	229.0	-1.8	54.00	7.76
4960.000000	48.96	---	150.0	H	216.0	0.3	74.00	25.04
4960.000000	---	44.58	150.0	H	216.0	0.3	54.00	9.42
7099.600000	---	39.76	200.0	H	255.0	5.5	54.00	14.24
7099.600000	48.76	---	200.0	H	255.0	5.5	74.00	25.24
11252.700000	---	41.92	200.0	V	343.0	10.1	54.00	12.08
11252.700000	51.11	---	200.0	V	343.0	10.1	74.00	22.89
17571.600000	54.71	---	150.0	V	190.0	14.3	74.00	19.29
17571.600000	---	48.19	150.0	V	190.0	14.3	54.00	5.81

18GHz-25GHz:

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in Y-axis of orientation** was recorded)

Horizontal

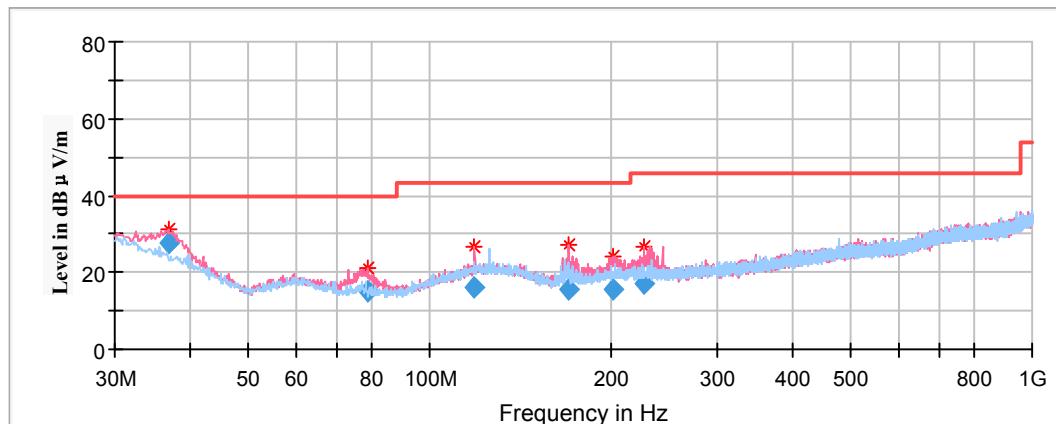
Date: 20.JUL.2021 00:33:18

Vertical

Date: 20.JUL.2021 00:37:35

Series Model: 9290030091**30MHz-1GHz:**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in the Y axis of orientation** was recorded)

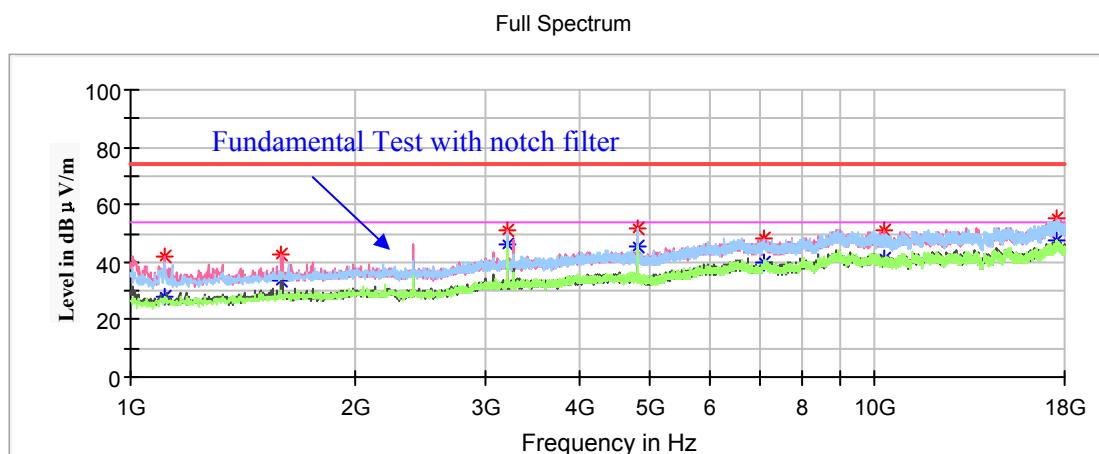


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
36.795200	27.52	100.0	V	189.0	-8.8	40.00	12.48
78.627350	14.89	100.0	V	205.0	-17.2	40.00	25.11
118.753800	16.26	100.0	V	167.0	-11.1	43.50	27.24
170.167400	15.74	100.0	V	14.0	-13.8	43.50	27.76
201.698000	15.75	100.0	V	358.0	-12.0	43.50	27.75
226.913000	17.00	100.0	V	189.0	-12.0	46.00	29.00

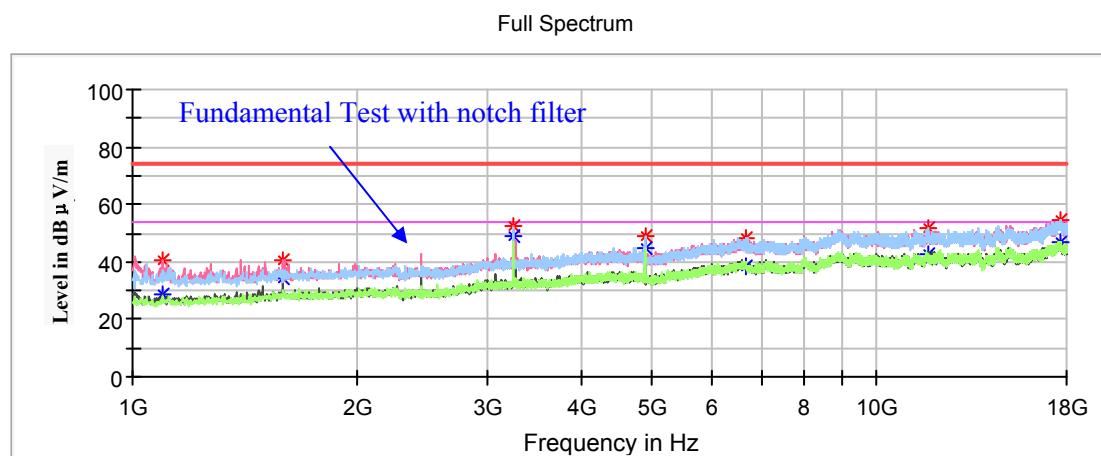
1GHz-18GHz:(Pre-scan in the X, Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded)

Note:

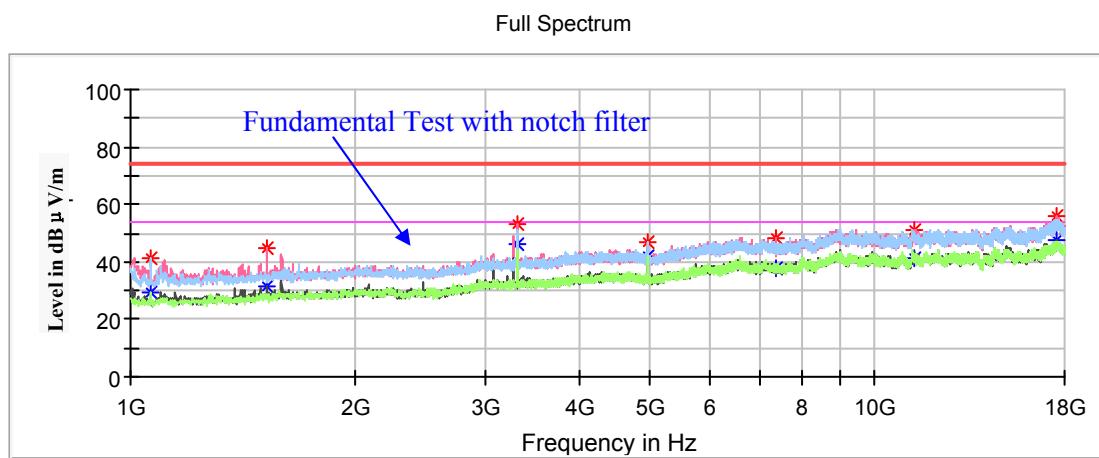
1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2402MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1110.500000	---	28.16	150.0	V	16.0	-8.5	54.00	25.84
1110.500000	42.18	---	150.0	V	16.0	-8.5	74.00	31.82
1596.700000	---	33.43	150.0	V	254.0	-6.2	54.00	20.57
1596.700000	42.43	---	150.0	V	254.0	-6.2	74.00	31.57
3201.500000	50.97	---	200.0	V	16.0	-1.9	74.00	23.03
3201.500000	---	46.19	200.0	V	16.0	-1.9	54.00	7.81
4804.000000	51.54	---	150.0	H	242.0	0.6	74.00	22.46
4804.000000	---	45.44	150.0	H	242.0	0.6	54.00	8.56
7077.500000	48.51	---	200.0	V	292.0	5.6	74.00	25.49
7077.500000	---	39.88	200.0	V	292.0	5.6	54.00	14.12
10327.900000	---	41.02	150.0	V	148.0	8.5	54.00	12.98
10327.900000	50.93	---	150.0	V	148.0	8.5	74.00	23.07
17595.400000	55.06	---	200.0	V	279.0	14.2	74.00	18.94
17595.400000	---	47.39	200.0	V	279.0	14.2	54.00	6.61

Middle Channel: 2440MHz

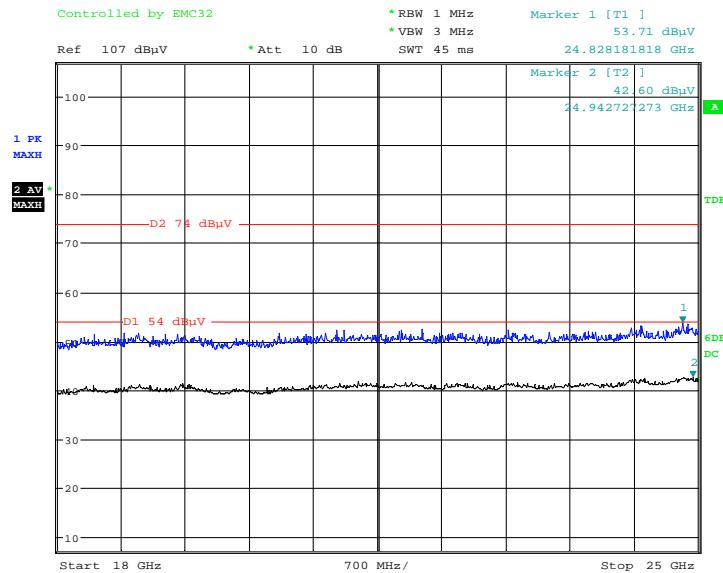
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1098.600000	40.49	---	200.0	V	344.0	-8.5	74.00	33.51
1098.600000	---	28.50	200.0	V	344.0	-8.5	54.00	25.50
1595.000000	40.90	---	150.0	V	268.0	-6.2	74.00	33.10
1595.000000	---	34.08	150.0	V	268.0	-6.2	54.00	19.92
3252.500000	52.63	---	150.0	V	57.0	-1.9	74.00	21.37
3252.500000	---	48.84	150.0	V	57.0	-1.9	54.00	5.16
4880.000000	---	44.78	150.0	H	197.0	0.5	54.00	9.22
4880.000000	49.17	---	150.0	H	197.0	0.5	74.00	24.83
6683.100000	---	38.26	200.0	V	121.0	5.5	54.00	15.74
6683.100000	48.57	---	200.0	V	121.0	5.5	74.00	25.43
11742.300000	---	42.57	150.0	H	15.0	10.3	54.00	11.43
11742.300000	52.08	---	150.0	H	15.0	10.3	74.00	21.92
17660.000000	---	46.56	200.0	H	348.0	14.1	54.00	7.44
17660.000000	54.80	---	200.0	H	348.0	14.1	74.00	19.20

High Channel: 2480MHz

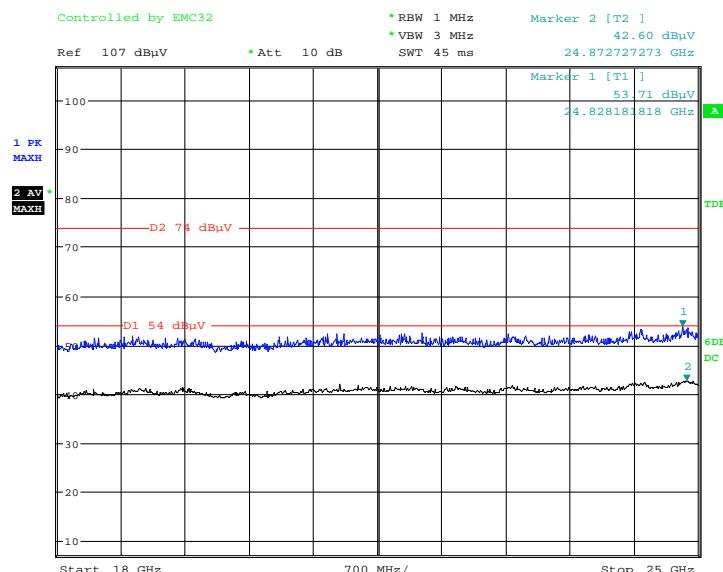
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1064.600000	---	29.31	150.0	H	352.0	-8.7	54.00	24.69
1064.600000	41.11	---	150.0	H	352.0	-8.7	74.00	32.89
1521.900000	---	31.13	150.0	V	299.0	-6.4	54.00	22.87
1521.900000	44.79	---	150.0	V	299.0	-6.4	74.00	29.21
3305.200000	---	46.19	150.0	V	223.0	-1.8	54.00	7.81
3305.200000	53.08	---	150.0	V	223.0	-1.8	74.00	20.92
4960.000000	---	41.74	150.0	H	242.0	0.3	54.00	12.26
4960.000000	46.87	---	150.0	H	242.0	0.3	74.00	27.13
7440.000000	---	38.00	200.0	H	282.0	5.0	54.00	16.00
7440.000000	48.10	---	200.0	H	282.0	5.0	74.00	25.90
11336.000000	---	41.31	150.0	V	248.0	10.3	54.00	12.69
11336.000000	51.14	---	150.0	V	248.0	10.3	74.00	22.86
17585.200000	---	47.33	200.0	V	37.0	14.2	54.00	6.67
17585.200000	55.64	---	200.0	V	37.0	14.2	74.00	18.36

18GHz-25GHz:

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in Y-axis of orientation** was recorded)

Horizontal

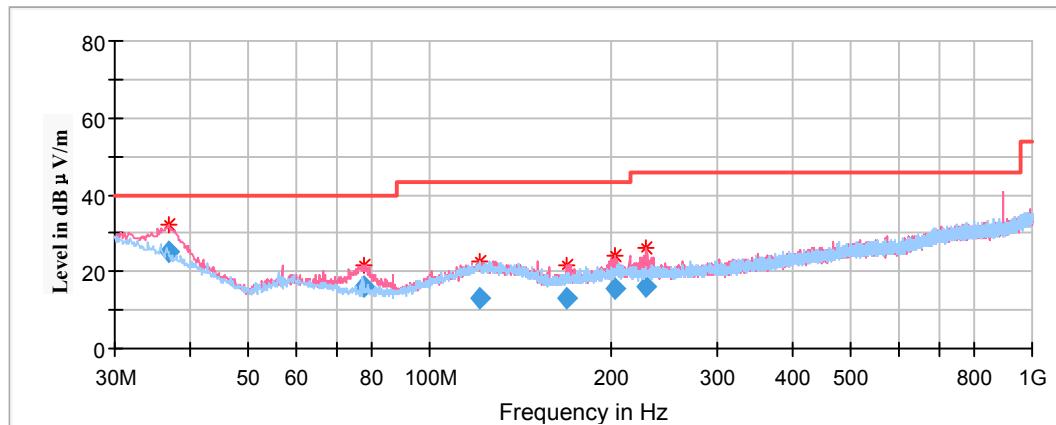
Date: 20.JUL.2021 00:44:43

Vertical

Date: 20.JUL.2021 00:49:45

Series Model: 9290030092**30MHz-1GHz:**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in the Y axis of orientation** was recorded)

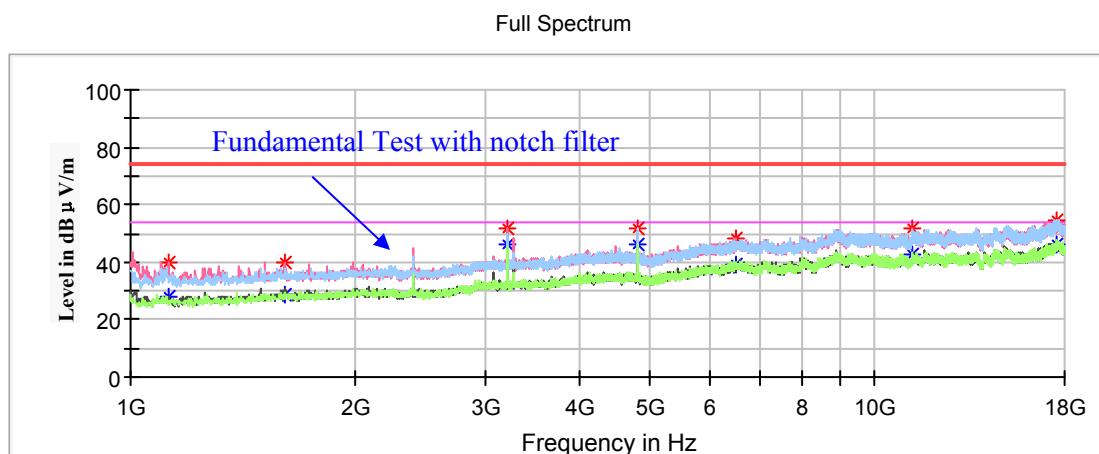


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
36.790900	24.97	100.0	V	157.0	-7.5	40.00	15.03
77.658500	16.24	100.0	V	0.0	-17.1	40.00	23.76
120.815950	13.30	199.0	H	86.0	-10.9	43.50	30.20
168.718200	13.10	100.0	V	184.0	-13.8	43.50	30.40
202.534550	15.49	100.0	V	0.0	-12.0	43.50	28.01
229.215150	16.35	200.0	V	30.0	-12.0	46.00	29.65

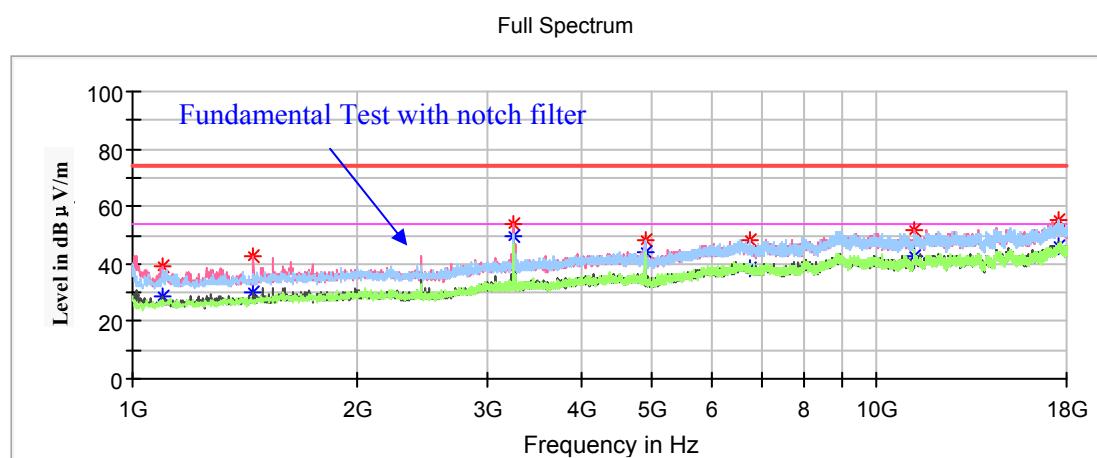
1GHz-18GHz:(Pre-scan in the X, Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded)

Note:

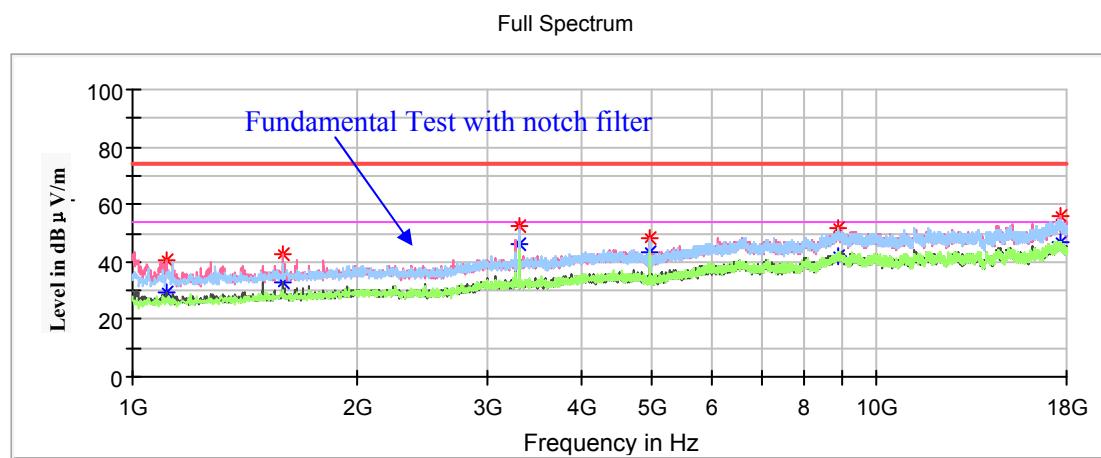
1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2402MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1124.100000	---	28.30	150.0	V	343.0	-8.4	54.00	25.70
1124.100000	39.81	---	150.0	V	343.0	-8.4	74.00	34.19
1608.600000	---	29.00	200.0	V	280.0	-6.1	54.00	25.00
1608.600000	39.83	---	200.0	V	280.0	-6.1	74.00	34.17
3201.500000	---	46.48	150.0	V	19.0	-1.9	54.00	7.52
3201.500000	51.61	---	150.0	V	19.0	-1.9	74.00	22.39
4804.000000	51.92	---	150.0	H	243.0	0.6	74.00	22.08
4804.000000	---	46.02	150.0	H	243.0	0.6	54.00	7.98
6506.300000	---	39.02	200.0	V	30.0	5.4	54.00	14.98
6506.300000	48.35	---	200.0	V	30.0	5.4	74.00	25.65
11256.100000	---	42.89	150.0	V	124.0	10.1	54.00	11.11
11256.100000	51.99	---	150.0	V	124.0	10.1	74.00	22.01
17558.000000	---	46.48	200.0	V	216.0	14.3	54.00	7.52
17558.000000	54.67	---	200.0	V	216.0	14.3	74.00	19.33

Middle Channel: 2440MHz

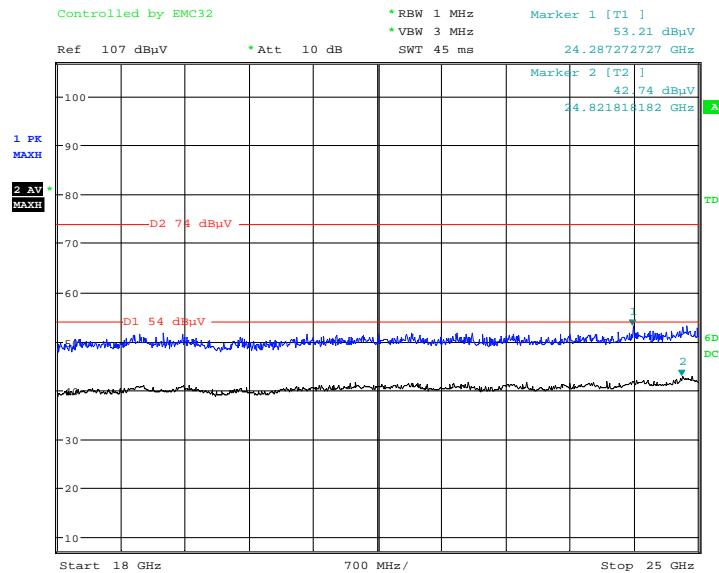
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1095.200000	---	28.45	150.0	V	31.0	-8.6	54.00	25.55
1095.200000	39.15	---	150.0	V	31.0	-8.6	74.00	34.85
1453.900000	---	30.34	150.0	V	282.0	-6.7	54.00	23.66
1453.900000	42.43	---	150.0	V	282.0	-6.7	74.00	31.57
3252.500000	53.61	---	150.0	V	242.0	-1.9	74.00	20.39
3252.500000	---	49.88	150.0	V	242.0	-1.9	54.00	4.12
4880.000000	48.47	---	200.0	H	230.0	0.5	74.00	25.53
4880.000000	---	44.26	200.0	H	230.0	0.5	54.00	9.74
6740.900000	---	38.12	150.0	H	151.0	5.6	54.00	15.88
6740.900000	48.04	---	150.0	H	151.0	5.6	74.00	25.96
11252.700000	---	42.46	200.0	H	85.0	10.1	54.00	11.54
11252.700000	51.96	---	200.0	H	85.0	10.1	74.00	22.04
17571.600000	---	46.17	200.0	V	82.0	14.3	54.00	7.83
17571.600000	55.24	---	200.0	V	82.0	14.3	74.00	18.76

High Channel: 2480MHz

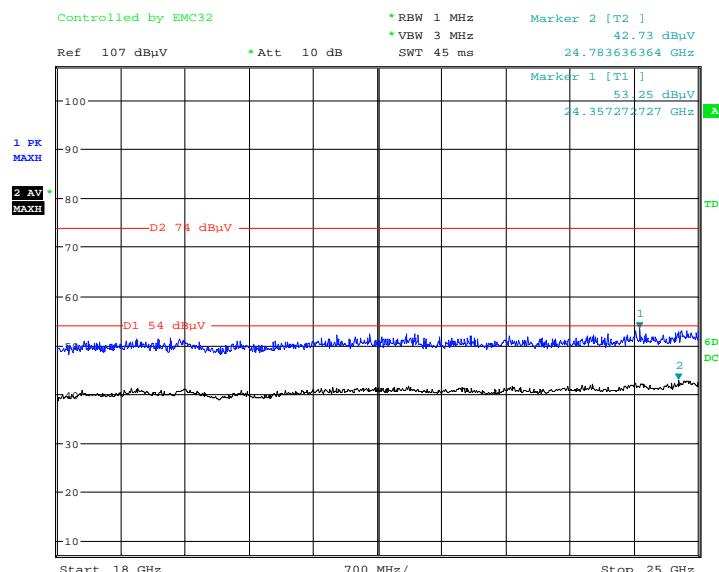
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1112.200000	---	29.38	200.0	V	15.0	-8.5	54.00	24.62
1112.200000	40.82	---	200.0	V	15.0	-8.5	74.00	33.18
1595.000000	---	32.96	150.0	V	272.0	-6.2	54.00	21.04
1595.000000	42.89	---	150.0	V	272.0	-6.2	74.00	31.11
3305.200000	---	46.05	200.0	V	233.0	-1.8	54.00	7.95
3305.200000	52.64	---	200.0	V	233.0	-1.8	74.00	21.36
4960.000000	---	43.25	150.0	H	224.0	0.3	54.00	10.75
4960.000000	48.45	---	150.0	H	224.0	0.3	74.00	25.55
8898.200000	---	42.30	150.0	H	95.0	9.1	54.00	11.70
8898.200000	51.57	---	150.0	H	95.0	9.1	74.00	22.43
17629.400000	---	46.93	200.0	V	82.0	14.1	54.00	7.07
17629.400000	56.07	---	200.0	V	82.0	14.1	74.00	17.93

18GHz-25GHz:

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in Y-axis of orientation** was recorded)

Horizontal

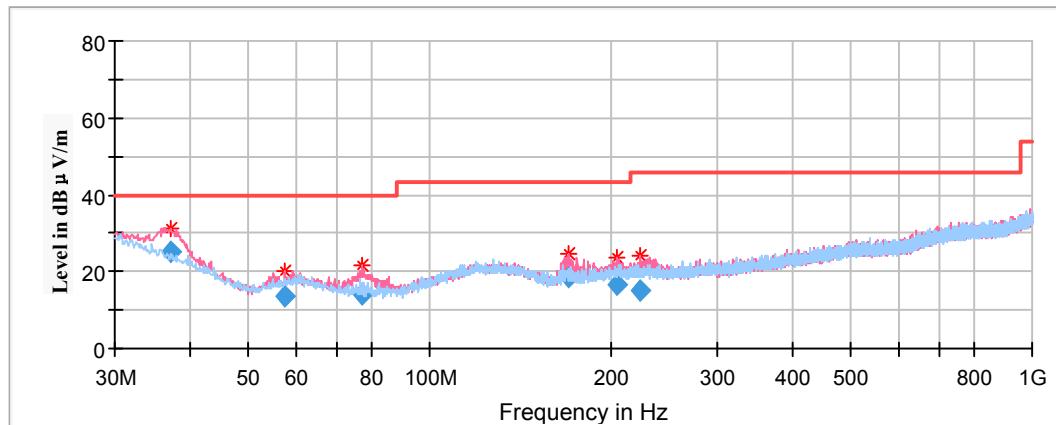
Date: 20.JUL.2021 00:55:53

Vertical

Date: 20.JUL.2021 01:00:27

Series Model: 9290030093**30MHz-1GHz:**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in the Y axis of orientation** was recorded)

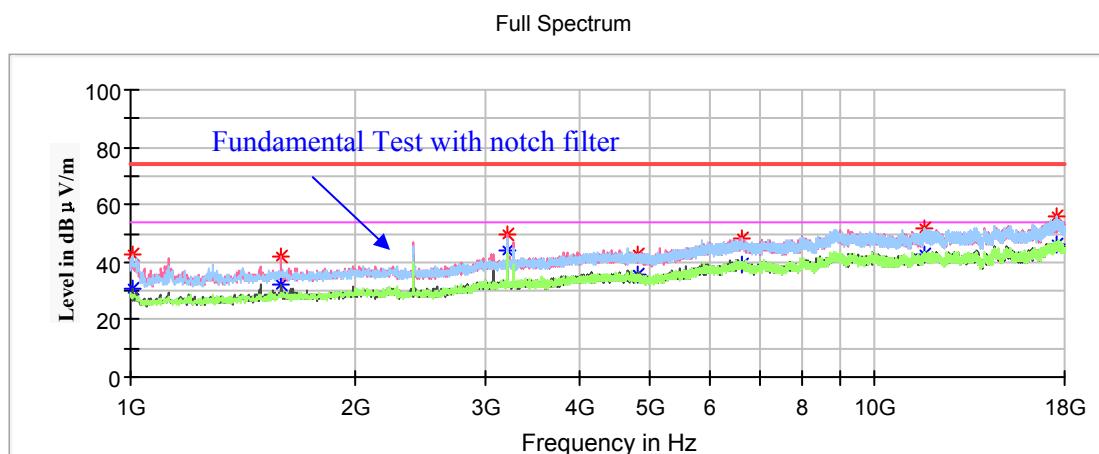


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
37.033000	25.06	100.0	V	193.0	-8.2	40.00	14.94
57.403600	13.39	200.0	V	131.0	-15.2	40.00	26.61
77.160650	13.90	100.0	V	18.0	-17.1	40.00	26.10
169.432000	18.45	100.0	V	236.0	-13.8	43.50	25.05
203.996950	16.39	100.0	V	62.0	-12.0	43.50	27.11
223.514000	15.22	200.0	V	294.0	-12.0	46.00	30.78

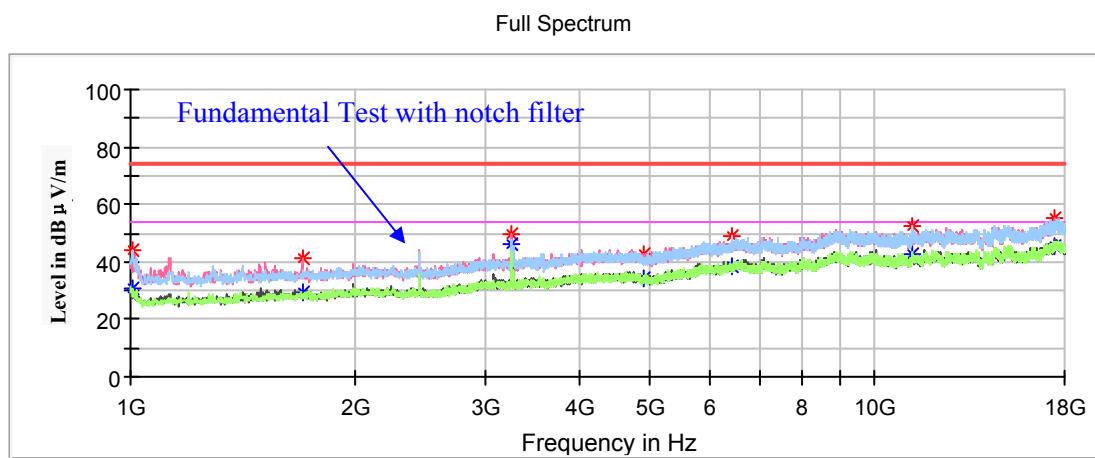
1GHz-18GHz:(Pre-scan in the X, Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded)

Note:

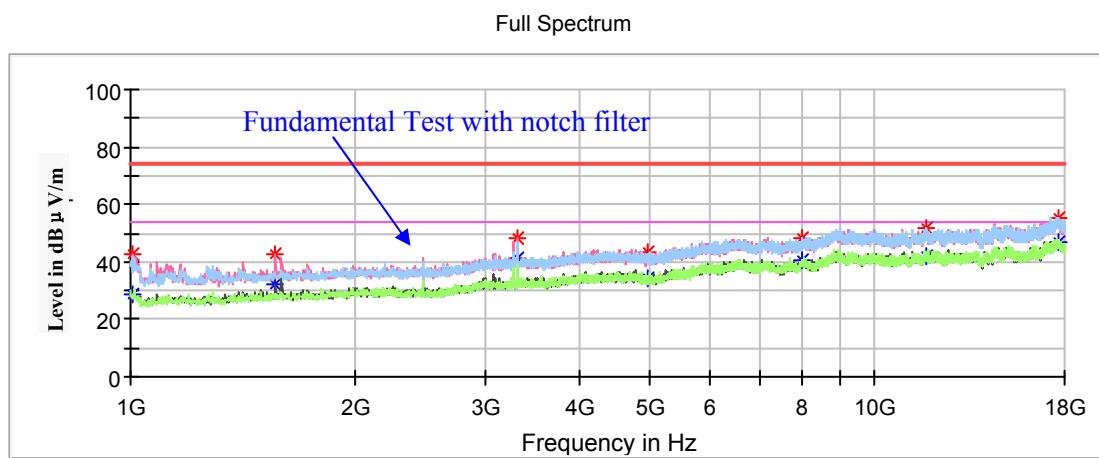
1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2402MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1006.800000	---	30.49	150.0	V	170.0	-9.0	54.00	23.51
1006.800000	42.52	---	150.0	V	170.0	-9.0	74.00	31.48
1595.000000	42.27	---	200.0	V	284.0	-6.2	74.00	31.73
1595.000000	---	32.02	200.0	V	220.0	-6.2	54.00	21.98
3201.500000	---	44.02	150.0	V	309.0	-1.9	54.00	9.98
3201.500000	49.87	---	150.0	V	309.0	-1.9	74.00	24.13
4804.000000	42.88	---	200.0	H	244.0	0.6	74.00	31.12
4804.000000	---	35.65	200.0	H	244.0	0.6	54.00	18.35
6638.900000	---	39.32	150.0	V	233.0	5.5	54.00	14.68
6638.900000	48.49	---	150.0	V	233.0	5.5	74.00	25.51
11648.800000	---	42.59	200.0	H	358.0	10.4	54.00	11.41
11648.800000	51.49	---	200.0	H	358.0	10.4	74.00	22.51
17518.900000	---	46.48	150.0	H	217.0	14.4	54.00	7.52
17518.900000	55.87	---	150.0	H	217.0	14.4	74.00	18.13

Middle Channel: 2440MHz

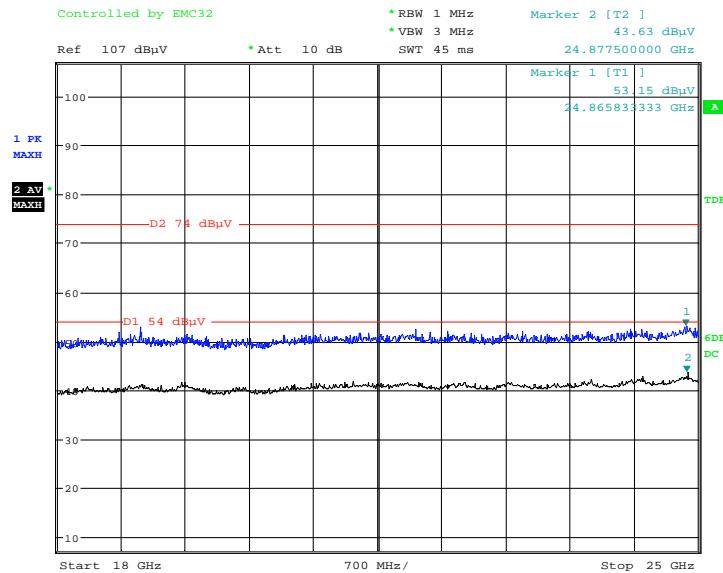
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1003.400000	---	30.91	150.0	H	110.0	-9.0	54.00	23.09
1003.400000	43.73	---	150.0	H	110.0	-9.0	74.00	30.27
1700.400000	---	29.51	200.0	V	301.0	-5.8	54.00	24.49
1700.400000	41.38	---	200.0	V	301.0	-5.8	74.00	32.62
3252.500000	49.56	---	150.0	V	288.0	-1.9	74.00	24.44
3252.500000	---	45.81	150.0	V	288.0	-1.9	54.00	8.19
4880.000000	---	34.33	150.0	H	21.0	0.5	54.00	19.67
4880.000000	42.71	---	150.0	H	21.0	0.5	74.00	31.29
6440.000000	---	38.52	200.0	V	288.0	5.3	54.00	15.48
6440.000000	48.61	---	200.0	V	288.0	5.3	74.00	25.39
11213.600000	---	42.75	150.0	V	263.0	10.1	54.00	11.25
11213.600000	52.52	---	150.0	V	263.0	10.1	74.00	21.48
17503.600000	---	45.44	200.0	V	160.0	14.4	54.00	8.56
17503.600000	55.41	---	200.0	V	160.0	14.4	74.00	18.59

High Channel: 2480MHz

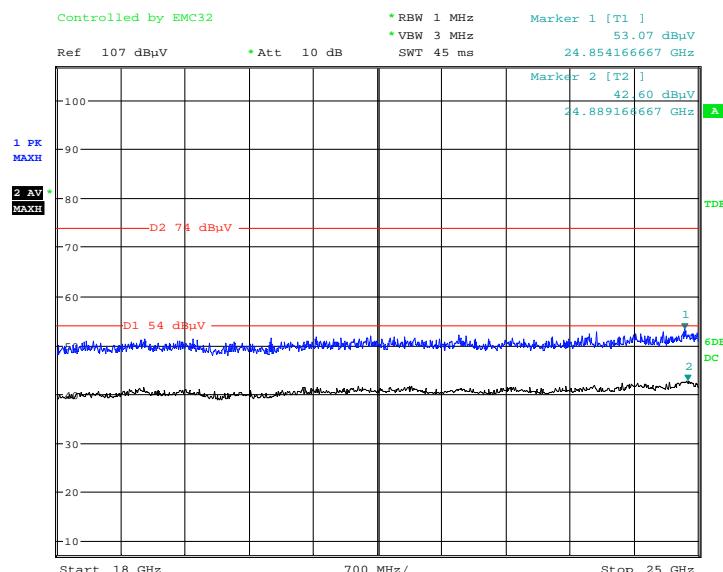
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1006.800000	---	28.82	150.0	V	172.0	-9.0	54.00	25.18
1006.800000	42.78	---	150.0	V	172.0	-9.0	74.00	31.22
1567.800000	---	32.49	200.0	V	248.0	-6.3	54.00	21.51
1567.800000	42.63	---	200.0	V	248.0	-6.3	74.00	31.37
3305.200000	---	40.97	150.0	V	223.0	-1.8	54.00	13.03
3305.200000	48.58	---	150.0	V	223.0	-1.8	74.00	25.42
4960.000000	---	34.42	150.0	V	348.0	0.3	54.00	19.58
4960.000000	43.02	---	150.0	V	348.0	0.3	74.00	30.98
7998.900000	---	40.73	200.0	V	356.0	6.1	54.00	13.27
7998.900000	48.56	---	200.0	V	356.0	6.1	74.00	25.44
11738.900000	---	41.76	150.0	H	190.0	10.3	54.00	12.24
11738.900000	51.92	---	150.0	H	190.0	10.3	74.00	22.08
17627.700000	---	46.53	200.0	V	16.0	14.1	54.00	7.47
17627.700000	55.22	---	200.0	V	16.0	14.1	74.00	18.78

18GHz-25GHz:

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in Y-axis of orientation** was recorded)

Horizontal

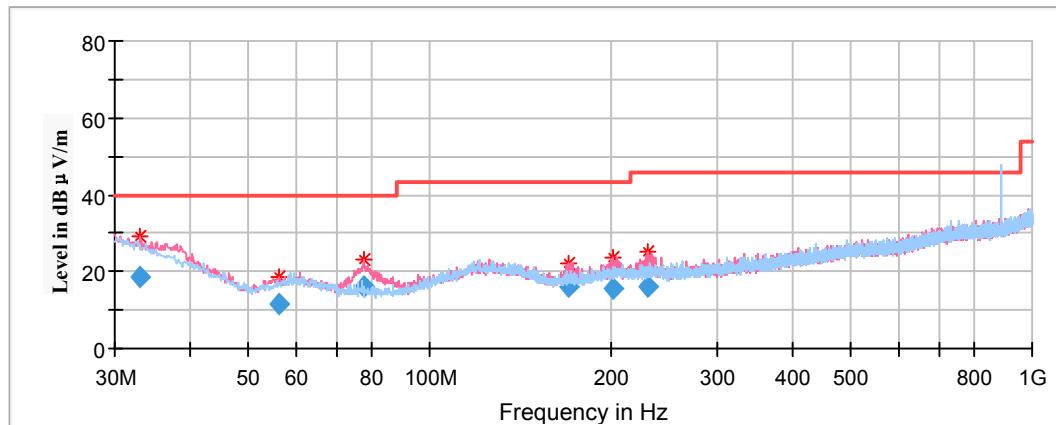
Date: 20.JUL.2021 01:07:37

Vertical

Date: 20.JUL.2021 01:12:44

Series Model: 9290030094**30MHz-1GHz:**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in the Y axis of orientation** was recorded)

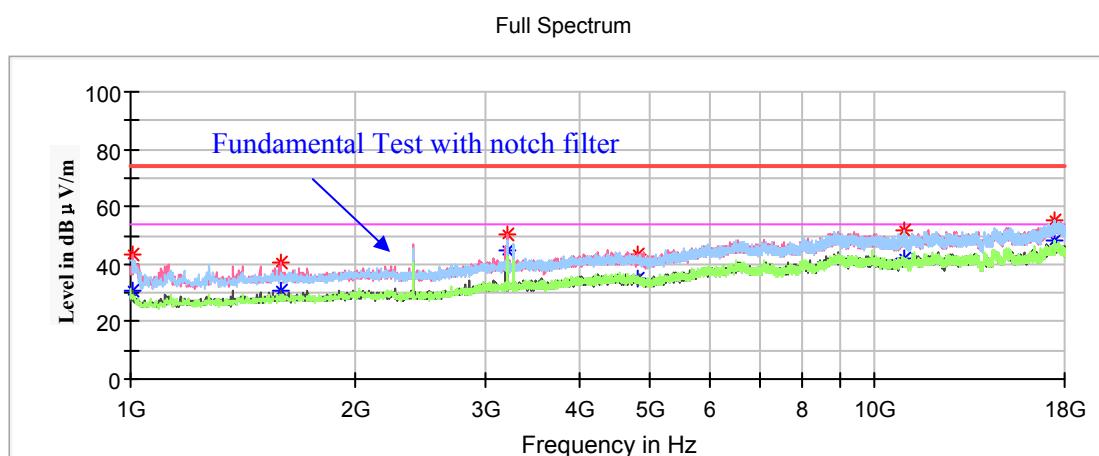


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	Quasi-peak (dB μ V/m)	Height (cm)	Polar (H/V)				
33.034450	18.42	100.0	V	7.0	-5.5	40.00	21.58
56.315250	11.63	100.0	V	136.0	-15.8	40.00	28.37
77.532000	15.89	100.0	V	296.0	-17.1	40.00	24.11
170.046450	15.85	100.0	V	87.0	-13.8	43.50	27.65
201.440500	15.41	100.0	V	104.0	-12.0	43.50	28.09
229.336000	16.03	100.0	V	60.0	-12.0	46.00	29.97

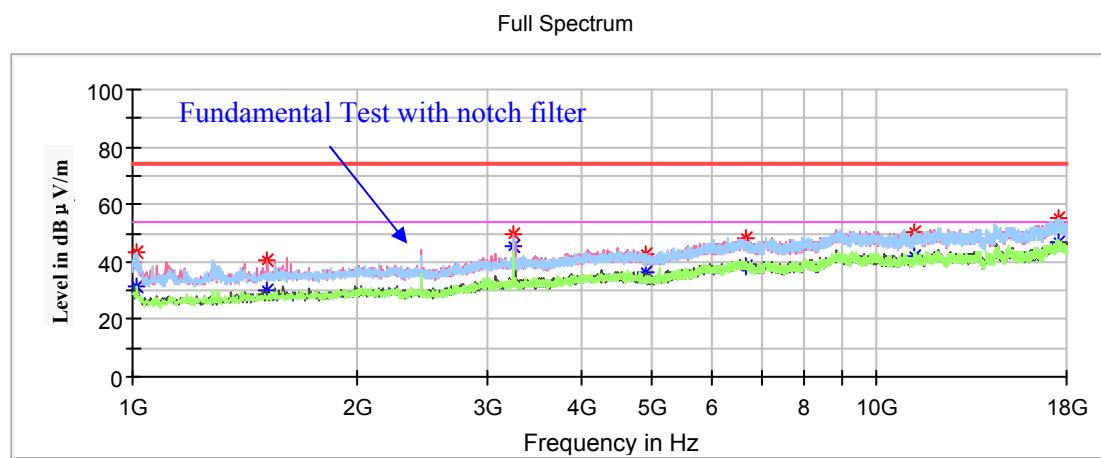
1GHz-18GHz:(Pre-scan in the X,Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded)

Note:

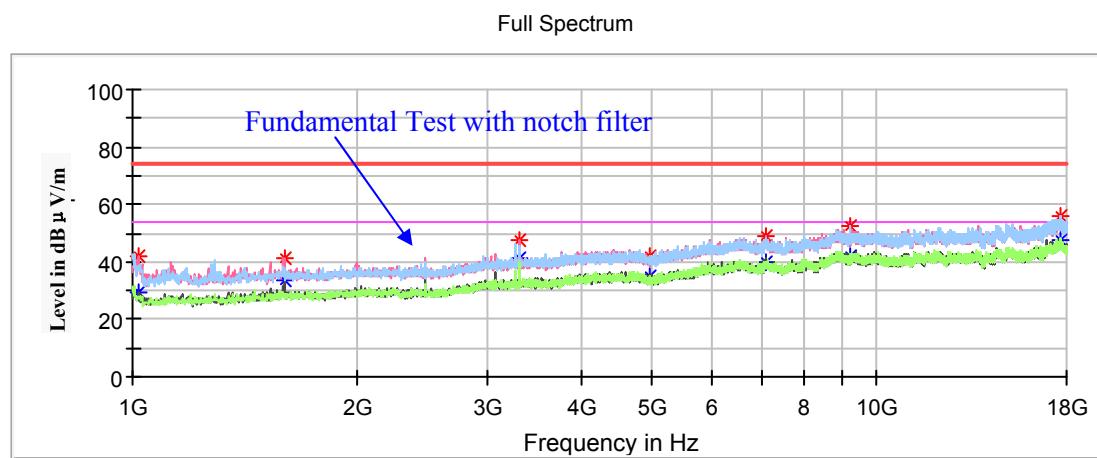
1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2402MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1005.100000	---	30.80	150.0	V	161.0	-9.0	54.00	23.20
1005.100000	43.22	---	150.0	V	161.0	-9.0	74.00	30.78
1593.300000	---	30.44	200.0	V	251.0	-6.2	54.00	23.56
1593.300000	40.79	---	200.0	V	251.0	-6.2	74.00	33.21
3201.500000	---	44.90	150.0	V	289.0	-1.9	54.00	9.10
3201.500000	50.32	---	150.0	V	289.0	-1.9	74.00	23.68
4804.000000	---	34.93	150.0	V	0.0	0.6	54.00	19.07
4804.000000	43.60	---	150.0	V	0.0	0.6	74.00	30.40
10926.300000	---	41.95	150.0	H	268.0	9.5	54.00	12.05
10926.300000	51.53	---	150.0	H	268.0	9.5	74.00	22.47
17490.000000	---	47.90	200.0	H	124.0	14.4	54.00	6.10
17490.000000	55.32	---	200.0	H	124.0	14.4	74.00	18.68

Middle Channel: 2440MHz

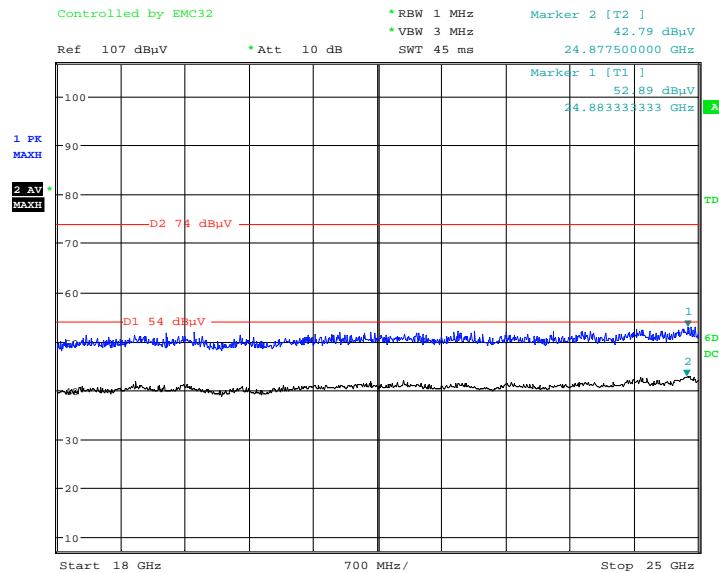
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1015.300000	43.53	---	200.0	H	112.0	-9.0	74.00	30.47
1015.300000	---	31.15	200.0	H	112.0	-9.0	54.00	22.85
1518.500000	---	30.41	200.0	V	268.0	-6.4	54.00	23.59
1518.500000	40.80	---	200.0	V	268.0	-6.4	74.00	33.20
3252.500000	---	45.58	150.0	V	306.0	-1.9	54.00	8.42
3252.500000	49.69	---	150.0	V	306.0	-1.9	74.00	24.31
4880.000000	---	36.24	150.0	V	166.0	0.5	54.00	17.76
4880.000000	42.72	---	150.0	V	166.0	0.5	74.00	31.28
6678.000000	---	38.33	200.0	H	0.0	5.5	54.00	15.67
6678.000000	48.33	---	200.0	H	0.0	5.5	74.00	25.67
11205.100000	---	42.09	150.0	H	61.0	10.0	54.00	11.91
11205.100000	50.54	---	150.0	H	61.0	10.0	74.00	23.46
17544.400000	---	46.82	200.0	V	358.0	14.3	54.00	7.18
17544.400000	55.38	---	200.0	V	358.0	14.3	74.00	18.62

High Channel: 2480MHz

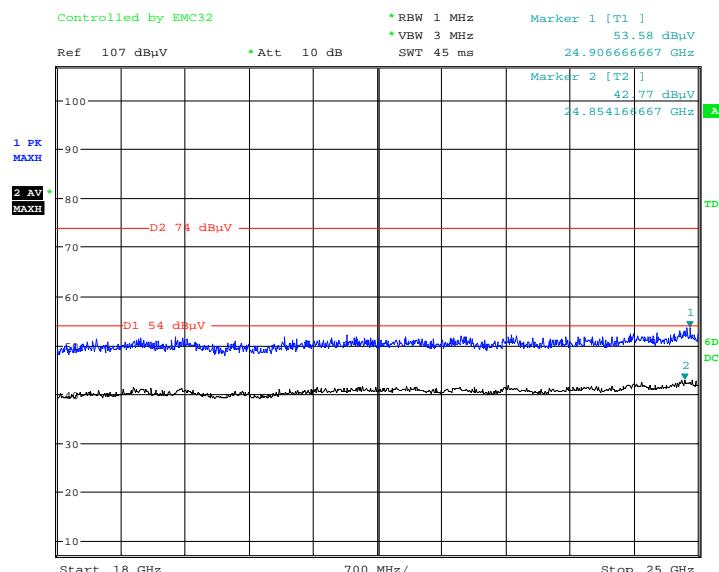
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1018.700000	---	29.51	150.0	V	165.0	-9.0	54.00	24.49
1018.700000	41.93	---	150.0	V	165.0	-9.0	74.00	32.07
1598.400000	---	33.62	200.0	V	293.0	-6.2	54.00	20.38
1598.400000	41.57	---	200.0	V	293.0	-6.2	74.00	32.43
3305.200000	---	41.25	150.0	V	280.0	-1.8	54.00	12.75
3305.200000	47.84	---	150.0	V	280.0	-1.8	74.00	26.16
4960.000000	---	34.91	150.0	H	3.0	0.3	54.00	19.09
4960.000000	41.74	---	150.0	H	3.0	0.3	74.00	32.26
7087.700000	---	39.92	200.0	V	119.0	5.5	54.00	14.08
7087.700000	49.21	---	200.0	V	119.0	5.5	74.00	24.79
9233.100000	---	41.95	150.0	H	353.0	9.3	54.00	12.05
9233.100000	52.44	---	150.0	H	353.0	9.3	74.00	21.56
17639.600000	---	47.21	200.0	H	160.0	14.1	54.00	6.79
17639.600000	56.24	---	200.0	H	160.0	14.1	74.00	17.76

18GHz-25GHz:

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in Y-axis of orientation** was recorded)

Horizontal

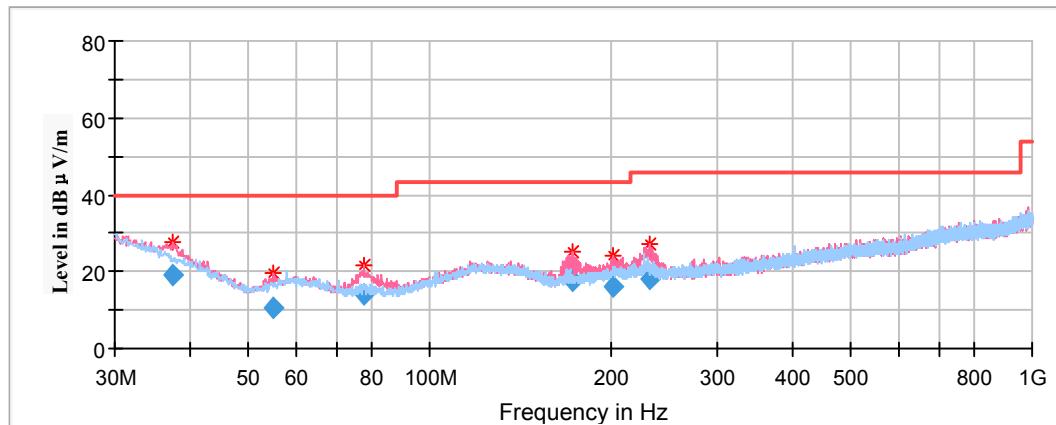
Date: 20.JUL.2021 01:18:15

Vertical

Date: 20.JUL.2021 01:23:43

Series Model: 9290030095**30MHz-1GHz:**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in the Y axis of orientation** was recorded)

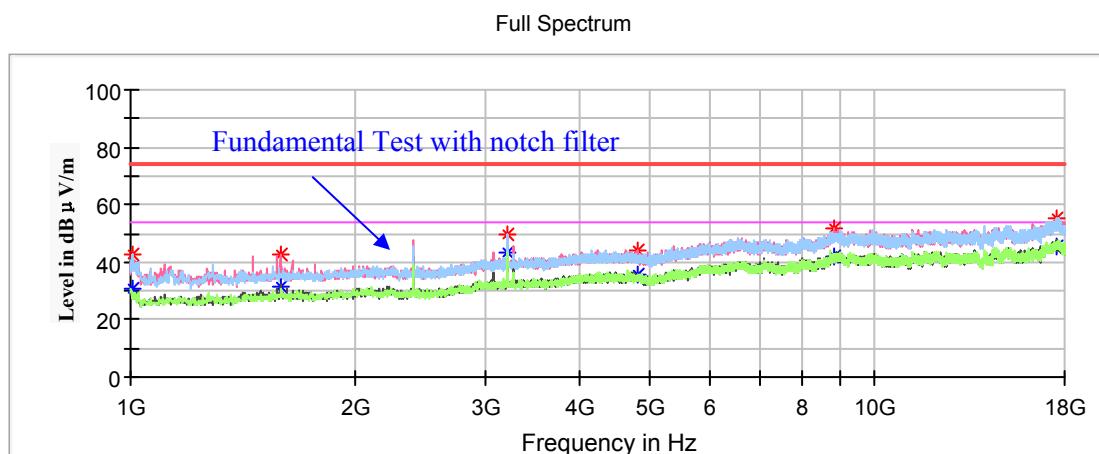


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
37.519000	18.95	100.0	V	207.0	-9.4	40.00	21.05
55.090050	10.76	100.0	V	306.0	-15.8	40.00	29.24
77.662500	14.05	100.0	V	174.0	-17.1	40.00	25.95
172.340200	17.79	100.0	V	273.0	-13.7	43.50	25.71
202.171800	16.31	100.0	V	59.0	-12.0	43.50	27.19
231.151550	18.24	200.0	V	121.0	-12.0	46.00	27.76

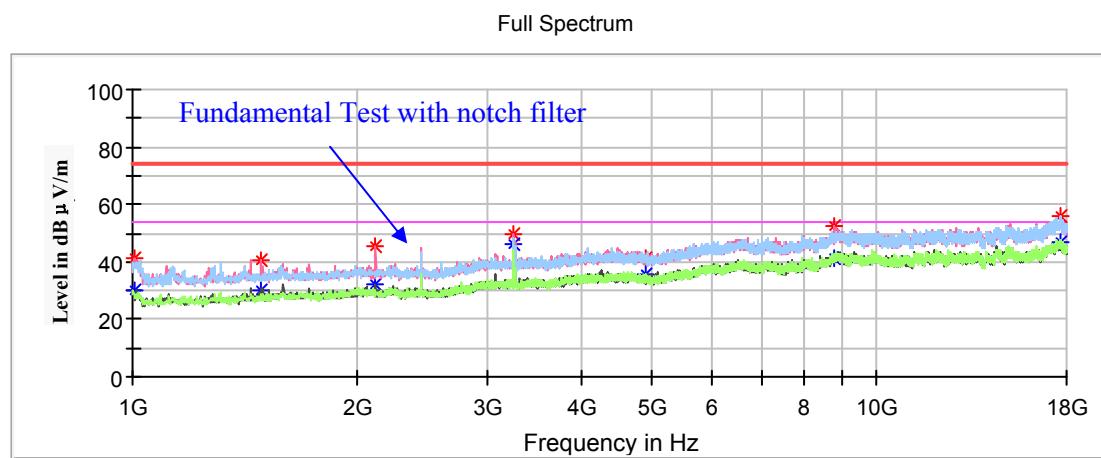
1GHz-18GHz:(Pre-scan in the X,Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded)

Note:

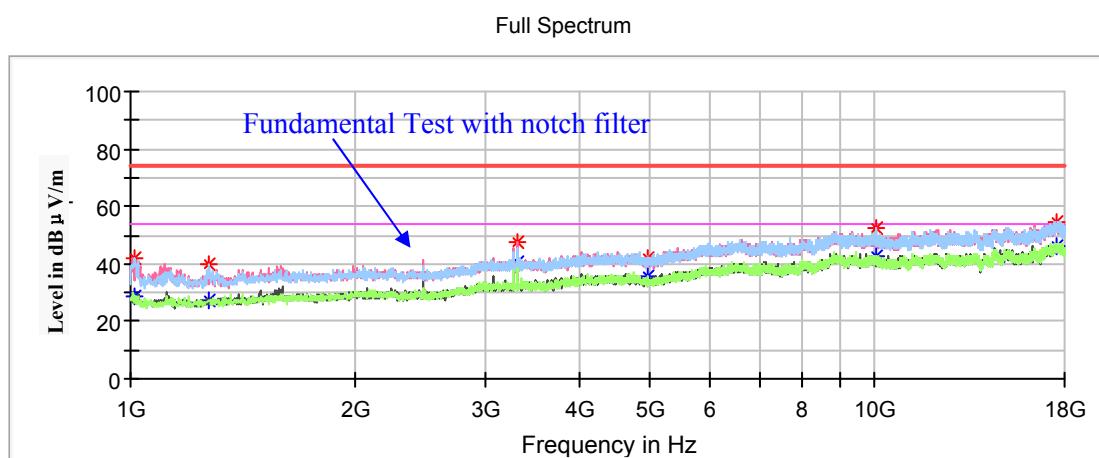
1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2402MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1003.400000	---	30.76	200.0	H	97.0	-9.0	54.00	23.24
1003.400000	42.41	---	200.0	H	97.0	-9.0	74.00	31.59
1588.200000	---	31.39	200.0	V	285.0	-6.2	54.00	22.61
1588.200000	42.79	---	200.0	V	285.0	-6.2	74.00	31.21
3201.500000	---	43.50	200.0	V	246.0	-1.9	54.00	10.50
3201.500000	49.40	---	200.0	V	246.0	-1.9	74.00	24.60
4804.000000	---	35.70	150.0	V	8.0	0.6	54.00	18.30
4804.000000	44.09	---	150.0	V	8.0	0.6	74.00	29.91
8840.400000	---	42.07	150.0	V	196.0	8.9	54.00	11.93
8840.400000	51.50	---	150.0	V	196.0	8.9	74.00	22.50
17597.100000	---	45.28	200.0	H	10.0	14.2	54.00	8.72
17597.100000	55.18	---	200.0	H	10.0	14.2	74.00	18.82

Middle Channel: 2440MHz

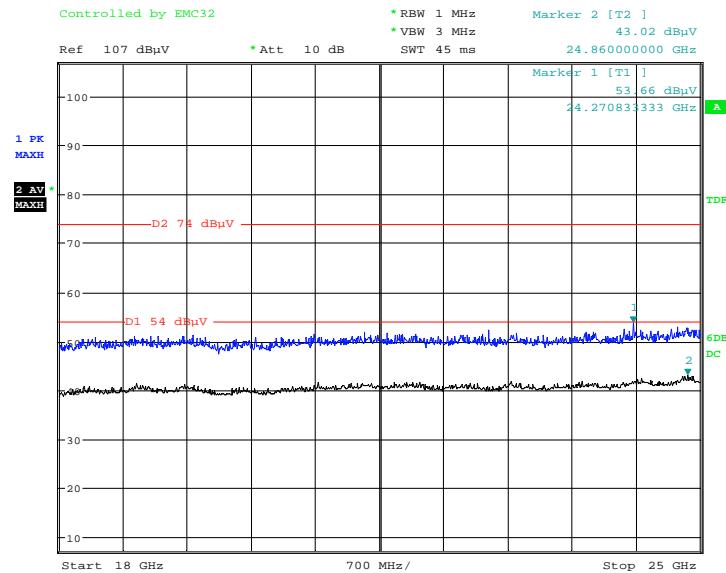
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1003.400000	---	30.07	200.0	H	126.0	-9.0	54.00	23.93
1003.400000	41.59	---	200.0	H	126.0	-9.0	74.00	32.41
1486.200000	---	29.99	150.0	V	260.0	-6.6	54.00	24.01
1486.200000	40.38	---	150.0	V	260.0	-6.6	74.00	33.62
2123.700000	45.37	---	150.0	V	299.0	-4.7	74.00	28.63
2123.700000	---	32.44	150.0	V	299.0	-4.7	54.00	21.56
3252.500000	---	45.92	150.0	V	286.0	-1.9	54.00	8.08
3252.500000	49.74	---	150.0	V	286.0	-1.9	74.00	24.26
4880.000000	---	35.45	200.0	V	154.0	0.5	54.00	18.55
4880.000000	41.45	---	200.0	V	154.0	0.5	74.00	32.55
8765.600000	---	41.20	150.0	V	114.0	8.5	54.00	12.80
8765.600000	52.18	---	150.0	V	114.0	8.5	74.00	21.82
17666.800000	---	46.88	200.0	V	0.0	14.0	54.00	7.12
17666.800000	55.87	---	200.0	V	0.0	14.0	74.00	18.13

High Channel: 2480MHz

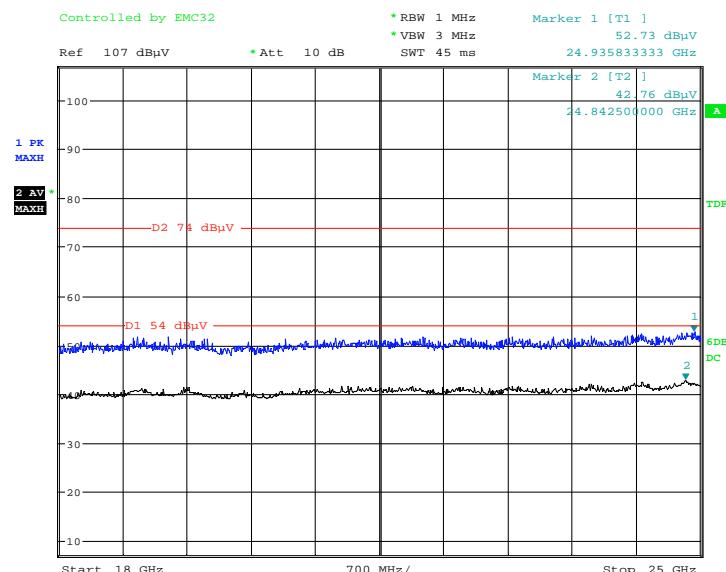
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1013.600000	41.79	---	200.0	H	109.0	-9.0	74.00	32.21
1013.600000	---	28.92	200.0	H	109.0	-9.0	54.00	25.08
1277.100000	---	27.25	150.0	H	282.0	-7.6	54.00	26.75
1277.100000	39.65	---	150.0	H	282.0	-7.6	74.00	34.35
3305.200000	---	40.85	200.0	V	311.0	-1.8	54.00	13.15
3305.200000	47.40	---	200.0	V	311.0	-1.8	74.00	26.60
4960.000000	42.14	---	150.0	V	298.0	0.3	74.00	31.86
4960.000000	---	35.88	150.0	V	298.0	0.3	54.00	18.12
10040.600000	---	42.70	150.0	H	296.0	8.7	54.00	11.30
10040.600000	52.78	---	150.0	H	296.0	8.7	74.00	21.22
17576.700000	---	46.11	200.0	V	184.0	14.3	54.00	7.89
17576.700000	54.87	---	200.0	V	184.0	14.3	74.00	19.13

18GHz-25GHz:

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in Y-axis of orientation** was recorded)

Horizontal

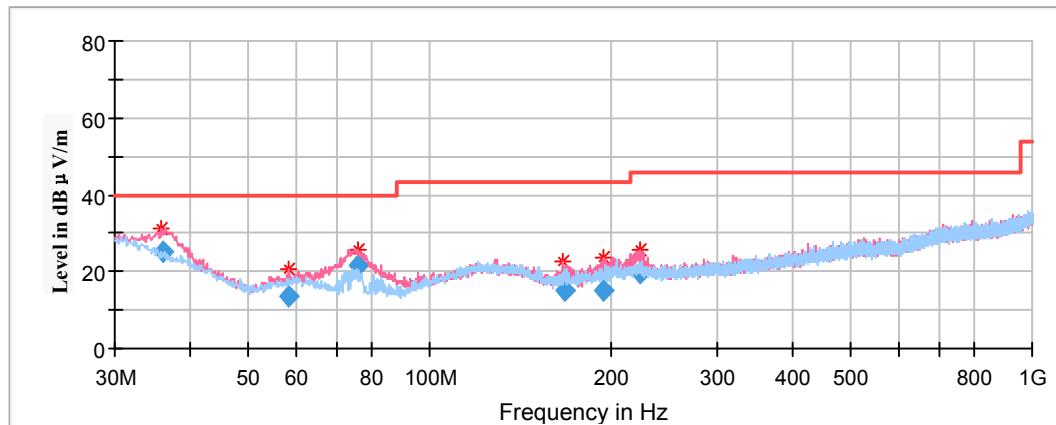
Date: 20.JUL.2021 01:30:11

Vertical

Date: 20.JUL.2021 01:36:20

Series Model: 9290030097**30MHz-1GHz:**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in the Y axis of orientation** was recorded)

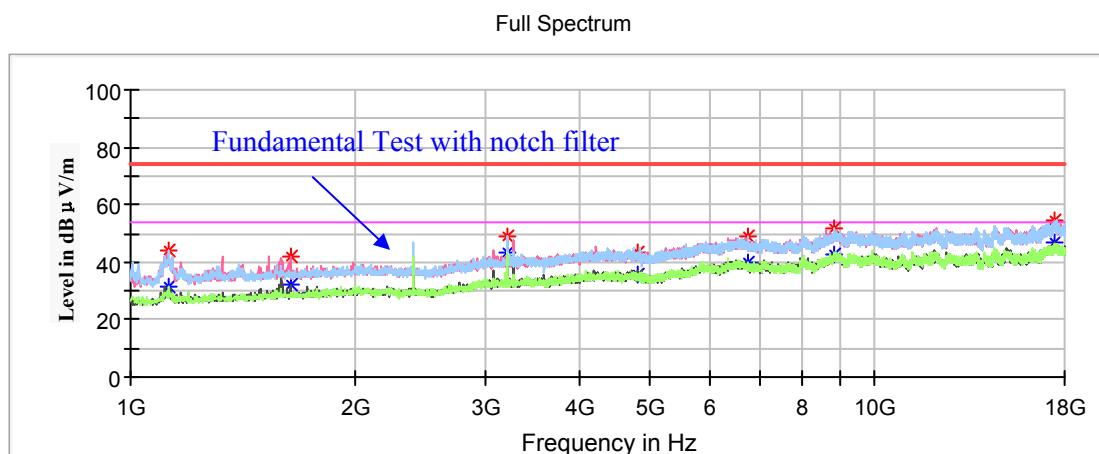


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
35.949500	25.36	100.0	V	275.0	-7.9	40.00	14.64
58.493550	13.47	100.0	V	89.0	-14.7	40.00	26.53
75.842900	21.52	100.0	V	247.0	-17.0	40.00	18.48
166.945550	15.30	100.0	V	50.0	-13.9	43.50	28.20
193.962200	15.11	100.0	V	36.0	-12.4	43.50	28.39
223.322950	19.82	200.0	V	42.0	-12.0	46.00	26.18

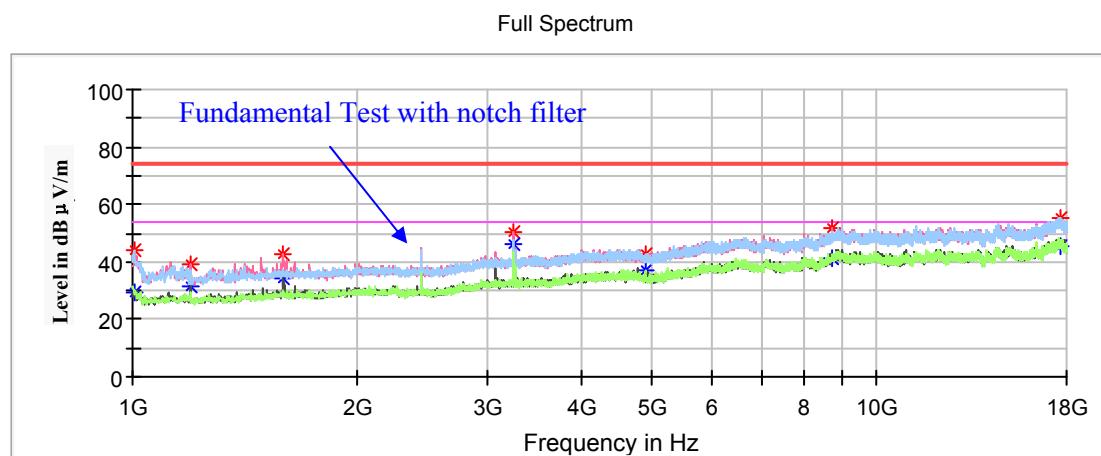
1GHz-18GHz:(Pre-scan in the X,Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded)

Note:

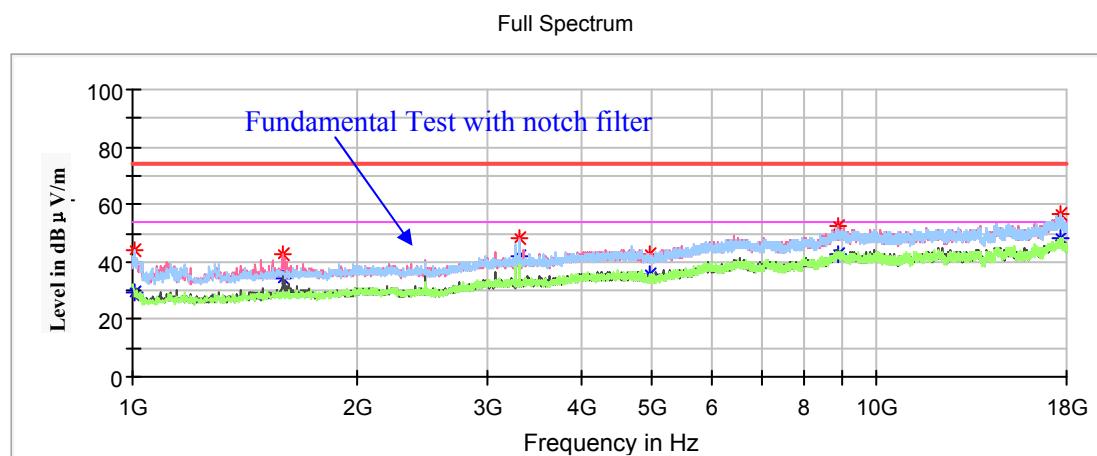
1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2402MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1124.100000	44.27	---	150.0	H	225.0	-8.4	74.00	29.73
1124.100000	---	31.23	150.0	H	225.0	-8.4	54.00	22.77
1637.500000	---	32.01	200.0	V	296.0	-6.1	54.00	21.99
1637.500000	42.23	---	200.0	V	296.0	-6.1	74.00	31.77
3201.500000	---	43.18	150.0	H	10.0	-1.9	54.00	10.82
3201.500000	48.61	---	150.0	H	10.0	-1.9	74.00	25.39
4804.000000	---	35.51	150.0	V	263.0	0.6	54.00	18.49
4804.000000	43.53	---	150.0	V	263.0	0.6	74.00	30.47
6764.700000	---	39.76	200.0	H	259.0	5.6	54.00	14.24
6764.700000	48.67	---	200.0	H	259.0	5.6	74.00	25.33
8803.000000	---	42.37	200.0	H	351.0	8.7	54.00	11.63
8803.000000	51.87	---	200.0	H	351.0	8.7	74.00	22.13
17450.900000	---	46.59	200.0	V	256.0	14.3	54.00	7.41
17450.900000	54.26	---	200.0	V	256.0	14.3	74.00	19.74

Middle Channel: 2440MHz

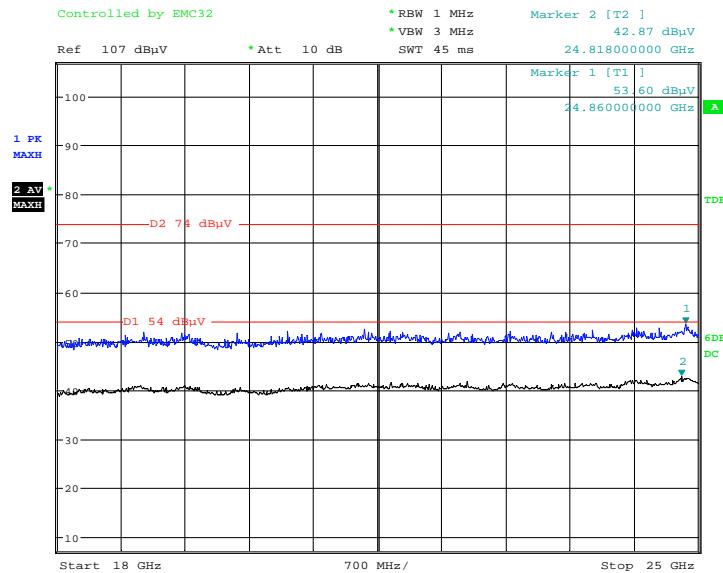
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1003.400000	---	29.65	150.0	H	101.0	-9.0	54.00	24.35
1003.400000	44.24	---	150.0	H	101.0	-9.0	74.00	29.76
1198.900000	---	31.40	200.0	V	310.0	-8.0	54.00	22.60
1198.900000	39.33	---	200.0	V	310.0	-8.0	74.00	34.67
1595.000000	---	34.29	150.0	V	277.0	-6.2	54.00	19.71
1595.000000	42.51	---	150.0	V	277.0	-6.2	74.00	31.49
3252.500000	50.00	---	150.0	V	316.0	-1.9	74.00	24.00
3252.500000	---	45.98	150.0	V	316.0	-1.9	54.00	8.02
4880.000000	---	36.97	200.0	H	225.0	0.5	54.00	17.03
4880.000000	42.88	---	200.0	H	225.0	0.5	74.00	31.12
8697.600000	---	41.49	150.0	V	303.0	8.3	54.00	12.51
8697.600000	51.93	---	150.0	V	303.0	8.3	74.00	22.07
17670.200000	---	45.74	200.0	H	357.0	14.0	54.00	8.26
17670.200000	55.20	---	200.0	H	357.0	14.0	74.00	18.80

High Channel: 2480MHz

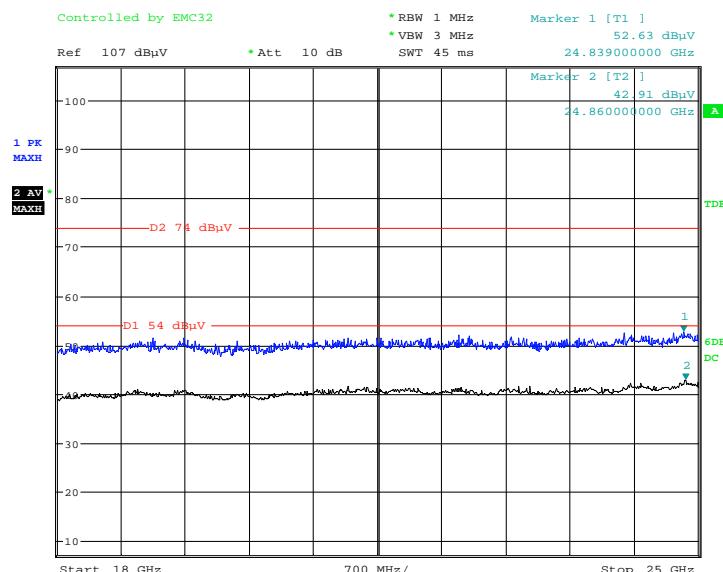
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1005.100000	43.97	---	150.0	H	109.0	-9.0	74.00	30.03
1005.100000	---	29.69	150.0	H	109.0	-9.0	54.00	24.31
1593.300000	---	34.59	150.0	V	252.0	-6.2	54.00	19.41
1593.300000	42.85	---	150.0	V	252.0	-6.2	74.00	31.15
3305.200000	---	41.68	150.0	V	303.0	-1.8	54.00	12.32
3305.200000	48.43	---	150.0	V	303.0	-1.8	74.00	25.57
4960.000000	---	35.96	200.0	H	233.0	0.3	54.00	18.04
4960.000000	42.91	---	200.0	H	233.0	0.3	74.00	31.09
8872.700000	---	42.56	150.0	V	170.0	9.0	54.00	11.44
8872.700000	52.17	---	150.0	V	170.0	9.0	74.00	21.83
17665.100000	56.36	---	200.0	H	0.0	14.1	74.00	17.64
17665.100000	---	48.46	200.0	H	0.0	14.1	54.00	5.54

18GHz-25GHz:

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in Y-axis of orientation** was recorded)

Horizontal

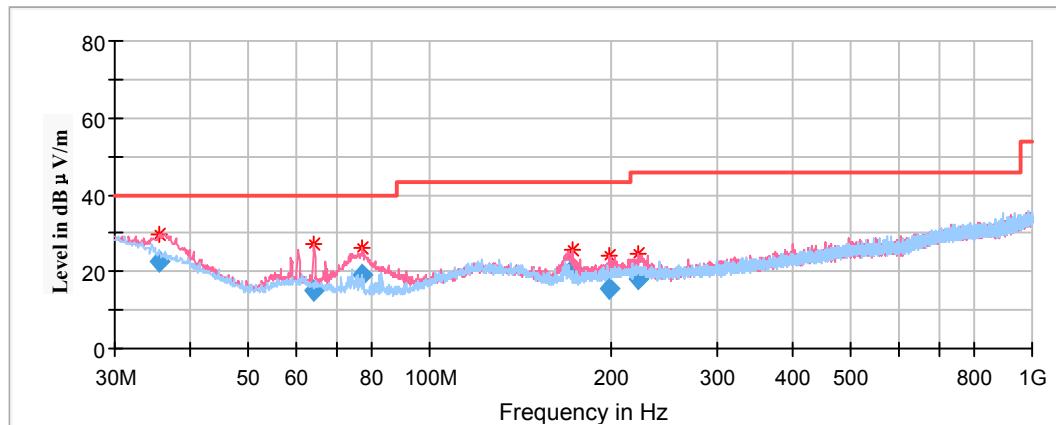
Date: 20.JUL.2021 01:53:32

Vertical

Date: 20.JUL.2021 01:57:26

Series Model: 9290030098**30MHz-1GHz:**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in the Y axis of orientation** was recorded)

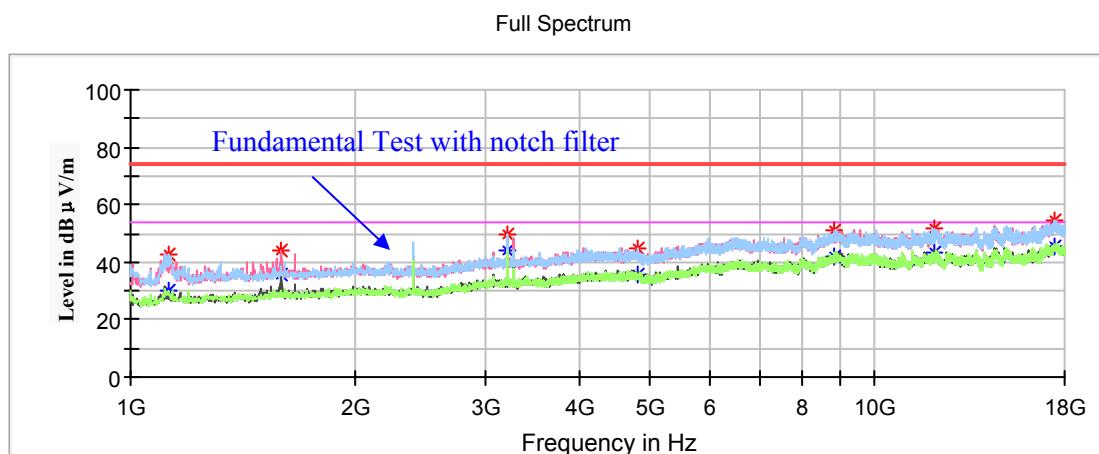


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
35.573800	22.80	100.0	V	94.0	-6.6	40.00	17.20
64.316095	14.95	100.0	V	166.0	-15.7	40.00	25.05
77.284100	19.24	200.0	V	145.0	-17.1	40.00	20.76
171.975000	20.54	100.0	V	236.0	-13.7	43.50	22.96
199.026600	15.69	100.0	V	307.0	-12.0	43.50	27.81
221.934350	18.27	100.0	V	105.0	-12.0	46.00	27.73

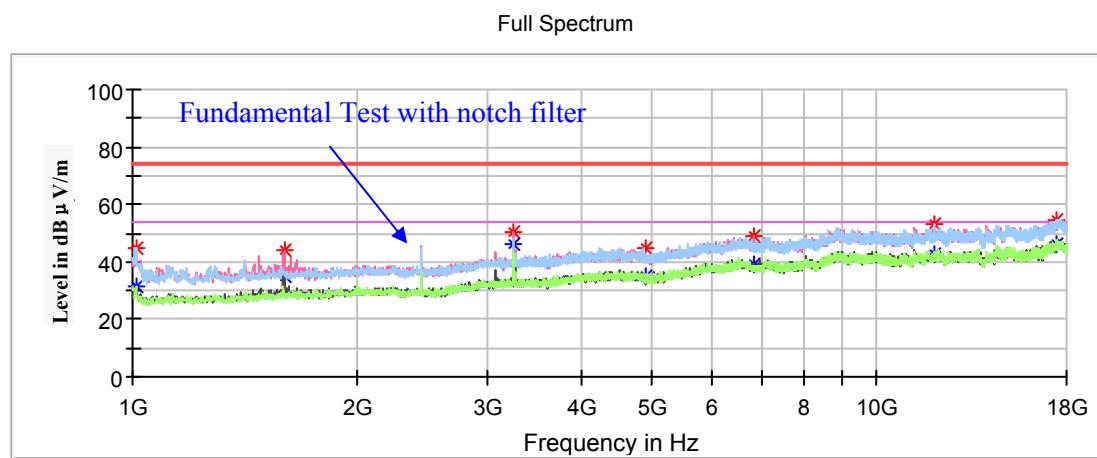
1GHz-18GHz:(Pre-scan in the X,Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded)

Note:

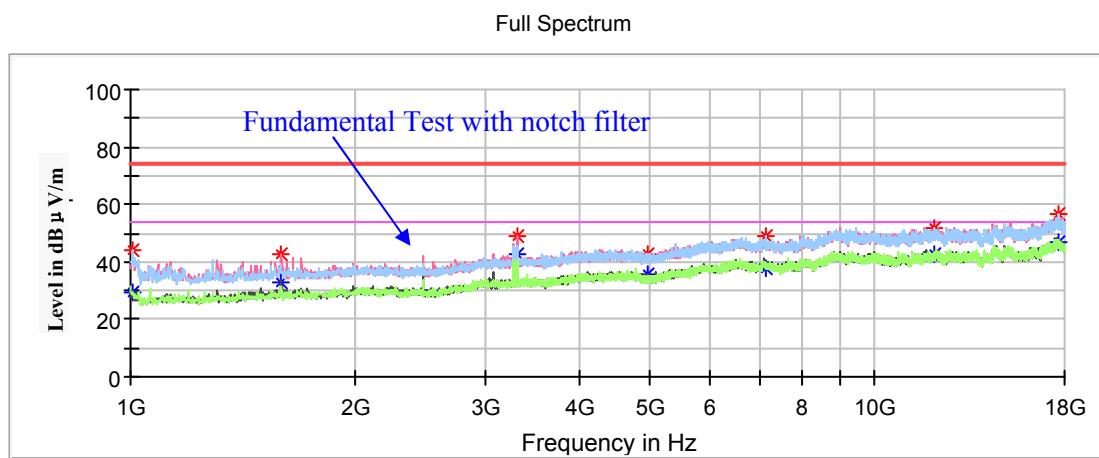
1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2402MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1124.100000	---	29.86	150.0	H	256.0	-8.4	54.00	24.14
1124.100000	42.92	---	150.0	H	256.0	-8.4	74.00	31.08
1596.700000	---	35.95	150.0	V	259.0	-6.2	54.00	18.05
1596.700000	44.29	---	150.0	V	259.0	-6.2	74.00	29.71
3201.500000	49.33	---	150.0	H	20.0	-1.9	74.00	24.67
3201.500000	---	44.27	150.0	H	20.0	-1.9	54.00	9.73
4804.000000	---	35.64	150.0	V	0.0	0.6	54.00	18.36
4804.000000	44.57	---	150.0	V	0.0	0.6	74.00	29.43
8797.900000	---	42.12	200.0	H	143.0	8.7	54.00	11.88
8797.900000	51.22	---	200.0	H	143.0	8.7	74.00	22.78
12063.600000	---	43.09	150.0	V	234.0	10.1	54.00	10.91
12063.600000	51.93	---	150.0	V	234.0	10.1	74.00	22.07
17440.700000	---	45.51	200.0	H	297.0	14.3	54.00	8.49
17440.700000	54.60	---	200.0	H	297.0	14.3	74.00	19.40

Middle Channel: 2440MHz

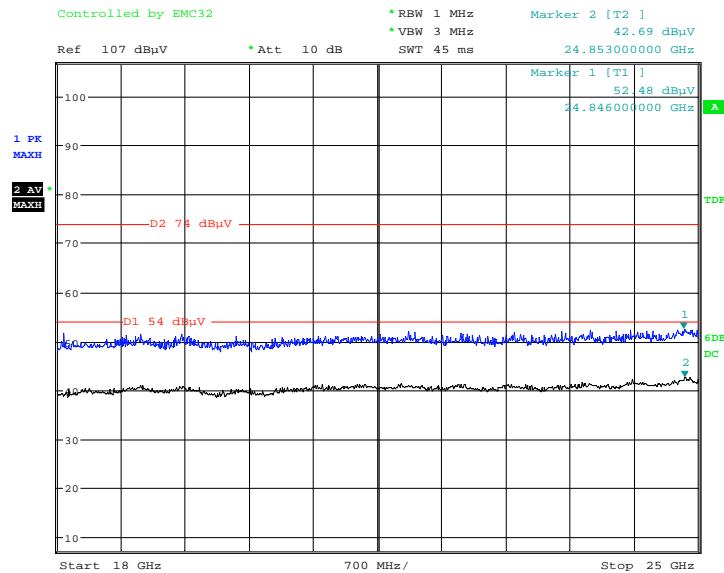
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1011.900000	---	31.12	200.0	H	214.0	-9.0	54.00	22.88
1011.900000	44.56	---	200.0	H	214.0	-9.0	74.00	29.44
1598.400000	---	34.95	200.0	V	269.0	-6.2	54.00	19.05
1598.400000	44.05	---	200.0	V	269.0	-6.2	74.00	29.95
3252.500000	---	46.09	150.0	V	300.0	-1.9	54.00	7.91
3252.500000	50.20	---	150.0	V	300.0	-1.9	74.00	23.80
4879.100000	---	34.63	150.0	H	190.0	0.5	54.00	19.37
4880.000000	44.47	---	150.0	H	190.0	0.5	74.00	29.53
4880.000000	---	38.90	200.0	V	19.0	5.6	54.00	15.10
6824.200000	48.87	---	200.0	V	19.0	5.6	74.00	25.13
11941.200000	---	42.92	200.0	H	265.0	10.1	54.00	11.08
11941.200000	53.22	---	200.0	H	265.0	10.1	74.00	20.78
17474.700000	---	46.40	200.0	H	0.0	14.4	54.00	7.60
17474.700000	54.86	---	200.0	H	0.0	14.4	74.00	19.14

High Channel: 2480MHz

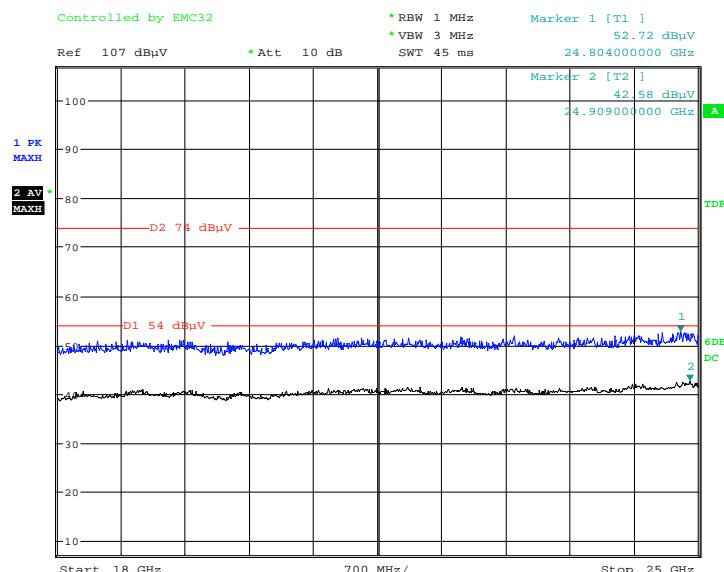
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1006.800000	---	29.21	150.0	V	166.0	-9.0	54.00	24.79
1006.800000	43.75	---	150.0	V	166.0	-9.0	74.00	30.25
1596.700000	---	33.01	200.0	V	243.0	-6.2	54.00	20.99
1596.700000	42.88	---	200.0	V	243.0	-6.2	74.00	31.12
3305.200000	---	42.72	150.0	V	305.0	-1.8	54.00	11.28
3305.200000	49.24	---	150.0	V	305.0	-1.8	74.00	24.76
4960.000000	---	35.65	200.0	V	73.0	0.3	54.00	18.35
4960.000000	42.80	---	200.0	V	73.0	0.3	74.00	31.20
7162.500000	---	37.99	200.0	H	208.0	5.4	54.00	16.01
7162.500000	49.28	---	200.0	H	208.0	5.4	74.00	24.72
12058.500000	---	42.99	200.0	H	0.0	10.1	54.00	11.01
12058.500000	52.08	---	200.0	H	0.0	10.1	74.00	21.92
17673.600000	---	47.01	200.0	V	177.0	14.0	54.00	6.99
17673.600000	56.44	---	200.0	V	177.0	14.0	74.00	17.56

18GHz-25GHz:

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in Y-axis of orientation** was recorded)

Horizontal

Date: 20.JUL.2021 02:03:42

Vertical

Date: 20.JUL.2021 02:08:45

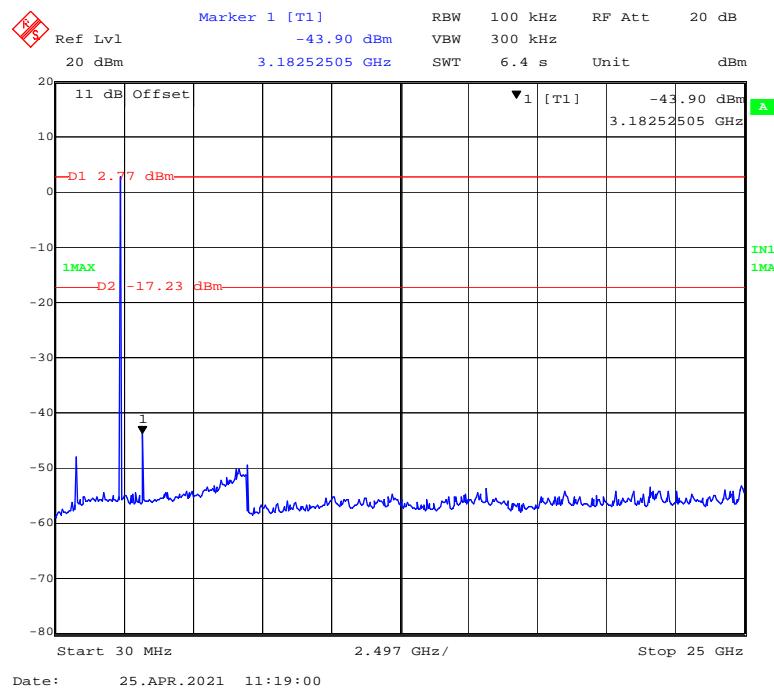
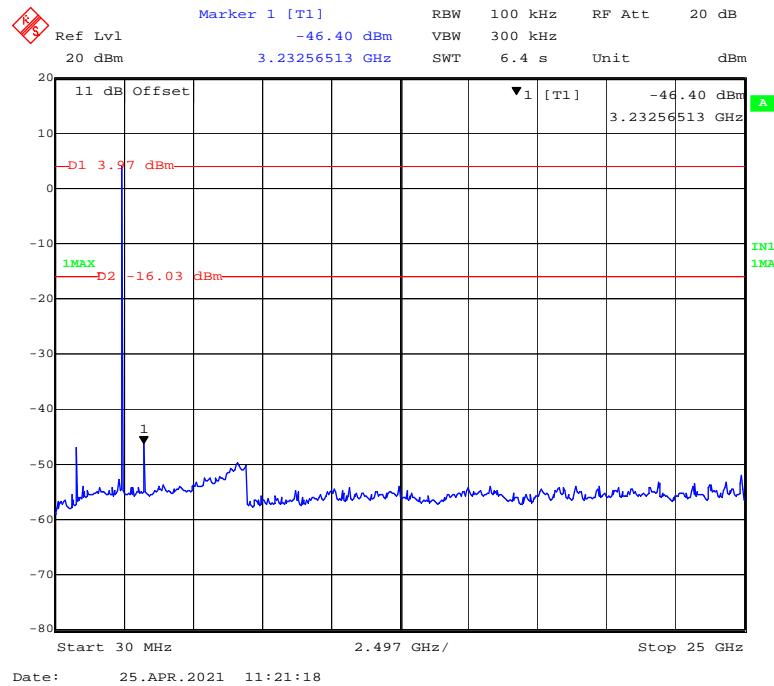
Tested Model:9290030096 (Worst case)**Restricted Bands Emissions Test:***(Pre-scan in the X,Y and Z axes of orientation, the worst case Y-axis of orientation was recorded.)*

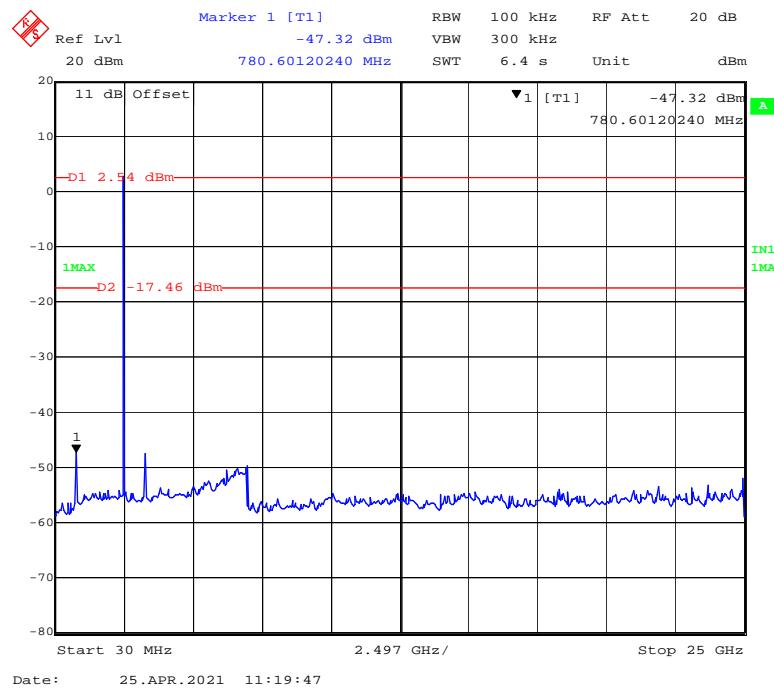
Note:

1. The test is performed with a 10dB Attenuator.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

BLE (1Mbps)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.00	49.90	---	150.0	H	20.0	3.8	74.00	24.10
2390.00	---	42.09	150.0	H	20.0	3.8	54.00	11.91
High Channel: 2480MHz								
2483.50	48.79	---	200.0	H	274.0	4.1	74.00	25.21
2483.50	---	43.55	200.0	H	274.0	4.1	54.00	10.45

Conducted Spurious Emissions at Antenna Port:**BLE (1Mbps)****Low Channel****Middle Channel**

High Channel

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	52 %
ATM Pressure:	101.6 kPa

The testing was performed by Miller Xie on 2021-04-25.

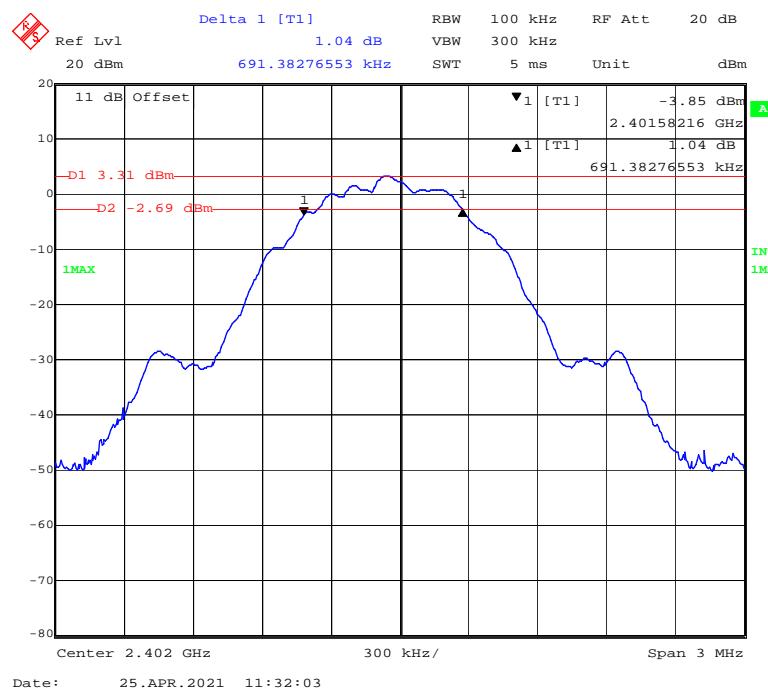
Test Result: Compliant.

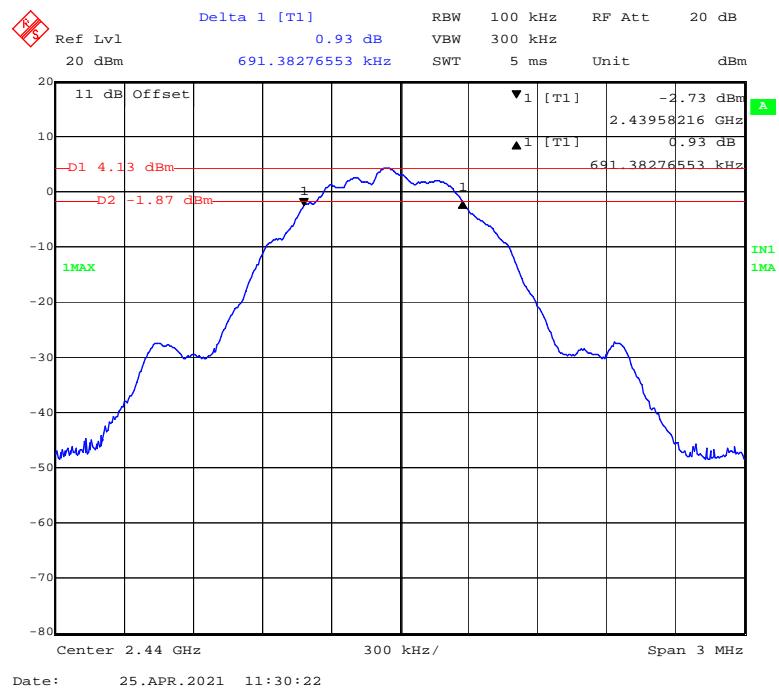
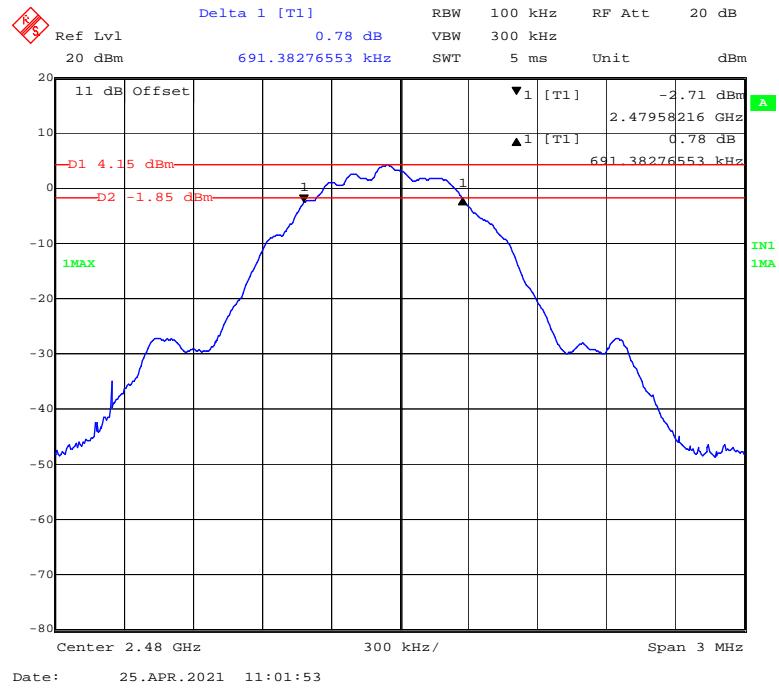
EUT operation mode: Transmitting

BLE (1Mbps)

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
Low	2402	0.691	≥ 0.5
Middle	2440	0.691	≥ 0.5
High	2480	0.691	≥ 0.5

Low Channel



Middle Channel**High Channel**

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.1

1. Set the RBW \geq DTS bandwidth.
2. Set VBW $\geq 3 * \text{RBW}$.
3. Set span $\geq 3 * \text{RBW}$
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



Test Data

Environmental Conditions

Temperature:	24.3 °C
Relative Humidity:	50 %
ATM Pressure:	102.3 kPa

The testing was performed by Miller Xie on 2021-04-25.

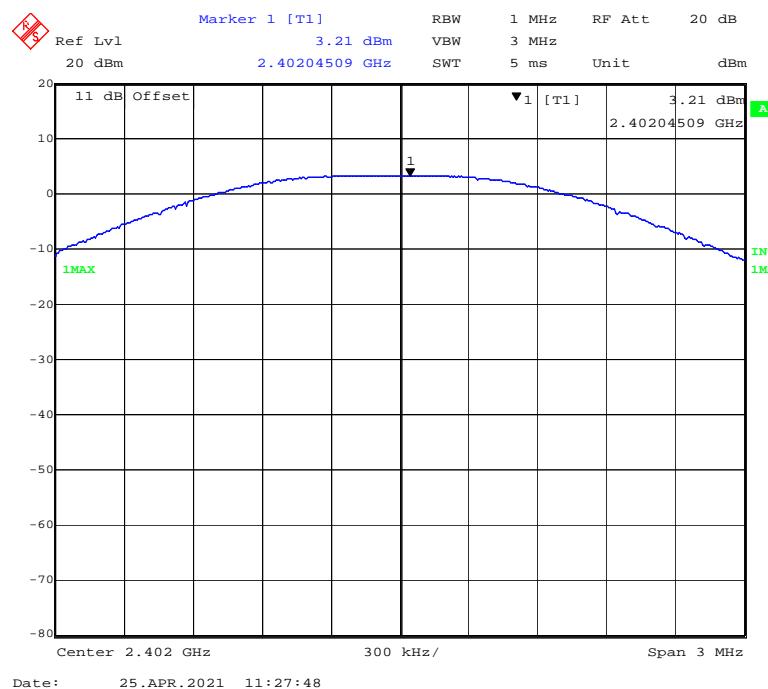
Test Result: Compliant.

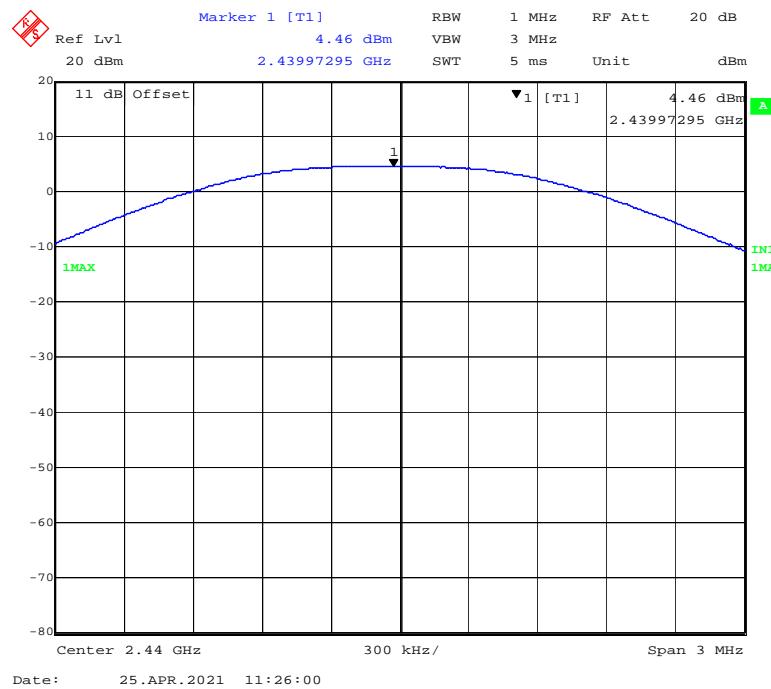
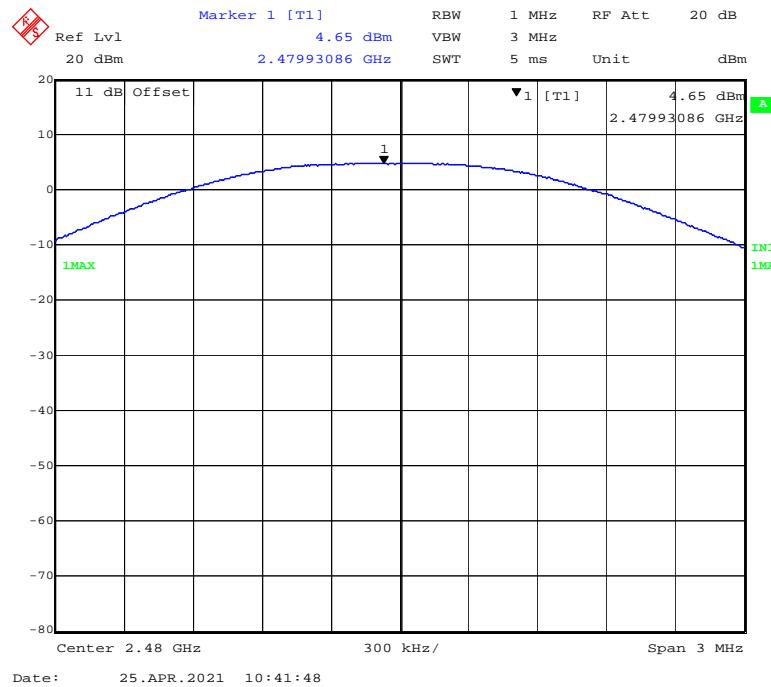
EUT operation mode: Transmitting

BLE (1Mbps)

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Low	2402	3.21	30	Pass
Middle	2440	4.46	30	Pass
High	2480	4.65	30	Pass

Low Channel



Middle Channel**High Channel**

FCC §15.247(d) – BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

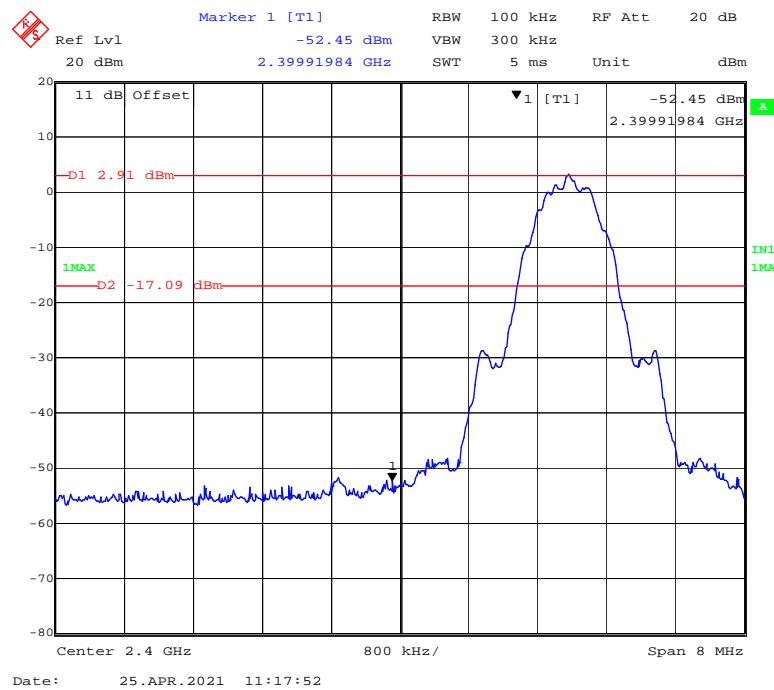
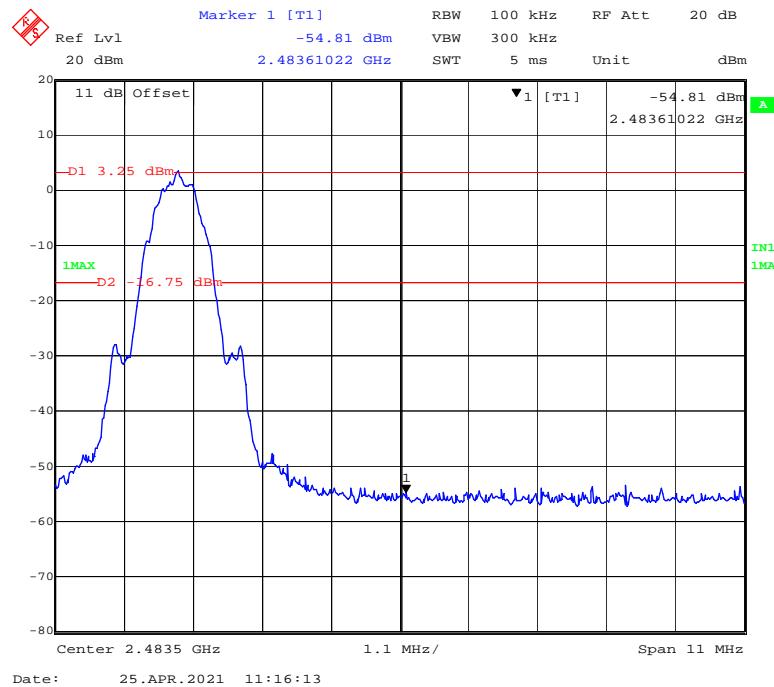
Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	52 %
ATM Pressure:	101.6 kPa

The testing was performed by Miller Xie on 2021-04-25.

Test Result: Compliant.

EUT operation mode: Transmitting

BLE (1Mbps):**Left Side****Right Side**

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 * \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	52 %
ATM Pressure:	101.6 kPa

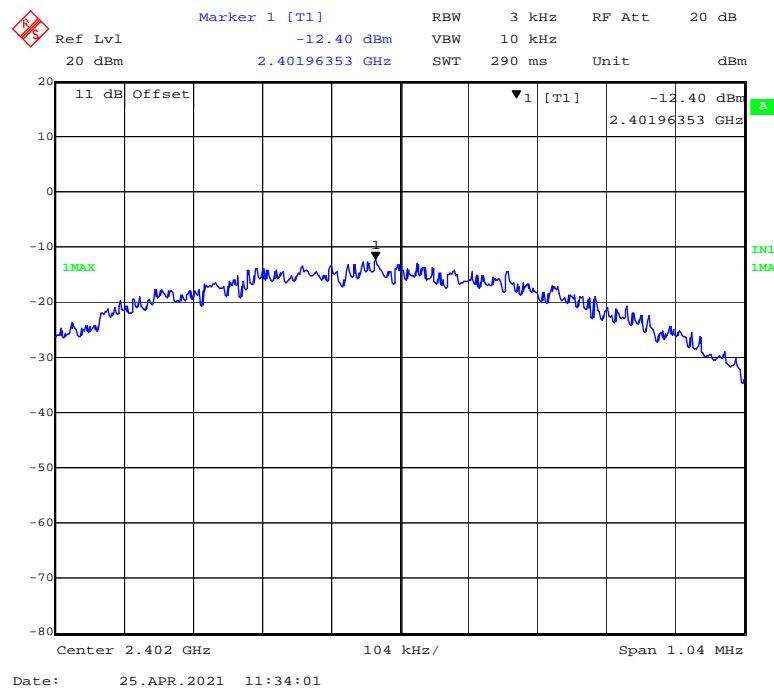
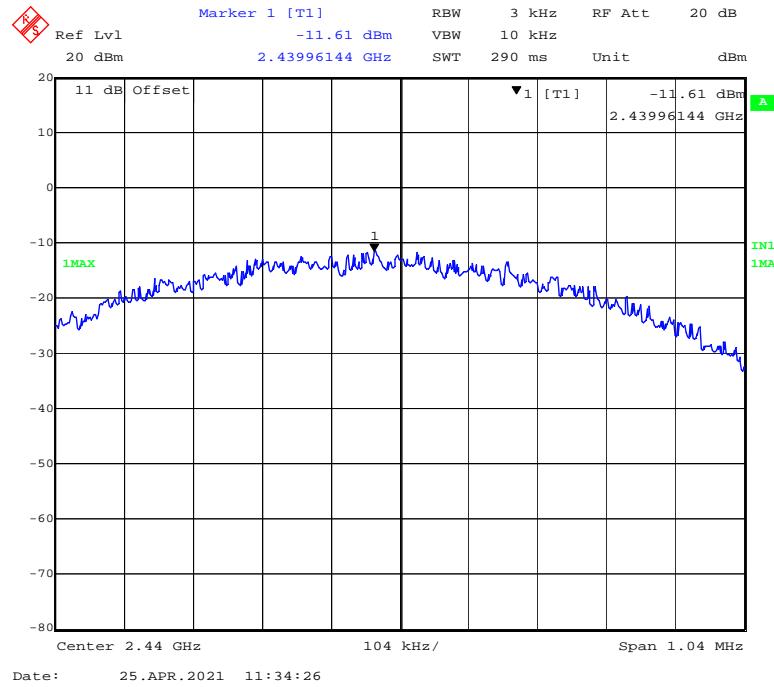
The testing was performed by Miller Xie on 2021-04-25.

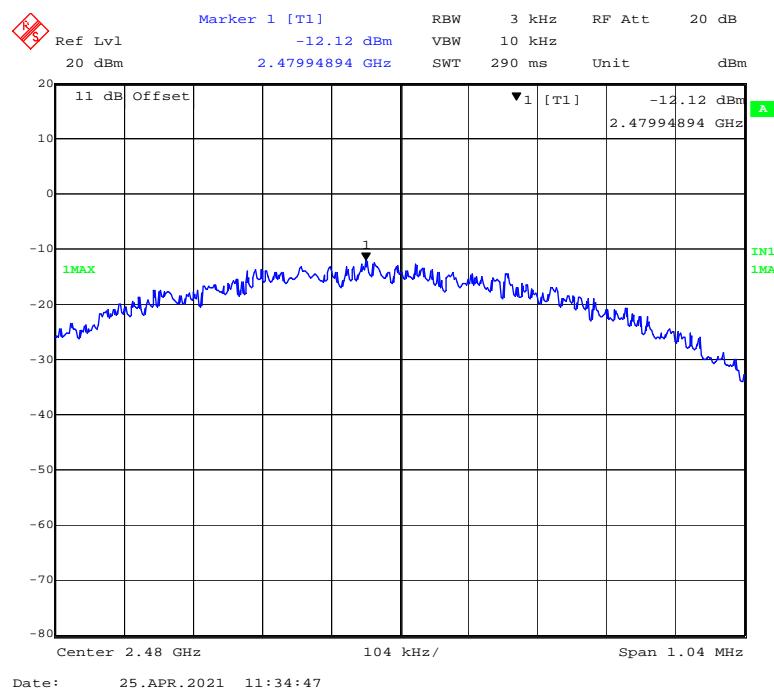
Test Result: Compliant.

EUT operation mode: Transmitting

BLE (1Mbps)

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low	2402	-12.40	≤ 8
Middle	2440	-11.61	≤ 8
High	2480	-12.12	≤ 8

Low Channel**Middle Channel**

High Channel

Declarations

- 1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.
- 2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
- 3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
- 4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
- 5: This report cannot be reproduced except in full, without prior written approval of the Company.
- 6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

******* END OF REPORT *******