

TEST REPORT

Test report no.: 1-2337/21-01-11

BNetzA-CAB-02/21-102

Testing laboratory

CTC advanced GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <https://www.ctcadvanced.com>
e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)
The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate starting with the registration number: D-PL-12076-01.

Applicant

Sontheim Industrie Elektronik GmbH
Georg-Krug-Straße 2
87437 Kempten / GERMANY
Phone: +49 (0) 831 5759 0032
Contact: Roland Mader
e-mail: Roland.Mader@s-i-e.de

Manufacturer

Sontheim Industrie Elektronik GmbH
Georg-Krug-Straße 2
87437 Kempten / GERMANY

Test standard/s

FCC - Title 47 CFR Part 22 FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 22 - Public mobile services

FCC - Title 47 CFR Part 24 FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 24 - Personal communications services

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Telematic Interface device
Model name: VERONA GEN4
FCC ID: 2AGFACOMHAWKXT04
ISED certification number: 20746-COMHAWKXT04
Frequency: LTE bands 2/4/5/12/13/25/26/41/66
Technology tested: LTE
Antenna: External antenna
Power supply: 24.0 V DC
Temperature range: -40°C to +85°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

René Oelmann
Lab Manager
Radio Communications

Test performed:

Marco Bertolino
Lab Manager
Radio Communications

1 Table of contents

1	Table of contents	2
2	General information	5
2.1	Notes and disclaimer	5
2.2	Application details	5
2.3	Test laboratories sub-contracted	5
3	Test standard/s, references and accreditations	6
4	Reporting statements of conformity – decision rule	7
5	Test environment	8
6	Test item	9
6.1	General description	9
6.2	Additional information	9
7	Description of the test setup	10
7.1	Shielded semi anechoic chamber	11
7.2	Shielded fully anechoic chamber	12
7.3	Radiated measurements > 18 GHz	13
7.4	Conducted measurements	14
8	Sequence of testing	15
8.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	15
8.2	Sequence of testing radiated spurious 30 MHz to 1 GHz	16
8.3	Sequence of testing radiated spurious 1 GHz to 18 GHz	17
8.4	Sequence of testing radiated spurious above 18 GHz	18
9	Measurement uncertainty	19
10	Summary of measurement results LTE band 2	20
10.1	LTE – Band 2	20
11	RF measurements LTE band 2	21
11.1	Description of test setup	21
11.2	Results	21
11.2.1	RF output power	21
11.2.2	Spurious emissions radiated	25
12	Summary of measurement results LTE band 4	31
12.1	LTE – Band 4	31
13	RF measurements LTE band 4	32
13.1	Description of test setup	32
13.2	Results	32
13.2.1	RF output power	32
13.2.2	Spurious emissions radiated	36
14	Summary of measurement results LTE band 5	42
14.1	LTE – Band 5	42

15	RF measurements LTE band 5	43
15.1	Description of test setup	43
15.2	Results	43
15.2.1	RF output power	43
15.2.2	Spurious emissions radiated	46
16	Summary of measurement results LTE band 12	52
16.1	LTE – Band 12	52
17	RF measurements LTE 12	53
17.1	Description of test setup	53
17.2	Results LTE – Band 12	53
17.2.1	RF output power	53
17.2.2	Spurious emissions radiated	56
18	Summary of measurement results LTE band 13	62
18.1	LTE – Band 13	62
19	RF measurements LTE 13	63
19.1	Description of test setup	63
19.2	Results LTE – Band 13	63
19.2.1	RF output power	63
19.2.2	Spurious emissions radiated	65
20	Summary of measurement results LTE band 25	71
20.1	LTE – Band 25	71
21	RF measurements LTE band 25	72
21.1	Description of test setup	72
21.2	Results	72
21.2.1	RF output power	72
21.2.2	Spurious emissions radiated	76
22	Summary of measurement results LTE band 26a	82
22.1	LTE – Band 26a	82
23	RF measurements LTE band 26a	83
23.1	Description of test setup	83
23.2	Results	83
23.2.1	RF output power	83
23.2.2	Spurious emissions radiated	87
24	Summary of measurement results LTE band 26b	93
24.1	LTE – Band 26b	93
25	RF measurements LTE band 26b	93
25.1	Description of test setup	93
25.2	Results	93
25.2.1	RF output power	93
25.2.2	Spurious emissions radiated	98
26	Summary of measurement results LTE band 41	104

26.1	LTE – Band 41	104
27	RF measurements LTE band 41	105
27.1	Description of test setup.....	105
27.2	Results LTE – Band 41	105
27.2.1	RF output power	105
27.2.2	Spurious emissions radiated.....	111
28	Summary of measurement results LTE band 66	117
28.1	LTE – Band 66	117
29	RF measurements LTE band 66.....	118
29.1	Description of test setup.....	118
29.2	Results	118
29.2.1	RF output power	118
29.2.2	Spurious emissions radiated.....	122
30	Observations.....	128
31	Glossary	129
32	Document history.....	130
33	Accreditation Certificate – D-PL-12076-01-04	130
34	Accreditation Certificate – D-PL-12076-01-05	131

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2021-12-09
Date of receipt of test item:	2022-02-15
Start of test:*	2022-02-15
End of test:*	2022-03-01
Person(s) present during the test:	-/-

*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 22	-/-	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 22 - Public mobile services
FCC - Title 47 CFR Part 24	-/-	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 24 - Personal communications services
FCC - Title 47 CFR Part 27	-/-	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 27 - Miscellaneous wireless communications services
FCC - Title 47 CFR Part 90	-/-	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 90 – Private land mobile radio services
RSS - 132 Issue 3	January 2013	Spectrum Management and Telecommunications Radio Standards Specification - Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz
RSS - 133 Issue 6	January 2018	Spectrum Management and Telecommunications Policy - Radio Standards Specifications, 2 GHz Personal Communication Services
RSS - 139 Issue 3	July 2015	Spectrum Management and Telecommunications Radio Standards Specification - Advanced Wireless Services (AWS) Equipment Operating in the Bands 1710-1755 MHz and 2110-2180 MHz

Guidance	Version	Description
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.26-2015	-/-	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
Power Meas License Systems: KDB 971168 D01	v03r01	Measurement Guidance for Certification of Licensed Digital Transmitters


Accreditation	Description	
D-PL-12076-01-04	Telecommunication and EMC Canada https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf	  Deutsche Akkreditierungsstelle D-PL-12076-01-04
D-PL-12076-01-05	Telecommunication FCC requirements https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf	  Deutsche Akkreditierungsstelle D-PL-12076-01-05

4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

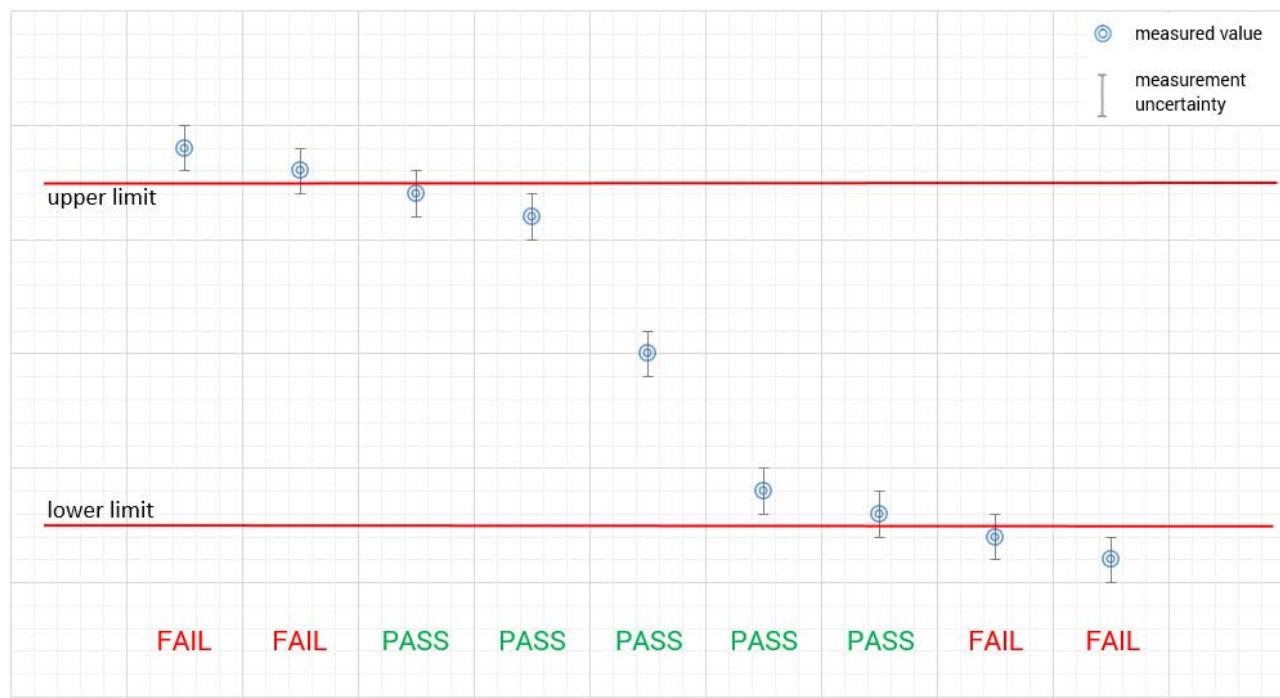

5 Test environment

Temperature	: T _{nom} T _{max} T _{min}	+20 °C during room temperature tests No test under extreme temperature conditions performed. No test under extreme temperature conditions performed.
Relative humidity content	: 42 %	
Barometric pressure	: 1018 hpa	
Power supply	: V _{nom} V _{max} V _{min}	24 V DC by external power supply No test under extreme voltage conditions performed. No test under extreme voltage conditions performed.

6 Test item

6.1 General description

Kind of test item	:	Telematic Interface device
Model name	:	VERONA GEN4
HMN	:	-/-
PMN	:	Verona Gen 4 / COMhawk xt
HVIN	:	Verona GEN4
FVIN	:	Verona-Gen4-512MB-Development-2022-01-10
S/N serial number	:	Radiated unit: 38
Hardware status	:	Revision 1
Software status	:	Linux Image Verona-Gen4-512MB-Development-2022-01-10
Firmware status	:	Boot Loader: U-Boot 2015.01 Linux-Kernel: Linux 4.19 (4.19.219) Linux Image: Verona-Gen4-512MB-Development-2022-01-10 IO Lib: 00.01.02 MSP430 Lib: 1.0.0 MSP430 FW: 1.0.0 STM32_1 BM: 00.00.03.00 STM32_1 FL: 00.00.02.02 STM32_1 Appl: 01.00.00.00 STM32_2 BM: 00.00.03.00 STM32_2 FL: 00.00.02.02 STM32_2 Appl: 01.00.00.00
Frequency band	:	LTE bands 2/4/5/12/13/25/26/41/66
Type of radio transmission	:	modulated carrier
Use of frequency spectrum	:	
Type of modulation	:	QPSK; 16-QAM
Antenna	:	External antenna
Power supply	:	24.0 V DC
Temperature range	:	-40°C to +85°C

6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report: 1-0948/20-01-01_AnnexA
 1-0948/20-01-01_AnnexB
 1-0948/20-01-01_AnnexD

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).


Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

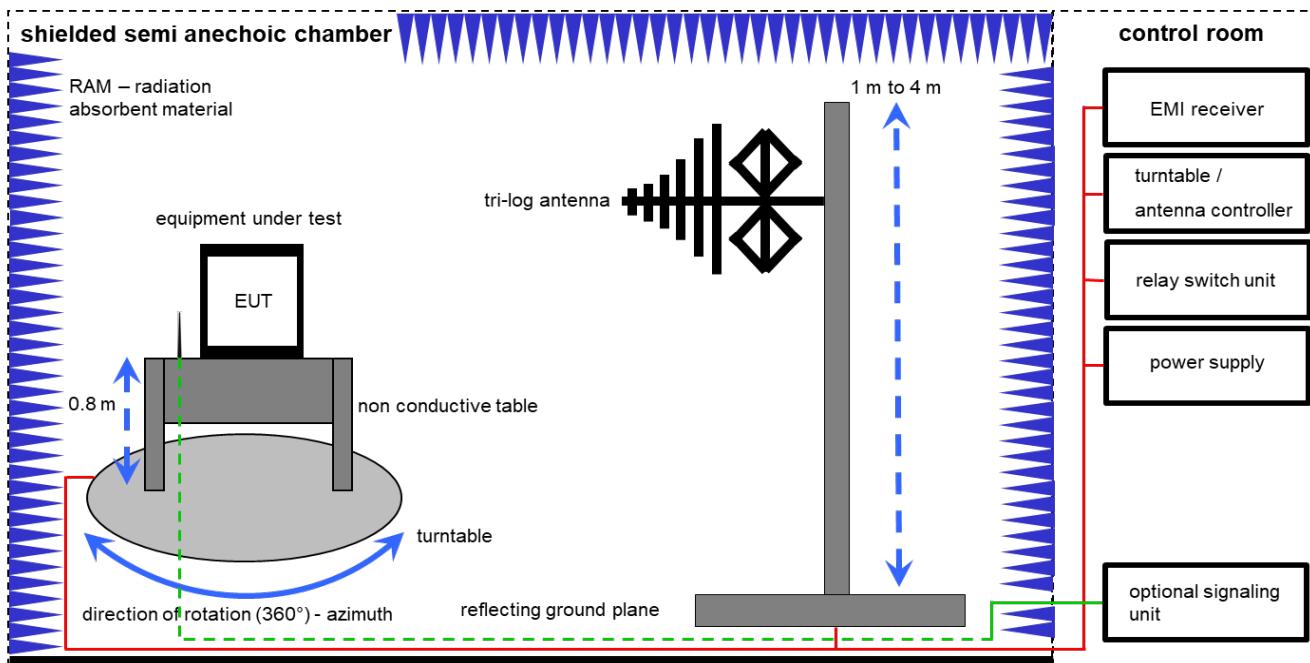

Measurement distance: tri-log antenna 10 meter; EMC32 software version: 10.59.00

FS = UR + CL + AF

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS [\text{dB}\mu\text{V/m}] = 12.35 [\text{dB}\mu\text{V/m}] + 1.90 [\text{dB}] + 16.80 [\text{dB}/\text{m}] = 31.05 [\text{dB}\mu\text{V/m}] (35.69 \mu\text{V/m})$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	Semi anechoic chamber	3000023	MWB AG	-/-	300000551	ne	-/-	-/-
3	A	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	viKI!	29.12.2021	28.12.2023
4	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
5	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
6	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
7	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	318	300003696	viKI!	30.09.2021	29.09.2023
8	A	Turntable	2089-4.0	EMCO	-/-	300004394	ne	-/-	-/-
9	A	PC	TecLine	F+W	-/-	300004388	ne	-/-	-/-
10	A	EMI Test Receiver	ESR3	Rohde & Schwarz	102587	300005771	k	08.12.2021	07.12.2022
11	A	Wideband Radio Communication Tester	CMW500	Rohde & Schwarz	170616	300006251	k	16.09.2021	30.09.2023

7.2 Shielded fully anechoic chamber

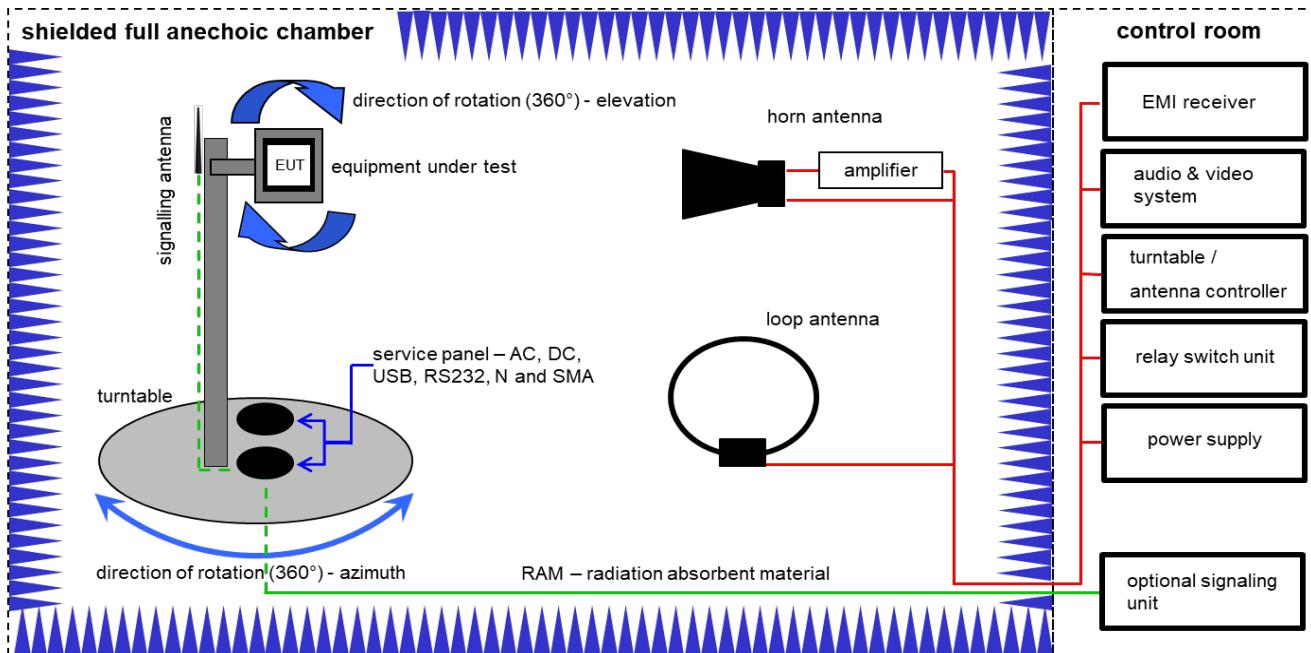

Measurement distance: horn antenna 3 meter; loop antenna 3 meter

OP = AV + D - G + CA

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)


Example calculation:

OP [dBm] = -39.0 [dBm] + 57.0 [dB] - 12.0 [dBi] + (-36.0) [dB] = -30 [dBm] (1 μ W)

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	B	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9107-3697	300001605	vlKI!	12.03.2021	11.03.2023
2	A, B	Switch / Control Unit	3488A	HP	*	300000199	ne	-/-	-/-
3	A	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO/2	8905-2342	300000256	vlKI!	17.06.2021	16.06.2023
4	B	Band Reject filter	WRCG1850/1910-1835/1925-40/8SS	Wainwright	7	300003350	ev	-/-	-/-
5	A, B	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	09.12.2021	31.12.2022
6	B	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev	-/-	-/-
7	B	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	19	300003790	ne	-/-	-/-
8	A, B	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne	-/-	-/-
9	A, B	NEXIO EMV-Software	BAT EMC V3.21.0.27	EMCO	-/-	300004682	ne	-/-	-/-
10	B	RF-Amplifier	AMF-6F06001800-30-10P-R	NARDA-MITEQ Inc	2011572	300005241	ev	-/-	-/-
11	A, B	Wideband Radio Communication Tester	CMW500	Rohde & Schwarz	170616	300006251	k	16.09.2021	30.09.2023

7.3 Radiated measurements > 18 GHz

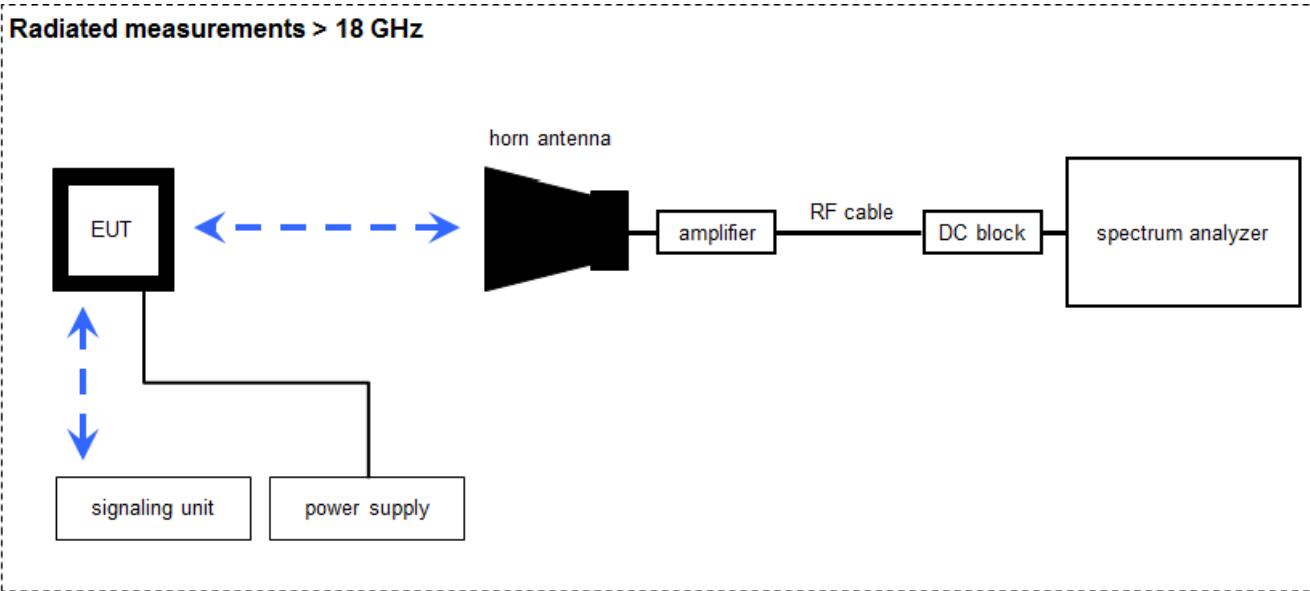

Measurement distance: horn antenna 50 cm

$$OP = AV + D - G + CA$$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)


Example calculation:

$$OP \text{ [dBm]} = -59.0 \text{ [dBm]} + 44.0 \text{ [dB]} - 20.0 \text{ [dBi]} + 5.0 \text{ [dB]} = -30 \text{ [dBm]} (1 \mu\text{W})$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP	00419	300002268	ev	-/-	-/-
2	A	Std. Gain Horn Antenna 18.0-26.5 GHz	638	Narda	01096	300000486	vIKI!	-/-	-/-
3	A	Signal analyzer	FSV40	Rohde&Schwarz	101042	300004517	k	25.01.2022	24.01.2023
4	A	RF-Cable	ST18/SMAm/SMAm /48	Huber & Suhner	Batch no. 127377	400001183	ev	-/-	-/-
5	A	DC-Blocker 0.1-40 GHz	8141A	Inmet	-/-	400001185	ev	-/-	-/-
6	A	Wideband Radio Communication Tester	CMW500	Rohde & Schwarz	170616	300006251	k	16.09.2021	30.09.2023

7.4 Conducted measurements

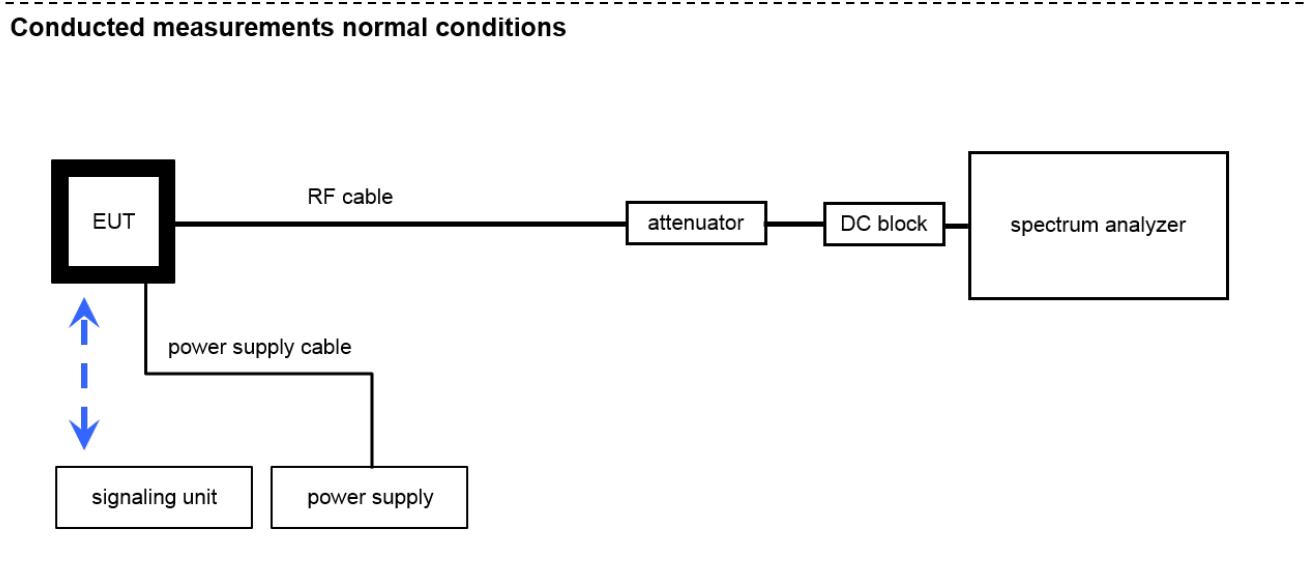

OP = AV + CA
 (OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal analyzer	FSV40	Rohde&Schwarz	101042	300004517	k	25.01.2022	31.01.2023
2	A	PC Tester R005	Intel Core i3 3220/3,3 GHz, Prozessor		2V2403033A45 23	300004589	ne	-/-	-/-
3	A	RF-Cable	ST18/SMAm/SMAm /72	Huber & Suhner	Batch no. 699714	400001184	ev	-/-	-/-
4	A	DC-Blocker 0.1-40 GHz	8141A	Inmet		400001185	ev	-/-	-/-
5	A	RF-Cable	ST18/SMAm/SMAm /36	Huber & Suhner	Batch no. 601494	400001309	ev	-/-	-/-
6	A	DC Power Supply	HMP2020	Rohde & Schwarz	102850 / 101699	300005517	vIKI!	08.12.2021	31.12.2023
7	A	Wideband Radio Communication Tester	CMW500	Rohde & Schwarz	170616	300006251	k	16.09.2021	30.09.2023

8 Sequence of testing

8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premereasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

*Note: The sequence will be repeated three times with different EUT orientations.

8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8.4 Sequence of testing radiated spurious above 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

9 Measurement uncertainty

Measurement uncertainty	
Test case	Uncertainty
RF output power conducted	± 1 dB
RF output power radiated	± 3 dB
Frequency stability	± 20 Hz
Spurious emissions radiated below 30 MHz	± 3 dB
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB
Spurious emissions radiated above 12.75 GHz	± 4.5 dB
Spurious emissions conducted	± 3 dB
Block edge compliance	± 3 dB
Occupied bandwidth	± RBW

10 Summary of measurement results LTE band 2

<input type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input checked="" type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

10.1 LTE – Band 2

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 24 RSS 133	See table	2022-04-11	Delta tests according to manufacturer demand!

Test Case	temperature conditions	power source voltages	C	NC	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Extreme	Extreme	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

11 RF measurements LTE band 2

11.1 Description of test setup

For the spurious measurements we use the substitution method according TIA/EIA 603.

11.2 Results

11.2.1 RF output power

Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector	
Sweep time	
Video bandwidth	
Resolution bandwidth	Measured with CMW500
Span	
Trace mode	
Setup	See chapter 7.2 - setup B, 7.4 – setup A
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Nominal Peak Output Power	
+33.00 dBm	
In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (conducted)						
Bandwidth (MHz)	Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Peak to Average Ratio (dB)	Average Output Power (dBm) 16-QAM	Peak to Average Ratio (dB)
1.4	1850.7	1 RB low	20.7	5.0	19.6	5.7
		1 RB high	20.6	4.9	19.5	5.6
		50% RB mid	20.6	5.0	19.5	5.8
		100% RB	19.6	5.5	18.7	6.3
	1880.0	1 RB low	20.8	5.0	19.8	5.8
		1 RB high	21.0	4.8	19.9	5.7
		50% RB mid	20.9	5.0	19.8	5.9
		100% RB	19.8	5.4	18.8	6.4
	1909.3	1 RB low	20.6	4.2	19.4	5
		1 RB high	20.6	4.3	19.4	5.2
		50% RB mid	20.6	4.3	19.5	5.3
		100% RB	19.5	4.9	18.5	5.8
3	1851.5	1 RB low	20.5	4.9	19.3	5.7
		1 RB high	20.6	4.7	19.4	5.6
		50% RB mid	19.6	4.9	18.5	5.7
		100% RB	19.6	5.4	18.7	6.2
	1880.0	1 RB low	21.0	5.0	19.7	5.9
		1 RB high	21.0	4.7	20	5.6
		50% RB mid	19.9	5.0	18.9	5.9
		100% RB	19.8	5.5	18.9	6.3
	1908.5	1 RB low	20.6	4.1	19.5	4.9
		1 RB high	20.6	4.3	19.3	5.2
		50% RB mid	19.5	4.5	18.5	5.3
		100% RB	19.5	4.9	18.5	5.7
5	1852.5	1 RB low	20.4	4.8	19.1	5.6
		1 RB high	20.5	4.6	19.2	5.3
		50% RB mid	19.6	4.9	18.7	8.5
		100% RB	19.5	5.3	18.6	6.1
	1880.0	1 RB low	20.6	5.1	19.7	5.7
		1 RB high	20.7	4.6	19.4	5.4
		50% RB mid	19.7	5.1	18.6	8.5
		100% RB	19.8	5.5	18.8	6.4
	1907.5	1 RB low	20.4	4.6	19	5.3
		1 RB high	20.4	4.3	19.1	5.2
		50% RB mid	19.5	4.5	18.7	5.3
		100% RB	19.5	4.9	18.5	5.8

10	1855	1 RB low	20.5	4.8	19.3	5.5
		1 RB high	20.4	4.9	19	5.7
		50% RB mid	19.5	4.8	18.6	5.7
		100% RB	19.6	5.1	18.5	6
	1880	1 RB low	20.9	5.1	19.6	6
		1 RB high	20.7	4.4	19.6	5.2
		50% RB mid	19.8	5.1	18.9	6
		100% RB	19.7	5.3	18.8	6.2
	1905	1 RB low	20.2	5	19.1	5.9
		1 RB high	20.3	4.3	19.3	5.1
		50% RB mid	19.5	4.8	18.4	5.8
		100% RB	19.4	4.9	18.4	5.9
15	1857.5	1 RB low	20.2	4.8	19.1	5.5
		1 RB high	20.2	5	19.2	5.8
		50% RB mid	19.5	5	18.5	5.9
		100% RB	19.4	5.4	18.5	6.2
	1880.0	1 RB low	20.3	5	19.5	5.9
		1 RB high	20.1	4.5	19.2	5.3
		50% RB mid	19.7	5	18.9	6
		100% RB	19.6	5.3	18.6	6.2
	1902.5	1 RB low	18.8	5	18.2	5.7
		1 RB high	20.1	4.2	19.1	5.1
		50% RB mid	19.4	5.1	18.4	6.1
		100% RB	19.3	5.1	18.4	6
20	1860	1 RB low	19.9	4.7	18.5	5.4
		1 RB high	19.3	5	18.7	5.8
		50% RB mid	19.4	5.2	18.5	6.1
		100% RB	19.3	5.4	18.3	6.2
	1880	1 RB low	19.4	5	18.8	5.8
		1 RB high	19.7	4.6	18.6	5.4
		50% RB mid	19.7	5	18.7	6
		100% RB	19.4	5	18.4	6.1
	1900	1 RB low	19.5	4.6	18.3	5.4
		1 RB high	19.7	4.2	18.8	5
		50% RB mid	19.4	5.2	18.5	6.2
		100% RB	19.2	5.3	18.2	6.2

The radiated output power is measured in the mode with the highest conducted output power.

Output Power (radiated)			
Bandwidth (MHz)	Frequency (MHz)	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM
1.4	1850.7	24.9	24.9
	1880.0	25.2	25.1
	1909.3	24.9	24.8
3	1851.5	24.6	24.8
	1880.0	25.2	25.2
	1908.5	24.8	24.8
5	1852.5	24.5	24.6
	1880.0	25.2	25.2
	1907.5	25.0	24.9
10	1855.0	24.9	24.8
	1880.0	25.2	25.2
	1905.0	25.1	25.1
15	1857.5	24.4	24.8
	1880.0	24.5	25.0
	1902.5	25.2	25.2
20	1860.0	24.7	24.6
	1880.0	24.6	24.6
	1900.0	25.3	25.5

11.2.2 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2014 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. Measurement made up to 26 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE band 2.

Measurement:

Measurement parameters	
Detector	Peak
Sweep time	2 sec.
Video bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span	100 MHz Steps
Trace mode	Max Hold
Setup	See chapter 7.1 - setup B; 7.2 - setup A/B ; 7.3 - setup A
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P) / (P, \text{Power in Watts})$	
-13 dBm	

QPSK:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	3710.0	All detected emissions are more than 20dB below the limit!	2	3760.0	All detected emissions are more than 20dB below the limit!	2	3810.0	All detected emissions are more than 20dB below the limit!
3	5565.0		3	5640.0		3	5715.0	
4	7420.0		4	7520.0		4	7620.0	
5	9275.0		5	9400.0		5	9525.0	
6	11130.0		6	11280.0		6	11430.0	
7	12985.0		7	13160.0		7	13335.0	
8	14840.0		8	15040.0		8	15240.0	
9	16695.0		9	16920.0		9	17145.0	
10	18550.0		10	18800.0		10	19050.0	

16-QAM:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	3710.0	All detected emissions are more than 20dB below the limit!	2	3760.0	All detected emissions are more than 20dB below the limit!	2	3810.0	All detected emissions are more than 20dB below the limit!
3	5565.0		3	5640.0		3	5715.0	
4	7420.0		4	7520.0		4	7620.0	
5	9275.0		5	9400.0		5	9525.0	
6	11130.0		6	11280.0		6	11430.0	
7	12985.0		7	13160.0		7	13335.0	
8	14840.0		8	15040.0		8	15240.0	
9	16695.0		9	16920.0		9	17145.0	
10	18550.0		10	18800.0		10	19050.0	


Results: QPSK with 10 MHz channel bandwidth

Plot 1: Channel 18900 (Traffic mode up to 30 MHz)

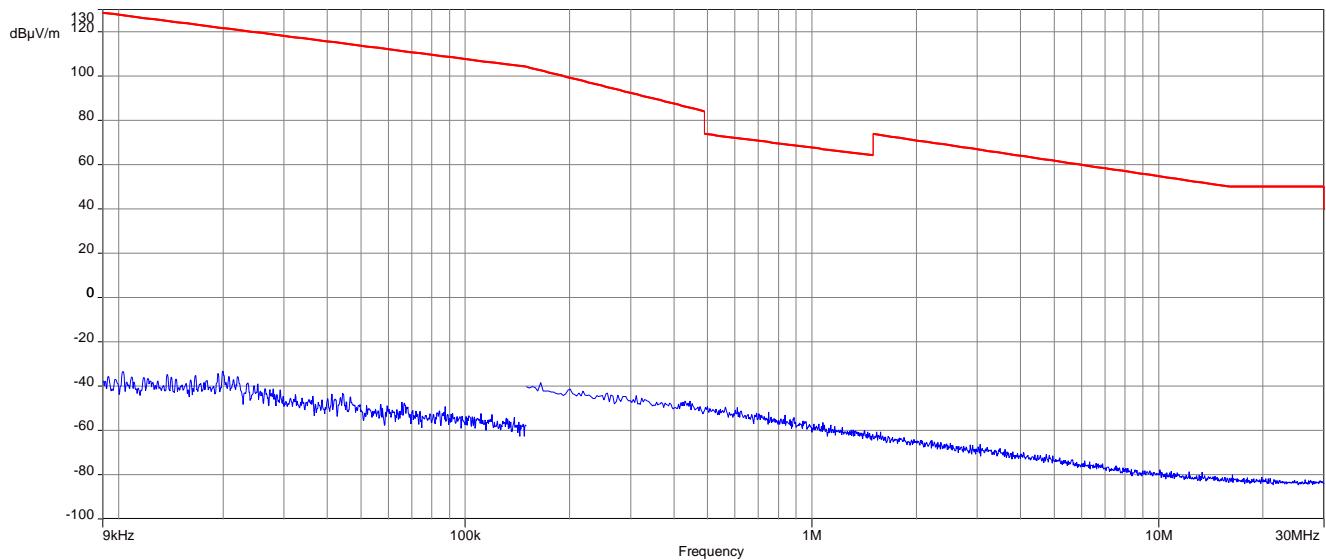


Plot 2: Channel 18900 (30 MHz – 1 GHz)

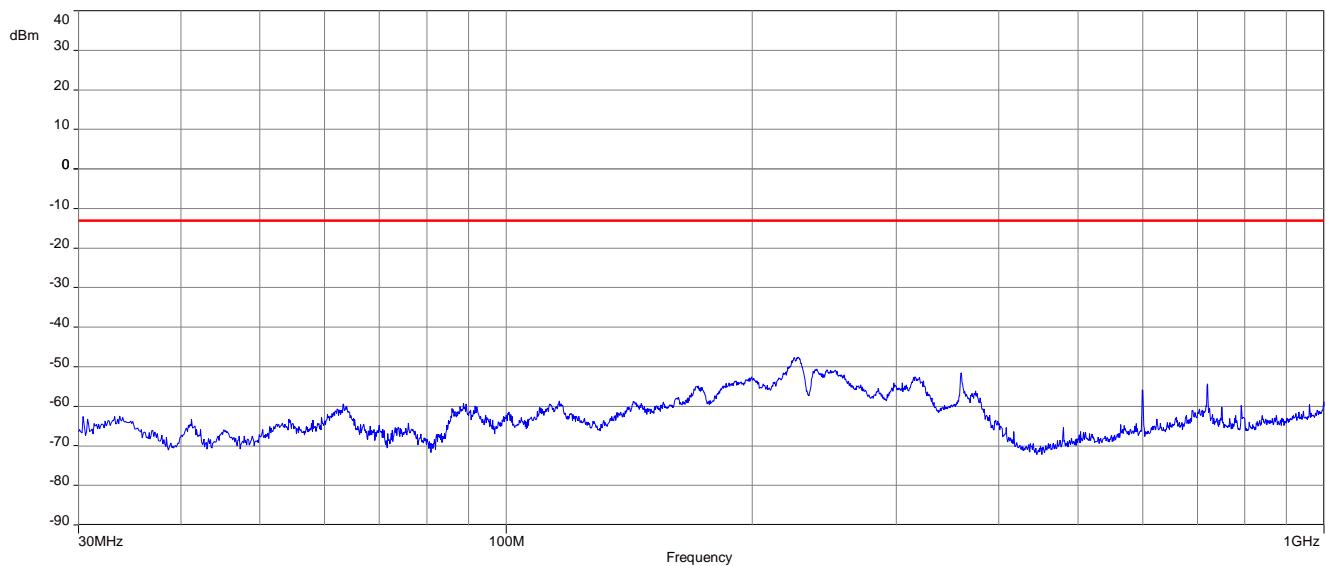

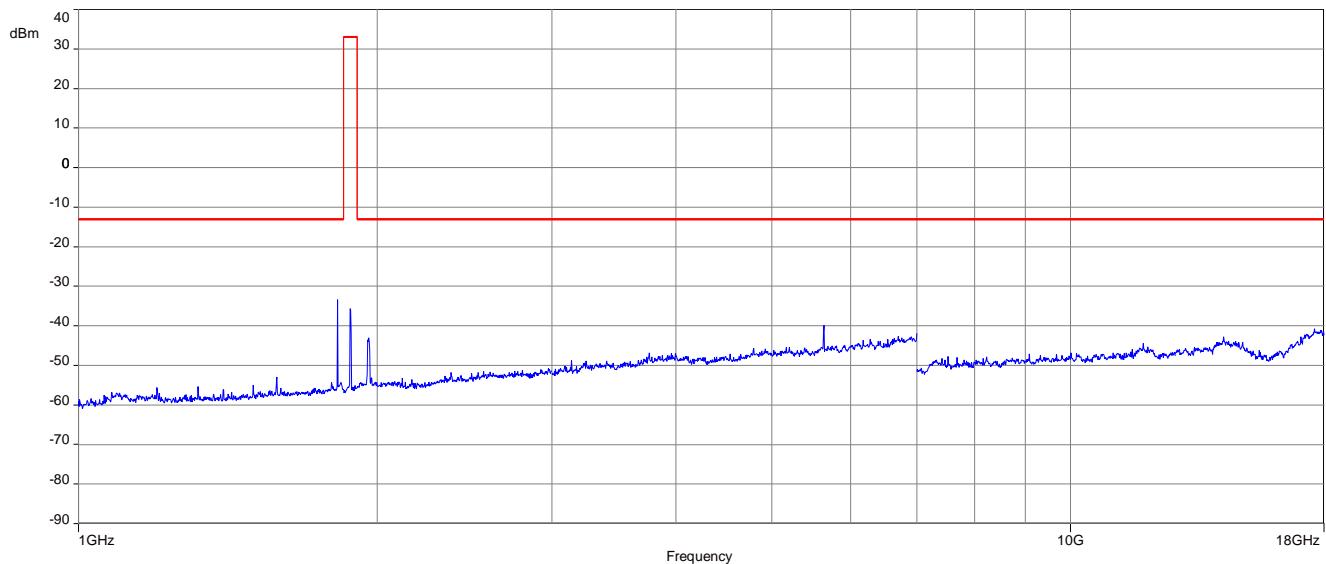
Plot 3: Channel 18900 (1 GHz – 18 GHz)

Carrier notched with 1.9 GHz rejection filter.

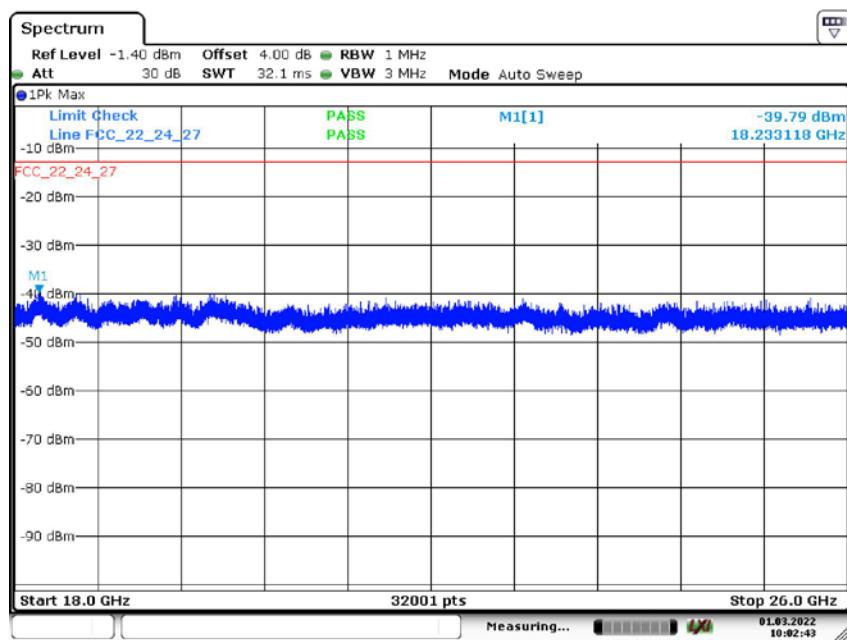
Plot 4: Channel 18900 (18 GHz – 26 GHz)


Results: 16-QAM with 10 MHz channel bandwidth

Plot 1: Channel 18900 (Traffic mode up to 30 MHz)

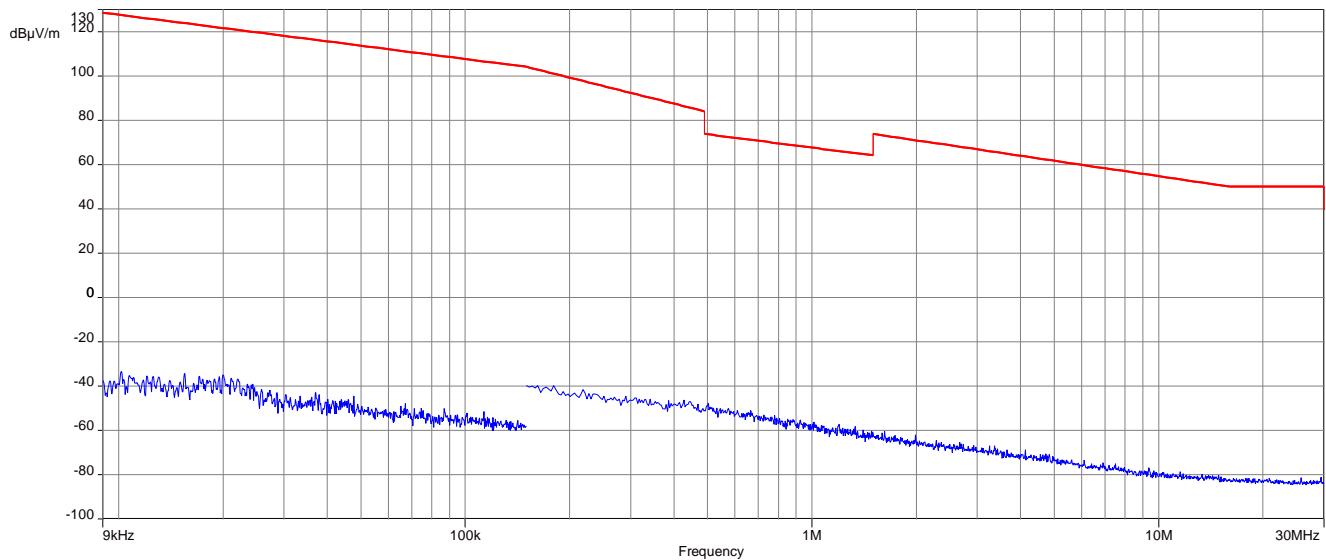


Plot 2: Channel 18900 (30 MHz – 1 GHz)

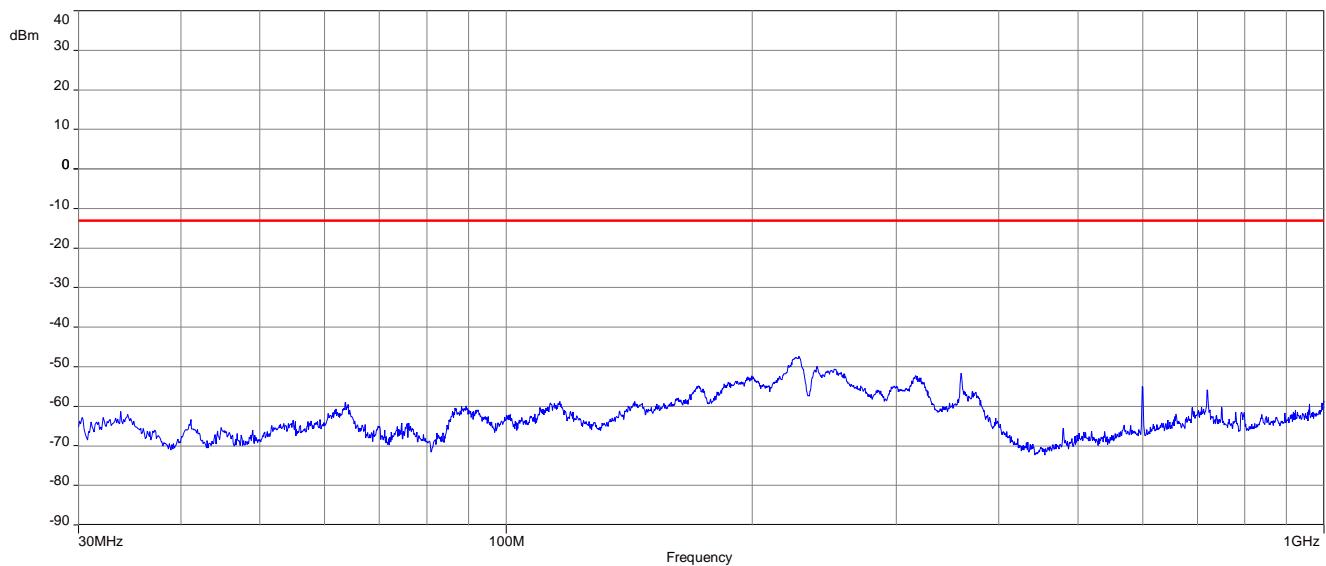

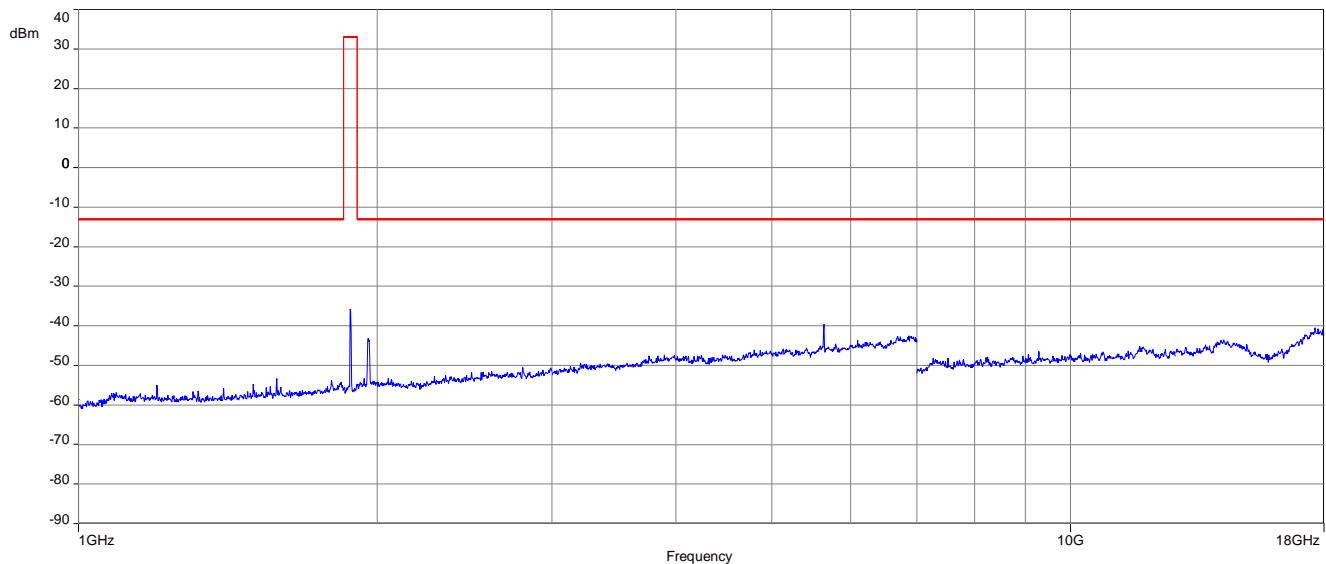Plot 3: Channel 18900 (1 GHz – 18 GHz)


Carrier notched with 1.9 GHz rejection filter.

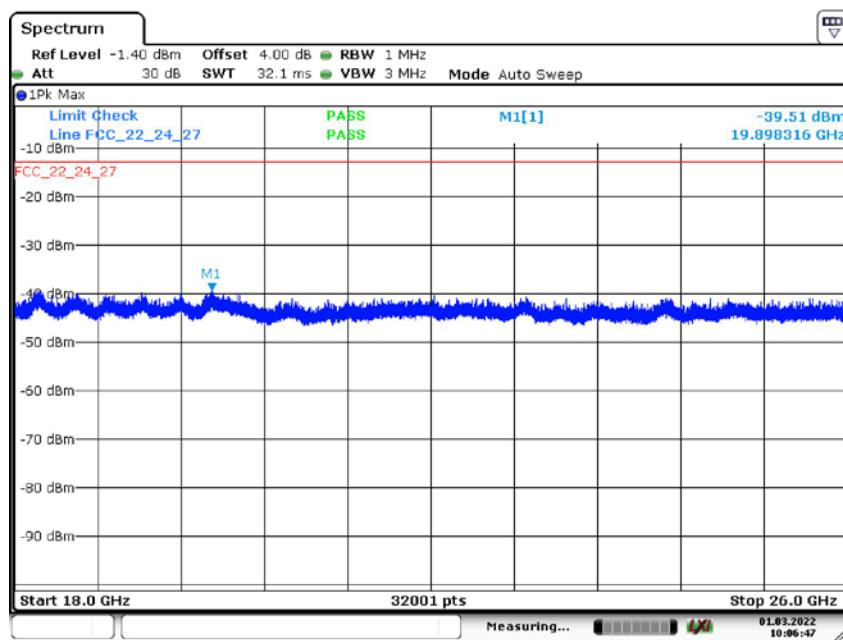Plot 4: Channel 18900 (18 GHz – 26 GHz)


Date: 1.MAR.2022 10:06:47

12 Summary of measurement results LTE band 4

<input type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input checked="" type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 27 RSS 139	See table!	2022-04-11	Delta tests according to manufacturer demand!

12.1 LTE – Band 4

Test Case	temperature conditions	power source voltages	C	NC	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Extreme	Extreme	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

13 RF measurements LTE band 4

13.1 Description of test setup

For the spurious measurements we use the substitution method according TIA/EIA 603.

13.2 Results

13.2.1 RF output power

Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector	
Sweep time	
Video bandwidth	
Resolution bandwidth	Measured with CMW500
Span	
Trace mode	
Setup	See chapter 7.2 - setup B, 7.4 – setup B
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Nominal Peak Output Power	
+33.00 dBm	
In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (conducted)						
Bandwidth (MHz)	Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Peak to Average Ratio (dB)	Average Output Power (dBm) 16-QAM	Peak to Average Ratio (dB)
1.4	1710.7	1 RB low	21.5	4.3	20.5	5.0
		1 RB high	21.5	4.1	20.4	5.0
		50% RB mid	21.6	4.2	20.7	5.0
		100% RB	20.6	4.7	19.5	5.7
	1732.5	1 RB low	21.7	4.9	20.6	5.7
		1 RB high	21.7	4.9	20.7	5.7
		50% RB mid	21.6	5.0	20.6	5.9
		100% RB	20.6	5.5	19.6	6.3
	1754.3	1 RB low	21.6	4.3	20.3	5.0
		1 RB high	21.6	4.2	20.3	5.0
		50% RB mid	21.4	4.3	20.5	5.2
		100% RB	20.4	4.8	19.4	5.6
3	1711.5	1 RB low	21.5	4.1	20.3	5.0
		1 RB high	21.6	3.9	20.3	4.8
		50% RB mid	20.4	4.2	19.3	5.2
		100% RB	20.4	4.6	19.4	5.5
	1732.5	1 RB low	21.3	5.0	20.1	5.6
		1 RB high	21.5	5.0	20.4	5.7
		50% RB mid	20.5	5.0	19.5	5.7
		100% RB	20.5	5.5	19.6	6.3
	1753.5	1 RB low	21.4	4.4	20.2	5.1
		1 RB high	21.6	4.2	20.5	5.0
		50% RB mid	20.4	4.3	19.3	5.2
		100% RB	20.3	4.8	19.3	5.6
5	1712.5	1 RB low	21.3	4.1	20.1	4.9
		1 RB high	21.1	3.9	20.2	4.7
		50% RB mid	20.3	4.3	19.4	4.9
		100% RB	20.5	4.6	19.5	5.5
	1732.5	1 RB low	21.4	4.8	20.3	5.5
		1 RB high	21.5	5.0	20.4	5.7
		50% RB mid	20.7	5.1	19.7	5.9
		100% RB	20.7	5.5	19.7	6.2
	1752.5	1 RB low	21.4	4.5	20.2	5.2
		1 RB high	21.5	4.2	20.4	5.0
		50% RB mid	20.6	4.5	19.4	5.3
		100% RB	20.8	4.9	19.8	5.7

10	1715.0	1 RB low	21.4	4.1	20.3	5.0
		1 RB high	21.2	4.1	20.1	4.8
		50% RB mid	20.5	4.2	19.5	5.1
		100% RB	20.5	4.5	19.5	5.4
	1732.5	1 RB low	21.0	4.8	20.4	5.5
		1 RB high	21.2	5.0	20.4	5.8
		50% RB mid	20.6	5.1	19.5	5.9
		100% RB	20.4	5.4	19.4	6.2
	1750.0	1 RB low	21.7	4.8	20.2	5.3
		1 RB high	21.6	4.1	20.5	4.9
		50% RB mid	20.5	4.6	19.5	5.4
		100% RB	20.4	4.9	19.5	5.7
15	1717.5	1 RB low	21.1	4.0	20.0	4.8
		1 RB high	20.8	4.5	20.1	5.2
		50% RB mid	20.3	4.3	19.3	5.1
		100% RB	20.2	4.8	19.2	5.5
	1732.5	1 RB low	20.6	4.6	20.0	5.3
		1 RB high	21.0	5.0	20.2	5.7
		50% RB mid	20.4	5.0	19.4	5.9
		100% RB	20.3	5.5	19.3	6.1
	1747.5	1 RB low	21.3	5.0	20.1	5.6
		1 RB high	21.2	4.1	20.0	5.0
		50% RB mid	20.4	4.6	19.5	5.5
		100% RB	20.3	5.0	19.2	5.7
20	1720.0	1 RB low	20.6	3.9	19.4	4.7
		1 RB high	20.0	4.8	19.4	5.4
		50% RB mid	20.3	4.4	19.3	5.2
		100% RB	20.1	4.7	19.1	5.5
	1732.5	1 RB low	20.2	4.4	19.6	5.1
		1 RB high	20.8	4.8	19.5	5.2
		50% RB mid	20.4	5.0	19.4	5.9
		100% RB	20.1	5.2	19.1	6.0
	1745.0	1 RB low	20.1	4.9	19.3	5.6
		1 RB high	20.9	4.1	19.6	4.8
		50% RB mid	20.4	4.7	19.4	5.5
		100% RB	20.2	4.9	19.2	5.7

The radiated output power is measured in the mode with the highest conducted output power.

Output Power (radiated)			
Bandwidth (MHz)	Frequency (MHz)	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM
1.4	1710.7	22.0	22.0
	1732.5	23.9	23.8
	1754.3	24.2	24.2
3	1711.5	21.6	21.6
	1732.5	23.7	23.6
	1753.5	24.2	24.1
5	1712.5	21.9	21.8
	1732.5	24.0	23.8
	1752.5	24.7	24.8
10	1715.0	21.9	21.9
	1732.5	23.9	23.8
	1750.0	24.9	24.9
15	1717.5	21.5	21.6
	1732.5	23.5	23.3
	1747.5	24.5	24.3
20	1720.0	21.8	21.8
	1732.5	23.5	23.3
	1745.0	24.5	24.4

13.2.2 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2014 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1755 MHz. Measurement made up to 18 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE band 4.

Measurement:

Measurement parameters	
Detector	Peak
Sweep time	2 sec.
Video bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span	100 MHz Steps
Trace mode	Max Hold
Setup	See chapter 7.1 - setup B; 7.2 - setup A/B ; 7.3 - setup A
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P) / (P, \text{Power in Watts})$	
-13 dBm	

QPSK:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	3430.0	All detected emissions are more than 20dB below the limit!	2	3465.0	All detected emissions are more than 20dB below the limit!	2	3500.0	All detected emissions are more than 20dB below the limit!
3	5145.0		3	5197.5		3	5250.0	
4	6860.0		4	6930.0		4	7000.0	
5	8575.0		5	8662.5		5	8750.0	
6	10290.0		6	10395.0		6	10500.0	
7	12005.0		7	12127.5		7	12250.0	
8	13720.0		8	13860.0		8	14000.0	
9	15435.0		9	15592.5		9	15750.0	
10	17150.0		10	17325.0		10	17500.0	

16-QAM:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	3430.0	All detected emissions are more than 20dB below the limit!	2	3465.0	All detected emissions are more than 20dB below the limit!	2	3500.0	All detected emissions are more than 20dB below the limit!
3	5145.0		3	5197.5		3	5250.0	
4	6860.0		4	6930.0		4	7000.0	
5	8575.0		5	8662.5		5	8750.0	
6	10290.0		6	10395.0		6	10500.0	
7	12005.0		7	12127.5		7	12250.0	
8	13720.0		8	13860.0		8	14000.0	
9	15435.0		9	15592.5		9	15750.0	
10	17150.0		10	17325.0		10	17500.0	

Results: QPSK with 10 MHz channel bandwidth


Plot 1: Channel 20175 (Traffic mode up to 30 MHz)

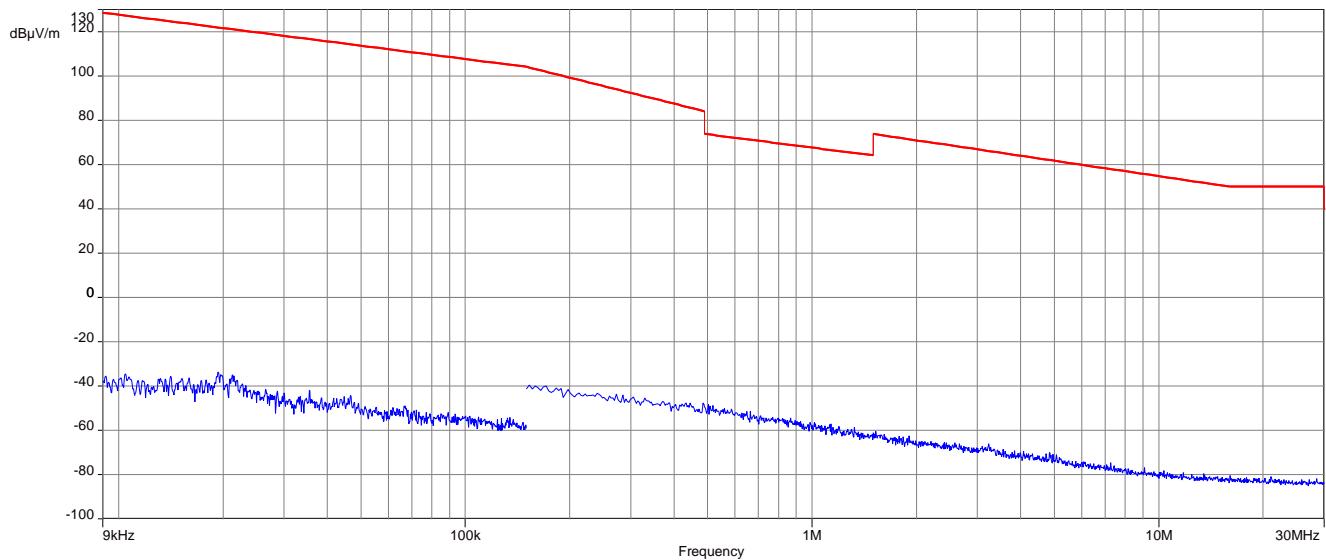

Plot 2: Channel 20175 (30 MHz – 1 GHz)

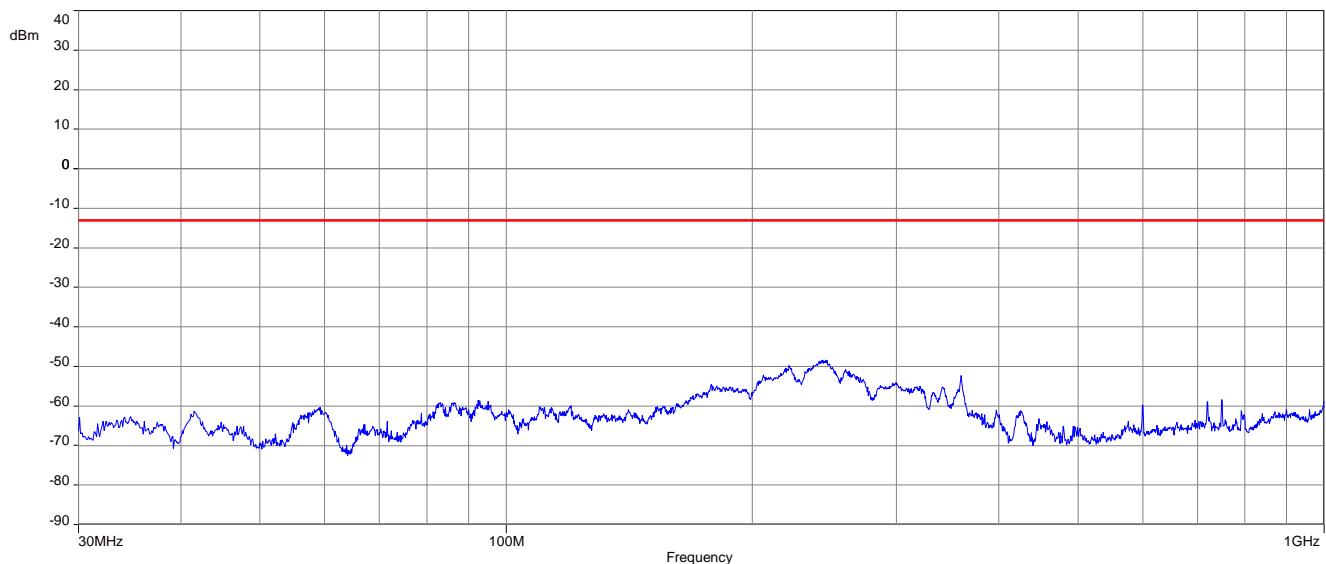


Plot 3: Channel 20175 (1 GHz – 18 GHz)

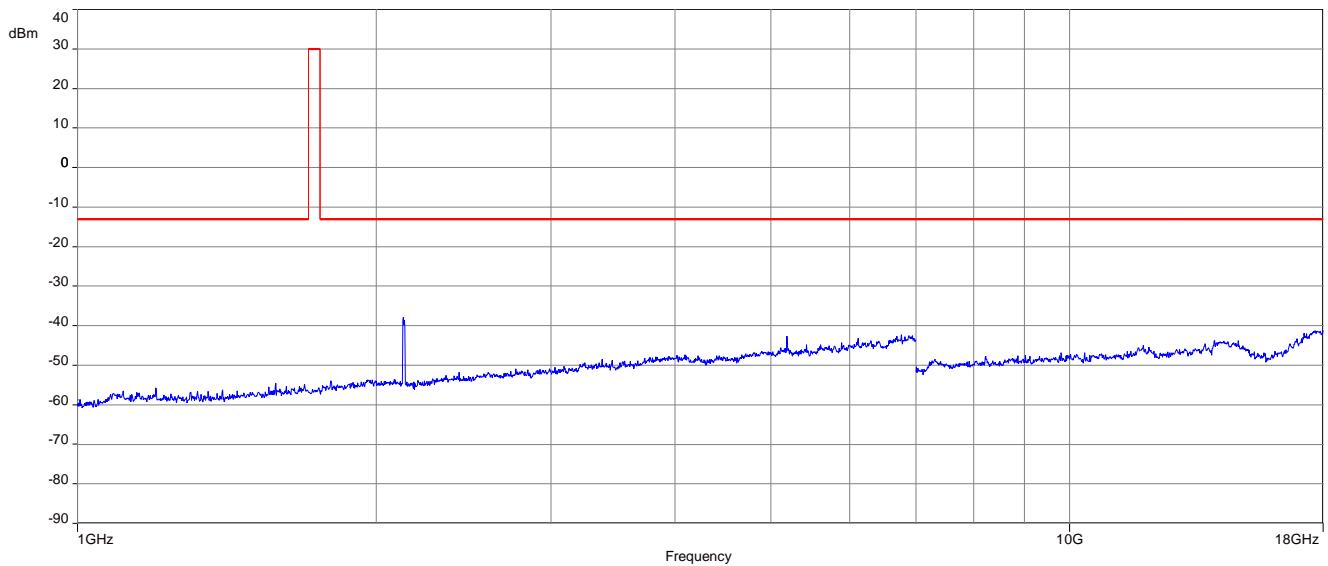


Carrier notched with 1.7 GHz rejection filter

Results: 16-QAM with 10 MHz channel bandwidth


Plot 1: Channel 20175 (Traffic mode up to 30 MHz)

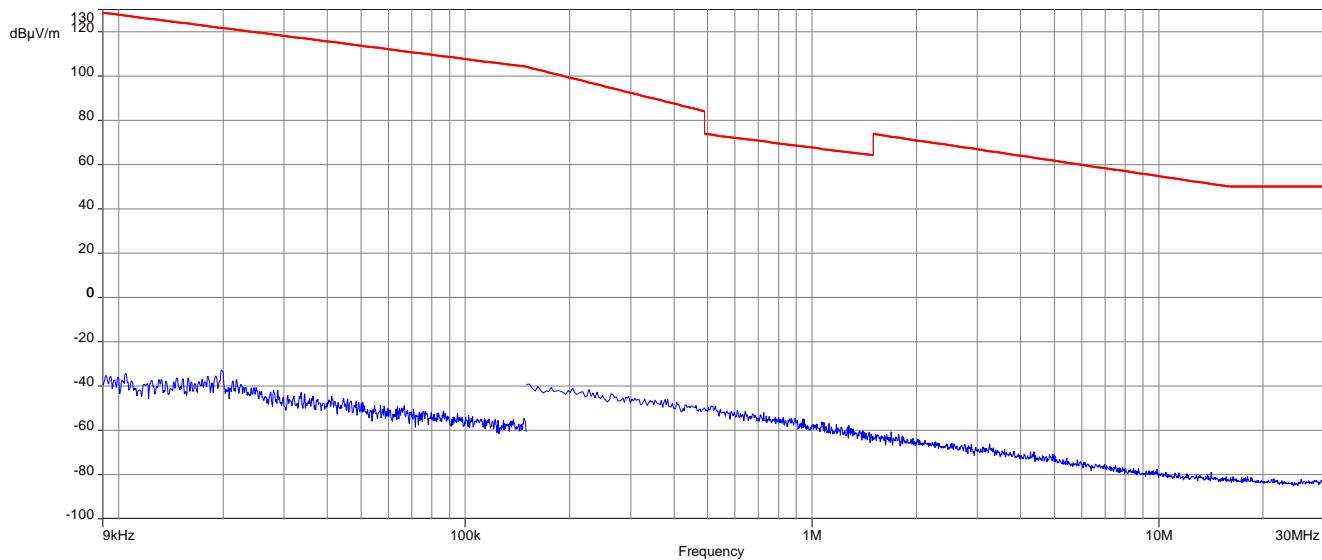

Plot 2: Channel 20175 (30 MHz – 1 GHz)

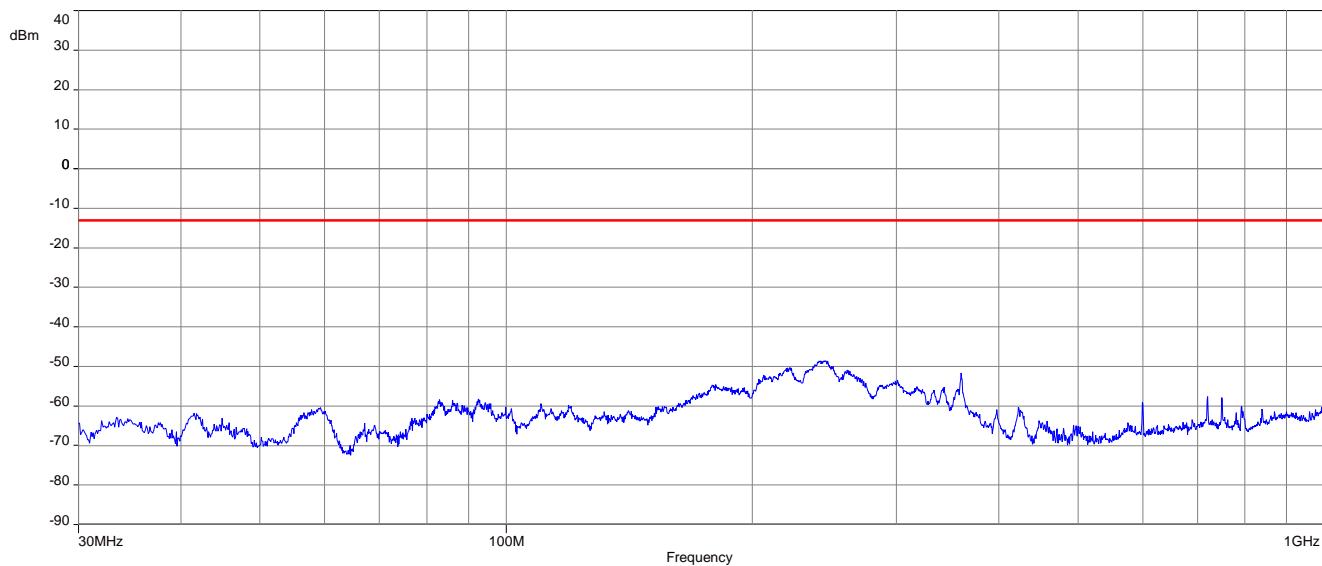

Plot 3: Channel 20175 (1 GHz – 18 GHz)

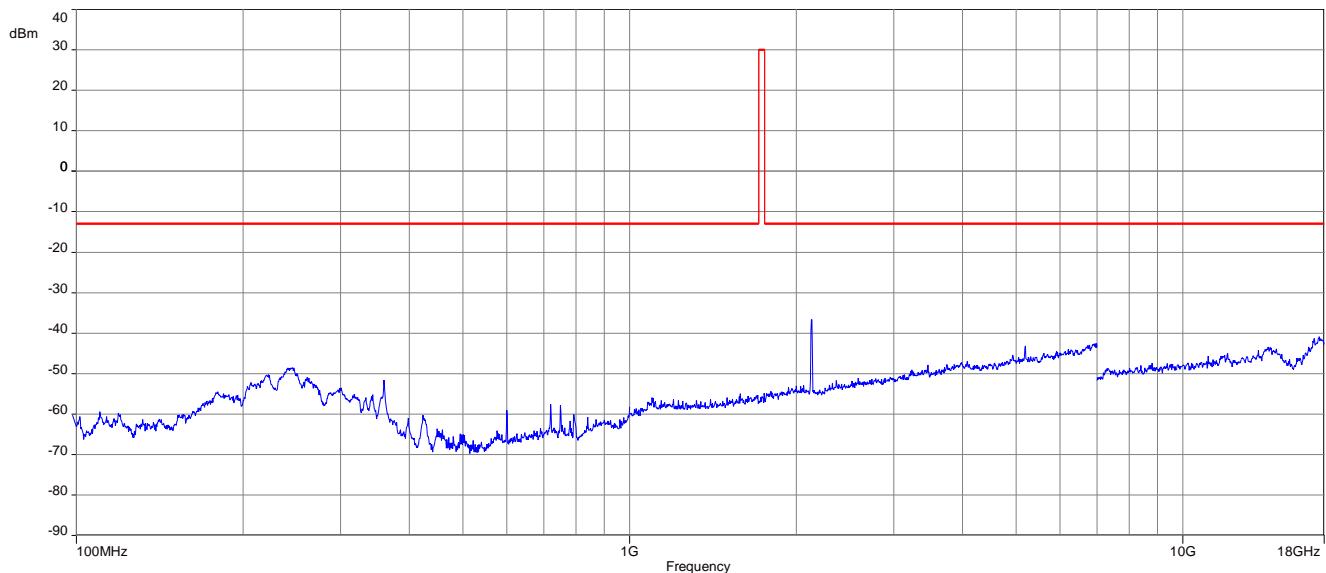

Carrier notched with 1.7 GHz rejection filter.

14 Summary of measurement results LTE band 5

<input type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input checked="" type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

14.1 LTE – Band 5

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 22 RSS 132	See table	2022-04-11	Delta tests according to manufacturer demand!

Test Case	temperature conditions	power source voltages	C	NC	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Extreme	Extreme	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

15 RF measurements LTE band 5

15.1 Description of test setup

For the spurious measurements we use the substitution method according TIA/EIA 603.

15.2 Results

The EUT was set to transmit the maximum power.

15.2.1 RF output power

Description:

This paragraph contains conducted average power, ERP and Peak-to-Average Power Ratio measurements for the mobile station.

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector	
Sweep time	
Video bandwidth	Measured with CMW500
Resolution bandwidth	
Span	
Trace mode	
Setup	See chapter 7.1 - setup B, 7.4 – setup B
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Nominal Peak Output Power	
+38.45 dBm (FCC) / +33 dBm (IC) In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (conducted)						
Bandwidth (MHz)	Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Peak to Average Ratio (dB)	Average Output Power (dBm) 16-QAM	Peak to Average Ratio (dB)
1.4	824.7	1 RB low	21.9	4.6	20.7	5.3
		1 RB high	22.1	4.6	21.0	5.3
		50% RB mid	22.0	4.6	21.0	5.5
		100% RB	20.9	5.0	19.8	5.9
	836.5	1 RB low	22.0	4.3	20.9	5.1
		1 RB high	22.1	4.3	21.0	5.1
		50% RB mid	22.2	4.4	21.3	5.2
		100% RB	21.1	4.9	20.1	5.7
	848.3	1 RB low	22.1	3.9	21.0	4.7
		1 RB high	22.2	4.1	21.2	4.9
		50% RB mid	22.1	4.1	21.0	5.0
		100% RB	21.1	4.6	19.9	5.4
3	825.5	1 RB low	21.6	4.7	20.5	5.4
		1 RB high	21.9	4.7	20.6	5.3
		50% RB mid	21.1	4.6	20.0	5.4
		100% RB	21.0	5.0	19.9	5.9
	836.5	1 RB low	22.3	4.3	21.3	5.1
		1 RB high	22.3	4.5	21.1	5.3
		50% RB mid	21.2	4.4	20.0	5.3
		100% RB	21.2	4.9	20.1	5.7
	847.5	1 RB low	22.2	4.0	20.8	4.8
		1 RB high	22.1	4.2	20.9	5.0
		50% RB mid	21.1	4.1	19.9	5.0
		100% RB	21.0	4.5	20.0	5.4
5	826.5	1 RB low	21.6	4.7	20.3	5.2
		1 RB high	22.0	4.4	21.0	5.1
		50% RB mid	20.9	4.6	20.0	5.5
		100% RB	20.9	5.0	19.9	5.8
	836.5	1 RB low	21.9	4.3	20.8	5.0
		1 RB high	22.0	4.6	20.8	5.3
		50% RB mid	21.2	4.5	20.2	5.4
		100% RB	21.2	4.8	20.1	5.7
	846.5	1 RB low	21.9	4.3	20.6	5.1
		1 RB high	21.8	4.2	20.5	4.9
		50% RB mid	21.2	4.3	20.2	5.1
		100% RB	21.1	4.5	20.0	5.4

10	829	1 RB low	21.5	4.7	20.6	5.2
		1 RB high	21.8	4.2	20.7	5.0
		50% RB mid	21.1	4.6	20.1	5.5
		100% RB	21.1	4.8	20.0	5.7
	836.5	1 RB low	22.2	4.2	21.1	5.0
		1 RB high	22.0	4.7	21.1	5.4
		50% RB mid	21.3	4.5	20.1	5.4
		100% RB	21.2	4.8	20.2	5.6
	844	1 RB low	22.2	4.6	21.0	5.4
		1 RB high	21.9	4.1	20.8	4.8
		50% RB mid	21.2	4.6	20.0	5.5
		100% RB	21.1	4.7	20.0	5.6

The radiated output power is measured in the mode with the highest conducted output power.

Output Power (radiated)			
Bandwidth (MHz)	Frequency (MHz)	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM
1.4	824.7	23.8	23.7
	836.5	22.5	22.4
	848.3	24.0	23.8
3	825.5	24.0	23.8
	836.5	22.6	22.5
	847.5	24.0	23.7
5	826.5	23.9	23.8
	836.5	22.6	22.3
	846.5	23.9	23.7
10	829.0	23.9	23.7
	836.5	22.7	22.5
	844.0	24.5	24.2

15.2.2 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2014 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 846.6 MHz. Measurement made up to 12.75 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE band 5.

Measurement:

Measurement parameters	
Detector	Peak
Sweep time	2 sec.
Video bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span	100 MHz Steps
Trace mode	Max Hold
Setup	See chapter 7.1 - setup B; 7.2 - setup A/B
Measurement uncertainty	See chapter 9

Limits:

FCC	IC
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P) / (P, \text{Power in Watts})$	
-13 dBm	

QPSK:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	1658.0	All detected emissions are more than 20dB below the limit!	2	1673.0	All detected emissions are more than 20dB below the limit!	2	1688.0	All detected emissions are more than 20dB below the limit!
3	2487.0		3	2509.5		3	2532.0	
4	3316.0		4	3346.0		4	3376.0	
5	4145.0		5	4182.5		5	4220.0	
6	4974.0		6	5019.0		6	5064.0	
7	5803.0		7	5855.5		7	5908.0	
8	6632.0		8	6692.0		8	6752.0	
9	7461.0		9	7528.5		9	7596.0	
10	8290.0		10	8365.0		10	8440.0	

16-QAM:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	1658.0	All detected emissions are more than 20dB below the limit!	2	1673.0	All detected emissions are more than 20dB below the limit!	2	1688.0	All detected emissions are more than 20dB below the limit!
3	2487.0		3	2509.5		3	2532.0	
4	3316.0		4	3346.0		4	3376.0	
5	4145.0		5	4182.5		5	4220.0	
6	4974.0		6	5019.0		6	5064.0	
7	5803.0		7	5855.5		7	5908.0	
8	6632.0		8	6692.0		8	6752.0	
9	7461.0		9	7528.5		9	7596.0	
10	8290.0		10	8365.0		10	8440.0	

Results: QPSK with 10 MHz channel bandwidth


Plot 1: Channel 20525 (Traffic mode up to 30 MHz)

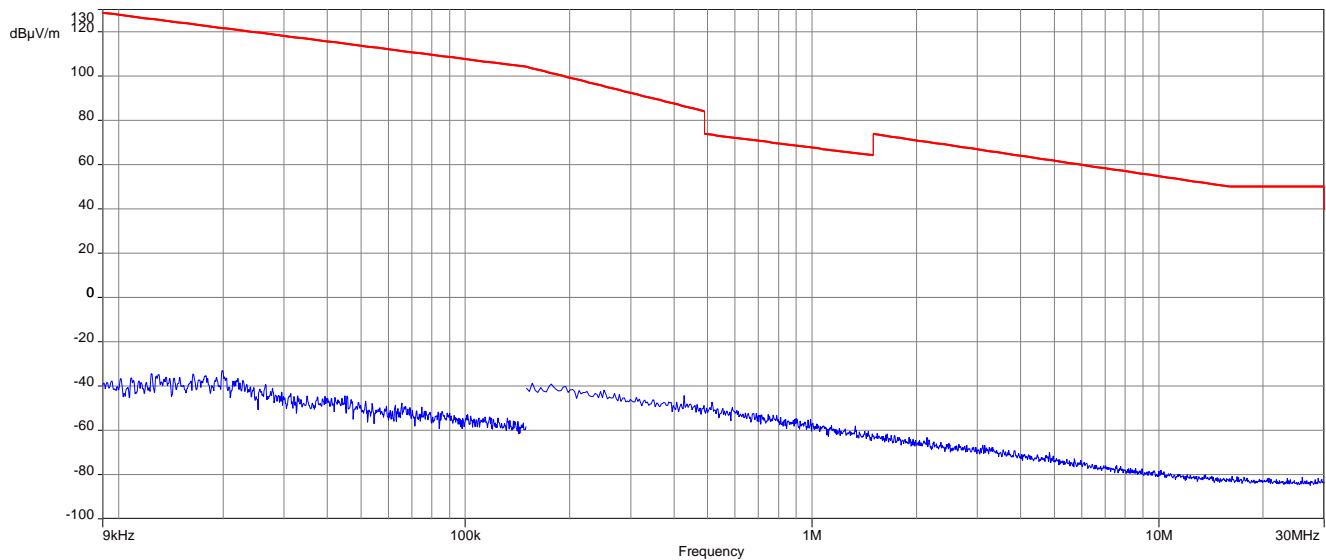

Plot 2: Channel 20525 (30 MHz – 1 GHz)

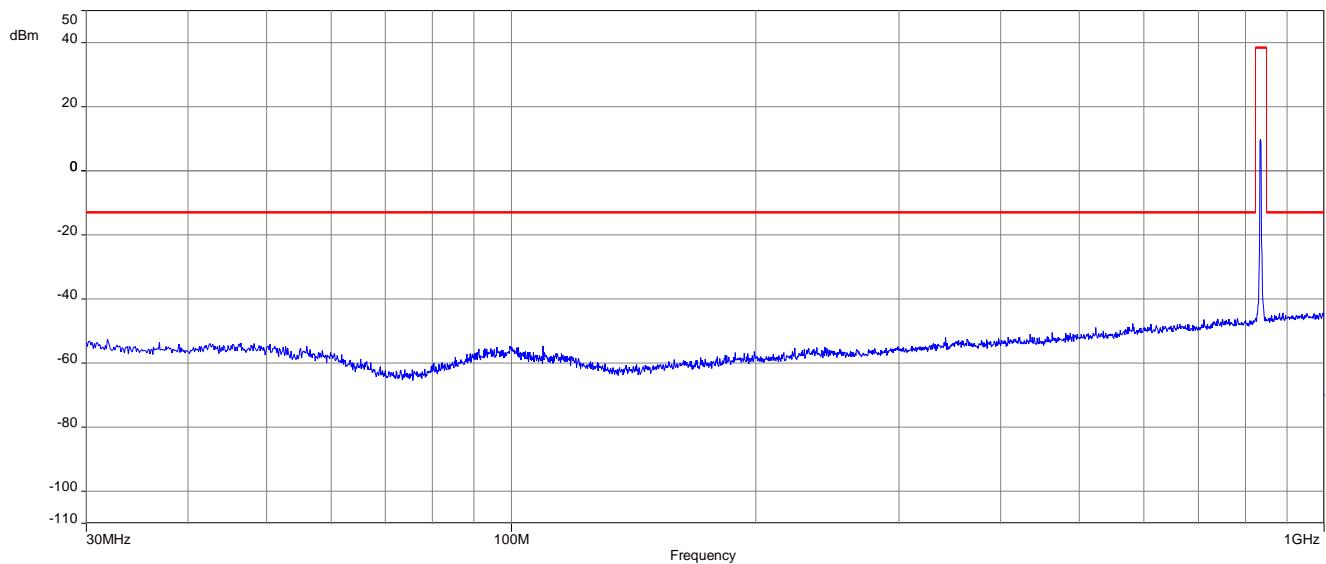


Plot 3: Channel 20525 (1 GHz – 12 GHz)

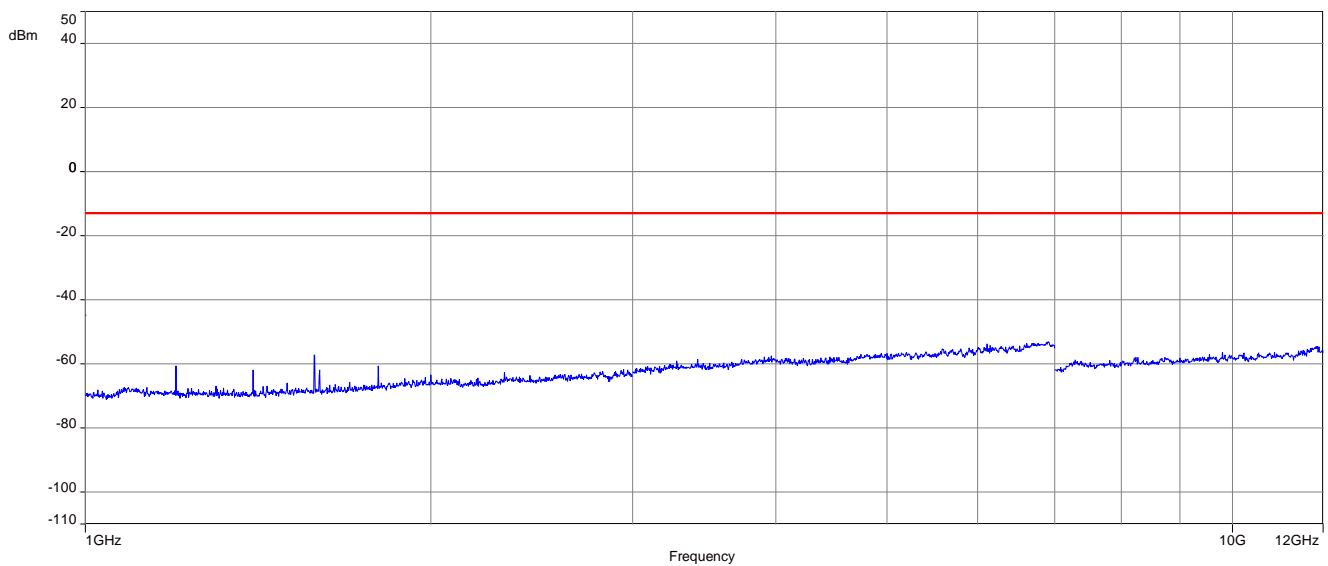


Results: 16-QAM with 10 MHz channel bandwidth


Plot 1: Channel 20525 (Traffic mode up to 30 MHz)

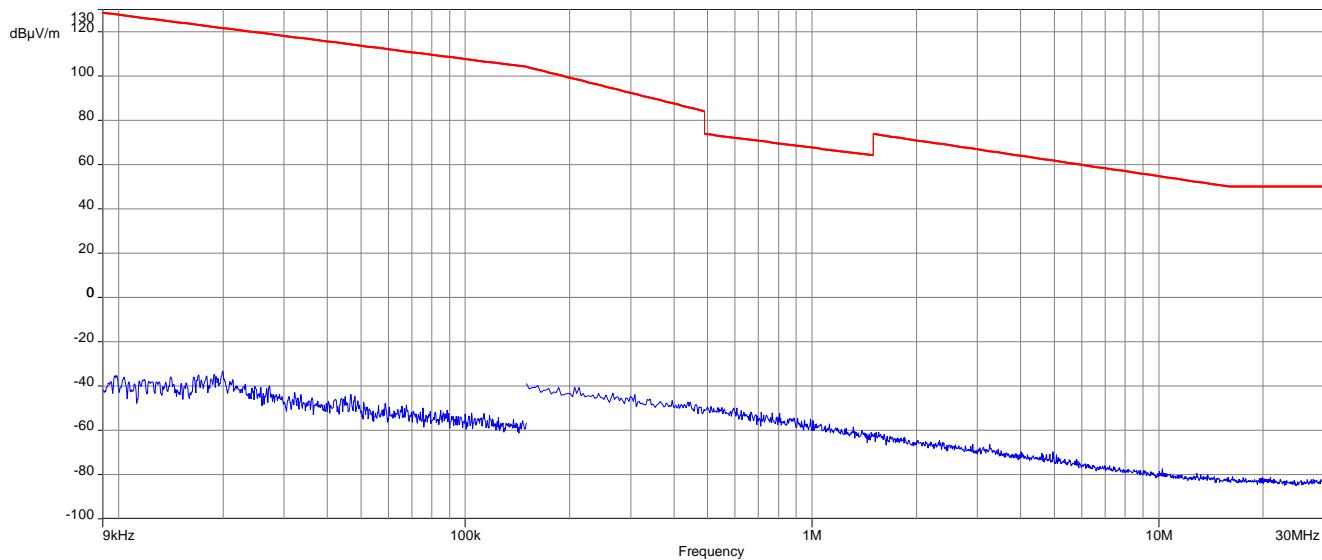

Plot 2: Channel 20525 (30 MHz – 1 GHz)

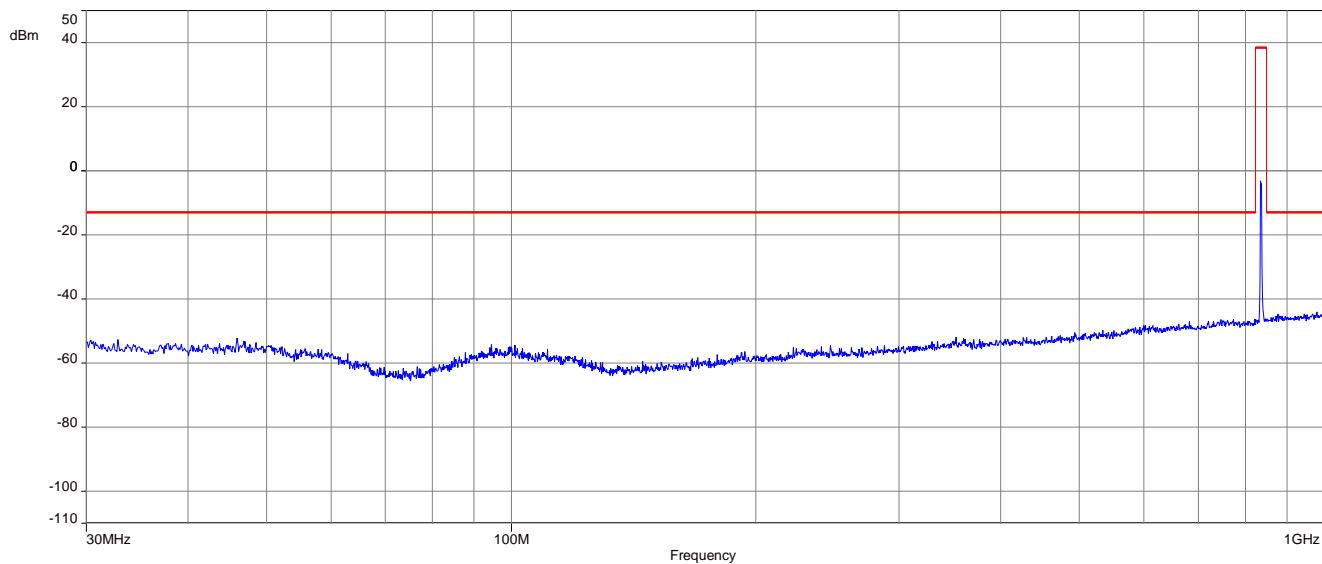

Plot 3: Channel 20525 (1 GHz – 12 GHz)

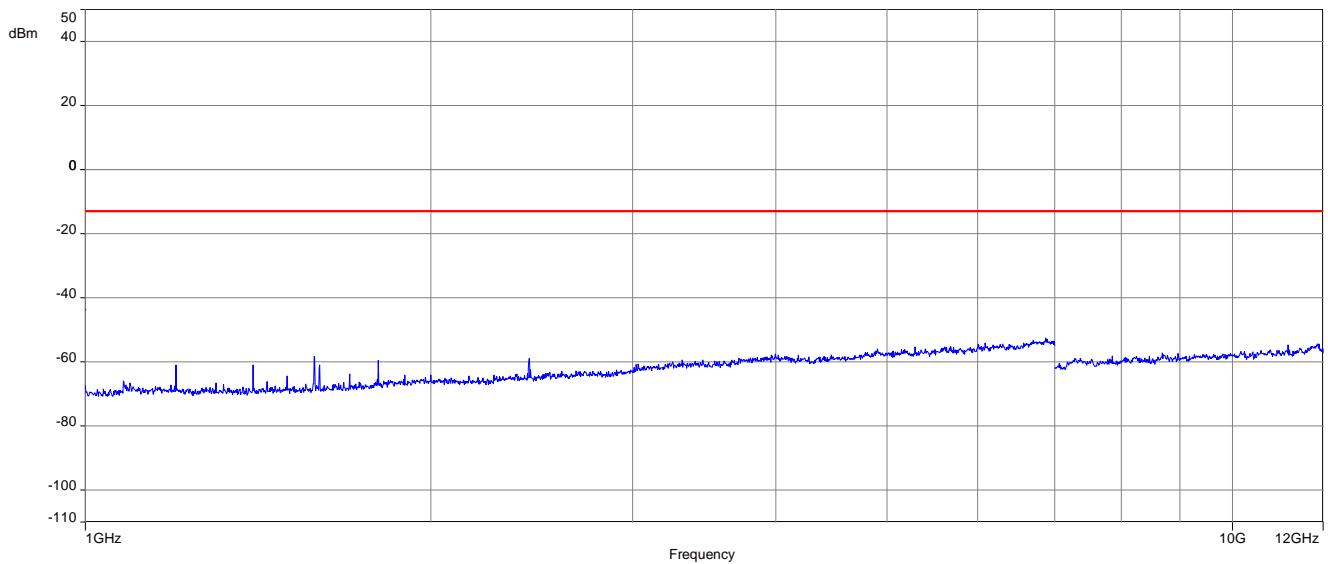

16 Summary of measurement results LTE band 12

<input type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input checked="" type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 27 RSS-130	See table!	2022-04-11	Delta tests according to manufacturer demand!

16.1 LTE – Band 12

Test Case	temperature conditions	power source voltages	C	NC	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Extreme	Extreme	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

17 RF measurements LTE 12

17.1 Description of test setup

For the spurious measurements we use the substitution method according TIA/EIA 603.

17.2 Results LTE – Band 12

The EUT was set to transmit the maximum power.

17.2.1 RF output power

Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector	
Sweep time	
Video bandwidth	
Resolution bandwidth	Measured with CMW500
Span	
Trace mode	
Setup	See chapter 7.1 - setup B, 7.4 – setup B
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Average E.I.R.P. Output Power	
34.77 dBm (FCC) / +37.00 dBm (ISED) In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (conducted)						
Bandwidth (MHz)	Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Peak to Average Ratio (dB)	Average Output Power (dBm) 16-QAM	Peak to Average Ratio (dB)
1.4	699.7	1 RB low	21.9	3.7	20.8	4.3
		1 RB high	21.5	3.7	20.8	4.3
		50% RB mid	21.8	3.9	21.0	4.7
		100% RB	20.9	4.9	20.0	5.8
	707.5	1 RB low	21.7	3.7	20.6	4.5
		1 RB high	21.7	3.6	20.8	4.4
		50% RB mid	21.8	3.8	20.9	4.6
		100% RB	20.8	5.1	19.9	5.9
	715.3	1 RB low	21.8	3.8	20.7	4.6
		1 RB high	21.9	3.7	20.7	4.4
		50% RB mid	21.7	3.8	20.8	4.7
		100% RB	20.8	4.9	19.8	5.8
3	700.5	1 RB low	21.7	3.7	20.7	4.2
		1 RB high	21.5	3.9	20.4	4.6
		50% RB mid	20.6	4.6	19.7	5.5
		100% RB	20.6	5.0	19.7	5.9
	707.5	1 RB low	21.6	3.9	20.4	4.7
		1 RB high	21.9	3.6	20.8	4.3
		50% RB mid	20.7	4.7	19.7	5.5
		100% RB	20.7	5.1	19.7	5.9
	714.5	1 RB low	21.9	3.8	20.6	4.6
		1 RB high	21.9	3.7	20.7	4.5
		50% RB mid	20.8	4.8	19.7	5.5
		100% RB	20.7	5.0	19.8	5.9
5	701.5	1 RB low	21.5	3.7	20.5	4.2
		1 RB high	21.3	3.8	20.0	4.6
		50% RB mid	20.5	4.7	19.4	5.6
		100% RB	20.4	5.1	19.5	5.9
	707.5	1 RB low	21.3	3.8	20.1	4.6
		1 RB high	21.5	3.5	20.5	4.3
		50% RB mid	20.8	4.7	19.9	5.6
		100% RB	20.7	5.0	19.7	5.9
	713.5	1 RB low	21.5	3.5	20.3	4.3
		1 RB high	21.6	3.7	20.4	4.2
		50% RB mid	20.8	4.7	19.7	5.6
		100% RB	20.9	5.1	19.8	5.9

10	704.0	1 RB low	21.6	3.7	20.5	4.4
		1 RB high	21.4	3.5	20.6	4.2
		50% RB mid	20.6	4.8	19.6	5.7
		100% RB	20.6	5.2	19.7	6.0
	707.5	1 RB low	21.5	3.9	20.5	4.6
		1 RB high	21.8	3.7	20.5	4.5
		50% RB mid	20.8	4.7	19.9	5.7
		100% RB	20.7	5.0	19.7	5.9
	711.0	1 RB low	21.7	3.8	20.5	4.6
		1 RB high	21.5	3.7	20.4	4.6
		50% RB mid	20.8	4.6	19.8	5.6
		100% RB	20.8	4.9	19.8	5.8

The radiated output power is measured in the mode with the highest conducted output power.

Output Power (radiated)			
Bandwidth (MHz)	Frequency (MHz)	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM
1.4	699.7	19.1	19.0
	707.5	18.5	18.8
	715.3	20.7	20.6
3	700.5	19.1	19.1
	707.5	18.7	18.5
	714.5	21.0	20.9
5	701.5	19.2	19.0
	707.5	18.6	18.5
	713.5	21.4	21.1
10	704.0	19.6	19.7
	707.5	18.9	18.8
	711.0	21.2	21.2

17.2.2 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2014 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 715 MHz. Measurement is made up to 12.75 GHz. The resolution bandwidth is set as outlined in Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE band 12.

Measurement:

Measurement parameters	
Detector	Peak
Sweep time	2 sec.
Video bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span	100 MHz Steps
Trace mode	Max Hold
Setup	See chapter 7.1 - setup B; 7.2 - setup A/B; 7.3 – setup A
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P) / (P, \text{Power in Watts})$	
-13 dBm	

QPSK:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	1408.0	All detected emissions are more than 20dB below the limit!	2	1415.0	All detected emissions are more than 20dB below the limit!	2	1422.0	All detected emissions are more than 20dB below the limit!
3	2112.0		3	2122.5		3	2133.0	
4	2816.0		4	2830.0		4	2844.0	
5	3520.0		5	3537.5		5	3555.0	
6	4224.0		6	4245.0		6	4266.0	
7	4928.0		7	4952.5		7	4977.0	
8	5632.0		8	5660.0		8	5688.0	
9	6336.0		9	6367.5		9	6399.0	
10	7040.0		10	7075.0		10	7110.0	

16-QAM:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	1408.0	All detected emissions are more than 20dB below the limit!	2	1415.0	All detected emissions are more than 20dB below the limit!	2	1422.0	All detected emissions are more than 20dB below the limit!
3	2112.0		3	2122.5		3	2133.0	
4	2816.0		4	2830.0		4	2844.0	
5	3520.0		5	3537.5		5	3555.0	
6	4224.0		6	4245.0		6	4266.0	
7	4928.0		7	4952.5		7	4977.0	
8	5632.0		8	5660.0		8	5688.0	
9	6336.0		9	6367.5		9	6399.0	
10	7040.0		10	7075.0		10	7110.0	

Results: QPSK with 10 MHz channel bandwidth


Plot 1: channel 23095 (Traffic mode up to 30 MHz)

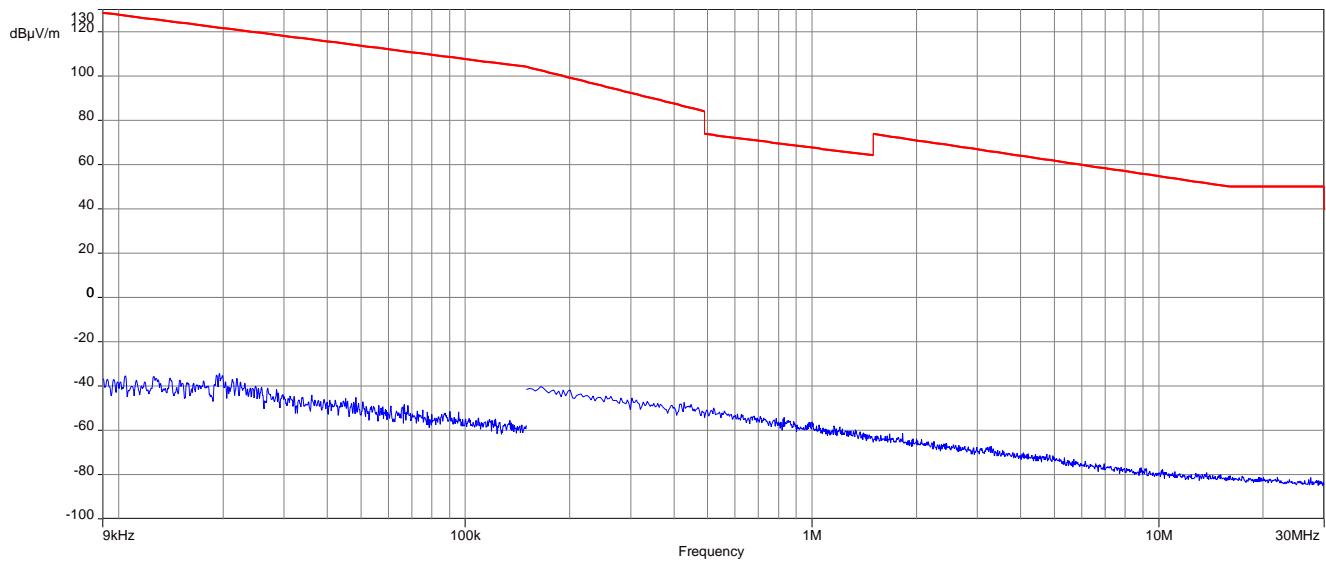

Plot 2: channel 23095 (30 MHz to 1 GHz)

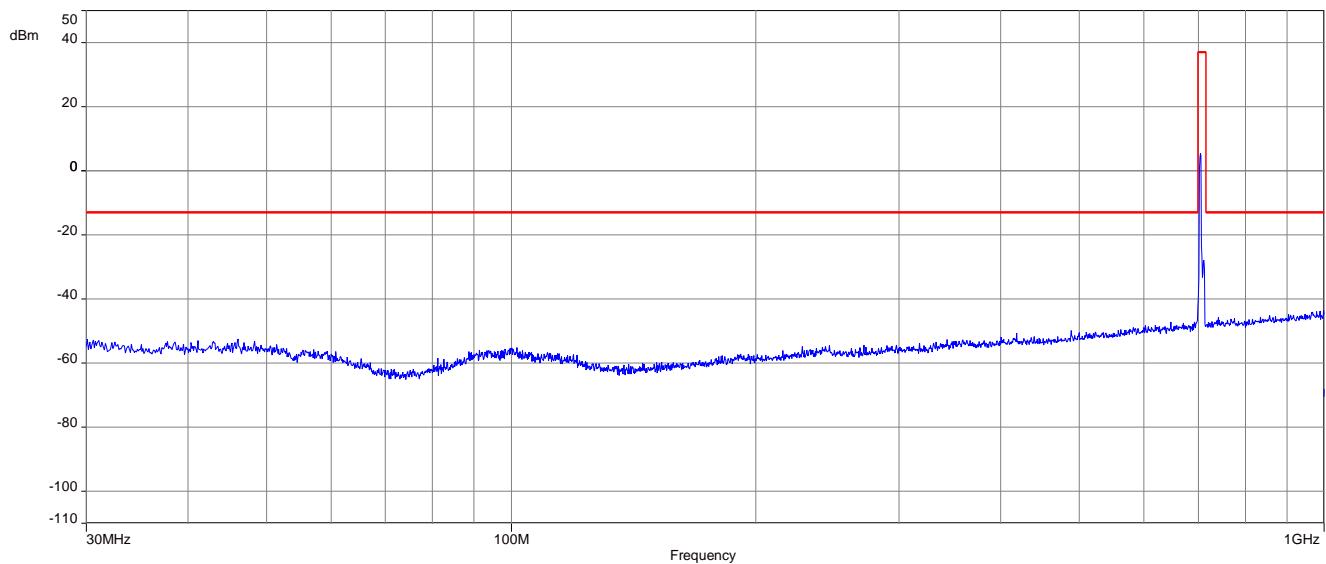


Plot 3: channel 23095 (1 GHz to 12 GHz)

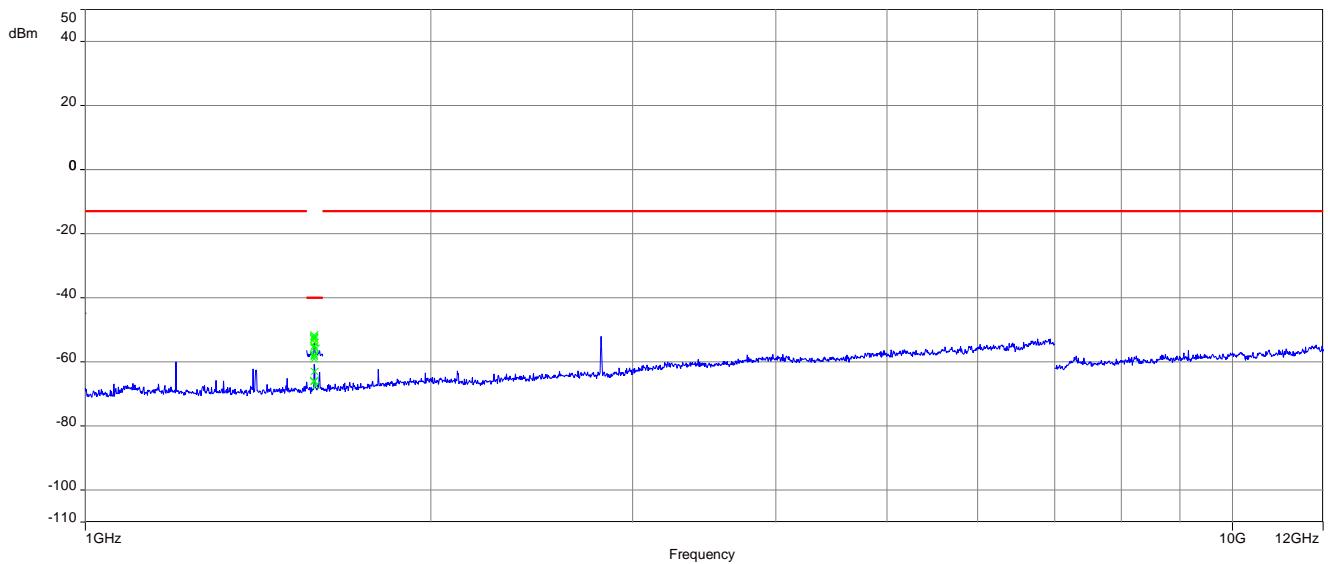


Results: 16-QAM with 10 MHz channel bandwidth


Plot 1: channel 23095 (Traffic mode up to 30 MHz)

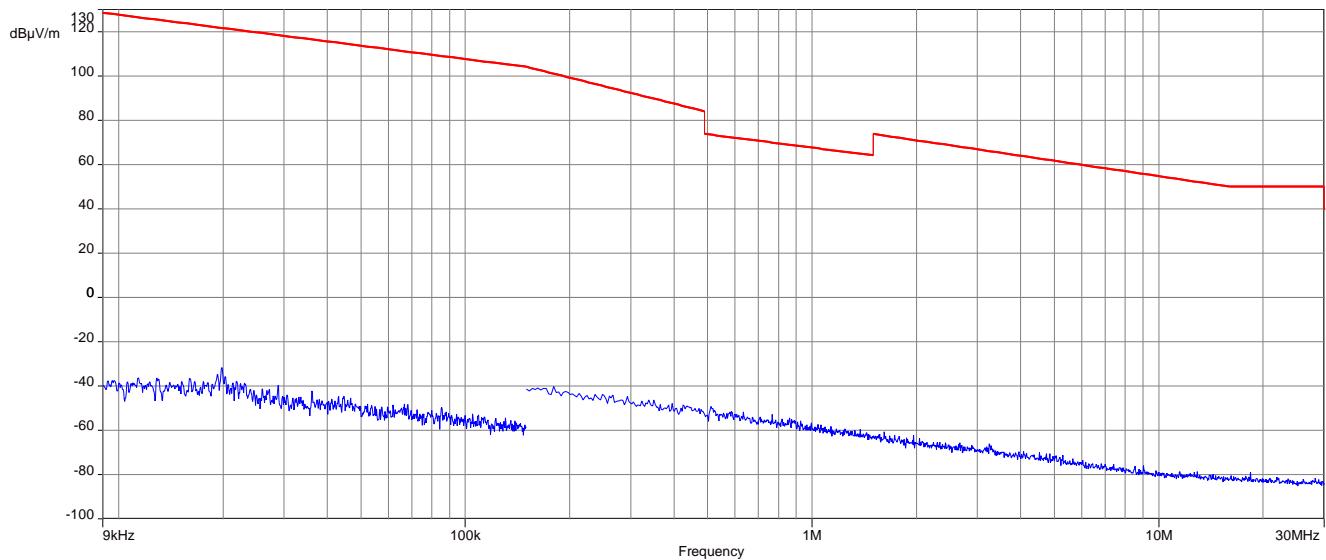

Plot 2: channel 23095 (30 MHz to 1 GHz)

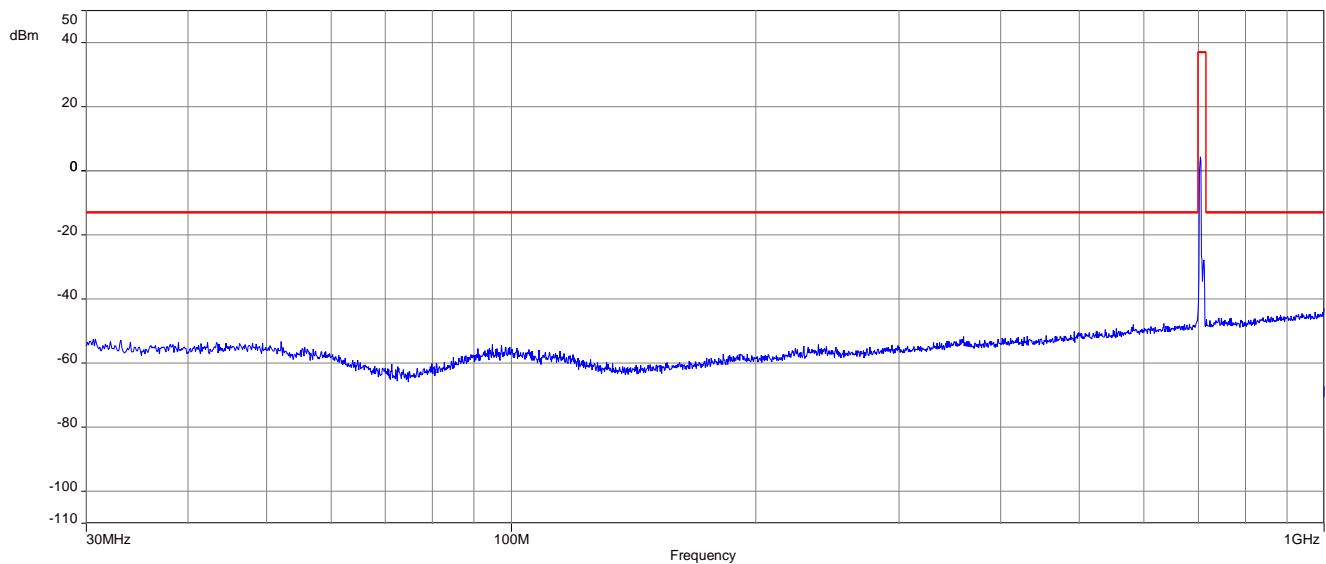

Plot 3: channel 23095 (1 GHz to 12 GHz)

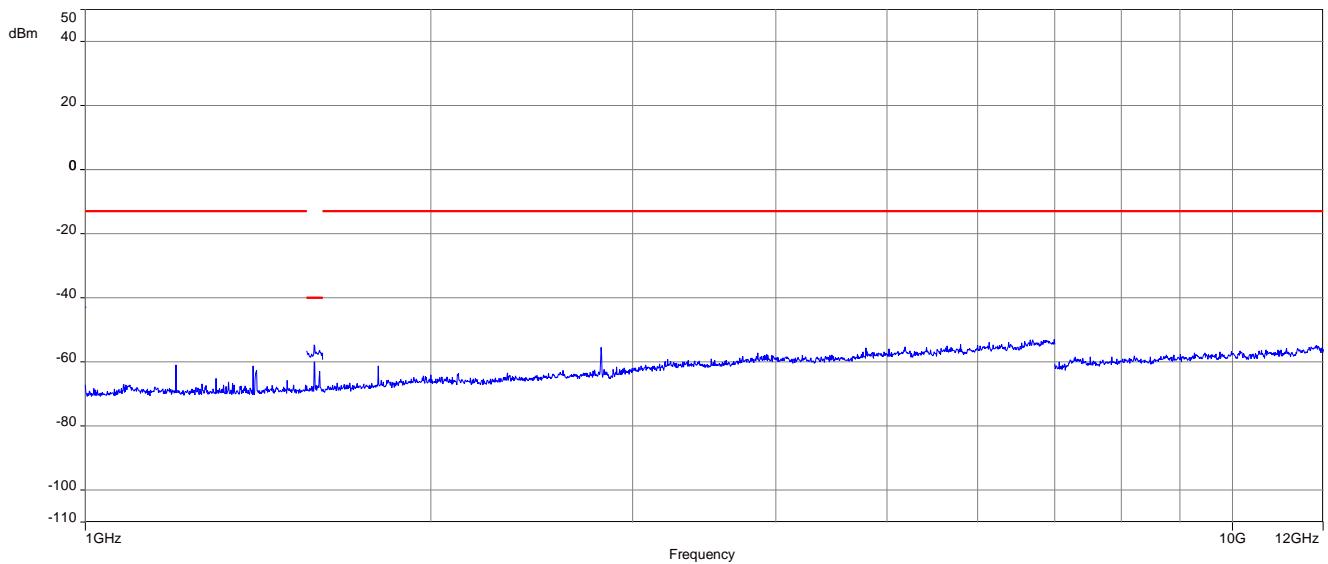

18 Summary of measurement results LTE band 13

<input type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input checked="" type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 27 RSS-130	See table!	2022-04-11	Delta tests according to manufacturer demand!

18.1 LTE – Band 13

Test Case	temperature conditions	power source voltages	C	NC	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Extreme	Extreme	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
---	-----------	----	---------------	----	----------------	----	---------------

19 RF measurements LTE 13

19.1 Description of test setup

For the spurious measurements we use the substitution method according TIA/EIA 603.

19.2 Results LTE – Band 13

The EUT was set to transmit the maximum power.

19.2.1 RF output power

Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector	
Sweep time	
Video bandwidth	Measured with CMW500
Resolution bandwidth	
Span	
Trace mode	
Setup	See chapter 7.1 - setup B, 7.4 – setup B
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Average E.I.R.P. Output Power	
34.77 dBm (FCC) / +37.00 dBm (ISED) In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (conducted)						
Bandwidth (MHz)	Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Peak to Average Ratio (dB)	Average Output Power (dBm) 16-QAM	Peak to Average Ratio (dB)
5	779.5	1 RB low	21.7	4.9	20.6	5.7
		1 RB high	21.9	5.0	21.0	5.7
		50% RB mid	21.2	5.4	20.1	6.3
		100% RB	21.1	5.7	20.1	6.6
	782.0	1 RB low	21.6	5.2	20.8	5.9
		1 RB high	22.2	4.6	21.2	5.5
		50% RB mid	21.3	5.3	20.0	6.3
		100% RB	21.0	5.7	20.1	6.5
	784.5	1 RB low	21.8	4.9	20.9	5.7
		1 RB high	22.3	4.5	21.0	5.5
		50% RB mid	21.3	5.0	20.2	6.0
		100% RB	21.3	5.4	20.3	6.3
10	782.0	1 RB low	21.3	5.0	20.6	5.8
		1 RB high	22.1	4.6	21.0	5.5
		50% RB mid	21.0	5.4	20.1	6.3
		100% RB	21.1	5.5	20.0	6.4

The radiated output power is measured in the mode with the highest conducted output power.

Output Power (radiated)			
Bandwidth (MHz)	Frequency (MHz)	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM
5	779.5	22.4	22.3
	782.0	22.5	22.4
	784.5	22.2	22.1
10	782.0	22.3	22.1

19.2.2 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2014 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 785 MHz. Measurement is made up to 12.75 GHz. The resolution bandwidth is set as outlined in Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE band 13.

Measurement:

Measurement parameters	
Detector	Peak
Sweep time	2 sec.
Video bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span	100 MHz Steps
Trace mode	Max Hold
Setup	See chapter 7.1 - setup B; 7.2 - setup A/B; 7.3 – setup A
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P) / (P, \text{Power in Watts})$	
-13 dBm	

QPSK:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	-/-	-/-	2	1564.0	All detected emissions are more than 20dB below the limit!	2	-/-	-/-
3	-/-		3	2346.0		3	-/-	
4	-/-		4	3128.0		4	-/-	
5	-/-		5	3910.0		5	-/-	
6	-/-		6	4692.0		6	-/-	
7	-/-		7	5474.0		7	-/-	
8	-/-		8	6256.0		8	-/-	
9	-/-		9	7038.0		9	-/-	
10	-/-		10	7820.0		10	-/-	

16-QAM:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	-/-	-/-	2	1564.0	All detected emissions are more than 20dB below the limit!	2	-/-	-/-
3	-/-		3	2346.0		3	-/-	
4	-/-		4	3128.0		4	-/-	
5	-/-		5	3910.0		5	-/-	
6	-/-		6	4692.0		6	-/-	
7	-/-		7	5474.0		7	-/-	
8	-/-		8	6256.0		8	-/-	
9	-/-		9	7038.0		9	-/-	
10	-/-		10	7820.0		10	-/-	

Results: QPSK with 10 MHz channel bandwidth


Plot 1: channel 23230 (Traffic mode up to 30 MHz)

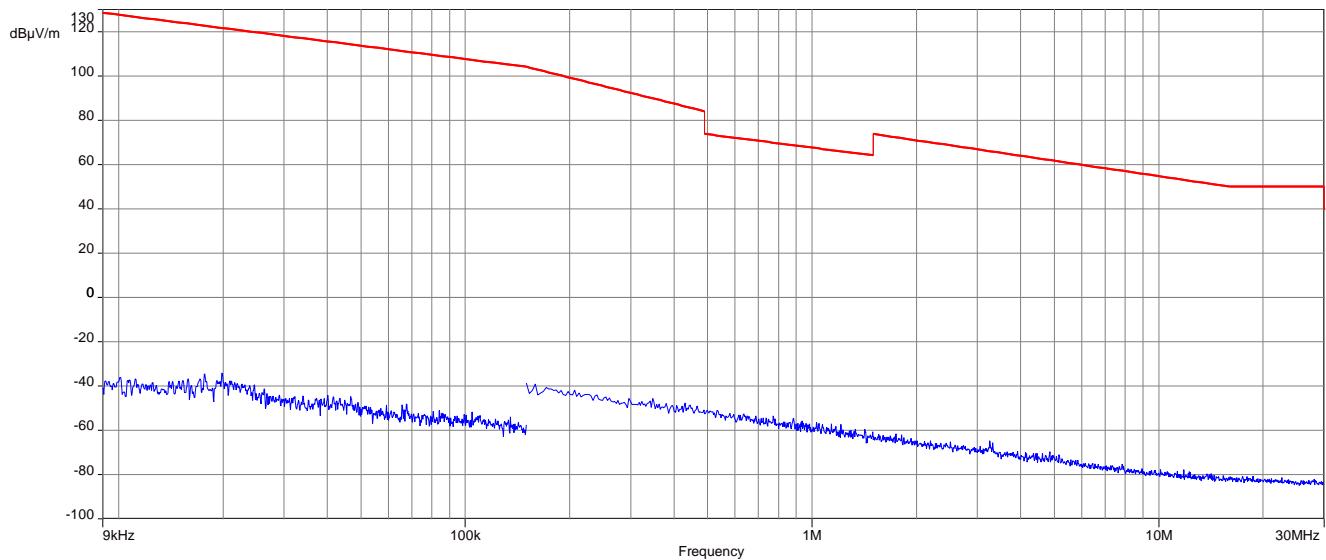

Plot 2: channel 23230 (30 MHz to 1 GHz)

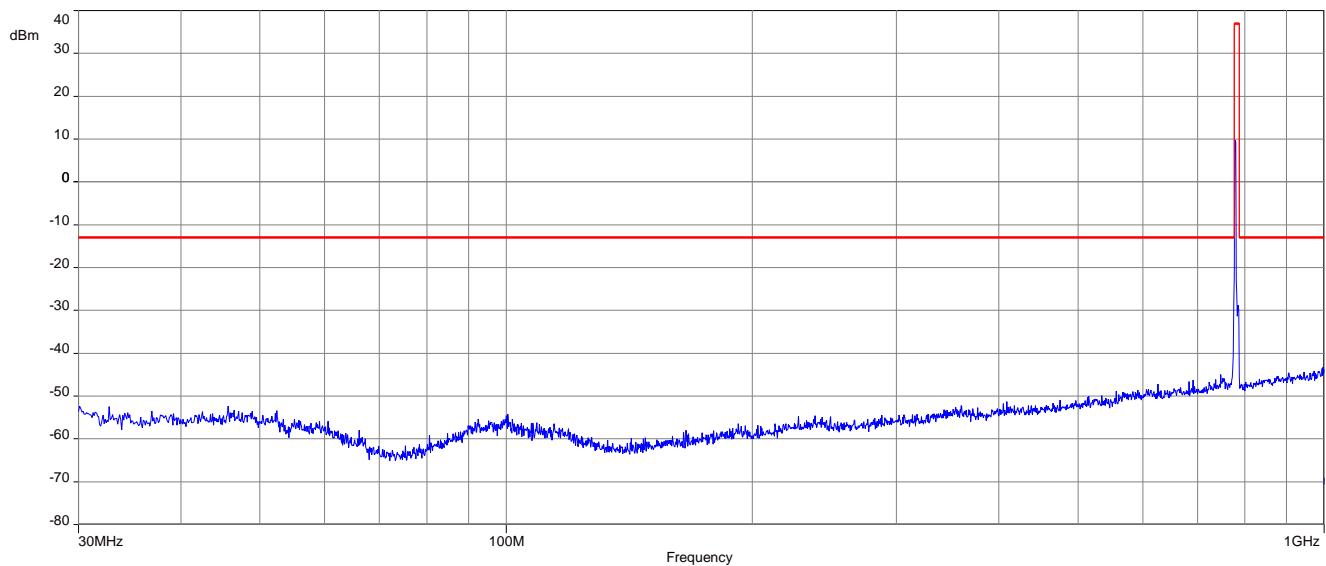


Plot 3: channel 23230 (1 GHz to 12 GHz)

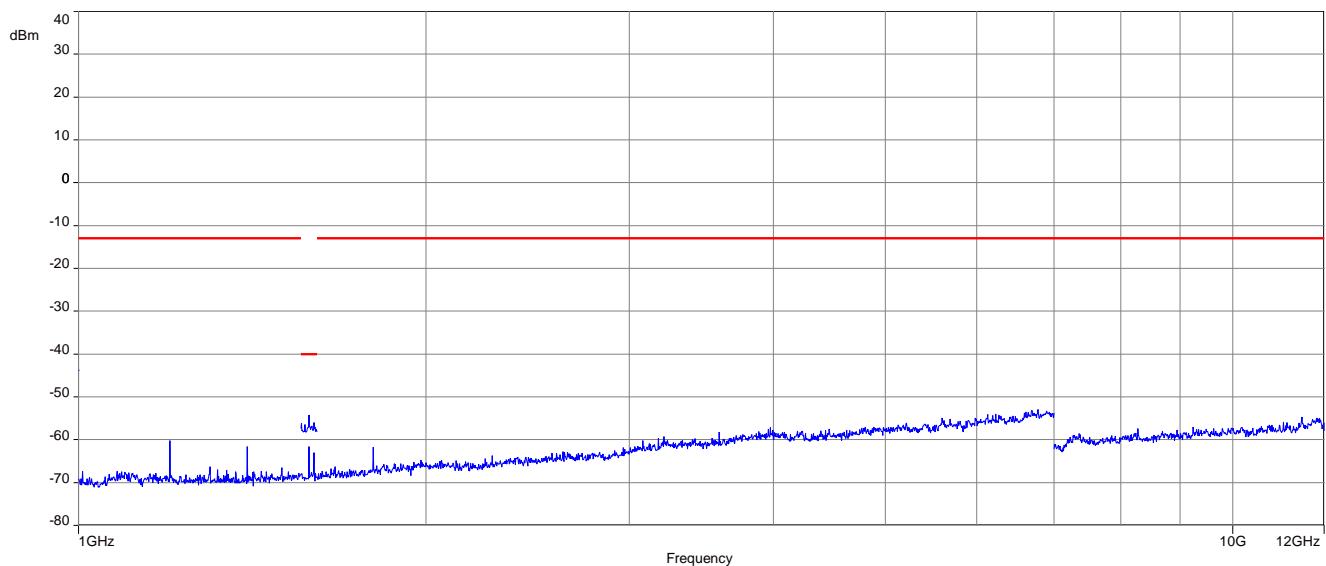


Results: 16-QAM with 10 MHz channel bandwidth


Plot 1: channel 23230 (Traffic mode up to 30 MHz)

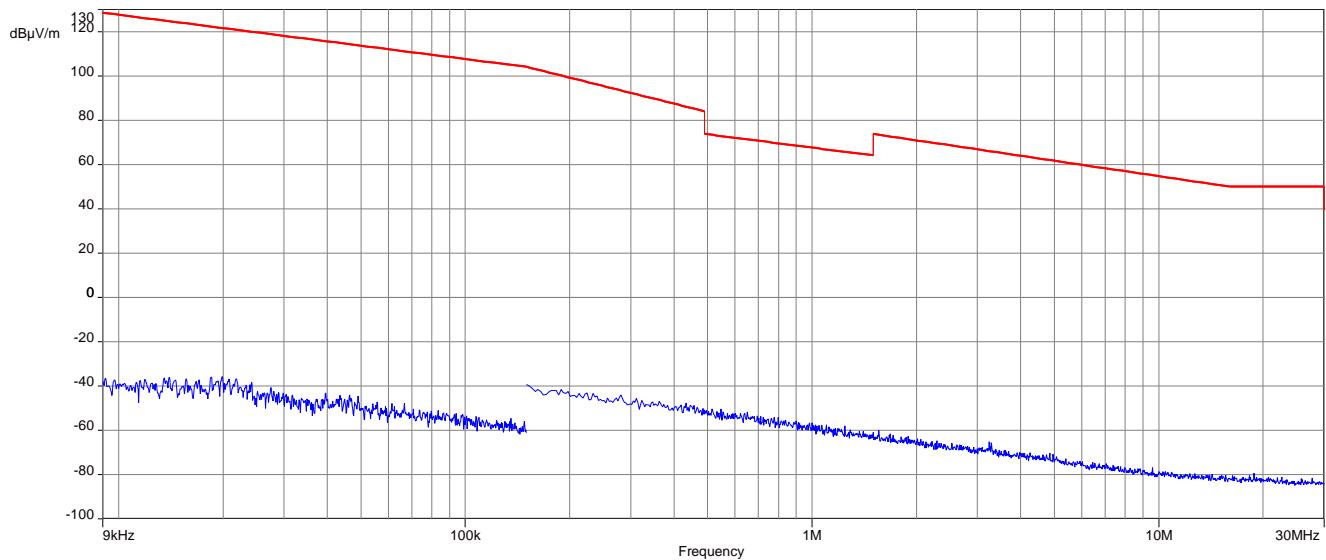

Plot 2: channel 23230 (30 MHz to 1 GHz)

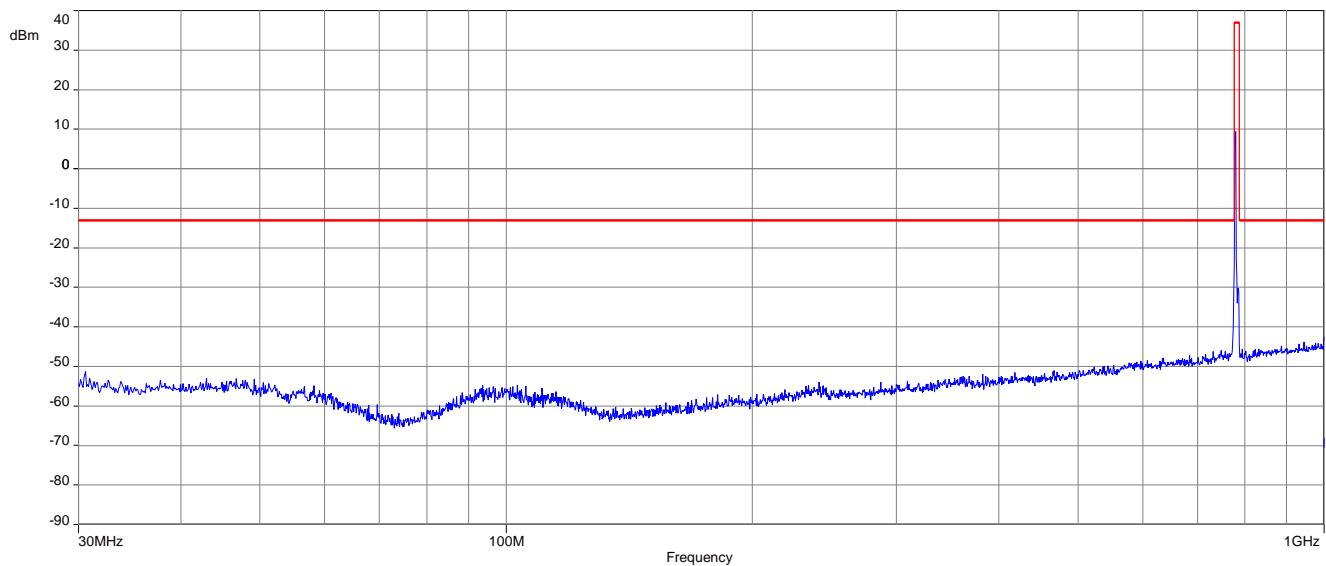

Plot 3: channel 23230 (1 GHz to 12 GHz)

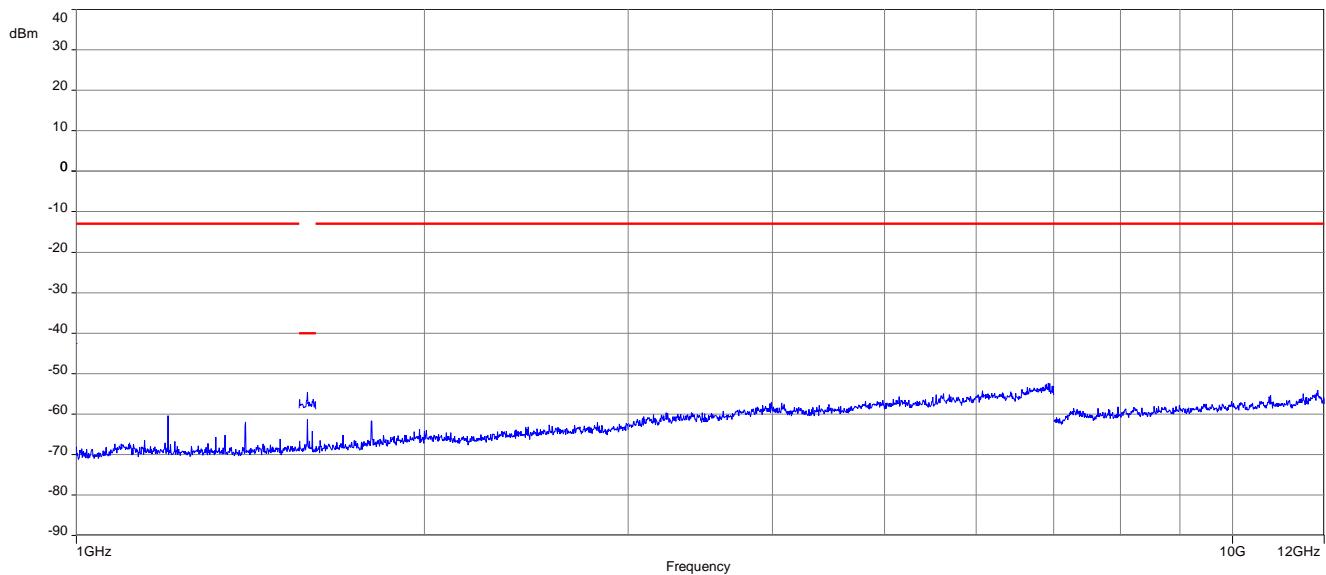

20 Summary of measurement results LTE band 25

<input type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input checked="" type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

20.1 LTE – Band 25

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 24 RSS 133	See table	2022-04-11	Delta tests according to manufacturer demand!

Test Case	temperature conditions	power source voltages	C	NC	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Extreme	Extreme	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

21 RF measurements LTE band 25

21.1 Description of test setup

For the spurious measurements we use the substitution method according TIA/EIA 603.

21.2 Results

21.2.1 RF output power

Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector	
Sweep time	
Video bandwidth	
Resolution bandwidth	Measured with CMW500
Span	
Trace mode	
Setup	See chapter 7.2 - setup B, 7.4 – setup B
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Nominal Peak Output Power	
+33.00 dBm	
In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (conducted)						
Bandwidth (MHz)	Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Peak to Average Ratio (dB)	Average Output Power (dBm) 16-QAM	Peak to Average Ratio (dB)
1.4	1850.7	1 RB low	20.8	4.9	19.6	5.7
		1 RB high	20.7	4.8	19.4	5.6
		50% RB mid	20.6	4.9	19.6	5.8
		100% RB	19.5	5.4	18.5	6.3
	1880.0	1 RB low	20.7	5.0	19.7	5.8
		1 RB high	20.8	4.8	19.6	5.7
		50% RB mid	20.8	4.9	19.8	5.9
		100% RB	19.7	5.4	18.8	6.3
	1914.3	1 RB low	20.6	3.6	19.5	4.8
		1 RB high	19.7	3.0	19.3	3.7
		50% RB mid	20.1	3.1	19.6	4.0
		100% RB	20.0	3.5	19.0	4.9
3	1851.5	1 RB low	20.7	4.8	19.4	5.7
		1 RB high	20.7	4.7	19.2	5.5
		50% RB mid	19.6	4.8	18.4	5.7
		100% RB	19.5	5.3	18.5	6.1
	1880.0	1 RB low	20.5	5.0	19.5	5.8
		1 RB high	20.7	4.8	19.4	5.6
		50% RB mid	19.8	5.0	18.8	5.9
		100% RB	19.7	5.5	18.8	6.4
	1913.5	1 RB low	19.7	4.7	19.1	5.4
		1 RB high	19.6	3.1	19.2	3.9
		50% RB mid	19.9	4.4	19.0	5.4
		100% RB	20.0	4.3	19.0	5.4
5	1852.5	1 RB low	20.4	4.8	19.1	5.6
		1 RB high	20.4	4.6	19.1	5.3
		50% RB mid	19.5	4.8	18.6	5.8
		100% RB	19.6	5.2	18.6	6.1
	1880.0	1 RB low	20.5	5.1	19.4	5.8
		1 RB high	20.6	4.6	19.0	5.4
		50% RB mid	19.8	5.1	18.7	6.0
		100% RB	19.7	5.5	18.7	6.3
	1912.5	1 RB low	20.4	4.3	19.2	5.1
		1 RB high	20.2	3.0	19.8	3.7
		50% RB mid	19.8	4.7	18.9	5.7
		100% RB	20.0	4.8	19.0	5.8

10	1855.0	1 RB low	20.7	4.8	19.4	5.5
		1 RB high	20.3	4.8	19.0	5.7
		50% RB mid	19.5	4.8	18.6	5.7
		100% RB	19.5	5.2	18.6	6.0
	1880.0	1 RB low	20.9	5.0	19.7	5.9
		1 RB high	20.6	4.4	19.5	5.2
		50% RB mid	19.8	5.1	18.9	6.0
		100% RB	19.6	5.3	18.7	6.2
	1910.0	1 RB low	20.6	4.2	19.5	5.1
		1 RB high	19.7	3.6	19.0	4.5
		50% RB mid	19.5	4.7	18.5	5.6
		100% RB	19.6	5.0	18.6	5.9
15	1857.5	1 RB low	20.2	4.7	19.0	5.5
		1 RB high	20.1	5.0	18.9	5.7
		50% RB mid	19.4	5.0	18.5	5.9
		100% RB	19.4	5.4	18.4	6.2
	1880.0	1 RB low	20.4	5.0	19.5	5.9
		1 RB high	20.1	4.4	19.2	5.2
		50% RB mid	19.6	5.0	18.8	6.0
		100% RB	19.6	5.3	18.6	6.2
	1907.5	1 RB low	20.1	4.9	18.8	5.8
		1 RB high	19.4	3.9	18.7	4.8
		50% RB mid	19.4	4.6	18.5	5.5
		100% RB	19.5	4.9	18.5	5.8
20	1860.0	1 RB low	19.9	4.6	18.5	5.4
		1 RB high	19.3	5.0	18.7	5.7
		50% RB mid	19.4	5.2	18.4	6.1
		100% RB	19.3	5.4	18.3	6.2
	1880.0	1 RB low	19.4	5.0	18.8	5.8
		1 RB high	19.7	4.6	18.5	5.4
		50% RB mid	19.6	5.0	18.7	6.0
		100% RB	19.4	5.0	18.6	6.1
	1905.0	1 RB low	18.2	4.9	17.6	5.7
		1 RB high	18.9	4.3	18.2	5.1
		50% RB mid	19.6	4.6	18.6	5.7
		100% RB	19.4	4.8	18.4	5.9

The radiated output power is measured in the mode with the highest conducted output power.

Output Power (radiated)			
Bandwidth (MHz)	Frequency (MHz)	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM
1.4	1850.7	24.7	24.6
	1880.0	25.0	25.0
	1914.3	24.0	24.2
3	1851.5	24.6	24.6
	1880.0	24.9	25.1
	1913.5	24.7	24.7
5	1852.5	24.7	24.8
	1880.0	25.4	25.1
	1912.5	25.1	25.1
10	1855.0	24.8	24.8
	1880.0	25.2	25.1
	1910.0	25.4	25.3
15	1857.5	24.4	24.5
	1880.0	24.6	24.8
	1907.5	24.8	25.0
20	1860.0	24.9	24.7
	1880.0	24.6	24.8
	1905.0	25.3	25.2

21.2.2 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2014 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1915 MHz. Measurement made up to 26 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE band 25.

Measurement:

Measurement parameters	
Detector	Peak
Sweep time	2 sec.
Video bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span	100 MHz Steps
Trace mode	Max Hold
Setup	See chapter 7.1 - setup B; 7.2 - setup A/B ; 7.3 - setup A
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P) / (P, \text{Power in Watts})$	
-13 dBm	

QPSK:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	3710.0	All detected emissions are more than 20dB below the limit!	2	3760.0	All detected emissions are more than 20dB below the limit!	2	3820.0	All detected emissions are more than 20dB below the limit!
3	5565.0		3	5640.0		3	5730.0	
4	7420.0		4	7520.0		4	7640.0	
5	9275.0		5	9400.0		5	9550.0	
6	11130.0		6	11280.0		6	11460.0	
7	12985.0		7	13160.0		7	13370.0	
8	14840.0		8	15040.0		8	15280.0	
9	16695.0		9	16920.0		9	17190.0	
10	18550.0		10	18800.0		10	19100.0	

16-QAM:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	3710.0	All detected emissions are more than 20dB below the limit!	2	3760.0	All detected emissions are more than 20dB below the limit!	2	3820.0	All detected emissions are more than 20dB below the limit!
3	5565.0		3	5640.0		3	5730.0	
4	7420.0		4	7520.0		4	7640.0	
5	9275.0		5	9400.0		5	9550.0	
6	11130.0		6	11280.0		6	11460.0	
7	12985.0		7	13160.0		7	13370.0	
8	14840.0		8	15040.0		8	15280.0	
9	16695.0		9	16920.0		9	17190.0	
10	18550.0		10	18800.0		10	19100.0	


Results: QPSK with 10 MHz channel bandwidth

Plot 1: Channel 26340 (Traffic mode up to 30 MHz)

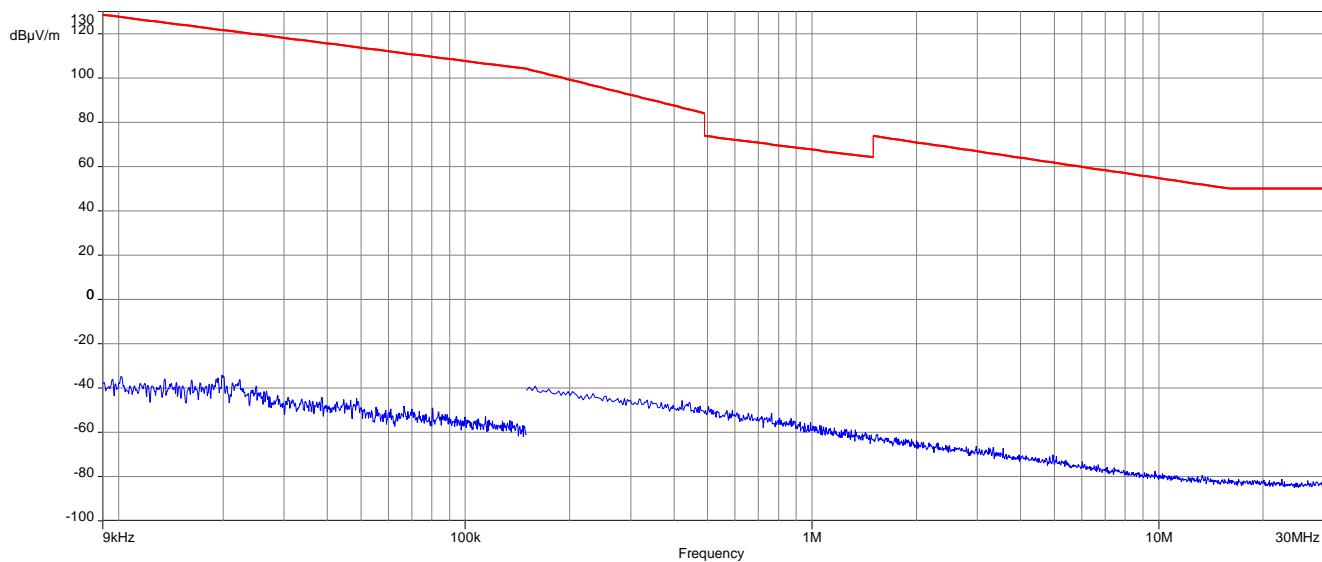


Plot 2: Channel 26340 (30 MHz – 1 GHz)

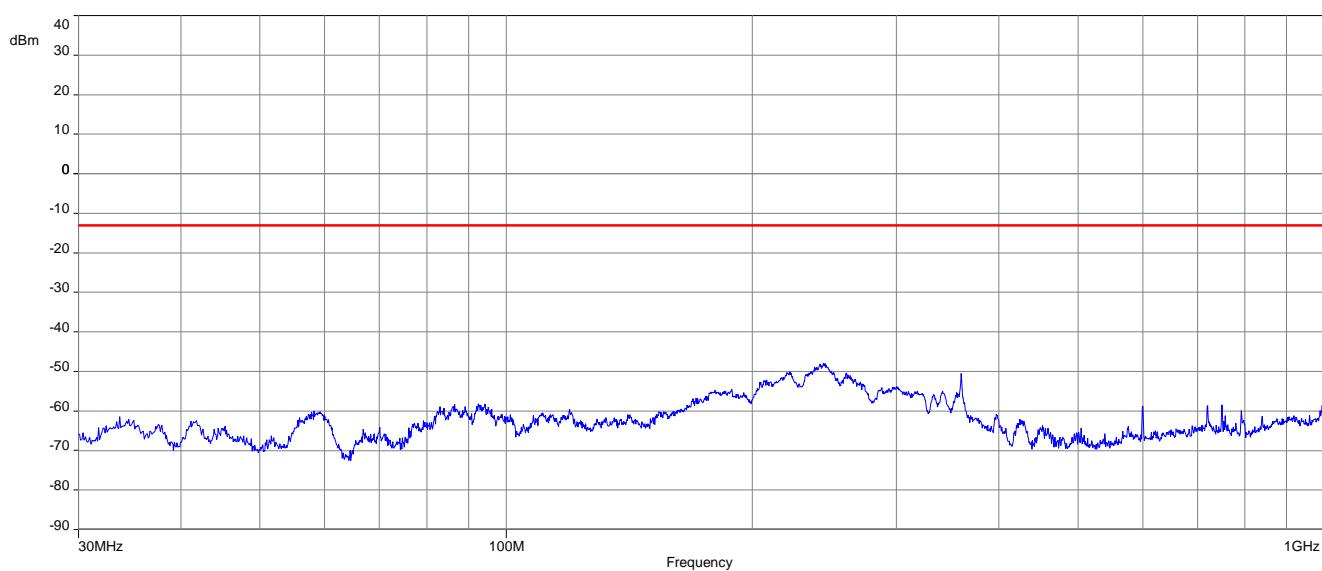

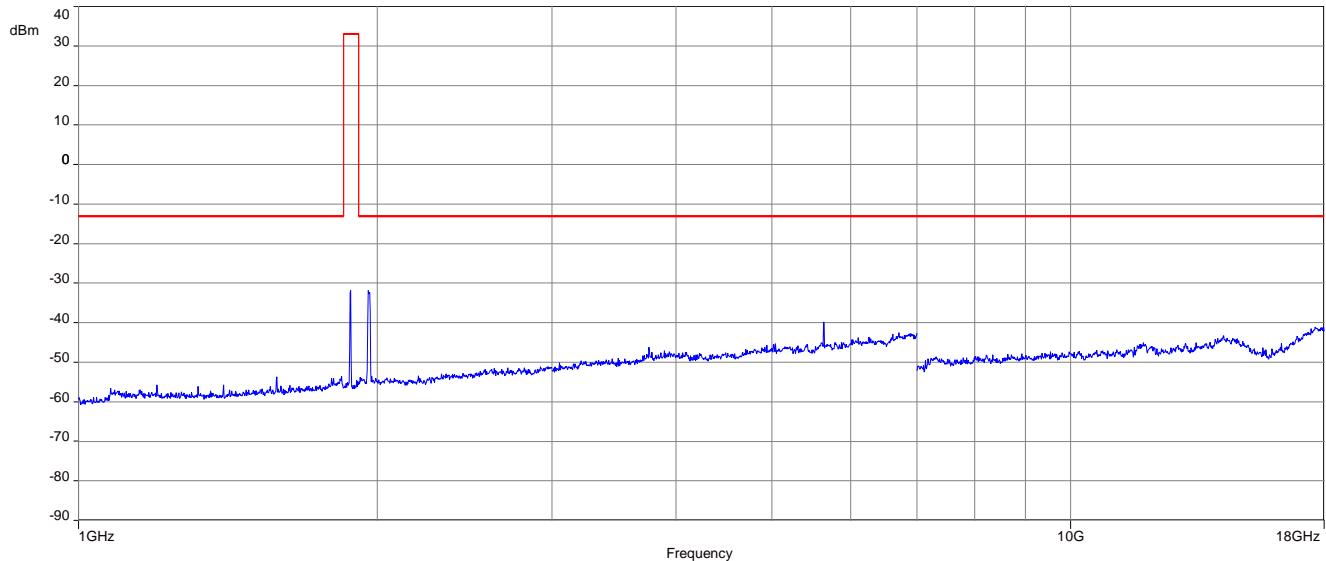Plot 3: Channel 26340 (1 GHz – 18 GHz)


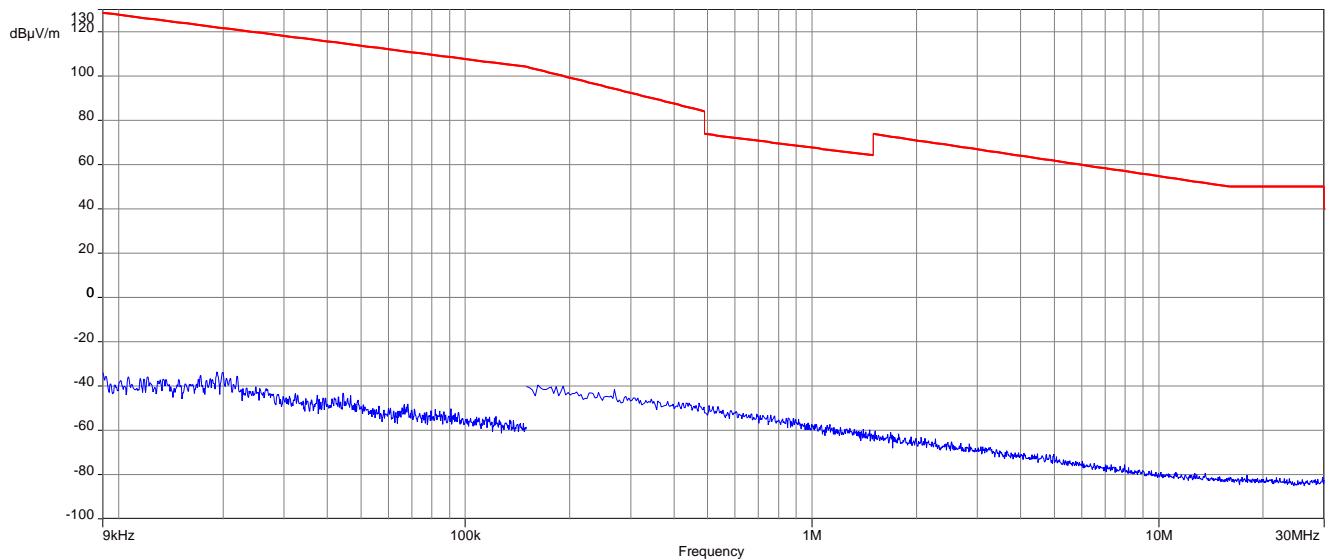
Carrier notched with 1.9 GHz rejection filter.

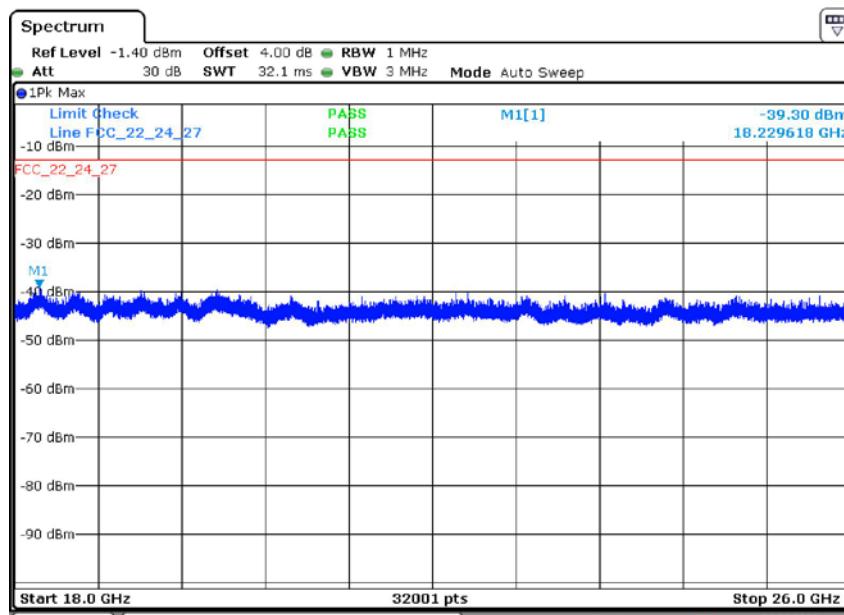Plot 4: Channel 26340 (18 GHz – 26 GHz)


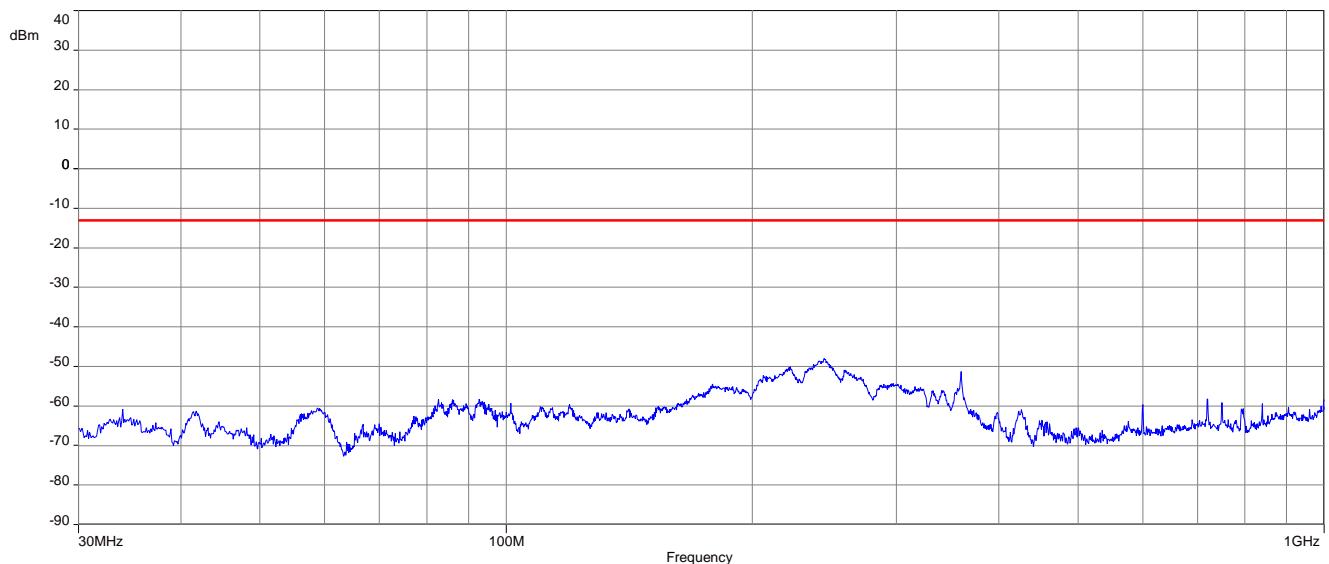
Date: 1.MAR.2022 10:07:47


Results: 16-QAM with 10 MHz channel bandwidth

Plot 1: Channel 26340 (Traffic mode up to 30 MHz)




Plot 2: Channel 26340 (30 MHz – 1 GHz)

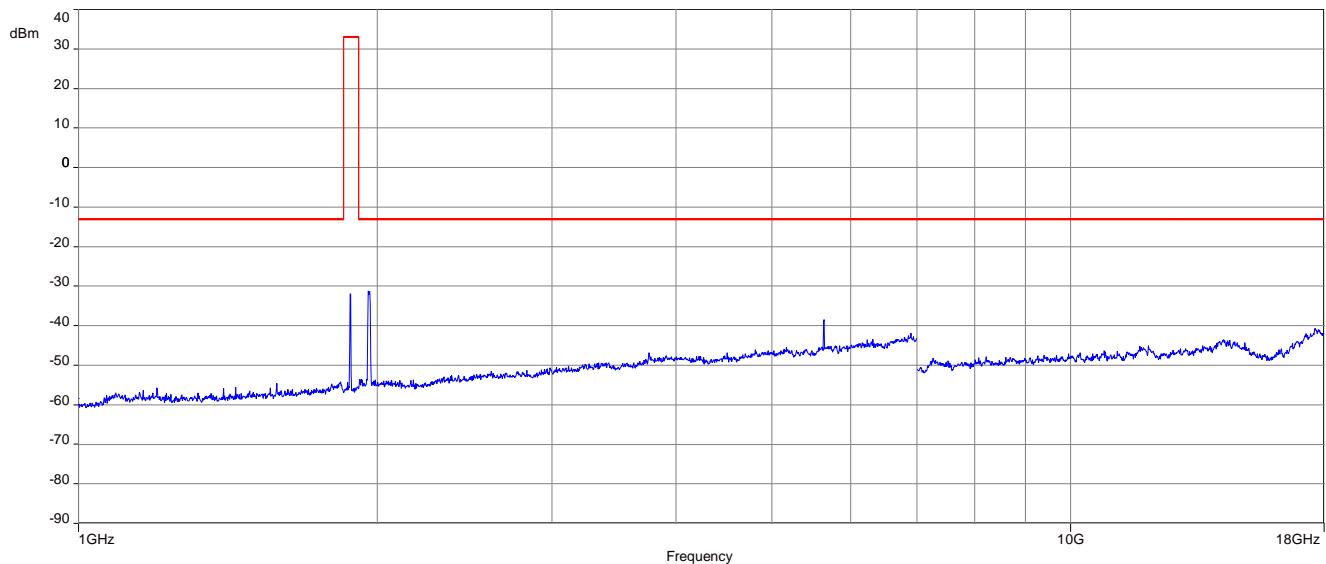

Plot 3: Channel 26340 (1 GHz – 18 GHz)


Carrier notched with 1.9 GHz rejection filter.

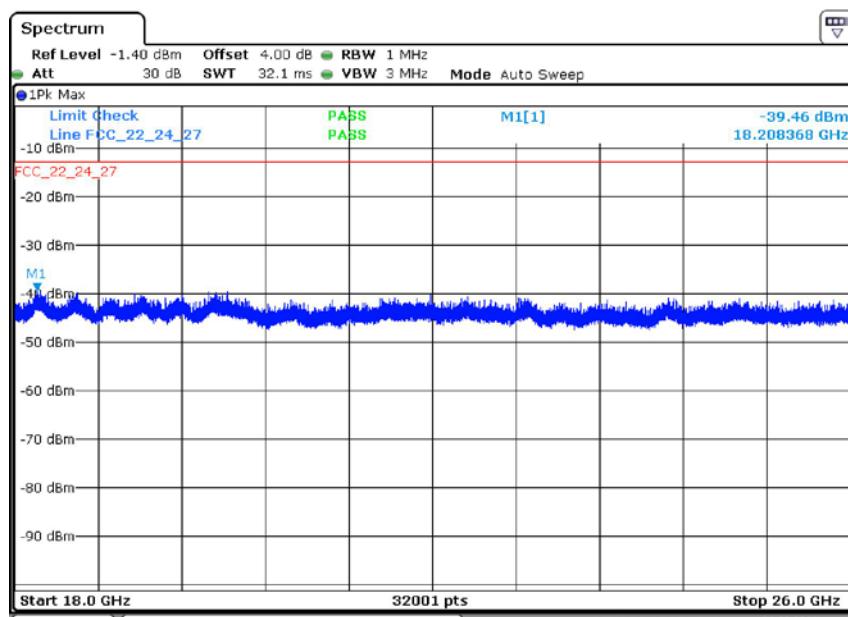Plot 4: Channel 26340 (18 GHz – 26 GHz)


22 Summary of measurement results LTE band 26a

<input type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input checked="" type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

22.1 LTE – Band 26a

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 22, RSS 132	See table	2022-04-11	Delta tests according to manufacturer demand!

Test Case	temperature conditions	power source voltages	C	NC	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Extreme	Extreme	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

23 RF measurements LTE band 26a

23.1 Description of test setup

For the spurious measurements we use the substitution method according TIA/EIA 603.

23.2 Results

The EUT was set to transmit the maximum power.

23.2.1 RF output power

Description:

This paragraph contains conducted average power, ERP and Peak-to-Average Power Ratio measurements for the mobile station.

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector	
Sweep time	
Video bandwidth	Measured with CMW500
Resolution bandwidth	
Span	
Trace mode	
Setup	See chapter 7.1 - setup B, 7.4 – setup B
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Nominal Peak Output Power	
+38.45 dBm (FCC) / +33 dBm (IC) In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (conducted)						
Bandwidth (MHz)	Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Peak to Average Ratio (dB)	Average Output Power (dBm) 16-QAM	Peak to Average Ratio (dB)
1.4	824.7	1 RB low	22.1	3.7	20.9	4.3
		1 RB high	22.2	3.7	21.1	4.3
		50% RB mid	22.3	3.9	21.5	4.5
		100% RB	21.1	4.7	20.2	5.5
	836.5	1 RB low	22.3	3.6	20.8	4.2
		1 RB high	22.2	3.5	21.0	4.3
		50% RB mid	22.2	3.7	21.2	4.5
		100% RB	21.1	4.5	20.0	5.3
	848.3	1 RB low	22.0	3.4	21.1	4.1
		1 RB high	22.1	3.5	20.7	4.3
		50% RB mid	22.0	3.6	20.9	4.4
		100% RB	20.9	4.5	19.8	5.2
3	825.5	1 RB low	22.1	3.7	21.1	4.4
		1 RB high	22.2	3.7	20.9	4.3
		50% RB mid	21.1	4.0	20.0	4.9
		100% RB	21.1	4.7	20.1	5.5
	836.5	1 RB low	22.4	3.6	21.2	4.3
		1 RB high	22.2	3.7	21.1	4.4
		50% RB mid	21.2	3.9	20.2	4.8
		100% RB	21.1	4.6	20.1	5.4
	847.5	1 RB low	22.3	3.4	20.9	4.3
		1 RB high	22.0	3.6	20.8	4.3
		50% RB mid	21.0	3.8	20.0	4.6
		100% RB	20.9	4.4	20.0	5.2
5	826.5	1 RB low	22.0	3.6	20.5	4.2
		1 RB high	22.0	3.7	20.7	4.2
		50% RB mid	21.1	4.1	20.2	5.0
		100% RB	21.1	4.8	20.1	5.7
	836.5	1 RB low	22.0	3.5	20.7	4.2
		1 RB high	22.1	3.6	20.7	4.2
		50% RB mid	21.1	4.0	20.3	4.8
		100% RB	21.0	4.7	20.0	5.5
	846.5	1 RB low	21.9	3.5	20.6	4.3
		1 RB high	21.8	3.5	20.6	4.2
		50% RB mid	20.9	3.9	19.9	4.8
		100% RB	20.9	4.6	19.9	5.4

10	829.0	1 RB low	21.9	3.6	20.8	4.3
		1 RB high	22.0	3.5	20.8	4.2
		50% RB mid	21.0	4.1	20.0	5.0
		100% RB	21.1	4.9	20.1	5.7
	836.5	1 RB low	22.2	3.5	21.2	4.2
		1 RB high	22.1	3.6	21.0	4.4
		50% RB mid	21.0	4.0	20.0	4.9
		100% RB	21.0	4.8	20.0	5.6
	844.0	1 RB low	22.0	3.6	20.9	4.3
		1 RB high	21.9	3.4	20.6	4.2
		50% RB mid	21.0	4.1	20.1	5.0
		100% RB	20.9	4.7	19.9	5.6
15	831.5	1 RB low	21.6	3.6	20.6	4.3
		1 RB high	21.7	3.5	20.6	4.1
		50% RB mid	21.0	4.1	20.0	5.0
		100% RB	21.0	4.8	20.0	5.6
	836.5	1 RB low	21.8	3.5	21.0	4.3
		1 RB high	21.6	3.6	20.7	4.4
		50% RB mid	21.0	4.1	20.1	4.9
		100% RB	20.9	4.9	20.0	5.6
	841.5	1 RB low	22.0	3.4	20.6	4.2
		1 RB high	21.7	3.3	20.3	4.1
		50% RB mid	20.9	4.2	19.9	5.1
		100% RB	20.9	5.0	20.0	5.7

The radiated output power is measured in the mode with the highest conducted output power.

Output Power (radiated)			
Bandwidth (MHz)	Frequency (MHz)	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM
1.4	824.7	19.3	18.5
	836.5	18.1	17.2
	848.3	19.7	18.7
3	825.5	19.3	18.1
	836.5	18.1	17.1
	847.5	19.9	18.7
5	826.5	19.1	18.2
	836.5	17.9	16.7
	846.5	19.8	18.5
10	829.0	19.2	18.0
	836.5	18.0	16.9
	844.0	19.9	18.6
15	831.5	19.2	18.0
	836.5	17.7	16.9
	841.5	19.8	18.7

23.2.2 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2014 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.3 MHz. Measurement made up to 12.75 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE band 26.

Measurement:

Measurement parameters	
Detector	Peak
Sweep time	2 sec.
Video bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span	100 MHz Steps
Trace mode	Max Hold
Setup	See chapter 7.1 - setup B; 7.2 - setup A/B
Measurement uncertainty	See chapter 9

Limits:

FCC	IC
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P) / (P, \text{Power in Watts})$	
-13 dBm	

QPSK:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	1658.0	All detected emissions are more than 20dB below the limit!	2	1673.0	All detected emissions are more than 20dB below the limit!	2	1688.0	All detected emissions are more than 20dB below the limit!
3	2487.0		3	2509.5		3	2532.0	
4	3316.0		4	3346.0		4	3376.0	
5	4145.0		5	4182.5		5	4220.0	
6	4974.0		6	5019.0		6	5064.0	
7	5803.0		7	5855.5		7	5908.0	
8	6632.0		8	6692.0		8	6752.0	
9	7461.0		9	7528.5		9	7596.0	
10	8290.0		10	8365.0		10	8440.0	

16-QAM:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	1658.0	All detected emissions are more than 20dB below the limit!	2	1673.0	All detected emissions are more than 20dB below the limit!	2	1688.0	All detected emissions are more than 20dB below the limit!
3	2487.0		3	2509.5		3	2532.0	
4	3316.0		4	3346.0		4	3376.0	
5	4145.0		5	4182.5		5	4220.0	
6	4974.0		6	5019.0		6	5064.0	
7	5803.0		7	5855.5		7	5908.0	
8	6632.0		8	6692.0		8	6752.0	
9	7461.0		9	7528.5		9	7596.0	
10	8290.0		10	8365.0		10	8440.0	

Results: QPSK with 10 MHz channel bandwidth


Plot 1: Channel 26915 (Traffic mode up to 30 MHz)

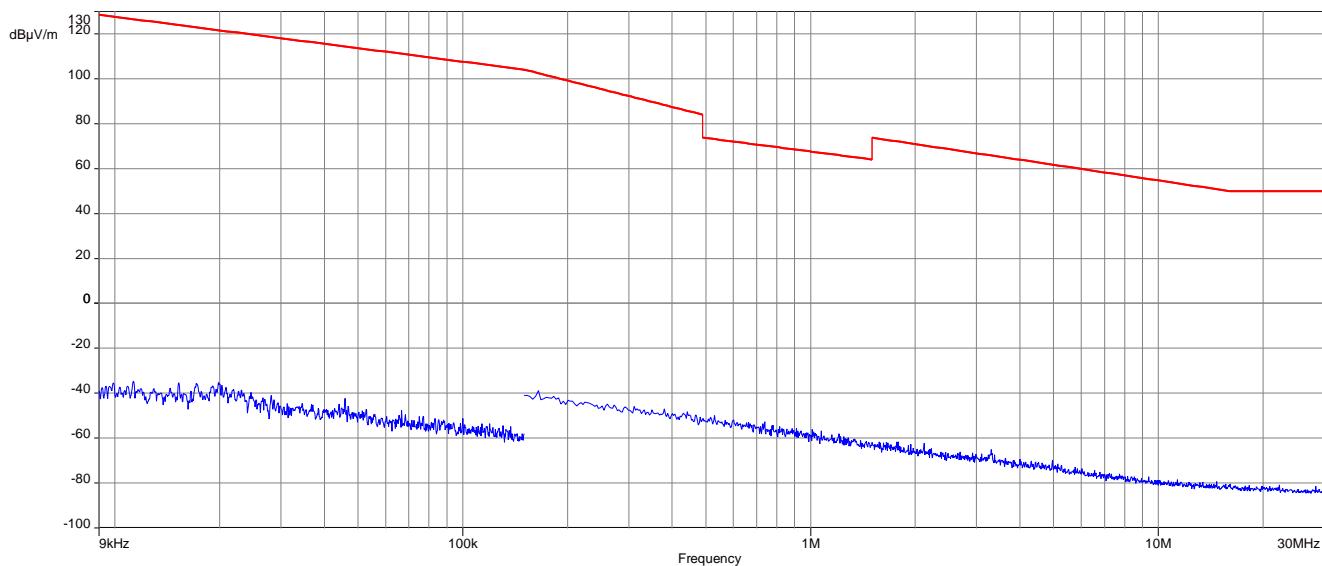

Plot 2: Channel 26915 (30 MHz – 1 GHz)

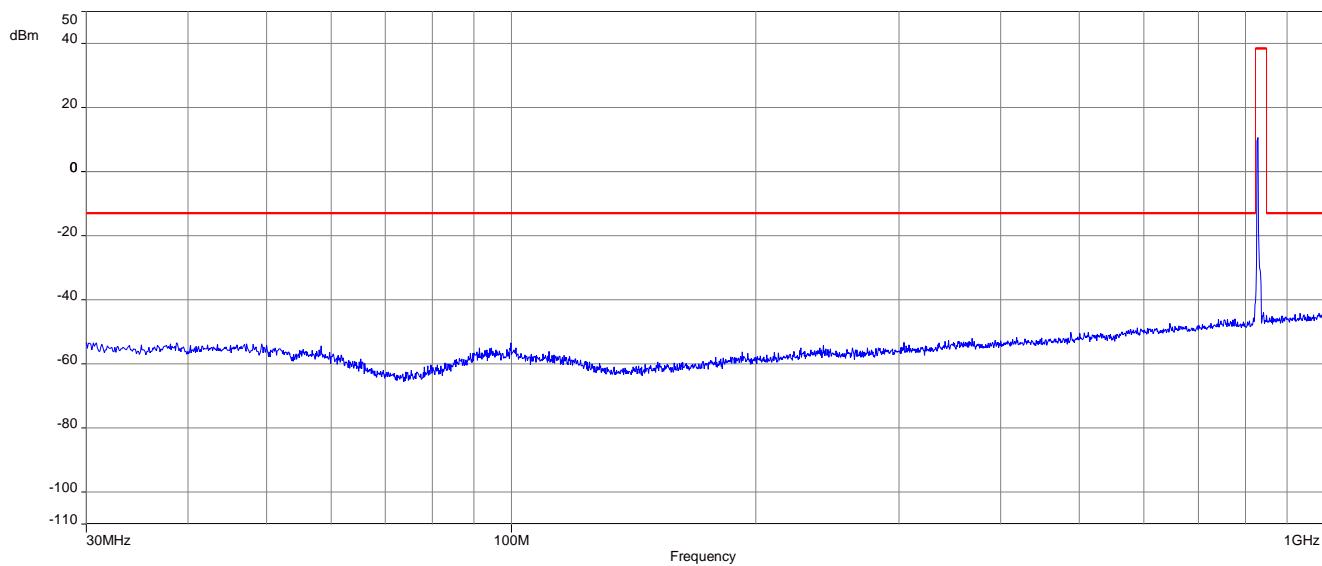


Plot 3: Channel 26915 (1 GHz – 12 GHz)

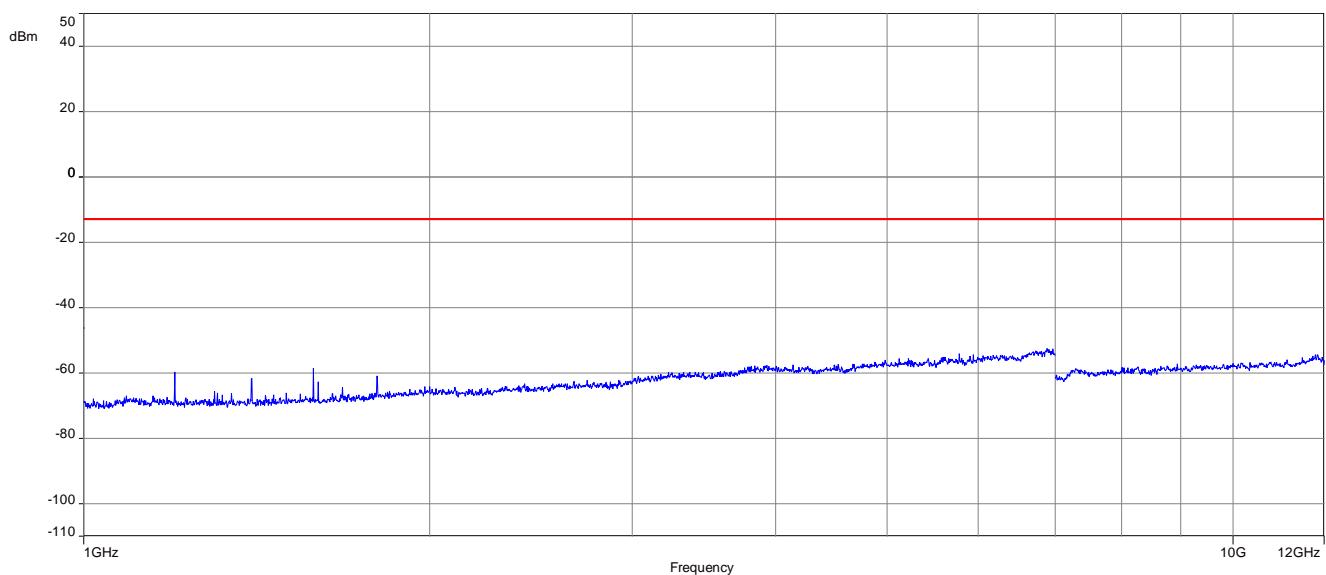


Results: 16-QAM with 10 MHz channel bandwidth


Plot 1: Channel 26915 (Traffic mode up to 30 MHz)

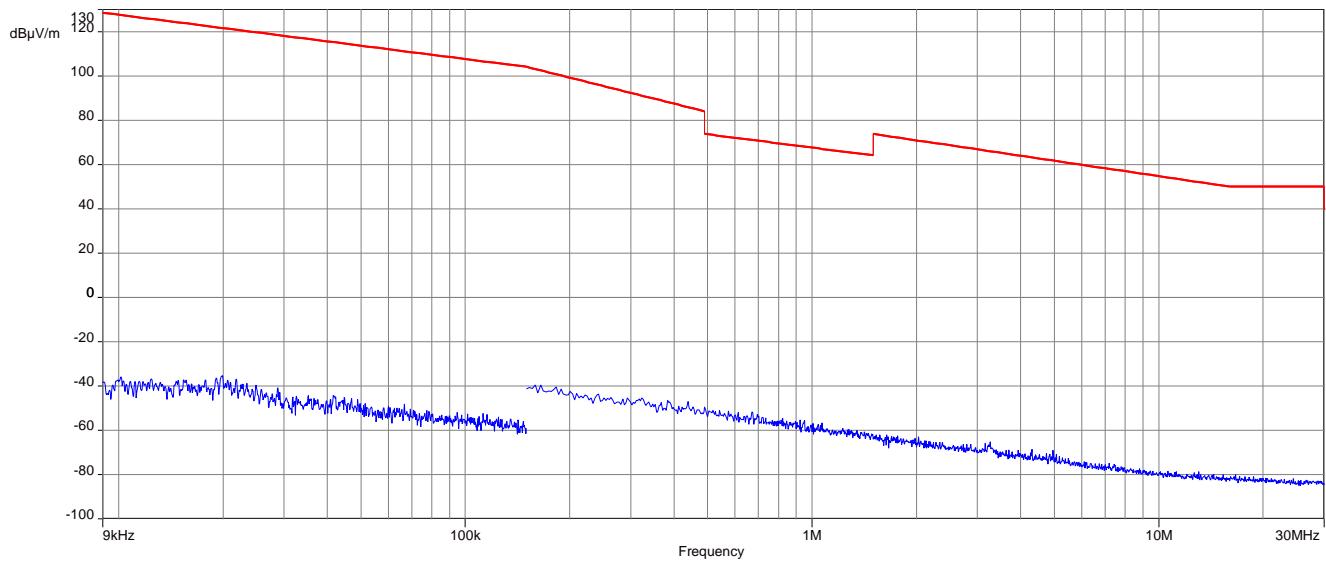

Plot 2: Channel 26915 (30 MHz – 1 GHz)

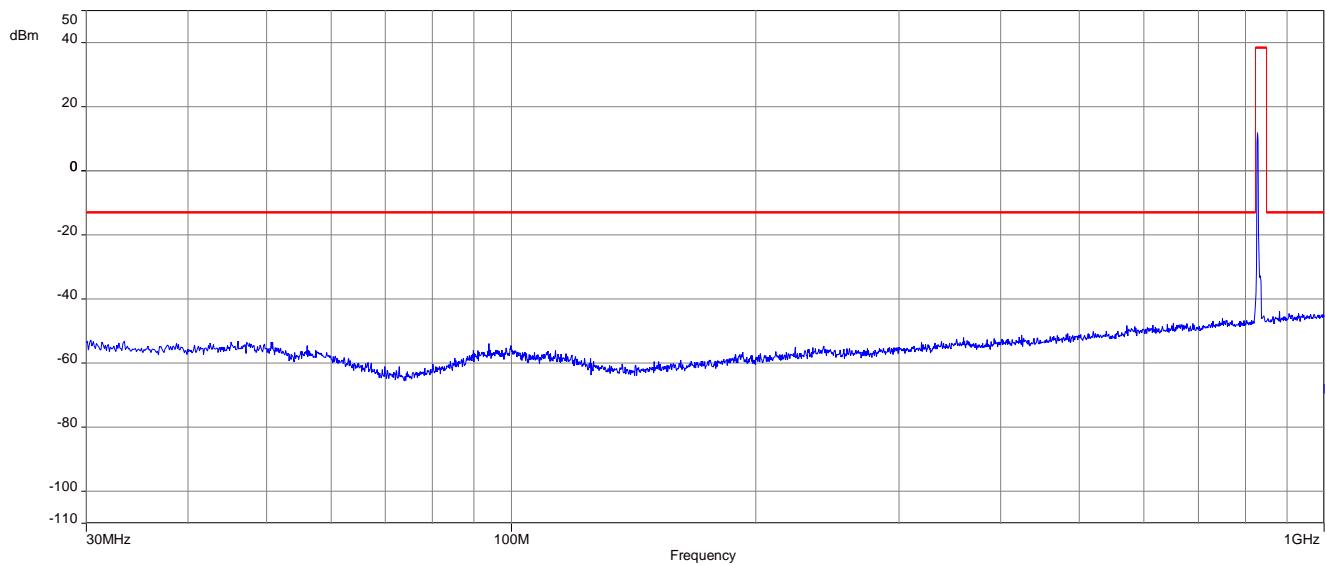

Plot 3: Channel 26915 (1 GHz – 12 GHz)

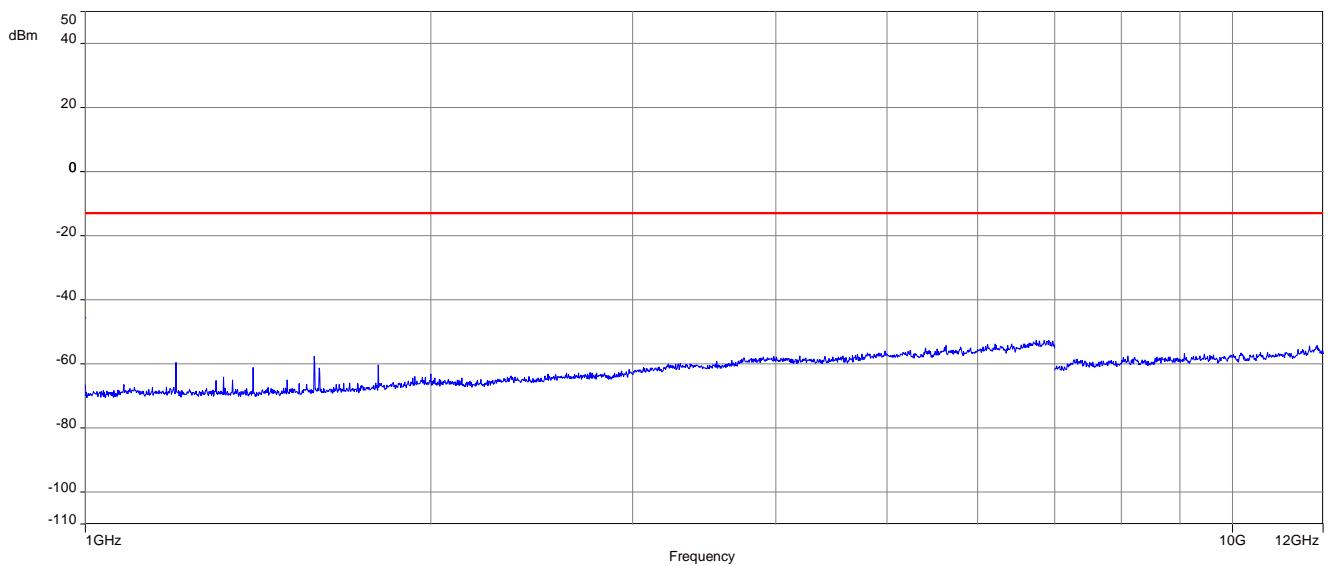

24 Summary of measurement results LTE band 26b

<input type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input checked="" type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

24.1 LTE – Band 26b

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 90 RSS 132	See table	2022-04-11	Delta tests according to manufacturer demand!

Test Case	temperature conditions	power source voltages	C	NC	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Extreme	Extreme	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

25 RF measurements LTE band 26b

25.1 Description of test setup

For the spurious measurements we use the substitution method according TIA/EIA 603.

25.2 Results

The EUT was set to transmit the maximum power.

25.2.1 RF output power

Description:

This paragraph contains conducted average power, ERP and Peak-to-Average Power Ratio measurements for the mobile station.

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector	
Sweep time	
Video bandwidth	
Resolution bandwidth	Measured with CMW500
Span	
Trace mode	
Setup	See chapter 7.1 - setup B, 7.4 – setup B
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Nominal Peak Output Power	
+38.45 dBm (FCC) / +33 dBm (IC) In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (conducted)						
Bandwidth (MHz)	Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Peak to Average Ratio (dB)	Average Output Power (dBm) 16-QAM	Peak to Average Ratio (dB)
1.4	814.7	1 RB low	22.3	3.5	21.0	4.3
		1 RB high	22.4	3.5	21.1	4.3
		50% RB mid	22.2	3.7	21.1	4.5
		100% RB	21.0	4.5	20.1	5.3
	819.0	1 RB low	21.9	3.6	21.0	4.3
		1 RB high	22.0	3.6	20.8	4.4
		50% RB mid	22.1	3.8	21.1	4.6
		100% RB	20.9	4.8	20.1	5.5
	823.3	1 RB low	22.1	3.7	21.0	4.4
		1 RB high	22.2	3.7	20.9	4.4
		50% RB mid	22.1	3.9	21.0	4.6
		100% RB	21.0	4.8	20.2	5.7
3	815.5	1 RB low	22.1	3.5	20.8	4.4
		1 RB high	22.2	3.6	20.9	4.3
		50% RB mid	21.0	3.9	20.1	4.8
		100% RB	21.1	4.5	20.1	5.3
	819.0	1 RB low	22.3	3.6	21.2	4.3
		1 RB high	22.2	3.7	21.1	4.4
		50% RB mid	21.0	4.1	20.1	5.0
		100% RB	21.0	4.8	20.1	5.6
	822.5	1 RB low	22.1	3.7	21.1	4.4
		1 RB high	22.2	3.7	21.1	4.4
		50% RB mid	21.0	4.2	20.1	5.0
		100% RB	21.0	4.9	20.1	5.8
5	816.5	1 RB low	22.0	3.5	20.7	4.3
		1 RB high	22.0	3.5	20.8	4.3
		50% RB mid	21.1	4.2	20.2	4.8
		100% RB	21.1	4.7	20.1	5.5
	819.0	1 RB low	22.1	3.5	20.8	4.3
		1 RB high	22.0	3.6	20.7	4.3
		50% RB mid	21.0	4.2	20.1	5.1
		100% RB	21.1	4.8	20.0	5.6
	820.5	1 RB low	22.0	3.6	20.8	4.2
		1 RB high	22.0	3.6	20.8	4.3
		50% RB mid	20.9	4.3	20.2	5.1
		100% RB	21.1	4.9	20.1	5.7

10	819.0	1 RB low	22.3	3.4	20.9	4.2
		1 RB high	22.1	3.6	20.8	4.4
		50% RB mid	21.0	4.3	20.1	5.1
		100% RB	21.1	4.9	20.1	5.7
	819.0	1 RB low	22.3	3.5	20.9	4.2
		1 RB high	22.0	3.6	20.9	4.3
		50% RB mid	21.0	4.3	20.1	5.1
		100% RB	21.1	4.9	20.2	5.7
	819.0	1 RB low	22.3	3.5	20.8	4.2
		1 RB high	22.1	3.6	20.8	4.4
		50% RB mid	21.0	4.3	20.1	5.1
		100% RB	21.1	4.9	20.0	5.7

The radiated output power is measured in the mode with the highest conducted output power.

Output Power (radiated)			
Bandwidth (MHz)	Frequency (MHz)	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM
1.4	814.7	19.4	18.2
	831.5	19.1	18.1
	848.3	19.2	18.2
3	815.5	19.4	18.3
	831.5	19.5	18.2
	847.5	19.4	18.1
5	816.5	19.3	18.1
	831.5	19.3	18.0
	846.5	19.3	18.0
10	819.0	19.3	18.2
	831.5	19.4	18.1
	844.0	19.3	18.1

25.2.2 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2014 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.3 MHz. Measurement made up to 12.75 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE band 26.

Measurement:

Measurement parameters	
Detector	Peak
Sweep time	2 sec.
Video bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span	100 MHz Steps
Trace mode	Max Hold
Setup	See chapter 7.1 - setup B; 7.2 - setup A/B
Measurement uncertainty	See chapter 9

Limits:

FCC	IC
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P) / (P, \text{Power in Watts})$	
-13 dBm	

QPSK:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	1638.0	All detected emissions are more than 20dB below the limit!	2	1638.0	All detected emissions are more than 20dB below the limit!	2	1638.0	All detected emissions are more than 20dB below the limit!
3	2457.0		3	2457.0		3	2457.0	
4	3276.0		4	3276.0		4	3276.0	
5	4095.0		5	4095.0		5	4095.0	
6	4914.0		6	4914.0		6	4914.0	
7	5733.0		7	5733.0		7	5733.0	
8	6552.0		8	6552.0		8	6552.0	
9	7371.0		9	7371.0		9	7371.0	
10	8190.0		10	8190.0		10	8190.0	

16-QAM:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	1638.0	All detected emissions are more than 20dB below the limit!	2	1638.0	All detected emissions are more than 20dB below the limit!	2	1638.0	All detected emissions are more than 20dB below the limit!
3	2457.0		3	2457.0		3	2457.0	
4	3276.0		4	3276.0		4	3276.0	
5	4095.0		5	4095.0		5	4095.0	
6	4914.0		6	4914.0		6	4914.0	
7	5733.0		7	5733.0		7	5733.0	
8	6552.0		8	6552.0		8	6552.0	
9	7371.0		9	7371.0		9	7371.0	
10	8190.0		10	8190.0		10	8190.0	

Results: QPSK with 10 MHz channel bandwidth


Plot 1: Channel 26740 (Traffic mode up to 30 MHz)

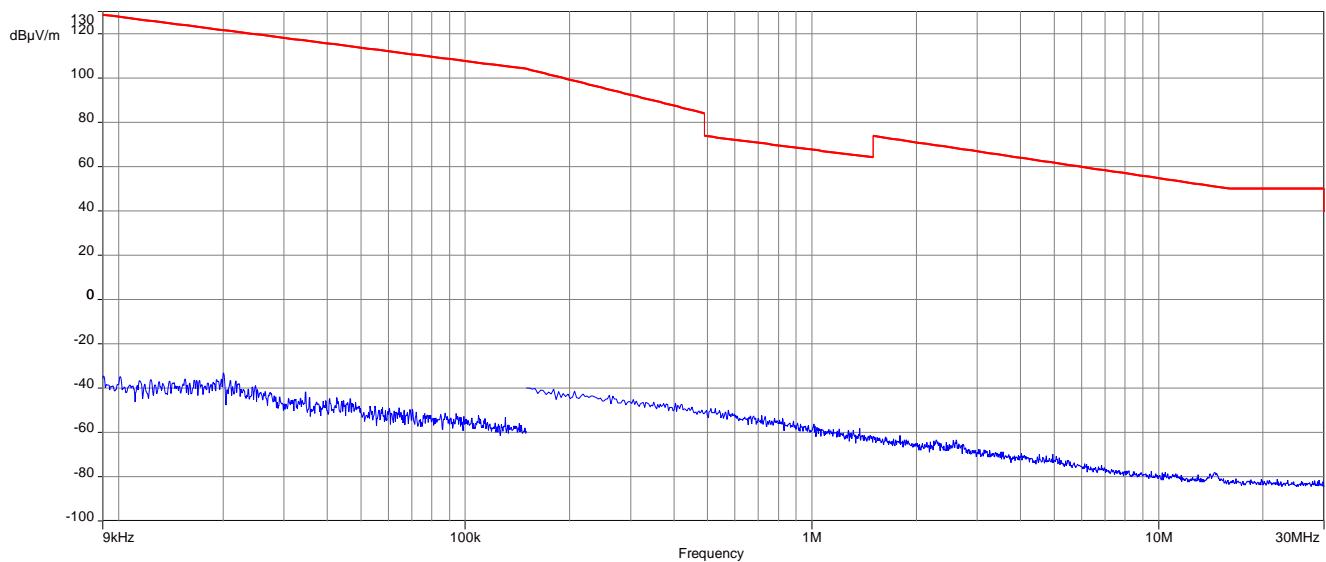

Plot 2: Channel 26740 (30 MHz – 1 GHz)

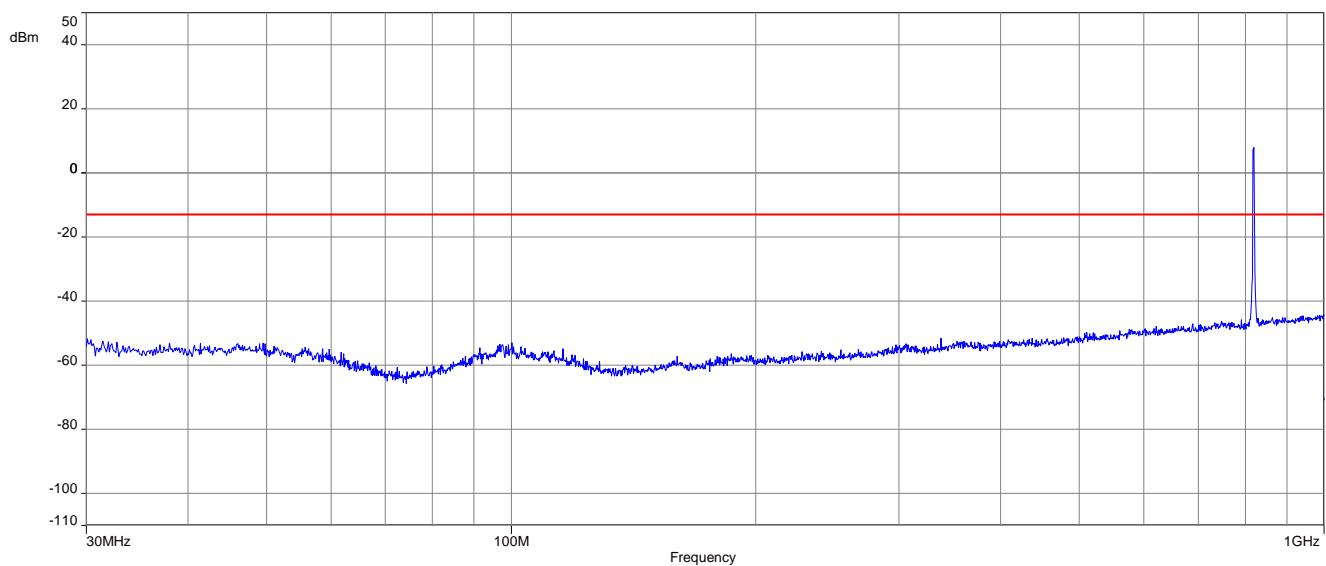


Plot 3: Channel 26740 (1 GHz – 12 GHz)

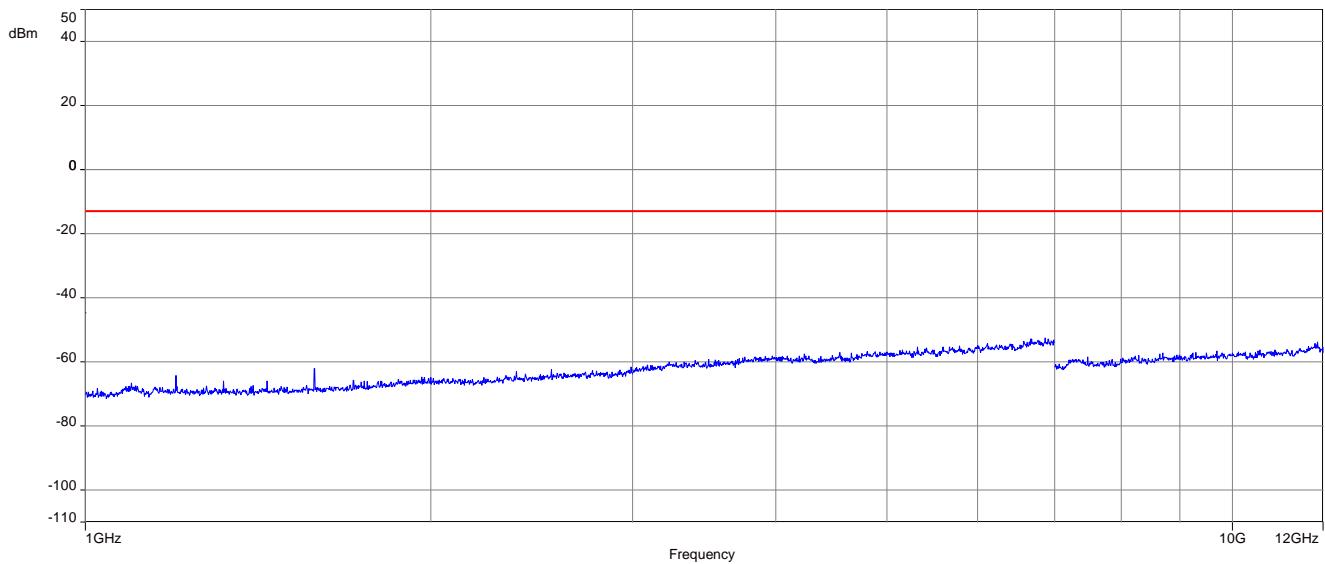


Results: 16-QAM with 10 MHz channel bandwidth


Plot 1: Channel 26740 (Traffic mode up to 30 MHz)

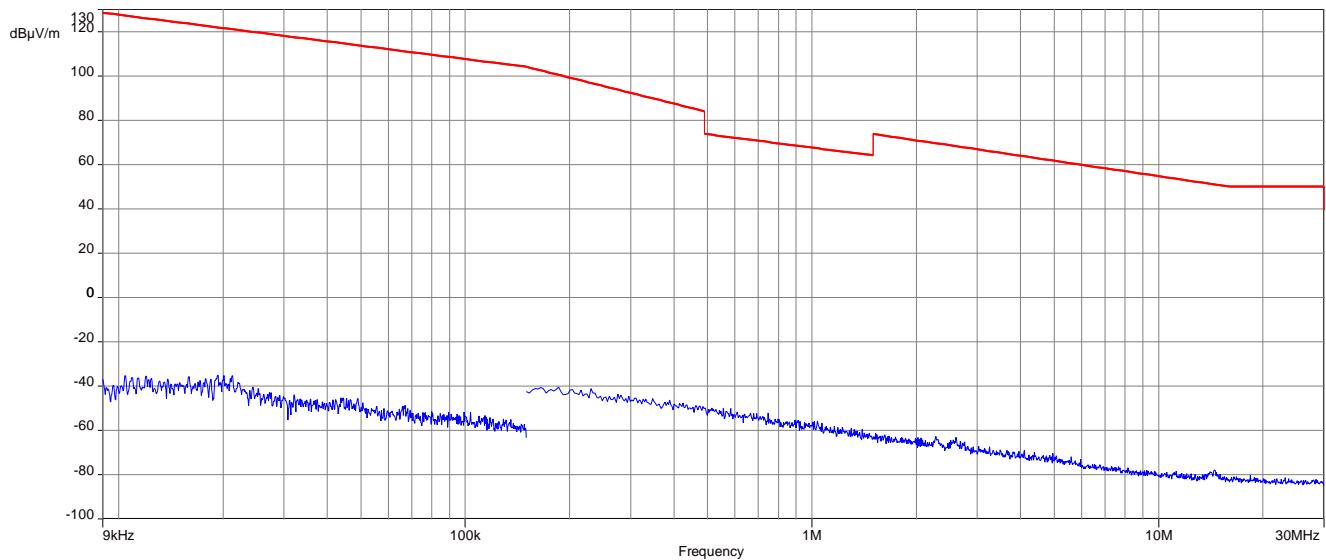

Plot 2: Channel 26740 (30 MHz – 1 GHz)

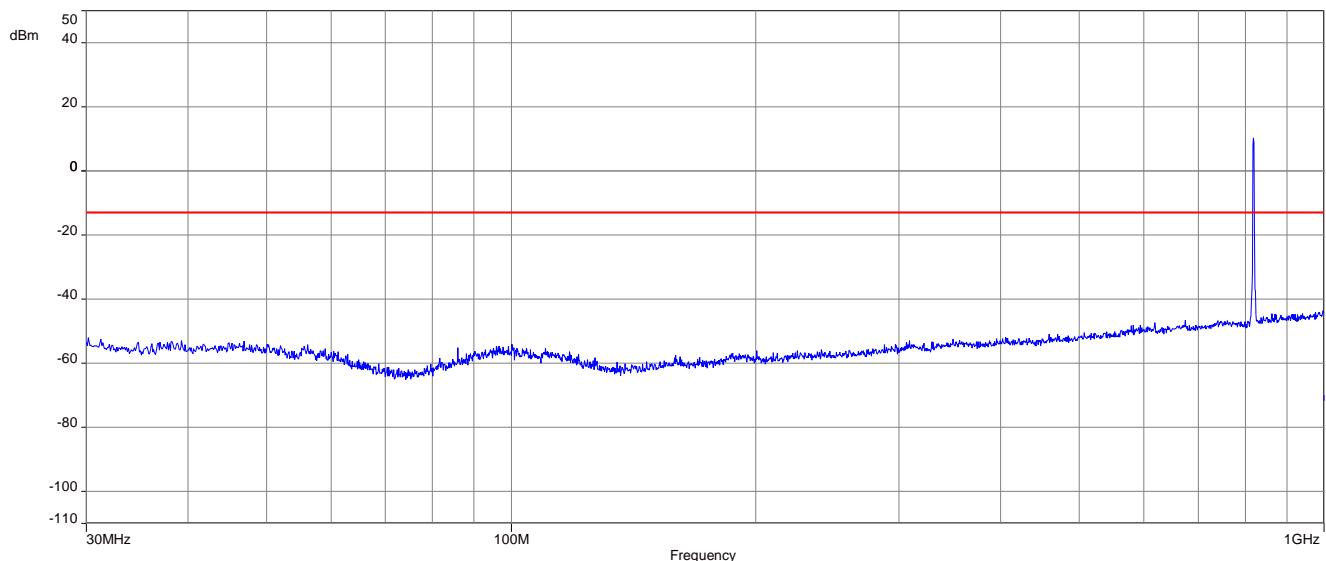

Plot 3: Channel 26740 (1 GHz – 12 GHz)

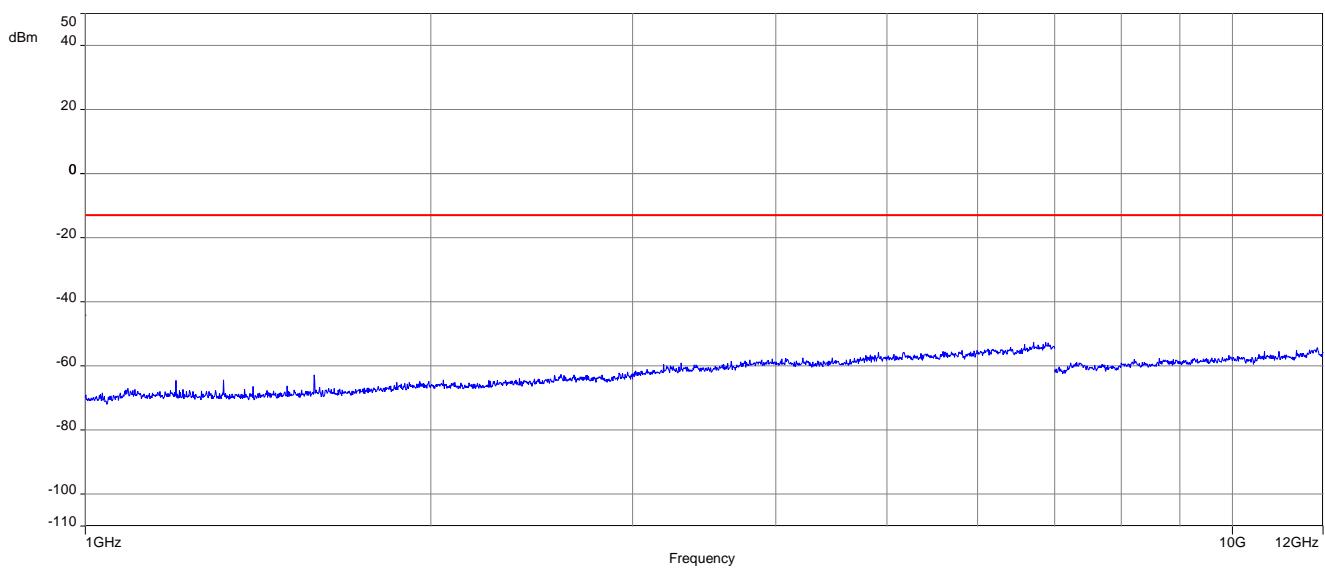

26 Summary of measurement results LTE band 41

<input type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input checked="" type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 27 RSS-199	See table!	2022-04-11	Delta tests according to manufacturer demand!

26.1 LTE – Band 41

Test Case	temperature conditions	power source voltages	C	NC	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Extreme	Extreme	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

27 RF measurements LTE band 41

27.1 Description of test setup

For the spurious measurements we use the substitution method according TIA/EIA 603.

27.2 Results LTE – Band 41

The EUT was set to transmit the maximum power.

27.2.1 RF output power

Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector	
Sweep time	
Video bandwidth	
Resolution bandwidth	Measured with CMW500
Span	
Trace mode	
Setup	See chapter 7.2 - setup B, 7.4 – setup B
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
AVG: 33 dBm	
Max Output Power	
In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (conducted)						
Bandwidth (MHz)	Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Peak to Average Ratio (dB)	Average Output Power (dBm) 16-QAM	Peak to Average Ratio (dB)
5	39675 / 2498.5	1 RB low	15.7	8.6	14.7	9.3
		1 RB mid	16.0	8.5	15.0	9.3
		1 RB high	15.7	8.6	14.7	9.2
		50% RB low	14.7	8.7	13.8	9.7
		50% RB mid	14.8	8.5	13.9	9.5
		50% RB high	14.8	8.8	13.8	9.6
		100% RB	14.8	8.9	13.7	9.7
	40185 / 2549.5	1 RB low	15.6	8.2	14.4	8.9
		1 RB mid	16.0	8.3	14.9	8.8
		1 RB high	15.6	8.3	14.6	9.0
		50% RB low	14.8	8.5	13.9	9.2
		50% RB mid	14.4	8.5	13.4	9.3
		50% RB high	14.7	8.5	13.5	9.3
		100% RB	14.7	8.6	13.6	9.4
	40620 / 2593.0	1 RB low	15.4	8.9	14.3	9.6
		1 RB mid	15.9	8.9	14.8	9.5
		1 RB high	15.4	9.0	14.2	9.6
		50% RB low	14.5	9.0	13.6	9.9
		50% RB mid	14.9	8.5	13.8	9.9
		50% RB high	14.6	9.1	-15.3	8.5
		100% RB	14.8	9.2	13.7	9.9
	41055 / 2636.5	1 RB low	15.6	8.8	14.4	9.5
		1 RB mid	16.0	8.7	14.8	9.3
		1 RB high	15.8	8.7	14.6	9.5
		50% RB low	14.8	8.9	13.8	9.8
		50% RB mid	15.1	8.5	14.1	9.8
		50% RB high	15.0	8.9	14.0	9.8
		100% RB	15.0	9.1	14.0	9.9
	41565 / 2687.5	1 RB low	16.1	8.3	14.8	9.1
		1 RB mid	16.3	8.2	15.2	9.0
		1 RB high	16.2	8.3	14.9	9.1
		50% RB low	15.3	8.6	14.1	9.4
		50% RB mid	15.3	8.4	14.2	9.4
		50% RB high	15.2	8.6	14.4	9.4
		100% RB	15.4	8.7	14.3	9.5

Output Power (conducted)						
Bandwidth (MHz)	Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Peak to Average Ratio (dB)	Average Output Power (dBm) 16-QAM	Peak to Average Ratio (dB)
10	39700 / 2501.0	1 RB low	15.4	8.6	14.3	9.2
		1 RB mid	15.7	8.4	14.7	9.2
		1 RB high	15.6	8.5	14.5	9.1
		50% RB low	14.4	8.8	13.5	9.6
		50% RB mid	14.7	8.7	13.6	9.6
		50% RB high	14.6	8.7	13.7	9.6
		100% RB	14.6	8.8	13.6	9.7
	40185 / 2549.5	1 RB low	15.4	8.2	14.2	9.0
		1 RB mid	15.6	8.3	14.5	9.1
		1 RB high	15.3	8.4	14.0	9.1
		50% RB low	14.4	8.4	13.4	9.3
		50% RB mid	14.5	8.4	13.6	9.3
		50% RB high	14.5	8.5	13.5	9.3
		100% RB	14.5	8.6	13.5	9.4
	40620 / 2593.0	1 RB low	15.5	8.8	13.9	9.6
		1 RB mid	15.6	8.8	14.3	9.6
		1 RB high	15.3	9.0	14.1	9.5
		50% RB low	14.3	9.0	13.5	9.8
		50% RB mid	14.6	9.0	13.5	9.7
		50% RB high	14.5	9.0	13.6	9.8
		100% RB	14.5	9.1	13.5	9.9
	41055 / 2636.5	1 RB low	15.6	8.8	14.4	9.5
		1 RB mid	15.9	8.8	14.8	9.4
		1 RB high	15.8	8.7	14.6	9.4
		50% RB low	14.6	8.9	13.7	9.8
		50% RB mid	14.8	8.9	13.9	9.7
		50% RB high	14.7	8.9	13.8	9.7
		100% RB	14.7	9.0	13.7	9.8
	41540 / 2685.0	1 RB low	16.1	8.1	14.5	9.2
		1 RB mid	16.3	8.2	15.0	9.2
		1 RB high	16.1	8.3	14.7	9.1
		50% RB low	15.1	8.6	14.0	9.4
		50% RB mid	15.1	8.5	14.1	9.4
		50% RB high	15.1	8.6	14.2	9.4
		100% RB	15.1	8.6	14.1	9.4

Output Power (conducted)						
Bandwidth (MHz)	Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Peak to Average Ratio (dB)	Average Output Power (dBm) 16-QAM	Peak to Average Ratio (dB)
15	39725 / 2503.5	1 RB low	15.0	8.6	13.7	9.2
		1 RB mid	15.5	8.4	14.3	9.2
		1 RB high	15.3	8.4	14.2	9.0
		50% RB low	14.2	8.8	13.2	9.7
		50% RB mid	14.3	8.8	13.3	9.6
		50% RB high	14.3	8.8	13.4	9.6
		100% RB	14.2	9.0	13.3	9.8
	40185 / 2549.5	1 RB low	15.0	8.1	13.7	8.9
		1 RB mid	15.4	8.2	14.3	9.0
		1 RB high	15.0	8.4	13.6	9.1
		50% RB low	14.2	8.5	13.3	9.3
		50% RB mid	14.4	8.5	13.4	9.3
		50% RB high	14.3	8.6	13.3	9.4
		100% RB	14.2	8.8	13.3	9.5
	40620 / 2593.0	1 RB low	15.0	8.8	13.7	9.5
		1 RB mid	15.4	8.7	14.3	9.5
		1 RB high	15.1	8.8	13.8	9.4
		50% RB low	14.1	9.0	13.3	9.8
		50% RB mid	14.3	9.0	13.4	9.8
		50% RB high	14.2	9.0	13.3	9.8
		100% RB	14.2	9.3	13.2	10.0
	41055 / 2636.5	1 RB low	15.3	8.9	14.3	9.4
		1 RB mid	15.8	8.8	14.6	9.4
		1 RB high	15.5	8.7	14.5	9.2
		50% RB low	14.5	9.0	13.5	9.8
		50% RB mid	14.6	8.9	13.7	9.7
		50% RB high	14.6	8.9	13.7	9.7
		100% RB	14.5	9.2	13.6	9.9
	41515 / 2682.5	1 RB low	15.7	8.1	14.6	8.9
		1 RB mid	16.0	8.2	15.2	8.8
		1 RB high	15.8	8.3	14.5	9.1
		50% RB low	14.9	8.5	13.9	9.3
		50% RB mid	15.0	8.5	14.0	9.3
		50% RB high	15.0	8.6	14.0	9.4
		100% RB	14.9	8.8	13.9	9.5

Output Power (conducted)						
Bandwidth (MHz)	Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Peak to Average Ratio (dB)	Average Output Power (dBm) 16-QAM	Peak to Average Ratio (dB)
20	39750 / 2506.0	1 RB low	14.6	8.6	12.9	9.4
		1 RB mid	15.6	8.3	14.1	9.2
		1 RB high	15.0	8.2	13.4	9.1
		50% RB low	14.0	8.8	13.1	9.7
		50% RB mid	14.4	8.7	13.4	9.6
		50% RB high	14.3	8.7	13.4	9.6
		100% RB	14.3	8.7	13.3	9.6
	40185 / 2549.5	1 RB low	14.4	8.1	13.2	9.0
		1 RB mid	15.5	8.3	14.4	9.0
		1 RB high	14.6	8.4	13.3	9.1
		50% RB low	14.0	8.4	13.0	9.3
		50% RB mid	14.2	8.5	13.4	9.3
		50% RB high	14.0	8.6	13.1	9.4
		100% RB	14.0	8.5	13.1	9.3
	40620 / 2593.0	1 RB low	14.4	8.7	13.2	9.4
		1 RB mid	15.4	8.9	14.2	9.6
		1 RB high	14.5	8.9	13.4	9.4
		50% RB low	14.0	9.0	13.2	9.8
		50% RB mid	14.2	9.0	13.3	9.8
		50% RB high	14.1	9.0	13.2	9.8
		100% RB	14.1	9.0	13.1	9.8
	41055 / 2636.5	1 RB low	14.8	8.8	13.3	9.4
		1 RB mid	16.0	8.8	14.5	9.4
		1 RB high	15.2	8.7	13.7	9.3
		50% RB low	14.4	8.9	13.5	9.7
		50% RB mid	14.6	8.8	13.7	9.7
		50% RB high	14.5	8.8	13.6	9.7
		100% RB	14.4	8.9	13.5	9.7
	41490 / 2680.0	1 RB low	15.2	8.2	14.0	9.0
		1 RB mid	16.2	8.1	15.1	8.9
		1 RB high	15.5	8.3	14.5	9.0
		50% RB low	14.7	8.5	13.8	9.3
		50% RB mid	15.0	8.5	14.0	9.3
		50% RB high	14.9	8.6	13.8	9.4
		100% RB	14.8	8.6	13.8	9.4

The radiated output power is measured in the mode with the highest conducted output power.

Output Power (radiated)			
Bandwidth (MHz)	Frequency (MHz)	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM
5	2498.5	20.4	20.2
	2549.5	21.7	21.2
	2593.0	22.0	21.7
	2636.5	20.8	20.6
	2687.5	22.1	21.8
10	2501.0	21.6	21.6
	2549.5	19.8	19.9
	2593.0	22.5	22.1
	2636.5	22.1	22.2
	2685.0	20.4	20.2
15	2503.5	21.5	21.6
	2549.5	20.8	20.6
	2593.0	20.2	20.1
	2636.5	22.1	22.3
	2682.5	21.4	21.2
20	2506.0	20.1	19.9
	2549.5	21.3	21.0
	2593.0	21.6	21.4
	2636.5	20.4	20.2
	2680.0	21.7	21.2

27.2.2 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2014 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 2687.5 MHz. This was rounded up to 27 GHz. The resolution bandwidth is set as outlined in Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE band 41.

Measurement:

Measurement parameters	
Detector	Peak
Sweep time	2 sec.
Video bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span	100 MHz Steps
Trace mode	Max Hold
Setup	See chapter 7.1 - setup B; 7.2 - setup A/B; 7.3 - setup A
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P)$ / (P, Power in Watts)	
-13 dBm	

QPSK:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	5002.0	All detected emissions are more than 20dB below the limit!	2	5186.0	All detected emissions are more than 20dB below the limit!	2	5370.0	All detected emissions are more than 20dB below the limit!
3	7503.0		3	7779.0		3	8055.0	
4	10004.0		4	10372.0		4	10740.0	
5	12505.0		5	12965.0		5	13425.0	
6	15006.0		6	15558.0		6	16110.0	
7	17507.0		7	18151.0		7	18795.0	
8	20008.0		8	20744.0		8	21480.0	
9	22509.0		9	23337.0		9	24165.0	
10	25010.0		10	25930.0		10	26850.0	

16-QAM:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	5002.0	All detected emissions are more than 20dB below the limit!	2	5186.0	All detected emissions are more than 20dB below the limit!	2	5370.0	All detected emissions are more than 20dB below the limit!
3	7503.0		3	7779.0		3	8055.0	
4	10004.0		4	10372.0		4	10740.0	
5	12505.0		5	12965.0		5	13425.0	
6	15006.0		6	15558.0		6	16110.0	
7	17507.0		7	18151.0		7	18795.0	
8	20008.0		8	20744.0		8	21480.0	
9	22509.0		9	23337.0		9	24165.0	
10	25010.0		10	25930.0		10	26850.0	



Results: QPSK with 10 MHz channel bandwidth

Plot 1: channel 40620 (Traffic mode up to 30 MHz)

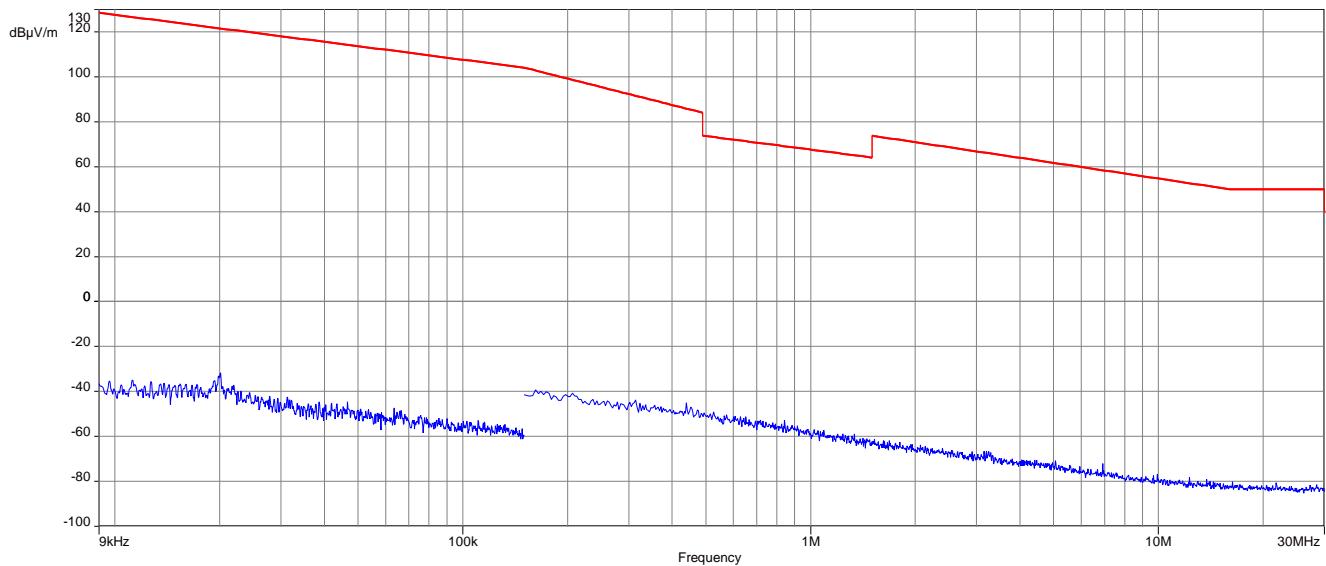


Plot 2: channel 40620 (30 MHz to 1 GHz)

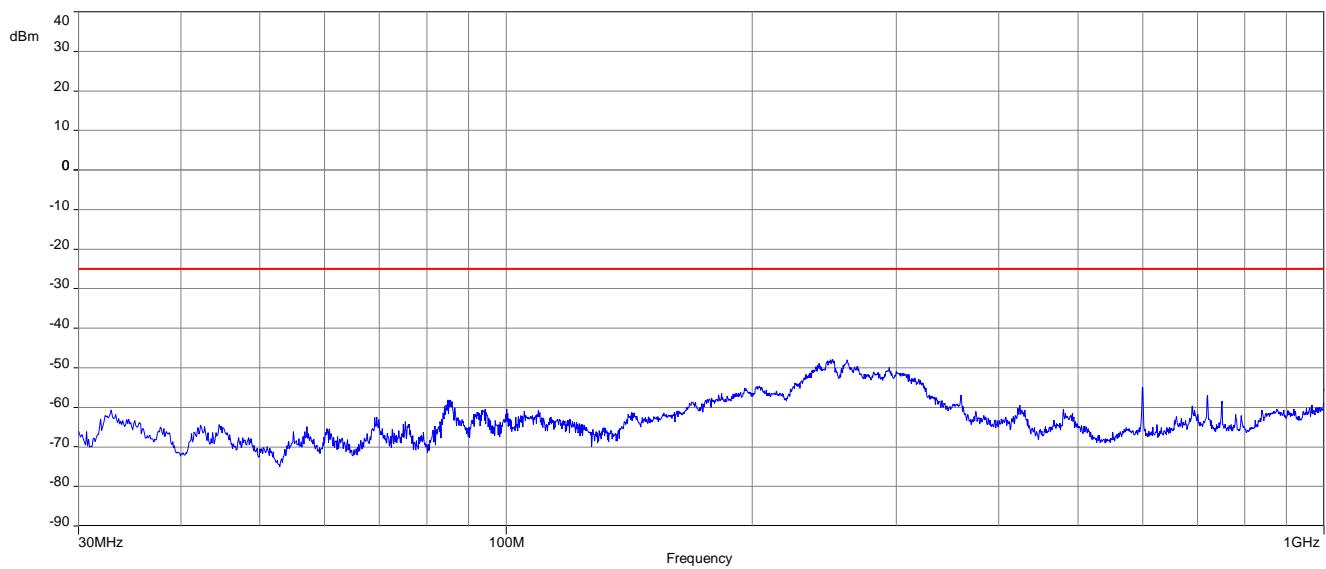

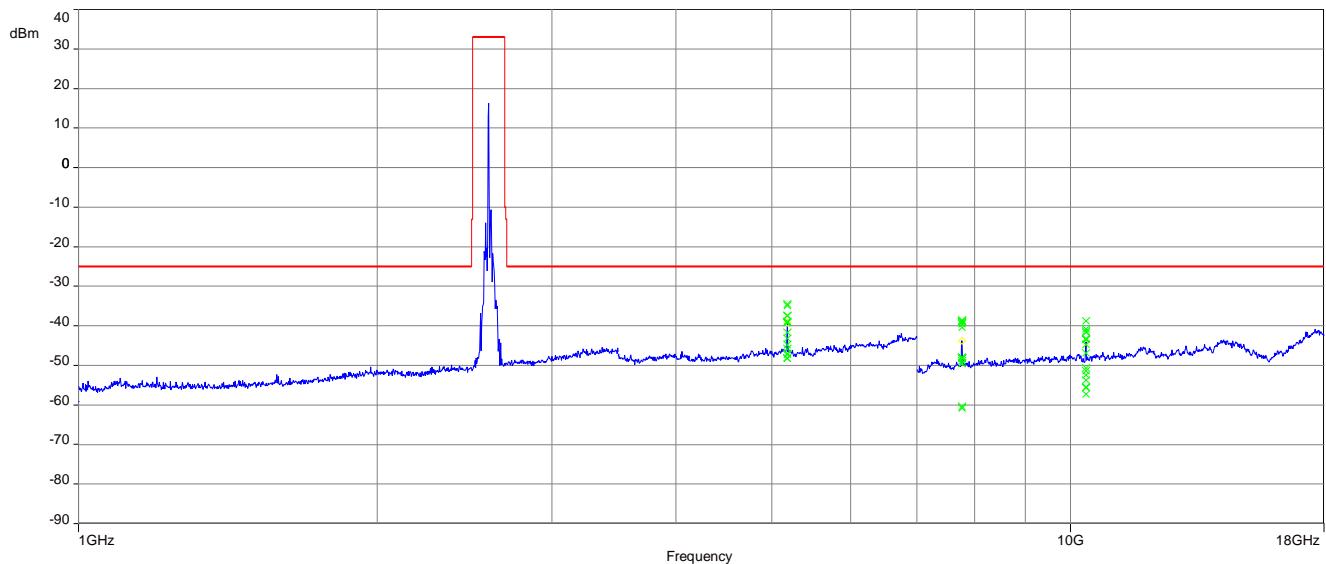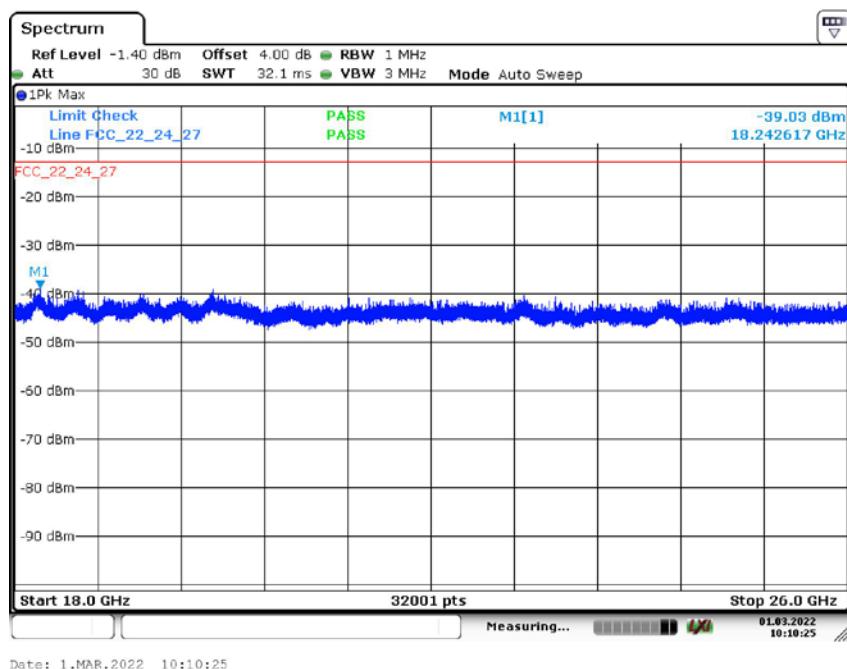
Plot 3: channel 40620 (1 GHz to 18 GHz)**Plot 4:** channel 40620 (18 GHz to 26 GHz)



Results: 16-QAM with 10 MHz channel bandwidth

Plot 1: channel 40620 (Traffic mode up to 30 MHz)

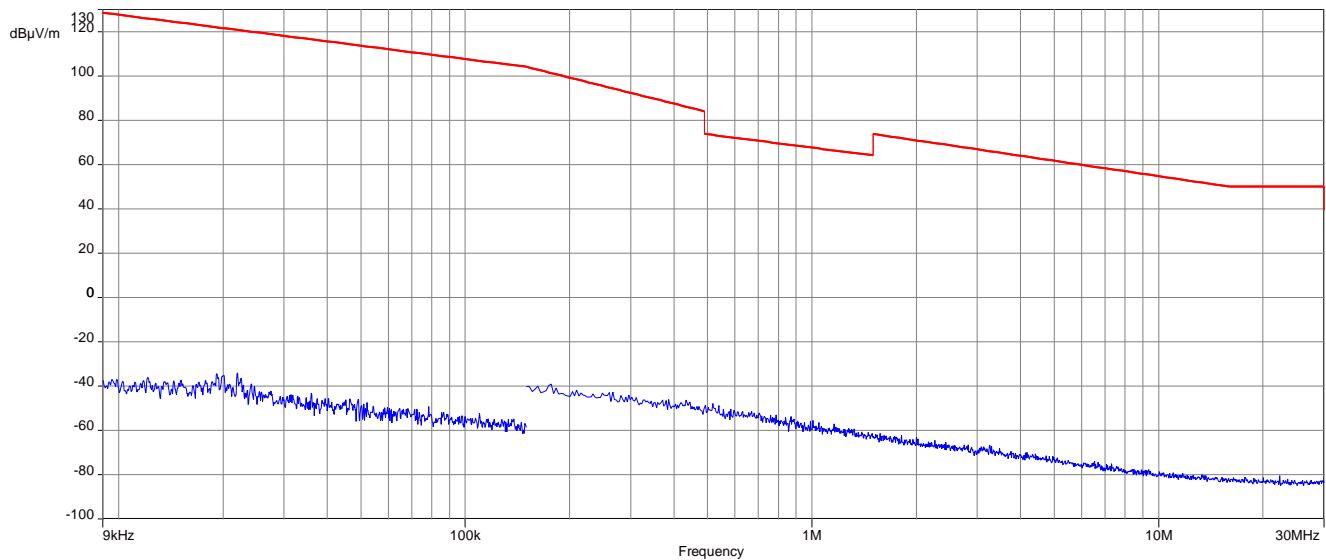

Plot 2: channel 40620 (30 MHz to 1 GHz)

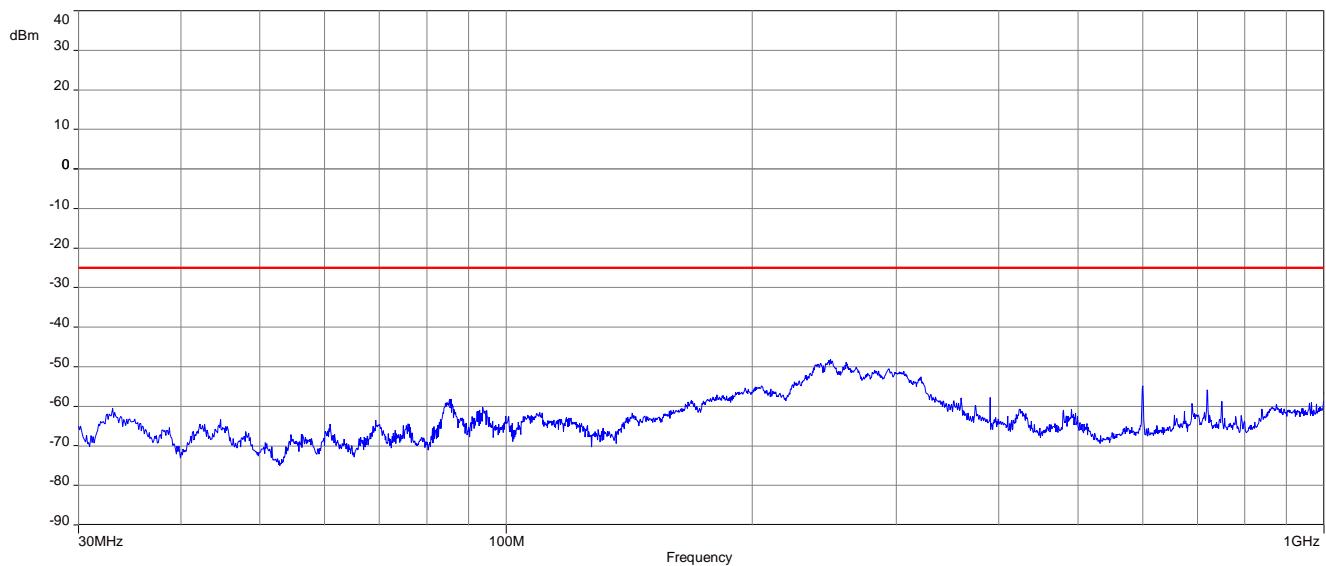

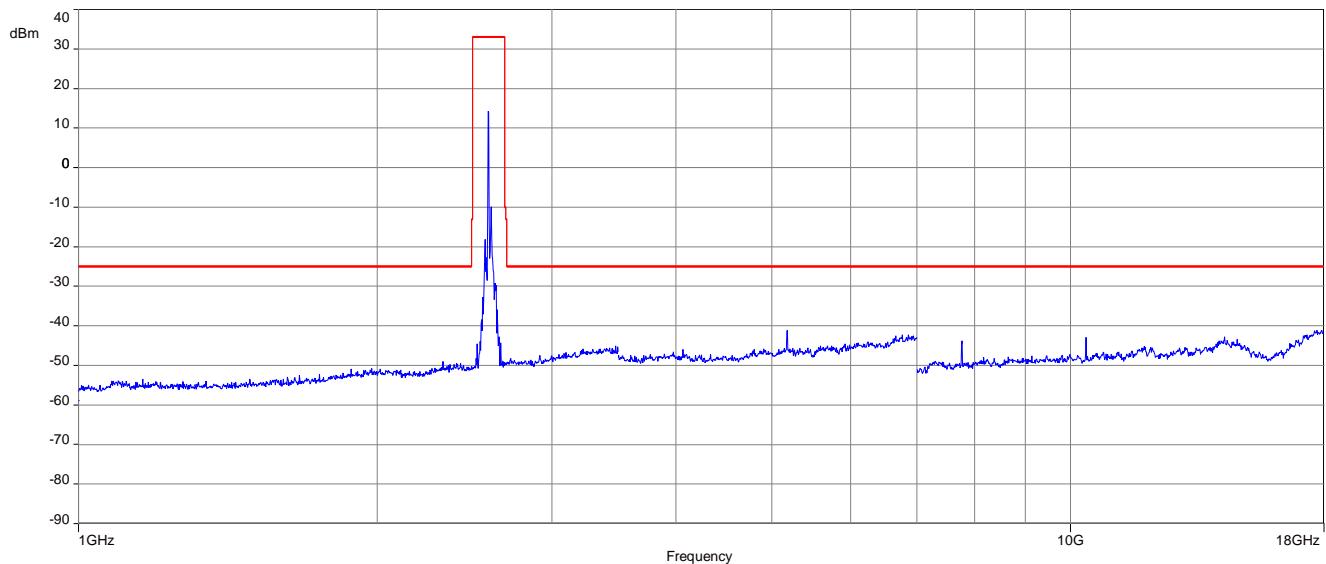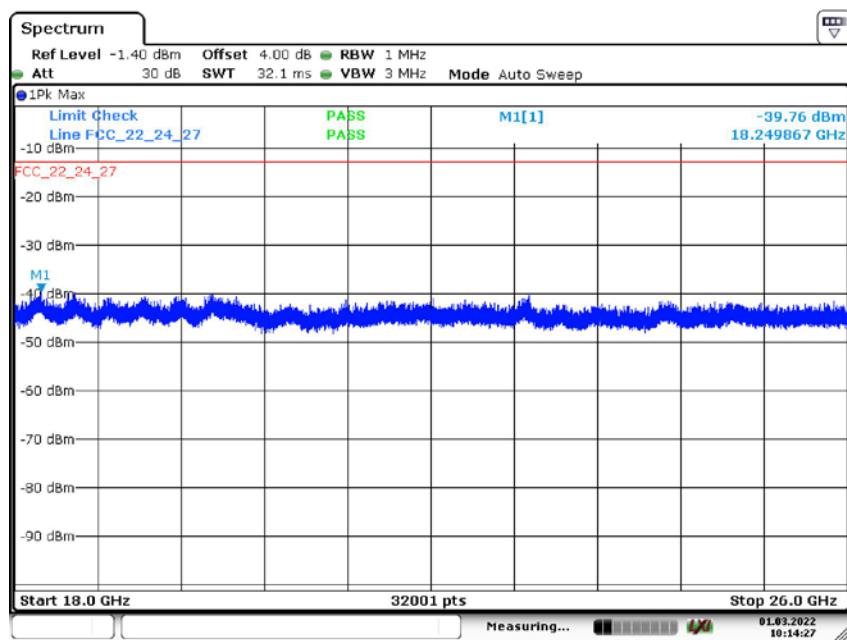Plot 3: channel 40620 (1 GHz to 18 GHz)**Plot 4:** channel 40620 (18 GHz to 26 GHz)

28 Summary of measurement results LTE band 66

<input type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input checked="" type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 27 RSS 139	See table!	2022-04-11	Delta tests according to manufacturer demand!

28.1 LTE – Band 66

Test Case	temperature conditions	power source voltages	C	NC	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Extreme	Extreme	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

29 RF measurements LTE band 66

29.1 Description of test setup

For the spurious measurements we use the substitution method according TIA/EIA 603.

29.2 Results

29.2.1 RF output power

Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector	
Sweep time	
Video bandwidth	
Resolution bandwidth	Measured with CMW500
Span	
Trace mode	
Setup	See chapter 7.2 - setup B, 7.4 – setup B
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Nominal Peak Output Power	
+30.00 dBm e.i.r.p. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	

Results:

Output Power (conducted)						
Bandwidth (MHz)	Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Peak to Average Ratio (dB)	Average Output Power (dBm) 16-QAM	Peak to Average Ratio (dB)
1.4	1710.7	1 RB low	21.3	4.1	20.3	4.9
		1 RB high	21.4	4.0	20.2	4.9
		50% RB mid	21.4	4.1	20.3	5.0
		100% RB	20.3	4.6	19.2	5.5
	1745.0	1 RB low	21.2	4.8	20.3	5.4
		1 RB high	21.4	4.7	20.5	5.3
		50% RB mid	21.4	4.8	20.4	5.6
		100% RB	20.4	5.1	19.3	5.8
	1779.3	1 RB low	16.9	6.6	16.3	7.3
		1 RB high	16.8	6.6	16.1	7.3
		50% RB mid	17.0	6.7	16.2	7.5
		100% RB	16.9	7.0	15.6	8.3
3	1711.5	1 RB low	21.2	4.1	20.1	5.0
		1 RB high	21.3	3.9	20.3	4.7
		50% RB mid	20.3	4.2	19.2	5.2
		100% RB	20.3	4.6	19.3	5.5
	1745.0	1 RB low	21.0	4.9	20.2	5.5
		1 RB high	21.5	4.8	20.5	5.5
		50% RB mid	20.3	4.6	19.3	5.4
		100% RB	20.4	5.2	19.3	5.9
	1778.5	1 RB low	19.0	4.5	16.8	6.9
		1 RB high	16.9	6.7	18.3	5.3
		50% RB mid	17.2	6.4	18.2	5.4
		100% RB	16.4	7.4	18.2	5.8
5	1712.5	1 RB low	21.0	4.1	19.8	4.9
		1 RB high	21.3	3.9	20.2	4.6
		50% RB mid	20.4	4.2	19.3	5.1
		100% RB	20.2	4.6	19.2	5.5
	1745.0	1 RB low	20.9	4.9	19.9	5.4
		1 RB high	21.2	4.7	19.9	5.2
		50% RB mid	20.3	4.7	19.5	5.6
		100% RB	20.3	5.1	19.3	5.9
	1777.5	1 RB low	19.6	4.3	19.0	5.0
		1 RB high	19.1	4.6	16.5	7.2
		50% RB mid	19.2	4.6	18.5	5.4
		100% RB	19.4	4.9	18.6	5.7

10	1715.0	1 RB low	21.0	4.2	20.0	5.0
		1 RB high	20.4	4.2	17.7	6.9
		50% RB mid	20.3	4.2	19.3	5.1
		100% RB	20.2	4.6	19.2	5.4
	1745.0	1 RB low	17.3	7.2	19.1	5.4
		1 RB high	21.1	4.5	20.4	5.3
		50% RB mid	20.4	4.7	19.3	5.5
		100% RB	20.3	5.1	19.3	5.8
	1775.0	1 RB low	18.1	5.6	19.0	4.7
		1 RB high	17.6	5.0	15.4	7.3
		50% RB mid	19.6	4.3	18.8	5.2
		100% RB	19.4	4.6	18.6	5.4
15	1717.5	1 RB low	20.8	4.1	19.7	4.9
		1 RB high	17.2	6.6	16.9	6.8
		50% RB mid	20.3	4.2	19.3	5.1
		100% RB	20.3	4.8	19.2	5.5
	1745.0	1 RB low	18.3	5.6	16.0	7.9
		1 RB high	21.0	4.3	20.3	5.0
		50% RB mid	20.3	4.7	19.3	5.5
		100% RB	20.2	5.1	19.1	5.8
	1772.5	1 RB low	18.0	5.9	19.4	4.5
		1 RB high	16.7	5.5	15.2	7.0
		50% RB mid	19.9	4.2	19.0	5.0
		100% RB	19.7	4.6	18.8	5.3
20	1720.0	1 RB low	20.2	4.1	19.3	4.8
		1 RB high	16.3	6.6	16.0	6.9
		50% RB mid	20.3	4.3	19.3	5.2
		100% RB	20.3	4.7	19.2	5.5
	1745.0	1 RB low	18.4	4.5	15.2	7.8
		1 RB high	20.8	4.1	19.8	4.9
		50% RB mid	20.3	4.7	19.3	5.5
		100% RB	20.3	4.9	19.2	5.7
	1770.0	1 RB low	20.3	3.7	19.3	4.4
		1 RB high	16.2	5.5	14.8	7.0
		50% RB mid	20.0	4.0	19.0	4.9
		100% RB	19.8	4.3	18.9	5.2

The radiated output power is measured in the mode with the highest conducted output power.

Output Power (radiated)			
Bandwidth (MHz)	Frequency (MHz)	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM
1.4	1710.7	21.6	21.6
	1745.0	23.4	23.4
	1779.3	22.8	22.9
3	1711.5	21.7	21.6
	1745.0	23.5	23.2
	1778.5	23.0	23.3
5	1712.5	21.4	21.8
	1745.0	23.3	23.8
	1777.5	23.2	23.3
10	1715.0	21.6	21.6
	1745.0	23.6	23.4
	1775.0	23.3	23.3
15	1717.5	21.8	21.6
	1745.0	23.1	23.1
	1772.5	22.9	23.1
20	1720.0	21.9	21.7
	1745.0	23.3	23.2
	1770.0	23.3	23.2

29.2.2 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2014 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1779.3 MHz. Measurement made up to 18 GHz.

Measurement:

Measurement parameters	
Detector	Peak
Sweep time	2 sec.
Video bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span	100 MHz Steps
Trace mode	Max Hold
Setup	See chapter 7.1 - setup B; 7.2 - setup A/B ; 7.3 - setup A
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P) / (P, \text{Power in Watts})$	
-13 dBm	

QPSK:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	3430.0	All detected emissions are more than 20dB below the limit!	2	3490.0	All detected emissions are more than 20dB below the limit!	2	3550.0	All detected emissions are more than 20dB below the limit!
3	5145.0		3	5235.0		3	5325.0	
4	6860.0		4	6980.0		4	7100.0	
5	8575.0		5	8725.0		5	8875.0	
6	10290.0		6	10470.0		6	10650.0	
7	12005.0		7	12215.0		7	12425.0	
8	13720.0		8	13960.0		8	14200.0	
9	15435.0		9	15705.0		9	15975.0	
10	17150.0		10	17450.0		10	17750.0	

16-QAM:


Spurious Emission Level (dBm)								
Harmonic	Lowest channel Freq. (MHz)	Level [dBm]	Harmonic	Middle channel Freq. (MHz)	Level [dBm]	Harmonic	Highest channel Freq. (MHz)	Level [dBm]
2	3430.0	All detected emissions are more than 20dB below the limit!	2	3490.0	All detected emissions are more than 20dB below the limit!	2	3550.0	All detected emissions are more than 20dB below the limit!
3	5145.0		3	5235.0		3	5325.0	
4	6860.0		4	6980.0		4	7100.0	
5	8575.0		5	8725.0		5	8875.0	
6	10290.0		6	10470.0		6	10650.0	
7	12005.0		7	12215.0		7	12425.0	
8	13720.0		8	13960.0		8	14200.0	
9	15435.0		9	15705.0		9	15975.0	
10	17150.0		10	17450.0		10	17750.0	

Results: QPSK with 10 MHz channel bandwidth


Plot 1: Channel 132322 (Traffic mode up to 30 MHz)

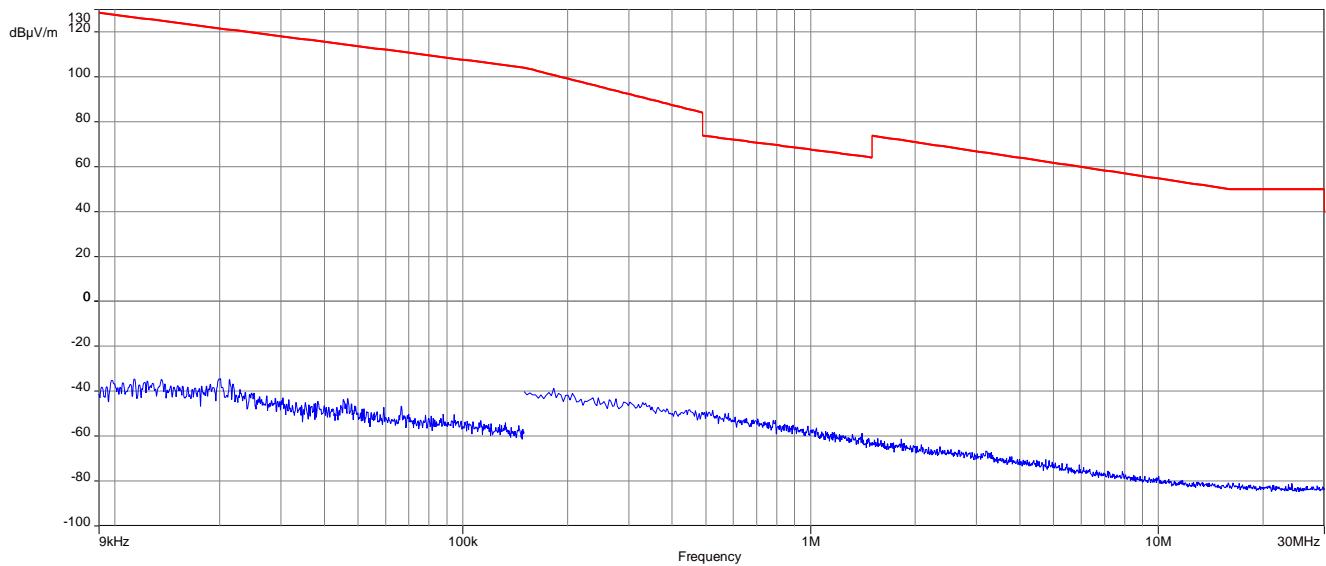

Plot 2: Channel 132322 (30 MHz – 1 GHz)

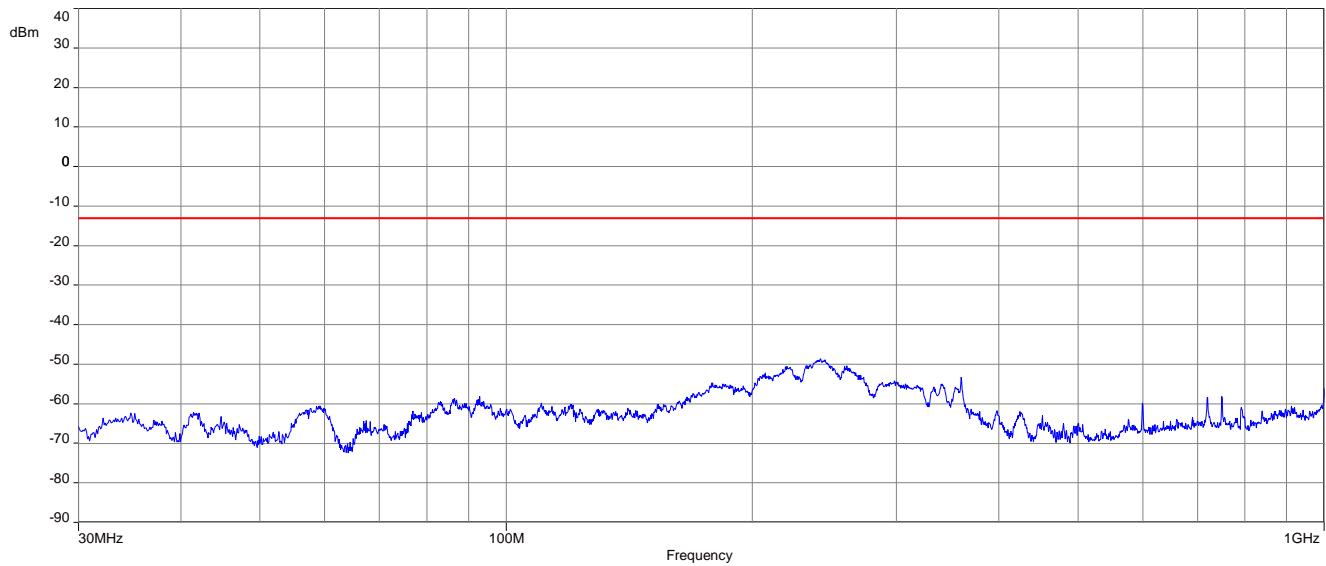


Plot 3: Channel 132322 (1 GHz – 18 GHz)

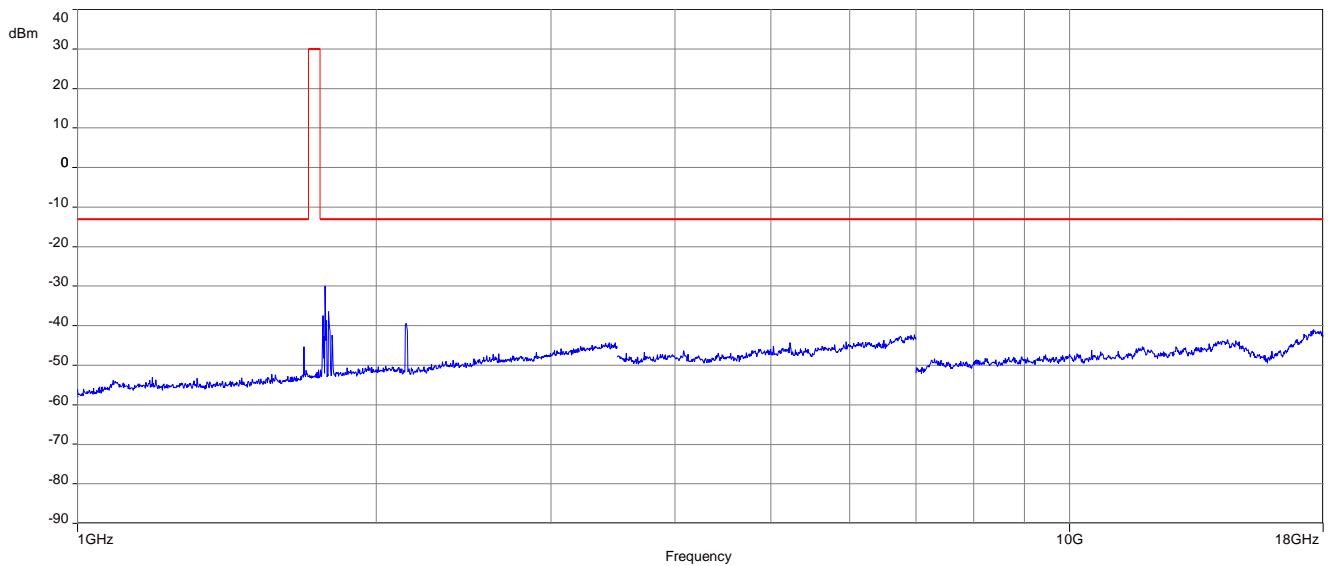


Carrier notched with 1.7 GHz rejection filter.

Results: 16-QAM with 10 MHz channel bandwidth


Plot 1: Channel 132322 (Traffic mode up to 30 MHz)

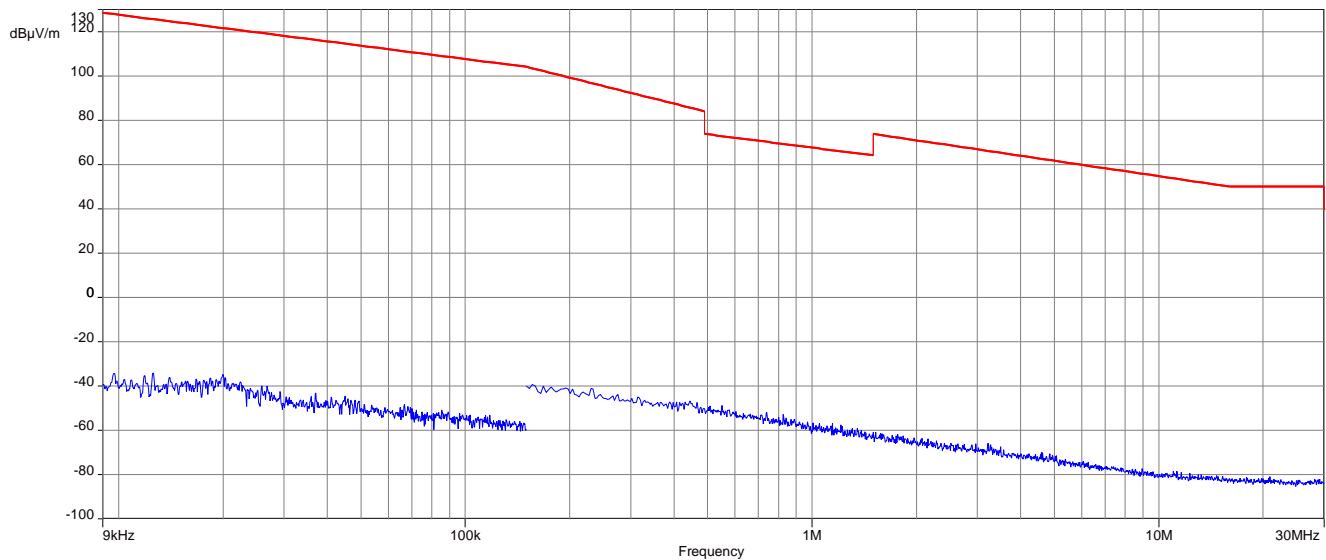

Plot 2: Channel 132322 (30 MHz – 1 GHz)

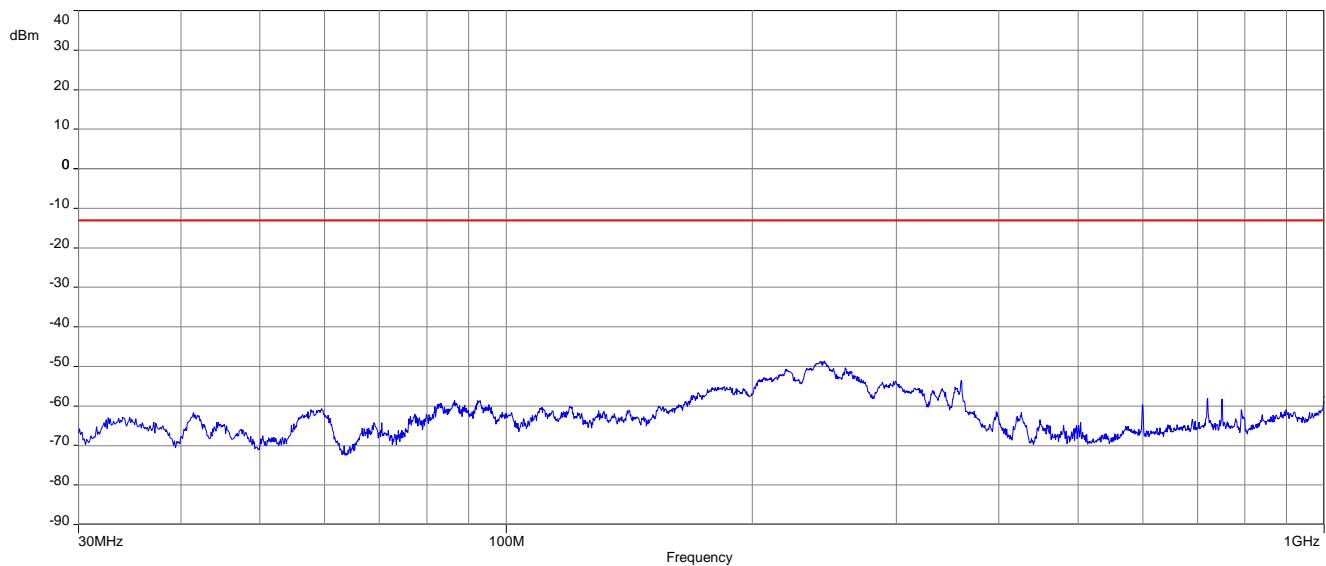

Plot 3: Channel 132322 (1 GHz – 18 GHz)

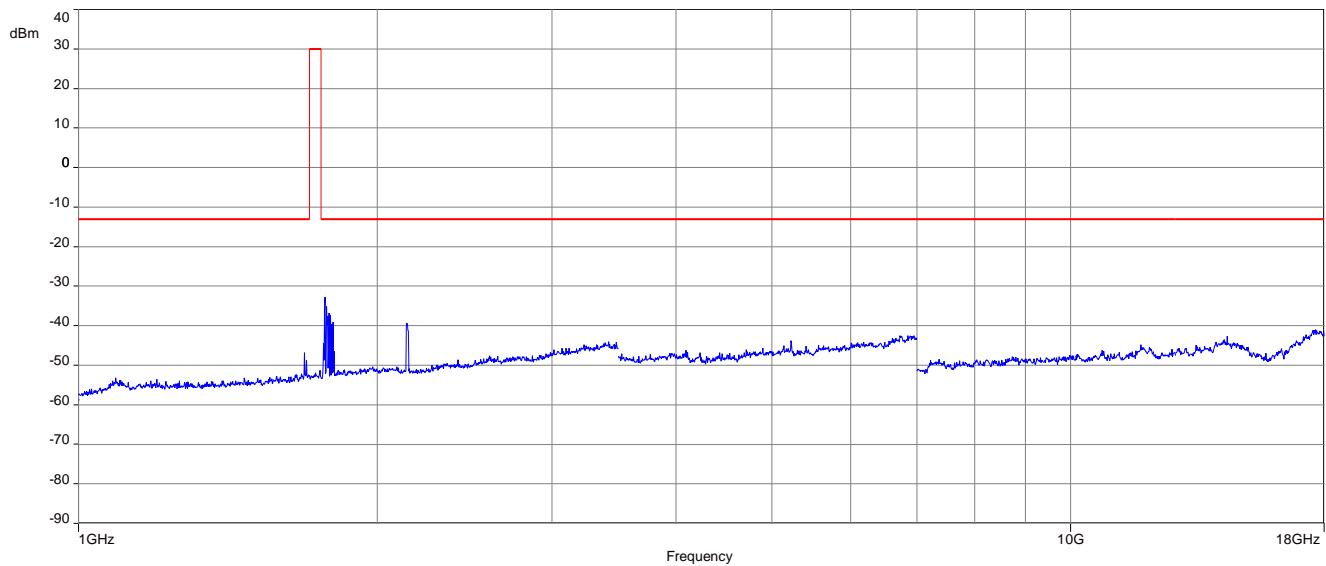

Carrier notched with 1.7 GHz rejection filter.

30 Observations

No observations except those reported with the single test cases have been made.

31 Glossary

EUT	Equipment under test
DUT	Device under test
UUT	Unit under test
GUE	GNSS User Equipment
ETSI	European Telecommunications Standards Institute
EN	European Standard
FCC	Federal Communications Commission
FCC ID	Company Identifier at FCC
IC	Industry Canada
PMN	Product marketing name
HMN	Host marketing name
HVIN	Hardware version identification number
FVIN	Firmware version identification number
EMC	Electromagnetic Compatibility
HW	Hardware
SW	Software
Inv. No.	Inventory number
S/N or SN	Serial number
C	Compliant
NC	Not compliant
NA	Not applicable
NP	Not performed
PP	Positive peak
QP	Quasi peak
AVG	Average
OC	Operating channel
OCW	Operating channel bandwidth
OBW	Occupied bandwidth
OOB	Out of band
DFS	Dynamic frequency selection
CAC	Channel availability check
OP	Occupancy period
NOP	Non occupancy period
DC	Duty cycle
PER	Packet error rate
CW	Clean wave
MC	Modulated carrier
WLAN	Wireless local area network
RLAN	Radio local area network
DSSS	Dynamic sequence spread spectrum
OFDM	Orthogonal frequency division multiplexing
FHSS	Frequency hopping spread spectrum
GNSS	Global Navigation Satellite System
C/N₀	Carrier to noise-density ratio, expressed in dB-Hz

32 Document history

Version	Applied changes	Date of release
-/-	Initial release	2022-04-11

33 Accreditation Certificate – D-PL-12076-01-04

first page	last page
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p>Accreditation </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken</p> <p>is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields: Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards</p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 07 pages.</p> <p>Registration number of the certificate: D-PL-12076-01-04</p> <p>Frankfurt am Main, 09.06.2020  by order of Prof. Ing. (FH) Ralf Egner Head of Division</p> <p><small>The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH. https://www.dakks.de/en/content/accredited-bodies-dakks See notes overleaf.</small></p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin Spittelmarkt 10 10117 Berlin</p> <p>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Office Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkkS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkkS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkkS is a signatory to the multilateral agreements for mutual recognition of the International Cooperation for Accreditation (IAF), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iaf.nu</p>

Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkkS or may be received by CTC advanced GmbH on request

<https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf>

34 Accreditation Certificate – D-PL-12076-01-05

first page	last page
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p>Accreditation </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken</p> <p>is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields: Telecommunication (FCC Requirements)</p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 05 pages.</p> <p>Registration number of the certificate: D-PL-12076-01-05</p> <p>Frankfurt am Main, 09.06.2020 </p> <p>by order Digi-Inq. (FH) Half Eigner Head of Division</p> <p><small>The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH. https://www.dakks.de/en/content/accredited-bodies-dakks See notes overleaf.</small></p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin Spittelmarkt 10 10117 Berlin</p> <p>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Office Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkkS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkkS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law G 2009, p. 2629) and the Regulation (EU) No 765/2008 of the European Parliament and of the Council of 9 July 2008 laying out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkkS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iaf.nu</p>

Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkkS or may be received by CTC advanced GmbH on request

<https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf>

END OF TEST REPORT