



**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-031-0037 Fax : +02-31-031-0039

**Test Report for FCC**

FCC ID : 2AGFOAFM5

Report Number		ESTF151512-004		
Applicant	Company name	DA Tech Co., Ltd		
	Address	39, Pyeongcheon-ro 141 beon-gil, Bupyeong-gu, Incheon, Korea		
	Telephone	82-32-868-0844		
	Contact person	Cheon-Woo Lee		
Product	Product name	Breathalyzer		
	Model No.	AFM-5	Manufacturer	DA Tech Co., Ltd
	Serial No.	NONE	Country of origin	KOREA
Test date	2015-11-5 ~ 2015-12-8		Date of issue	23-Dec-15
Testing location	347-69, Jungbu-daero 147beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do 467-811, R. O. Korea			
Standard	FCC PART 15 Subpart C (15.247), ANSI C 63.10(2009), KDB 558074 D01(2015)			
Measurement facility registration number		659627		
Tested by	Senior Engineer D.H. JUNG			
Reviewed by	Engineering Manager J.M. Yang			
Abbreviation	OK, Pass = Passed, Fail = Failed, N/A = not applicable			
<p>* Note</p> <ul style="list-style-type: none"> <li>- Basic Model Number : AFM-5</li> <li>- Additional Model(s) : AFM-P3</li> <li>- This test report is not permitted to copy partly without our permission</li> <li>- This test result is dependent on only equipment to be used</li> <li>- This test result based on a single evaluation of one sample of the above mentioned</li> </ul>				



## ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-031-0037 Fax : +02-31-031-0039

## Contents

1. Laboratory Information .....	3
2. Description of EUT .....	4
3. Test Standards .....	5
4. Measurement condition .....	6
5. DTS bandwidth .....	10
5.1 Test procedure .....	10
5.2 Test instruments and measurement setup .....	10
5.3 Measurement results .....	10
5.4 Trace data .....	11
6. Maximum Peak Output Power .....	13
6.1 Test procedure .....	13
6.2 Test instruments and measurement setup .....	13
6.3 Measurement results .....	13
7. Maximum conducted (average) output power .....	14
7.1 Test procedure .....	14
7.2 Test instruments and measurement setup .....	14
7.3 Measurement results .....	14
7.4 Trace data(Peak, Average).....	15
8. Maximum power spectral density level in the fundamental emission .....	18
8.1 Test procedure .....	18
8.2 Test instruments and measurement setup .....	18
8.3 Measurement results .....	18
8.4 Trace data .....	19
9. Emissions in non-restricted frequency bands .....	21
9.1 Test procedure .....	21
9.2 Test instruments and measurement setup .....	21
9.3 Measurement results .....	21
9.4 Trace data of band-edge & out of emissioin .....	22
10. Measurement of radiated emission .....	26
10.1 Measurement equipment .....	26
10.2 Environmental conditions .....	26
10.3 Measurement Instrument setting for Radiated Emission .....	27
10.4 Test Data .....	28
11. Measurement of conducted emission .....	36
11.1 Measurement equipment .....	36
11.2 Environmental conditions .....	36
11.3 Test Data .....	37
12. Photographs of test setup .....	38
12.1.Setup for Radiated Test : (30 ~ 1 000) MHz .....	38
12.2.Setup for Radiated Test : Above 1 GHz .....	39
12.3. Setup for Conducted Test : (0.15 ~ 30) MHz.....	40
12.4. Photographs of EUT .....	41

Appendix 1. Special diagram

Appendix 2. Antenna Requirement



## **ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +82-31-031-0037 Fax : +82-31-031-0039

# 1. Laboratory Information

## 1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report.

ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

## 1.2 Test Lab.

Corporation Name : ESTECH Co., Ltd.

Head Office : Suite 1015 World Meridian II, 123 Gasan Digital 2-ro, Geumcheon-gu, Seoul 153-759, R. O. Korea

EMC/Telecom/Safety Test Lab : 347-69, Jungbu-daero 147beon-gil, Majang-myeon, Icheon-si,  
Gyeonggi-do 467-811, R. O. Korea

## 1.3 Official Qualification(s)

MSIP : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Conformity Assessment Body(CAB) with registration number 659627 under APEC TEL MRA between the RRA and the FCC

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +82-31-031-0037 Fax : +82-31-031-0039

## 2. Description of EUT

### 2.1 Summary of Equipment Under Test

Modulation Type	: Bluetooth (GFSK)
Transfer Rate	: 1 Mbps
Number of Channel	: 40 ch
PEAK Output Power	: GFSK : 0.01 mW
Rating	: DC 1.5 V (AAA size alkaline battery)
Receipt Date	: 2-Nov-15
X-tal list(s) or Frequencies generated	: The highest operating frequency is 2480 MHz(Bluetooth)

### 2.2 General descriptions of EUT

Indication of B,A,C.	0.00 ~ 0.50%BAC 0.00 ~ 5.00% 0.00 ~ 2.50mg/l
Accuracy	+/- 0.005%BAC at 0.1%BAC at 25°C +/- 0.05% at 1.0% at 25°C +/- 0.025mg/l at 0.50mg/l at 25°C
Warm up time	Within 20 seconds at 0.50g/l(%) Warm up time may vary depending on the BAC measured.
Sensor	Fuel cell sensor
Power supply	One AAA size alkaline battery
Connectivity	Bluetooth 4.0 BLE
Dimensions (WxHxD)	41.5mm x 68mm x 16.9mm
Weight	43g including batteries
Calibration	Every 12 months or After 500 tests
Operating temperature	5 ~ 40°C



**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-031-0037 Fax : +02-31-031-0039

### 3. Test Standards

#### Test Standard : FCC PART 15 Subpart C (15.247)

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

#### Test Method : ANSI C 63.10 (2009) & KDB558074 D01(2015)

This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.

#### Summary of Test Results

Applied Standard : 47 CFR Part 15 Subpart C				remark
Standard	Test Type	Result	Remark	Limit
15.207	AC Power Conducted Emission	(N/A)	Meet the requirement	
15.205 & 15.209	Restricted band / Intentional Radiated Emission	Pass	Meet the requirement	
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement	Min. 500 kHz
	Occupied Bandwidth			
15.247(b)(3)	Maximum Peak/average output power	Pass	Meet the requirement	Max. 30 dBm
15.247(c)	Transmitter Radiated Emission	Pass	Meet the requirement	Table 15.209
15.247(e)	Power Spectral Density	Pass	Meet the requirement	Max. 8 dBm
15.247(d)	Band Edge Measurement	Pass	Meet the requirement	20 dB less

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +82-31-031-0037 Fax : +82-31-031-0039

## 4. Measurement Condition

### 4.1 EUT Operation

#### a. Channel

Ch.	Frequency	Ch.	Frequency
0	2402 MHz	20	2442 MHz
1	2404 MHz	21	2444 MHz
2	2406 MHz	22	2446 MHz
3	2408 MHz	23	2448 MHz
4	2410 MHz	24	2450 MHz
5	2412 MHz	25	2452 MHz
6	2414 MHz	...	...
...	...	39	2480 MHz
19	2440 MHz		

b. Measurement Channel : Bluetooth : Low(2402 MHz), Middle(2440 MHz),High(2480 MHz)

c. Test Mode : Continuous Output, GFSK

d. Test rate : 1 Mbps




## ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel ; +02-31-031-0037 Fax ; +02-31-031-0039

### 4.2 EUT Operation.

- The EUT was in the following operation mode during all testing
  - \* Execute a RF test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
  - \* Transmit mode were measured each channels(Low, Middle, High)
  - \* The EUT was measured up to tenth harmonic or 40 GHz of the highest operating frequency.
  - \* To check normal operating used the note pc and spectrum analyzer.

### 4.3 Configuration and Peripherals

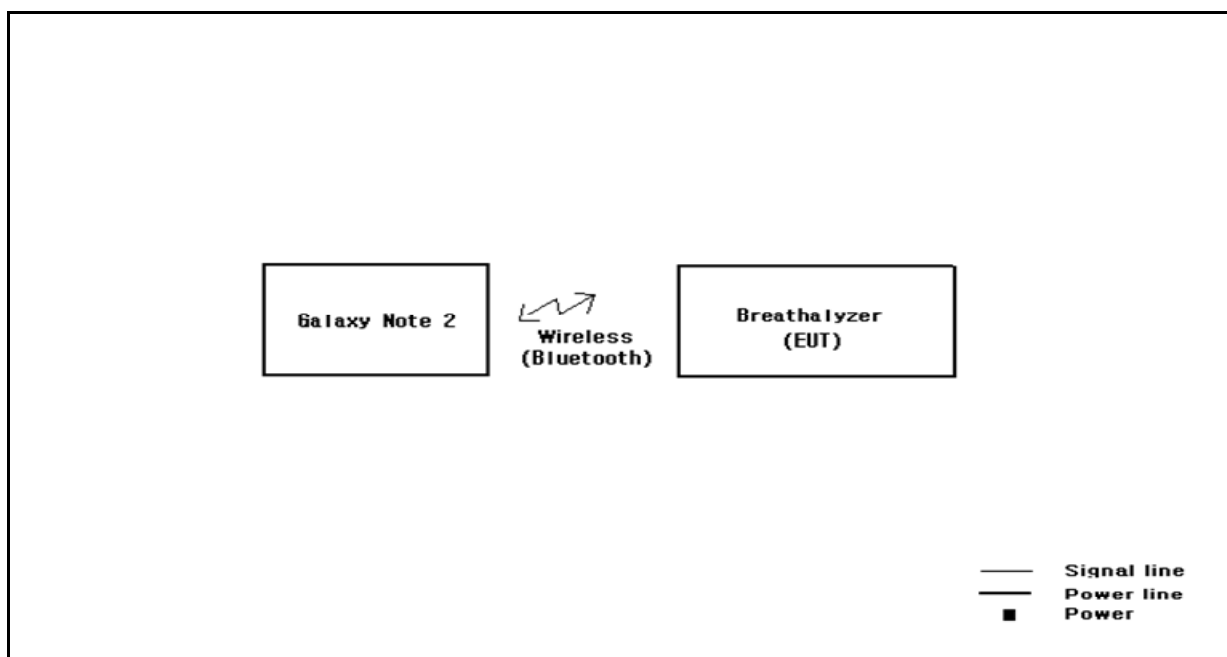

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-031-0037 Fax : +02-31-031-0039

**4.4 EUT and Support equipment**

Equipment Name	Model Name	S/N	Manufacturer	Remark (FCC ID)
Breathalyzer	AFM-5	NONE	DA Tech Co., Ltd	EUT
Galaxy Note 2	SHV-E250K	R33CA0QH6RR	Samsung	

**4.5 Cable Connecting**

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
Breathalyzer	Wireless (Bluetooth)	Galaxy Note 2	Wireless (Bluetooth)	-	-	






**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-031-0037 Fax : +02-31-031-0039

## 4.6 DUTY CYCLE OF TEST SIGNAL

Duty cycle is > 98%, duty factor shall be considered.

duty cycle =  $1/1=1$ , duty factor =  $10 \cdot \log(1/1)=0$

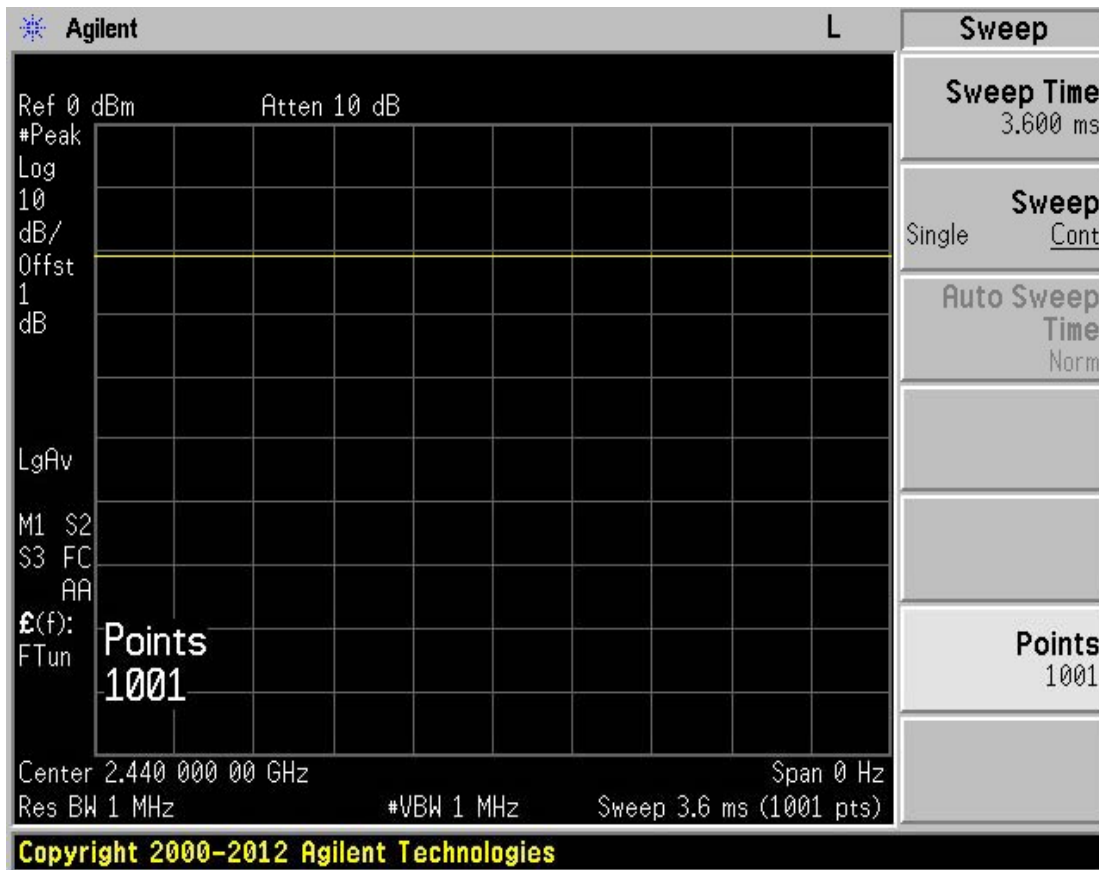

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-031-0037 Fax : +02-31-031-0039

## 5. DTS bandwidth

### 5.1 Test procedure

558074 D01 DTS Meas Guidance v03r03 8.2 Option 2

### 5.2 Test instruments and measurement setup

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW  $\geq$  3 X RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$  6 dB.

Limits : FCC § 15.247(a)(2)

#### 6dB Bandwidth Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	15-Jan-16
RF Cable	Length: 10 cm	-	
-Spectrum Analyzer $\Leftrightarrow$ EUT	Loss: 0.5dB	-	

### 5.3 Measurement results

EUT	Breathalyzer	MODEL	AFM-5
MODE	GFSK	ENVIRONMENTAL CONDITION	21.0 °C, 46.0 % R.H.
INPUT POWER	1.5Vd.c.		


Channel Frequency (MHz)	Occupied Bandwidth(MHz)	Bandwidth at 6dB below(MHz)	Minimum Limit (MHz)	PASS/FAIL
2402	1.089 MHz	0.70	0.5	PASS
2440	1.096 MHz	0.69	0.5	PASS
2480	1.086 MHz	0.70	0.5	PASS




### ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-631-0037 Fax : +02-31-631-0039

## 5.4 Trace data (ch\_0)

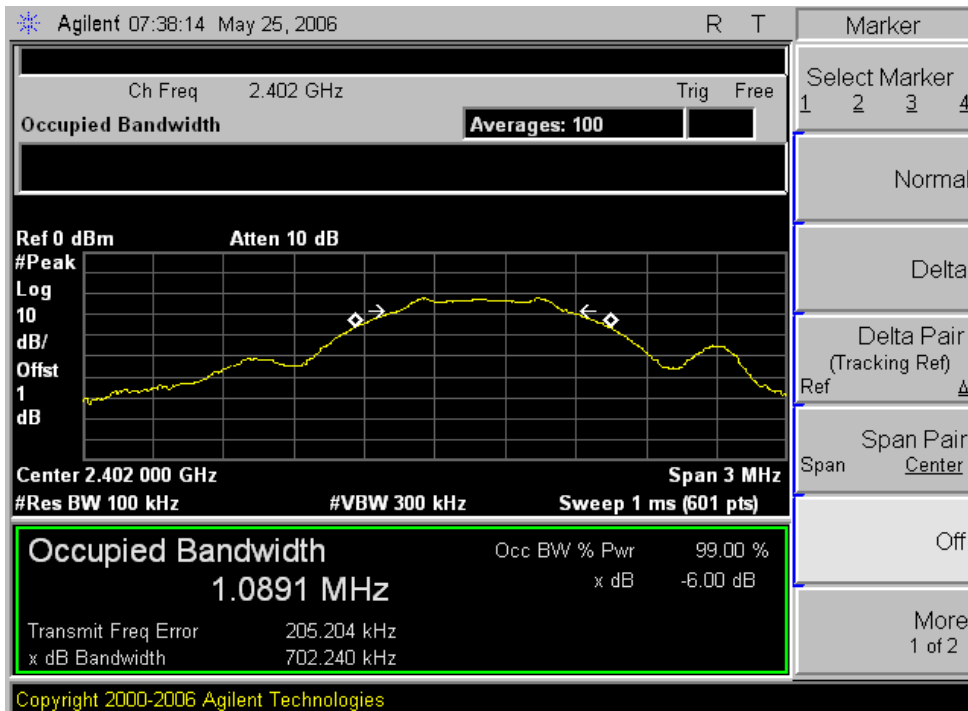

## (ch\_19)

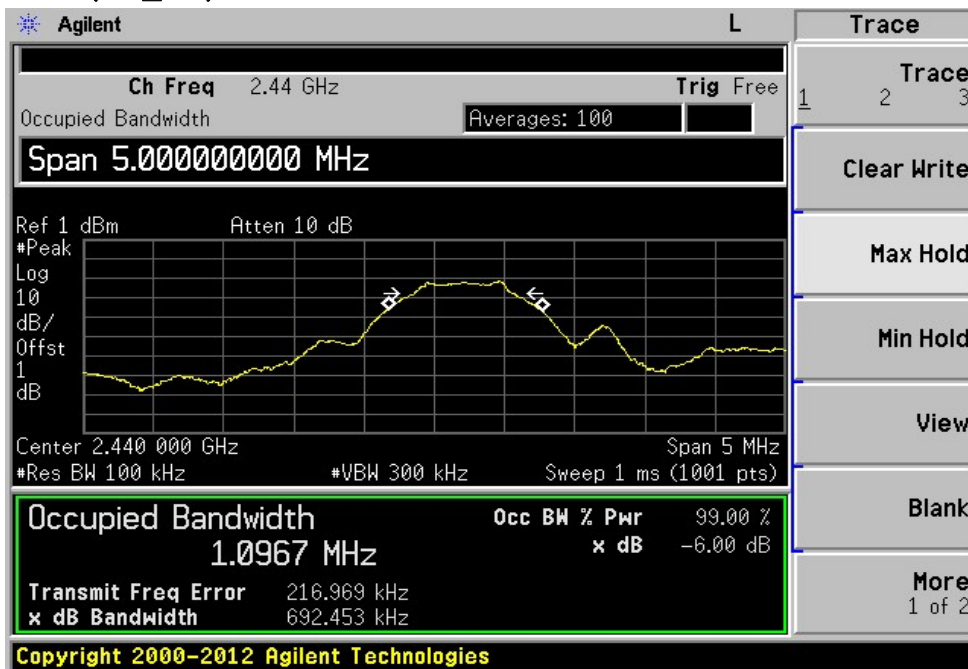




**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-031-0037 Fax : +02-31-031-0039

(ch\_39)

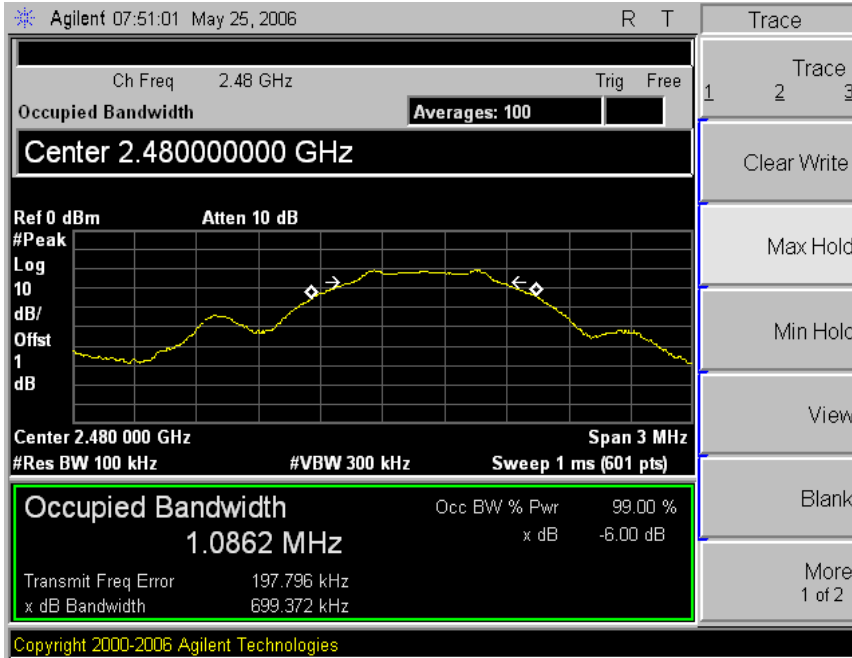

**ESTECH CO., Ltd.**

3-17-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +82-31-631-8037 Fax : +82-31-631-8039

## 6. Maximum peak conducted output power

### 6.1 Test procedure

KDB 558074 D01 DTS Meas Guidance V03r03 9.1.1 Integrated band power method

### 6.2 Test instruments and measurement setup

- Set the RBW = 1 MHz.
- Set VBW  $\geq 3 \times$  RBW.
- Set span  $\geq 3 \times$  RBW
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Limits : FCC § 15.247

#### Maximum Peak Output Power Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	15-Jan-16
RF Cable	Length: 10 cm	-	
-Spectrum Analyzer <=> EUT	Loss: 0.5 dB	-	

### 6.3 Measurement results

EUT	Breathalyzer	MODEL	AFM-5
MODE	GFSK	ENVIRONMENTAL CONDITION	21.0 °C, 44.0 % R.H.
INPUT POWER	1.5 Vd.c.		

CHANNEL	Channel frequency (MHz)	Conducted Power Output(dBm)			Limit[1W] (dBm)	PASS/FAIL
		Detector	(dBm)	(mW)		
0	2 402	PEAK	-23.21	0.005	30.0	PASS
19	2 440	PEAK	-24.02	0.004	30.0	PASS
39	2 480	PEAK	-21.67	0.007	30.0	PASS



## 7. Maximum conducted (average) output power

### 7.1 Test procedure

KDB 558074 D01 DTS Meas Guidance V03r03 9.2.2.2 Method AVGSA-1 (trace averaging with the EUT transmitting at full power throughout each sweep)

### 7.2 Test instruments and measurement setup

- Set span to at least 1.5 times the OBW.
- Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- Set VBW  $\geq 3 \times$  RBW.
- Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- If transmit duty cycle  $< 98 \%$ , use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98 \%$ , and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".
- Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

### Maximum Peak Output Power Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	15-Jan-16
RF Cable	Length: 10 cm	-	
-Spectrum Analyzer $\leftrightarrow$ EUT	Loss: 0.5 dB	-	

### 7.3 Measurement results

EUT	Breathalyzer	MODEL	AFM-5
MODE	GFSK	ENVIRONMENTAL CONDITION	21.0 °C, 44.0 % R.H.
INPUT POWER	1.5 Vd.c.		

CHANNEL	Channel frequency (MHz)	Conducted Power Output(dBm)			Measured + Duty Cycle(dBm)	Measured + Duty Cycle(mW)
		Detector	(dBm)	Duty Cycle		
0	2 402	AVG	-23.8	1	-22.80	0.005
19	2 440	AVG	-24.62	1	-23.62	0.004
39	2 480	AVG	-22.24	1	-21.24	0.008




# ESTECH CO., Ltd.

347-89, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +82-31-631-0037 Fax : +82-31-631-0039


## 7.4 Trace data (Peak, Average)

(ch\_1)

(Peak)

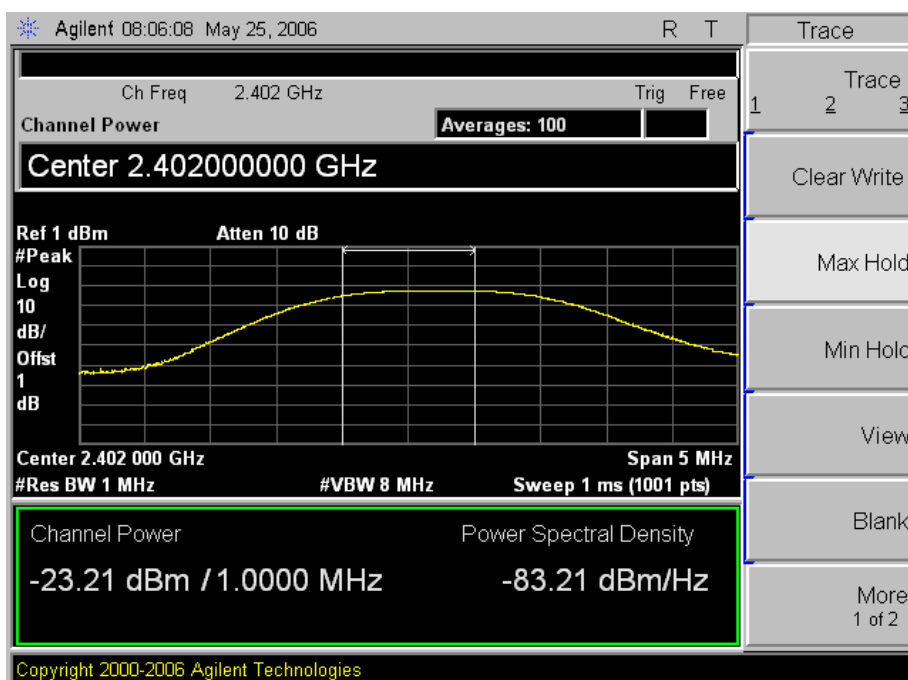

(Avg)

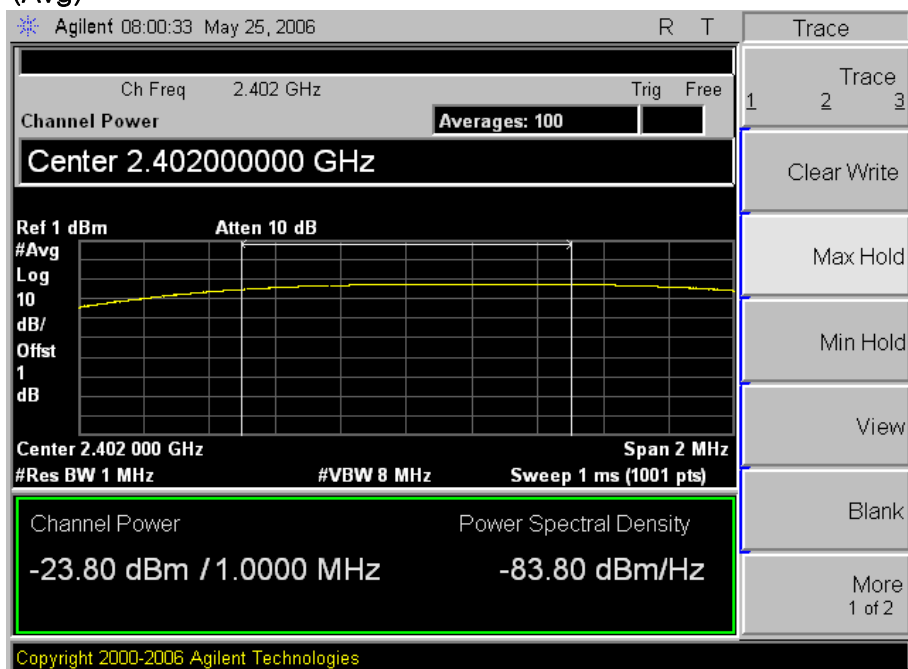




# ESTECH CO., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-631-0037 Fax : +02-31-631-0039

(ch\_19)

(Peak)

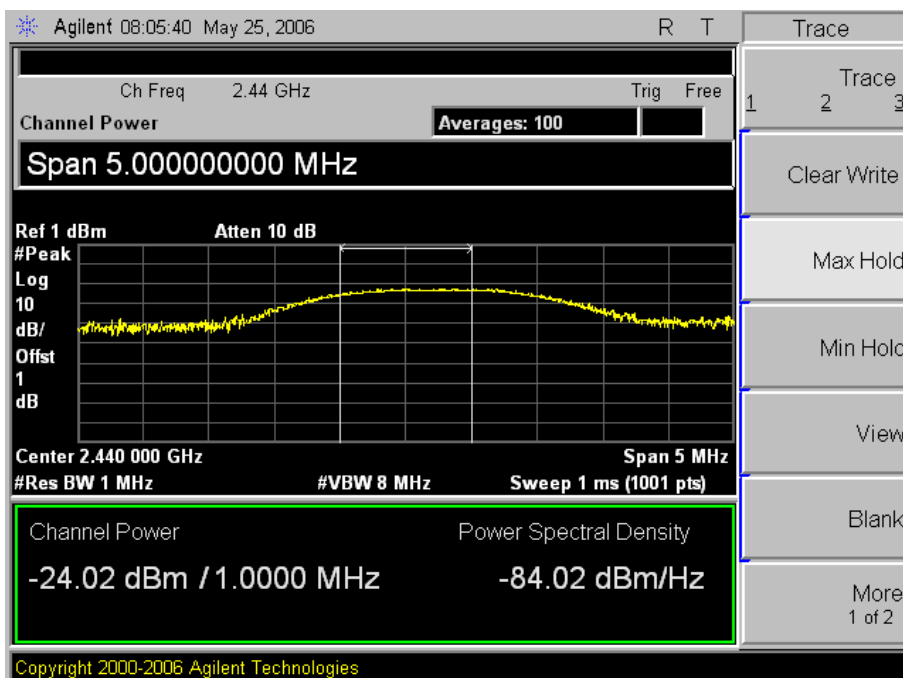

(Avg)

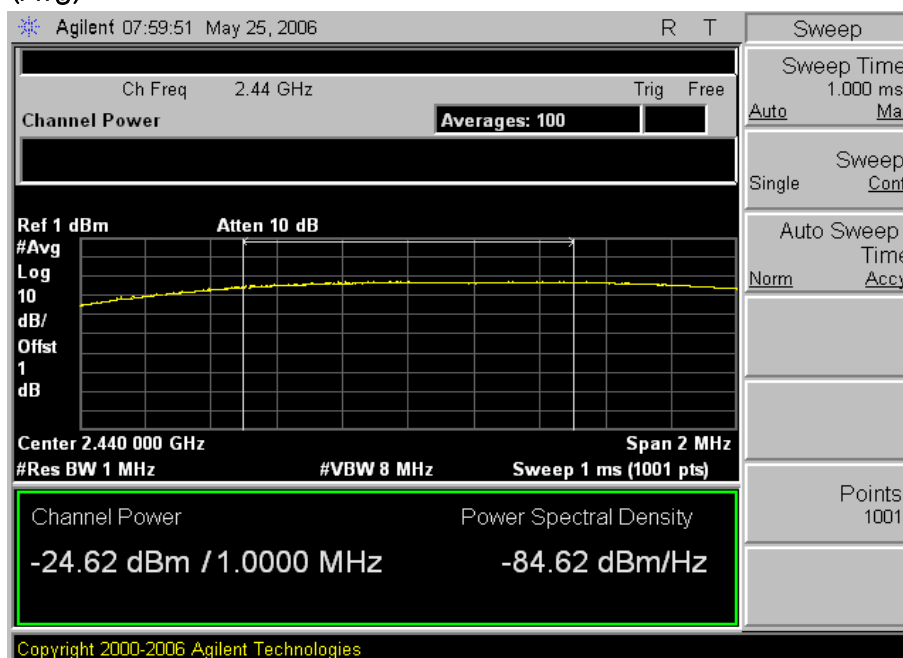






# ESTECH CO., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-631-0037 Fax : +02-31-631-0039

(ch\_39)

(Peak)

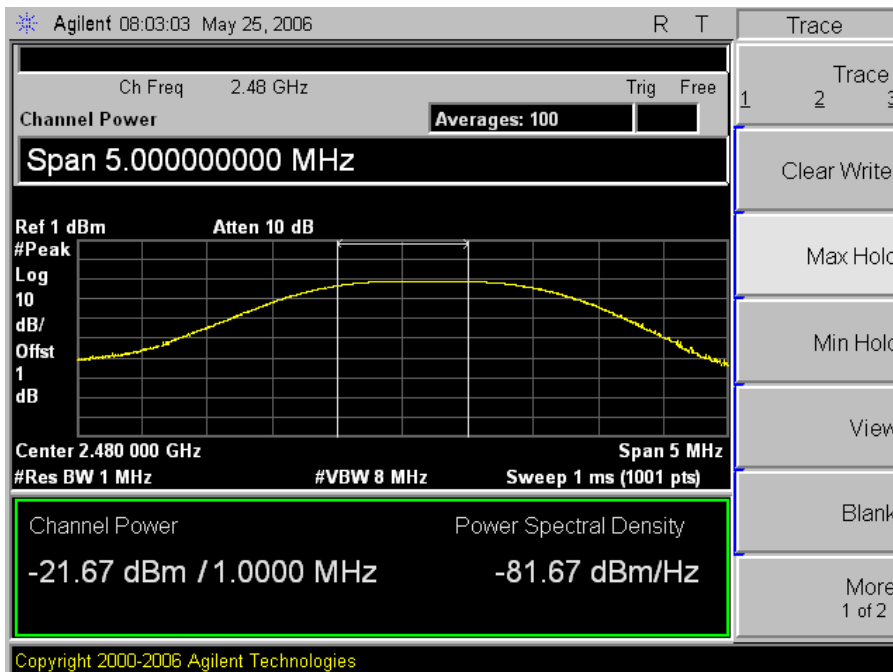

(Avg)

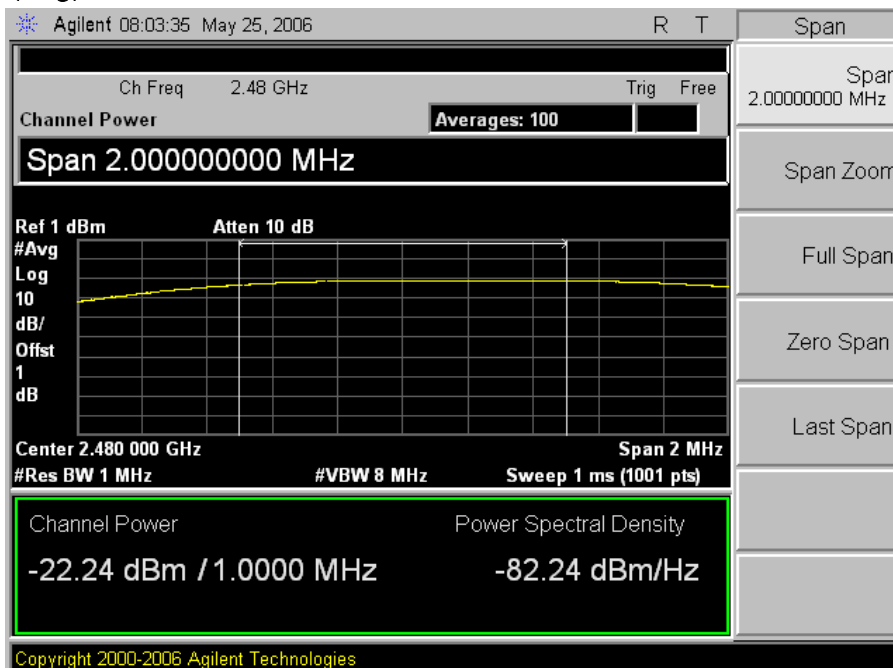

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +82-31-031-0037 Fax : +82-31-031-0039

## 8. Maximum power spectral density level in the fundamental emission

### 8.1 Test procedure

KDB 558074 D01 DTS Meas Guidance V03r03 10.2 Method PKPSD (peak PSD)

### 8.2 Test instruments and measurement setup

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Limits FCC § 15.247

#### The peak power density Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E440A	US42041291	15-Jan-16
RF Cable	Length: 10 cm	-	
-Spectrum Analyzer <=> EUT	Loss: 0.5 dB	-	

### 8.3 Measurement results

EUT	Breathalyzer	MODEL	AFM-5
MODE	GFSK	ENVIRONMENTAL CONDITION	21.0 °C, 44.0 % R.H.
INPUT POWER	1.5 Vd.c.		


CHANNEL	Channel Frequency (MHz)	Measured Power Spectral Density (dBm)	Maximum Permissible Power Density (dBm/3kHz)	Margin
0	2 402	-33.20	8.0	41.20
19	2 440	-34.64	8.0	42.64
39	2 480	-32.36	8.0	40.36




# ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-631-0037 Fax : +02-31-631-0039

## 8.4 Trace data (ch\_0)

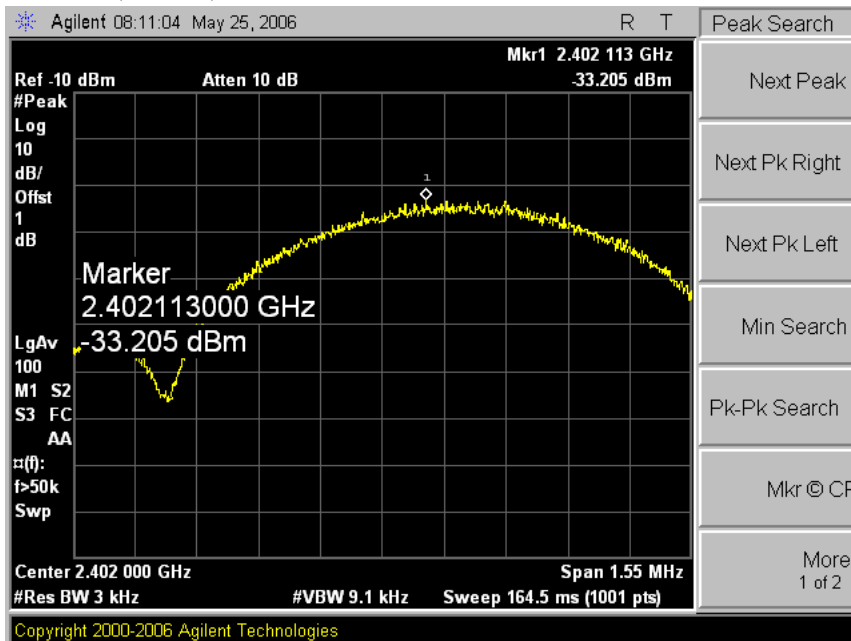

## (ch\_19)

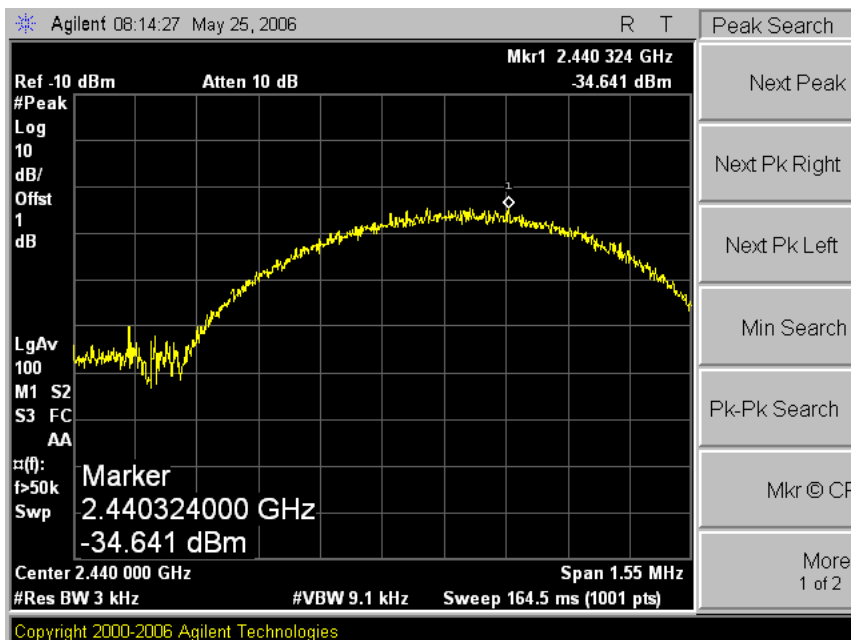




**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-031-0037 Fax : +02-31-031-0039

(ch\_39)

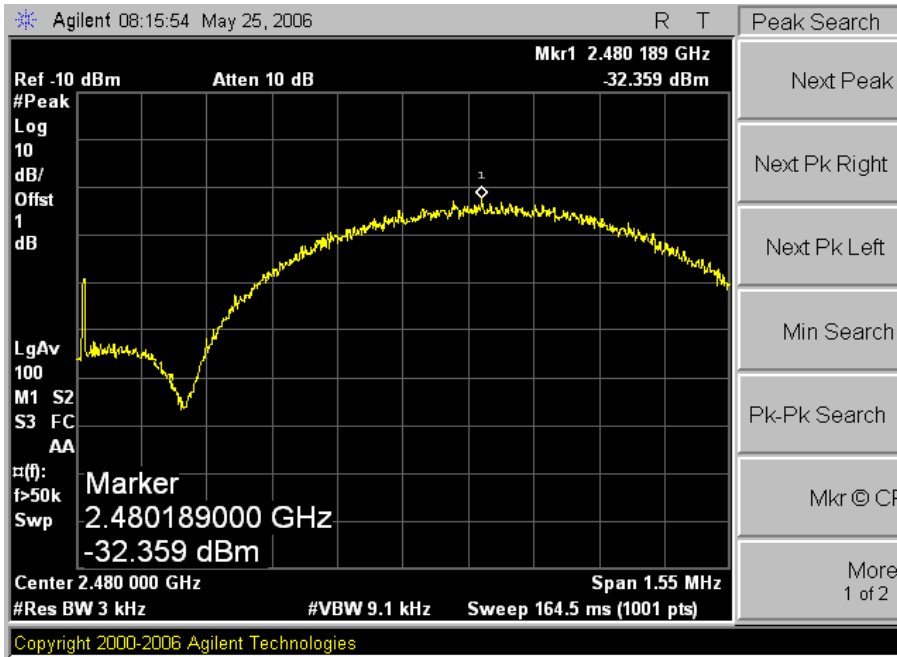

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +82-31-631-0037 Fax : +82-31-631-0039

## 9. Emissions in non-restricted frequency bands

### 9.1 Test procedure

KDB 558074 D01 DTS Meas Guidance V03r03 11.0 Emissions in non-restricted frequency

### 9.2 Test instruments and measurement setup

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions(15.247(d))

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to  $\geq 1.5$  times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW  $\geq 3 \times$  RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Limits FCC § 15.247

#### Band Edge&Out of Emission Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	15-Jan-16
RF Cable	Length: 6cm		-
-Spectrum Analyzer <=> EUT	Loss: 0.5dB		-

### 9.3 Measurement results of band-edge & out of emission

EUT	Breathalyzer	MODEL	AFM-5
MODE	GFSK	ENVIRONMENTAL CONDITION	21.0 °C, 44.0 % R.H.
INPUT POWER	1.5 Vd.c.		


CHANNEL	Channel Frequency (MHz)	limit	PASS/FAIL
0	2 402	20dBc	PASS
39	2 480	20dBc	PASS




# ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +82-31-031-0037 Fax : +82-31-031-0039

## 9.4 Trace data of band-edge & Out of Emission (ch\_0)

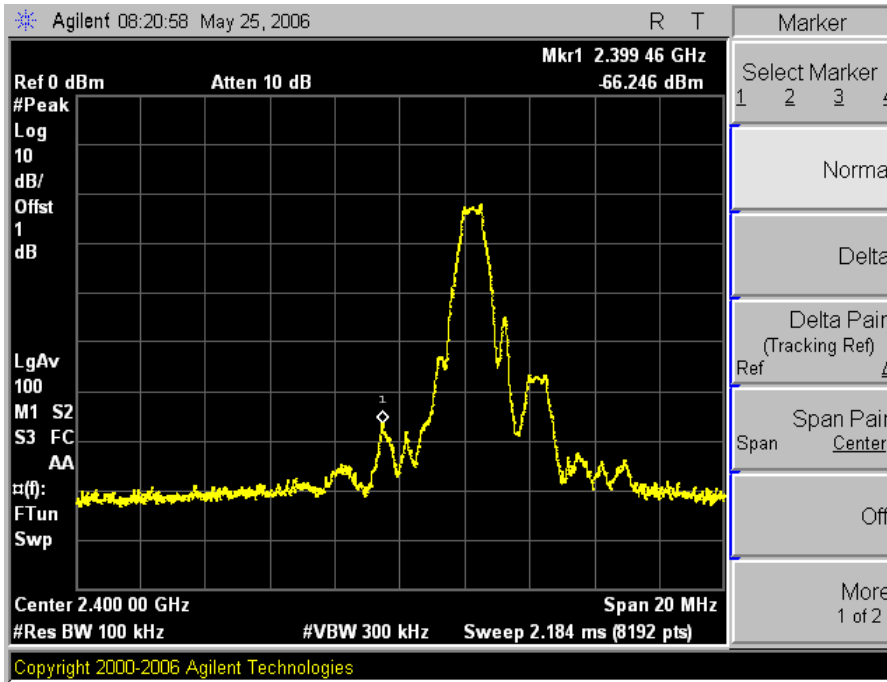

## (ch\_39)

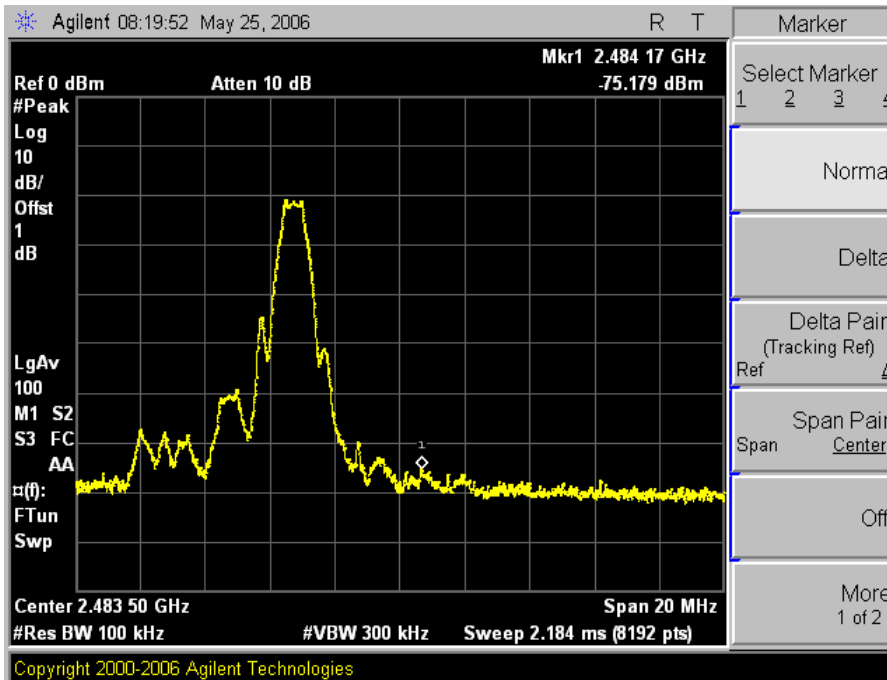




**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +82-31-031-0037 Fax : +82-31-031-0039

(ch\_0)

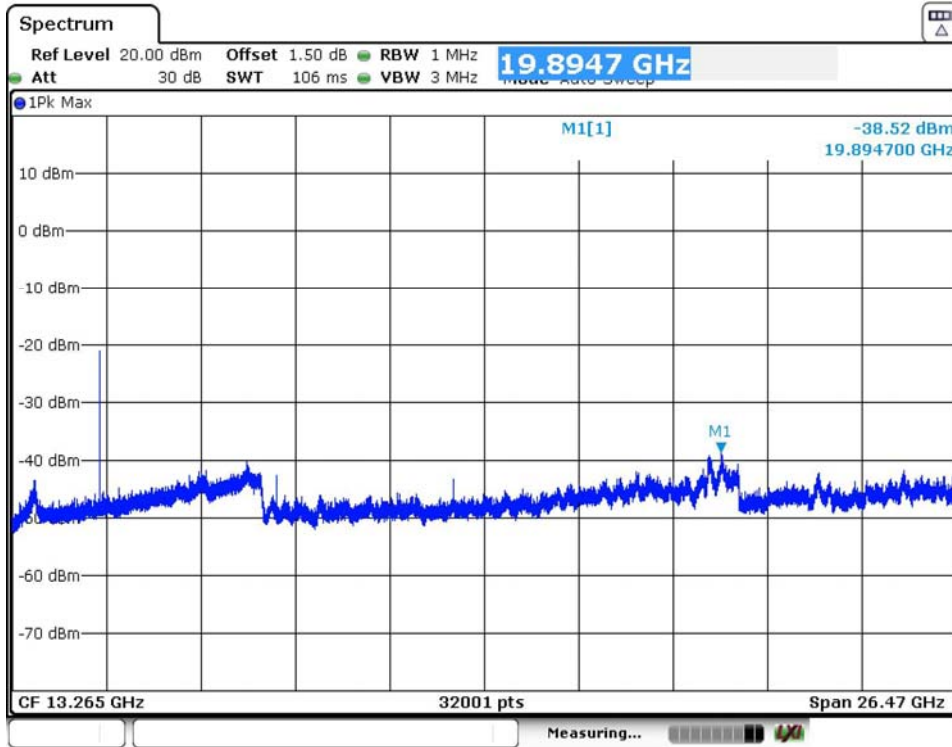




**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +82-31-031-0037 Fax : +82-31-031-0039

(ch\_19)

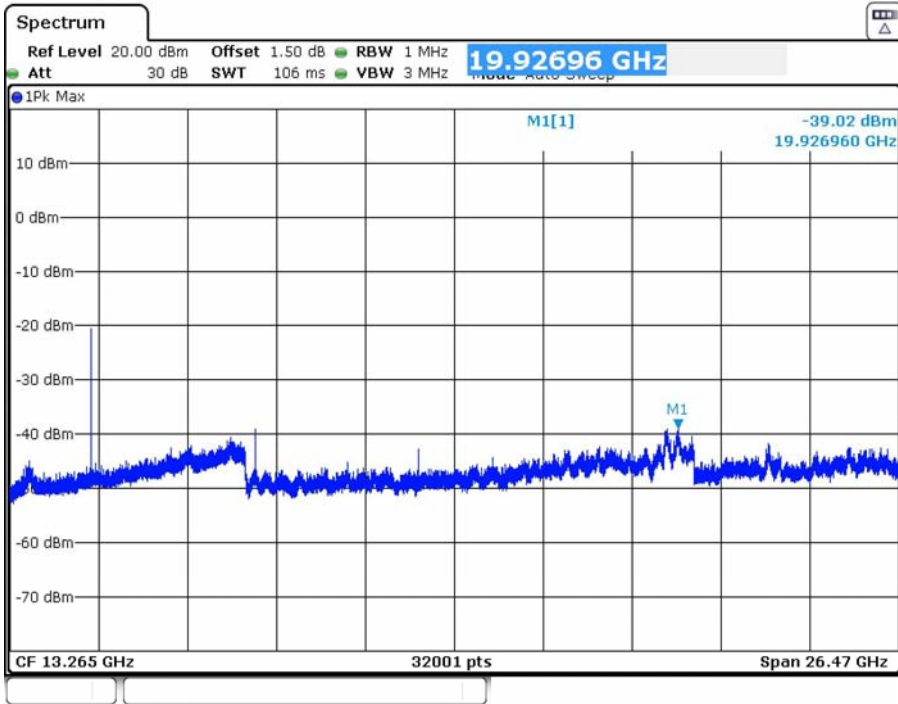






**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-031-0037 Fax : +02-31-031-0039

(ch\_39)

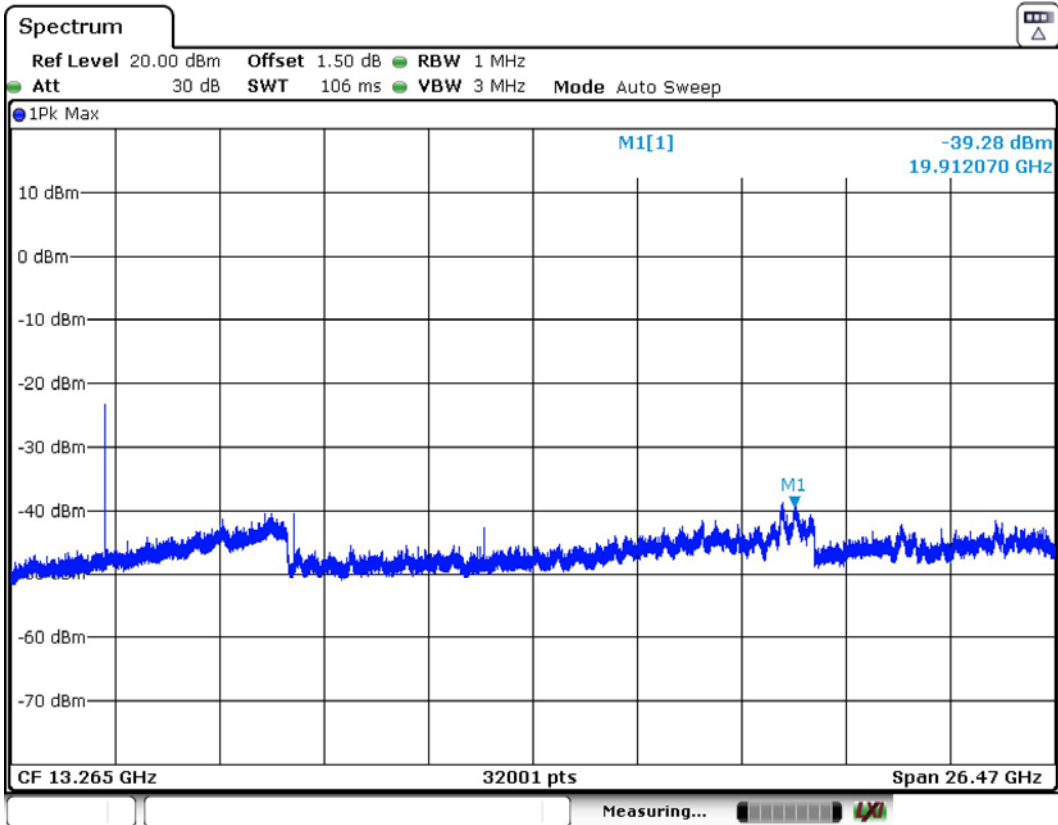

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +82-31-631-8037 Fax : +82-31-631-8039

**10. Measurement of radiated disturbance**

Above 30 MHz Electric Field strength was measured in accordance with FCC PART 15.205, 15.209 . The test setup was made according to ANSI C 63.10 (2009) & KDB 558074 D01 Semi-anechoic chamber, which allows a 3 m distance measurement. The EUT was placed in the center of styrofoam. turntable. The height of this table was 0.8 m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test setup.

**10.1 Measurement equipments**

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST Receiver	ESCI7	ROHDE & SCHWARZ	100916	13-Jan-16
Logbicon Antenna	VULB 9168	SCHWARZBECK	237	4-Mar-16
Turn Table	DT3000-2t	Innco System GmbH	N/A	-
Antenna Mast	MA4000-EP	Innco System GmbH	N/A	-
PREAMPLIFIER	8449B	AGILENT	3008A00595	13-Jan-16
Horn Antenna	BBHA9120D	SCHWARZBECK	352	7-May-16
Test Receiver	ESPI7	ROHDE & SCHWARZ	100185	13-Jan-16
Spectrum Analyzer	R3273	ADVANTEST	110600592	13-Jan-16
Turn Table	DT1500-S	Innco System GmbH	N/A	-
Antenna Mast	MA4000-EP	Innco System GmbH	N/A	-
Pyramidal Horn Antenna	3160-09-01	EST-LINDGREN	102642	14-Nov-15
Antenna Master & Turn table controller	CO2000-P	Innco System GmbH	CO2000/642 /28051111/L	-

**10.2 Environmental Condition**

**Below 1 GHz –Test Place : 10 m Semi-anechoic chamber**

Temperature (°C) : 21.5 °C

Humidity (% R.H.) : 52.0 % R.H.

**Above 1 GHz–Test Place : 3 m Semi-anechoic chamber**

Temperature (°C) : 21.7 °C

Humidity (% R.H.) : 51.8 % R.H.



**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-031-0037 Fax : +02-31-031-0039

### 10.3 Measurement Instrument setting for Radiated Emission

#### 10.3.1 Frequency range below 1 GHz

Detector : Quasi-Peak

#### 10.3.2 Frequency range above 1 GHz

##### Peak Power Measurement Procedure (KDB 558074 section 12.2.4)

- a. RBW : 1 MHz , VBW : 3 MHz
- b. Trace mode = max hold
- c. Detector : Peak
- d. Sweep time = auto

##### Average Power Measurement Procedures (KDB 558074 section 12.2.5.2)

- a. Set analyzer center frequency to the frequency associated with the emission
- b. RBW : 1 MHz , VBW : 3 MHz
- c. Detector : RMS
- d. Sweep time = auto

Note

Band	Duty cycle(%)	Ton (ms)	Ton + Toff (ms)	DCF=10*log(1/Duty) (dB)
Bluetooth	100.0	1.000	1.000	0.00

\* This was not applied of duty cycle factor for average value because of measured with the EUT transmitting continuously more than 98 % duty cycle at its maximum power control level.

duty cycle =  $1.936/1.954=0.99$ , duty factor =  $10*\log(1/0.99)=0.04$





**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-031-0037 Fax : +02-31-031-0039

### 10.4-1 Test Data

Test Date : 12-Nov-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB $\mu$ V)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction(dB)	Result Value		
				Ant Factor (dB)	AMP & Cable (dB)		Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
2375.40	26.69	H	1.2	27.23	5.76	0.00	74.00	59.68	14.32
2379.60	27.00	V	1.1	27.24	5.76	0.00	74.00	60.01	13.99
2390.00	25.37	H	1.2	27.27	5.78	0.00	74.00	58.43	15.57
2390.00	25.91	V	1.0	27.27	5.78	0.00	74.00	58.97	15.03
4804.00	46.75	H	1.3	31.35	-24.20	0.00	74.00	53.90	20.10
4804.00	46.47	V	1.2	31.35	-24.20	0.00	74.00	53.62	20.38
AV(RBW: 1 MHz VBW: 3 MHz)									
2375.40	19.33	H	1.2	27.23	5.76	0.00	54.00	52.32	1.68
2379.60	18.84	V	1.1	27.24	5.76	0.00	54.00	51.85	2.15
2390.00	17.99	H	1.2	27.27	5.78	0.00	54.00	51.05	2.95
2390.00	18.02	V	1.0	27.27	5.78	0.00	54.00	51.08	2.92
4804.00	38.39	H	1.3	31.35	-24.20	0.00	54.00	45.54	8.46
4804.00	38.69	V	1.2	31.35	-24.20	0.00	54.00	45.84	8.16
Remark	<p>H : Horizontal, V : Vertical</p> <p>*The TX signal wasn't detected from 3th harmonics.            *Checked in all 3 axis and the maximum measured data were reported.( Worst data is Z axis of position)            *Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Correction</p>								



**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-031-0037 Fax : +02-31-031-0039

**10.4-2 Test Data**

Test Date : 12-Nov-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB $\mu$ V)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction(dB)	Result Value		
				Ant Factor (dB)	AMP & Cable (dB)		Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
4880.00	46.60	H	1.1	31.51	-23.98	0.00	74.00	54.14	19.86
4880.00	46.82	V	1.3	31.51	-23.98	0.00	74.00	54.36	19.64
AV(RBW: 1 MHz VBW: 3 MHz)									
4880.00	37.93	H	1.1	31.51	-23.98	0.00	54.00	45.47	8.53
4880.00	38.68	V	1.3	31.51	-23.98	0.00	54.00	46.22	7.78
Remark	<p>H : Horizontal, V : Vertical</p> <p>*The TX signal wasn't detected from 3th harmonics.</p> <p>*Checked in all 3 axis and the maximum measured data were reported.( Worst data is Z axis of position)</p> <p>*Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Correction</p>								



**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-631-0037 Fax : +02-31-631-0039

**10.4-3 Test Data**

Test Date : 12-Nov-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dBμV)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction(dB)	Result Value		
				Ant Factor (dB)	AMP & Cable (dB)		Limit (dBμV/m)	Result (dBμV/m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
2483.50	24.89	H	1.1	27.55	5.87	0.00	74.00	58.31	15.69
2483.50	25.34	V	1.2	27.55	5.87	0.00	74.00	58.76	15.24
2488.15	26.36	H	1.0	27.56	5.87	0.00	74.00	59.80	14.20
2491.75	26.61	V	1.3	27.58	5.87	0.00	74.00	60.06	13.94
4960.00	47.57	H	1.1	31.68	-23.87	0.00	74.00	55.39	18.61
4960.00	47.26	V	1.2	31.68	-23.87	0.00	74.00	55.08	18.92
AV(RBW: 1 MHz VBW: 3 MHz)									
2483.50	19.43	H	1.1	27.55	5.87	0.00	54.00	52.85	1.15
2483.50	18.95	V	1.2	27.55	5.87	0.00	54.00	52.37	1.63
2488.15	18.30	H	1.0	27.56	5.87	0.00	54.00	51.74	2.26
2491.75	17.71	V	1.3	27.58	5.87	0.00	54.00	51.16	2.84
4960.00	38.65	H	1.1	31.61	-23.90	0.00	54.00	46.36	7.64
4960.00	38.64	V	1.2	31.68	-23.87	0.00	54.00	46.46	7.54
Remark	<p>H : Horizontal, V : Vertical</p> <p>*The TX signal wasn't detected from 3th harmonics.</p> <p>*Checked in all 3 axis and the maximum measured data were reported.( Worst data is Z axis of position)</p> <p>*Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Correction</p>								





# ESTECH CO., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-631-0037 Fax : +02-31-631-0039

## 10.4-4 Restricted Band Edges

Band Edges(CH Low)

Detector mode:Peak


Polarity:Horizontal

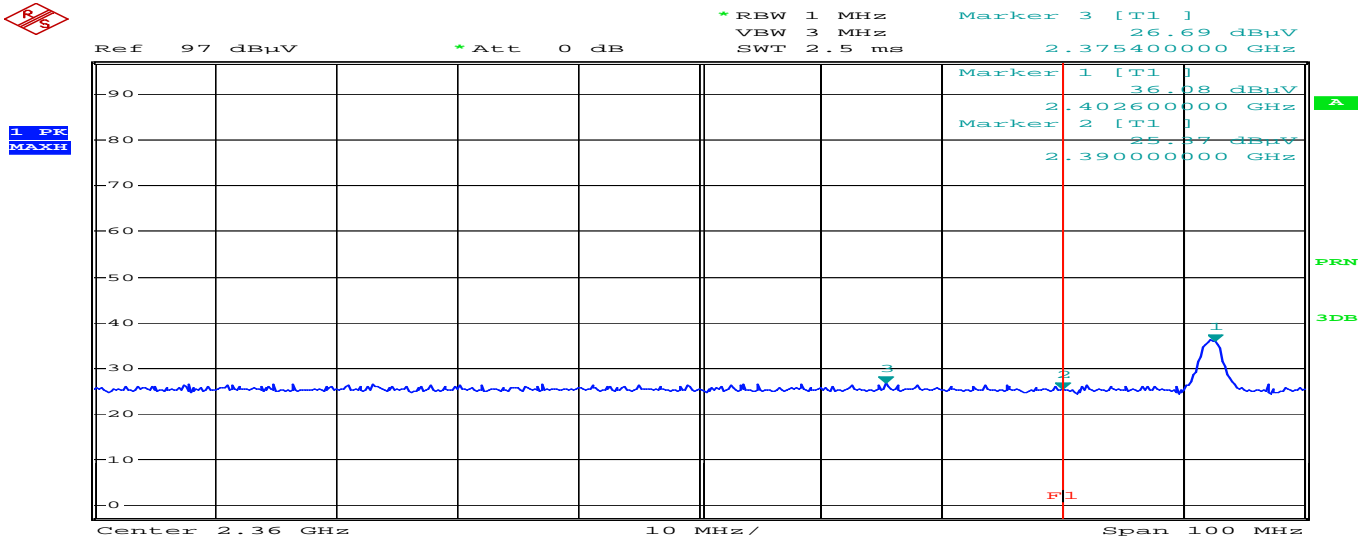

Comment: ESTC-15-02267\_Low Peak\_HOR  
Date: 12.NOV.2015 11:20:29

Detector mode:Average

Polarity:Horizontal

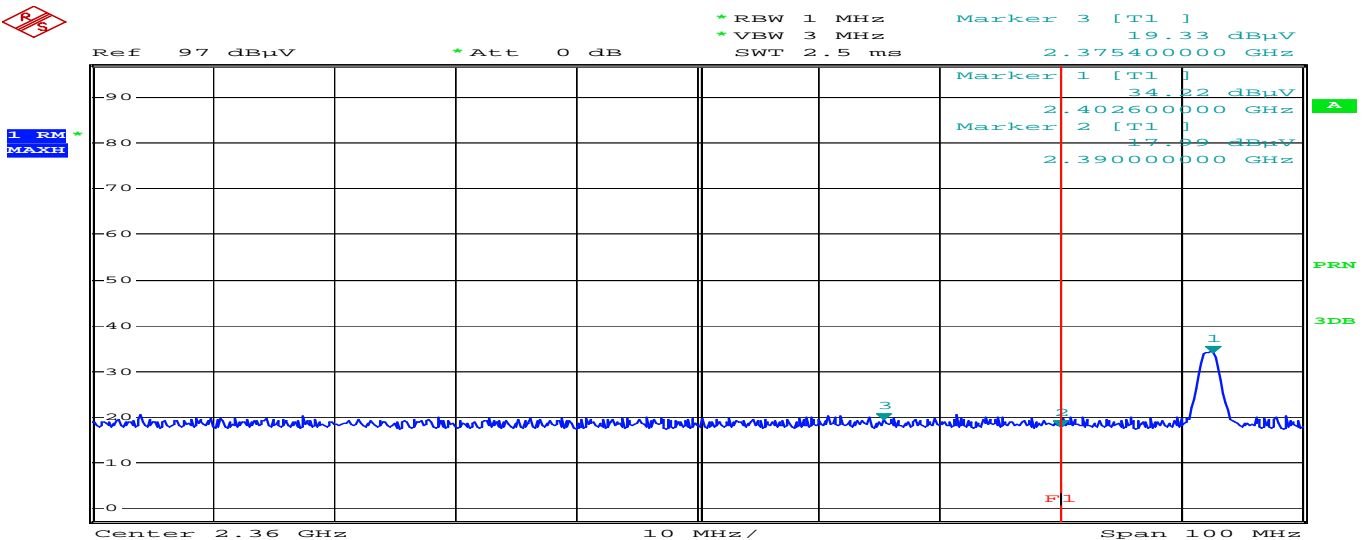

Comment: ESTC-15-02267\_Low AV\_HOR  
Date: 12.NOV.2015 11:30:00




# ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-631-0037 Fax : +02-31-631-0039

Band Edges(CH Low)

Detector mode:Peak

Polarity:Vertical

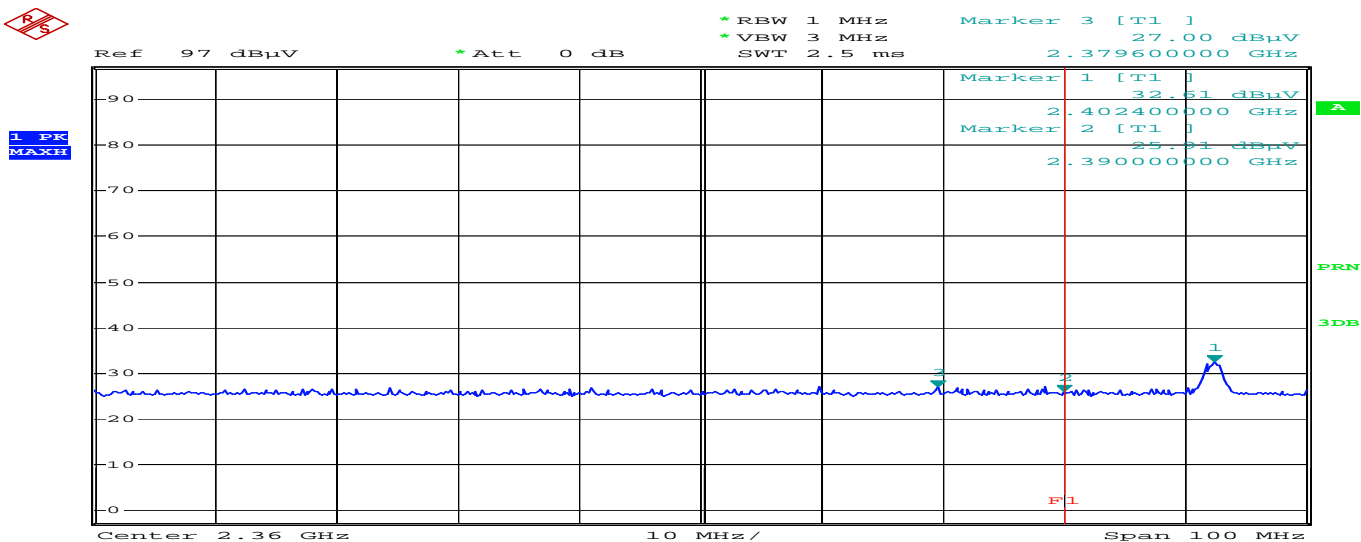


Comment: ESTC-15-02267\_Low Peak\_VER

Date: 12.NOV.2015 11:47:57

Detector mode:Average

Polarity:Vertical

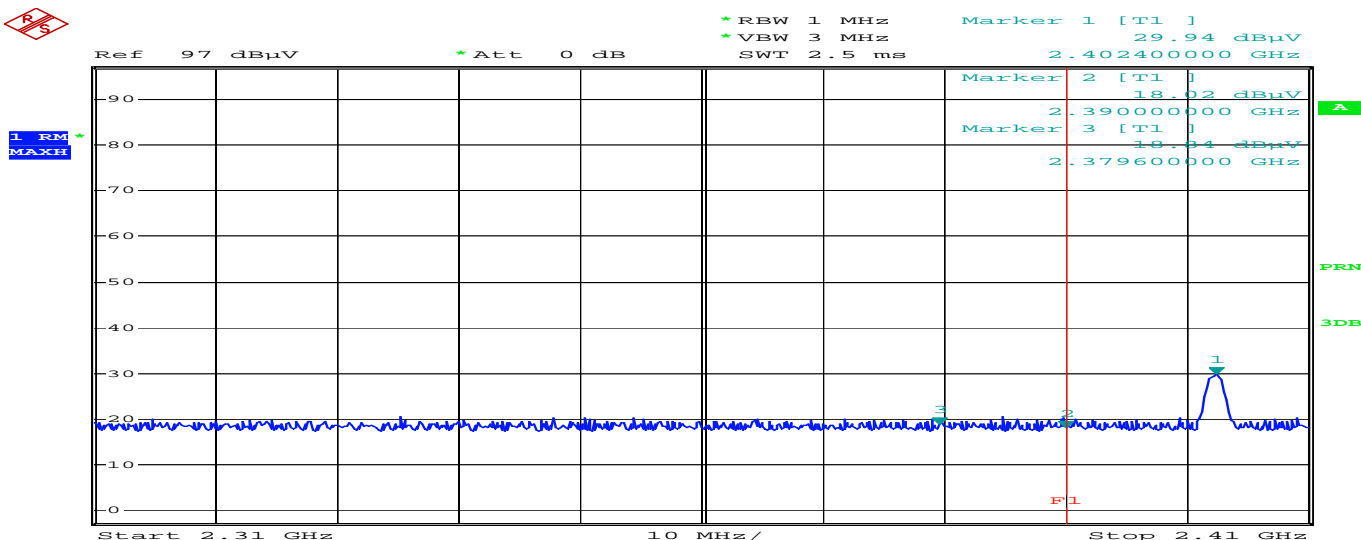

Comment: ESTC-15-02267\_Low AV\_VER

Date: 12.NOV.2015 11:52:06




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-631-0037 Fax : +02-31-631-0039

Band Edges(CH High)

Detector mode:Peak


Polarity:Horizontal

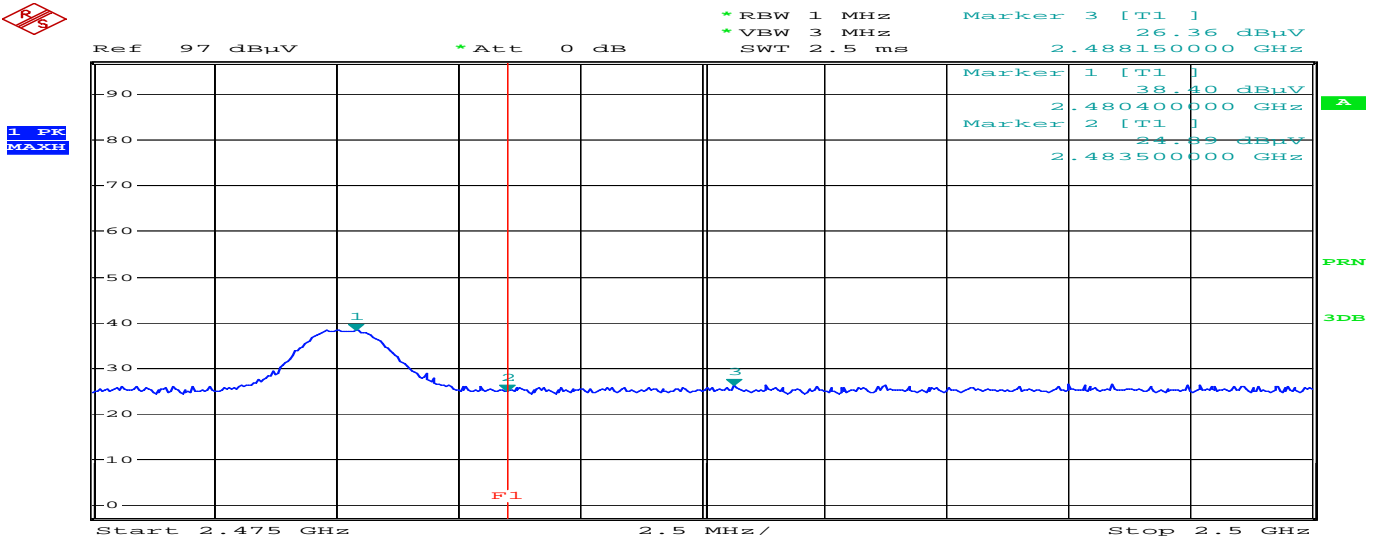

Comment: ESTC-15-02267\_High Peak\_HOR  
Date: 12.NOV.2015 12:09:52

Detector mode:Average

Polarity:Horizontal

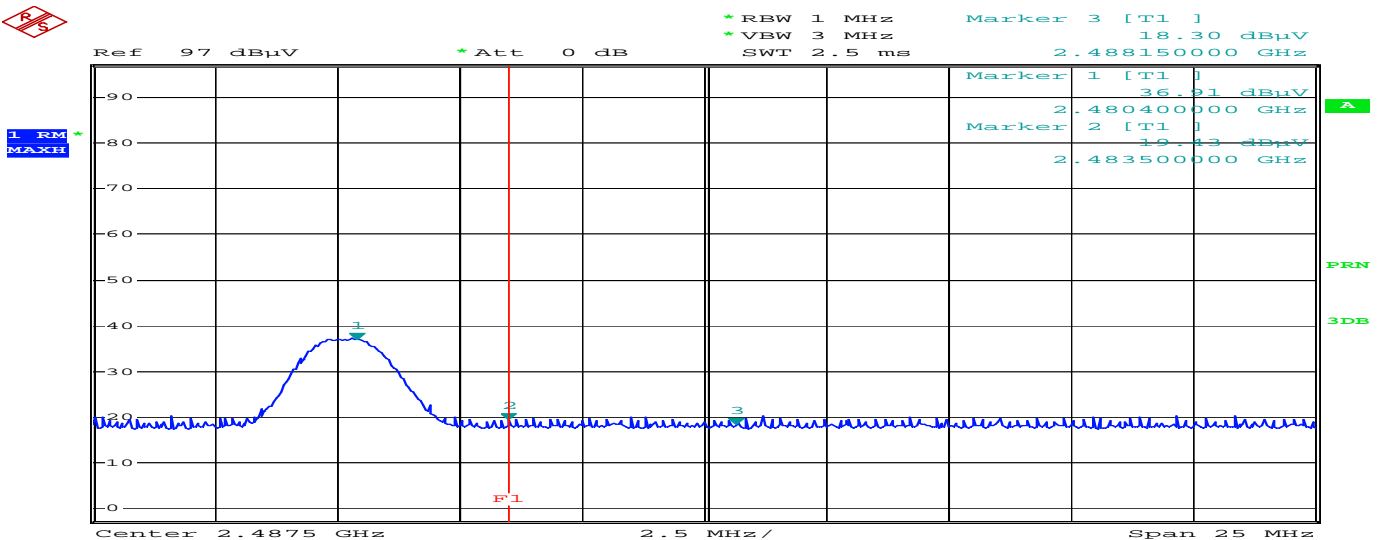

Comment: ESTC-15-02267\_High AV\_HOR  
Date: 12.NOV.2015 12:13:35




# ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-631-0037 Fax : +02-31-631-0039

Band Edges(CH High)

Detector mode:Peak


Polarity:Vertical

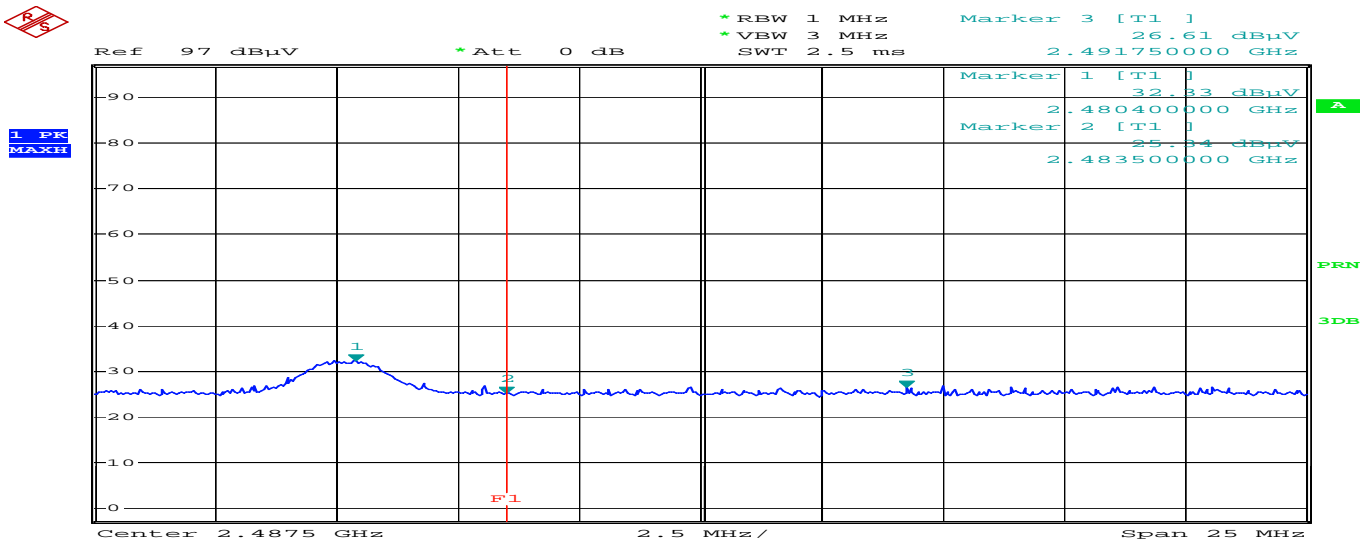

Comment: ESTC-15-02267\_High Peak\_VER  
Date: 12.NOV.2015 12:25:04

Detector mode:Average

Polarity:Vertical

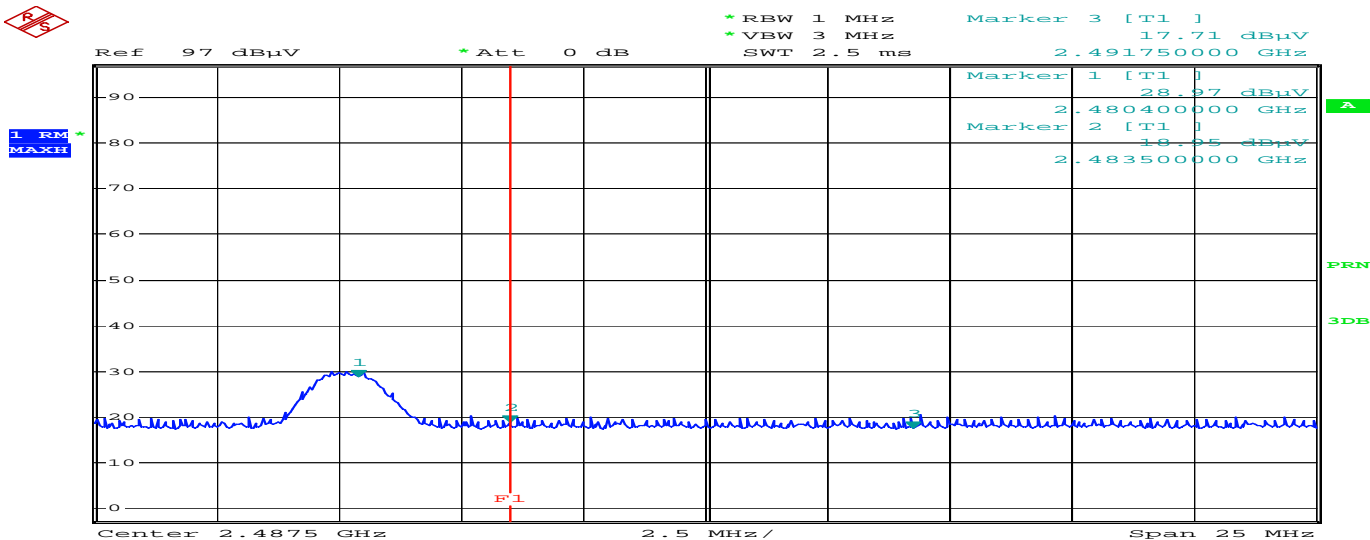

Comment: ESTC-15-02267\_High AV\_VER  
Date: 12.NOV.2015 12:29:14

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-031-0037 Fax : +02-31-031-0039

## 11. Measurement of conducted disturbance (N/A)

The continuous disturbance voltage of AC Mains in the frequency from 0.15 MHz to 30 MHz was measured in accordance to FCC PART 15.207. The test setup was made according to ANSI C 63.10 (2009) in a shielded room. The EUT was placed on a non-conductive table at least 0.8 m above the ground plan. A grounded vertical reference plane was positioned in a distance of 0.4 m from the EUT. The distance from the EUT to other metal surfaces was at least 0.8 m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0 m. The test receiver with Quasi Peak detector complies with CISPR 16.

### 11.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST RECEIVER	ESPI	Rohde & Schwarz	100005	13-Jan-16
LISN	ESH3-Z5	Rohde & Schwarz	836679/025	13-Jan-16
Pulse Limiter	ESH3Z2	Rohde & Schwarz	NONE	13-Jan-16

### 11.2 Environmental Condition

Test Place :

Temperature (°C) :

Humidity (% R.H.) :






**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +82-31-631-8037 Fax : +82-31-631-8039


## 12. Photographs of test setup

### 12.1. Setup for Radiated Test : (30 ~ 1 000) MHz

[ Front ]

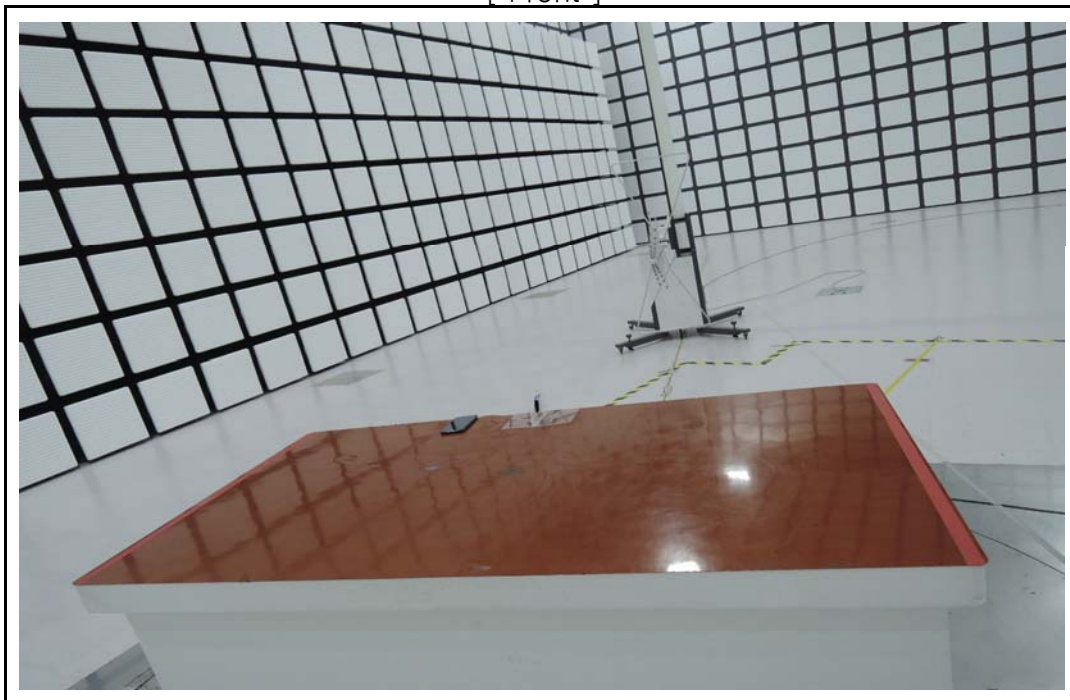

[ Rear ]

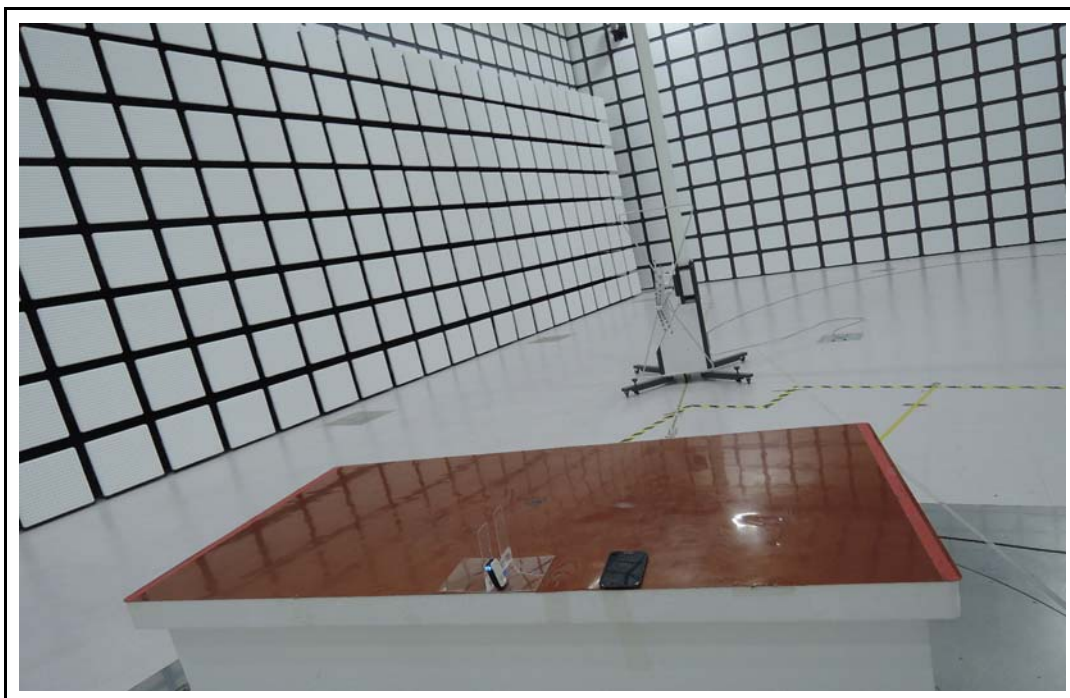




**ESTECH CO., Ltd.**


347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +82-31-631-8037 Fax : +82-31-631-8039

## 12.2. Setup for Radiated Test : Above 1 GHz

[ Front ]

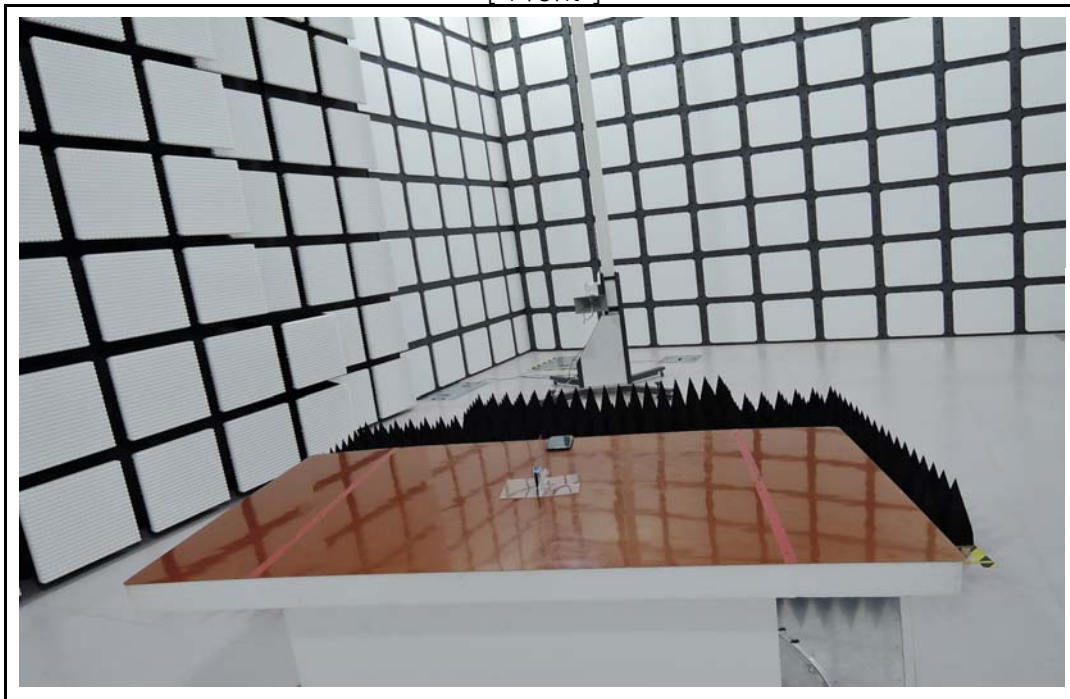

[ Rear ]

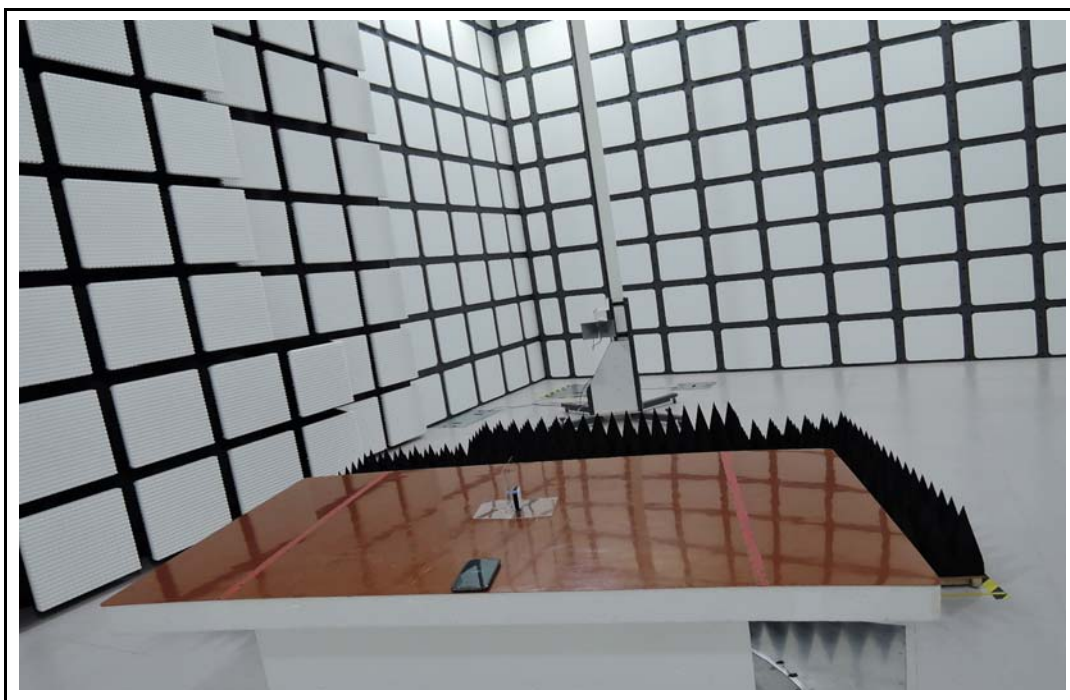






**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-631-0037 Fax : +02-31-631-0039

### 12.3. Setup for Conducted Test : (0.15 ~ 30) MHz

[ Front ]

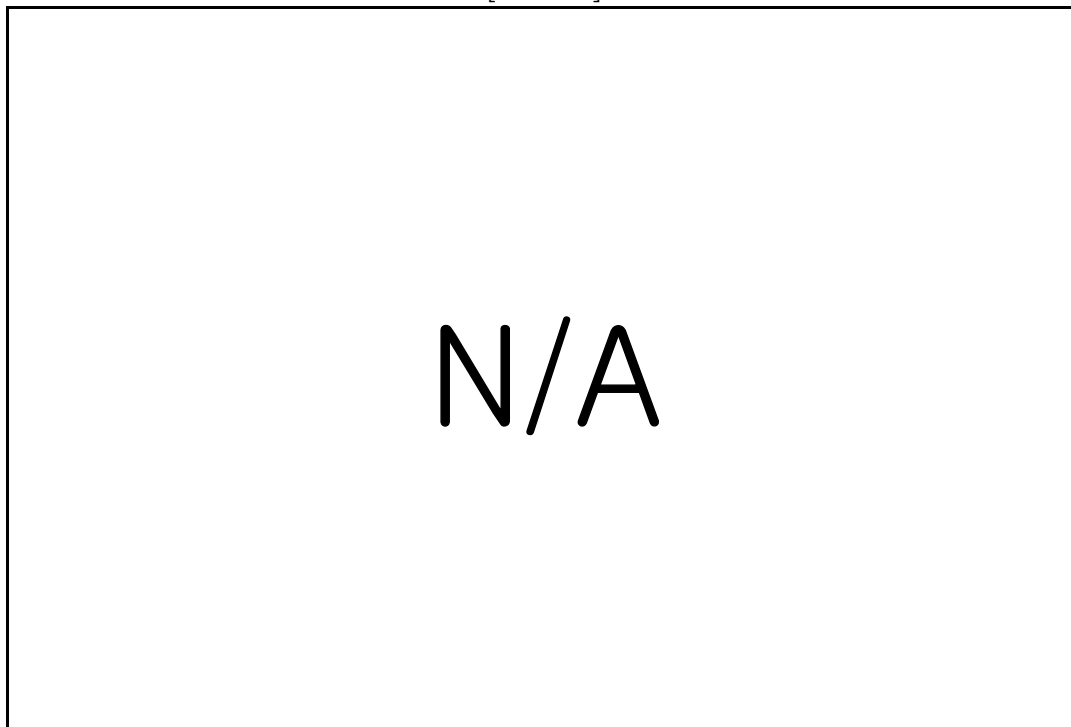

[ Rear ]





**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do 467-811, R. O. Korea  
Tel : +02-31-631-0037 Fax : +02-31-631-0039

### 12.4. Photographs of EUT

[ Front ]



[ Rear ]



Appendix 1 . Special diagram (N/A)

\* HOT LINE

\* NEUTRAL LINE

## Appendix 2. Antenna Requirement

### 1. Antenna Requirement

#### 1.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.204

#### 1.2 Antenna Connected Construction

The antenna types used in this product are Intergrated PCB antenna . The maximum Gain of this antenna is 4.33 dBi.