



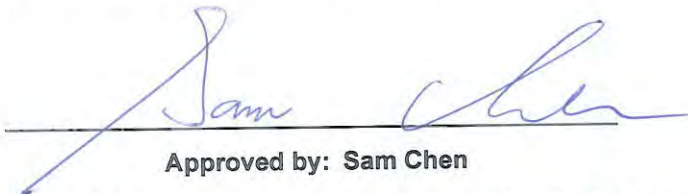
FCC RADIO EXPOSURE TEST REPORT

FCC ID : 2AGMRTRM9992G
Equipment : 802.11bgn WiFi Radio Module
Brand Name : EVEREST™ Network Solutions
Model Name : TRM9992G
Applicant : Tembo Systems, Inc.
2933 Bunker Hill lane, Suite 100, Santa Clara, CA
95054 U.S.A
Manufacturer : Tembo Systems, Inc.
2933 Bunker Hill lane, Suite 100, Santa Clara, CA
95054 U.S.A
Standard : 47 CFR Part 2.1091

The product was received on Apr. 25, 2018, and testing was started from May 15, 2018 and completed on Jun. 12, 2018. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.


Approved by: Sam Chen

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 EUT General Information	5
1.2 Antenna Information	5
1.3 Table for Class II Change.....	6
1.4 Testing Location	6
2 Maximum Permissible Exposure	7
2.1 Limit of Maximum Permissible Exposure	7
2.2 MPE Calculation Method.....	7
2.3 Calculated Result and Limit.....	8
Photographs of EUT v02	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

Reviewed by: Sam Chen

Report Producer: Cindy Peng



1 General Description

1.1 EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)

1.2 Antenna Information

Ant.	Brand Holder	Model Name	Antenna Type	Connector	Gain (dBi)	TX/RX Function	Host System Model
1	Tembo Systems Inc.	PCA-000008-XXX-X	Directional Antenna	I-PEX	Note	2TX/2RX	AP1004NRe series
2	Tembo Systems Inc.	PCA-000006-000-X/ PCB-000015-XXX-X	OMNI Antenna	I-PEX	Note	4TX/4RX	AP1004WR e series
3	Tembo Systems Inc.	PCA-000045-000-X	Directional Antenna	I-PEX	Note	4TX/4RX	AP1004UNe series

Ant.	Tested Antenna Gain (dBi)	Cable loss (dB)	Tested net antenna gain (dBi)	Certified Net Antenna Gain (dBi)	Array Gain (dBi)
1	13.5	1.2	12.3	13	0
3	11.5	1.2	10.3	10.5	0.5

Ant.	Gain (dBi)	Cable loss	True Gain (dBi)	Array Gain (dBi)
2	6.44	0.9	5.54	3

Note 1: For Ant. 1:

The EUT is a limited module which only limited to the host (model: AP1004NRe series).

The EUT was installed to the host (model: AP1004NRe series) to perform all the tests.

For Ant. 2:

The EUT is a limited module which only limited to the host (model: AP1004WR e series).

The EUT was installed to the host (model: AP1004WR e series) to perform all the tests.

For Ant. 3:

The EUT is a limited module which only limited to the host (model: AP1004UNe series).

The EUT was installed to the host (model: AP1004UNe series) to perform all the tests.



1.3 Table for Class II Change

This product is an extension of original one reported under Sporton project number: FA650411-04

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Adding the third set antenna with same antenna type (Directional Antenna), and the gain is lower than the original's gain. (Antenna type: Directional Ant. / Brand holder: Tembo Systems Inc. /Part Number: PCA-000045-000-X). 2. The third set antenna support 4TX/4RX but the original directional antenna support 2TX/2RX. Note: According the modification above, only available for the host system Model Name: AP1004UNe series.	Maximum Permissible Exposure.
3. Adding brand name "EVERESTTM Network Solutions".	It does not affect the test.

1.4 Testing Location

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.



2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2 MPE Calculation Method

The MPE was calculated at 20 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



2.3 Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
2.4G;G1D	10.50	22.59	33.09	0.50	33.59	2.28560	20	0.45471	1.00000
2.4G;D1D	10.50	22.83	33.33	0.50	33.83	2.41546	20	0.48054	1.00000

————THE END————