

# TEST REPORT

**Applicant:** Autel Robotics Co.,Ltd.

**Address of Applicant:** 9th Floor, Bldg.B1, Zhiyuan, 1001 Xueyuan Rd.,Xili, Nanshan, Shenzhen, China

**Manufacturer/Factory:** Autel Robotics Co.,Ltd.

**Address of Manufacturer/Factory:** 9th Floor, Bldg.B1, Zhiyuan, 1001 Xueyuan Rd.,Xili, Nanshan, Shenzhen, China

**Equipment Under Test (EUT)**

Product Name: EF7-2

Model No.: EF7-2

Trade Mark: AUTEL

**FCC ID:** 2AGNTEF72RC2458A

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart E Section 15.407

**Date of sample receipt:** Sep. 17, 2020

**Date of Test:** Sep. 17 – Dec. 11, 2020

**Date of report issued:** Dec. 11, 2020

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



**Robinson Luo**


**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	Dec. 11, 2020	Original

Prepared By:



Date:

Dec. 11, 2020

Project Engineer

Check By:



Reviewer

Date:

Dec. 11, 2020

## 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
4.1 MEASUREMENT UNCERTAINTY .....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	7
5.3 DESCRIPTION OF SUPPORT UNITS .....	7
5.4 DEVIATION FROM STANDARDS.....	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS .....	7
5.6 TEST FACILITY.....	8
5.7 TEST LOCATION .....	8
6 TEST INSTRUMENTS LIST .....	9
7 TEST RESULTS AND MEASUREMENT DATA.....	11
7.1 ANTENNA REQUIREMENT.....	11
7.2 CONDUCTED EMISSIONS .....	12
7.3 CONDUCTED PEAK OUTPUT POWER.....	15
7.4 CHANNEL BANDWIDTH.....	16
7.5 POWER SPECTRAL DENSITY .....	19
7.6 BAND EDGE.....	22
7.6.1 Radiated Emission Method.....	22
7.7 SPURIOUS EMISSION.....	26
7.7.1 Radiated Emission Method.....	26
7.8 FREQUENCY STABILITY .....	33
8 TEST SETUP PHOTO.....	35
9 EUT CONSTRUCTIONAL DETAILS .....	35

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.407(a)(3)	Pass
Channel Bandwidth	15.407(e)	Pass
Power Spectral Density	15.407(a)(3)	Pass
Band Edge	15.407(b)(4)	Pass
Spurious Emission	15.205/15.209/15.407(b)(4)	Pass
Frequency Stability	15.407(g)	Pass

*Remarks:*

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013.

### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	EF7-2	
Model No.:	EF7-2	
Serial No.:	N/A	
Hardware Version:	V202012	
Software Version:	V202012	
Test sample(s) ID:	GTSL202012000141-1	
Sample(s) Status:	Engineer sample	
Operation Frequency:	1.25MHz Bandwidth	5731.00MHz~5801.00MHz
	20MHz Bandwidth	5740.00MHz~5820.00MHz
Support Bandwidth:	1.25MHz Bandwidth	
	20MHz Bandwidth	
Channel Numbers:	1.25MHz Bandwidth	71
	20MHz Bandwidth	91
Channel Separation:	1MHz	
Modulation Type:	1.25MHz Bandwidth	QPSK
	20MHz Bandwidth	16QAM
Antenna Type:	Integral antenna	
Antenna working mode:	1T2R	
Antenna Gain:	2.6dBi	
Power supply:	DC 3.7V Lithium ion rechargeable battery	
Adapter Information:	AC/DC Adapter Model No.:XA3_1320 Input: AC 100-240V, 50/60Hz, 1.5A Output: DC13.2V, 5A/ DC5.0V,3.0A/ DC9.0V, 2.0A/ DC12.0V, 1.5A	

Operation Frequency each of channel			
1.25MHz Bandwidth			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>1</b>	<b>5731</b>	<b>36</b>	<b>5766</b>
2	5732	.....	.....
3	5733	.....	.....
.....	.....	.....	.....
.....	.....	70	5800
35	5765	<b>71</b>	<b>5801</b>

Operation Frequency each of channel			
20MHz Bandwidth			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>1</b>	<b>5740</b>	<b>41</b>	<b>5780</b>
2	5741	.....	.....
3	5742	.....	.....
.....	.....	.....	.....
.....	.....	80	5819
40	5779	<b>81</b>	<b>5820</b>

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Bandwidth	Frequency(MHz)		
	Lowest channel	Middle channel	Highest channel
1.25MHz	5731.00	5740.00	5740.00
20MHz	5801.00	5830.00	5820.00

## 5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

## 5.3 Description of Support Units

None.
-------

## 5.4 Deviation from Standards

None.
-------

## 5.5 Abnormalities from Standard Conditions

None.
-------

## 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

• **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A

• **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

## 5.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone,  
Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960



## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

## 7 Test results and Measurement Data

### 7.1 Antenna requirement

<b>Standard requirement:</b>	FCC Part15 C Section 15.203
<i>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i>	
<b>E.U.T Antenna:</b>	
<i>The antennas are integral antenna, the best case gain of the antenna is 2.6dBi, reference to the appendix II for details</i>	


## 7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Test Frequency Range:	150KHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	<p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test procedure:	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li> </ol>														
Test Instruments:	Refer to section 6.0 for details														
Test mode:	Refer to section 5.2 for details														
Test results:	Pass														

### Measurement data:


Pre-scan all test modes, found worst case at 5801MHz of 1.25MHz Bandwidth, and so only show the test result 5801MHz of 1.25MHz Bandwidth.

Line:

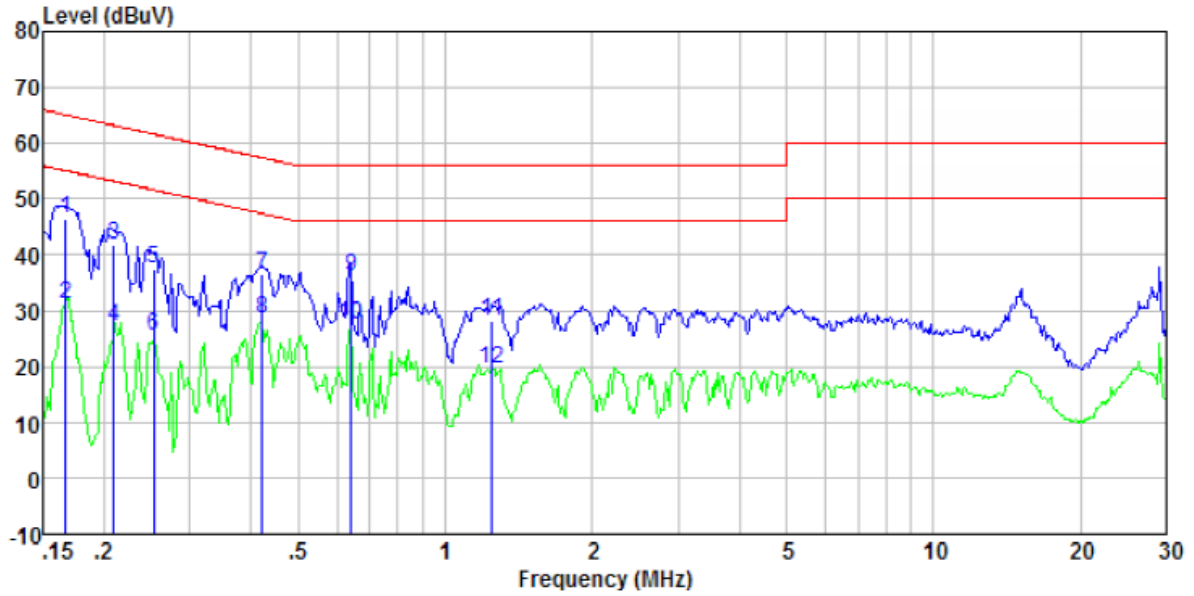

Freq MHz	Reading level dBuV	lISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.167	46.08	0.40	0.08	46.56	65.12	-18.56	QP
0.167	30.54	0.40	0.08	31.02	55.12	-24.10	Average
0.209	41.23	0.40	0.11	41.74	63.23	-21.49	QP
0.209	26.53	0.40	0.11	27.04	53.23	-26.19	Average
0.253	37.00	0.40	0.10	37.50	61.64	-24.14	QP
0.253	24.90	0.40	0.10	25.40	51.64	-26.24	Average
0.421	36.08	0.34	0.11	36.53	57.42	-20.89	QP
0.421	27.99	0.34	0.11	28.44	47.42	-18.98	Average
0.641	35.83	0.27	0.12	36.22	56.00	-19.78	QP
0.641	27.21	0.27	0.12	27.60	46.00	-18.40	Average
1.249	27.69	0.20	0.16	28.05	56.00	-27.95	QP
1.249	19.06	0.20	0.16	19.42	46.00	-26.58	Average

**Neutral:**

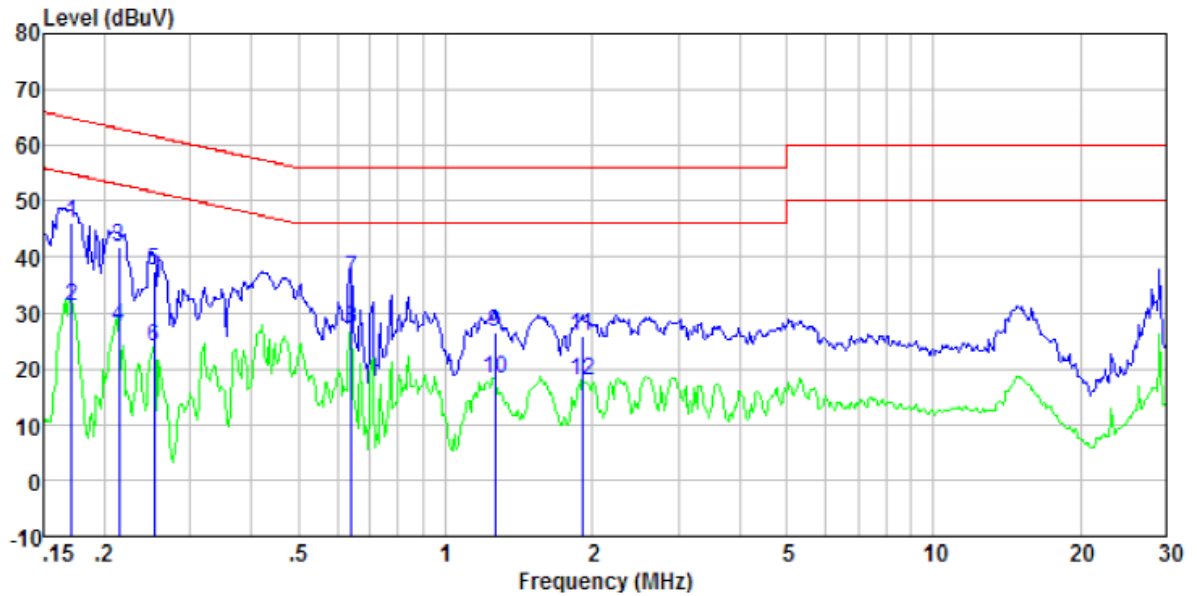


Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.171	45.71	0.40	0.09	46.20	64.90	-18.70	QP
0.171	30.57	0.40	0.09	31.06	54.90	-23.84	Average
0.214	41.34	0.40	0.11	41.85	63.05	-21.20	QP
0.214	26.88	0.40	0.11	27.39	53.05	-25.66	Average
0.253	37.07	0.40	0.10	37.57	61.64	-24.07	QP
0.253	23.43	0.40	0.10	23.93	51.64	-27.71	Average
0.641	35.86	0.27	0.12	36.25	56.00	-19.75	QP
0.641	26.89	0.27	0.12	27.28	46.00	-18.72	Average
1.262	26.32	0.20	0.16	26.68	56.00	-29.32	QP
1.262	17.99	0.20	0.16	18.35	46.00	-27.65	Average
1.908	25.59	0.20	0.17	25.96	56.00	-30.04	QP
1.908	17.56	0.20	0.17	17.93	46.00	-28.07	Average

*Notes:*

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss


### 7.3 Conducted Peak Output Power

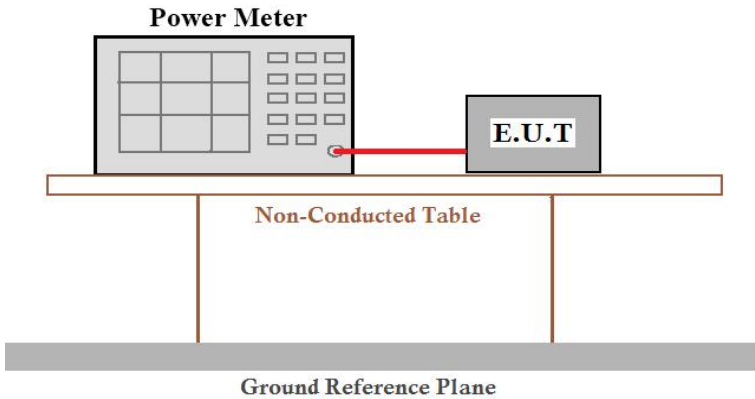Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

#### Measurement Data

Type	Test Channel	Peak Output Power (dBm)	Limit(dBm)	Result
1.25MHz Bandwidth	Lowest	20.897	30.00	Pass
	Middle	21.119		
	Highest	21.123		
20MHz Bandwidth	Lowest	20.71	30.00	Pass
	Middle	20.18		
	Highest	20.26		

## 7.4 Channel Bandwidth

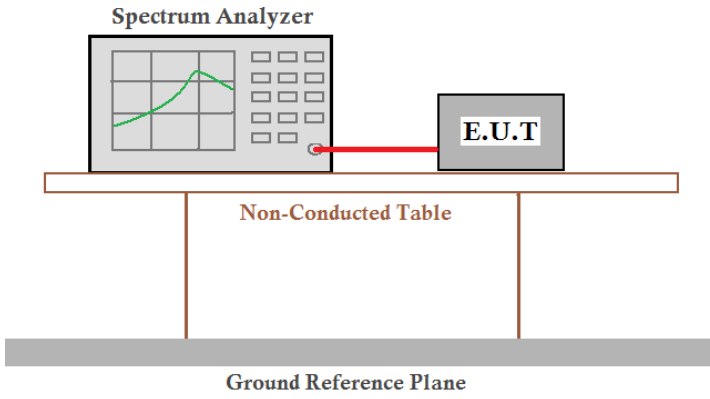Test Requirement:	FCC Part15 E Section 15.407(e)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	>500KHz
Test setup:	 <p>The diagram shows a Spectrum Analyzer on the left and an E.U.T. on the right, connected by a red cable. They are positioned on a table labeled 'Non-Conducted Table'. Below the table is a thick grey bar labeled 'Ground Reference Plane'.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement Data

Type	Test CH	Channel Bandwidth (MHz)	Limit(KHz)	Result
1.25MHz Bandwidth	Lowest	1.172	>500	Pass
	Middle	1.181		
	Highest	1.169		
20MHz Bandwidth	Lowest	17.79	>500	Pass
	Middle	17.83		
	Highest	17.62		




Test plot as follows:


1.25MHz Bandwidth

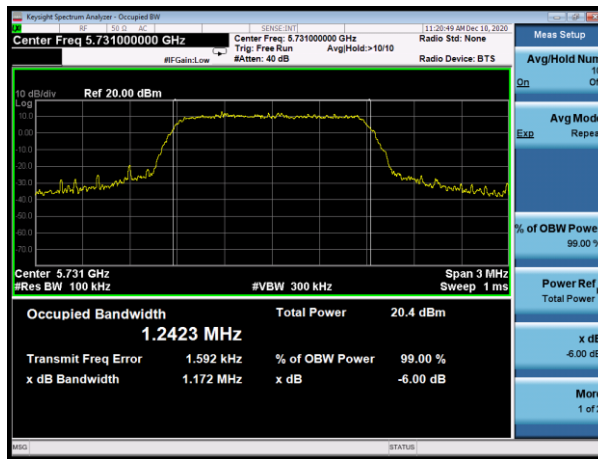

Lowest channel

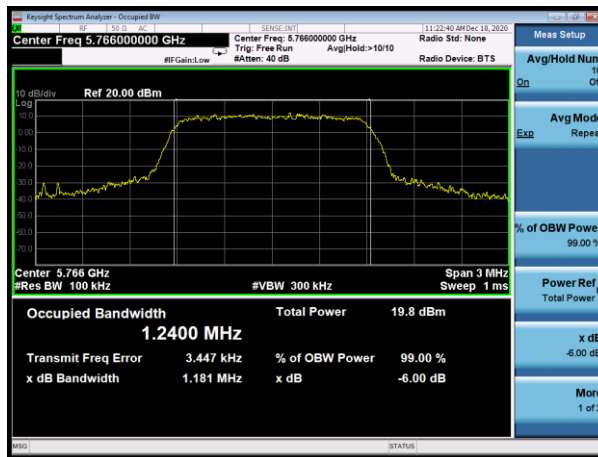


Middle channel

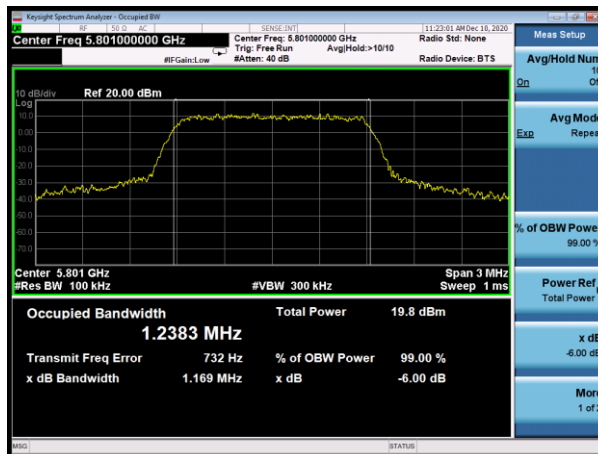


Highest channel


20MHz Bandwidth

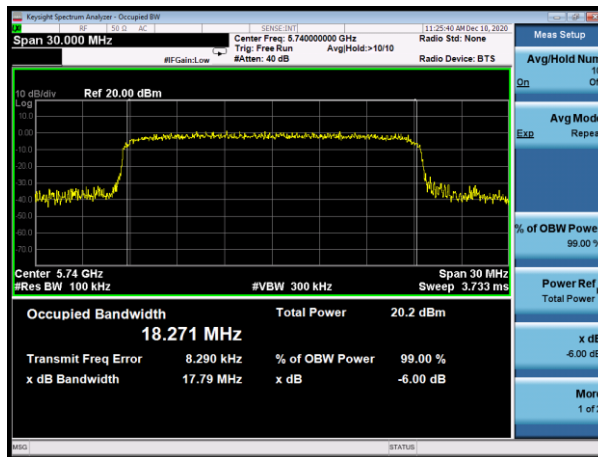

Lowest channel

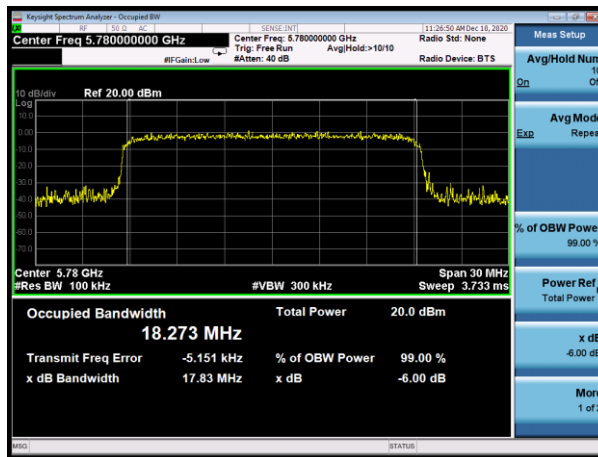


Middle channel

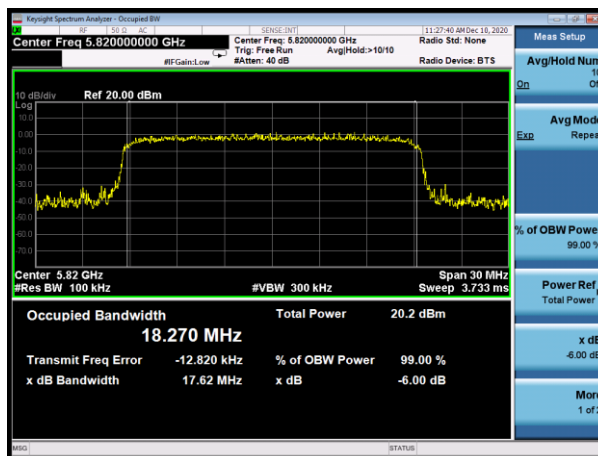

Highest channel

## 7.5 Power Spectral Density

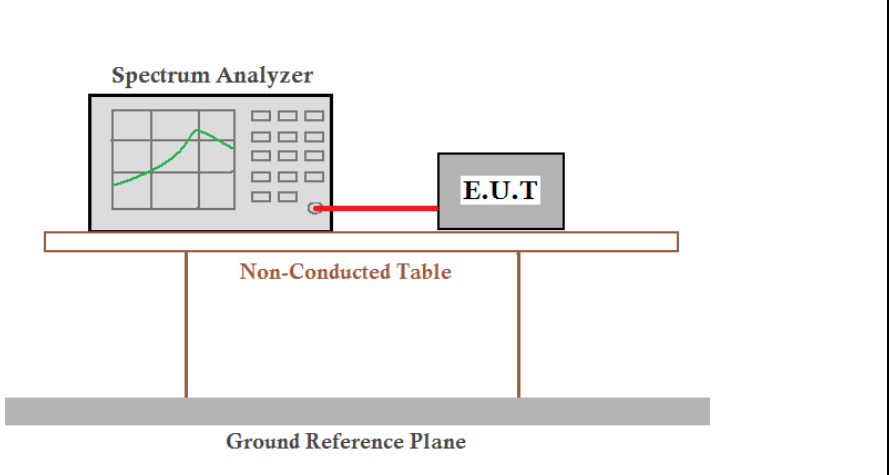
Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	30dBm/500kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data


Type	Test CH	Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)	Result
1.25MHz Bandwidth	Lowest	19.091	30.00	Pass
	Middle	19.974		
	Highest	18.984		
20MHz Bandwidth	Lowest	11.715	30.00	Pass
	Middle	10.536		
	Highest	10.382		

Test plot as follows:


1.25MHz Bandwidth

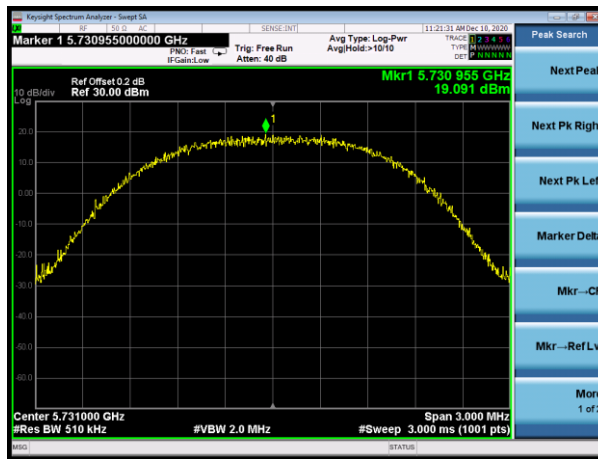

Lowest channel

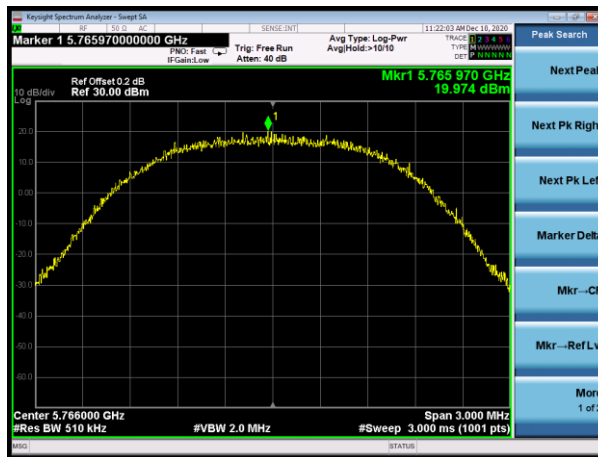


Middle channel

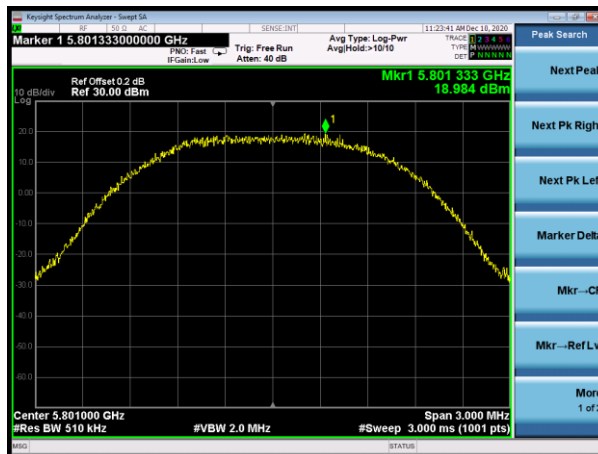


Highest channel


20MHz Bandwidth

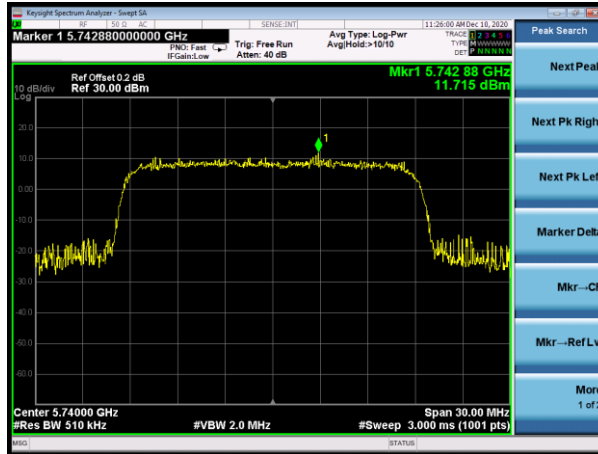

Lowest channel

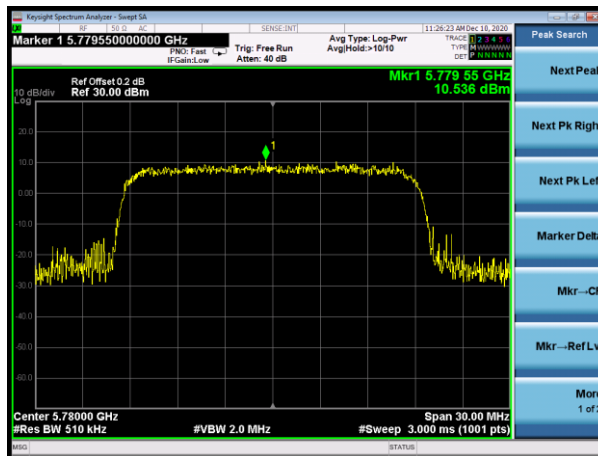


Middle channel

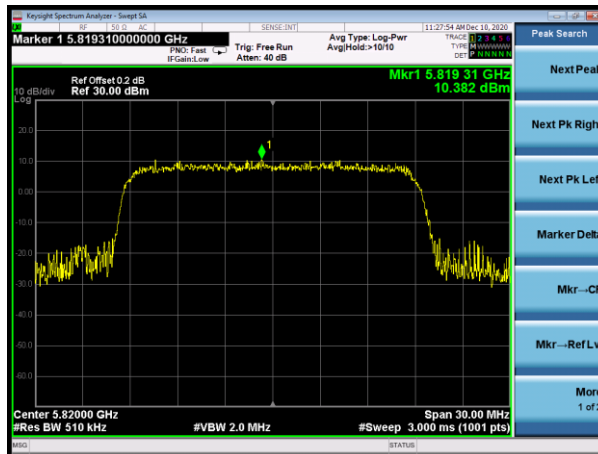

Highest channel

## 7.6 Band edge

### 7.6.1 Radiated Emission Method

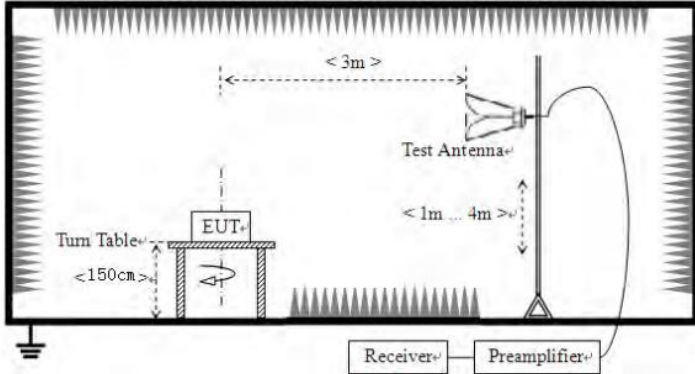Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	9kHz to 40GHz, only worse case is reported				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak RMS	1MHz 1MHz	3MHz 3MHz	Peak RMS
Limit:	All emissions shall be limited to a level of $-27$ dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.				
Test setup:					
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>7. The radiation measurements are performed in X, Y, Z axis positioning.</li> </ol>				

	And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

*Remarks:*

1. Only the worst case Main Antenna test data..
2. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
5. According to KDB 789033 D02v02r01 section G) 1) d),for measurements above 1000 MHz @3m distance, the limit of field strength is computed as follows:  
 $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2;$   
 $E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$   
 $E[\text{dBuV/m}] = 10 + 95.2 = 105.2\text{dBuV/m}.$   
 $E[\text{dBuV/m}] = 15.6 + 95.2 = 110.8\text{dBuV/m}.$   
 $E[\text{dBuV/m}] = 27 + 95.2 = 122.2\text{dBuV/m}$

**Measurement data:**

**1.25MHz Bandwidth:**

Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	37.01	32.36	9.72	23.83	55.26	68.20	-12.94	Horizontal
5700.00	37.46	32.50	9.79	23.84	55.91	105.20	-49.29	Horizontal
5720.00	37.58	32.53	9.81	23.85	56.07	110.80	-54.73	Horizontal
5725.00	39.99	32.53	9.83	23.86	58.49	122.20	-63.71	Horizontal
5850.00	40.63	32.70	9.99	23.87	59.45	122.20	-62.75	Horizontal
5855.00	35.37	32.72	9.99	23.88	54.20	110.80	-56.60	Horizontal
5875.00	37.31	32.74	10.04	23.89	56.20	105.20	-49.00	Horizontal
5925.00	37.00	32.80	10.11	23.90	56.01	68.20	-12.19	Horizontal
5650.00	36.85	32.36	9.72	23.83	55.10	68.20	-13.10	Vertical
5700.00	35.73	32.50	9.79	23.84	54.18	105.20	-51.02	Vertical
5720.00	36.73	32.53	9.81	23.85	55.22	110.80	-55.58	Vertical
5725.00	39.01	32.53	9.83	23.86	57.51	122.20	-64.69	Vertical
5850.00	39.60	32.70	9.99	23.87	58.42	122.20	-63.78	Vertical
5855.00	35.57	32.72	9.99	23.88	54.40	110.80	-56.40	Vertical
5875.00	36.33	32.74	10.04	23.89	55.22	105.20	-49.98	Vertical
5925.00	36.98	32.80	10.11	23.90	55.99	68.20	-12.21	Vertical





**20MHz Bandwidth:**

Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	36.52	32.36	9.72	23.83	54.77	68.20	-13.43	Horizontal
5700.00	37.35	32.50	9.79	23.84	55.80	105.20	-49.40	Horizontal
5720.00	37.46	32.53	9.81	23.85	55.95	110.80	-54.85	Horizontal
5725.00	44.96	32.53	9.83	23.86	63.46	122.20	-58.74	Horizontal
5850.00	41.60	32.70	9.99	23.87	60.42	122.20	-61.78	Horizontal
5855.00	36.97	32.72	9.99	23.88	55.80	110.80	-55.00	Horizontal
5875.00	36.43	32.74	10.04	23.89	55.32	105.20	-49.88	Horizontal
5925.00	36.31	32.80	10.11	23.90	55.32	68.20	-12.88	Horizontal
5650.00	37.11	32.36	9.72	23.83	55.36	68.20	-12.84	Vertical
5700.00	37.09	32.50	9.79	23.84	55.54	105.20	-49.66	Vertical
5720.00	35.99	32.53	9.81	23.85	54.48	110.80	-56.32	Vertical
5725.00	44.22	32.53	9.83	23.86	62.72	122.20	-59.48	Vertical
5850.00	41.42	32.70	9.99	23.87	60.24	122.20	-61.96	Vertical
5855.00	36.40	32.72	9.99	23.88	55.23	110.80	-55.57	Vertical
5875.00	36.69	32.74	10.04	23.89	55.58	105.20	-49.62	Vertical
5925.00	36.31	32.80	10.11	23.90	55.32	68.20	-12.88	Vertical

## 7.7 Spurious Emission

### 7.7.1 Radiated Emission Method

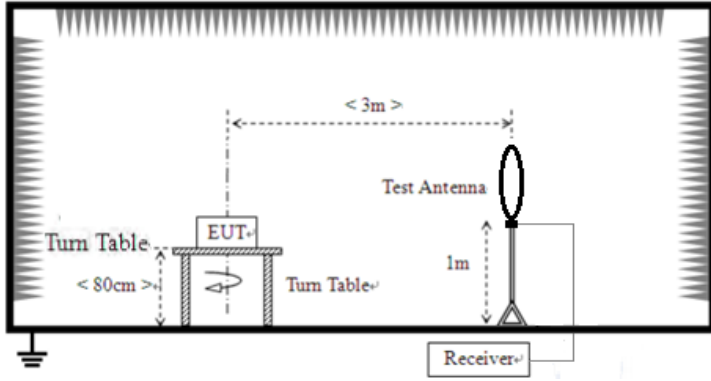Test Requirement:	FCC Part15 C Section 15.209, Part 15E Section 15.407(b)(4)				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 40GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9kHz-150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
AV		1MHz	3MHz	Average Value	
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
		Frequency	Limit (dBm/MHz)	Remark	
	Above 1GHz	-27.0	Peak Value		
Test setup:	For radiated emissions from 9kHz to 30MHz				
	 <p>The diagram illustrates the test setup for radiated emissions from 9kHz to 30MHz. It shows an Equipment Under Test (EUT) placed on a turn table. A test antenna is positioned 3m away from the EUT. The antenna is 1m high. The turn table for the EUT is 80cm high. A receiver is connected to the antenna. The setup is shown within a shielded enclosure.</p>				
	For radiated emissions from 30MHz to 1GHz				

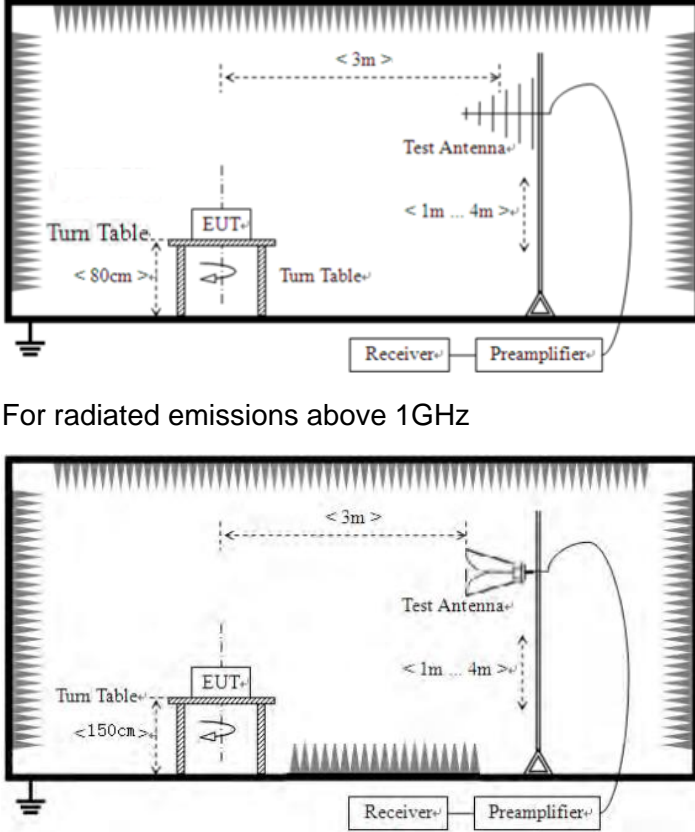	 <p>For radiated emissions above 1GHz</p>
<p>Test Procedure:</p>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>7. The radiation measurements are performed in X, Y, Z axis positioning.</li> </ol>

	And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

*Remarks:*

- 1. Only the worst case Main Antenna test data.*
- 2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*

**Measurement Data:**


**9 kHz ~ 30 MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

## Below 1GHz


Pre-scan all test modes, found worst case at 5801MHz of 1.25MHz Bandwidth, and so only show the test result 5801MHz of 1.25MHz Bandwidth.

### Horizontal:

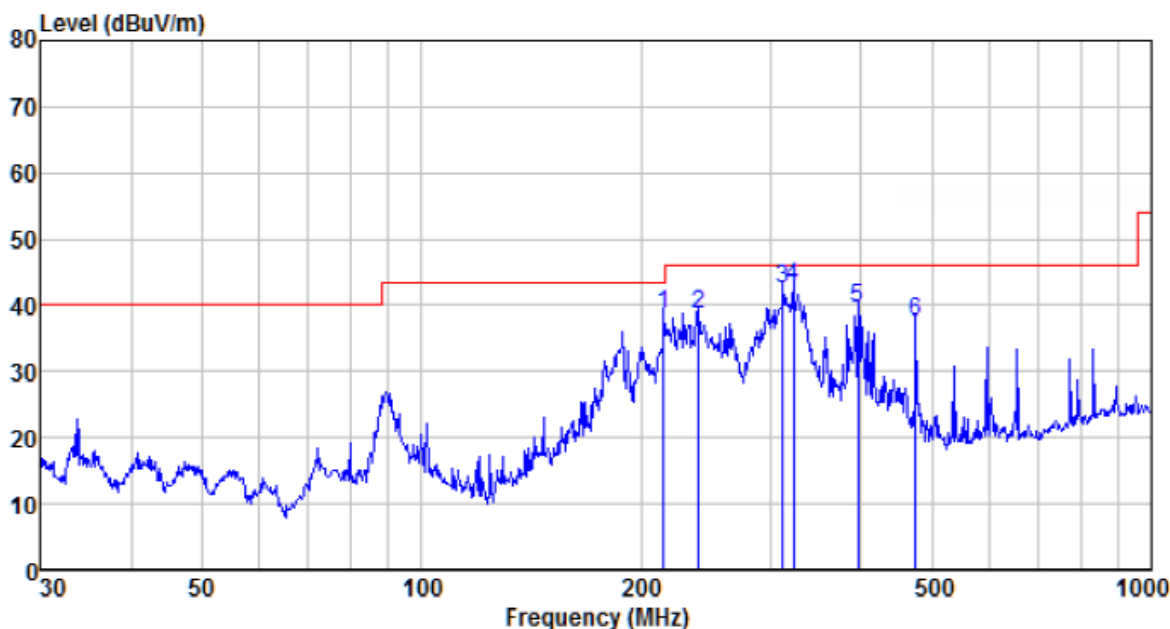

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
214.514	63.05	10.95	1.93	37.35	38.58	43.50	-4.92	QP
239.987	62.19	11.85	2.07	37.37	38.74	46.00	-7.26	QP
312.179	63.66	13.85	2.42	37.43	42.50	46.00	-3.50	QP
323.320	63.59	14.04	2.49	37.45	42.67	46.00	-3.33	QP
396.242	58.92	15.25	2.83	37.52	39.48	46.00	-6.52	QP
475.499	55.07	16.85	3.21	37.51	37.62	46.00	-8.38	QP

**Vertical:**

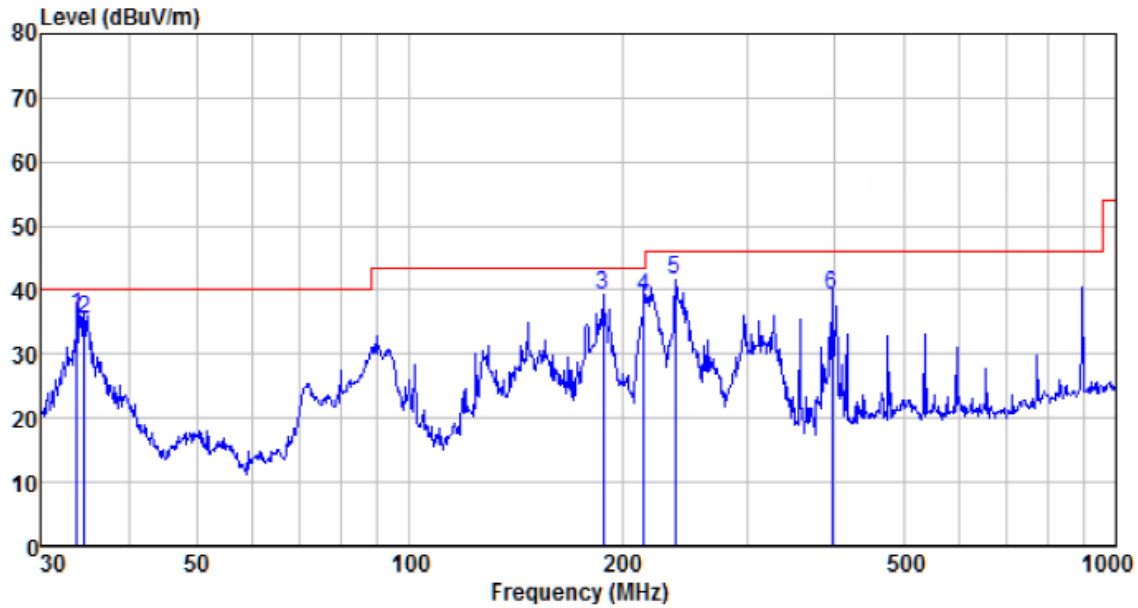

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
33.799	59.46	11.28	0.59	35.28	36.05	40.00	-3.95	QP
34.639	58.92	11.29	0.61	35.33	35.49	40.00	-4.51	QP
187.753	65.25	9.65	1.78	37.27	39.41	43.50	-4.09	QP
214.514	63.35	10.95	1.93	37.35	38.88	43.50	-4.62	QP
237.476	65.13	11.75	2.06	37.37	41.57	46.00	-4.43	QP
396.242	58.80	15.25	2.83	37.52	39.36	46.00	-6.64	QP

**Above 1GHz:**

**1.25MHz Bandwidth:**

Test channel:		Lowest					
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11462.00	22.63	21.64	44.27	74.00	-29.73	PK
V	17193.00	20.32	21.8	42.12	74.00	-31.88	PK
H	11462.00	20.47	21.83	42.30	74.00	-31.70	PK
H	17193.00	19.25	21.67	40.92	74.00	-33.08	PK

Test channel:		Middle					
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11532.00	20.46	21.64	42.10	74.00	-31.90	PK
V	17298.00	19.11	21.8	40.91	74.00	-33.09	PK
H	11532.00	16.85	21.83	38.68	74.00	-35.32	PK
H	17298.00	17.49	21.67	39.16	74.00	-34.84	PK

Test channel:		Highest					
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11602.00	20.63	21.64	42.27	74.00	-31.73	PK
V	17403.00	18.20	21.8	40.00	74.00	-34.00	PK
H	11602.00	18.51	21.83	40.34	74.00	-33.66	PK
H	17403.00	16.55	21.67	38.22	74.00	-35.78	PK

**20MHz Bandwidth:**

Test channel:		Lowest					
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11480.00	22.97	21.64	44.61	74.00	-29.39	PK
V	17220.00	20.60	21.8	42.40	74.00	-31.60	PK
H	11480.00	20.87	21.83	42.70	74.00	-31.30	PK
H	17220.00	19.60	21.67	41.27	74.00	-32.73	PK

Test channel:		Middle					
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11560.00	20.80	21.64	42.44	74.00	-31.56	PK
V	17340.00	19.39	21.8	41.19	74.00	-32.81	PK
H	11560.00	17.25	21.83	39.08	74.00	-34.92	PK
H	17340.00	17.84	21.67	39.51	74.00	-34.49	PK


Test channel:		Highest					
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11640.00	20.97	21.64	42.61	74.00	-31.39	PK
V	17460.00	18.48	21.8	40.28	74.00	-33.72	PK
H	11640.00	18.91	21.83	40.74	74.00	-33.26	PK
H	17460.00	16.90	21.67	38.57	74.00	-35.43	PK

**Notes:**

1. Measure Level = Reading Level + Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.



## 7.8 Frequency stability

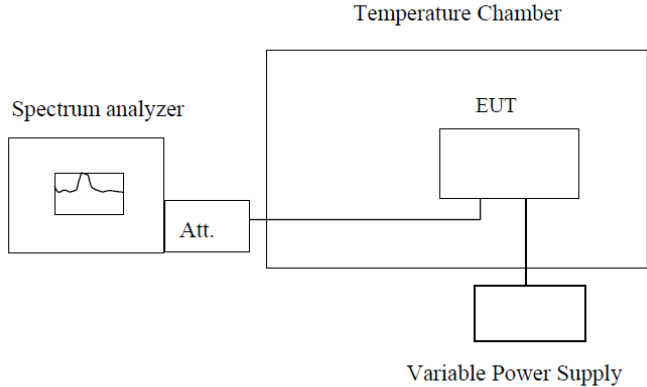Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	 <p style="text-align: center;"><b>Note :</b> Measurement setup for testing on Antenna connector</p>
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement data:

### Voltage VS Frequency stability

Test Frequency: 5766MHz				
Temperature (°C)	Voltage (V)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result
25	DC 11.55	1000.00	0.173430	PASS
25	DC 10.40	1000.00	0.173430	PASS
25	DC 12.71	1000.00	0.173430	PASS

Test Frequency: 5780MHz				
Temperature (°C)	Voltage (V)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result
25	DC 11.55	1000.00	0.173010	PASS
25	DC 10.40	2000.00	0.346021	PASS
25	DC 12.71	2000.00	0.346021	PASS

### Temperature VS Frequency stability

Test Frequency: 5766MHz				
Voltage (V)	Temperature (°C)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result
DC 11.55	-20	2000.00	0.346861	PASS
DC 11.55	-10	2000.00	0.346861	PASS
DC 11.55	0	2000.00	0.346861	PASS
DC 11.55	10	1000.00	0.173430	PASS
DC 11.55	20	1000.00	0.173430	PASS
DC 11.55	30	1000.00	0.173430	PASS
DC 11.55	40	1000.00	0.173430	PASS
DC 11.55	50	2000.00	0.346861	PASS

Test Frequency: 5780MHz				
Voltage (V)	Temperature (°C)	Frequency Deviation (Hz)	Frequency Deviation (ppm)	Result
DC 11.55	-20	3000.00	0.519031	PASS
DC 11.55	-10	2000.00	0.346021	PASS
DC 11.55	0	2000.00	0.346021	PASS
DC 11.55	10	2000.00	0.346021	PASS
DC 11.55	20	1000.00	0.173010	PASS
DC 11.55	30	1000.00	0.173010	PASS
DC 11.55	40	1000.00	0.173010	PASS
DC 11.55	50	2000.00	0.346021	PASS

## **8 Test Setup Photo**

Reference to the **appendix I** for details.

## **9 EUT Constructional Details**

Reference to the **appendix II** for details.

-----END-----