

FCC Part 15B

Measurement and Test Report

For

JXJ Technologies Corporation
1 Meca Way, Norcross, GA 30024

FCC ID: 2AGOEJXJ-HM041

Test Rule(s):	<u>FCC Part 15 Subpart B</u>
Product Description:	<u>Wireless Data Terminal</u>
Tested Model:	<u>JXJ-HM041</u>
Report No.:	<u>STR15118191I-5</u>
Tested Date:	<u>2015-11-12 to 2015-11-23</u>
Issued Date:	<u>2015-11-24</u>
Tested By:	<u>Silin Chen / EMC Manager</u> <i>Silin chen</i>
Reviewed By:	<u>Suan Su / Engineer</u> <i>Susan Su</i>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> <i>Jandyso</i>
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND OPERATION MODE.....	5
1.6 TEST EQUIPMENT LIST AND DETAILS.....	5
2. SUMMARY OF TEST RESULTS	6
3. CONDUCTED EMISSIONS	7
3.1 MEASUREMENT UNCERTAINTY.....	7
3.2 TEST PROCEDURE.....	7
3.3 BASIC TEST SETUP BLOCK DIAGRAM.....	7
3.4 ENVIRONMENTAL CONDITIONS.....	8
3.5 SUMMARY OF TEST RESULTS/PLOTS.....	8
3.6 CONDUCTED EMISSIONS TEST DATA.....	8
4. RADIATED EMISSIONS	13
4.1 MEASUREMENT UNCERTAINTY.....	13
4.2 TEST PROCEDURE.....	13
4.3 TEST RECEIVER SETUP.....	14
4.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	14
4.5 ENVIRONMENTAL CONDITIONS.....	14
4.6 SUMMARY OF TEST RESULTS/PLOTS.....	14

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: JXJ Technologies Corporation
Address of applicant: 1 Meca Way, Norcross, GA 30024

Manufacturer: Shenzhen Baode rui kang Technology Co., Ltd.
Address of manufacturer: Room.705-70, Building B of Huachuangda, Xin'an Street, Baoan Avenue, Bao'an District, ShenZhen, China

General Description of EUT	
Product Name:	Wireless Data Terminal
Trade Name:	jWatch
Model No.:	JXJ-HM041
Adding Model(s):	JXJ-HM031, JXJ-HM032, JXJ-HM042, JXJ-HM051,
Hardware Version:	in907_MB_V0.1
Software Version:	JWOTCH_HSPA_1.0.10
IMEI:	864765020133479
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model JXJ-HM041, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	Battery: DC 3.7V
Rated Current:	/
Rated Power:	/
Lowest Internal Frequency:	32.768KHz
Highest Internal Frequency:	512MHz
Classification of ITE:	Class B

1.2 Test Standards

The following report is prepared on behalf of the JXJ Technologies Corporation in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Charging + Playing	/
TM2	Charging + Downloading	/
TM3	Charging + Camera	/

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	1.0	Shielded	Without Core

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E10	LR-63C8R

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.6 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2015-06-17	2016-06-16
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2015-06-17	2016-06-16
Amplifier	Agilent	8447F	3113A06717	2015-06-17	2016-06-16
Amplifier	C&D	PAP-1G18	2002	2015-06-17	2016-06-16
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2015-06-17	2016-06-16
Horn Antenna	ETS	3117	00086197	2015-06-17	2016-06-16
Horn Antenna	ETS	3116B	00088203	2015-06-17	2016-06-16
Loop Antenna	Schwarz beck	FMZB 1516	9773	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2015-06-17	2016-06-16
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2015-06-17	2016-06-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2015-06-17	2016-06-16

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant

N/A: not applicable

3. Conducted Emissions


3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

3.2 Test Procedure

Test is conducting under the description of ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.3 Basic Test Setup Block Diagram

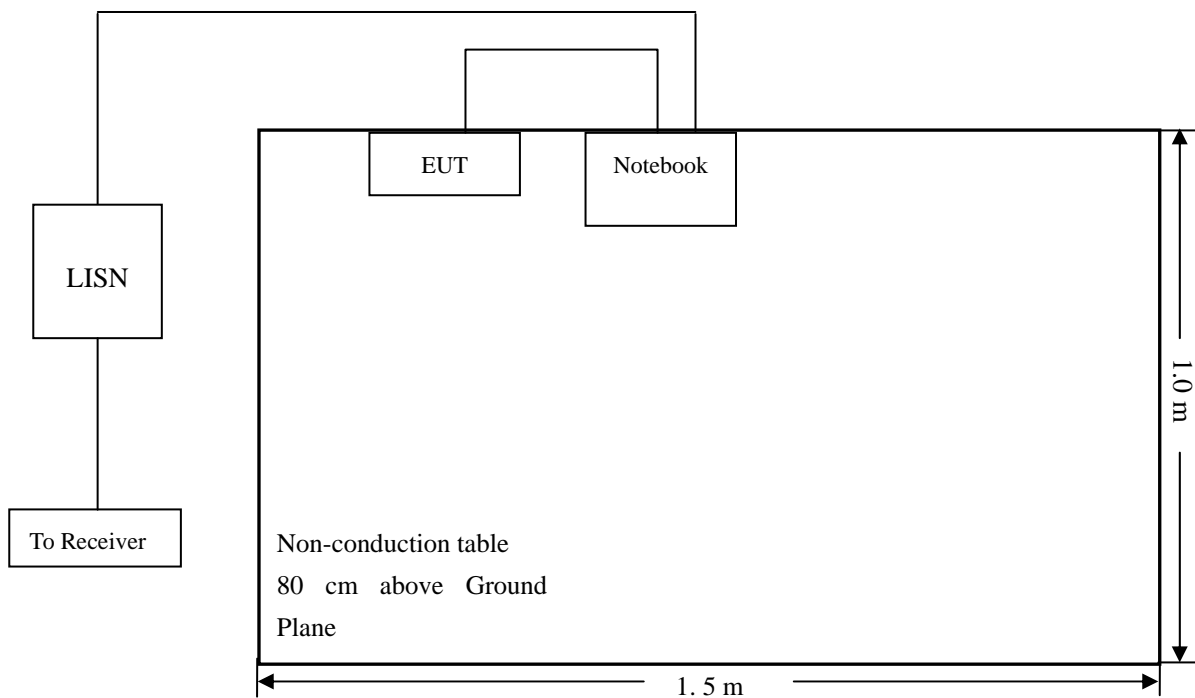

3.4 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

3.5 Summary of Test Results/Plots

According to the data in section 3.6, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:


-12.04 dB at 0.1860 MHz in the Line mode, Peak detector, TM2, 0.15-30MHz

3.6 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: *Wireless Data Terminal*
 Tested Model: *JXJ-HM041*
 Operating Condition: *TM1*
 Comment: *AC 120V/60Hz; USB 5V*

Test Specification: *Neutral*

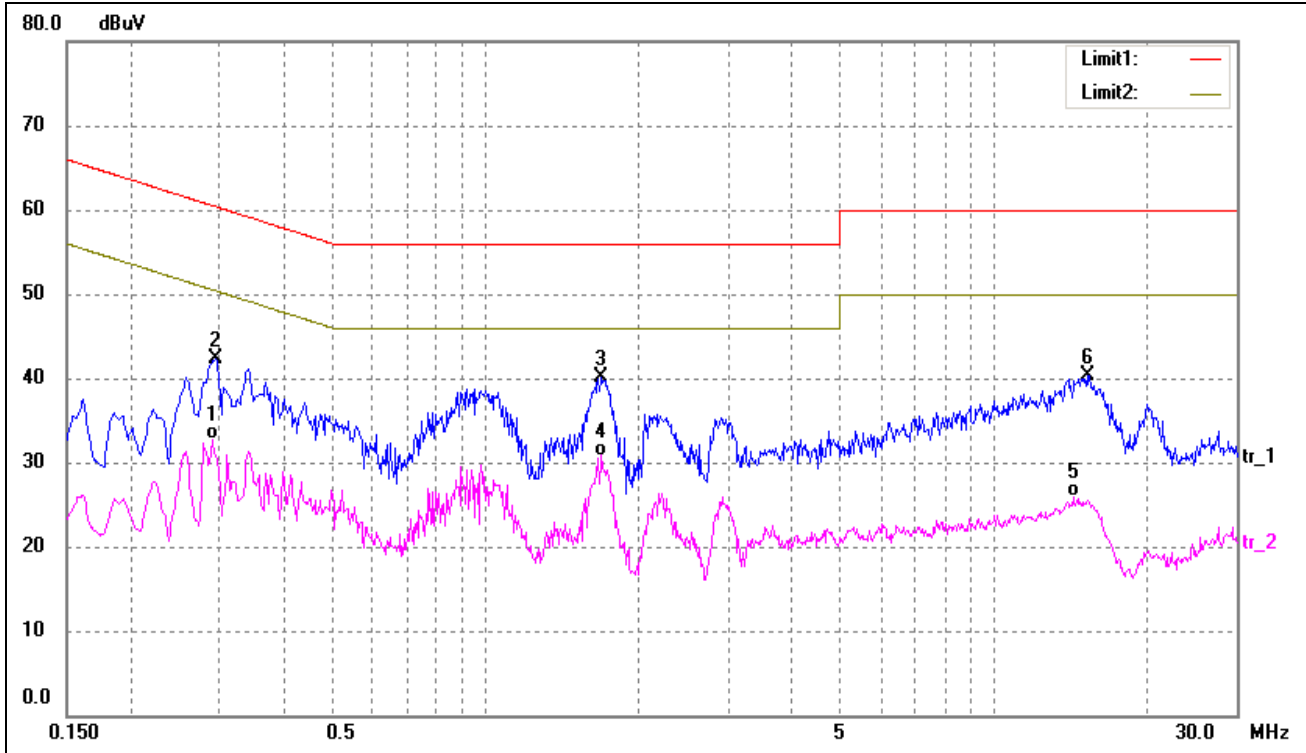

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2900	23.11	9.50	32.61	50.52	-17.91	AVG
2	0.2940	32.79	9.50	42.29	60.41	-18.12	QP
3	1.6940	30.13	10.00	40.13	56.00	-15.87	QP
4	1.6940	20.80	10.00	30.80	46.00	-15.20	AVG
5	14.2940	15.00	10.86	25.86	50.00	-24.14	AVG
6	15.2660	29.24	11.05	40.29	60.00	-19.71	QP

Test Specification: Line

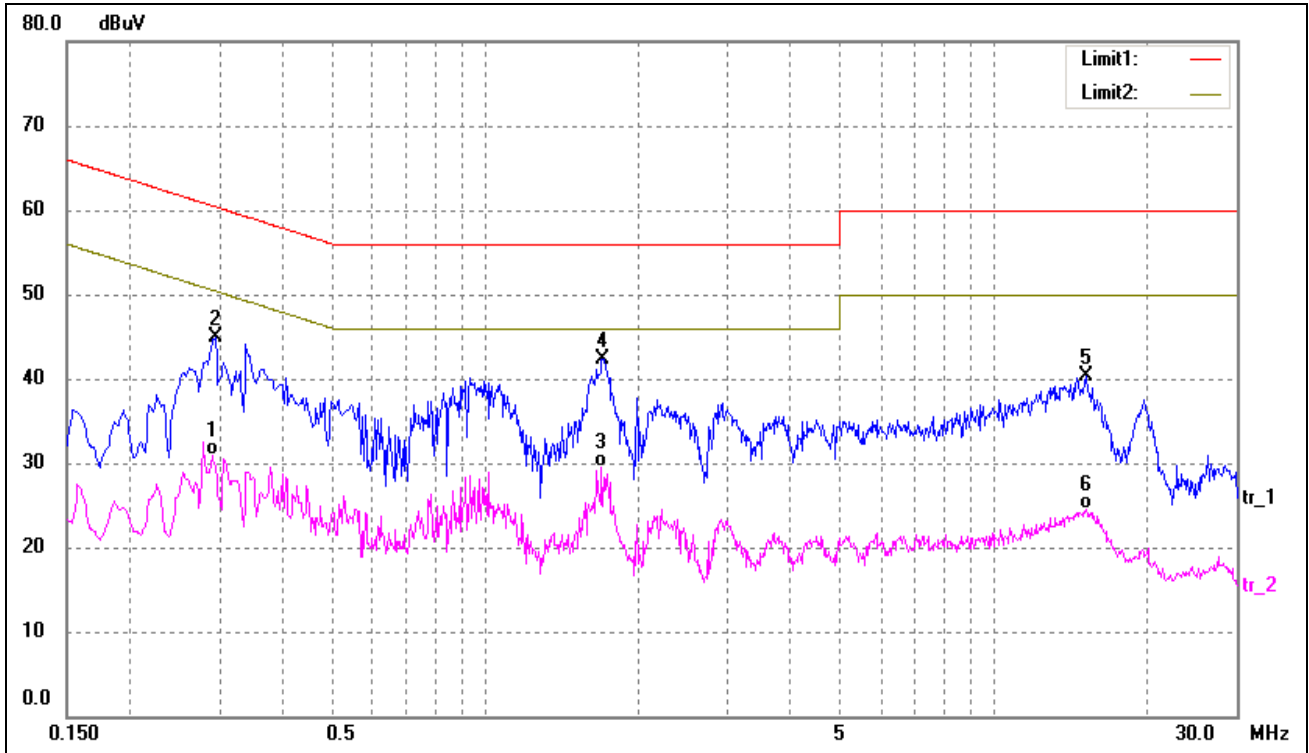


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2900	21.37	9.50	30.87	50.52	-19.65	AVG
2	0.2940	35.42	9.50	44.92	60.41	-15.49	QP
3	1.6940	19.44	10.00	29.44	46.00	-16.56	AVG
4	1.7060	32.37	10.00	42.37	56.00	-13.63	QP
5	15.1660	29.24	11.03	40.27	60.00	-19.73	QP
6	15.1660	13.54	11.03	24.57	50.00	-25.43	AVG

Plot of Conducted Emissions Test Data


EUT: *Wireless Data Terminal*
 Tested Model: *JXJ-HM041*
 Operating Condition: *TM2*
 Comment: *AC 120V/60Hz; USB 5V*

Test Specification: *Neutral*

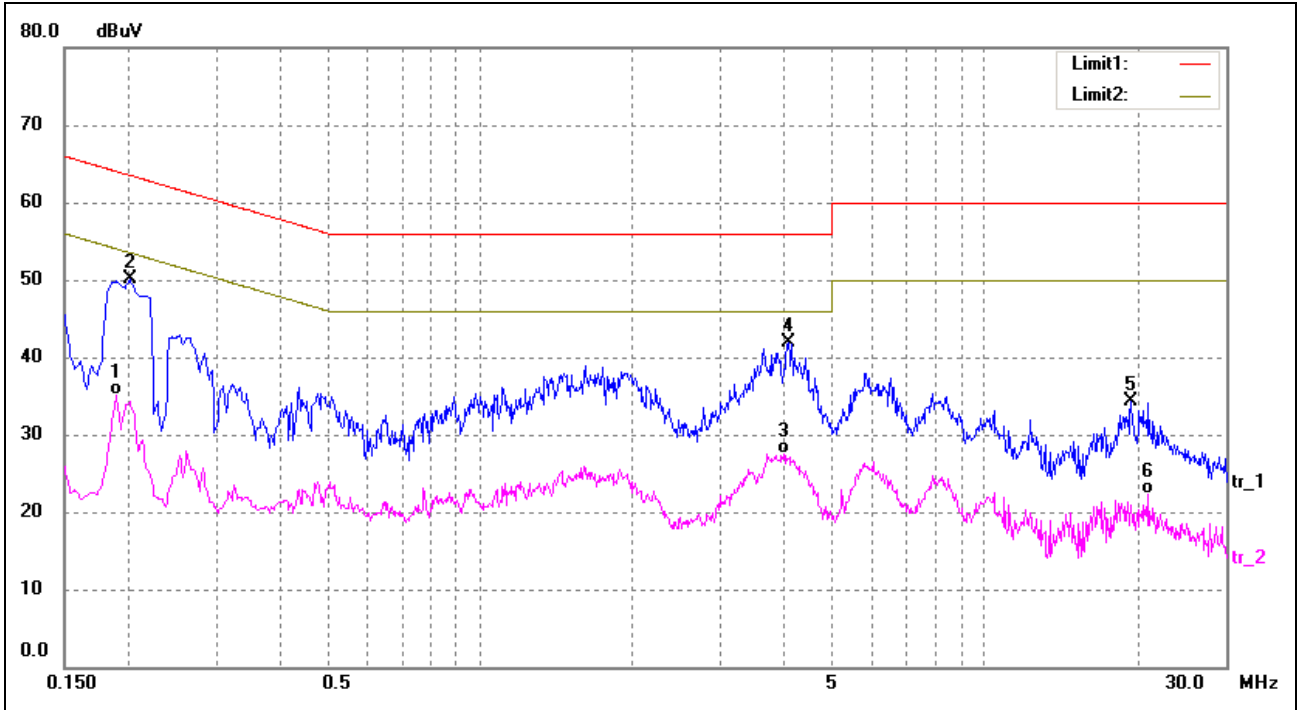

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1900	25.63	9.50	35.13	54.04	-18.91	AVG
2*	0.2020	40.53	9.50	50.03	63.53	-13.50	peak
3	3.9860	17.50	10.00	27.50	46.00	-18.50	AVG
4	4.0740	31.94	10.00	41.94	56.00	-14.06	peak
5	19.4380	22.50	11.89	34.39	60.00	-25.61	peak
6	21.0940	10.25	12.00	22.25	50.00	-27.75	AVG

Test Specification: Line

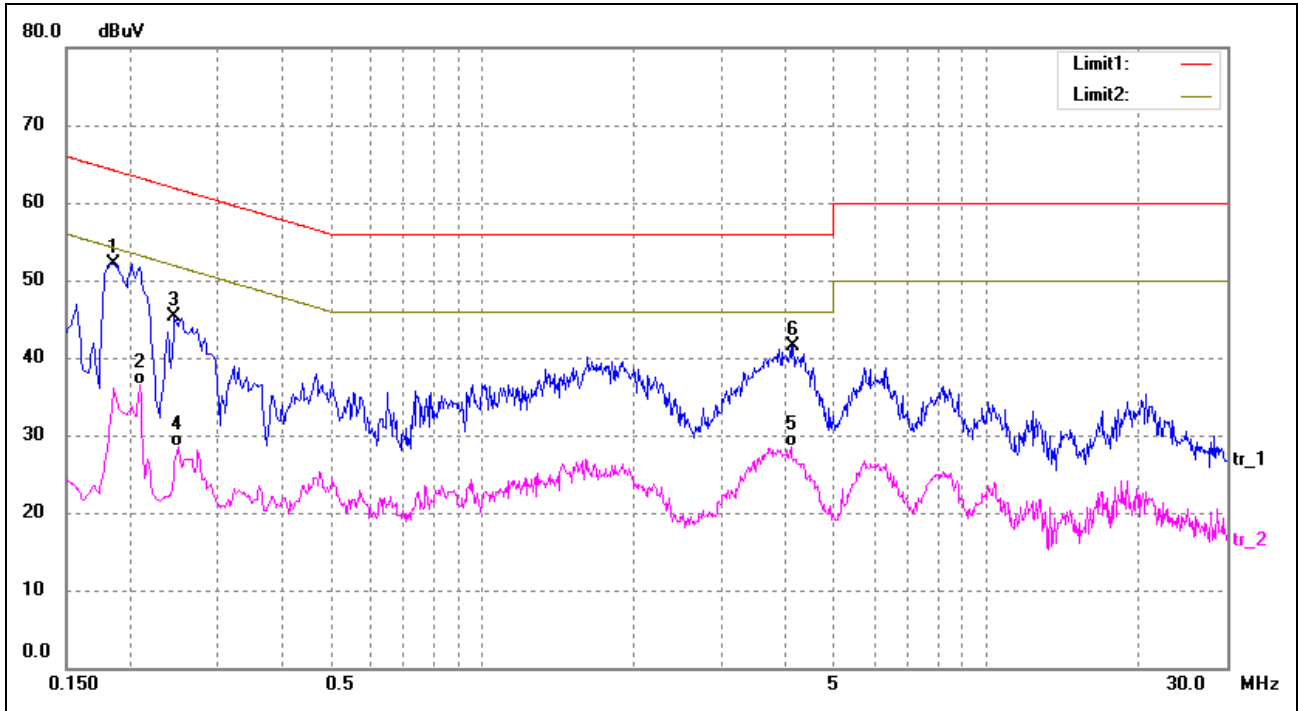

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1860	42.67	9.50	52.17	64.21	-12.04	peak
2	0.2100	26.91	9.50	36.41	53.21	-16.80	AVG
3	0.2460	35.84	9.50	45.34	61.89	-16.55	peak
4	0.2500	19.07	9.50	28.57	51.76	-23.19	AVG
5	4.0980	18.49	10.00	28.49	46.00	-17.51	AVG
6	4.1380	31.56	10.00	41.56	56.00	-14.44	peak

4. Radiated Emissions

4.1 Measurement Uncertainty


Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is ± 5.10 dB.

4.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

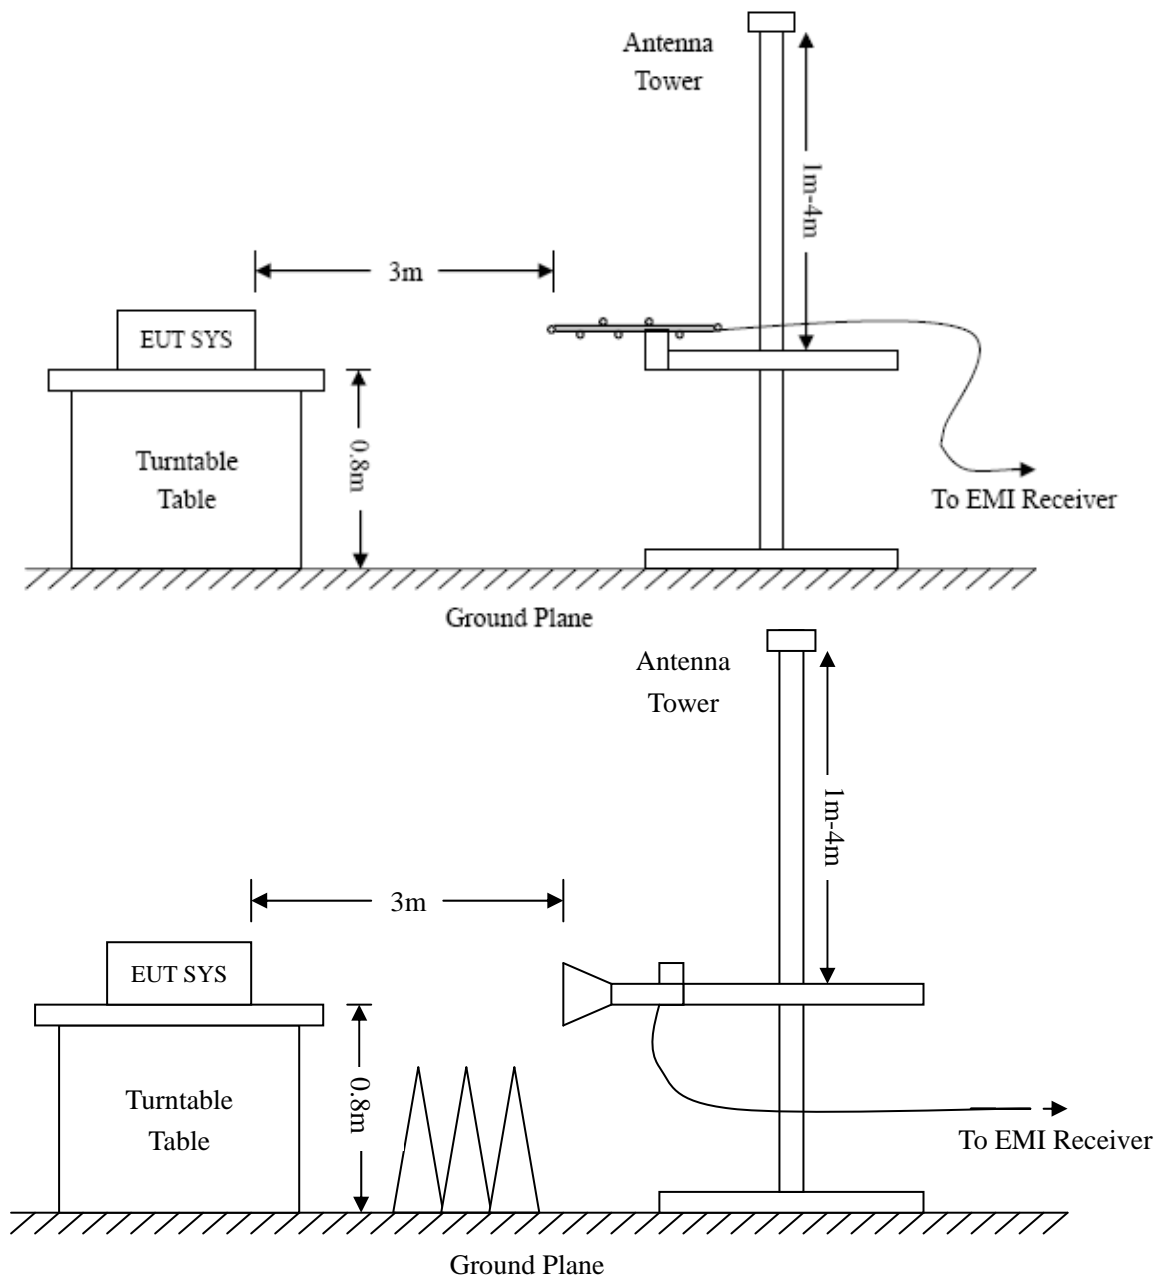

4.3 Test Receiver Setup

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

4.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.5 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

4.6 Summary of Test Results/Plots


According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

-2.28 dB at 39.0245 MHz in the Horizontal polarization, TM2 Mode 9 kHz to 5 GHz, 3Meters

Plot of Radiated Emissions Test Data


EUT: *Wireless Data Terminal*
 Tested Model: *JXJ-HM041*
 Operating Condition: *TM1*
 Comment: *AC 120V/60Hz; USB 5V*

Test Specification: *Horizontal*

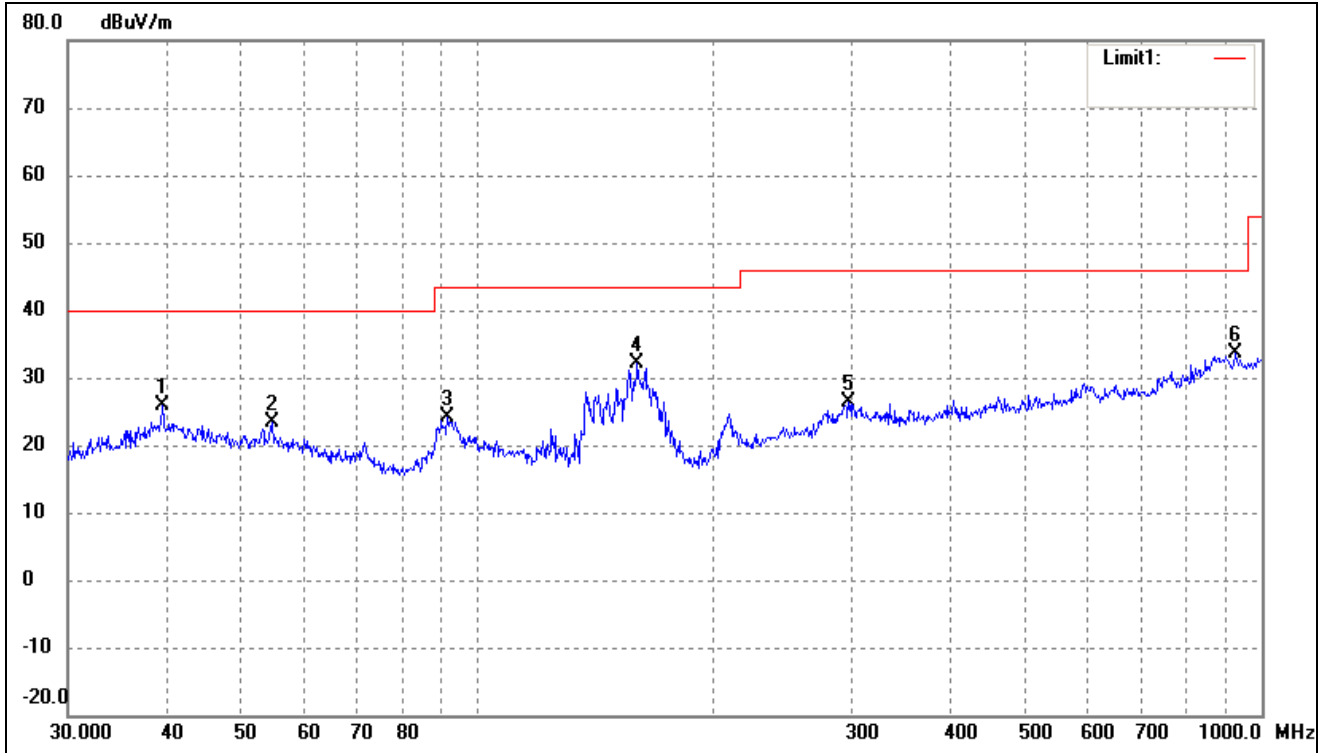

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	39.5756	18.68	7.13	25.81	40.00	-14.19	58	150	QP
2	54.6428	17.50	5.85	23.35	40.00	-16.65	326	100	QP
3	91.4949	20.06	3.99	24.05	43.50	-19.45	29	150	QP
4	159.7844	29.42	2.62	32.04	43.50	-11.46	209	100	QP
5	297.2241	17.32	9.06	26.38	46.00	-19.62	145	100	QP
6	925.7563	17.14	16.40	33.54	46.00	-12.46	359	200	QP

Test Specification: Vertical

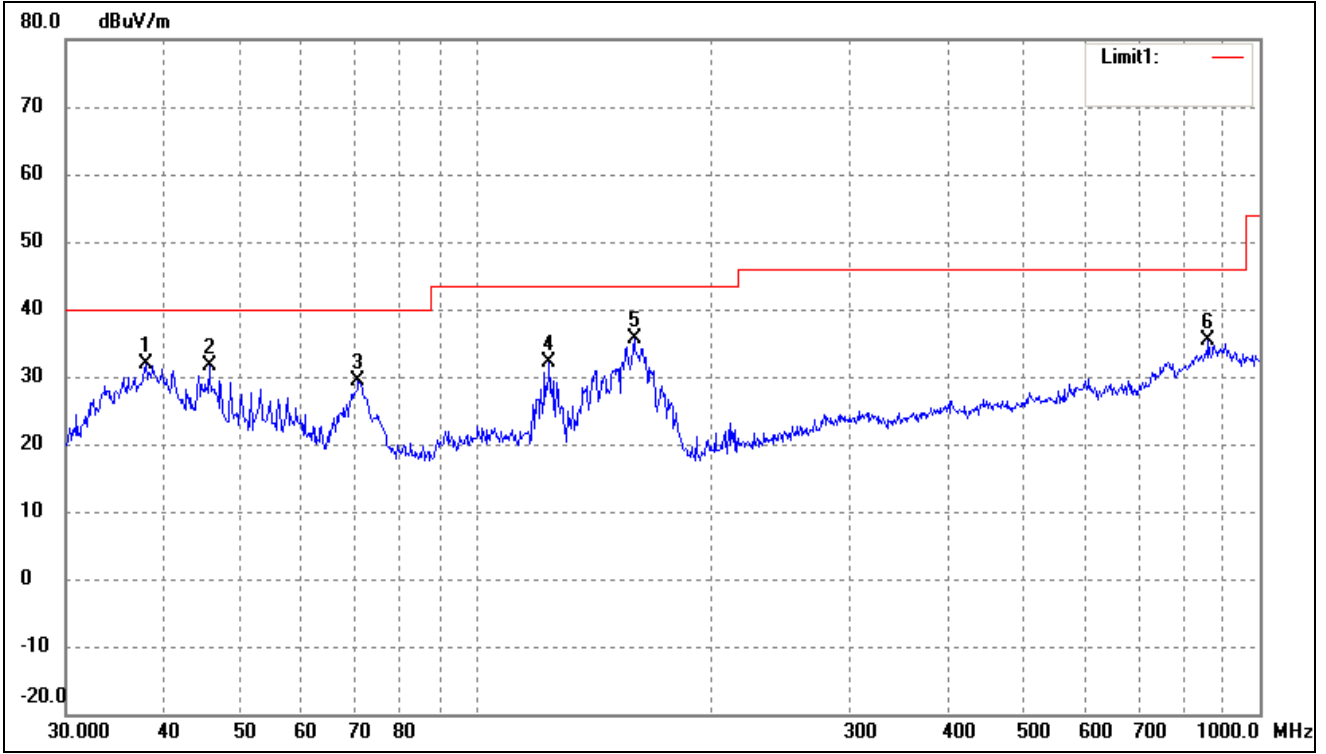


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	37.9450	23.06	8.90	31.96	40.00	-8.04	51	100	QP
2	45.6948	24.15	7.55	31.70	40.00	-8.30	308	100	QP
3	70.8315	27.17	2.09	29.26	40.00	-10.74	120	100	QP
4	124.1329	28.35	3.69	32.04	43.50	-11.46	11	100	QP
5	159.2249	33.03	2.62	35.65	43.50	-7.85	145	100	QP
6	860.0352	19.03	16.29	35.32	46.00	-10.68	359	100	QP

Plot of Radiated Emissions Test Data


EUT: *Wireless Data Terminal*
 Tested Model: *JXJ-HM041*
 Operating Condition: *TM2*
 Comment: *AC 120V/60Hz; USB 5V*

Test Specification: *Horizontal*

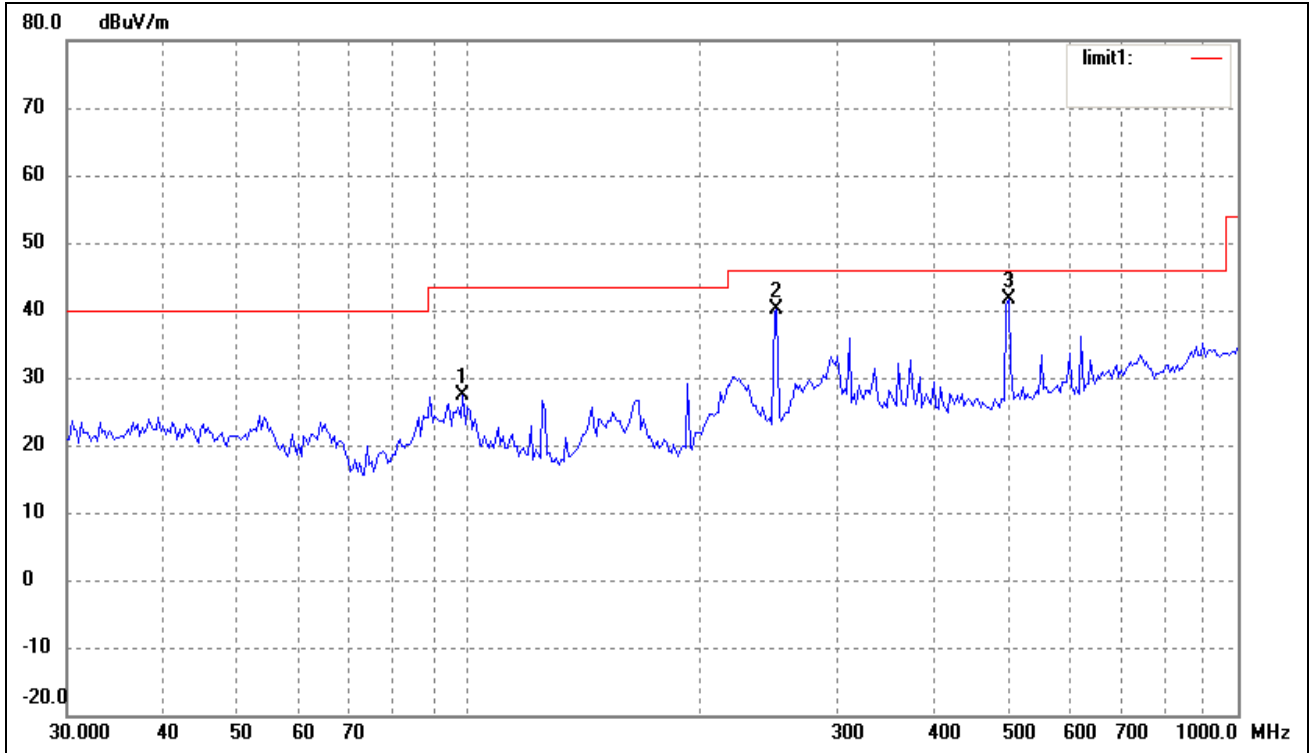

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	98.1419	20.96	6.39	27.35	43.50	-16.15	21	100	QP
2	251.1804	32.70	7.34	40.04	46.00	-5.96	12	200	QP
3	502.9395	29.29	12.30	41.59	46.00	-4.41	281	100	QP

Test Specification: Vertical

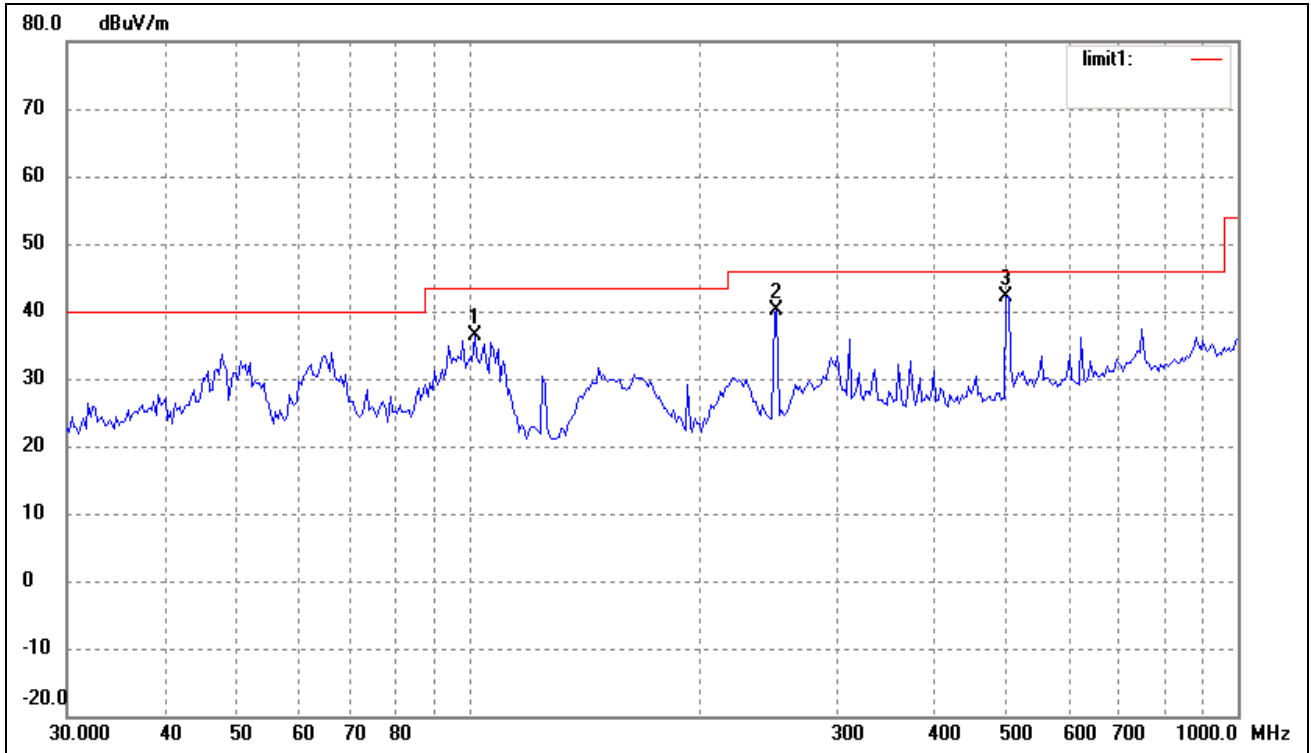


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	101.6443	29.63	6.67	36.30	43.50	-7.20	240	100	QP
2	251.1804	32.70	7.34	40.04	46.00	-5.96	187	100	QP
3	499.4247	30.03	12.18	42.21	46.00	-3.79	220	100	QP

Plot of Radiated Emissions Test Data


EUT: *Wireless Data Terminal*
 Tested Model: *JXJ-HM041*
 Operating Condition: *TM3*
 Comment: *AC 120V/60Hz; USB 5V*

Test Specification: *Horizontal*

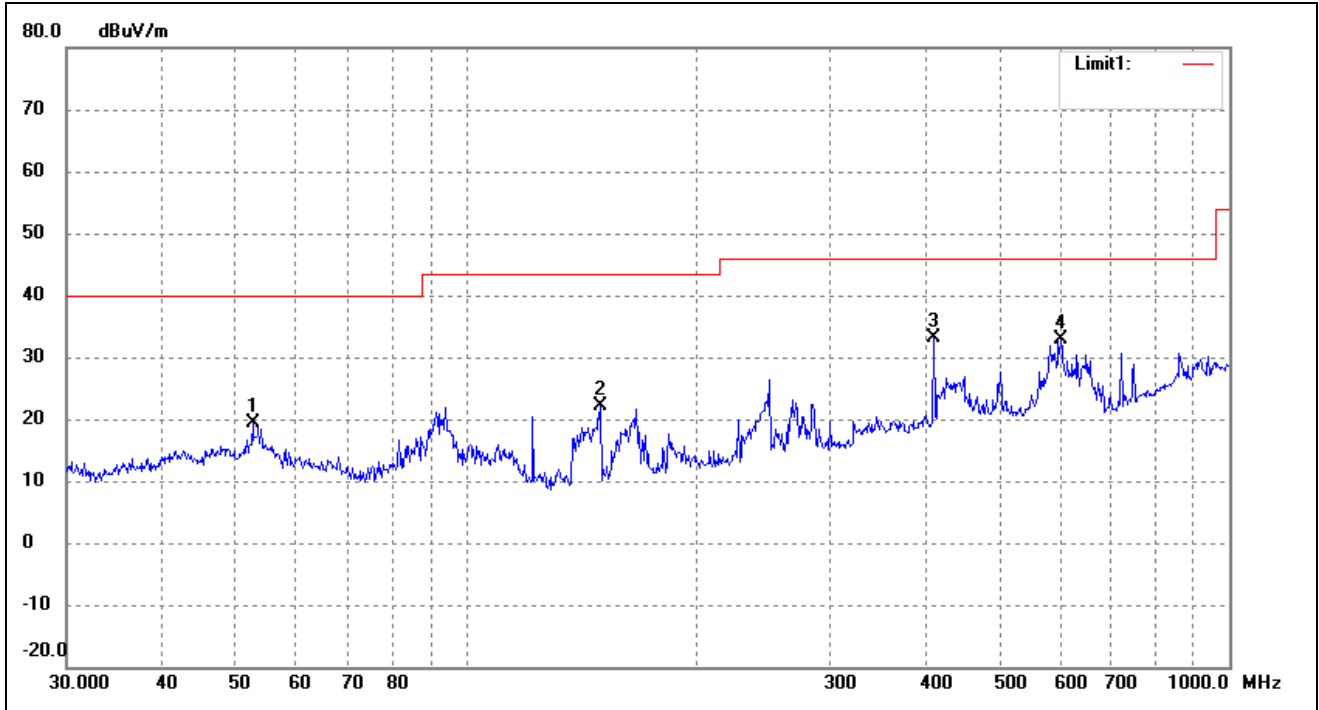

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	52.5753	27.04	-7.71	19.33	40.00	-20.67	158	150	QP
2	150.0108	35.05	-12.95	22.10	43.50	-21.40	226	100	QP
3	410.3825	35.90	-2.69	33.21	46.00	-12.79	129	150	QP
4	601.4265	34.69	-1.84	32.85	46.00	-13.15	109	100	QP

Test Specification: Vertical

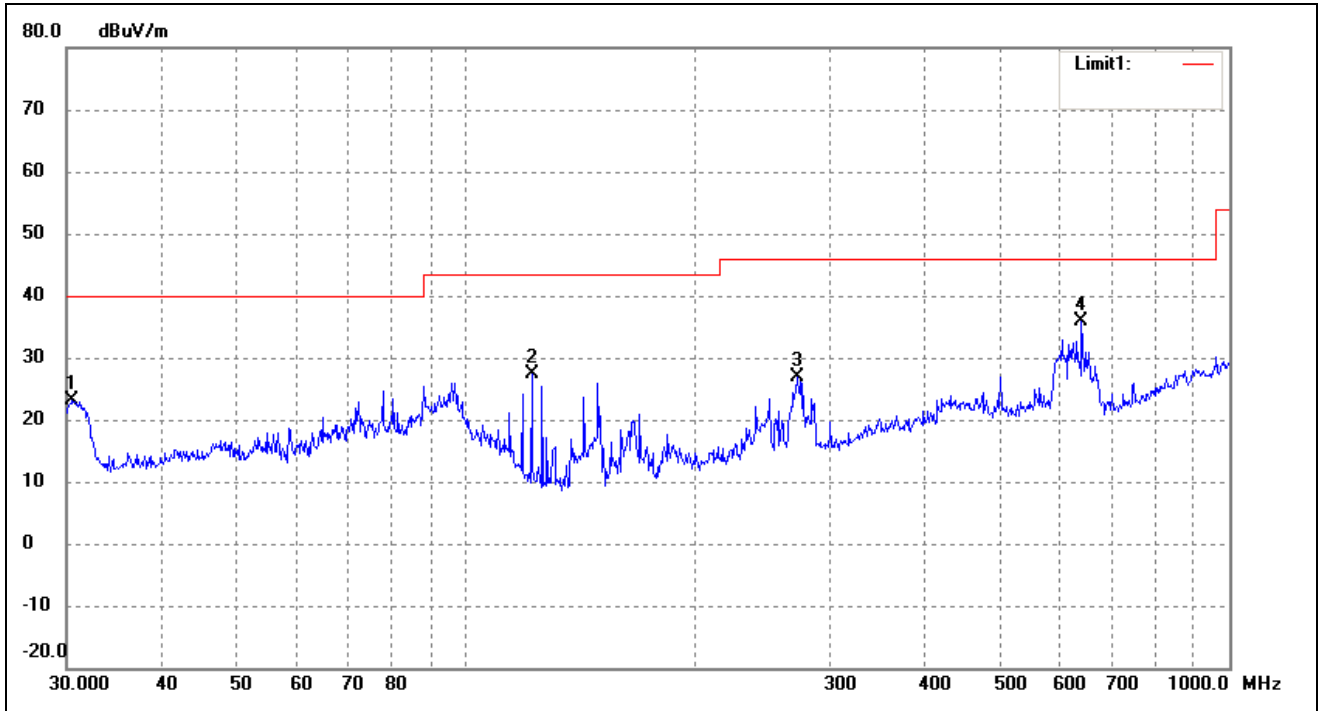

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	30.5306	33.49	-10.43	23.06	40.00	-16.94	51	100	QP
2	121.9755	38.87	-11.56	27.31	43.50	-16.19	308	100	QP
3	272.2776	33.84	-6.88	26.96	46.00	-19.04	120	100	QP
4	640.6110	34.21	1.70	35.91	46.00	-10.09	359	100	QP

Note: Testing is carried out with frequency rang 9kHz to the 5GHz, which above 1GHz is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

The measurements greater than 20dB below the limit from 9kHz to 30MHz and test data are not report.

***** END OF REPORT *****