



China

FCC Test Report

Report Number : 709502102611-00 Date of Issue: Feb. 03,2021

Model / Serial No. : TRX2102/01R, TRX2106/01R, TRX21YY/ZZR, ("Y"=0-9, "Z"=0-9. YY means the different running series of the product family. ZZ means version change)

FCC ID : 2AGOFTRX21A

Product Type : SENTINEL SCANNER

Applicant : HCS (Suzhou) Limited

Manufacturer : HCS (Suzhou) Limited

License holder : HCS (Suzhou) Limited

Address : 19F-20F, Building B-3rd, No.209 Zhuyuan Road,
New District,215011 Suzhou PEOPLE'S REPUBLIC OF CHINA

Test Result : Positive Negative

Total pages : 23

Date of Test : Jan 18,2021

Prepared by : *Jiaxi Xu Feb. 03,2021*

Jiaxi XU

Approved by :

Zhining ZHANG

DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch with all reasonable skill and care. The reports apply only to the specific samples tested under stated test conditions. The document is confidential to the potential Client and TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch. No part of this document may be reproduced without the prior written approval of TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch.

Report Number: 709502102611-00

Page 1 of 23
Rev.21.00

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch
3-13, No.151, Heng Tong Road, Shanghai, 200070, P.R. China
Phone: +86 21 61410123, Fax:+86 21 61408600



China

TABLE OF CONTENTS

Description	Page
1. Report Modification Record.....	3
2. Test Facility.....	3
3. EUT Information.....	4
4. Test Summary.....	5
5. Conducted Emission.....	6-11
6. Radiated Emission.....	12-21
7. Measurement Uncertainty.....	22
8. EUT Photograph.....	23



China

1. Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	02/03/2021

2. Test Facility

Test Site TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch
 No.16, Lane 1951, Du Hui Road, Shanghai 201108, P.R. China
 (Test Firm Registration Number: 820234)
 Telephone: +86 21 60379100 Fax: +86 21 60379100

TÜV SÜD Certification and Testing (China) Co., Ltd.
 10 Huaxia Road(M), Dongting, Wuxi, Jiangsu, 214100, P.R. China
 Telephone: +86 0510 88203737 Fax: +86 0510 88203636

Test Firm 820234
 Registration
 Number:

Telephone: +86 21 6141 0123
 Fax: +86 21 6140 8600

Ambient Condition in laboratory:

Items	Test	Required(IEC68-1)	Actual
Temperature(°C)	ANSI.C 63.4 CE	15-35	23.5
Humidity (%)		25-75	40.3
Atmospheric Pressure(mbar)		860-1060	1031
Temperature(°C)	ANSI.C 63.4 RE	15-35	20.4
Humidity (%)		25-75	41.3
Atmospheric Pressure(mbar)		860-1060	1031



China

3. EUT Information

3.1 EUT Description

Product Type	:	SENTINEL SCANNER
Model / Serial No.	:	TRX2102/01R, TRX2106/01R, TRX21YY/ZZR, ("Y"=0-9, "Z"=0-9. YY means the different running series of the product family. ZZ means version change)
EUT Voltage	:	USB 5V (with power supply model: PS06H050K1000UU: rated input:100-240V AC,50/60Hz, Output:5V DC, 0.25A)

The sample's mentioned in this report is/are submitted/ supplied/ manufactured by client. The laboratory therefore assumes no responsibility for accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.

3.2 EUT Configuration

SENTINEL SCANNER	:	TRX2102/01R, TRX2106/01R, TRX21YY/ZZR, ("Y"=0-9, "Z"=0-9. YY means the different running series of the product family. ZZ means version change)
------------------	---	---

3.3 EUT Operating Mode

The equipment under test was operated under the following conditions during emissions testing:

- Test Program (H - Pattern)
- Test Program (Color Bar)
- Test Program (Customer Specified)
- Normal Operating Mode
- Power On with the SENTINEL SHIELD and SENTINEL READER (provided by client)



China

3.4 Peripheral devices and interface cables were connected during the testing:

- Notebook Type : E470
- SENTINEL SHIELD Type : TRX2002/01BR
- SENTINEL READER Type : OVU810019/01R

3.5 EUT Exercise Software:

The EUT is programmable and use the software named "Contact Trace".

3.6 EUT Modification

N/A

4. Test Summary

Test	Specification	Test Result	Remark
Conducted Emission	CFR47 Part 15 §15.107,	Pass	Refer to page 6-11
Radiated Emission	CFR47 Part 15 §15.109,	Pass	Refer to page 12-21

Remarks:

According to the Section 15.33 of FCC part 15, the work frequency is above 1GHz(2.480GHz), so the radiated emission range is 30MHz to 15000MHz. (5th harmonic)

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705-108	1000.
108-500	2000.
500-1000	5000.
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

The Equipment Under Test (EUT) is a SENTINEL SCANNER. Products are identical to electrical structure, mechanical structure. There are only cosmetic differences (color /painting/printed).We chose model TRX2102/01R to test it and listed the worst data in this report.

Report Number: 709502102611-00

Page 5 of 23
Rev.21.00

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch
3-13, No.151, Heng Tong Road, Shanghai, 200070, P.R. China
Phone: +86 21 61410123, Fax:+86 21 61408600



China

5. Conducted Emission

5.1 Test Equipment

The following test equipments are used:

USED	Equipment Name	Model	Manufacturer	Equipment ID.	Calibration Date	Calibration Due Date
<input checked="" type="checkbox"/>	EMI test receiver	ESR3	R&S	S1503001-YQ-EMC	2020-8-04	2021-8-03
<input checked="" type="checkbox"/>	2-Line V-network	ENV216	R&S	S1503103-YQ-EMC	2020-8-04	2021-8-03
<input type="checkbox"/>	4-Line V-network	ENV4200	R&S	S1503106-YQ-EMC	2020-8-04	2021-8-03

5.2 Test Specification


Tests are performed according to CFR47 Part 15 subpart B. Limit as below:

CFR47 Part 15 subpart B §15.107 Limits (dB μ V)				
Frequency (MHz)	Class A		Class B	
	QP	AV	QP	AV
0.15-0.5	79	66	66-56	56-46
0.5-5.0	73	60	56	46
5.0-30	73	60	60	50

5.3 Test Procedure

The test is performed in shield room. EUT is placed on the table which is 80cm above ground plane and connected to a line Impedance Stabilization Network (LISN). The conducted emission is scanned over the frequency from 150KHz to 30MHz with peak detector. A final measurement is performed with quasi-peak detector and average detector. IF bandwidth is 10KHz.

5.4 Test Setup

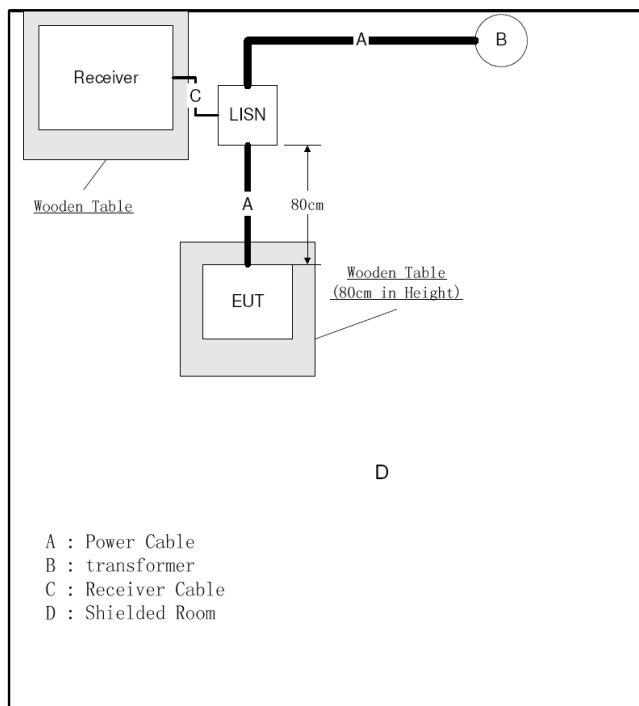

5.5 Test Photo

Refer to the < Setup photo >



China

5.6 Test Result

150k-30MHz Conducted Emission Test


EUT Information

EUT Name: SENTINEL SCANNER
Model: TRX2102/01R
Client: HCS (Suzhou) Limited
Op Cond: Power on. AC120V 60Hz. T23.5. H40.3%. P103.1kPa
Operator: Shi Chaojun
Standard: FCC Part 15 Class B
Comment: Phase L
Sample No.: SHA-545195-1

Scan Setup: Voltage with 2-Line-LISN pre [EMI conducted]

Hardware Setup: Voltage with 2-Line-LISN
Receiver: IESR 31
Level Unit: dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	100 Hz	PK+	200 Hz	0.01 s	0 dB
150 kHz - 30 MHz	4.5 kHz	PK+: AVG	9 kHz	0.01 s	0 dB

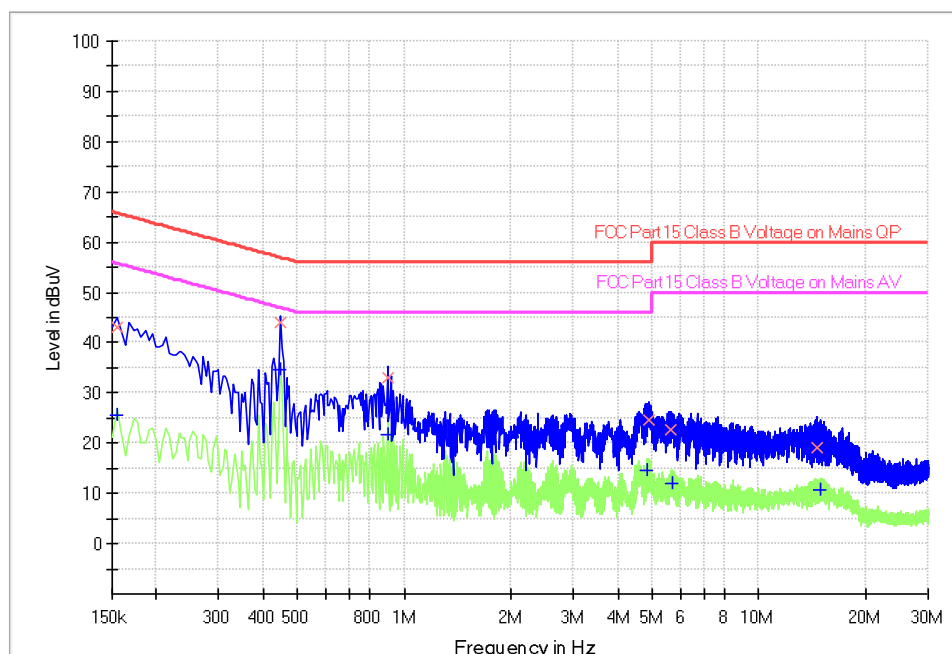



China

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Corr. (dB)
0.154500	---	25.74	55.75	30.01	1000.0	9.000	L1	19.5
0.154500	43.01	---	65.75	22.74	1000.0	9.000	L1	19.5
0.447000	---	34.50	46.93	12.43	1000.0	9.000	L1	19.5
0.447000	44.02	---	56.93	12.91	1000.0	9.000	L1	19.5
0.897000	---	21.75	46.00	24.25	1000.0	9.000	L1	19.5
0.897000	32.98	---	56.00	23.02	1000.0	9.000	L1	19.5
4.830000	---	14.47	46.00	31.53	1000.0	9.000	L1	19.5
4.906500	24.69	---	56.00	31.31	1000.0	9.000	L1	19.5
5.626500	22.53	---	60.00	37.47	1000.0	9.000	L1	19.5
5.725500	---	12.11	50.00	37.89	1000.0	9.000	L1	19.6
14.559000	19.00	---	60.00	41.00	1000.0	9.000	L1	19.7
14.982000	---	10.71	50.00	39.29	1000.0	9.000	L1	19.7



China

150k-30MHz Conducted Emission Test


EUT Information

EUT Name: SENTINEL SCANNER
Model: TRX2102/01R
Client: HCS (Suzhou) Limited
Op Cond: Power on, AC120V 60Hz, T23.5, H40.3%, P103.1kPa
Operator: Shi Chaojun
Standard: FCC Part 15 Class B
Comment: Phase N
Sample No.: SHA-545195-1

Scan Setup: Voltage with 2-Line-LISN pre [EMI conducted]

Hardware Setup: Voltage with 2-Line-LISN
Receiver: IESR 31
Level Unit: dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	100 Hz	PK+	200 Hz	0.01 s	0 dB
150 kHz - 30 MHz	4.5 kHz	PK+; AVG	9 kHz	0.01 s	0 dB

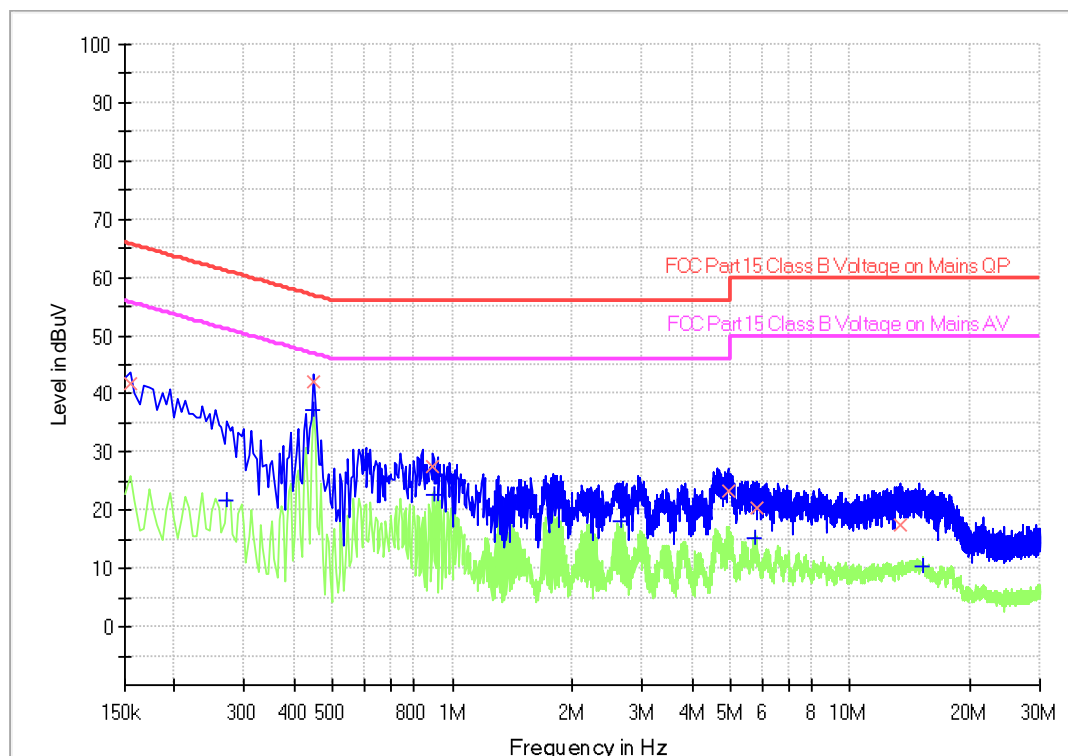



China

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.154500	41.86	---	65.75	23.89	1000.0	9.000	N	19.5
0.271500	---	21.80	51.07	29.27	1000.0	9.000	N	19.5
0.447000	---	37.09	46.93	9.84	1000.0	9.000	N	19.5
0.447000	42.12	---	56.93	14.81	1000.0	9.000	N	19.5
0.892500	27.62	---	56.00	28.38	1000.0	9.000	N	19.5
0.897000	---	22.55	46.00	23.45	1000.0	9.000	N	19.5
2.665500	---	18.28	46.00	27.72	1000.0	9.000	N	19.6
4.920000	23.30	---	56.00	32.70	1000.0	9.000	N	19.6
5.739000	---	15.37	50.00	34.63	1000.0	9.000	N	19.6
5.802000	20.37	---	60.00	39.63	1000.0	9.000	N	19.6
13.429500	17.50	---	60.00	42.50	1000.0	9.000	N	19.8
15.220500	---	10.44	50.00	39.56	1000.0	9.000	N	19.8



China

6 Radiated Emission

6.1 Test Equipment

The following test Equipment are used:

USED	Equipment Name	Model	Manufacturer	Equipment ID.	Calibration Date	Calibration Due Date
<input checked="" type="checkbox"/>	EMI test receiver	ESR3	R&S	S1503109-YQ-EMC	2020-8-04	2021-8-03
<input checked="" type="checkbox"/>	Trilog super broadband antenna	VULB 9168	SCHWARZBECK	S1808296-YQ-EMC	2019-3-16	2022-3-15
<input checked="" type="checkbox"/>	Double-ridged waveguide horn antenna	HF907	R&S	S1503009-YQ-EMC	2018-4-02	2021-4-01
<input checked="" type="checkbox"/>	Signal conditioning unit	SCU-18D	R&S	S1503012-YQ-EMC	2020-8-4	2021-8-03
<input checked="" type="checkbox"/>	Signal and spectrum analyzer	FSV40	R&S	S1503003-YQ-EMC	2020-8-4	2021-8-03
<input type="checkbox"/>	Double Ridged Horn Antenna	3116C-PA	ETS-Lindgren	487/621839	2019-9-26	2022-9-25

6.2 Test Specification


Tests are performed according to CFR47 Part 15 subpart B. Limit as below:

CFR47 Part 15 subpart B §15.109 (dB μ V/m)				
Frequency (MHz)	Class A		Class B	
	Distance	QP	Distance	QP
30-88	10m	39	3m	40
88-216	10m	43.5	3m	43.5
216-960	10m	46.4	3m	46
Above 960	10m	49.5	3m	54

6.3 Test Procedure

The EUT is placed on a turntable which is 80cm above ground plane. The turn table rotates 360 degrees and antenna moves up and down between 1m and 4 m to find maximum emission. Both horizontal and vertical polarizations of antenna are set in the measurement. The EUT is positioned at 3m away from antenna.

6.4 Test Setup

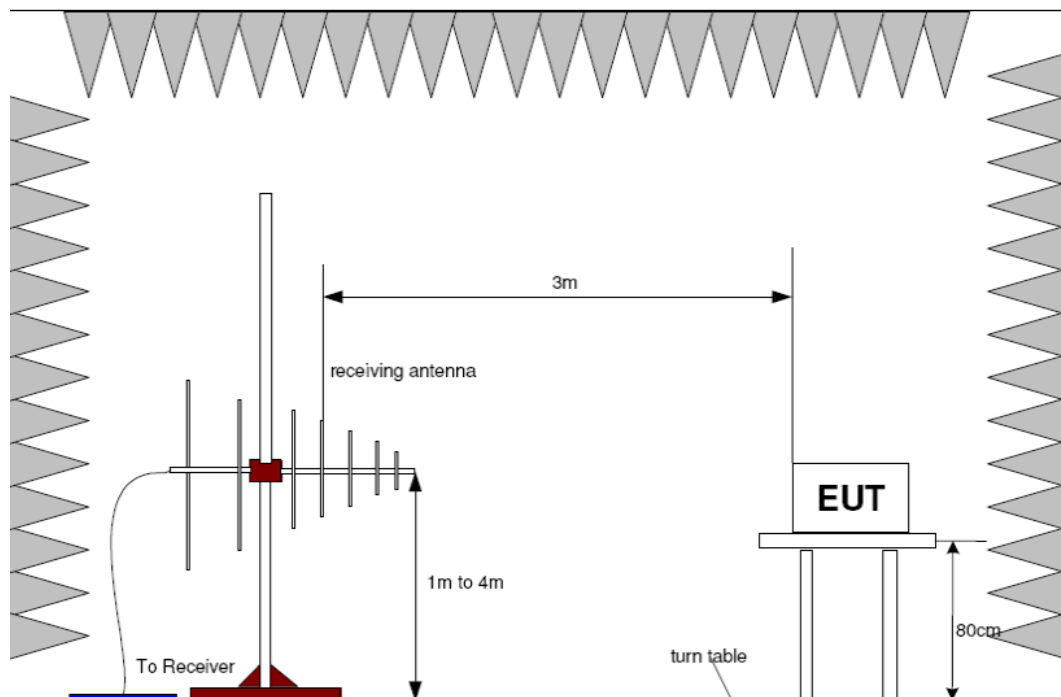

Note: w : The dimension of the line tangent to the EUT formed by $\theta_{3\text{dB}}$ at the measurement distance 3m

w value	Measurement frequency band	Antenna Model
1.6m	1~18GHz	HF907
1.95m	18~26.5GHz	3116C-PA
0.74m	26.5~40GHz	3116C-PA

6.5 Test Photo

Refer to the < Setup photo >



China

6.6 Test Result

30-1000MHz Radiated Emission

EUT Information


EUT Name: SENTINEL SCANNER
Model: TRX2102/01R
Client: HCS (Suzhou) Limited
Op Cond: power on, AC120V 60Hz, T20.4, H41.3%, P103.1kPa
Operator: Shi Chaojun
Test Spec: FCC Part 15 Class B
Comment: Horizontal
Sample No: SHA-545195-1

Sweep Setup: RE_VULB9168_pre_Cont_30-1000 [EMI radiated]

Hardware Setup: RE VULB9168
Receiver: IESR 31
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	0.005 s	20 dB

RE_VULB9168_pre_Cont_30-1000

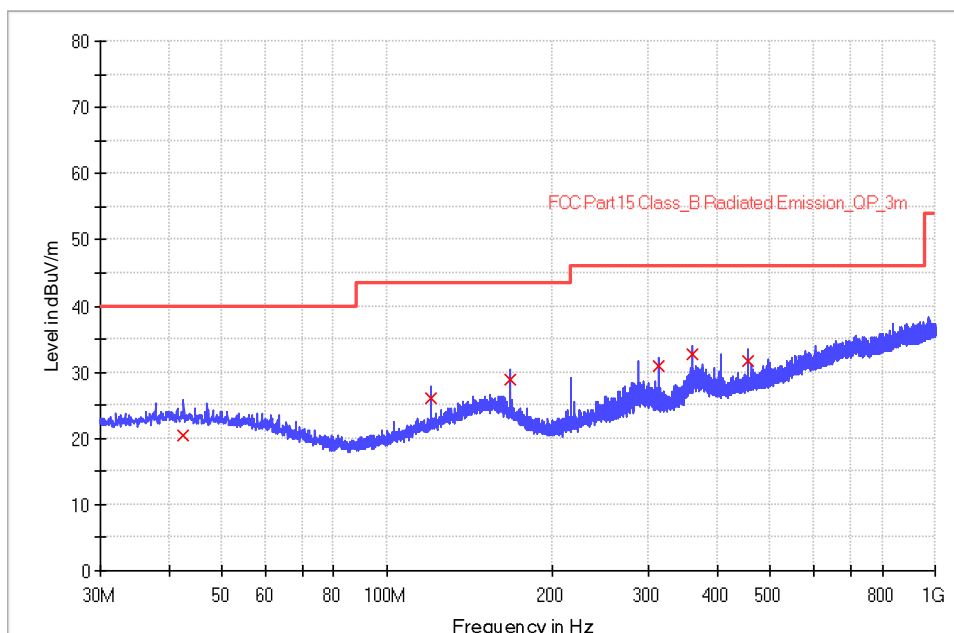

Report Number: 709502102611-00

Page 14 of 23
Rev.21.00

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch
3-13, No.151, Heng Tong Road, Shanghai, 200070, P.R. China
Phone: +86 21 61410123, Fax: +86 21 61408600



China

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK	Limit - QPK
42.560000	20.6	1000.0	120.000	100.0	H	158.0	14.6	19.4	40.0
119.960000	26.2	1000.0	120.000	100.0	H	71.0	13.5	17.3	43.5
168.000000	28.8	1000.0	120.000	100.0	H	236.0	14.9	14.7	43.5
311.960000	30.8	1000.0	120.000	100.0	H	61.0	15.3	15.2	46.0
359.960000	32.8	1000.0	120.000	100.0	H	82.0	16.5	13.2	46.0
455.960000	31.7	1000.0	120.000	100.0	H	209.0	18.6	14.3	46.0



China

1-15GHz Radiated Emission

EUT Information


EUT Name: SENTINEL SCANNER
Model: TRX2102/01R
Client: HCS (Suzhou) Limited
Op Cond: power on, AC120V 60Hz, T20.4, H41.3%, P103.1kPa
Operator: Shi Chaojun
Test Spec: FCC Part 15 Class B
Comment: Horizontal
Sample No: SHA-545195-1

Sweep Setup: RE_HF907_pre [EMI radiated]

Hardware Setup: RE HF907
Receiver: IFSV 401
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 15 GHz	566.667 kHz	PK+: AVG	1 MHz	0.2 s	0 dB

Full Spectrum

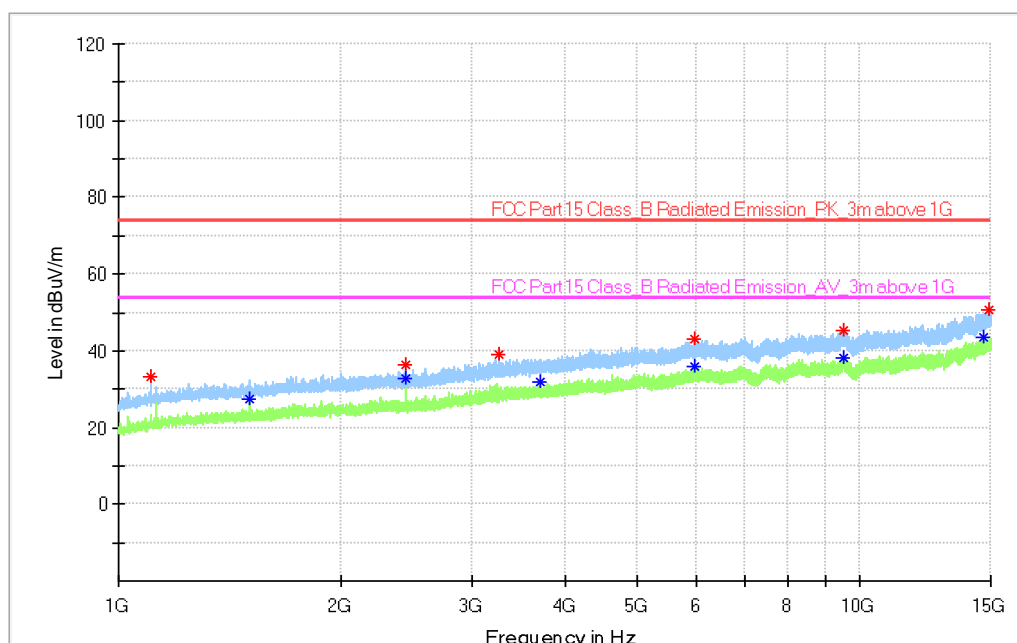



China

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
3264.733333	39.05	---	74.00	34.95	100.0	H	0.0
1106.866667	33.16	---	74.00	40.84	100.0	H	114.0
14654.666667	---	43.45	54.00	10.55	100.0	H	220.0
9505.000000	45.20	---	74.00	28.80	100.0	H	238.0
14944.466667	50.68	---	74.00	23.32	100.0	H	262.0
9500.800000	---	38.23	54.00	15.77	100.0	H	274.0
3713.200000	---	31.81	54.00	22.19	100.0	H	291.0
5968.133333	43.00	---	74.00	31.00	100.0	H	291.0
1499.800000	---	27.29	54.00	26.71	100.0	H	342.0
2438.266667	36.34	---	74.00	37.66	100.0	H	342.0
2438.266667	---	32.88	54.00	21.12	100.0	H	342.0
5966.266667	---	36.08	54.00	17.92	100.0	H	354.0



China

30-1000MHz Radiated Emission

EUT Information


EUT Name: SENTINEL SCANNER
Model: TRX2102/01R
Client: HCS (Suzhou) Limited
Op Cond: power on, AC120V 60Hz, T20.4, H41.3%, P103.1kPa
Operator: Shi Chaojun
Test Spec: FCC Part 15 Class B
Comment: Vertical
Sample No: SHA-545195-1

Sweep Setup: RE_VULB9168_pre_Cont_30-1000 [EMI radiated]

Hardware Setup: RE VULB9168
Receiver: IESR 3I
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	0.005 s	20 dB

RE_VULB9168_pre_Cont_30-1000

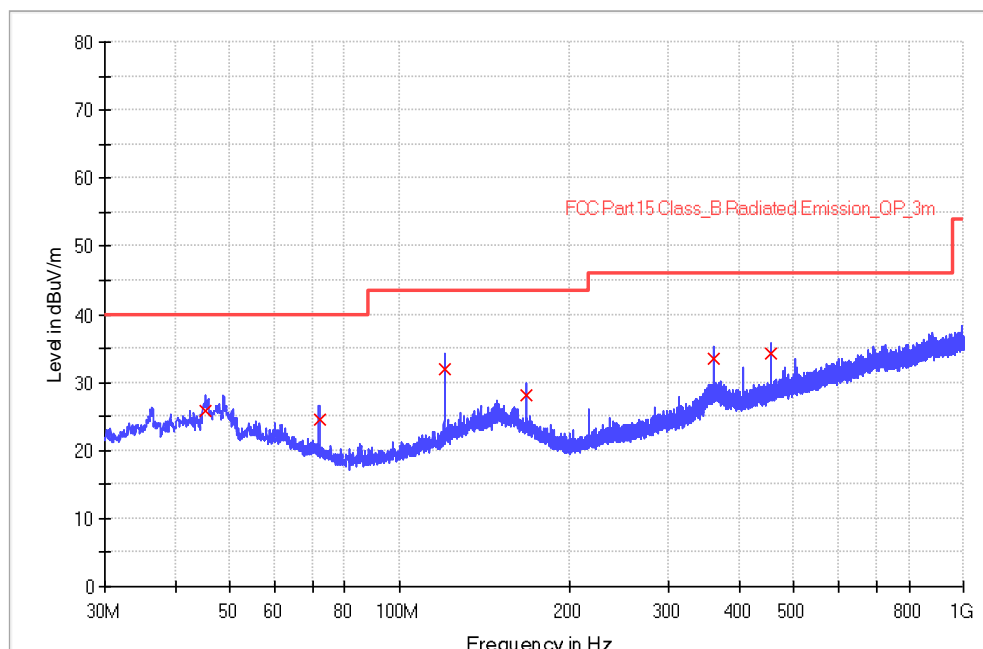



China

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
45.320000	25.7	1000.0	120.000	100.0	V	158.0	14.4	14.3	40.0
71.960000	24.6	1000.0	120.000	100.0	V	84.0	11.5	15.4	40.0
119.960000	32.0	1000.0	120.000	100.0	V	73.0	13.5	11.5	43.5
168.040000	28.2	1000.0	120.000	100.0	V	194.0	14.9	15.3	43.5
360.000000	33.6	1000.0	120.000	100.0	V	174.0	16.5	12.4	46.0
456.040000	34.2	1000.0	120.000	100.0	V	153.0	18.6	11.8	46.0



China

1-15GHz Radiated Emission

EUT Information


EUT Name: SENTINEL SCANNER
Model: TRX2102/01R
Client: HCS (Suzhou) Limited
Op Cond: power on, AC120V 60Hz, T20.4, H41.3%, P103.1kPa
Operator: Shi Chaojun
Test Spec: FCC Part 15 Class B
Comment: Vertical
Sample No: SHA-545195-1

Sweep Setup: RE_HF907_pre [EMI radiated]

Hardware Setup: RE HF907
Receiver: IFSV 401
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 15 GHz	566.667 kHz	PK+: AVG	1 MHz	0.2 s	0 dB

Full Spectrum

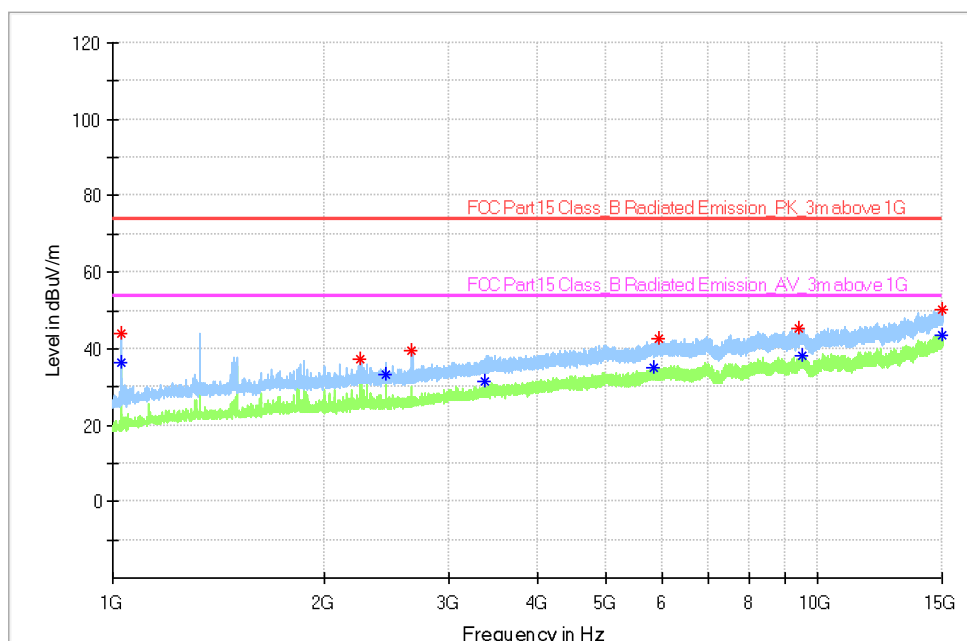



China

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
5847.733333	---	35.10	54.00	18.90	100.0	V	0.0
2241.333333	37.31	---	74.00	36.69	100.0	V	40.0
1029.400000	---	36.15	54.00	17.85	100.0	V	109.0
1029.400000	44.04	---	74.00	29.96	100.0	V	109.0
2437.333333	---	33.24	54.00	20.76	100.0	V	109.0
3374.866667	---	31.29	54.00	22.71	100.0	V	109.0
2657.133333	39.63	---	74.00	34.37	100.0	V	115.0
14970.133333	---	43.63	54.00	10.37	100.0	V	133.0
5940.600000	42.77	---	74.00	31.23	100.0	V	169.0
9486.800000	---	37.98	54.00	16.02	100.0	V	334.0
9415.400000	45.50	---	74.00	28.50	100.0	V	339.0
14976.666667	50.30	---	74.00	23.70	100.0	V	351.0

Note 1: Emission Level = Reading level + Correction Factor

Corrector Factor = Antenna Factor + Cable Loss - Pre-amplifier Gain

Margin=Limit – Emission Level



China

7 Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

Items	Extended Uncertainty
Radiated Disturbance	30MHz to 1GHz, ±5.03dB (Horizontal)
	±5.12dB (Vertical)
	1GHz to 18GHz, ±5.49dB
	18GHz to 40GHz, ±5.63dB



China

8 EUT Photograph

Refer to the < External Photos > & < Internal Photos >.

THE END