



FCC RADIO TEST REPORT

FCC ID : 2AG0Z-CV90
Equipment : VR Controller
Brand Name :  **oculus**
Model Name : LX39EM
Applicant : Facebook Technologies, LLC
1601 Willow Road, Menlo Park, CA 94025,
United States Of America.
Standard : FCC Part 15 Subpart C §15.247

The product was received on Apr. 10, 2020 and testing was started from Apr. 15, 2020 and completed on Apr. 23, 2020. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	9
3 Test Result.....	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	15
3.3 Power Spectral Density Measurement	16
3.4 Conducted Band Edges and Spurious Emission Measurement	21
3.5 Radiated Band Edges and Spurious Emission Measurement	26
3.6 Antenna Requirements	30
4 List of Measuring Equipment	31
5 Uncertainty of Evaluation.....	32
Appendix A. Conducted Test Results	
Appendix B. Radiated Spurious Emission	
Appendix C. Radiated Spurious Emission Plots	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	Under limit 3.20 dB at 4804.000 MHz
-	15.207	AC Conducted Emission	Not Required	-
3.6	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Note: Not required means after assessing, test items are not necessary to carry out.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Ruby Zou



1 General Description

1.1 Product Feature of Equipment Under Test

GFSK

Product Specification subjective to this standard	
Antenna Type	GFSK: Dipole Antenna

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH12-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	-	-
	19	2440	-	-
20	2442	-	-	

2.2 Test Mode


The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated:, radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	GFSK
Conducted Test Cases	Mode 1: GFSK Tx CH00_2402 MHz_1Mbps
	Mode 2: GFSK Tx CH19_2440 MHz_1Mbps
	Mode 3: GFSK Tx CH38_2478 MHz_1Mbps
Radiated Test Cases	Mode 1: GFSK Tx CH00_2402 MHz_1Mbps
	Mode 2: GFSK Tx CH19_2440 MHz_1Mbps
	Mode 3: GFSK Tx CH38_2478 MHz_1Mbps

2.3 Connection Diagram of Test System

< GFSK Tx Mode >

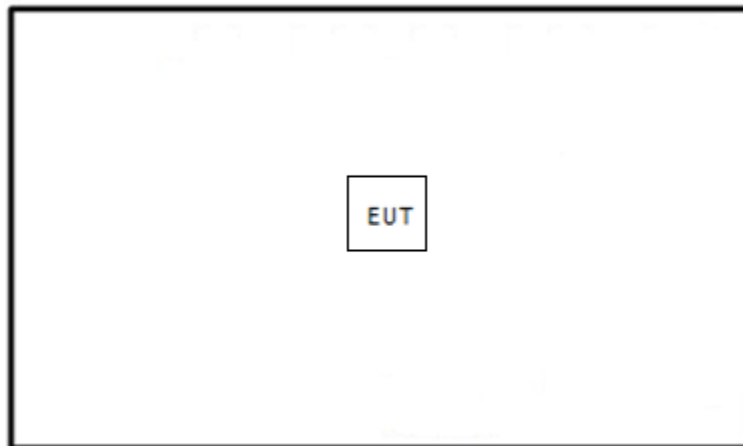



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude 3400	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

The RF test items, utility “SecureCRT” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

6 dB Bandwidth Plot on Channel 00

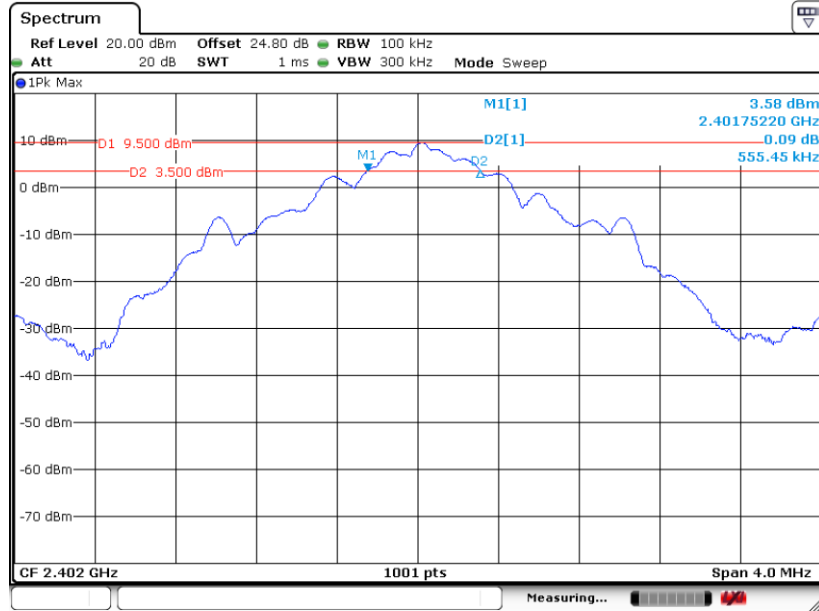




6 dB Bandwidth Plot on Channel 19

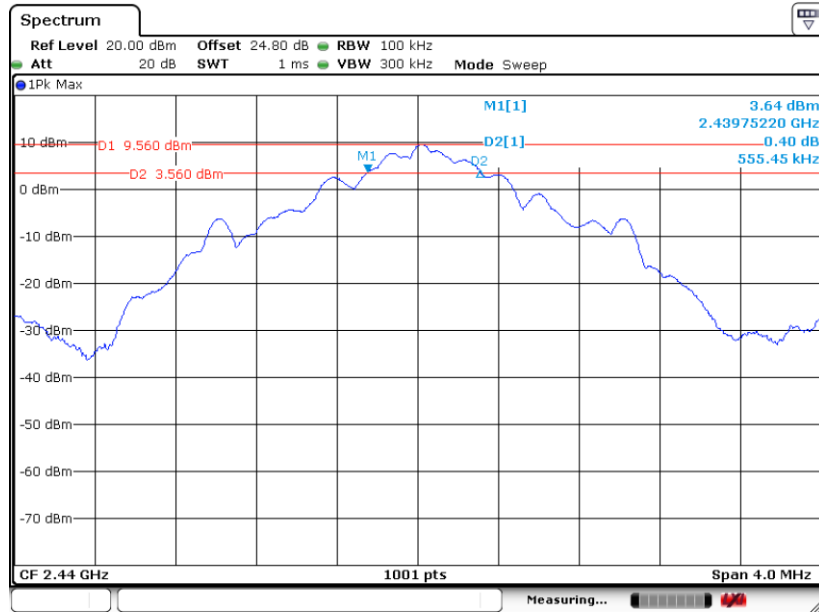

6 dB Bandwidth Plot on Channel 38

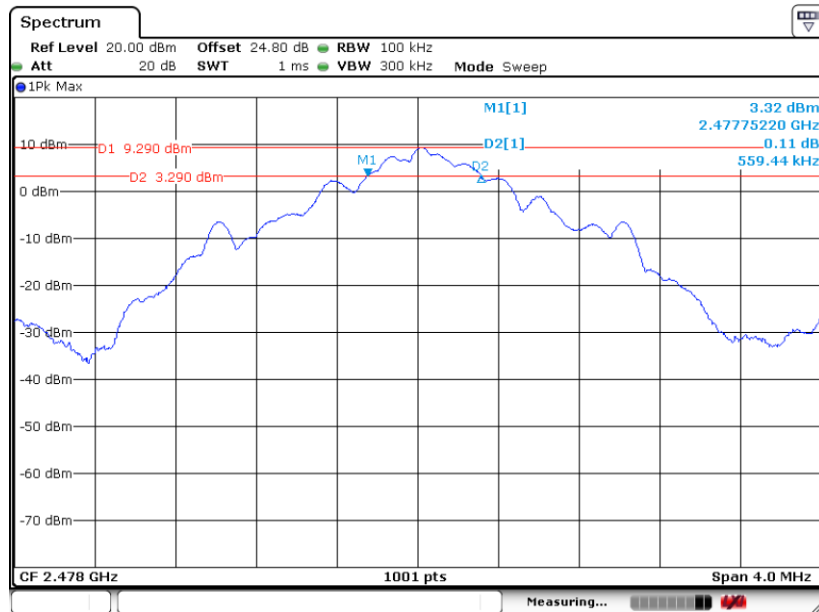




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


99% Bandwidth Plot on Channel 00

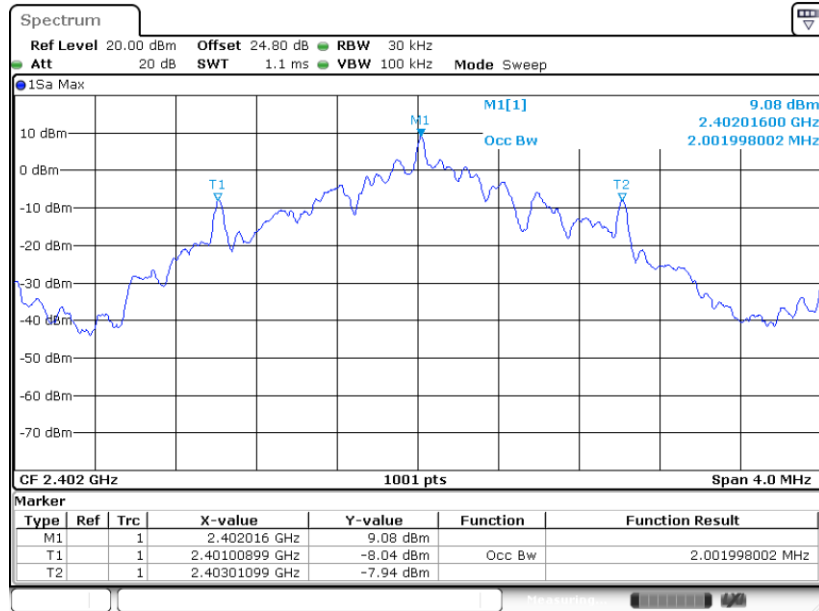

Date: 16.APR.2020 20:40:37




99% Occupied Bandwidth Plot on Channel 19

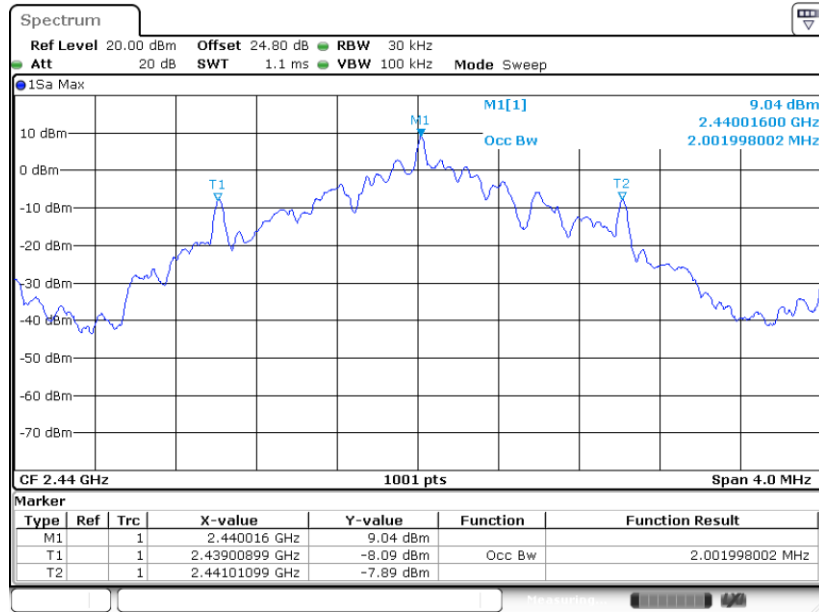

Date: 16.APR.2020 20:51:05

99% Occupied Bandwidth Plot on Channel 38

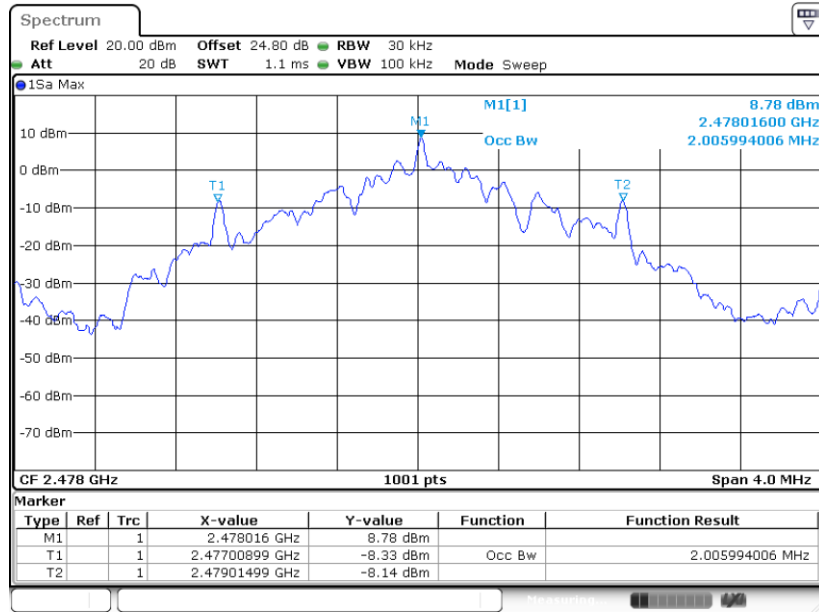

Date: 16.APR.2020 21:02:50

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGP-M-G
2. The RF output of EUT was connected to the power meter by RF cable and attenuator.
3. The path loss was compensated to the results for each measurement.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

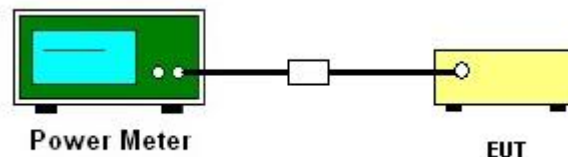

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

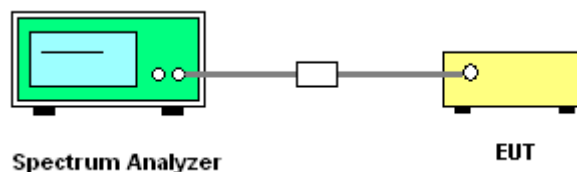


3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 00

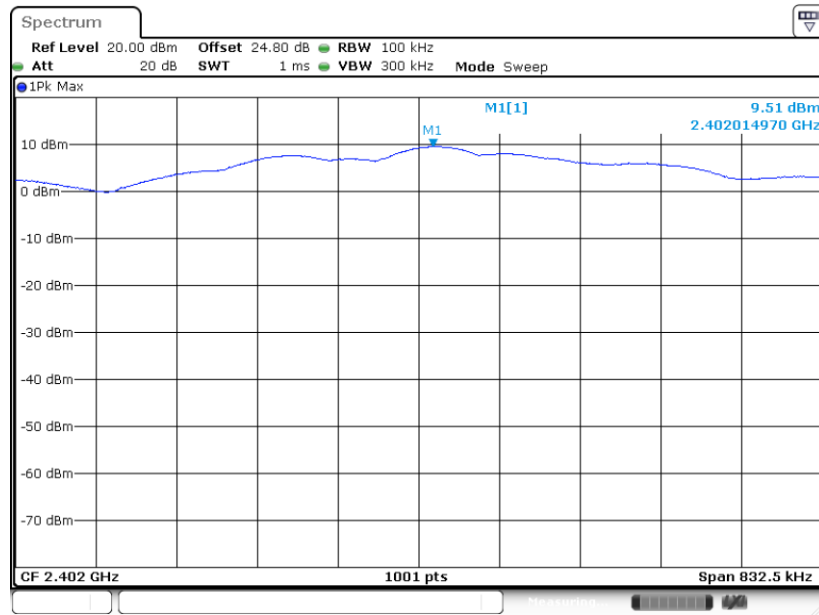

Date: 16.APR.2020 20:36:14


PSD 100kHz Plot on Channel 19

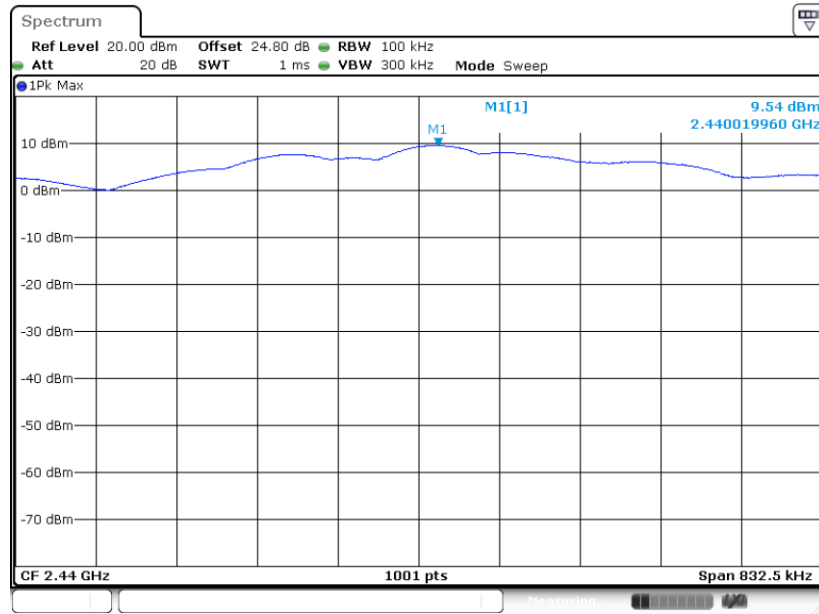

Date: 16.APR.2020 20:49:48



PSD 100kHz Plot on Channel 38

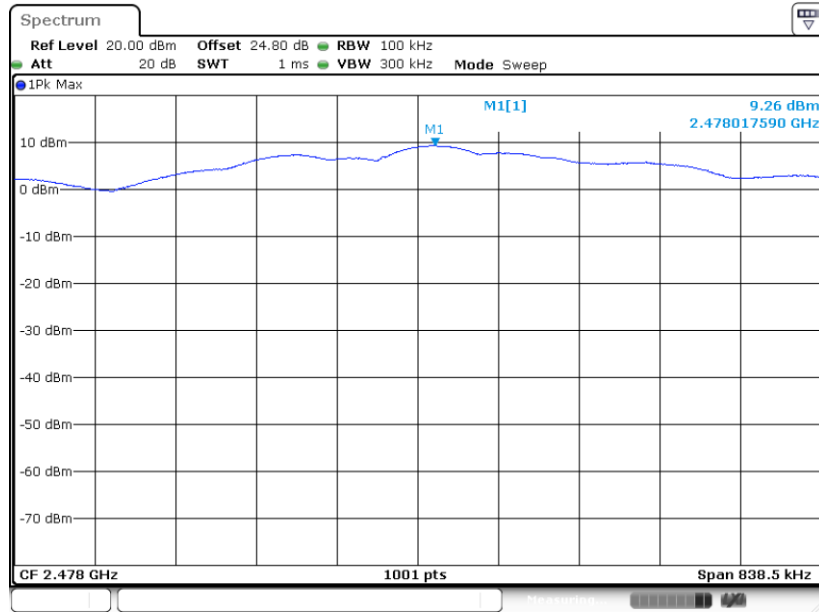


Date: 16.APR.2020 20:58:50




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on Channel 00

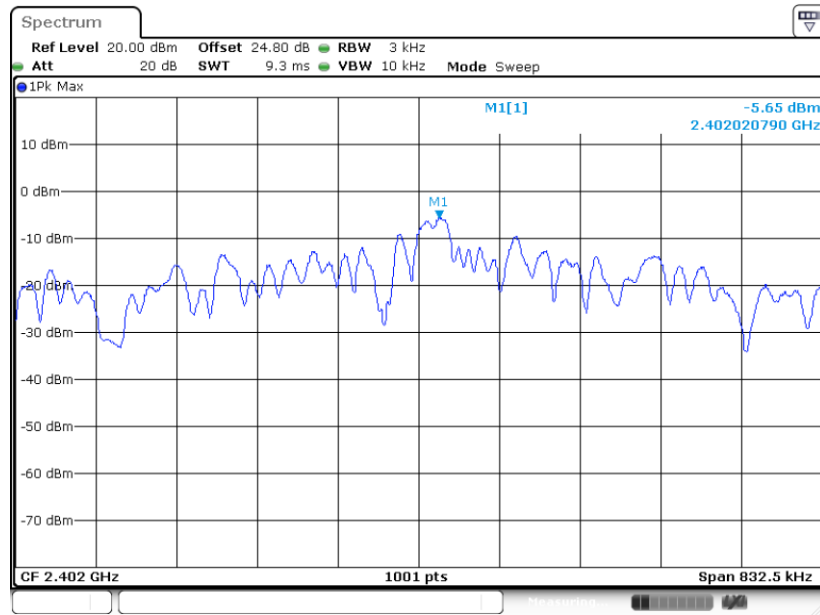

Date: 16.APR.2020 20:35:53


PSD 3kHz Plot on Channel 19

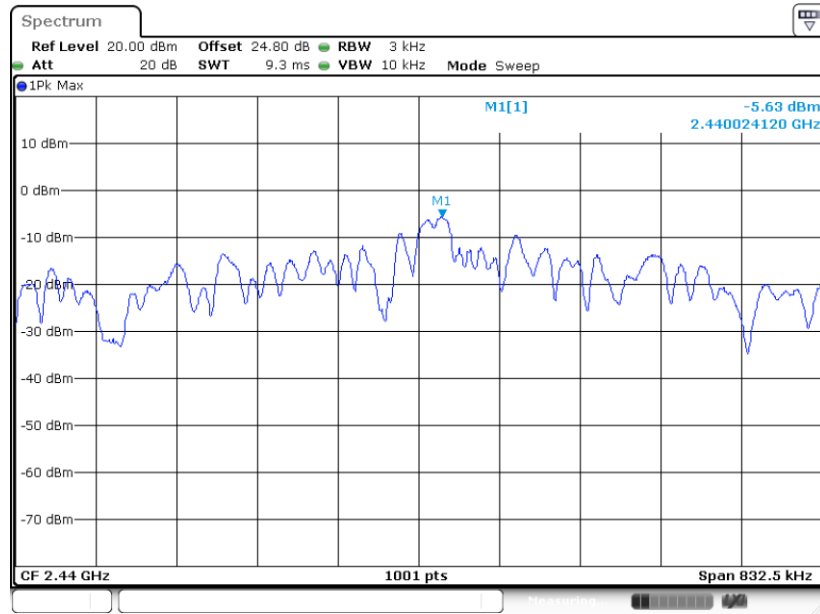

Date: 16.APR.2020 20:48:42



PSD 3kHz Plot on Channel 38

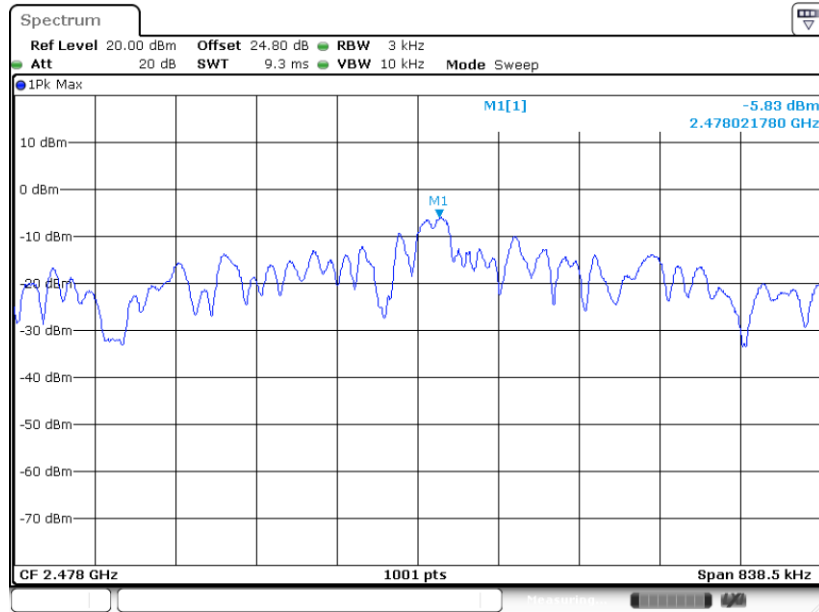

Date: 16.APR.2020 20:58:34

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

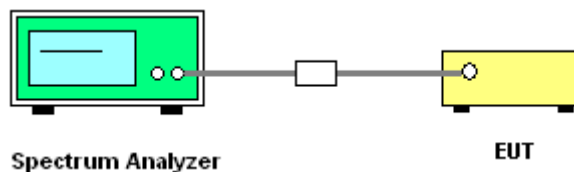




3.4.5 Test Result of Conducted Band Edges Plots

Low Band Edge Plot on Channel 00

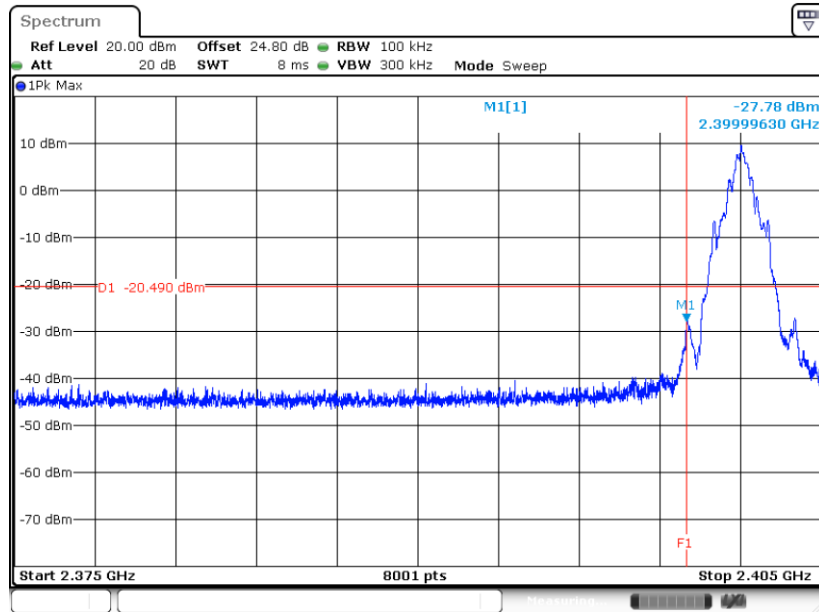


High Band Edge Plot on Channel 38

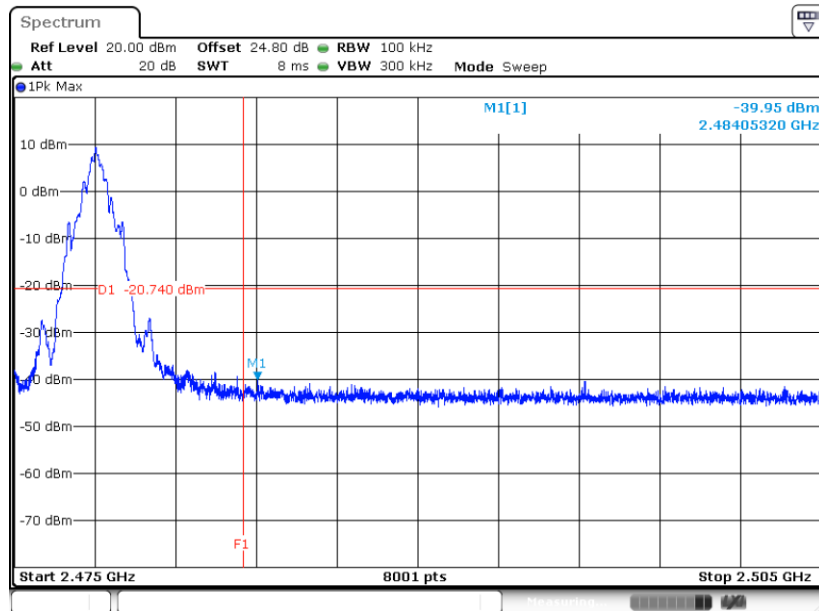




3.4.6 Test Result of Conducted Spurious Emission Plots

Conducted Spurious Emission Plot on 1Mbps GFSK Channel 00

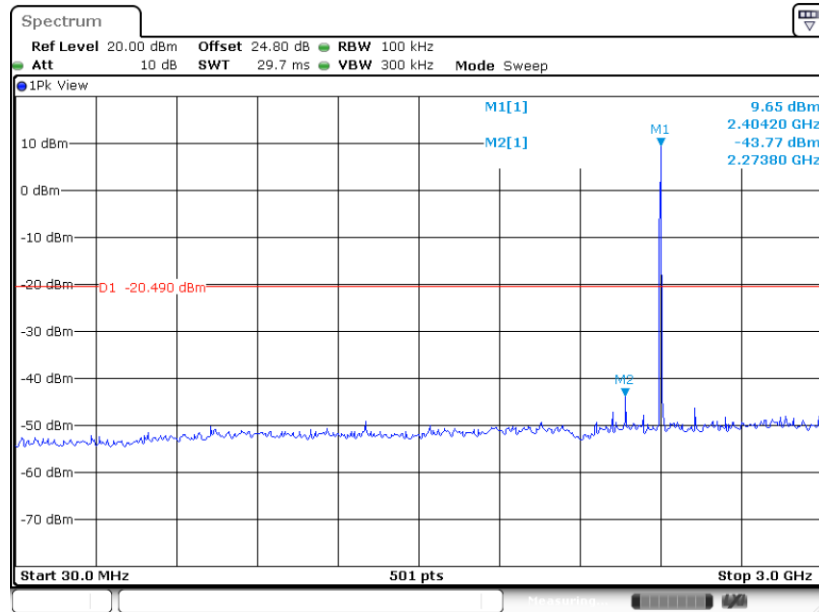

Date: 16.APR.2020 20:40:04


Conducted Spurious Emission Plot on 1Mbps GFSK Channel 00

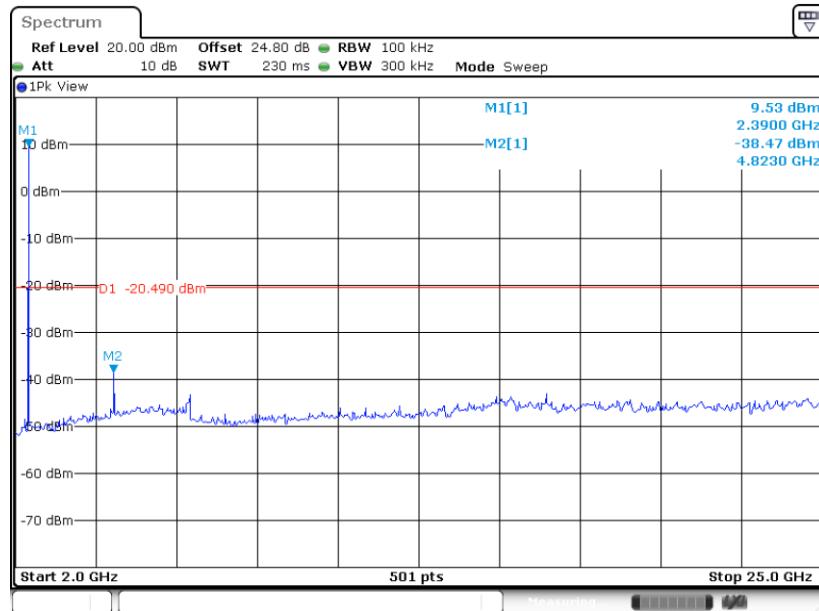


Date: 16.APR.2020 20:40:18



Conducted Spurious Emission Plot on 1Mbps GFSK Channel 19

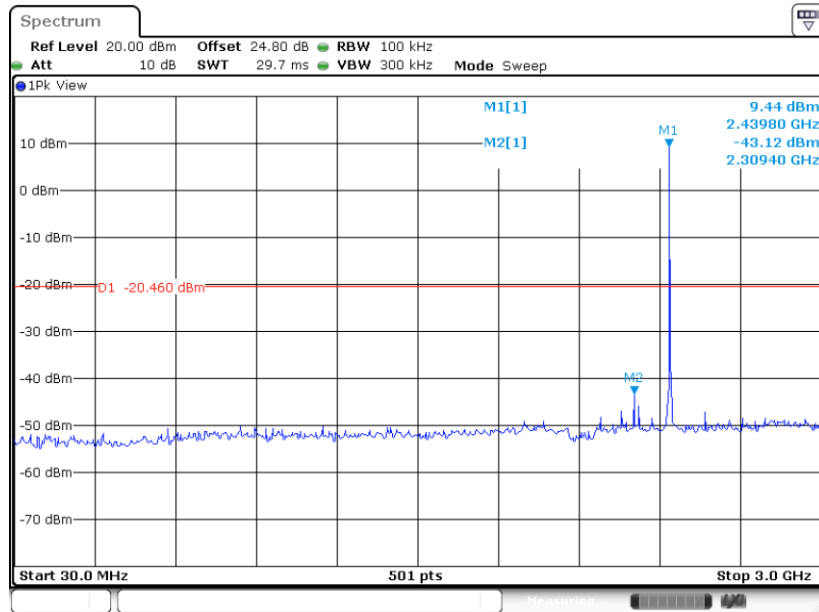


Conducted Spurious Emission Plot on 1Mbps GFSK Channel 19

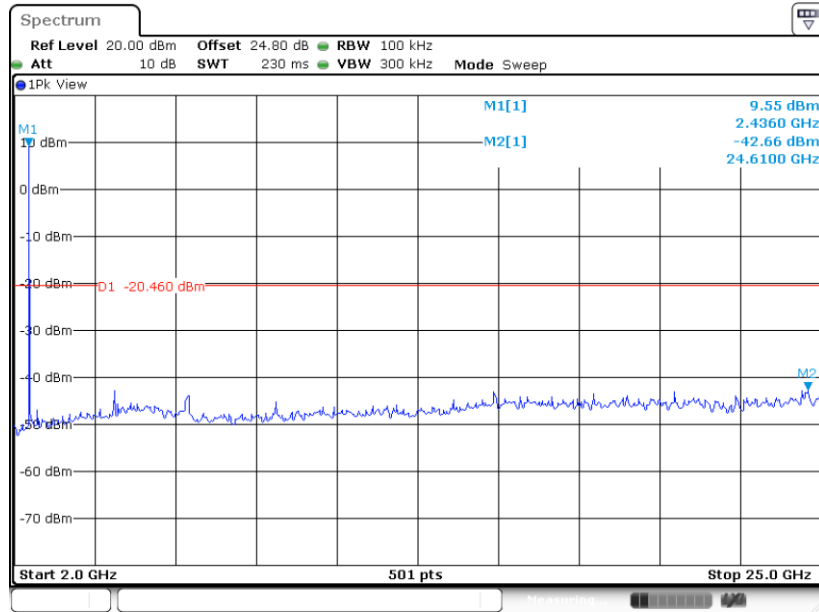




Conducted Spurious Emission Plot on 1Mbps GFSK Channel 38

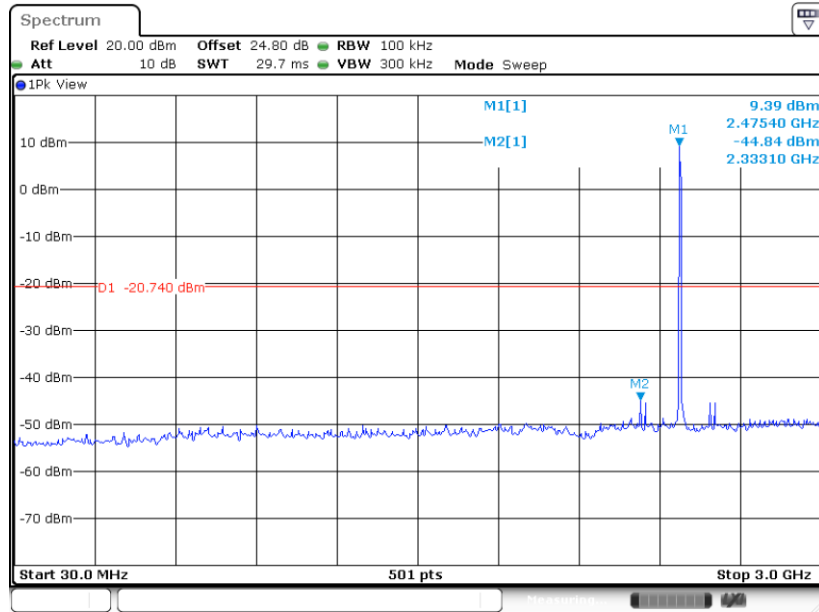

Date: 16.APR.2020 21:02:02

Conducted Spurious Emission Plot on 1Mbps GFSK Channel 38

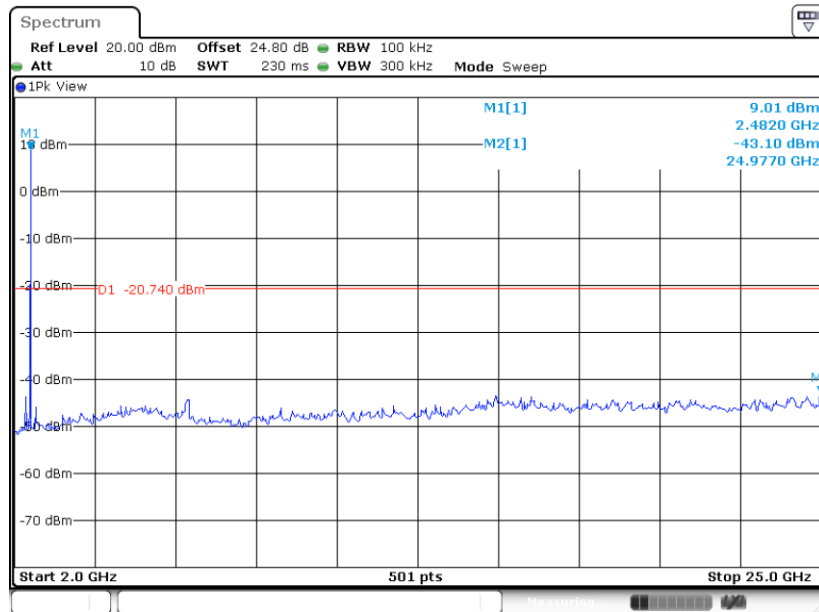

Date: 16.APR.2020 21:02:23



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

**3.5.3 Test Procedures**

1. The testing follows the ANSI C63.10 Section 11.12.2 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - Set RBW = 1 MHz, VBW= 3MHz; Sweep = auto; Detector function = RMS; Averaging type = power;
 - Perform a trace average of at least 100 traces.


A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed $[10 \log (1 / D)]$, where D is the duty cycle.

3.5.4 Test Setup


For radiated emissions below 30MHz

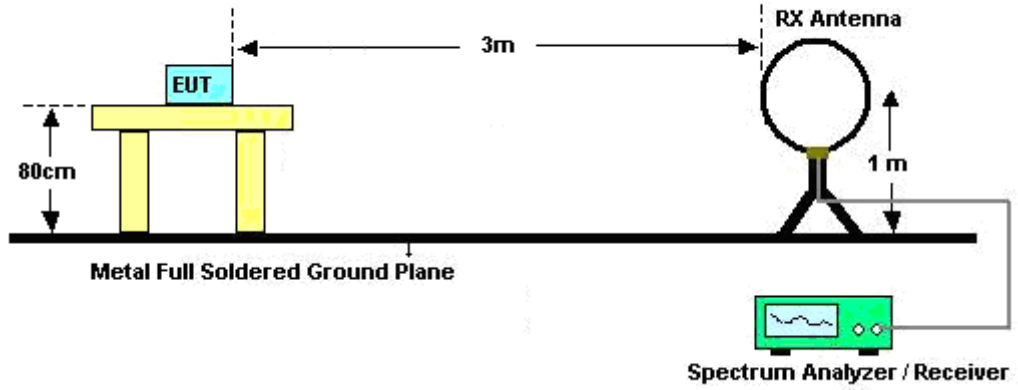

For radiated emissions from 30MHz to 1GHz

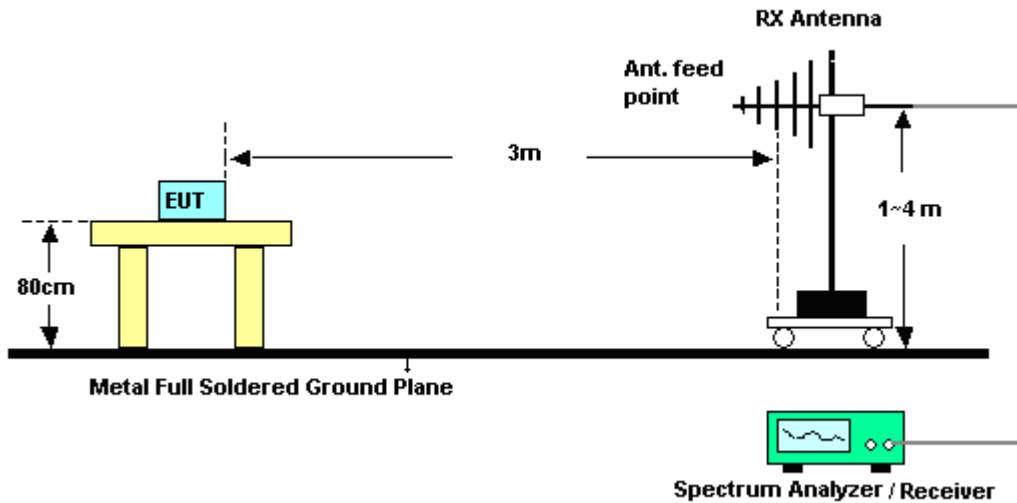

For radiated emissions above 1GHz

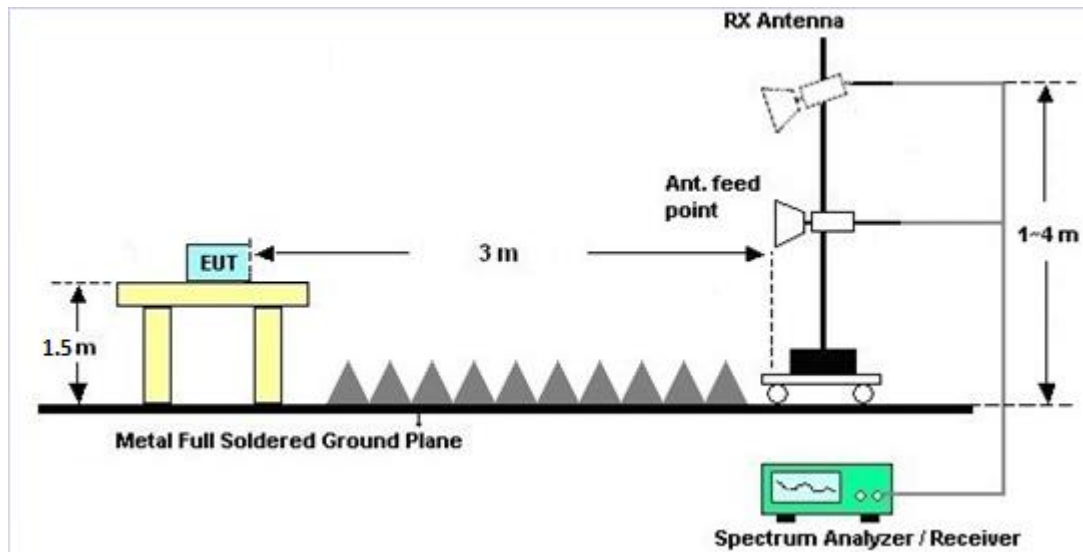

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H2	41410069	N/A	Jun. 17, 2019	Apr. 16, 2020	Jun. 16, 2020	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054S NO10	10MHz~6GHz	Dec. 23, 2019	Apr. 16, 2020	Dec. 22, 2020	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Jul. 15, 2019	Apr. 16, 2020	Jul. 14, 2020	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC130048 4	N/A	Aug. 22, 2019	Apr. 16, 2020	Aug. 21, 2020	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Dec. 26, 2019	Apr. 15, 2020~ Apr. 23, 2020	Dec. 25, 2020	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	37059 & 01	30MHz~1GHz	Oct. 12, 2019	Apr. 15, 2020~ Apr. 23, 2020	Oct. 11, 2020	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	9120D-132 8	1GHz ~ 18GHz	Nov. 14, 2019	Apr. 15, 2020~ Apr. 23, 2020	Nov. 13, 2020	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 584	18GHz ~ 40GHz	Dec. 10, 2019	Apr. 15, 2020~ Apr. 23, 2020	Dec. 09, 2020	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 25, 2020	Apr. 15, 2020~ Apr. 23, 2020	Mar. 24, 2021	Radiation (03CH12-HY)
Preamplifier	Jet-Power	JPA00101800 -30-10P	160118000 2	1GHz~18GHz	Feb. 07, 2020	Apr. 15, 2020~ Apr. 23, 2020	Feb. 06, 2021	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY532701 48	1GHz~26.5GHz	Dec. 20, 2019	Apr. 15, 2020~ Apr. 23, 2020	Dec. 19, 2020	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 13, 2019	Apr. 15, 2020~ Apr. 23, 2020	Dec. 12, 2020	Radiation (03CH12-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101408	10Hz~40GHz	Aug. 13, 2019	Apr. 15, 2020~ Apr. 23, 2020	Aug. 12, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30M-18G	Dec. 12, 2019	Apr. 15, 2020~ Apr. 23, 2020	Dec. 11, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Feb. 25, 2020	Apr. 15, 2020~ Apr. 23, 2020	Feb. 24, 2021	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30M~40GHz	Feb. 25, 2020	Apr. 15, 2020~ Apr. 23, 2020	Feb. 24, 2021	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 15, 2020~ Apr. 23, 2020	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1m~4m	N/A	Apr. 15, 2020~ Apr. 23, 2020	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Apr. 15, 2020~ Apr. 23, 2020	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-00098 9	N/A	N/A	Apr. 15, 2020~ Apr. 23, 2020	N/A	Radiation (03CH12-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.6
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Hank Hsu	Temperature:	21~25	°C
Test Date:	2020/4/16	Relative Humidity:	51~54	%

TEST RESULTS DATA **6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
GFSK	1Mbps	1	0	2402	2.002	0.555	0.50	Pass
GFSK	1Mbps	1	19	2440	2.002	0.555	0.50	Pass
GFSK	1Mbps	1	38	2478	2.006	0.559	0.50	Pass

TEST RESULTS DATA **Average Power Table**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
GFSK	1Mbps	1	0	2402	9.60	30.00	3.00	12.60	36.00	Pass
GFSK	1Mbps	1	19	2440	9.40	30.00	3.00	12.40	36.00	Pass
GFSK	1Mbps	1	38	2478	9.20	30.00	3.00	12.20	36.00	Pass

TEST RESULTS DATA **Peak Power Density**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
GFSK	1Mbps	1	0	2402	9.51	-5.65	3.00	8.00	Pass
GFSK	1Mbps	1	19	2440	9.54	-5.63	3.00	8.00	Pass
GFSK	1Mbps	1	38	2478	9.26	-5.83	3.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.



Appendix B. Radiated Spurious Emission

Test Engineer :	Jack Cheng , Lance Chiang, and Chuan Chu	Temperature :	22.5~25.2°C
		Relative Humidity :	58.3~66.5%

2.4GHz 2400~2483.5MHz

GFSK (Band Edge @ 3m)

GFSK	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
GFSK 2402MHz		2331.735	57.99	-16.01	74	43.86	27.67	15.76	29.3	157	328	P	H	
		2328.06	48.28	-5.72	54	34.14	27.69	15.75	29.3	156	328	A	H	
	*	2402	104.93	-	-	90.84	27.5	15.87	29.28	156	328	P	H	
	*	2402	99	-	-	84.91	27.5	15.87	29.28	156	328	A	H	
													H	
			2357.145	57.12	-16.88	74	43.02	27.59	15.8	29.29	300	358	P	V
			2318.19	48.33	-5.67	54	34.16	27.73	15.74	29.3	300	358	A	V
	*		2402	102.07	-	-	87.98	27.5	15.87	29.28	300	358	P	V
	*		2402	95.77	-	-	81.68	27.5	15.87	29.28	300	358	A	V
														V
GFSK 2440MHz		2346.54	57.37	-16.63	74	43.27	27.61	15.78	29.29	105	329	P	H	
		2333.1	48.57	-5.43	54	34.44	27.67	15.76	29.3	105	329	A	H	
	*	2440	105.92	-	-	91.85	27.42	15.92	29.27	105	329	P	H	
	*	2440	100.83	-	-	86.76	27.42	15.92	29.27	105	329	A	H	
			2487.89	57.45	-16.55	74	43.39	27.32	15.99	29.25	105	329	P	H
			2490.83	48.21	-5.79	54	34.15	27.32	15.99	29.25	105	329	A	H
			2326.24	56.71	-17.29	74	42.56	27.7	15.75	29.3	320	326	P	V
			2316.86	48.23	-5.77	54	34.07	27.73	15.73	29.3	320	326	A	V
	*		2440	101.13	-	-	87.06	27.42	15.92	29.27	320	326	P	V
	*		2440	95.52	-	-	81.45	27.42	15.92	29.27	320	326	A	V
			2487.05	57.24	-16.76	74	43.17	27.33	15.99	29.25	320	326	P	V
			2486.56	48.24	-5.76	54	34.17	27.33	15.99	29.25	320	326	A	V



GFSK 2478MHz	*	2478	106.23	-	-	92.17	27.34	15.98	29.26	127	319	P	H
	*	2478	101.05	-	-	86.99	27.34	15.98	29.26	127	319	A	H
		2483.6	61.28	-12.72	74	47.22	27.33	15.98	29.25	127	319	P	H
		2483.56	50.48	-3.52	54	36.42	27.33	15.98	29.25	127	319	A	H
													H
	*	2478	101.41	-	-	87.35	27.34	15.98	29.26	315	318	P	V
	*	2478	95.68	-	-	81.62	27.34	15.98	29.26	315	318	A	V
		2483.76	58.11	-15.89	74	44.05	27.33	15.98	29.25	315	318	P	V
		2483.88	49.32	-4.68	54	35.26	27.33	15.98	29.25	315	318	A	V
													V
Remark	<ol style="list-style-type: none"> 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz

GFSK (Harmonic @ 3m)

GFSK	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
GFSK 2402MHz		4804	54.78	-19.22	74	74.3	31.1	9.84	60.46	316	244	P	H
		4804	50.8	-3.2	54	70.32	31.1	9.84	60.46	316	244	A	H
													H
		4804	53.25	-20.75	74	72.77	31.1	9.84	60.46	369	213	P	V
		4804	48.92	-5.08	54	68.44	31.1	9.84	60.46	369	213	A	V
GFSK 2440MHz		4880	48.7	-25.3	74	68.07	31.1	9.93	60.4	100	0	P	H
		7320	44.66	-29.34	74	54.78	36.38	12.61	59.11	100	0	P	H
													H
		4880	47.42	-26.58	74	66.79	31.1	9.93	60.4	100	0	P	V
		7320	45.56	-28.44	74	55.68	36.38	12.61	59.11	100	0	P	V
GFSK 2478MHz		4956	49.18	-24.82	74	68.28	31.22	10.02	60.34	100	0	P	H
		7434	44.84	-29.16	74	54.6	36.4	12.88	59.04	100	0	P	H
													H
		4956	45.48	-28.52	74	64.58	31.22	10.02	60.34	100	0	P	V
		7434	44.85	-29.15	74	54.61	36.4	12.88	59.04	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz GFSK (LF)

GFSK	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz GFSK LF		30	23.66	-16.34	40	28.48	24.31	0.51	29.64	-	-	P	H	
		129.91	20.96	-22.54	43.5	31.99	17.46	1.14	29.63	-	-	P	H	
		260.86	24.98	-21.02	46	32.87	19.76	1.73	29.38	-	-	P	H	
		406.36	28.11	-17.89	46	33.24	21.97	2.09	29.19	-	-	P	H	
		722.58	34.32	-11.68	46	32.81	27.07	3.02	28.58	100	0	P	H	
		971.87	37.41	-16.59	54	30.89	30.83	3.78	28.09	-	-	P	H	
														H
			30.97	31.62	-8.38	40	36.74	24.01	0.51	29.64	-	-	P	V
			92.08	23.8	-19.7	43.5	37.69	14.9	0.86	29.65	-	-	P	V
			341.37	27.84	-18.16	46	35.2	20	1.9	29.26	-	-	P	V
			729.37	38.82	-7.18	46	36.84	27.5	3.07	28.59	-	-	P	V
			746.83	39.49	-6.51	46	36.88	28.05	3.17	28.61	100	0	P	V
			972.84	37.06	-16.94	54	30.56	30.81	3.78	28.09	-	-	P	V
														V
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

GFSK	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	Limit Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
GFSK		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 00		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2402MHz													

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Jack Cheng , Lance Chiang, and Chuan Chu	Temperature :	22.5~25.2°C
		Relative Humidity :	58.3~66.5%

Note symbol

-L	Low channel location
-R	High channel location



2.4GHz 2400~2483.5MHz





GFSK (Band Edge @ 3m)

GFSK	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	GFSK 2402MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_91200_1328 HORIZONTAL Detector : Peak Project : 902007-01 Setting : 0</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_91200_1328 HORIZONTAL Detector : Peak Project : 902007-01 Setting : 0</p>
Avg.	<p>Site : 03CH12-HY Condition : AV6_BE_54 3m HORN_91200_1328 HORIZONTAL Detector : RMS Project : 902007-01 Setting : 0 Trace : Average Duty Factor : 3.37</p>	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_1328 HORIZONTAL Detector : RMS Project : 902007-01 Setting : 0 Trace : Average Duty Factor : 3.37</p>





GFSK		2.4GHz 2400~2483.5MHz Band Edge @ 3m	
		GFSK 2402MHz	
		Vertical	Fundamental
Peak	<p>Site : 03CH2-HY Condition : PEAK_BE_74 3m HORN_9120_1328 VERTICAL Detector : Peak Project : 9D2007-01 Setting : 0</p>	<p>Site : 03CH2-HY Condition : PEAK_F4 3m HORN_9120_1328 VERTICAL Detector : Peak Project : 9D2007-01 Setting : 0</p>	
	<p>Site : 03CH2-HY Condition : AVG_BE_54 3m HORN_9120_1328 VERTICAL Detector : RMS Project : 9D2007-01 Setting : 0 Trace : Average Duty Factor : 3.37</p>	<p>Site : 03CH2-HY Condition : AVG_F4 3m HORN_9120_1328 VERTICAL Detector : RMS Project : 9D2007-01 Setting : 0 Trace : Average Duty Factor : 3.37</p>	

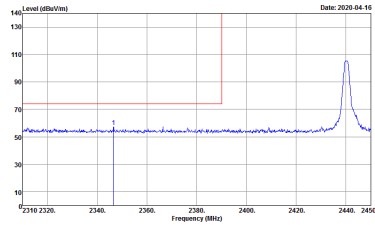
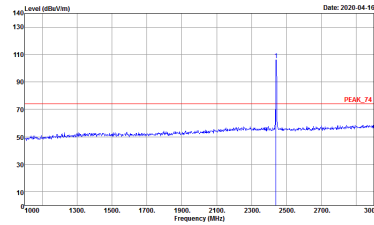
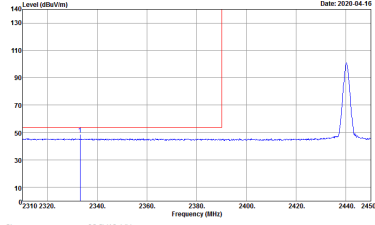
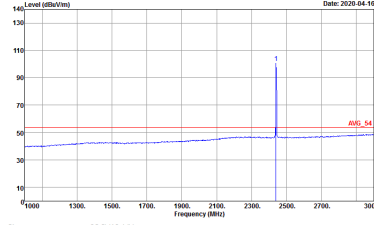


GFSK		2.4GHz 2400~2483.5MHz Band Edge @ 3m	
		GFSK 2440MHz - L	
		Horizontal	Fundamental
Peak	 <p>Site : 03CH2-HY Condition : PEAK_BE_74 3m HORN_91200_1328 HORIZONTAL Condition : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 9D2007-01 Setting : 0</p>	 <p>Site : 03CH2-HY Condition : PEAK_F4 3m HORN_91200_1328 HORIZONTAL Condition : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 9D2007-01 Setting : 0</p>	
Avg.	 <p>Site : 03CH2-HY Condition : AVG_BE_54 3m HORN_91200_1328 HORIZONTAL Condition : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : RMS Project : 9D2007-01 Setting : 0 Trace : Average Duty Factor : 3.37</p>	 <p>Site : 03CH2-HY Condition : AVG_F4 3m HORN_91200_1328 HORIZONTAL Condition : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : RMS Project : 9D2007-01 Setting : 0 Trace : Average Duty Factor : 3.37</p>	

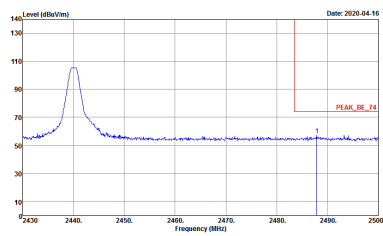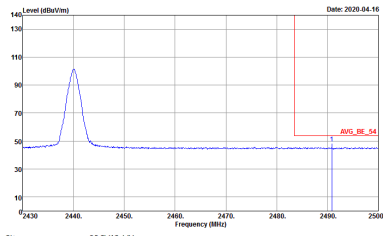

GFSK	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
GFSK 2440MHz - R		
Horizontal		Fundamental
<p>Peak</p>	 <p>Site : 03CH2-HY Condition : PEAK_BE_74 3m HORN_91200_1328 HORIZONTAL Detector : Peak Project : 902007-01 Setting : 0</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH2-HY Condition : AVG_BE_54 3m HORN_91200_1328 HORIZONTAL Detector : RMS Project : 902007-01 Setting : 0 Trace : Average Duty Factor : 3.37</p>	<p>Left blank</p>

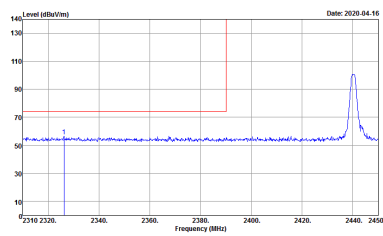
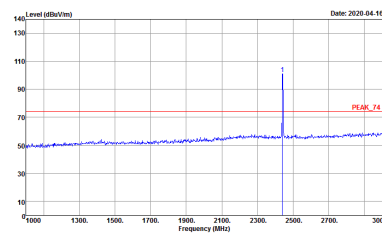
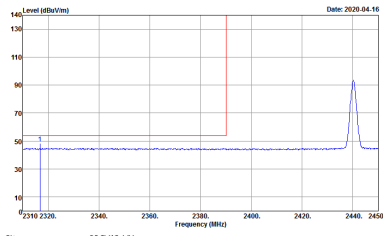
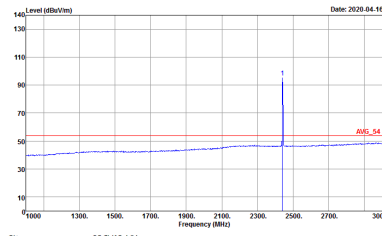


GFSK		2.4GHz 2400~2483.5MHz Band Edge @ 3m	
		GFSK 2440MHz - L	
		Vertical	Fundamental
Peak			
	<p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_91200_1328 VERTICAL Detector : Peak Project : 9D2007-01 Setting : 0</p>	<p>Site : 03CH12-HY Condition : PEAK_F4 3m HORN_91200_1328 VERTICAL Detector : Peak Project : 9D2007-01 Setting : 0</p>	
Avg.			
	<p>Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_91200_1328 VERTICAL Detector : RMS Project : 9D2007-01 Setting : 0 Trace : Average Duty Factor : 3.37</p>	<p>Site : 03CH12-HY Condition : AVG_F4 3m HORN_91200_1328 VERTICAL Detector : RMS Project : 9D2007-01 Setting : 0 Trace : Average Duty Factor : 3.37</p>	







GFSK	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	GFSK 2402MHz - R	
	Vertical	Fundamental
Peak	<p>Site : 03CH2-HY Condition : PEAK_BE_74 3m HORN_9120D_132B VERTICAL Detector : Peak Project : 902007-01 Setting : 0</p>	Left blank
Avg.	<p>Site : 03CH2-HY Condition : AVG_BE_54 3m HORN_9120D_132B VERTICAL Detector : RMS Project : 902007-01 Setting : 0 Trace : Average Duty Factor : 3.37</p>	Left blank

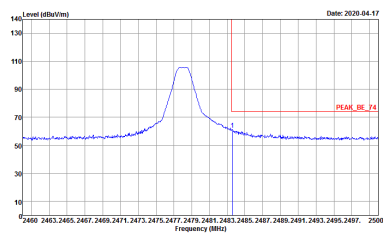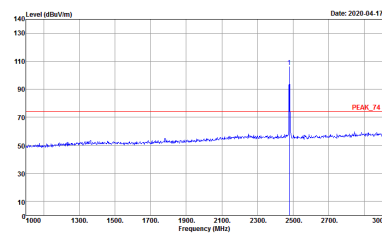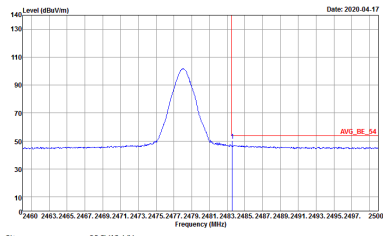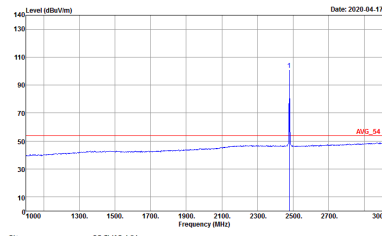

GFSK		2.4GHz 2400~2483.5MHz Band Edge @ 3m	
		GFSK 2478MHz	
		Horizontal	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 9D2007-01 Setting : 0</p>	 <p>Site : 03CH12-HY Condition : PEAK_F4 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 9D2007-01 Setting : 0</p>	
	 <p>Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL Detector : RMS Project : 9D2007-01 Trace : Average Duty Factor : 3.37</p>	 <p>Site : 03CH12-HY Condition : AVG_F4 3m HORN_9120D_1328 HORIZONTAL Detector : RMS Project : 9D2007-01 Trace : Average Duty Factor : 3.37</p>	

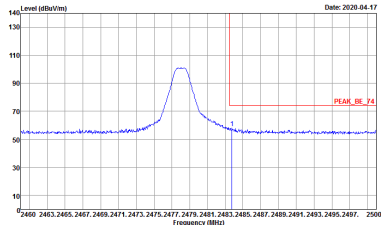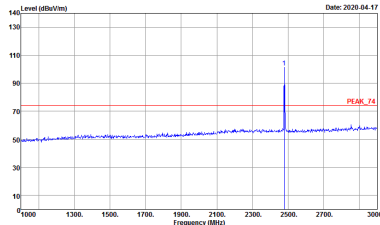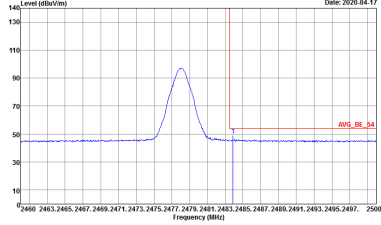
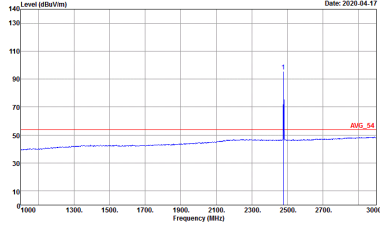


GFSK		2.4GHz 2400~2483.5MHz Band Edge @ 3m	
		GFSK 2478MHz	
		Vertical	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_91200_1328 VERTICAL Detector : Peak Project : 9D2007-01 Setting : 0</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_91200_1328 VERTICAL Detector : Peak Project : 9D2007-01 Setting : 0</p>	
	 <p>Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_91200_1328 VERTICAL Detector : RMS Project : 9D2007-01 Setting : 0 Trace : Average Duty Factor : 3.37</p>	 <p>Site : 03CH12-HY Condition : AVG_54 3m HORN_91200_1328 HORIZONTAL Detector : RMS Project : 9D2007-01 Setting : 0 Trace : Average Duty Factor : 3.37</p>	



2.4GHz 2400~2483.5MHz

GFSK (Harmonic @ 3m)

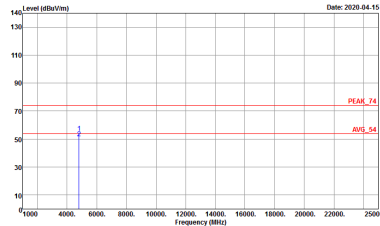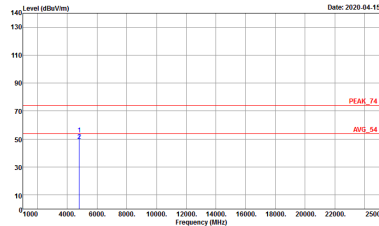GFSK	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	GFSK 2402MHz	
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_91200_1328 HORIZONTAL Detector : Peak Project : 9D2007-01 Setting : 0</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_91200_1328 VERTICAL Detector : Peak Project : 9D2007-01 Setting : 0</p>



GFSK	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	GFSK 2440MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_91200_1328 HORIZONTAL Detector : Peak Project : 9D2007-01 Setting : :0</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_91200_1328 VERTICAL Detector : Peak Project : 9D2007-01 Setting : :0</p>





GFSK	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	GFSK 2478MHz	
	Horizontal	Vertical
Peak	<p>Site : 03CH2-HY Condition : PEAK_74 3m HORN_91200_1328 HORIZONTAL Detector : Peak Project : 9D2007-01 Setting : 0</p>	<p>Site : 03CH2-HY Condition : PEAK_74 3m HORN_91200_1328 VERTICAL Detector : Peak Project : 9D2007-01 Setting : 0</p>



Emission below 1GHz

2.4GHz GFSK (LF)

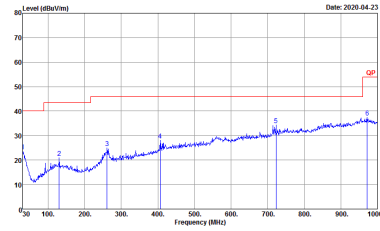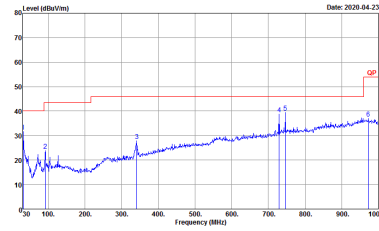
GFSK	2.4GHz 2400~2483.5MHz	
	GFSK LF	
	Horizontal	Vertical
<p>QP / Peak</p>	 <p>Site : 03CH12-HY Condition : QP 3m BIL06_6111D_37059 HORIZONTAL Detector : Peak Project : 9D2007-01</p>	 <p>Site : 03CH12-HY Condition : QP 3m BIL06_6111D_37059 VERTICAL Detector : Peak Project : 9D2007-01</p>



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
GFSK	46.46	105	9.52	10kHz	3.33

GFSK

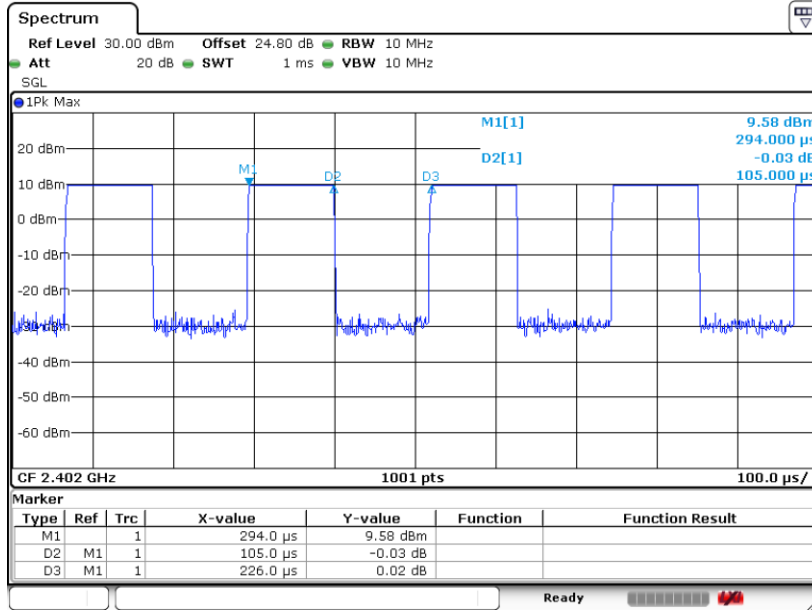

Date: 16.APR.2020 20:34:09